Illinois Environmental Protection Agency

Bureau of Land • 1021 North Grand Avenue East • P.O. Box 19276 • Springfield • Illinois • 62794-9276

ILLINOIS EPA RCRA CORRECTIVE ACTION CERTIFICATION

This certification must accompany any document submitted to Illinois EPA in accordance with the corrective action requirements set forth in a facility's RCRA permit. The original and two copies of all documents submitted must be provided.

1.0 Facility Identification

Name: Equilon Enterprises LLC d/b/a/ SOPUS
County: Madison
Street Address: 900 South Central Ave
Site No. (IEPA): 1191150002
City: Roxana
Site No. (USEPA): ILD080 012 305

2.0 Owner Information

Name: Not Applicable
Mail Address:
City:
State: Zip Code:
Contact Name:
Contact Title:
Phone:

3.0 Operator Information

Name: Equilon Enterprises LLC d/b/a/ SOPUS
Mail Address: 128 East Center Street
City: Nazareth
State: PA Zip Code: 18064
Contact Name: Leroy Bealer
Contact Title: Principal Program Manager
Phone: 484-632-7955

4.0 Type of Submission (check applicable item and provide requested information, as applicable)

☐ RFI Phase I Workplan/Report
☐ RFI Phase II Workplan/Report
☐ CMP Report;
☒ Other (describe): Soil Vapor Sampling and SVE Monitoring Report - 2nd Quarter 2021

IEPA Permit Log No. B-43R
Date of Last IEPA Letter on Project: October 1, 2020
Log No. of Last IEPA Letter on Project: B-43R-CA-95, CA-98

Does this submittal include groundwater information: ☒ Yes ☐ No

Date of Submittal: July 26, 2021

5.0 Description of Submittal: (briefly describe what is being submitted and its purpose)

Soil Vapor Sampling and SVE Monitoring Report for the 2nd Quarter 2021 in the project area located in the Village of Roxana, Illinois.

6.0 Documents Submitted (identify all documents in submittal, including cover letter; give dates of all documents)

Cover letter, RCRA Corrective Action Certification, and Soil Vapor Sampling and SVE Monitoring Report - 2nd Quarter 2021 dated 7/26/2021. Copy of submittal also sent directly to R. Watson and G. Search of IPEA.

7.0 Certification Statement

(This statement is part of the overall certification being provided by the owner/operator, professional and laboratory in Items 7.1, 7.2 and 7.3 below). The activities described in the subject submittals have been carried out in accordance with procedures approved by Illinois EPA. I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

7.1 Owner/Operator Certification

(Must be completed for all submittals. Certification and signature requirements are set forth in 35 IAC 702.126.) All submittals pertaining to the corrective action requirements set forth in a RCRA Permit must be signed by the person designated below (or by a duly authorized representative of that person):

1. For a Corporation, by a principal executive officer of at least the level of vice president.
2. For a Partnership or Sole Proprietorship, by a general partner or the proprietor, respectively.
3. For a Governmental Entity, by either a principal executive officer or a ranking elected official.

A person is a duly authorized representative only if:

1. the authorization is made in writing by a person described above; and
2. the written authorization is provided with this submittal (a copy of a previously submitted authorization can be used).

Owner Signature: *NOT APPLICABLE* Date: _____

Title: _____

Operator Signature: _____ Date: 7/16/2021

Title: **Principal Program Manager**

For: Roxana, IL 2021 SV-SVE Report

Date of Submission: 7/26/2021

7.2 Professional Certification (if necessary)

Work carried out in this submittal or the regulations may also be subject to other laws governing professional services, such as the Illinois Professional Land Surveyor Act of 1989, the Professional Engineering Practice Act of 1989, the Professional Geologist Licensing Act, and the Structural Engineering Licensing Act of 1989. No one is relieved from compliance with these laws and the regulations adopted pursuant to these laws. All work that falls within the scope and definitions of these laws must be performed in compliance with them. The Illinois EPA may refer any discovered violation of these laws to the appropriate regulating authority.

Any person who knowingly makes a false, fictitious, or fraudulent material statement, orally or in writing, to the Illinois EPA commits a Class 4 felony. A second or subsequent offense after conviction is a Class 3 felony. (415 ILCS 5/44 (h))

Professional's Signature: Wendy M Pennington Date: 7/15/2021

Professional's Name Wendy M. Pennington

Address 100 N. Broadway, 20th Floor

City St. Louis

State MO Zip Code 63102

Phone 314-429-0100

Professional's Seal:



7.3 Laboratory Certification (if necessary)

The sample collection, handling, preservation, preparation and analysis efforts for which this laboratory was responsible were carried out in accordance with procedures approved by Illinois EPA.

Name of Laboratory Eurofins Air Toxics LLC

SepidehSaeed Date: 06/15/21

Signature of Laboratory Responsible Officer

Mailing Address of Laboratory

Address 180 Blue Ravine Rd Suite B

City Folsom

State CA Zip Code 95630

Sepideh Saeed -Vice President

Name and Title of Laboratory Responsible Officer

AECOM
100 N. Broadway,
20th Floor
St. Louis, MO 63102
www.aecom.com

314 429 0100 tel
314 429 0462 fax

July 26, 2021

Mr. Kenneth E. Smith, PE
Manager, Permit Section
Illinois Environmental Protection Agency
Division of Land Pollution Control
Bureau of Land
1021 North Grand Avenue East
Springfield, Illinois 62702

Soil Vapor Sampling and SVE Monitoring Report – 2nd Quarter 2021
Roxana, Illinois
1191150002 – Madison County
Equilon Enterprises LLC d/b/a Shell Oil Products US
Log No. B-43R

Dear Mr. Smith:

On behalf of Equilon Enterprises LLC d/b/a Shell Oil Products US (SOPUS), AECOM is submitting the enclosed report for your review. This report includes information required by Condition 11 of the Illinois Environmental Protection Agency's (IEPA) letter dated May 28, 2015.

Copies of this submittal are being sent separately directly to Rob Watson and Gina Search with the IEPA.

If you have any questions during your review, please contact Leroy Bealer, SOPUS Principal Program Manager, at leroy.bealer@shell.com (484-632-7955), or Wendy Pennington at wendy.pennington@aecom.com (314-452-8929).

Sincerely,

AECOM, on behalf of Shell Oil Products US

Samuel Fisher, CHMM
Environmental Scientist

Wendy Pennington, PE
Project Manager

Enclosures: RCRA Corrective Action Certification Form and Report (original plus 1 copy)

cc:
Leroy Bealer, SOPUS
Thomas Morgan, Phillips 66
Rob Watson, IEPA, Springfield
Gina Search, IEPA, Collinsville
Yuping Ding, Illinois Department of Public Health
Erika Reynolds, Greensfelder
Repositories – Roxana Public Library, website

AECOM

2nd Quarter 2021 Report

Soil Vapor Sampling and SVE Monitoring Report Roxana, Illinois

Prepared for:
Equilon Enterprises LLC dba Shell Oil Products US
Roxana, Illinois

Project Number: 60648474
July 2021

Table of Contents

1 Introduction 1
2 Description of Subsurface Conditions 2
2.1 Geology 2
2.2 Hydrogeology 2
3 Soil Vapor Sampling and Analytical Procedures 4
3.1 Vapor Monitoring Port Sampling 4
3.2 Health & Safety, Decontamination, and Investigation Derived Waste 5
3.3 Sample Handling and Laboratory Testing 5
3.4 Data Quality Review and Data Management 6
4 Soil Vapor Sampling Results 7
4.1 Data Quality Review Results 7
4.2 Soil Vapor Analytical Results 7
4.3 Conceptual Site Model 8
5 Soil Vapor Extraction System Monitoring 10
5.1 SVE System Operations 10
5.2 SVE Maintenance Activities and Modifications 10
5.3 SVE System Monitoring Results 10
5.4 SVE System Operation Evaluation 11
5.5 SVE System Modification Recommendations 15
6 Conclusions 16
7 References 17

Tables

Table 1 Historical Groundwater Monitoring Well Gauging Results
Table 2 Soil VMP Depths
Table 3 Soil Vapor Sampling – Tedlar® Sampling Data
Table 4 Soil Vapor Screening Criteria
Table 5 Historical Summary of Soil Vapor Analytical Detections and Screening Results: Village – VOCs
Table 6 Historical Summary of Soil Vapor Analytical Detections and Screening Results: Public Works Yard and WRR – VOCs
Table 7 Historical Summary of Soil Vapor Analytical Results – Natural Gases
Table 8 SVE System Monthly Monitoring – SVE Sampling Data
Table 9 SVE System Monthly Monitoring – VMP Sampling Data
Table 10 SVE System Header and Exhaust Analytical Data

Figures

Figure 1 Investigation Area Location Map
Figure 2 Vapor Monitoring Point Sampling Locations
Figure 3 2Q21 Groundwater Contours
Figure 4 2Q21 Vapor Port Screen Comparison to Groundwater Elevations
Figure 5 2Q21 Summary of Benzene Soil Vapor Analytical Results – Village of Roxana
Figure 6 2Q21 Summary of Benzene Soil Vapor Analytical Results – Roxana Public Works Yard Area
Figure 7 2Q21 Summary of Benzene Soil Vapor Analytical Results – WRR
Figure 8 2Q21 Cross-Section with Benzene Soil Vapor Analytical Results – Chaffer Avenue
Figure 9 2Q21 Benzene Soil Vapor Distribution – 5 ft bgs
Figure 10 2Q21 Benzene Soil Vapor Distribution – 10 ft bgs
Figure 11 2Q21 Benzene Soil Vapor Distribution – 25 ft bgs
Figure 12 2Q21 Dissolved Phase Benzene Concentrations in Groundwater
Figure 13 2Q21 Thickness of LNAPL – West Fenceline
Figure 14 SVE System Layout

Appendices

Appendix A Site Background and Regulatory History
Appendix B Benzene and Methane Charts
Appendix C SVE System Operating Efficiency and Maintenance Chronology
Appendix D SVE System Leg Flow Rates
Appendix E Total Header Hydrocarbon Concentrations
Appendix F SVE System Flow Rates

1 Introduction

AECOM Technical Services, Inc. (AECOM) is submitting this 2nd Quarter 2021 Soil Vapor Sampling and SVE Monitoring Report on behalf of Equilon Enterprises LLC dba Shell Oil Products US (SOPUS). SOPUS has been conducting a subsurface investigation in the Village of Roxana in the area generally bounded by the alley north of East 1st Street, the Roxana Public Works Yard, Illinois Route 111, and the property boundary (a/k/a West Fenceline [WFL]) of the WRB Refining, LP (WRB) Wood River Refinery (WRR) (**Figure 1**). Additional investigation has been conducted inside the WRR; this work was conducted in cooperation with WRB/Phillips 66 (P66). For the purposes of presentation in this report only, the combined area is collectively referred to as the "Investigation Area." The Investigation Area includes a portion of a residential area in the Village of Roxana, Roxana Public Works Yard, and the adjoining portions of the WRR. For the purposes of this report, the term "Village" is used to denote the residential area generally bounded by the alley north of East 1st Street (north), 8th Street (south), Chaffer Avenue (east), and Illinois Route 111 (South Central Avenue) (west). The Investigation Area and locations of VMPs in the soil vapor sampling network are presented on **Figure 2.** Site background information and regulatory history are presented in **Appendix A**.

2 Description of Subsurface Conditions

This section summarizes the current understanding of the Investigation Area geology and hydrogeology.

2.1 Geology

The Investigation Area is located approximately 1.5 miles east of the Mississippi River within the American Bottoms floodplain. The surface topography is generally flat; however, it slopes downward to the west-southwest in the southwestern portion of the Village, with a total drop in elevation of approximately 15 feet across the area.

The ground surface in the Village within the Investigation Area, where not developed with structures, is primarily grass covered with paved (i.e., chip and seal, asphalt, etc.) alleys and streets. Beneath any man-made fill material, the subsurface conditions generally consist of silty clay underlain by sands to the depths investigated.

Subsurface stratigraphy within the Investigation Area generally consists of the following materials, from the ground surface down.

- Fill – (mainly clay, some gravel and cinders, etc.) Extends from the surface to approximately six feet below ground surface (bgs).
- Clay/Silt – (primarily silty clay) Where present, the clay generally extends from the base of the fill to approximately 12 feet bgs.
- Sand – (consisting primarily of fine to medium grained (which coarsens with depth) sand with some silt and clay, especially at the shallower depths). The sand begins at the base of the clay (or base of the fill if the clay is not present) and extends to the total depth of the borings.

Discontinuous lower permeability lenses of clay with some silt and sand are occasionally present. These lenses vary in thickness from 1 inch to a few feet and do not appear to be laterally (or vertically) extensive.

Cross-sections depicting the underlying geology were previously presented in the Dissolved Phase Groundwater Investigation and P-60 Free Phase Product Delineation Report (URS, 2010a). These cross-sections were developed based on information provided on cone penetration test (CPT) logs and soil boring logs. A modified cross-section presenting analytical data is discussed in **Section 4.3** of this report.

2.2 Hydrogeology

Groundwater in the sand underlying the Investigation Area is the primary source for large volume water production in the area (e.g., industrial and municipal supply). Prior to development in the area, the natural movement of groundwater was toward the west (toward the Mississippi River). Since development in the area, groundwater pumping has altered the groundwater flow in the area to flow toward nearby pumping wells (e.g., WRR, BP, etc.).

The water table encountered during the 2nd Quarter 2021 (2Q21) was at a depth of approximately 24 to 39 feet bgs (approximate elevation of 405 to 406.5 feet North American Vertical Datum [NAVD 88]). The variation in depth of groundwater from the ground surface is partially due to a change in surface elevation across the Investigation Area. As a result, there is generally a 15 to 30 foot thick vadose (unsaturated) zone in the sand. Groundwater levels in most wells in the vicinity of the West Fenceline have fallen approximately 0.25 to 1 feet since the 1Q21 gauging event. Water level measurements collected during the 2Q21 groundwater gauging event and historical water level measurements collected over the past three years are provided in **Table 1**. Depth to product (if present) and depth to water were noted in electronic format using Dell Rugged laptop computers (computer), or similar, and on groundwater field gauging sheets.

There are discontinuous low permeability silt and clay lenses above the water table (approximately 20 to 30 feet bgs) mixed with silt and sand. These lenses are isolated and limited in occurrence. There are additional discontinuous clay lenses at a depth of approximately 35 to 45 feet bgs localized in the area between East 2nd and 4th Street and Chaffer Avenue. These may be above or below the water table depending on groundwater conditions. As a result, the groundwater contours displayed on **Figures 3** and **4** show a slight mounding in this area.

The potentiometric surface observed during the 2Q21 comprehensive groundwater monitoring well gauging[1] (**Figure 3**) illustrates groundwater flow within the Village and WRR. **Figure 4** provides the groundwater potentiometric surface for the Investigation Area in 2Q21.

[1] 2Q21 comprehensive groundwater monitoring well gauging performed April 5-7, 2021.

3 Soil Vapor Sampling and Analytical Procedures

The 2Q21 soil vapor sampling event was performed in accordance with ASTM D-7663-12 and applicable site-specific Standard Operating Procedures (SOPs) that incorporate previous IEPA comments, conditions, and/or modifications. Current SOPs are provided to the IEPA as updates are made. The 2Q21 soil vapor sampling event was conducted May 3-12, and June 3, 2021.

3.1 Vapor Monitoring Port Sampling

The soil vapor sampling network currently consists of 63 VMP locations (**Figure 2**), of which 46 locations are currently being utilized for quarterly sampling. VMPs in the quarterly sampling program are generally screened at four depths[2] at each location. The individual VMPs are labeled and color-coded in the field from shallow to deep by using the color scheme of yellow (1st interval), blue (2nd interval), green (3rd interval), and red (4th interval). Additional VMPs installed as part of a supplemental sampling event in 2nd Quarter 2010 (2Q10) are color-coded white (10-foot depth). Vapor ports installed during 3Q11 and 4Q11 do not have the shallow (5-foot depth) port included and begin with the blue interval port. Soil VMP depths are provided in **Table 2**.

Saturated VMP Screens – The groundwater monitoring well gauging results suggested that 29 of the VMP screens were submerged beneath the water table (or a temporary water condition) during 2Q21; details are provided below. This is a relatively greater number of VMPs as compared to typical quarters and is believed to be in part the result of elevated groundwater conditions.

- Two 1st interval VMPs, VMP-25-5 and VMP-55-5, held vacuum during the attempted purge and were most likely submerged. The screens for VMP-25-5 and VMP-55-5 are within fill material, and it is not unusual for shallow water to be trapped in the fill.
- Three 2nd interval VMPs, VMP-23-10, VMP-25-9.5 and VMP-55-10, held vacuum during the attempted purge and were most likely submerged. The screens for VMP-25-9.5 and VMP-55-10 are within fill material, and it is not unusual for shallow water to be trapped in the fill.
- Four 3rd interval VMPs, VMP-1-23.5, VMP-25-21, VMP-32-20 and VMP-48-20, held vacuum during the attempted purge and was most likely submerged.
- Nineteen 4th interval VMPs, VMP-2-42, VMP-4-39, VMP-5-40, VMP-6-39, VMP-7-38, VMP-9-38.5, VMP-10-30, VMP-11-38, VMP-12-39, VMP-14-29, VMP-15-29, VMP-20-39.5, VMP-23-40, VMP-29-40, VMP-30-40, VMP-32-30, VMP-55-30, VMP-56-38.5, and VMP-64-28 held vacuum during the attempted purge and were most likely submerged.
- The 5th interval VMP, VMP-3-39, held vacuum during the attempted purge and was most likely submerged.

VMPs that were submerged and could not be sampled during 2Q21 are identified on **Figures 4** through **6**.

Re-samples – VMP-45-10 was re-sampled on June 3, 2021, due to helium concentration in the initial sample as received by the laboratory. Results from the re-sample are included in this report; results from the initial sample are retained in the project file.

VMP-21-10, VMP-22-38, VMP-49-20, and VMP-53-10 were re-sampled on June 3, 2021 due to anomalous results in the initial samples. The results from the re-samples were consistent with data from past sampling events.

[2] With the exception of single shallow ports at VMP-17, 18, 19, three ports at VMP-41 through VMP-45, VMP-56, and five ports at VMP-3.

Field measurements from this event and the previous three quarterly events are provided on **Table 3**.

3.2 Health & Safety, Decontamination, and Investigation Derived Waste

Health & Safety

The quarterly sampling activities were performed in accordance with the project-specific Health and Safety Plan (HASP), dated February 4, 2021 (AECOM, 2021a).

In addition to HASP guidance, quarterly activities were performed in accordance with federal, state, AECOM, and site-specific COVID-19 procedures, following safe working precautions and social distancing recommendations.

Prior to beginning site work and at the start of work each day, a daily safety meeting was held. The purpose of this meeting was to discuss the day's planned activities and to address any potential health and safety concerns. As a part of the daily safety meeting, job safety analyses (now known as Task Hazard Assessments [THAs]) were prepared to address task specific safety concerns.

Field personnel primarily wore U.S. Environmental Protection Agency (USEPA) modified Level D personal protective equipment (PPE), which included hard hat, steel-toed boots, safety glasses, etc. In addition, work within the WRR was performed wearing flame retardant clothing (FRCs) per WRR requirements (in areas where required).

A PID with a 10.6 electron volt (eV) probe, combustible gas indicator (CGI), UltraRAE 3000 with benzene specific measuring tubes, and individual hydrogen sulfide gas detectors (for locations inside WRR) were used as needed during the field activities to monitor air quality. Field instruments were calibrated prior to use each day in accordance with the manufacturer's specifications.

Decontamination

Field personnel and equipment underwent decontamination procedures to ensure the health and safety of those present, to maintain sample integrity, and to minimize cross-contamination. Non-disposable/reusable sampling equipment (e.g., compression fittings) was decontaminated prior to the collection of each analytical sample by spraying with Liquinox® and distilled water. For stainless steel vapor sampling equipment, a 60 mL syringe was attached to the sampling apparatus and ambient air was pumped into the sampling apparatus to remove any internal dust particles or moisture. Personnel and small equipment decontamination was performed at the sample locations.

Investigation Derived Waste

Investigation derived waste (IDW) for this sampling event included PPE and expendable materials (e.g., gloves and tubing), which have a low probability of impact. The expendable materials were collected in trash bags and disposed with municipal waste.

3.3 Sample Handling and Laboratory Testing

Sample Handling

Stainless-steel canisters were labeled with a sample ID, site name, sampler initials, sample date and time, the parameters that were to be analyzed, and pre- and post- vacuum readings. After collection, the samples were logged on a chain-of-custody (COC) form and packaged in an UN-certified box to prevent damage during shipment. The samples were then delivered under the proper COC documentation to the laboratory. Due to the potential flammable nature of the vapor in the stainless-steel canisters, some soil vapor samples were shipped as hazardous materials according to applicable regulations.

Laboratory Testing

Eurofins Air Toxics, Inc. (Eurofins) of Folsom, California conducted the laboratory testing and the following test methods were utilized during this scope of work.

- Volatile Organic Compounds (VOCs) via Modified USEPA Total Organic-15 (TO-15) (including butane and isopentane) for soil vapor, and
- Natural gases (defined for purposes of this report as oxygen, nitrogen, carbon monoxide, methane, carbon dioxide, ethane, and ethene) via Modified ASTM D-1946 + Helium for soil vapor.

AECOM worked with the laboratory to attain reporting limits for compounds that have screening criteria so that, to the extent possible, the reporting limits were less than the screening criteria. In some cases, this necessitated reporting results between the method detection limit (MDL) and reporting limit (RL). Although results reported in this range are "J"-flagged as estimated, these data may be beneficial in cases where analytes would otherwise be reported as non-detect at RLs above screening levels. The laboratory provided AECOM with a list of their “base” RL capability for target analytes. Sample RLs are a product of base RL, pressurization dilution factor, and analytical dilution factor. Thus the sample RL will increase with increases in the dilution factor. Results that were reported below the RLs but above the MDL were “J”-flagged as estimated concentrations by the laboratory.

3.4 Data Quality Review and Data Management

Laboratory data were provided in electronic form, and analytical data were independently reviewed and qualified by AECOM. One hundred percent of the data were subjected to a data quality review. Evaluation of the data followed procedures outlined in the USEPA National Functional Guidelines for Superfund Organic Methods Data Review (USEPA, 2017). Specific criteria reviewed included sample receipt condition and holding times, method blanks, surrogate spike recoveries, laboratory control samples, results reported from dilutions, and field duplicate results. The laboratory assigned data qualifiers on the basis of their quality control or to indicate sample analysis information (e.g., dilutions). Data qualifiers were also added by AECOM, as appropriate, and are included on the data tables and laboratory result pages. Laboratory reports are included in the project files.

The screening values used were presented in the IEPA’s Tiered Approach to Corrective Action Objectives (TACO) Title 35 – Part 742; Appendix B, Table H: Tier 1 Soil Gas and Groundwater Remediation Objectives for the Indoor Inhalation Exposure Route – Diffusion and Advection for soil vapor effective July 15, 2013 (IEPA, 2013) and are shown on **Table 4**. Not all TO-15 Method constituents have TACO Tier 1 screening criteria.

Field data and documentation collected as part of this scope of work became part of the project file. AECOM maintains the files for the site and the database management system

4 Soil Vapor Sampling Results

4.1 Data Quality Review Results

A total of 141 (136 plus 5 re-samples) investigative samples and 16 field duplicate samples were collected from VMPs for analysis of VOCs (TO-15 analytes) and natural gases. Results qualified by AECOM due to method blank contamination, field duplicate results, and quality control sample recoveries are specified in the data reviews, which are retained in the project file. Based on method blanks, laboratory control sample recoveries, results reported from dilutions, and field duplicate results, soil vapor results reported for the analyses performed were accepted for their intended use.

4.2 Soil Vapor Analytical Results

The following TO-15 analytes were detected at concentrations at or above the reporting limit in soil vapor during the 2Q21 sampling event:

TO-15 Detections	
1,2,4-Trimethylbenzene	Ethanol
1,3,5-Trimethylbenzene	Ethylbenzene
1,4-Dichlorobenzene	Heptane
1,4-Dioxane	Hexane
2,2,4-Trimethylpentane	Isopentane
2-Butanone	Isopropylbenzene (Cumene)
2-Propanol	m,p-Xylenes
4-Ethyltoluene	n-Propylbenzene
Acetone	o-Xylene
Benzene	Styrene
Bromodichloromethane	Tetrachloroethene
Butane	Tetrahydrofuran
Carbon Disulfide	Toluene
Chlorobenzene	Trichloroethene
Chloroform	Trichlorofluromethane
Cyclohexane	

No analytes were detected at or above the reporting limit for the first time at any VMP in 2Q21. In addition to this list, several analytes were detected at estimated concentrations below the reporting limit. A cumulative tabular summary of the analytical results for the Village is presented in **Table 5**. A cumulative tabular summary of data for the Roxana Public Works Yard and WRR is presented in **Table 6**. Analytical results were compared to the previously mentioned screening values. Sample results from VMP-1 through VMP-9, VMP-18 through VMP-24, VMP-32, VMP-42 through VMP-45, VMP-47 through VMP-54, VMP-56, and VMP-62 through VMP-64 (located near residences in the Village) were compared against the residential screening criteria. Samples from VMP-10 through VMP-17, VMP-25, VMP-29, VMP-30, VMP-41, and VMP-55 (located at or near the Roxana Public Works Yard or WRR) were compared against the industrial/commercial screening criteria. A cumulative tabular summary of the results for natural gases is presented in **Table 7**. **Tables 5, 6,** and **7** present results for the reporting quarter plus three previous quarters.

Benzene was selected as the key analyte to characterize soil vapor in the paragraphs below.

Village

Benzene was detected above the RL in 0 of 118 samples, and was estimated between the MDL and RL in 27 of 118 samples collected in the Village. Estimated concentrations of benzene from locations within the Village ranged from an estimated 0.00042 mg/m^3 (VMP-47-30 duplicate) to an estimated 0.0031 mg/m^3 (VMP-21-10 re-sample). The results for samples collected in the Village indicate that no samples had a benzene concentration above the residential screening criterion (0.37 mg/m^3). The 2Q21 and historical results for benzene in soil vapor for samples collected in the Village are depicted on **Figure 5.**

Roxana Public Works Yard Area

Benzene was detected above the RL in 4 of 30 samples, and was estimated between the MDL and RL in 26 of 30 samples collected in the Roxana Public Works Yard and the area along Illinois Route 111 and Rand Avenue. Benzene concentrations ranged from an estimated 0.00045 mg/m^3 (VMP-14-20 duplicate) to 0.035 mg/m^3 (VMP-30-26). The results of samples collected from the Roxana Public Works Yard and area along Illinois Route 111 and Rand Avenue indicate that no samples exceeded the commercial/industrial screening criterion (2.8 mg/m^3) for benzene. The 2Q21 and historical results for benzene in soil vapor for samples collected in the Roxana Public Works Yard are depicted on **Figure 6**.

WRR

Benzene was detected above the RL in 3 of 8 samples, and was estimated between the MDL and RL in 2 of 8 samples collected in the WRR, and ranged in concentration from an estimated 0.00052 mg/m^3 (VMP-12-5) to 910 mg/m^3 (VMP-16-31). The results of samples collected in the WRR indicate that 2 samples exceeded the commercial/industrial screening criterion (2.8 mg/m^3) for benzene (VMP-16-19 and VMP-16-31). The 2Q21 and historical results for benzene in soil vapor for samples collected in the WRR are depicted on **Figure 7**.

Benzene and Methane Charts

Charts of historical analytical benzene and methane concentrations for each VMP are depicted in **Appendix B**.

Natural Gas (Biogenic) Data

Natural gas data indicate that, where petroleum impacts are present, the concentration of methane increases from shallow to deep sample depths, while oxygen concentrations decrease from shallow to deep sample depths (methane and oxygen are generally inversely correlated in soil vapor). Over time, the trend in oxygen levels in most VMPs has been generally increasing since the SVE system has been operating. Higher oxygen levels (>5%) with lower methane levels indicate an environment capable of supporting aerobic biodegradation (Ririe et al., 1998). 2Q21 oxygen levels were within the range of historical values. A summary of the natural gas results is presented in **Table 7**.

4.3 Conceptual Site Model

Vapor Intrusion

The primary concern for shallow soil gas is the potential for intrusion through basement and/or building slabs. In September 2011, SOPUS began installation of a full scale SVE system to address the source of these vapors. The system became operational on January 31, 2012, following the completion of the 1st Quarter 2012 (1Q12) sampling effort. The objective of the SVE system is to mitigate vapors along the WFL of the WRR and in the vicinity of the Roxana Public Works Yard. Construction of the Roxana Public Works Yard portion of the SVE system was completed during 4Q12, and this portion became operational on December 3, 2012. Construction of the red line extension portion of the SVE system was completed during 4Q13, and this portion became operational on October 23, 2013. Construction of the blue line extension portion of the SVE system was completed during 4Q14, and this portion became operational on November 5, 2014. Refer to **Section 5** for further discussion on SVE system operation. **Figure 8** presents a cross-section along Chaffer Avenue with a vertical distribution of the benzene concentrations superimposed.

At most locations, oxygen is present in the shallow depths and little or no aromatic hydrocarbons (e.g., BTEX) are present. Carbon dioxide levels are relatively high throughout the soil column at many locations, which supports that degradation of petroleum hydrocarbons is occurring via aerobic biodegradation. Depending on groundwater fluctuations there can be up to 30 feet of open vadose zone which allows for biodegradation of constituents in soil vapor as they slowly diffuse upwards.

C Tech Development Corporation's Mining Visualization System PRO, Version 9.94 (MVS-PRO) was used to model the estimated distribution of benzene in the soil vapor above IEPA TACO screening criteria for 2Q21. **Figure 9**, **Figure 10**, and **Figure 11** present a horizontal distribution of benzene at 5, 10, and 25 ft. bgs, respectively. Contour lines are not depicted on **Figures 9** and **10** as sample concentrations at the 5 and 10 ft. depths across the study area were below the residential screening criterion (0.37 mg/m^3).

Groundwater Monitoring Well Gauging and Sampling

The results for groundwater monitoring well gauging and sampling are presented in the Interim Groundwater Monitoring Program – 2nd Quarter 2021 Report (AECOM, 2021b). **Figure 12** presents the estimated distribution of dissolved phase benzene in the groundwater. Light non-aqueous phase liquid (LNAPL) thicknesses observed during the 2Q21 comprehensive monitoring well gauging are presented in **Table 1** and shown on **Figure 13**.

5 Soil Vapor Extraction System Monitoring

As requested in IEPA's September 13, 2012 letter (IEPA, 2012), this section addresses operation of the SVE system. As such, the discussion in this section will address operation of the SVE system during 2Q21. SVE system history is further discussed in **Appendix A**.

5.1 SVE System Operations

The removal of hydrocarbons at the Investigation Area has continued due to daily operation of the SVE system. Natural gas continues to be used as a supplemental fuel for the RTO. Trends related to hydrocarbon concentrations monitored in the field are expected to continue, and these numbers are expected to improve as the system is operated and/or optimized.

5.2 SVE Maintenance Activities and Modifications

Scheduled system maintenance was performed as outlined in the manufacturers' suggested operations and maintenance (O&M) documents in the SVE Operations and Maintenance Plan – WRB Refining LP, Wood River Refinery & Roxana Public Works Site (AECOM, 2019). The scheduled maintenance includes routine lubrication, inspection of belts, oil levels, and emergency cutoffs, along with water levels and associated switches with the VLS units. The SVE system is shut down during periods of maintenance as a safety precaution. Timing and frequency of maintenance activities is dependent on the specific item. Checking and cleaning of filters and components exposed to dirt and/or the elements were performed as part of a routine weekly inspection. System SVE wells and associated vault inspections were also conducted on a monthly basis. The filters associated with the different system components are changed, as needed.

A chronology of maintenance and operation activities associated with the system during 2Q21 can be found in **Appendix C.**

Activities associated with system maintenance, modifications, and testing were appropriately documented both in the field maintenance log maintained on-site and in the office central (electronic) file.

5.3 SVE System Monitoring Results

The results of field screening samples collected during monthly effectiveness monitoring of the SVE wells and VMPs can be found in **Tables 8** and **9**, respectively. The results of the header and RTO exhaust analytical data can be found in **Table 10**. The data required pursuant to Condition Number 11 of the September 13, 2012 letter are contained in those tables.

SVE Well & VMP Tedlar® Sampling Details:

SVE and VMP well locations sampled during 2Q21 (listed below) are shown on **Figure 14**.

- SVE wells operating during at least one effectiveness monitoring event in 2Q21 were:
  - SVE-3R, SVE-42, SVE-43, SVE-44 and SVE-47 located in the Village.
  - SVE-20, SVE-30 through SVE-33, SVE-37 through SVE-39 located on WRR North Property.
  - SVE-21, SVE-24 and SVE-27 located in the Roxana Public Works Yard.

- Samples were collected from all operating SVE wells during 2Q21 effectiveness monitoring events.
    - SVE-39 was not sampled in April 2021 because a vehicle was parked on the well vault for the duration of sampling activities.

– Fifty VMP locations were sampled monthly during 2Q21 with one duplicate sample taken per twenty samples.

- VMP-1 through VMP-7, VMP-9, VMP-18, VMP-19, VMP-32, VMP-42, VMP-43, VMP-45, VMP-47 through VMP-54, VMP-56, and VMP-62 through VMP-64 are located in the Village.
- VMP-12, VMP-33 through VMP-39, VMP-46, VMP-57 through VMP-61, and VMP-65 are located on WRR North Property.
- VMP-10, VMP-11, VMP-13, VMP-14, VMP-17, VMP-29, VMP-30, and VMP-41 are located in the Roxana Public Works Yard.
- VMP-55 is located on an IDOT right-of-way west of the Roxana Public Works Yard.

With the exception of VMP-3, VMP-17, VMP-18, and VMP-19, VMP locations contain either 3 or 4 screen depths between 5 feet and 42 feet bgs. Location VMP-3 contains 5 screen depths, and locations VMP-17, VMP-18, and VMP-19 contain only one. VMP depths are provided in **Table 2**.

SVE System Monitoring Results:

– Natural gas is used as supplemental fuel for the RTO. See hydrocarbon mass removal calculation discussion details in **Section 5.4**.

– Vacuum measurements are collected monthly at the operating SVE wells and selected VMPs within the Village and WRR. Vacuum influence from the SVE system has been observed at VMP locations along the WFL and in the Roxana Public Works Yard. Vacuum data can be found in **Tables 8** and **9**.

– Air flow data collected from each operating SVE leg located at the RTO were obtained and can be found in **Appendix D**.

– The following SVE well adjustments were made in 2Q21:

    - Extraction well SVE-29 was closed on April 2, 2021.
    - Extraction well SVE-38 was closed and SVE-37 was opened on May 18, 2021.
    - Extraction wells SVE-3R, SVE-42, SVE-43, SVE-44, and SVE-47 were closed on May 25, 2021.

– WFL header concentrations and mass removal in 2Q21 were similar to 1Q21. Public Works header concentrations and mass removal decreased in 2Q21. See system downtime and hydrocarbon mass removal calculation discussion details in **Section 5.4**.

– During 2Q21, LNAPL was observed in SVE-45. The screened interval for this location was installed in the vadose zone above the groundwater table. During 2Q21 less than 0.5 gallons of LNAPL was recovered from SVE-45.

5.4 SVE System Operation Evaluation

For the months of April, May, and June 2021, the system uptime was 83.16%, 99.01%, and 99.5%, respectively.

April			May			June		
Total Time	Total Uptime	Percentage Uptime	Total Time	Total Uptime	Percentage Uptime	Total Time	Total Uptime	Percentage Uptime
720 hours	598.78 hours	83.16%	744 hours	736.64 hours	99.01%	720 hours	716.63 hours	99.53%

During 2Q21 the SVE system experienced five periods of unplanned downtime:

- April 22, 2021 the system experienced 2 hours of downtime associated with a chamber ready temperature lost alarm.

- May 21 through June 16, 2021 the system experienced downtime associated with power outages. Total downtime associated with power outages over this period was 7 hours and 57 minutes.

The remainder of downtime in 2Q21 was associated with routine (planned) maintenance activities. A summary table of system downtime by date for 2Q21 and the maintenance log can be found in **Appendix C**.

Due to changing system and environmental conditions, the amount of water introduced into the system varies and can accumulate in the piping which can inhibit air flow. Because water accumulates in the system piping, a periodic "sweeping" of the lines is required to purge the piping of accumulated water. By opening the well cap at the extraction well, ambient air is introduced to the piping at a high rate of flow forcing the water through the piping and sweeping it into the VLS units.

The three supplementary dilution lines associated with the system intake are typically closed. The manual dilution valve is also typically adjusted in small increments (usually <5%) and the system is closely monitored following system adjustments. SVE System blower speed was adjusted during 2Q21. Blower speed adjustments, manual dilution valve adjustments, and supplemental dilution utilization are noted in **Appendix C**.

Hydrocarbon Mass Removal

The total hydrocarbon mass of soil vapor removed by the SVE system was estimated by measuring the total hydrocarbon concentrations of the extracted soil vapors and the soil vapor flow rates into the SVE system. The results of the header and RTO exhaust analytical data can be found in **Table 10**. A FID calibrated with methane gas was used to measure total hydrocarbon concentrations in samples collected from the WFL Header and the Public Works Header. Total header hydrocarbon concentrations are included in **Appendix E**.

Total soil vapor flow rates were determined by calculating flow rates for the individual SVE legs that carry vapors from the SVE wells to the treatment system. Pressure, differential pressure, and temperature were measured in each leg. This data and Equation 2.7 and Equation 2.8 from USEPA Test Method 2 "Determination of Stack Gas Velocity and Volumetric Flow Rate (Type S Pitot Tube)" (Method 2) were used to calculate flow rates for each leg[3]. The flow rates for the appropriate legs were summed to determine flow rates in the WFL Header and the Public Works Header. Flow rates are included in **Appendix F**. Only flow rates and concentrations samples taken on the same day were used to calculate mass removal.

Hydrocarbon mass removed for the period between each concentration sample was calculated using the following equation:

[3] USEPA Method 2 "Determination of Stack Gas Velocity and Volumetric Flow Rate (Type S Pitot Tube)" specifies that a default pitot tube coefficient of 0.99 shall be used to calculate flow if the coefficient is unknown and the tube is designed according to the criteria of Sections 6.7.1 to 6.7.5 of this method. During the 2nd Quarter 2013 (2Q13), a review of the calculation was performed, and it was noted that a 0.67 coefficient should be used for the specific pitot tubes used to collect data at the site. AECOM has corrected the previously calculated mass removal to reflect the 0.67 pitot tube coefficient.

$$M_{THC} = Q \times 60 \times \varphi \times \frac{M_c}{385.1 \times 10^6} \times h \div 2000$$

$Where$:

$M_{THC} = Hydrocarbon\ mass\ removed\ for\ the\ period\ (tons)$

$Q = Total\ header\ flowrate\ (SCFM)$

$\varphi = Total\ hydrocarbon\ concentration\ (ppmv)$

$M_C = Molecular\ weight\ of\ total\ hydrocarbons\ \left({}^{lb}/_{lb-mole}\right)$

$h = Period\ SVE\ operating\ hours\ (hours)$

$Unit\ conversions$:

$60\ minutes\ per\ hour$

$\frac{M_c}{385.1 \times 10^6}\ converts\ (ppmv) to\ \left({}^{lb}/_{SCF}\right)$

$2000\ pounds\ per\ tons$

Header analytical results from **Table 10** were used to estimate vapor molecular weights in the WFL and Public Works headers. Based on the soil vapor analytical results of the WFL and Public Works header samples, the calculated molecular weights for this reporting period, 22.7 lb/lb-mole and 25.3 lb/lb-mole for the WFL and Public Works headers, respectively, were used to convert header hydrocarbon volume concentrations (ppmv) to mass concentrations (lb/SCF) in 2Q21.

The molecular weights, which are recalculated every quarter, are the average weight of all samples taken during a given quarter. The conversion from volume concentration (ppmv) to mass concentrations (lb/SCF) was taken from the USEPA document AP-42 Compilation of Air Pollutant Emission Factors, Volume 1: Stationary Point and Area Sources, Fifth Edition, Appendix A (USEPA, 1995). The total hydrocarbon mass removed during each period was summed to determine the quarterly total hydrocarbon mass removed. The mass removed is summarized in the table below.

Quarterly Total Hydrocarbon Mass Removed				
Quarter	West Fenceline Mass (tons)	Public Works Mass (tons)	Quarterly Mass (tons)	Cumulative Mass Removed (tons)
2Q12	124	36	160	160
3Q12	96	23	119	279
4Q12	53	22	75	354
1Q13	39	12	51	405
2Q13	60	17	77	482
3Q13	68	26	94	576
4Q13	89	37	126	702
1Q14	72	22	94	796
2Q14	83	36	119	915
3Q14	94	34	128	1,043
4Q14	106	33	139	1,182
1Q15	167	42	209	1,391
2Q15	174	52	226	1,617
3Q15	137	48	185	1,802
4Q15	111	35	146	1,948
1Q16	91	23	114	2,062
2Q16	78	24	102	2,164
3Q16	57	24	81	2,245
4Q16	32	7	39	2,284
1Q17	38	6	44	2,328
2Q17	51	4	55	2,383
3Q17	33	6	39	2,422
4Q17	33	12	45	2,467
1Q18	36	25	61	2,528
2Q18	54	25	79	2,607
3Q18	59	21	80	2,687
4Q18	50	17	67	2,754
1Q19	52	25	77	2,831
2Q19	69	13	79	2,913
3Q19	31	4	35	2,948
4Q19	25	7	32	2,980
1Q20	15	5	20	3,000
2Q20	32	6	38	3,038
3Q20	8	2	10	3,048
4Q20	18	30	48	3,096
1Q21	22	18	40	3,136
2Q21	22	13	35	3,171

Carbon Footprint

Total carbon dioxide (CO_2) mass emitted from operation of the SVE system RTO in 2Q21 was approximately 178.6tons, compared to approximately 198.5 tons in 1Q21. Based on a total of 35 tons of total hydrocarbons (THC) removed from the subsurface and treated by the RTO, the CO_2 mass emissions rate in 2Q21 was approximately 5.2 tons per ton THC removed, compared to 5.0 tons per ton THC removed in 1Q21.

Total CO_2 emissions are based on the sum of CO_2 mass emitted from the RTO stack and CO_2 mass emitted by the public utility to provide electricity required for RTO operation. The CO_2 mass emitted from the RTO stack is the sum of CO_2 emitted from combustion of extracted soil vapor and supplemental natural gas required for operation.
The breakdown for CO_2 emissions in 2Q21 is as follows:

- 85.6 tons CO_2 from soil vapor combustion
- 35.0 tons CO_2 from combustion of 6,096 therms of supplemental natural gas[4]
- 58.0 tons CO_2 from 69,644 kWh of electricity assuming 0.755 metric tons (0.832 tons) CO_2 emitted per Net MWh (Ameren, 2020)
- **178.6 tons CO_2 Total**

Total CO_2 emissions resulting from operation of the SVE system in 2Q21 are equivalent to annual CO_2 emissions of 19.5 average American households[5].

5.5 SVE System Modification Recommendations

A key focus of the system operators is public and worker safety. Operation of the SVE system will continue with maintenance and system optimization activities. Future monitoring and sampling results from data points associated with the SVE system will be the primary driver of optimization efforts. Optimization efforts could include reduction in dilution air, blower speed adjustment, valve adjustment of individual SVE wells and legs of the SVE system to direct more vacuum to areas with higher hydrocarbon concentrations.

[4] US Environmental Protection Agency (USEPA), July 1998; (USEPA, 1998); AP-42 Compilation of Air Emissions Factors, Volume 1, Chapter 1: External Combustion Sources, Table 1.4-2, Fifth Edition, Supplement D.
[5] Based on annual emissions of 8.3 metric tons of CO_2 for an average American household (USEPA, 2021).

6 Conclusions

AECOM conducted the 2Q21 soil vapor sampling and SVE monitoring efforts on behalf of SOPUS in the Village, Roxana Public Works Yard, and adjoining portions of the WRR. The following conclusions are based on the data collected during 2Q21:

- Soil vapor samples were collected from 43 locations and 136 ports in the Village, Public Works Yard, and WRR during 2Q21. Due to subsurface water conditions, 29 ports were submerged and unable to be sampled.
    - No sample results exceeded the benzene residential screening criterion (0.37 mg/m^3) in the Village. Benzene concentrations ranged from an estimated 0.00042 mg/m3 to 0.0031 mg/m^3.
    - No sample results exceeded the benzene commercial/industrial screening criterion (2.8 mg/m^3) in the Public Works Yard or the area along Illinois Route 111 and Rand Avenue. Benzene concentrations ranged from an estimated 0.00045 mg/m^3 to an estimated 0.035 mg/m^3.
    - Sample results exceeded the benzene commercial/industrial screening criterion (2.8 mg/m^3) in the WRR at VMP-16 (19 and 31 ft bgs). Benzene concentrations ranged from an estimated 0.00052 mg/m^3 to 91 mg/m^3.
- Soil vapor concentrations of petroleum hydrocarbons in the Village have been below Tier 1 criteria from 5 to 30 ft bgs since 1st Quarter 2017.
- As presented in detail in this report, the SVE system continues to operate with supplemental fuel and has been effective. SVE System operations continue to focus on the Fourth & Chaffer and Public Works Yard areas, in alignment with the IEPA letter dated October 1, 2020 (Log No. B-43R-CA-95, CA-98).
- Assessment of SVE system operations with a focus on Sustainability continued during 2Q21. Preliminary carbon footprint analysis indicates that operating the SVE system in 2Q21, including the contribution from electricity generation, resulted in the emissions of approximately 178.6 tons of CO_2, compared to 35 tons of THC removed from the subsurface.

Limitations:

SOPUS shall have the right to make and retain copies and use all Work Product provided. However, such use shall be limited to the particular Site and project for which the Work Product is provided. SOPUS and its agents may release the Work Product to third parties at its sole risk and discretion. This report is based on data, site conditions, and other information that is generally applicable as of the date of this report, and the conclusions and recommendations herein are therefore applicable only to that time frame and to the report in its entirety.

Data may have been provided to AECOM by SOPUS or a third party and used in preparing this report. AECOM has relied on this information as furnished, and is neither responsible for, nor has confirmed the accuracy of this information.

7 References

AECOM, 2017 (AECOM, 2017a); TACO Tier 3 Demonstration Part 1: Site Characterization Summary; Prepared for Shell Oil Products US (SOPUS); dated April 6, 2017.

AECOM, 2017 (AECOM, 2017b); TACO Tier 3 Demonstration Part 2: Tier 3 Proposal; Prepared for Shell Oil Products US (SOPUS); dated April 6, 2017.

AECOM, 2017 (AECOM, 2017c); Supplement to TACO Tier 3 Demonstration; Prepared for Shell Oil Products US (SOPUS); dated July 14, 2017.

AECOM, 2017 (AECOM, 2017d); TACO Tier 3 Demonstration: Response to Agency Comments Provided between June 30 and October 6, 2017; Prepared for Shell Oil Products US (SOPUS); dated November 22, 2017.

AECOM, 2019; (AECOM, 2019); SVE Operations and Maintenance Plan – WRB Refining LP, Wood River Refinery & Roxana Public Works Site; Prepared for Shell Oil Products US (SOPUS); dated September 2019.

AECOM, 2021 (AECOM, 2021a); Shell Project HAZWOPER Health and Safety Plan - Rand Avenue, Roxana/Route 111, and WRR Investigation and Remediation; Prepared for Shell Oil Products US (SOPUS); dated February 4, 2021.

AECOM, 2021; (AECOM, 2021b); Interim Groundwater Monitoring Program – 2nd Quarter 2021 – Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated July 2021.

Ameren Corporation, 2020 (Ameren, 2020) EEI-AGA ESG/Sustainability Template. December 2020.

Illinois Environmental Protection Agency (IEPA), 2009; (IEPA, 2009); Letter providing approval with comments and modifications of the SOPUS, 2009B work plan. Issued to Shell Oil Products US (SOPUS), dated May 12, 2009.

Illinois Environmental Protection Agency (IEPA), 2010; (IEPA, 2010); Letter providing approval with comments the SOPUS 2010 Delineation Report. Issued to Shell Oil Products US (SOPUS), dated August 5, 2010.

Illinois Environmental Protection Agency (IEPA), 2011; (IEPA, 2011); Response to December 31, 2010 submittal. Issued to Shell Oil Products US (SOPUS), dated March 16, 2011.

Illinois Environmental Protection Agency (IEPA), 2012; (IEPA, 2012); Response to June 13, 2011; July 20, 2011; September 28, 2011, and May 31, 2012 submittals. Issued to Shell Oil Products US (SOPUS), dated September 13, 2012.

Illinois Environmental Protection Agency (IEPA), 2013; (IEPA, 2013); Tiered Approach to Corrective Action Objectives Title 35 – Part 742; Appendix B, Table H: Tier 1 Soil Gas and Groundwater Remediation Objectives for the Indoor Inhalation Exposure Route – Diffusion and Advection. Effective July 15, 2013 from www.ipcb.state.il.us/documents/dsweb/Get/Document-38408.

Illinois Environmental Protection Agency (IEPA), 2014; (IEPA, 2014); Response to August 21, 2013; September 13, 2013, and September 19, 2013 submittals. Issued to Shell Oil Products US (SOPUS), dated April 9, 2014.

Illinois Environmental Protection Agency (IEPA), 2015; (IEPA, 2015); Response to August 16, 2013 and March 4, 2015 submittals. Issued to Shell Oil Products US (SOPUS), dated May 28, 2015.

Illinois Environmental Protection Agency (IEPA), 2020; (IEPA, 2020); Response to April 6, 2017, July 14, 2017, and November 22, 2017 submittals. Issued to Shell Oil Products US (SOPUS), dated October 1, 2020.

Ririe, G. T., R. Sweeney, S. Daugherty, and P. Peuron. 1998. A Vapor Transport Model That is Consistent with Field and Laboratory Data. In: Proceedings of the Petroleum Hydrocarbons and Organic Chemicals in Ground Water Conference, American Petroleum Institute and the National Ground Water Association, Houston, TX.

URS Corporation (URS), 2010; (URS, 2010a); Dissolved Phase Groundwater Investigation and P-60 Free Phase Product Delineation Report - Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated February 18, 2010.

URS Corporation (URS), 2010; (URS, 2010b); Addendum to February 2010 Report - Supplemental Investigation Activities - Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated September 20, 2010.

URS Corporation (URS), 2011; (URS, 2011a); Soil Vapor Sampling – 1st Quarter 2011 - Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated June 2011.

URS Corporation (URS), 2011; (URS, 2011b); Conceptual/Final Design Report – Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated June 2011.

URS Corporation (URS), 2012; (URS, 2012); SVE System Construction Completion Report – Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated May 2012.

URS Corporation (URS), 2013; (URS, 2013); SVE System Construction Completion Report Addendum – Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated February 2013.

URS Corporation (URS), 2014; (URS, 2014); SVE System Construction Completion Report Addendum No. 2 – Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated January 2014.

URS Corporation (URS), 2015; (URS, 2015); SVE System Construction Completion Report Addendum No. 3 – Roxana, Illinois; Prepared for Shell Oil Products US (SOPUS); dated March 4, 2015.

US Environmental Protection Agency (USEPA), January 1995; (USEPA, 1995); AP-42 Compilation of Air Pollutant Emission Factors, Volume 1: Stationary Point and Area Sources, Fifth Edition, Appendix A.

US Environmental Protection Agency (USEPA), July 1998; (USEPA, 1998); AP-42 Compilation of Air Emissions Factors, Volume 1, Chapter 1: External Combustion Sources, Table 1.4-2, Fifth Edition, Supplement D.

US Environmental Protection Agency (USEPA), January 2017; (USEPA, 2017); Contract Laboratory Program National Functional Guidelines for Superfund Organic Methods Data Review.

US Environmental Protection Agency (USEPA), June 2021; (USEPA, 2021); Greenhouse Gases Equivalencies Calculator – Calculations and References. Accessed June 14, 2021 from https://www.epa.gov/energy/greenhouse-gases-equivalencies-calculator-calculations-and-references.

Tables

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
MW 01											
3Q18	442.65	7/2/2018	NE	41.36	NA	NA	NA	401.29	393.85 - 383.85 (48.80 - 58.80)	0.0	*
4Q18		10/1/2018	NE	41.25	NA	NA	NA	401.40		0.0	*
1Q19		1/2/2019	NE	41.04	NA	NA	NA	401.61		0.0	*
2Q19		4/1/2019	NE	41.00	NA	NA	NA	401.65		0.0	*
3Q19	442.83	7/1/2019	NE	36.65	NA	NA	NA	406.18	394.03 - 384.03 (48.80 - 58.80)	0.0	*
4Q19		10/1/2019	NE	35.66	NA	NA	NA	407.17		0.1	*
1Q20		1/2/2020	NE	36.89	NA	NA	NA	405.94		0.0	*
2Q20		4/1/2020	NE	36.72	NA	NA	NA	406.11		0.0	*
3Q20		7/6/2020	NE	35.59	NA	NA	NA	407.24		0.0	*
4Q20		10/6/2020	NE	36.03	NA	NA	NA	406.80		0.1	*
1Q21		1/5/2021	NE	37.23	NA	NA	NA	405.60		0.0	*
2Q21		4/5/2021	NE	37.66	NA	NA	NA	405.17		0.0	*
MW 02											
3Q18	443.77	7/2/2018	NE	42.78	NA	NA	NA	400.99	393.90 - 383.90 (49.87 - 59.87)	70.0	*
4Q18		10/1/2018	NE	42.68	NA	NA	NA	401.09		1460	*
1Q19		1/2/2019	NE	42.44	NA	NA	NA	401.33		118	*
2Q19		4/1/2019	NE	42.49	NA	NA	NA	401.28		250	*
3Q19	443.93	7/1/2019	NE	38.26	NA	NA	NA	405.67	394.06 - 384.06 (49.87 - 59.87)	200	*
4Q19		10/1/2019	NE	37.11	NA	NA	NA	406.82		34.6	*
1Q20		1/2/2020	NE	38.39	NA	NA	NA	405.54		0.0	*
2Q20		4/1/2020	NE	38.19	NA	NA	NA	405.74		139	*
3Q20		7/6/2020	NE	37.03	NA	NA	NA	406.90		130	*
4Q20		10/5/2020	NE	37.45	NA	NA	NA	406.48		68.7	*
1Q21		1/4/2021	NE	38.51	NA	NA	NA	405.42		42.0	*
2Q21		4/5/2021	NE	38.94	NA	NA	NA	404.99		65.2	*
MW 03											
3Q18	430.08	7/2/2018	NE	28.32	NA	NA	NA	401.76	395.41 - 385.41 (34.67 - 44.67)	0.2	*
4Q18		10/1/2018	NE	28.20	NA	NA	NA	401.88		0.0	*
1Q19		1/2/2019	NE	27.95	NA	NA	NA	402.13		0.0	*
2Q19		4/1/2019	NE	27.85	NA	NA	NA	402.23		0.0	*
3Q19	430.23	7/1/2019	NE	23.10	NA	NA	NA	407.13	395.56 - 385.56 (34.67 - 44.67)	0.0	*
4Q19		10/1/2019	NE	22.53	NA	NA	NA	407.70		0.0	*
1Q20		1/2/2020	NE	23.74	NA	NA	NA	406.49		0.0	*
2Q20		4/1/2020	NE	23.75	NA	NA	NA	406.48		0.0	*
3Q20		7/6/2020	NE	22.55	NA	NA	NA	407.68		0.0	*
4Q20		10/6/2020	NE	23.31	NA	NA	NA	406.92		0.0	*
1Q21		1/5/2021	NE	24.59	NA	NA	NA	405.64		0.0	*
2Q21		4/5/2021	NE	24.90	NA	NA	NA	405.33		0.0	*
MW 04											
3Q18	441.14	7/2/2018	NE	39.73	NA	NA	NA	401.41	396.08 - 386.08 (45.06 - 55.06)	0.0	*
4Q18		10/1/2018	NE	39.64	NA	NA	NA	401.50		0.0	*
1Q19		1/2/2019	NE	39.38	NA	NA	NA	401.76		0.0	*
2Q19		4/1/2019	NE	39.27	NA	NA	NA	401.87		0.0	*
3Q19	441.31	7/1/2019	NE	34.84	NA	NA	NA	406.47	396.25 - 386.25 (45.06 - 55.06)	16.9	*
4Q19		10/1/2019	NE	33.97	NA	NA	NA	407.34		0.7	*
1Q20		1/2/2020	NE	35.25	NA	NA	NA	406.06		0.0	*
2Q20		4/1/2020	NE	35.14	NA	NA	NA	406.17		0.0	*
3Q20		7/6/2020	NE	33.99	NA	NA	NA	407.32		0.0	*
4Q20		10/6/2020	NE	34.52	NA	NA	NA	406.79		0.0	*
1Q21		1/5/2021	NE	35.73	NA	NA	NA	405.58		0.0	*
2Q21		4/5/2021	NE	36.08	NA	NA	NA	405.23		0.0	*
MW 05											
3Q18	429.80	7/2/2018	NE	27.99	NA	NA	NA	401.81	395.83 - 385.83 (33.97 - 43.97)	0.1	*
4Q18		10/2/2018	NE	27.93	NA	NA	NA	401.87		0.0	*
1Q19		1/2/2019	NE	27.64	NA	NA	NA	402.16		0.0	*
2Q19		4/1/2019	NE	27.50	NA	NA	NA	402.30		0.0	*
3Q19	429.98	7/1/2019	NE	22.80	NA	NA	NA	407.18	396.01 - 386.01 (33.97 - 43.97)	4.1	*
4Q19		10/1/2019	NE	22.24	NA	NA	NA	407.74		0.0	*
1Q20		1/2/2020	NE	23.46	NA	NA	NA	406.52		0.0	*
2Q20		4/1/2020	NE	23.44	NA	NA	NA	406.54		0.0	*
3Q20		7/6/2020	NE	22.25	NA	NA	NA	407.73		0.0	*
4Q20		10/6/2020	NE	23.01	NA	NA	NA	406.97		0.1	*
1Q21		1/5/2021	NE	24.25	NA	NA	NA	405.73		0.0	*
2Q21		4/6/2021	NE	24.60	NA	NA	NA	405.38		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
MW 06A											
3Q18	432.14	7/2/2018	NE	30.05	NA	NA	NA	402.09	398.29 - 388.29 (33.85 - 43.85)	0.0	*
4Q18		10/2/2018	NE	30.03	NA	NA	NA	402.11		0.0	*
1Q19		1/2/2019	NE	29.77	NA	NA	NA	402.37		0.0	*
2Q19		4/2/2019	NE	29.42	NA	NA	NA	402.72		0.0	*
3Q19	432.33	7/1/2019	NE	24.94	NA	NA	NA	407.39	398.48 - 388.48 (33.85 - 43.85)	0.0	*
4Q19		10/1/2019	NE	24.40	NA	NA	NA	407.93		0.0	*
1Q20		1/2/2020	NE	25.60	NA	NA	NA	406.73		0.0	*
2Q20		4/1/2020	NE	25.59	NA	NA	NA	406.74		0.0	*
3Q20		7/6/2020	NE	24.38	NA	NA	NA	407.95		0.0	*
4Q20		10/6/2020	NE	25.16	NA	NA	NA	407.17		0.0	*
1Q21		1/4/2021	NE	26.33	NA	NA	NA	406.00		0.0	*
2Q21		4/6/2021	NE	26.61	NA	NA	NA	405.72		0.0	*
MW 06B											
3Q18	432.29	7/2/2018	NE	30.10	NA	NA	NA	402.19	368.24 - 363.24 (64.05 - 69.05)	0.0	*
4Q18		10/2/2018	NE	30.09	NA	NA	NA	402.20		0.0	*
1Q19		1/2/2019	NE	29.81	NA	NA	NA	402.48		0.0	*
2Q19		4/2/2019	NE	29.46	NA	NA	NA	402.83		0.0	*
3Q19	432.37	7/1/2019	NE	24.97	NA	NA	NA	407.40	368.32 - 363.32 (64.05 - 69.05)	0.0	*
4Q19		10/1/2019	NE	24.47	NA	NA	NA	407.90		0.1	*
1Q20		1/2/2020	NE	25.66	NA	NA	NA	406.71		0.0	*
2Q20		4/1/2020	NE	25.64	NA	NA	NA	406.73		0.0	*
3Q20		7/6/2020	NE	24.44	NA	NA	NA	407.93		0.0	*
4Q20		10/6/2020	NE	25.19	NA	NA	NA	407.18		0.0	*
1Q21		1/4/2021	NE	26.38	NA	NA	NA	405.99		0.0	*
2Q21		4/6/2021	NE	26.65	NA	NA	NA	405.72		0.0	*
MW 06C											
3Q18	432.11	7/2/2018	NE	29.90	NA	NA	NA	402.21	347.16 - 342.16 (84.95 - 89.95)	0.0	*
4Q18		10/2/2018	NE	29.87	NA	NA	NA	402.24		0.0	*
1Q19		1/2/2019	NE	29.61	NA	NA	NA	402.50		0.0	*
2Q19		4/2/2019	NE	29.25	NA	NA	NA	402.86		0.0	*
3Q19	432.18	7/1/2019	NE	24.77	NA	NA	NA	407.41	347.23 - 342.23 (84.95 - 89.95)	0.0	*
4Q19		10/1/2019	NE	24.25	NA	NA	NA	407.93		0.1	*
1Q20		1/2/2020	NE	25.46	NA	NA	NA	406.72		0.0	*
2Q20		4/1/2020	NE	25.40	NA	NA	NA	406.78		0.0	*
3Q20		7/6/2020	NE	24.23	NA	NA	NA	407.95		0.0	*
4Q20		10/6/2020	NE	24.99	NA	NA	NA	407.19		0.0	*
1Q21		1/4/2021	NE	26.16	NA	NA	NA	406.02		0.0	*
2Q21		4/6/2021	NE	26.44	NA	NA	NA	405.74		0.0	*
MW 06D											
3Q18	431.99	7/2/2018	NE	29.74	NA	NA	NA	402.25	327.27 - 322.27 (104.72 - 109.72)	0.0	*
4Q18		10/2/2018	NE	29.72	NA	NA	NA	402.27		0.0	*
1Q19		1/2/2019	NE	29.45	NA	NA	NA	402.54		0.0	*
2Q19		4/2/2019	NE	29.11	NA	NA	NA	402.88		0.0	*
3Q19	432.06	7/1/2019	NE	24.60	NA	NA	NA	407.46	327.34 - 322.34 (104.72 - 109.72)	0.0	*
4Q19		10/1/2019	NE	24.09	NA	NA	NA	407.97		0.0	*
1Q20		1/2/2020	NE	25.31	NA	NA	NA	406.75		0.0	*
2Q20		4/1/2020	NE	25.25	NA	NA	NA	406.81		0.0	*
3Q20		7/6/2020	NE	24.09	NA	NA	NA	407.97		0.0	*
4Q20		10/6/2020	NE	24.85	NA	NA	NA	407.21		0.0	*
1Q21		1/5/2021	NE	26.03	NA	NA	NA	406.03		0.0	*
2Q21		4/6/2021	NE	26.30	NA	NA	NA	405.76		0.0	*
MW 07											
3Q18	443.10	7/2/2018	NE	41.76	NA	NA	NA	401.34	400.18 - 390.18 (42.92 - 52.92)	5380	*
4Q18		10/2/2018	NE	41.72	NA	NA	NA	401.38		15000	*
1Q19		1/2/2019	NE	41.45	NA	NA	NA	401.65		2574	*
2Q19		4/1/2019	NE	41.33	NA	NA	NA	401.77		683	*
3Q19	443.31	7/1/2019	NE	36.94	NA	NA	NA	406.37	400.39 - 390.39 (42.92 - 52.92)	9714	*
4Q19		10/1/2019	NE	36.08	NA	NA	NA	407.23		3349	*
1Q20		1/2/2020	NE	37.39	NA	NA	NA	405.92		1900	*
2Q20		4/1/2020	NE	37.34	NA	NA	NA	405.97		5935	*
3Q20		7/6/2020	NE	36.07	NA	NA	NA	407.24		5498	*
4Q20		10/5/2020	NE	36.64	NA	NA	NA	406.67		6064	*
1Q21		1/4/2021	NE	37.75	NA	NA	NA	405.56		1026	*
2Q21		4/5/2021	NE	38.11	NA	NA	NA	405.20		393	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
MW 08											
3Q18	434.11	7/2/2018	NE	32.54	NA	NA	NA	401.57	400.51 - 390.51 (33.60 - 43.60)	231	*
4Q18		10/2/2018	NE	32.47	NA	NA	NA	401.64		1.4	*
1Q19		1/2/2019	NE	32.20	NA	NA	NA	401.91		0.0	*
2Q19		4/1/2019	NE	32.06	NA	NA	NA	402.05		0.0	*
3Q19	434.43	7/1/2019	NE	27.49	NA	NA	NA	406.94	400.83 - 390.83 (33.60 - 43.60)	6186	*
4Q19		10/1/2019	NE	26.85	NA	NA	NA	407.58		43.8	*
1Q20		1/2/2020	NE	28.06	NA	NA	NA	406.37		2.7	*
2Q20		4/1/2020	NE	28.02	NA	NA	NA	406.41		0.0	*
3Q20		7/6/2020	NE	26.64	NA	NA	NA	407.79		25.4	*
4Q20		10/6/2020	NE	27.49	NA	NA	NA	406.94		0.1	*
1Q21		1/4/2021	NE	28.73	NA	NA	NA	405.70		0.0	*
2Q21		4/6/2021	NE	29.03	NA	NA	NA	405.40		3.6	*
MW 09											
3Q18	445.20	7/2/2018	NE	42.86	NA	NA	NA	402.34	399.16 - 389.16 (46.04 - 56.04)	0.0	*
4Q18		10/1/2018	NE	42.91	NA	NA	NA	402.29		0.0	*
1Q19		1/3/2019	NE	42.85	NA	NA	NA	402.35		0.0	*
2Q19		4/1/2019	NE	42.90	NA	NA	NA	402.30		0.0	*
3Q19	445.28	7/1/2019	NE	39.16	NA	NA	NA	406.12	399.24 - 389.24 (46.04 - 56.04)	1.9	*
4Q19		10/1/2019	NE	37.90	NA	NA	NA	407.38		0.0	*
1Q20		1/2/2020	NE	38.61	NA	NA	NA	406.67		0.0	*
2Q20		4/1/2020	NE	38.52	NA	NA	NA	406.76		0.0	*
3Q20		7/6/2020	NE	37.26	NA	NA	NA	408.02		0.0	*
4Q20		10/5/2020	NE	37.48	NA	NA	NA	407.80		0.0	*
1Q21		1/4/2021	NE	38.57	NA	NA	NA	406.71		0.0	*
2Q21		4/5/2021	NE	39.31	NA	NA	NA	405.97		0.0	*
MW 10											
3Q18	445.03	7/2/2018	NE	42.94	NA	NA	NA	402.09	400.60 - 390.60 (44.43 - 54.43)	0.0	*
4Q18		10/2/2018	NE	43.08	NA	NA	NA	401.95		0.0	*
1Q19		1/2/2019	NE	43.02	NA	NA	NA	402.01		0.0	*
2Q19		4/1/2019	NE	43.20	NA	NA	NA	401.83		5.3	*
3Q19	445.06	7/1/2019	NE	39.75	NA	NA	NA	405.31	400.63 - 390.63 (44.43 - 54.43)	0.0	*
4Q19		10/1/2019	NE	38.24	NA	NA	NA	406.82		0.0	*
1Q20		1/2/2020	NE	38.79	NA	NA	NA	406.27		0.0	*
2Q20		4/1/2020	NE	38.54	NA	NA	NA	406.52		0.0	*
3Q20		7/6/2020	NE	37.17	NA	NA	NA	407.89		0.0	*
4Q20		10/5/2020	NE	37.33	NA	NA	NA	407.73		0.0	*
1Q21		1/4/2021	NE	38.38	NA	NA	NA	406.68		0.0	*
2Q21		4/5/2021	NE	39.07	NA	NA	NA	405.99		0.0	*
MW 11											
3Q18	442.33	7/2/2018	NE	40.59	NA	NA	NA	401.74	400.67 - 390.67 (41.66 - 51.66)	0.0	*
4Q18		10/1/2018	NE	40.58	NA	NA	NA	401.75		0.0	*
1Q19		1/3/2019	NE	40.46	NA	NA	NA	401.87		0.0	*
2Q19		4/1/2019	NE	40.47	NA	NA	NA	401.86		0.0	*
3Q19	442.38	7/1/2019	NE	36.33	NA	NA	NA	406.05	400.72 - 390.72 (41.66 - 51.66)	0.0	*
4Q19		10/1/2019	NE	35.20	NA	NA	NA	407.18		0.0	*
1Q20		1/2/2020	NE	36.20	NA	NA	NA	406.18		0.0	*
2Q20		4/1/2020	NE	35.98	NA	NA	NA	406.40		0.0	*
3Q20		7/6/2020	NE	34.85	NA	NA	NA	407.53		0.0	*
4Q20		10/5/2020	NE	35.12	NA	NA	NA	407.26		0.0	*
1Q21		1/4/2021	NE	36.35	NA	NA	NA	406.03		0.0	*
2Q21		4/5/2021	NE	36.93	NA	NA	NA	405.45		0.0	*
MW 12											
3Q18	442.60	7/2/2018	NE	41.00	NA	NA	NA	401.60	400.68 - 390.68 (41.92 - 51.92)	0.0	*
4Q18		10/1/2018	NE	40.94	NA	NA	NA	401.66		0.0	*
1Q19		1/2/2019	NE	40.70	NA	NA	NA	401.90		0.0	*
2Q19		4/1/2019	NE	40.72	NA	NA	NA	401.88		0.0	*
3Q19	442.64	7/1/2019	NE	36.32	NA	NA	NA	406.32	400.72 - 390.72 (41.92 - 51.92)	0.0	*
4Q19		10/1/2019	NE	35.39	NA	NA	NA	407.25		0.0	*
1Q20		1/2/2020	NE	36.56	NA	NA	NA	406.08		0.0	*
2Q20		4/1/2020	NE	36.38	NA	NA	NA	406.26		0.1	*
3Q20		7/6/2020	NE	35.23	NA	NA	NA	407.41		0.0	*
4Q20		10/6/2020	NE	35.68	NA	NA	NA	406.96		0.0	*
1Q21		1/4/2021	NE	36.92	NA	NA	NA	405.72		0.0	*
2Q21		4/5/2021	NE	37.43	NA	NA	NA	405.21		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
MW 13											
3Q18	430.27	7/3/2018	NE	27.67	NA	NA	NA	402.60	405.47 - 395.47 (24.80 - 34.80)	0.0	
4Q18		10/2/2018	NE	27.56	NA	NA	NA	402.71		4398	
1Q19		1/3/2019	NE	27.27	NA	NA	NA	403.00		231	
2Q19		4/3/2019	NE	27.03	NA	NA	NA	403.24		3.0	
3Q19	430.30	7/1/2019	NE	21.84	NA	NA	NA	408.46	405.50 - 395.50 (24.80 - 34.80)	81.1	*
4Q19		10/2/2019	NE	21.90	NA	NA	NA	408.40		0.4	*
1Q20		1/3/2020	NE	23.29	NA	NA	NA	407.01		0.0	*
2Q20		4/3/2020	NE	23.02	NA	NA	NA	407.28		0.0	*
3Q20		7/7/2020	NE	21.85	NA	NA	NA	408.45		0.9	*
4Q20		10/6/2020	NE	22.96	NA	NA	NA	407.34		0.0	*
1Q21		1/5/2021	NE	24.41	NA	NA	NA	405.89		0.0	*
2Q21		4/6/2021	NE	24.52	NA	NA	NA	405.78		0.0	*
MW 14											
3Q18	434.44	7/2/2018	NE	32.19	NA	NA	NA	402.25	401.02 - 391.02 (33.42 - 43.42)	82.8	*
4Q18		10/3/2018	NE	32.07	NA	NA	NA	402.37		12.0	*
1Q19		1/4/2019	NE	31.78	NA	NA	NA	402.66		73.4	*
2Q19		4/2/2019	NE	31.52	NA	NA	NA	402.92		400	*
3Q19	434.61	7/2/2019	NE	27.22	NA	NA	NA	407.39	401.19 - 391.19 (33.42 - 43.42)	596	*
4Q19		10/2/2019	NE	26.64	NA	NA	NA	407.97		49.8	*
1Q20		1/3/2020	NE	27.98	NA	NA	NA	406.63		69.9	*
2Q20		4/3/2020	NE	27.66	NA	NA	NA	406.95		75.1	*
3Q20		7/13/2020	NE	26.52	NA	NA	NA	408.09		38.2	*
4Q20		10/7/2020	NE	27.29	NA	NA	NA	407.32		53.4	*
1Q21		1/5/2021	NE	28.32	NA	NA	NA	406.29		33.2	*
2Q21		4/7/2021	NE	28.55	NA	NA	NA	406.06		43.3	*
MW 16											
3Q18	443.39	7/2/2018	NE	42.33	NA	NA	NA	401.06	405.89 - 395.89 (37.50 - 47.50)	0.0	
4Q18		10/1/2018	NE	42.27	NA	NA	NA	401.12		0.0	
1Q19		1/11/2019	NE	42.10	NA	NA	NA	401.29		0.0	
2Q19		4/1/2019	NE	42.11	NA	NA	NA	401.28		0.0	
3Q19	443.60	7/2/2019	NE	37.87	NA	NA	NA	405.73	406.10 - 396.10 (37.50 - 47.50)	0.0	
4Q19		10/1/2019	NE	36.74	NA	NA	NA	406.86		0.0	*
1Q20		1/2/2020	NE	37.94	NA	NA	NA	405.66		0.0	
2Q20		4/13/2020	NE	37.64	NA	NA	NA	405.96		0.0	
3Q20		7/6/2020	NE	36.56	NA	NA	NA	407.04		0.0	*
4Q20		10/6/2020	NE	36.78	NA	NA	NA	406.82		0.0	*
1Q21		1/4/2021	NE	37.97	NA	NA	NA	405.63		0.0	
2Q21		4/5/2021	NE	38.45	NA	NA	NA	405.15		0.0	
MW 17											
3Q18	441.57	7/2/2018	NE	40.82	NA	NA	NA	400.75	407.28 - 392.28 (34.29 - 49.29)	0.0	
4Q18		10/1/2018	NE	40.78	NA	NA	NA	400.79		0.0	
1Q19		1/3/2019	NE	40.54	NA	NA	NA	401.03		0.0	
2Q19		4/1/2019	NE	40.63	NA	NA	NA	400.94		0.0	
3Q19	441.78	7/1/2019	NE	36.88	NA	NA	NA	404.90	407.49 - 392.49 (34.29 - 49.29)	0.0	
4Q19		10/1/2019	NE	35.40	NA	NA	NA	406.38		0.0	
1Q20		1/2/2020	NE	36.67	NA	NA	NA	405.11		157	
2Q20		4/1/2020	NE	35.82	NA	NA	NA	405.96		0.0	
3Q20		7/6/2020	NE	35.08	NA	NA	NA	406.70		0.0	
4Q20		10/5/2020	NE	35.04	NA	NA	NA	406.74		79.4	
1Q21		1/4/2021	NE	36.09	NA	NA	NA	405.69		5.7	
2Q21		4/5/2021	NE	36.61	NA	NA	NA	405.17		1.0	
MW 18											
3Q18	442.04	7/2/2018	NE	41.47	NA	NA	NA	400.57	407.12 - 392.12 (34.92 - 49.92)	0.0	
4Q18		10/1/2018	NE	41.43	NA	NA	NA	400.61		0.0	
1Q19		1/2/2019	NE	41.13	NA	NA	NA	400.91		0.0	
2Q19		4/1/2019	NE	41.29	NA	NA	NA	400.75		0.0	
3Q19	442.24	7/1/2019	NE	37.30	NA	NA	NA	404.94	407.32 - 392.32 (34.92 - 49.92)	0.0	
4Q19		10/2/2019	NE	35.86	NA	NA	NA	406.38		0.0	
1Q20		1/2/2020	NE	37.29	NA	NA	NA	404.95		0.0	
2Q20		4/1/2020	NE	36.38	NA	NA	NA	405.86		0.0	
3Q20		7/6/2020	NE	35.71	NA	NA	NA	406.53		0.0	
4Q20		10/5/2020	NE	35.80	NA	NA	NA	406.44		0.0	
1Q21		1/4/2021	NE	36.80	NA	NA	NA	405.44		0.0	
2Q21		4/5/2021	NE	37.20	NA	NA	NA	405.04		0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
MW 19											
3Q18	442.77	7/2/2018	NE	42.08	NA	NA	NA	400.69	406.43 - 391.43 (36.34 - 51.34)	0.0	
4Q18		10/1/2018	NE	42.04	NA	NA	NA	400.73		0.1	
1Q19		1/2/2019	NE	41.76	NA	NA	NA	401.01		0.0	
2Q19		4/1/2019	NE	41.92	NA	NA	NA	400.85		0.0	
3Q19	442.98	7/1/2019	NE	37.88	NA	NA	NA	405.10	406.64 - 391.64 (36.34 - 51.34)	0.0	
4Q19		10/2/2019	NE	36.49	NA	NA	NA	406.49		22.5	
1Q20		1/2/2020	NE	37.83	NA	NA	NA	405.15		0.0	
2Q20		4/1/2020	NE	37.20	NA	NA	NA	405.78		0.0	
3Q20		7/6/2020	NE	36.34	NA	NA	NA	406.64		79.9	
4Q20		10/5/2020	NE	36.41	NA	NA	NA	406.57		88.8	
1Q21		1/4/2021	NE	37.52	NA	NA	NA	405.46		0.0	
2Q21		4/5/2021	NE	37.93	NA	NA	NA	405.05		0.0	
MW 20											
3Q18	443.67	7/2/2018	NE	42.88	NA	NA	NA	400.79	407.79 - 392.79 (35.88 - 50.88)	0.0	
4Q18		10/2/2018	NE	42.77	NA	NA	NA	400.90		0.0	
1Q19		1/2/2019	NE	42.55	NA	NA	NA	401.12		0.0	
2Q19		4/1/2019	NE	42.62	NA	NA	NA	401.05		0.0	
3Q19	443.86	7/1/2019	NE	38.56	NA	NA	NA	405.30	407.98 - 392.98 (35.88 - 50.88)	0.0	
4Q19		10/2/2019	NE	37.22	NA	NA	NA	406.64		0.0	
1Q20		1/2/2020	NE	38.49	NA	NA	NA	405.37		0.0	
2Q20		4/1/2020	NE	38.14	NA	NA	NA	405.72		0.0	
3Q20		7/6/2020	NE	37.10	NA	NA	NA	406.76		0.0	
4Q20		10/5/2020	NE	37.31	NA	NA	NA	406.55		228	
1Q21		1/4/2021	NE	38.44	NA	NA	NA	405.42		0.0	
2Q21		4/5/2021	NE	38.87	NA	NA	NA	404.99		0.0	
MW 21											
3Q18	443.81	7/2/2018	NE	42.74	NA	NA	NA	401.07	408.80 - 393.80 (35.01 - 50.01)	0.0	
4Q18		10/2/2018	NE	42.70	NA	NA	NA	401.11		8.7	
1Q19		1/2/2019	NE	42.42	NA	NA	NA	401.39		0.0	
2Q19		4/1/2019	NE	42.39	NA	NA	NA	401.42		0.0	
3Q19	444.01	7/1/2019	NE	38.11	NA	NA	NA	405.90	409.00 - 394.00 (35.01 - 50.01)	0.6	
4Q19		10/1/2019	NE	37.05	NA	NA	NA	406.96		0.0	
1Q20		1/2/2020	NE	38.39	NA	NA	NA	405.62		0.0	
2Q20		4/1/2020	NE	38.25	NA	NA	NA	405.76		0.0	
3Q20		7/6/2020	NE	37.03	NA	NA	NA	406.98		0.0	
4Q20		10/5/2020	NE	37.47	NA	NA	NA	406.54		1.1	
1Q21		1/4/2021	NE	38.56	NA	NA	NA	405.45		0.0	
2Q21		4/5/2021	NE	38.95	NA	NA	NA	405.06		0.0	
MW 22											
3Q18	442.16	7/2/2018	NE	41.00	NA	NA	NA	401.16	403.73 - 393.73 (38.43 - 48.43)	0.0	
4Q18		10/2/2018	NE	40.96	NA	NA	NA	401.20		0.0	
1Q19		1/9/2019	NE	40.91	NA	NA	NA	401.25		0.0	
2Q19		4/2/2019	NE	40.79	NA	NA	NA	401.37		0.0	
3Q19	442.38	7/1/2019	NM	NM	NA	NA	NA	NA	403.95 - 393.95 (38.43 - 48.43)	NM	We l inaccess ble due to parked vehicle.
4Q19		10/2/2019	NE	35.50	NA	NA	NA	406.88		0.0	*
1Q20		1/2/2020	NE	36.84	NA	NA	NA	405.54		0.0	*
2Q20		4/1/2020	NE	36.22	NA	NA	NA	406.16		0.0	*
3Q20		7/7/2020	NE	35.25	NA	NA	NA	407.13		0.1	*
4Q20		10/6/2020	NE	35.39	NA	NA	NA	406.99		0.0	*
1Q21		1/4/2021	NE	36.57	NA	NA	NA	405.81		0.0	*
2Q21		4/5/2021	NE	37.10	NA	NA	NA	405.28		0.6	*
MW 23											
3Q18	431.41	7/2/2018	NE	29.19	NA	NA	NA	402.22	402.39 - 392.39 (29.02 - 39.02)	0.0	
4Q18		10/1/2018	NE	29.08	NA	NA	NA	402.33		0.0	
1Q19		1/3/2019	NE	28.81	NA	NA	NA	402.60		0.0	*
2Q19		4/2/2019	NE	28.49	NA	NA	NA	402.92		0.0	*
3Q19	431.57	7/1/2019	NE	23.34	NA	NA	NA	408.23	402.55 - 392.55 (29.02 - 39.02)	1.2	*
4Q19		10/1/2019	NE	23.30	NA	NA	NA	408.27		0.1	*
1Q20		1/2/2020	NE	24.54	NA	NA	NA	407.03		0.0	*
2Q20		4/1/2020	NE	24.54	NA	NA	NA	407.03		0.1	*
3Q20		7/6/2020	NE	23.32	NA	NA	NA	408.25		0.0	*
4Q20		10/6/2020	NE	24.46	NA	NA	NA	407.11		0.2	*
1Q21		1/5/2021	NE	25.82	NA	NA	NA	405.75		0.0	*
2Q21		4/5/2021	NE	26.03	NA	NA	NA	405.54		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
MW 24											
3Q18	443.42	7/2/2018	NE	41.86	NA	NA	NA	401.56	403.81 - 393.81 (39.61 - 49.61)	0.0	
4Q18		10/1/2018	NE	41.83	NA	NA	NA	401.59		1.8	
1Q19		1/2/2019	NE	41.63	NA	NA	NA	401.79		0.0	
2Q19		4/1/2019	NE	41.70	NA	NA	NA	401.72		0.0	
3Q19	443.65	7/1/2019	NE	37.42	NA	NA	NA	406.23	404.04 - 394.04 (39.61 - 49.61)	0.0	*
4Q19		10/1/2019	NE	36.40	NA	NA	NA	407.25		0.0	*
1Q20		1/2/2020	NE	37.42	NA	NA	NA	406.23		0.0	*
2Q20		4/1/2020	NE	37.26	NA	NA	NA	406.39		0.0	*
3Q20		7/6/2020	NE	36.11	NA	NA	NA	407.54		0.0	*
4Q20		10/6/2020	NE	36.46	NA	NA	NA	407.19		0.0	*
1Q21		1/4/2021	NE	37.68	NA	NA	NA	405.97		0.0	*
2Q21		4/5/2021	NE	38.28	NA	NA	NA	405.37		0.0	*
MW 25											
3Q18	438.35	7/2/2018	NE	36.82	NA	NA	NA	401.53	402.76 - 392.76 (35.59 - 45.59)	0.5	
4Q18		10/2/2018	NE	36.75	NA	NA	NA	401.60		3.9	
1Q19		1/2/2019	NE	36.47	NA	NA	NA	401.88		44.7	
2Q19		4/1/2019	NE	36.36	NA	NA	NA	401.99		150	
3Q19	438.53	7/1/2019	NE	31.85	NA	NA	NA	406.68	402.94 - 392.94 (35.59 - 45.59)	32.8	*
4Q19		10/1/2019	NE	31.08	NA	NA	NA	407.45		76.5	*
1Q20		1/2/2020	NE	32.35	NA	NA	NA	406.18		99.5	*
2Q20		4/1/2020	NE	32.26	NA	NA	NA	406.27		103	*
3Q20		7/6/2020	NE	31.09	NA	NA	NA	407.44		103	*
4Q20		10/6/2020	NE	31.68	NA	NA	NA	406.85		81.5	*
1Q21		1/5/2021	NE	32.87	NA	NA	NA	405.66		6.6	*
2Q21		4/6/2021	NE	33.24	NA	NA	NA	405.29		44.8	*
MW 26											
3Q18	441.02	7/2/2018	NE	39.71	NA	NA	NA	401.31	402.87 - 392.87 (38.15 - 48.15)	0.2	
4Q18		10/1/2018	NE	39.60	NA	NA	NA	401.42		0.0	
1Q19		1/2/2019	NE	39.38	NA	NA	NA	401.64		0.0	
2Q19		4/1/2019	NE	39.30	NA	NA	NA	401.72		0.0	
3Q19	441.23	7/1/2019	NE	34.94	NA	NA	NA	406.29	403.08 - 393.08 (38.15 - 48.15)	0.0	*
4Q19		10/1/2019	NE	33.99	NA	NA	NA	407.24		0.0	*
1Q20		1/2/2020	NE	35.24	NA	NA	NA	405.99		0.0	*
2Q20		4/3/2020	NE	35.16	NA	NA	NA	406.07		0.0	*
3Q20		7/6/2020	NE	33.93	NA	NA	NA	407.30		0.0	*
4Q20		10/6/2020	NE	34.40	NA	NA	NA	406.83		0.0	*
1Q21		1/5/2021	NE	35.62	NA	NA	NA	405.61		0.0	*
2Q21		4/9/2021	NE	35.92	NA	NA	NA	405.31		0.0	*
MW 27											
3Q18	443.40	7/2/2018	NE	41.16	NA	NA	NA	402.24	403.61 - 393.61 (39.79 - 49.79)	0.0	
4Q18		10/1/2018	NE	41.11	NA	NA	NA	402.29		0.0	
1Q19		1/3/2019	NE	40.99	NA	NA	NA	402.41		0.0	
2Q19		4/1/2019	NE	41.26	NA	NA	NA	402.14		0.0	
3Q19	443.60	7/1/2019	NE	38.03	NA	NA	NA	405.57	403.81 - 393.81 (39.79 - 49.79)	0.0	*
4Q19		10/1/2019	NE	36.00	NA	NA	NA	407.60		0.0	*
1Q20		1/2/2020	NE	36.80	NA	NA	NA	406.80		0.0	*
2Q20		4/1/2020	NE	36.82	NA	NA	NA	406.78		0.0	*
3Q20		7/6/2020	NE	35.62	NA	NA	NA	407.98		0.0	*
4Q20		10/5/2020	NE	35.45	NA	NA	NA	408.15		0.0	*
1Q21		1/4/2021	NE	36.79	NA	NA	NA	406.81		0.0	*
2Q21		4/6/2021	NE	37.68	NA	NA	NA	405.92		0.0	*
MW 28											
3Q18	443.34	7/2/2018	NE	40.14	NA	NA	NA	403.20	409.73 - 399.73 (33.61 - 43.61)	0.0	
4Q18		10/1/2018	NE	40.18	NA	NA	NA	403.16		0.0	
1Q19		1/3/2019	NE	40.20	NA	NA	NA	403.14		0.0	
2Q19		4/1/2019	NE	40.46	NA	NA	NA	402.88		0.0	
3Q19	443.55	7/1/2019	NE	37.56	NA	NA	NA	405.99	409.94 - 399.94 (33.61 - 43.61)	0.0	
4Q19		10/1/2019	NE	35.72	NA	NA	NA	407.83		0.0	
1Q20		1/2/2020	NE	36.11	NA	NA	NA	407.44		0.0	
2Q20		4/1/2020	NE	36.24	NA	NA	NA	407.31		0.0	
3Q20		7/6/2020	NE	35.19	NA	NA	NA	408.36		0.0	
4Q20		10/5/2020	NE	34.96	NA	NA	NA	408.59		2.1	
1Q21		1/4/2021	NE	35.90	NA	NA	NA	407.65		0.0	
2Q21		4/5/2021	NE	36.69	NA	NA	NA	406.86		0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 01											
3Q18	442.73	7/3/2018	NE	31.03	NA	NA	NA	411.70	380.51 - 375.51 (62.22 - 67.22)	0.0	*
4Q18		10/3/2018	NE	31.93	NA	NA	NA	410.80		0.1	*
1Q19		1/3/2019	NE	33.27	NA	NA	NA	409.46		0.0	*
2Q19		4/3/2019	NE	32.24	NA	NA	NA	410.49		0.0	*
3Q19	442.98	7/2/2019	NE	29.96	NA	NA	NA	413.02	380.76 - 375.76 (62.22 - 67.22)	0.0	*
4Q19		10/2/2019	NE	29.51	NA	NA	NA	413.47		0.0	*
1Q20		1/3/2020	NE	29.63	NA	NA	NA	413.35		0.0	*
2Q20		4/1/2020	NE	27.85	NA	NA	NA	415.13		0.0	*
3Q20		7/8/2020	NE	26.47	NA	NA	NA	416.51		0.0	*
4Q20		10/7/2020	NE	26.62	NA	NA	NA	416.36		0.1	*
1Q21		1/6/2021	NE	27.91	NA	NA	NA	415.07		0.0	*
2Q21		4/6/2021	NE	27.39	NA	NA	NA	415.59		0.0	*
P 4U											
3Q18	442.54	7/3/2018	NE	32.61	NA	NA	NA	409.93	361.39 - 359.39 (81.15 - 83.15)	0.0	*
4Q18		10/3/2018	NE	33.25	NA	NA	NA	409.29		0.0	*
1Q19		1/4/2019	NE	34.45	NA	NA	NA	408.09		0.0	*
2Q19		4/3/2019	NE	34.06	NA	NA	NA	408.48		0.0	*
3Q19	442.74	7/2/2019	NE	31.80	NA	NA	NA	410.94	361.59 - 359.59 (81.15 - 83.15)	0.0	*
4Q19		10/2/2019	NE	31.10	NA	NA	NA	411.64		0.0	*
1Q20		1/3/2020	NE	31.11	NA	NA	NA	411.63		0.0	*
2Q20		4/1/2020	NE	29.40	NA	NA	NA	413.34		0.0	*
3Q20		7/8/2020	NE	27.92	NA	NA	NA	414.82		0.0	*
4Q20		10/7/2020	NE	27.62	NA	NA	NA	415.12		0.0	*
1Q21		1/6/2021	NE	29.03	NA	NA	NA	413.71		0.0	*
2Q21		4/7/2021	NE	28.80	NA	NA	NA	413.94		0.0	*
P 5L											
3Q18	443.84	7/3/2018	NE	32.59	NA	NA	NA	411.25	303.44 - 301.44 (140.40 - 142.40)	0.0	*
4Q18		10/3/2018	NE	33.59	NA	NA	NA	410.25		0.0	*
1Q19		1/4/2019	NE	34.93	NA	NA	NA	408.91		0.0	*
2Q19		4/3/2019	NE	34.05	NA	NA	NA	409.79		0.0	*
3Q19	444.01	7/2/2019	NE	31.10	NA	NA	NA	412.91	303.61 - 301.61 (140.40 - 142.40)	0.0	*
4Q19		10/2/2019	NE	30.98	NA	NA	NA	413.03		0.0	*
1Q20		1/3/2020	NE	31.18	NA	NA	NA	412.83		0.0	*
2Q20		4/1/2020	NE	29.25	NA	NA	NA	414.76		0.0	*
3Q20		7/8/2020	NE	27.62	NA	NA	NA	416.39		0.0	*
4Q20		10/7/2020	NE	27.73	NA	NA	NA	416.28		0.0	*
1Q21		1/6/2021	NE	29.23	NA	NA	NA	414.78		0.0	*
2Q21		4/7/2021	NE	28.14	NA	NA	NA	415.87		0.0	*
P 5U											
3Q18	444.24	7/3/2018	NE	33.86	NA	NA	NA	410.38	313.61 - 311.61 (130.63 - 132.63)	0.0	*
4Q18		10/3/2018	NE	34.77	NA	NA	NA	409.47		0.0	*
1Q19		1/4/2019	NE	36.21	NA	NA	NA	408.03		0.0	*
2Q19		4/3/2019	NE	35.29	NA	NA	NA	408.95		0.0	*
3Q19	444.42	7/2/2019	NE	33.08	NA	NA	NA	411.34	313.79 - 311.79 (130.63 - 132.63)	0.0	*
4Q19		10/2/2019	NE	32.31	NA	NA	NA	412.11		0.0	*
1Q20		1/3/2020	NE	32.29	NA	NA	NA	412.13		0.0	*
2Q20		4/1/2020	NE	30.38	NA	NA	NA	414.04		0.0	*
3Q20		7/8/2020	NE	28.96	NA	NA	NA	415.46		0.0	*
4Q20		10/7/2020	NE	28.93	NA	NA	NA	415.49		0.0	*
1Q21		1/6/2021	NE	30.20	NA	NA	NA	414.22		0.0	*
2Q21		4/7/2021	NE	29.79	NA	NA	NA	414.63		0.0	*
P 6U											
3Q18	443.45	7/3/2018	NE	33.39	NA	NA	NA	410.06	362.95 - 360.95 (80.50 - 82.50)	0.0	*
4Q18		10/3/2018	NE	34.06	NA	NA	NA	409.39		0.0	*
1Q19		1/4/2019	NE	35.37	NA	NA	NA	408.08		0.0	*
2Q19		4/3/2019	NE	35.00	NA	NA	NA	408.45		0.0	*
3Q19	443.63	7/2/2019	NE	32.51	NA	NA	NA	411.12	363.13 - 361.13 (80.50 - 82.50)	0.0	*
4Q19		10/2/2019	NE	31.92	NA	NA	NA	411.71		0.0	*
1Q20		1/3/2020	NE	32.04	NA	NA	NA	411.59		0.0	*
2Q20		4/1/2020	NE	30.20	NA	NA	NA	413.43		0.0	*
3Q20		7/8/2020	NE	28.66	NA	NA	NA	414.97		0.0	*
4Q20		10/7/2020	NE	28.38	NA	NA	NA	415.25		0.0	*
1Q21		1/6/2021	NE	29.88	NA	NA	NA	413.75		0.0	*
2Q21		4/7/2021	NE	29.26	NA	NA	NA	414.37		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 7U											
3Q18	443.91	7/3/2018	NE	33.65	NA	NA	NA	410.26	382.83 - 380.83 (61.08 - 63.08)	0.0	*
4Q18		10/3/2018	NE	34.39	NA	NA	NA	409.52		0.0	*
1Q19		1/4/2019	NE	35.76	NA	NA	NA	408.15		0.0	*
2Q19		4/3/2019	NE	35.25	NA	NA	NA	408.66		0.0	*
3Q19	444.08	7/2/2019	NE	32.68	NA	NA	NA	411.40	383.00 - 381.00 (61.08 - 63.08)	0.0	*
4Q19		10/2/2019	NE	32.15	NA	NA	NA	411.93		0.0	*
1Q20		1/3/2020	NE	32.34	NA	NA	NA	411.74		0.0	*
2Q20		4/1/2020	NE	30.45	NA	NA	NA	413.63		0.0	*
3Q20		7/8/2020	NE	28.87	NA	NA	NA	415.21		0.0	*
4Q20		10/7/2020	NE	28.73	NA	NA	NA	415.35		0.1	*
1Q21		1/6/2021	NE	30.19	NA	NA	NA	413.89		0.0	*
2Q21		4/7/2021	NE	29.34	NA	NA	NA	414.74		0.0	*
P 8U											
3Q18	441.85	7/3/2018	NE	33.88	NA	NA	NA	407.97	381.72 - 379.72 (60.13 - 62.13)	0.0	*
4Q18		10/2/2018	NE	34.39	NA	NA	NA	407.46		0.0	*
1Q19		1/3/2019	NE	35.60	NA	NA	NA	406.25		0.0	*
2Q19		4/2/2019	NE	35.24	NA	NA	NA	406.61		0.0	*
3Q19	442.07	7/2/2019	NE	33.51	NA	NA	NA	408.56	381.94 - 379.94 (60.13 - 62.13)	0.0	*
4Q19		10/2/2019	NE	32.58	NA	NA	NA	409.49		0.0	*
1Q20		1/3/2020	NE	31.32	NA	NA	NA	410.75		0.0	*
2Q20		4/1/2020	NE	30.70	NA	NA	NA	411.37	382.72 - 380.72 (59.35 - 61.35)	0.0	*
3Q20		7/7/2020	NE	29.17	NA	NA	NA	412.90		0.0	*
4Q20		10/7/2020	NE	28.54	NA	NA	NA	413.53		0.0	*
1Q21		1/5/2021	NE	29.88	NA	NA	NA	412.19		0.0	*
2Q21		4/7/2021	NE	30.01	NA	NA	NA	412.06		28.0	*
P 9U											
3Q18	445.04	7/3/2018	NE	38.51	NA	NA	NA	406.53	344.45 - 342.45 (100.59 - 102.59)	0.0	*
4Q18		10/2/2018	NE	39.11	NA	NA	NA	405.93		0.0	*
1Q19		1/3/2019	NE	40.12	NA	NA	NA	404.92		0.0	*
2Q19		4/2/2019	NE	40.14	NA	NA	NA	404.90		0.0	*
3Q19	445.20	7/2/2019	NE	38.31	NA	NA	NA	406.89	344.61 - 342.61 (100.59 - 102.59)	0.0	*
4Q19		10/2/2019	NE	41.75	NA	NA	NA	403.45		0.0	*
1Q20		1/2/2020	NE	36.80	NA	NA	NA	408.40		0.0	*
2Q20		4/1/2020	NE	35.40	NA	NA	NA	409.80		0.0	*
3Q20		7/7/2020	NE	33.75	NA	NA	NA	411.45		0.2	*
4Q20		10/6/2020	NE	33.13	NA	NA	NA	412.07		0.0	*
1Q21		1/5/2021	NE	34.35	NA	NA	NA	410.85		0.0	*
2Q21		4/6/2021	NE	34.81	NA	NA	NA	410.39		0.0	*
P 11L											
3Q18	442.55	7/3/2018	NE	34.66	NA	NA	NA	407.89	332.34 - 330.34 (110.21 - 112.21)	0.0	*
4Q18		10/2/2018	NE	35.08	NA	NA	NA	407.47		0.0	*
1Q19		1/4/2019	NE	36.07	NA	NA	NA	406.48		0.0	*
2Q19		4/3/2019	NE	36.07	NA	NA	NA	406.48		0.0	*
3Q19	442.76	7/2/2019	NE	34.80	NA	NA	NA	407.96	332.55 - 330.55 (110.21 - 112.21)	0.0	*
4Q19		10/2/2019	NE	33.20	NA	NA	NA	409.56		0.0	*
1Q20		1/3/2020	NE	32.86	NA	NA	NA	409.90		0.0	*
2Q20		4/2/2020	NE	31.37	NA	NA	NA	411.39		0.0	*
3Q20		7/8/2020	NE	29.91	NA	NA	NA	412.85		0.0	*
4Q20		10/7/2020	NE	29.32	NA	NA	NA	413.44		0.0	*
1Q21		1/5/2021	NE	30.56	NA	NA	NA	412.20		0.0	*
2Q21		4/7/2021	NE	30.99	NA	NA	NA	411.77		0.0	*
P 11U											
3Q18	443.17	7/3/2018	NE	35.25	NA	NA	NA	407.92	343.25 - 341.25 (99.92 - 101.92)	0.0	*
4Q18		10/2/2018	NE	35.68	NA	NA	NA	407.49		0.0	*
1Q19		1/4/2019	NE	36.73	NA	NA	NA	406.44		0.0	*
2Q19		4/3/2019	NE	36.67	NA	NA	NA	406.50		0.0	*
3Q19	443.38	7/2/2019	NE	34.94	NA	NA	NA	408.44	343.46 - 341.46 (99.92 - 101.92)	0.0	*
4Q19		10/2/2019	NE	33.80	NA	NA	NA	409.58		0.0	*
1Q20		1/3/2020	NE	33.49	NA	NA	NA	409.89		0.0	*
2Q20		4/2/2020	NE	31.98	NA	NA	NA	411.40		0.0	*
3Q20		7/8/2020	NE	30.52	NA	NA	NA	412.86		0.0	*
4Q20		10/7/2020	NE	29.89	NA	NA	NA	413.49		0.0	*
1Q21		1/5/2021	NE	31.18	NA	NA	NA	412.20		0.0	*
2Q21		4/7/2021	NE	31.80	NA	NA	NA	411.58		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 14											
3Q18	442.74	7/3/2018	NE	31.10	NA	NA	NA	411.64	395.27 - 385.27 (47.47 - 57.47)	0.0	*
4Q18		10/3/2018	NE	32.01	NA	NA	NA	410.73		0.0	*
1Q19		1/3/2019	NE	33.34	NA	NA	NA	409.40		0.0	*
2Q19		4/3/2019	NE	32.33	NA	NA	NA	410.41		0.0	*
3Q19	443.01	7/2/2019	NE	30.05	NA	NA	NA	412.96	395.54 - 385.54 (47.47 - 57.47)	0.0	*
4Q19		10/2/2019	NE	29.59	NA	NA	NA	413.42		0.0	*
1Q20		1/3/2020	NE	29.71	NA	NA	NA	413.30		0.0	*
2Q20		4/1/2020	NE	27.95	NA	NA	NA	415.06		0.0	*
3Q20		7/8/2020	NE	26.56	NA	NA	NA	416.45		0.0	*
4Q20		10/7/2020	NE	26.70	NA	NA	NA	416.31		0.0	*
1Q21		1/6/2021	NE	27.98	NA	NA	NA	415.03		0.0	*
2Q21		4/6/2021	NE	27.50	NA	NA	NA	415.51		0.0	*
P 15											
3Q18	443.69	7/3/2018	NE	33.28	NA	NA	NA	410.41	398.24 - 388.24 (45.45 - 55.45)	0.0	*
4Q18		10/3/2018	NE	33.86	NA	NA	NA	409.83		0.0	*
1Q19		1/4/2019	NE	35.10	NA	NA	NA	408.59		0.0	*
2Q19		4/3/2019	NE	34.75	NA	NA	NA	408.94		0.0	*
3Q19	443.88	7/2/2019	NE	32.11	NA	NA	NA	411.77	398.43 - 388.43 (45.45 - 55.45)	0.0	*
4Q19		10/2/2019	NE	31.70	NA	NA	NA	412.18		0.0	*
1Q20		1/3/2020	NE	31.80	NA	NA	NA	412.08		0.0	*
2Q20		4/1/2020	NE	30.10	NA	NA	NA	413.78		0.0	*
3Q20		7/8/2020	NE	28.61	NA	NA	NA	415.27		0.0	*
4Q20		10/7/2020	NE	28.30	NA	NA	NA	415.58		0.1	*
1Q21		1/6/2021	NE	29.71	NA	NA	NA	414.17		0.0	*
2Q21		4/7/2021	NE	29.50	NA	NA	NA	414.38		0.0	*
P 16											
3Q18	442.68	7/3/2018	NE	32.29	NA	NA	NA	410.39	396.94 - 386.94 (45.74 - 55.74)	0.0	*
4Q18		10/3/2018	NE	32.99	NA	NA	NA	409.69		0.0	*
1Q19		1/4/2019	NE	34.28	NA	NA	NA	408.40		0.0	*
2Q19		4/3/2019	NE	33.88	NA	NA	NA	408.80		0.0	*
3Q19	442.84	7/2/2019	NE	31.11	NA	NA	NA	411.73	397.10 - 387.10 (45.74 - 55.74)	0.0	*
4Q19		10/2/2019	NE	30.76	NA	NA	NA	412.08		0.0	*
1Q20		1/3/2020	NE	30.91	NA	NA	NA	411.93		0.0	*
2Q20		4/1/2020	NE	29.05	NA	NA	NA	413.79		0.0	*
3Q20		7/8/2020	NE	27.57	NA	NA	NA	415.27		0.0	*
4Q20		10/7/2020	NE	27.32	NA	NA	NA	415.52		0.0	*
1Q21		1/6/2021	NE	28.81	NA	NA	NA	414.03		0.0	*
2Q21		4/7/2021	NE	28.20	NA	NA	NA	414.64		0.0	*
P 43											
3Q18	444.44	7/3/2018	NE	36.11	NA	NA	NA	408.33	380.88 - 370.88 (63.56 - 73.56)	0.0	*
4Q18		10/2/2018	NE	36.53	NA	NA	NA	407.91		0.0	*
1Q19		1/4/2019	NE	37.59	NA	NA	NA	406.85		0.3	*
2Q19		4/3/2019	NE	37.55	NA	NA	NA	406.89		0.0	*
3Q19	444.62	7/2/2019	NE	35.45	NA	NA	NA	409.17	381.06 - 371.06 (63.56 - 73.56)	0.0	*
4Q19		10/2/2019	NE	34.64	NA	NA	NA	409.98		0.0	*
1Q20		1/3/2020	NE	34.37	NA	NA	NA	410.25		0.0	*
2Q20		4/2/2020	NE	32.83	NA	NA	NA	411.79		0.0	*
3Q20		7/8/2020	NE	31.38	NA	NA	NA	413.24		0.0	*
4Q20		10/7/2020	NE	30.72	NA	NA	NA	413.90		0.0	*
1Q21		1/5/2021	NE	32.06	NA	NA	NA	412.56		0.0	*
2Q21		4/7/2021	NE	32.44	NA	NA	NA	412.18		0.0	*
P 53											
3Q18	446.41	7/2/2018	NE	42.12	NA	NA	NA	404.29	407.91 - 382.91 (38.50 - 63.50)	0.0	
4Q18		10/2/2018	NE	42.54	NA	NA	NA	403.87		0.0	
1Q19		1/3/2019	NE	42.64	NA	NA	NA	403.77		0.0	
2Q19		4/1/2019	NE	42.79	NA	NA	NA	403.62	406.10 - 381.10 (40.31 - 65.31)	0.0	
3Q19	446.57	7/1/2019	NE	40.33	NA	NA	NA	406.24	406.26 - 381.26 (40.31 - 65.31)	0.0	
4Q19		10/1/2019	NE	38.69	NA	NA	NA	407.88		0.0	*
1Q20		1/2/2020	NE	38.63	NA	NA	NA	407.94		0.0	*
2Q20		4/2/2020	NE	38.36	NA	NA	NA	408.21		0.0	*
3Q20		7/6/2020	NE	37.09	NA	NA	NA	409.48		0.0	*
4Q20		10/6/2020	NE	36.79	NA	NA	NA	409.78		0.0	*
1Q21		1/5/2021	NE	37.82	NA	NA	NA	408.75		0.0	*
2Q21		4/6/2021	NE	38.57	NA	NA	NA	408.00		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 54											
3Q18	442.32	7/2/2018	NE	40.51	NA	NA	NA	401.81	404.32 - 379.32 (38.00 - 63.00)	0.0	
4Q18		10/2/2018	NE	40.50	NA	NA	NA	401.82		0.0	
1Q19		1/2/2019	NE	40.29	NA	NA	NA	402.03		0.0	
2Q19		4/1/2019	NE	40.36	NA	NA	NA	401.96		0.0	
3Q19	442.52	7/1/2019	NE	35.96	NA	NA	NA	406.56	404.52 - 379.52 (38.00 - 63.00)	0.0	*
4Q19		10/1/2019	NE	35.07	NA	NA	NA	407.45		0.0	*
1Q20		1/2/2020	NE	36.05	NA	NA	NA	406.47		0.0	*
2Q20		4/1/2020	NE	35.92	NA	NA	NA	406.60		0.0	*
3Q20		7/6/2020	NE	34.77	NA	NA	NA	407.75		0.0	*
4Q20		10/6/2020	NE	35.20	NA	NA	NA	407.32		0.0	*
1Q21		1/4/2021	NE	36.47	NA	NA	NA	406.05		0.0	*
2Q21		4/5/2021	NE	37.06	NA	NA	NA	405.46		0.0	*
P 55R											
3Q18	443.79	7/2/2018	41.51	42.12	401.67	402.28	0.61	402.16	403.36 - 393.36 (40.43 - 50.43)	152	
4Q18		10/1/2018	41.49	42.18	401.61	402.30	0.69	402.16		153	
1Q19		1/2/2019	41.84	42.27	401.52	401.95	0.43	401.86		15000	
2Q19		4/1/2019	41.21	41.52	402.27	402.58	0.31	402.52		280	
3Q19	444.01	7/1/2019	37.66	38.16	405.85	406.35	0.50	406.25	403.58 - 393.58 (40.43 - 50.43)	66.7	*
4Q19		10/1/2019	36.11	36.17	407.84	407.90	0.06	407.89		210	*
1Q20		1/2/2020	36.73	36.78	407.23	407.28	0.05	407.27		85.8	*
2Q20		4/1/2020	36.62	36.65	407.36	407.39	0.03	407.38		67.0	*
3Q20		7/6/2020	35.44	35.46	408.55	408.57	0.02	408.57		78.3	*
4Q20		10/5/2020	35.25	35.27	408.74	408.76	0.02	408.76		210	*
1Q21		1/4/2021	36.40	36.41	407.60	407.61	0.01	407.61		185	*
2Q21		4/5/2021	37.11	37.17	406.84	406.90	0.06	406.89		125	*
P 56											
3Q18	446.14	7/2/2018	NE	45.34	NA	NA	NA	400.80	405.32 - 380.32 (40.82 - 65.82)	0.0	
4Q18		10/1/2018	NE	45.27	NA	NA	NA	400.87		0.0	
1Q19		1/2/2019	NE	45.11	NA	NA	NA	401.03		0.0	
2Q19		4/1/2019	NE	45.07	NA	NA	NA	401.07		0.0	
3Q19	446.32	7/1/2019	NE	41.09	NA	NA	NA	405.23	405.50 - 380.50 (40.82 - 65.82)	0.1	
4Q19		10/1/2019	NE	39.72	NA	NA	NA	406.60		109	*
1Q20		1/2/2020	NE	41.01	NA	NA	NA	405.31		112	
2Q20		4/1/2020	NE	40.70	NA	NA	NA	405.62		113	*
3Q20		7/6/2020	NE	39.61	NA	NA	NA	406.71		170	*
4Q20		10/5/2020	NE	39.74	NA	NA	NA	406.58		126	*
1Q21		1/8/2021	NE	41.06	NA	NA	NA	405.26		86.4	
2Q21		4/5/2021	NE	41.38	NA	NA	NA	404.94		20.2	
P 57											
3Q18	446.96	7/2/2018	NE	45.89	NA	NA	NA	401.07	402.77 - 392.77 (44.19 - 54.19)	1.7	
4Q18		10/2/2018	NE	45.86	NA	NA	NA	401.10		0.2	
1Q19		1/2/2019	NE	45.66	NA	NA	NA	401.30		0.0	
2Q19		4/1/2019	NE	45.49	NA	NA	NA	401.47		0.0	
3Q19	447.15	7/1/2019	NE	41.35	NA	NA	NA	405.80	402.96 - 392.96 (44.19 - 54.19)	6.8	*
4Q19		10/1/2019	NE	40.19	NA	NA	NA	406.96		85.8	*
1Q20		1/2/2020	NE	41.59	NA	NA	NA	405.56		64.2	*
2Q20		4/1/2020	NE	41.43	NA	NA	NA	405.72		105	*
3Q20		7/6/2020	NE	40.23	NA	NA	NA	406.92		127	*
4Q20		10/5/2020	NE	40.59	NA	NA	NA	406.56		13.7	*
1Q21		1/4/2021	NE	41.74	NA	NA	NA	405.41		169	*
2Q21		4/5/2021	NE	42.15	NA	NA	NA	405.00		47.1	*
P 58											
3Q18	444.94	7/2/2018	NE	43.70	NA	NA	NA	401.24	404.73 - 379.73 (40.21 - 65.21)	0.0	
		7/12/2018	43.63	43.64	401.30	401.31	0.01	401.31		0.0	
4Q18		10/1/2018	NE	43.66	NA	NA	NA	401.28		0.0	
1Q19		1/2/2019	43.42	43.43	401.51	401.52	0.01	401.52		0.0	
2Q19		4/1/2019	NE	43.19	NA	NA	NA	401.75		0.0	
3Q19	445.16	7/1/2019	NE	38.92	NA	NA	NA	406.24	404.95 - 379.95 (40.21 - 65.21)	2.5	*
4Q19		10/1/2019	37.93	37.94	407.22	407.23	0.01	407.23		67.2	*
1Q20		1/2/2020	39.38	40.00	405.16	405.78	0.62	405.66		38.5	*
2Q20		4/1/2020	39.30	39.31	405.85	405.86	0.01	405.86		41.0	*
3Q20		7/6/2020	38.06	38.08	407.08	407.10	0.02	407.10		28.7	*
4Q20		10/5/2020	38.58	38.61	406.55	406.58	0.03	406.57		134	*
1Q21		1/4/2021	39.82	39.85	405.31	405.34	0.03	405.33		178	*
2Q21		4/5/2021	NE	39.98	NA	NA	NA	405.18		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 59											
3Q18	446.86	7/2/2018	NE	46.26	NA	NA	NA	400.60	398.95 - 373.95 (47.91 - 72.91)	214	*
4Q18		10/1/2018	NE	46.19	NA	NA	NA	400.67		179	*
1Q19		1/2/2019	NE	45.95	NA	NA	NA	400.91		15000	*
2Q19		4/1/2019	46.05	46.06	400.80	400.81	0.01	400.81		313	*
3Q19	447.07	7/1/2019	NE	42.06	NA	NA	NA	405.01	399.16 - 374.16 (47.91 - 72.91)	400	*
		7/15/2019	41.53	41.54	405.53	405.54	0.01	405.54		406	*
4Q19		10/1/2019	NE	40.61	NA	NA	NA	406.46		180	*
1Q20		1/2/2020	NE	41.99	NA	NA	NA	405.08		113	*
2Q20		4/1/2020	NE	41.35	NA	NA	NA	405.72		161	*
3Q20		7/6/2020	NE	40.40	NA	NA	NA	406.67		163	*
4Q20		10/5/2020	NE	40.49	NA	NA	NA	406.58		231	*
1Q21		1/4/2021	NE	41.66	NA	NA	NA	405.41		186	*
2Q21		4/5/2021	NE	42.14	NA	NA	NA	404.93		156	*
P 60											
3Q18	446.69	7/2/2018	45.61	45.62	401.07	401.08	0.01	401.08	402.04 - 382.04 (44.65 - 64.65)	40.7	
4Q18		10/1/2018	45.61	45.63	401.06	401.08	0.02	401.08		36.7	
1Q19		1/2/2019	45.48	45.54	401.15	401.21	0.06	401.20		923	
2Q19		4/1/2019	45.62	45.63	401.06	401.07	0.01	401.07		83.5	
3Q19	446.88	7/1/2019	NE	41.98	NA	NA	NA	404.90	402.23 - 382.23 (44.65 - 64.65)	31.7	*
4Q19		10/1/2019	NE	40.42	NA	NA	NA	406.46		1.7	*
		10/15/2019	40.41	40.42	406.46	406.47	0.01	406.47		1.7	*
1Q20		1/2/2020	41.44	41.45	405.43	405.44	0.01	405.44		6.6	*
2Q20		4/1/2020	NE	40.87	NA	NA	NA	406.01		3.4	*
3Q20		7/6/2020	NE	39.94	NA	NA	NA	406.94		15.5	*
4Q20		10/5/2020	NE	39.83	NA	NA	NA	407.05		41.2	*
1Q21		1/4/2021	NE	41.02	NA	NA	NA	405.86		74.6	*
2Q21		4/5/2021	NE	41.55	NA	NA	NA	405.33		0.0	*
P 61											
3Q18	444.47	7/2/2018	43.77	44.20	400.27	400.70	0.43	400.61	398.80 - 373.80 (45.68 - 70.68)	91.3	*
4Q18		10/2/2018	43.89	43.93	400.54	400.58	0.04	400.57		237	*
1Q19		1/3/2019	43.79	43.83	400.64	400.68	0.04	400.67		375	*
2Q19		4/1/2019	43.80	43.81	400.66	400.67	0.01	400.67		417	*
3Q19	444.66	7/1/2019	40.39	40.40	404.26	404.27	0.01	404.27	398.98 - 373.98 (45.68 - 70.68)	220	*
4Q19		10/1/2019	NE	38.74	NA	NA	NA	405.92		68.4	*
1Q20		1/7/2020	40.07	40.08	404.58	404.59	0.01	404.59		8.5	*
2Q20		4/2/2020	39.46	39.49	405.17	405.20	0.03	405.19		37.0	*
3Q20		7/7/2020	38.47	38.49	406.17	406.19	0.02	406.19		29.0	*
4Q20		10/5/2020	38.44	38.45	406.21	406.22	0.01	406.22		18.4	*
1Q21		1/5/2021	39.68	39.70	404.96	404.98	0.02	404.98		102	*
2Q21		4/5/2021	39.70	39.71	404.95	404.96	0.01	404.96		88.1	*
P 62											
3Q18	442.43	7/2/2018	41.38	42.49	399.94	401.05	1.11	400.83	400.96 - 375.96 (41.47 - 66.47)	0.0	
4Q18		10/3/2018	41.43	42.42	400.01	401.00	0.99	400.80		0.4	
1Q19		1/3/2019	41.47	42.57	399.86	400.96	1.10	400.74		1.2	
2Q19		4/1/2019	41.58	42.34	400.09	400.85	0.76	400.70		63.7	
3Q19	442.60	7/1/2019	38.86	38.89	403.71	403.74	0.03	403.73	401.13 - 376.13 (41.47 - 66.47)	301	*
4Q19		10/1/2019	37.05	37.08	405.52	405.55	0.03	405.54		104	*
1Q20		1/2/2020	37.59	37.65	404.95	405.01	0.06	405.00		40.1	*
2Q20		4/2/2020	37.19	37.21	405.39	405.41	0.02	405.41		46.0	*
3Q20		7/6/2020	36.00	36.01	406.59	406.60	0.01	406.60		63.0	*
4Q20		10/5/2020	35.81	36.01	406.59	406.79	0.20	406.75		10.4	*
1Q21		1/5/2021	37.02	37.05	405.55	405.58	0.03	405.57		104	*
2Q21		4/5/2021	37.36	37.37	405.23	405.24	0.01	405.24		160	*
P 63											
3Q18	445.85	7/3/2018	45.41	45.43	400.42	400.44	0.02	400.44	398.56 - 373.56 (47.29 - 72.29)	222	*
4Q18		10/2/2018	45.59	45.62	400.23	400.26	0.03	400.25		70.1	*
1Q19		1/3/2019	45.58	45.61	400.24	400.27	0.03	400.26		68.2	*
2Q19		4/1/2019	45.62	45.65	400.20	400.23	0.03	400.22		852	*
3Q19	446.06	7/1/2019	43.86	43.91	402.15	402.20	0.05	402.19	398.77 - 373.77 (47.29 - 72.29)	81.2	*
4Q19		10/2/2019	41.89	41.92	404.14	404.17	0.03	404.16		5.0	*
1Q20		1/2/2020	41.63	41.65	404.41	404.43	0.02	404.43		8.7	*
2Q20		4/2/2020	41.16	41.17	404.89	404.90	0.01	404.90		10.5	*
3Q20		7/7/2020	39.67	39.68	406.38	406.39	0.01	406.39		28.0	*
4Q20		10/6/2020	39.20	39.21	406.85	406.86	0.01	406.86		54.2	*
1Q21		1/5/2021	40.35	40.36	405.70	405.71	0.01	405.71		18.3	*
2Q21		4/6/2021	40.97	40.98	405.08	405.09	0.01	405.09		34.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 64											
3Q18	446.89	7/3/2018	46.69	46.73	400.16	400.20	0.04	400.19	399.66 - 374.66 (47.23 - 72.23)	269	*
4Q18		10/2/2018	46.94	46.99	399.90	399.95	0.05	399.94		178	*
1Q19		1/2/2019	47.21	47.53	399.36	399.68	0.32	399.62		2559	
2Q19		4/1/2019	46.96	47.08	399.81	399.93	0.12	399.91		1220	*
3Q19	446.78	7/1/2019	45.63	45.72	401.06	401.15	0.09	401.13	399.55 - 374.55 (47.23 - 72.23)	206	*
4Q19		10/2/2019	43.58	43.61	403.17	403.20	0.03	403.19		77.5	*
1Q20		1/2/2020	42.98	43.04	403.74	403.80	0.06	403.79		38.9	*
2Q20		4/1/2020	42.35	42.40	404.38	404.43	0.05	404.42		154	*
3Q20		7/7/2020	40.85	40.88	405.90	405.93	0.03	405.92		112	*
4Q20		10/6/2020	40.30	40.34	406.44	406.48	0.04	406.47		115	*
1Q21		1/5/2021	41.45	41.51	405.27	405.33	0.06	405.32		81.2	*
2Q21		4/6/2021	42.17	42.19	404.59	404.61	0.02	404.61		164	*
P 65											
3Q18	444.60	7/3/2018	NE	43.58	NA	NA	NA	401.02	397.58 - 372.58 (47.02 - 72.02)	24.9	*
4Q18		10/2/2018	NE	43.91	NA	NA	NA	400.69		4.0	*
1Q19		1/3/2019	NE	44.19	NA	NA	NA	400.41		115	*
2Q19		4/1/2019	43.92	43.93	400.67	400.68	0.01	400.68		185	*
3Q19	444.77	7/1/2019	NE	41.97	NA	NA	NA	402.80	397.75 - 372.75 (47.02 - 72.02)	72.8	*
4Q19		10/2/2019	40.01	40.02	404.75	404.76	0.01	404.76		31.1	*
1Q20		1/2/2020	NE	39.96	NA	NA	NA	404.81		9.0	*
2Q20		4/2/2020	NE	39.54	NA	NA	NA	405.23		1.3	*
3Q20		7/7/2020	NE	38.28	NA	NA	NA	406.49		2.8	*
4Q20		10/6/2020	NE	37.82	NA	NA	NA	406.95		25.6	*
1Q21		1/5/2021	NE	39.03	NA	NA	NA	405.74		10.6	*
2Q21		4/6/2021	NE	39.76	NA	NA	NA	405.01		1.6	*
P 66											
3Q18	436.81	7/2/2018	NE	35.20	NA	NA	NA	401.61	402.09 - 377.09 (34.72 - 59.72)	0.0	
4Q18		10/3/2018	NE	35.03	NA	NA	NA	401.78		8.0	
1Q19		1/4/2019	NE	34.75	NA	NA	NA	402.06		1.2	
2Q19		4/2/2019	NE	34.48	NA	NA	NA	402.33		2.6	*
3Q19	437.00	7/2/2019	NE	30.27	NA	NA	NA	406.73	402.28 - 377.28 (34.72 - 59.72)	87.7	*
4Q19		10/2/2019	NE	29.50	NA	NA	NA	407.50		42.2	*
1Q20		1/3/2020	NE	30.98	NA	NA	NA	406.02		77.3	*
2Q20		4/3/2020	NE	30.84	NA	NA	NA	406.16		122	*
3Q20		7/13/2020	NE	29.51	NA	NA	NA	407.49		35.6	*
4Q20		10/7/2020	NE	30.10	NA	NA	NA	406.90		51.2	*
1Q21		1/5/2021	NE	31.32	NA	NA	NA	405.68		31.1	*
2Q21		4/7/2021	NE	31.42	NA	NA	NA	405.58		49.1	*
P 67											
3Q18	444.10	7/2/2018	41.21	41.24	402.86	402.89	0.03	402.88	402.12 - 377.12 (41.98 - 66.98)	0.0	*
4Q18		10/3/2018	41.12	41.14	402.96	402.98	0.02	402.98		0.0	*
1Q19		1/4/2019	40.97	41.00	403.10	403.13	0.03	403.12		25.0	*
2Q19		4/2/2019	40.81	40.82	403.28	403.29	0.01	403.29		99.9	*
3Q19	444.30	7/2/2019	37.20	37.24	407.06	407.10	0.04	407.09	402.32 - 377.32 (41.98 - 66.98)	1.1	*
4Q19		10/2/2019	36.27	36.32	407.98	408.03	0.05	408.02		0.9	*
1Q20		1/3/2020	37.30	37.31	406.99	407.00	0.01	407.00		4.4	*
2Q20		4/3/2020	36.91	36.92	407.38	407.39	0.01	407.39		12.0	*
3Q20		7/7/2020	35.80	35.81	408.49	408.50	0.01	408.50		0.9	*
4Q20		10/7/2020	36.24	36.26	408.04	408.06	0.02	408.06		3.3	*
1Q21		1/5/2021	37.39	37.45	406.85	406.91	0.06	406.90		9.6	*
2Q21		4/7/2021	37.52	37.53	406.77	406.78	0.01	406.78		0.2	*
P 68											
3Q18	445.18	7/2/2018	44.25	44.32	400.86	400.93	0.07	400.92	401.42 - 376.42 (43.76 - 68.76)	136	
4Q18		10/2/2018	44.22	44.31	400.87	400.96	0.09	400.94		169	
1Q19		1/3/2019	44.07	44.26	400.92	401.11	0.19	401.07		187	
2Q19		4/1/2019	44.21	44.34	400.84	400.97	0.13	400.94		468	
3Q19	445.38	7/1/2019	40.75	40.88	404.50	404.63	0.13	404.60	401.62 - 376.62 (43.76 - 68.76)	259	*
4Q19		10/1/2019	39.13	39.17	406.21	406.25	0.04	406.24		189	*
1Q20		1/2/2020	40.15	40.20	405.18	405.23	0.05	405.22		115	*
2Q20		4/2/2020	39.42	39.46	405.92	405.96	0.04	405.95		181	*
3Q20		7/7/2020	38.60	38.61	406.77	406.78	0.01	406.78		159	*
4Q20		10/5/2020	38.44	38.47	406.91	406.94	0.03	406.93		112	*
1Q21		1/5/2021	39.73	39.77	405.61	405.65	0.04	405.64		43.3	*
2Q21		4/5/2021	40.04	40.06	405.32	405.34	0.02	405.34		157	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 69											
3Q18	443.40	7/2/2018	NE	43.00	NA	NA	NA	400.40	402.58 - 377.58 (40.82 - 65.82)	0.0	
4Q18		10/2/2018	NE	42.95	NA	NA	NA	400.45		0.0	
1Q19		1/3/2019	NE	42.80	NA	NA	NA	400.60		0.1	
2Q19		4/1/2019	NE	42.96	NA	NA	NA	400.44		0.0	
3Q19	443.77	7/1/2019	NE	39.38	NA	NA	NA	404.39	402.95 - 377.95 (40.82 - 65.82)	270	*
4Q19		10/1/2019	NE	37.70	NA	NA	NA	406.07		42.3	*
1Q20		1/2/2020	NE	38.94	NA	NA	NA	404.83		21.2	*
2Q20		4/2/2020	NE	38.05	NA	NA	NA	405.72		72.0	*
3Q20		7/7/2020	NE	37.40	NA	NA	NA	406.37		149	*
4Q20		10/5/2020	NE	37.18	NA	NA	NA	406.59		71.5	*
1Q21		1/5/2021	NE	38.51	NA	NA	NA	405.26		91.1	*
2Q21		4/5/2021	NE	38.75	NA	NA	NA	405.02		59.2	*
P 70											
3Q18	442.95	7/2/2018	42.23	42.26	400.69	400.72	0.03	400.71	398.28 - 373.28 (44.67 - 69.67)	238	*
4Q18		10/2/2018	42.25	42.27	400.68	400.70	0.02	400.70		297	*
1Q19		1/3/2019	42.18	42.19	400.76	400.77	0.01	400.77		204	*
2Q19		4/1/2019	42.26	42.27	400.68	400.69	0.01	400.69		1406	*
3Q19	443.11	7/1/2019	38.92	38.93	404.18	404.19	0.01	404.19	398.44 - 373.44 (44.67 - 69.67)	371	*
4Q19		10/1/2019	37.22	37.23	405.88	405.89	0.01	405.89		221	*
1Q20		1/2/2020	NE	38.15	NA	NA	NA	404.96		150	*
2Q20		4/2/2020	37.65	37.66	405.45	405.46	0.01	405.46		190	*
3Q20		7/7/2020	NE	36.67	NA	NA	NA	406.44		268	*
4Q20		10/5/2020	NE	36.58	NA	NA	NA	406.53		242	*
1Q21		1/5/2021	37.79	37.80	405.31	405.32	0.01	405.32		58.1	*
2Q21		4/5/2021	NE	38.01	NA	NA	NA	405.10		218	*
P 71											
3Q18	444.94	7/3/2018	NE	43.36	NA	NA	NA	401.58	402.33 - 377.33 (42.61 - 67.61)	41.2	
4Q18		10/2/2018	NE	43.61	NA	NA	NA	401.33		108	
1Q19		1/3/2019	NE	43.73	NA	NA	NA	401.21		123	
2Q19		4/1/2019	NE	43.38	NA	NA	NA	401.56		350	
3Q19	445.09	7/1/2019	NE	40.85	NA	NA	NA	404.24	402.48 - 377.48 (42.61 - 67.61)	52.7	*
4Q19		10/1/2019	NE	38.67	NA	NA	NA	406.42		72.4	*
1Q20		1/2/2020	NE	39.49	NA	NA	NA	405.60		49.6	*
2Q20		4/2/2020	NE	39.30	NA	NA	NA	405.79		101	*
3Q20		7/7/2020	NE	38.35	NA	NA	NA	406.74		51.8	*
4Q20		10/6/2020	NE	38.06	NA	NA	NA	407.03		101	*
1Q21		1/5/2021	NE	38.96	NA	NA	NA	406.13		35.6	*
2Q21		4/6/2021	NE	39.62	NA	NA	NA	405.47		5.0	*
P 72											
3Q18	444.49	7/3/2018	NE	42.90	NA	NA	NA	401.59	398.72 - 373.72 (45.77 - 70.77)	2.3	*
4Q18		10/3/2018	43.01	43.02	401.47	401.48	0.01	401.48		7.2	*
1Q19		1/3/2019	43.11	43.12	401.37	401.38	0.01	401.38		135	*
2Q19		4/1/2019	42.93	42.94	401.55	401.56	0.01	401.56		83.4	*
3Q19	444.70	7/1/2019	NE	40.20	NA	NA	NA	404.50	398.93 - 373.93 (45.77 - 70.77)	11.0	*
4Q19		10/2/2019	NM	NM	NA	NA	NA	NA		NM	Unsafe condition at well - Unable to access
1Q20		1/2/2020	NM	NM	NA	NA	NA	NA		NM	Unsafe condition at well - Unable to access
2Q20		4/2/2020	NE	38.84	NA	NA	NA	405.86		0.8	*
3Q20		7/7/2020	NE	37.75	NA	NA	NA	406.95		5.6	*
4Q20		10/6/2020	NE	37.54	NA	NA	NA	407.16		49.4	*
1Q21		1/5/2021	NE	38.65	NA	NA	NA	406.05		30.1	*
2Q21		4/6/2021	NE	39.06	NA	NA	NA	405.64		4.2	*
P 73											
3Q18	443.86	7/3/2018	NE	43.43	NA	NA	NA	400.43	402.27 - 377.27 (41.59 - 66.59)	0.0	
4Q18		10/3/2018	NE	43.24	NA	NA	NA	400.62		1.8	
1Q19		1/3/2019	NE	43.06	NA	NA	NA	400.80		6.6	
2Q19		4/2/2019	NE	42.70	NA	NA	NA	401.16		2.6	
3Q19	444.02	7/1/2019	NE	38.98	NA	NA	NA	405.04	402.42 - 377.42 (41.59 - 66.59)	488	*
4Q19		10/1/2019	NE	37.68	NA	NA	NA	406.34		226	*
1Q20		1/2/2020	NE	39.30	NA	NA	NA	404.72		38.4	*
2Q20		4/2/2020	NE	38.75	NA	NA	NA	405.27		42.8	*
3Q20		7/7/2020	NE	37.81	NA	NA	NA	406.21		230	*
4Q20		10/6/2020	NE	38.01	NA	NA	NA	406.01		202	*
1Q21		1/8/2021	NE	39.22	NA	NA	NA	404.80		54.5	*
2Q21		4/5/2021	NE	39.36	NA	NA	NA	404.66		62.9	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 74											
3Q18	442.72	7/2/2018	NE	42.35	NA	NA	NA	400.37	398.89 - 373.89 (43.83 - 68.83)	0.0	*
4Q18		10/2/2018	NE	42.18	NA	NA	NA	400.54		1.1	*
1Q19		1/3/2019	NE	41.95	NA	NA	NA	400.77		0.0	*
2Q19		4/1/2019	NE	40.46	NA	NA	NA	402.26		0.7	* Gauging result anomalous
3Q19	442.93	7/1/2019	NE	38.32	NA	NA	NA	404.61	399.10 - 374.10 (43.83 - 68.83)	0.0	*
4Q19		10/1/2019	NE	36.71	NA	NA	NA	406.22		0.2	*
1Q20		1/2/2020	NE	38.07	NA	NA	NA	404.86		0.0	*
2Q20		4/2/2020	NE	37.28	NA	NA	NA	405.65		0.0	*
3Q20		7/7/2020	NE	36.55	NA	NA	NA	406.38		0.1	*
4Q20		10/5/2020	NE	36.46	NA	NA	NA	406.47		0.1	*
1Q21		1/5/2021	NE	37.77	NA	NA	NA	405.16		0.0	*
2Q21		4/5/2021	NE	37.98	NA	NA	NA	404.95		0.0	*
P 75											
3Q18	446.42	7/2/2018	NE	45.15	NA	NA	NA	401.27	403.29 - 378.29 (43.13 - 68.13)	0.0	
4Q18		10/3/2018	NE	45.06	NA	NA	NA	401.36		14.4	
1Q19		1/4/2019	NE	44.74	NA	NA	NA	401.68		4.6	
2Q19		4/2/2019	NE	44.43	NA	NA	NA	401.99		21.6	
3Q19	446.68	7/2/2019	NE	40.50	NA	NA	NA	406.18	403.55 - 378.55 (43.13 - 68.13)	10.5	*
4Q19		10/2/2019	NE	39.53	NA	NA	NA	407.15		5.7	*
1Q20		1/3/2020	NE	41.08	NA	NA	NA	405.60		33.8	*
2Q20		4/3/2020	NE	40.65	NA	NA	NA	406.03		87.7	*
3Q20		7/7/2020	NE	39.62	NA	NA	NA	407.06		31.9	*
4Q20		10/7/2020	NE	40.01	NA	NA	NA	406.67		43.8	*
1Q21		1/5/2021	NE	41.13	NA	NA	NA	405.55		48.2	*
2Q21		4/7/2021	NE	41.16	NA	NA	NA	405.52		72.1	*
P 82A											
3Q18	435.02	7/2/2018	NE	28.14	NA	NA	NA	406.88	401.81 - 386.81 (33.21 - 48.21)	0.0	*
4Q18		10/3/2018	NE	28.38	NA	NA	NA	406.64		0.0	*
1Q19		1/4/2019	NE	28.25	NA	NA	NA	406.77		0.0	*
2Q19		4/2/2019	NE	27.83	NA	NA	NA	407.19		0.0	*
3Q19	434.94	7/1/2019	NE	24.08	NA	NA	NA	410.86	401.73 - 386.73 (33.21 - 48.21)	0.0	*
4Q19		10/1/2019	NE	23.86	NA	NA	NA	411.08		0.1	*
1Q20		1/2/2020	NE	24.67	NA	NA	NA	410.27		0.0	*
2Q20		4/2/2020	NE	24.11	NA	NA	NA	410.83		0.0	*
3Q20		7/7/2020	NE	22.98	NA	NA	NA	411.96		0.0	*
4Q20		10/7/2020	NE	24.11	NA	NA	NA	410.83		0.0	*
1Q21		1/5/2021	NE	25.28	NA	NA	NA	409.66		0.0	*
2Q21		4/6/2021	NE	25.15	NA	NA	NA	409.79		0.0	*
P 82B											
3Q18	434.48	7/2/2018	NE	27.85	NA	NA	NA	406.63	371.68 - 369.68 (62.80 - 64.80)	0.0	*
4Q18		10/3/2018	NE	28.09	NA	NA	NA	406.39		0.0	*
1Q19		1/4/2019	NE	27.97	NA	NA	NA	406.51		0.0	*
2Q19		4/2/2019	NE	27.55	NA	NA	NA	406.93		0.0	*
3Q19	434.68	7/1/2019	NE	23.78	NA	NA	NA	410.90	371.88 - 369.88 (62.80 - 64.80)	0.0	*
4Q19		10/1/2019	NE	23.59	NA	NA	NA	411.09		0.0	*
1Q20		1/2/2020	NE	24.40	NA	NA	NA	410.28		0.0	*
2Q20		4/2/2020	NE	23.82	NA	NA	NA	410.86		0.0	*
3Q20		7/7/2020	NE	22.71	NA	NA	NA	411.97		0.1	*
4Q20		10/7/2020	NE	23.82	NA	NA	NA	410.86		0.0	*
1Q21		1/5/2021	NE	25.01	NA	NA	NA	409.67		0.0	*
2Q21		4/6/2021	NE	24.87	NA	NA	NA	409.81		0.0	*
P 82C											
3Q18	434.21	7/2/2018	NE	27.65	NA	NA	NA	406.56	351.44 - 349.44 (82.77 - 84.77)	0.0	*
4Q18		10/3/2018	NE	27.79	NA	NA	NA	406.42		0.0	*
1Q19		1/4/2019	NE	27.67	NA	NA	NA	406.54		0.0	*
2Q19		4/2/2019	NE	27.25	NA	NA	NA	406.96		0.0	*
3Q19	434.41	7/1/2019	NE	23.49	NA	NA	NA	410.92	351.64 - 349.64 (82.77 - 84.77)	0.0	*
4Q19		10/1/2019	NE	23.30	NA	NA	NA	411.11		0.0	*
1Q20		1/2/2020	NE	24.72	NA	NA	NA	409.69		0.0	*
2Q20		4/2/2020	NE	23.52	NA	NA	NA	410.89		0.0	*
3Q20		7/7/2020	NE	22.40	NA	NA	NA	412.01		0.0	*
4Q20		10/7/2020	NE	23.53	NA	NA	NA	410.88		0.0	*
1Q21		1/5/2021	NE	24.73	NA	NA	NA	409.68		0.1	*
2Q21		4/6/2021	NE	24.58	NA	NA	NA	409.83		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 82D											
3Q18	434.89	7/2/2018	NE	28.35	NA	NA	NA	406.54	323.35 - 321.35 (111.54 - 113.54)	0.0	*
4Q18		10/3/2018	NE	28.57	NA	NA	NA	406.32		0.0	*
1Q19		1/4/2019	NE	28.42	NA	NA	NA	406.47		0.0	*
2Q19		4/2/2019	NE	27.99	NA	NA	NA	406.90		0.0	*
3Q19	435.09	7/1/2019	NE	24.20	NA	NA	NA	410.89	323.55 - 321.55 (111.54 - 113.54)	0.0	*
4Q19		10/1/2019	NE	24.02	NA	NA	NA	411.07		0.0	*
1Q20		1/2/2020	NE	25.86	NA	NA	NA	409.23		0.0	*
2Q20		4/2/2020	NE	24.27	NA	NA	NA	410.82		0.0	*
3Q20		7/7/2020	NE	23.16	NA	NA	NA	411.93		0.0	*
4Q20		10/7/2020	NE	24.30	NA	NA	NA	410.79		0.0	*
1Q21		1/5/2021	NE	25.47	NA	NA	NA	409.62		0.1	*
2Q21		4/6/2021	NE	25.36	NA	NA	NA	409.73		0.0	*
P 83A											
3Q18	445.36	7/2/2018	NE	42.59	NA	NA	NA	402.77	398.71 - 383.71 (46.65 - 61.65)	0.0	*
4Q18		10/1/2018	NE	43.03	NA	NA	NA	402.33		0.0	*
1Q19		1/2/2019	NE	43.55	NA	NA	NA	401.81		0.0	*
2Q19		4/2/2019	NE	43.34	NA	NA	NA	402.02	397.96 - 382.96 (47.40 - 62.40)	0.0	*
3Q19	445.54	7/1/2019	NE	41.95	NA	NA	NA	403.59	398.14 - 383.14 (47.40 - 62.40)	0.0	*
4Q19		10/2/2019	NE	40.55	NA	NA	NA	404.99		0.0	*
1Q20		1/2/2020	NE	39.80	NA	NA	NA	405.74		0.0	*
2Q20		4/2/2020	NE	38.84	NA	NA	NA	406.70		0.0	*
3Q20		7/7/2020	NE	37.27	NA	NA	NA	408.27		0.0	*
4Q20		10/6/2020	NE	36.71	NA	NA	NA	408.83		0.0	*
1Q21		1/4/2021	NE	38.82	NA	NA	NA	406.72		0.0	*
2Q21		4/6/2021	NE	38.12	NA	NA	NA	407.42		0.0	*
P 83B											
3Q18	445.55	7/2/2018	NE	42.83	NA	NA	NA	402.72	371.75 - 369.75 (73.80 - 75.80)	0.0	*
4Q18		10/1/2018	NE	43.29	NA	NA	NA	402.26		0.0	*
1Q19		1/2/2019	NE	43.80	NA	NA	NA	401.75		0.0	*
2Q19		4/2/2019	NE	43.59	NA	NA	NA	401.96		0.0	*
3Q19	445.77	7/1/2019	NE	42.20	NA	NA	NA	403.57	371.97 - 369.97 (73.80 - 75.80)	0.0	*
4Q19		10/2/2019	NE	40.80	NA	NA	NA	404.97		0.0	*
1Q20		1/2/2020	NE	40.06	NA	NA	NA	405.71		0.0	*
2Q20		4/2/2020	NE	39.09	NA	NA	NA	406.68		0.0	*
3Q20		7/7/2020	NE	37.54	NA	NA	NA	408.23		0.0	*
4Q20		10/6/2020	NE	36.96	NA	NA	NA	408.81		0.1	*
1Q21		1/4/2021	NE	37.87	NA	NA	NA	407.90		0.0	*
2Q21		4/6/2021	NE	38.38	NA	NA	NA	407.39		0.0	*
P 83C											
3Q18	445.78	7/2/2018	NE	42.99	NA	NA	NA	402.79	353.39 - 351.39 (92.39 - 94.39)	0.0	*
4Q18		10/1/2018	NE	43.44	NA	NA	NA	402.34		0.0	*
1Q19		1/2/2019	NE	43.95	NA	NA	NA	401.83		0.0	*
2Q19		4/2/2019	NE	43.75	NA	NA	NA	402.03		0.0	*
3Q19	445.95	7/1/2019	NE	42.44	NA	NA	NA	403.51	353.56 - 351.56 (92.39 - 94.39)	0.0	*
4Q19		10/2/2019	NE	40.96	NA	NA	NA	404.99		0.0	*
1Q20		1/2/2020	NE	40.21	NA	NA	NA	405.74		0.0	*
2Q20		4/2/2020	NE	39.25	NA	NA	NA	406.70		0.0	*
3Q20		7/7/2020	NE	37.69	NA	NA	NA	408.26		0.0	*
4Q20		10/6/2020	NE	37.11	NA	NA	NA	408.84		0.0	*
1Q21		1/4/2021	NE	38.03	NA	NA	NA	407.92		0.0	*
2Q21		4/6/2021	NE	38.53	NA	NA	NA	407.42		0.0	*
P 83D											
3Q18	445.70	7/2/2018	NE	43.96	NA	NA	NA	401.74	311.90 - 309.90 (133.80 - 135.80)	0.0	*
4Q18		10/1/2018	NE	43.41	NA	NA	NA	402.29		0.0	*
1Q19		1/2/2019	NE	43.93	NA	NA	NA	401.77		0.0	*
2Q19		4/2/2019	NE	43.72	NA	NA	NA	401.98		0.0	*
3Q19	445.86	7/1/2019	NE	42.40	NA	NA	NA	403.46	312.06 - 310.06 (133.80 - 135.80)	0.0	*
4Q19		10/2/2019	NE	40.94	NA	NA	NA	404.92		0.0	*
1Q20		1/2/2020	NE	40.19	NA	NA	NA	405.67		0.0	*
2Q20		4/2/2020	NE	39.22	NA	NA	NA	406.64		0.0	*
3Q20		7/7/2020	NE	37.66	NA	NA	NA	408.20		0.0	*
4Q20		10/6/2020	NE	37.08	NA	NA	NA	408.78		0.0	*
1Q21		1/4/2021	NE	37.99	NA	NA	NA	407.87		0.0	*
2Q21		4/6/2021	NE	38.51	NA	NA	NA	407.35		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 84A											
3Q18	446.49	7/3/2018	NE	43.16	NA	NA	NA	403.33	397.57 - 382.57 (48.92 - 63.92)	0.0	*
4Q18		10/3/2018	NE	43.55	NA	NA	NA	402.94		0.0	*
1Q19		1/3/2019	NE	43.79	NA	NA	NA	402.70		0.0	*
2Q19		4/2/2019	NE	43.79	NA	NA	NA	402.70		0.0	*
3Q19	446.63	7/1/2019	NE	41.69	NA	NA	NA	404.94	397.71 - 382.71 (48.92 - 63.92)	0.0	*
4Q19		10/1/2019	NE	40.00	NA	NA	NA	406.63		0.0	*
1Q20		1/2/2020	NE	39.85	NA	NA	NA	406.78		0.0	*
2Q20		4/1/2020	NE	39.39	NA	NA	NA	407.24		0.0	*
3Q20		7/7/2020	NE	37.98	NA	NA	NA	408.65		0.0	*
4Q20		10/6/2020	NE	37.65	NA	NA	NA	408.98		0.0	*
1Q21		1/5/2021	NE	38.64	NA	NA	NA	407.99		0.0	*
2Q21		4/6/2021	NE	39.20	NA	NA	NA	407.43		0.0	*
P 84B											
3Q18	446.21	7/3/2018	NE	42.90	NA	NA	NA	403.31	372.71 - 370.71 (73.50 - 75.50)	0.0	*
4Q18		10/3/2018	NE	43.28	NA	NA	NA	402.93		0.0	*
1Q19		1/3/2019	NE	43.51	NA	NA	NA	402.70		0.1	*
2Q19		4/2/2019	NE	43.51	NA	NA	NA	402.70		0.0	*
3Q19	446.35	7/1/2019	NE	41.41	NA	NA	NA	404.94	372.85 - 370.85 (73.50 - 75.50)	0.0	*
4Q19		10/1/2019	NE	39.72	NA	NA	NA	406.63		0.0	*
1Q20		1/2/2020	NE	39.56	NA	NA	NA	406.79		0.0	*
2Q20		4/1/2020	NE	39.14	NA	NA	NA	407.21		0.0	*
3Q20		7/7/2020	NE	37.72	NA	NA	NA	408.63		0.0	*
4Q20		10/6/2020	NE	37.39	NA	NA	NA	408.96		0.0	*
1Q21		1/5/2021	NE	38.37	NA	NA	NA	407.98		0.0	*
2Q21		4/6/2021	NE	38.95	NA	NA	NA	407.40		0.0	*
P 84C											
3Q18	446.22	7/3/2018	NE	43.89	NA	NA	NA	402.33	352.17 - 350.17 (94.05 - 96.05)	0.0	*
4Q18		10/3/2018	NE	43.28	NA	NA	NA	402.94		0.0	*
1Q19		1/3/2019	NE	43.53	NA	NA	NA	402.69		0.1	*
2Q19		4/2/2019	NE	43.52	NA	NA	NA	402.70		0.0	*
3Q19	446.37	7/1/2019	NE	41.45	NA	NA	NA	404.92	352.32 - 350.32 (94.05 - 96.05)	0.0	*
4Q19		10/1/2019	NE	39.75	NA	NA	NA	406.62		0.0	*
1Q20		1/2/2020	NE	38.57	NA	NA	NA	407.80		0.0	*
2Q20		4/1/2020	NE	39.13	NA	NA	NA	407.24		0.0	*
3Q20		7/7/2020	NE	37.74	NA	NA	NA	408.63		0.0	*
4Q20		10/6/2020	NE	37.41	NA	NA	NA	408.96		0.0	*
1Q21		1/5/2021	NE	38.38	NA	NA	NA	407.99		0.0	*
2Q21		4/6/2021	NE	38.96	NA	NA	NA	407.41		0.0	*
P 84D											
3Q18	446.24	7/3/2018	NE	42.89	NA	NA	NA	403.35	325.41 - 323.41 (120.83 - 122.83)	0.0	*
4Q18		10/3/2018	NE	43.28	NA	NA	NA	402.96		0.0	*
1Q19		1/3/2019	NE	43.51	NA	NA	NA	402.73		0.1	*
2Q19		4/2/2019	NE	43.52	NA	NA	NA	402.72		0.0	*
3Q19	446.38	7/1/2019	NE	41.42	NA	NA	NA	404.96	325.55 - 323.55 (120.83 - 122.83)	0.0	*
4Q19		10/1/2019	NE	39.73	NA	NA	NA	406.65		0.0	*
1Q20		1/2/2020	NE	39.57	NA	NA	NA	406.81		0.0	*
2Q20		4/1/2020	NE	39.14	NA	NA	NA	407.24		0.0	*
3Q20		7/7/2020	NE	37.74	NA	NA	NA	408.64		0.0	*
4Q20		10/6/2020	NE	37.40	NA	NA	NA	408.98		0.0	*
1Q21		1/5/2021	NE	38.39	NA	NA	NA	407.99		0.0	*
2Q21		4/6/2021	NE	38.96	NA	NA	NA	407.42		0.0	*
P 88A											
3Q18	443.09	7/2/2018	NE	33.86	NA	NA	NA	409.23	404.69 - 389.69 (38.40 - 53.40)	0.0	*
4Q18		10/3/2018	NE	34.01	NA	NA	NA	409.08		0.0	*
1Q19		1/4/2019	NE	34.31	NA	NA	NA	408.78		0.0	*
2Q19		4/2/2019	NE	34.22	NA	NA	NA	408.87		0.0	*
3Q19	443.27	7/2/2019	NE	31.34	NA	NA	NA	411.93	404.87 - 389.87 (38.40 - 53.40)	0.0	*
4Q19		10/2/2019	NE	30.41	NA	NA	NA	412.86		0.0	*
1Q20		1/3/2020	NE	30.75	NA	NA	NA	412.52		0.0	*
2Q20		4/3/2020	NE	30.01	NA	NA	NA	413.26		0.0	*
3Q20		7/7/2020	NE	29.04	NA	NA	NA	414.23		0.0	*
4Q20		10/7/2020	NE	29.24	NA	NA	NA	414.03		0.0	*
1Q21		1/5/2021	NE	30.40	NA	NA	NA	412.87		0.1	*
2Q21		4/7/2021	NE	30.92	NA	NA	NA	412.35		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 88B											
3Q18	443.16	7/2/2018	NE	33.84	NA	NA	NA	409.32	371.51 - 369.51 (71.65 - 73.65)	0.0	*
4Q18		10/3/2018	NE	34.08	NA	NA	NA	409.08		0.1	*
1Q19		1/4/2019	NE	34.37	NA	NA	NA	408.79		0.0	*
2Q19		4/2/2019	NE	34.29	NA	NA	NA	408.87		0.0	*
3Q19	443.35	7/2/2019	NE	31.41	NA	NA	NA	411.94	371.70 - 369.70 (71.65 - 73.65)	0.0	*
4Q19		10/2/2019	NE	30.47	NA	NA	NA	412.88		0.0	*
1Q20		1/3/2020	NE	30.80	NA	NA	NA	412.55		0.0	*
2Q20		4/3/2020	NE	30.07	NA	NA	NA	413.28		0.0	*
3Q20		7/7/2020	NE	29.09	NA	NA	NA	414.26		0.0	*
4Q20		10/7/2020	NE	29.30	NA	NA	NA	414.05		0.0	*
1Q21		1/5/2021	NE	30.46	NA	NA	NA	412.89		0.1	*
2Q21		4/7/2021	NE	31.00	NA	NA	NA	412.35		0.0	*
P 88C											
3Q18	443.13	7/2/2018	NE	33.88	NA	NA	NA	409.25	350.83 - 348.83 (92.30 - 94.30)	0.0	*
4Q18		10/3/2018	NE	34.02	NA	NA	NA	409.11		0.0	*
1Q19		1/4/2019	NE	34.32	NA	NA	NA	408.81		0.0	*
2Q19		4/2/2019	NE	34.24	NA	NA	NA	408.89		0.0	*
3Q19	443.31	7/2/2019	NE	31.37	NA	NA	NA	411.94	351.01 - 349.01 (92.30 - 94.30)	0.0	*
4Q19		10/2/2019	NE	30.44	NA	NA	NA	412.87		0.0	*
1Q20		1/3/2020	NE	30.77	NA	NA	NA	412.54		0.0	*
2Q20		4/3/2020	NE	30.04	NA	NA	NA	413.27		0.0	*
3Q20		7/7/2020	NE	29.05	NA	NA	NA	414.26		0.1	*
4Q20		10/7/2020	NE	29.25	NA	NA	NA	414.06		0.0	*
1Q21		1/5/2021	NE	30.40	NA	NA	NA	412.91		0.1	*
2Q21		4/7/2021	NE	30.91	NA	NA	NA	412.40		0.0	*
P 88D											
3Q18	443.20	7/2/2018	NE	34.09	NA	NA	NA	409.11	331.03 - 329.03 (112.17 - 114.17)	0.0	*
4Q18		10/3/2018	NE	34.26	NA	NA	NA	408.94		0.0	*
1Q19		1/4/2019	NE	34.45	NA	NA	NA	408.75		0.0	*
2Q19		4/2/2019	NE	34.30	NA	NA	NA	408.90		0.0	*
3Q19	443.38	7/2/2019	NE	31.35	NA	NA	NA	412.03	331.21 - 329.21 (112.17 - 114.17)	0.0	*
4Q19		10/2/2019	NE	30.56	NA	NA	NA	412.82		0.0	*
1Q20		1/3/2020	NE	30.89	NA	NA	NA	412.49		0.0	*
2Q20		4/3/2020	NE	29.97	NA	NA	NA	413.41		0.0	*
3Q20		7/7/2020	NE	29.16	NA	NA	NA	414.22		0.0	*
4Q20		10/7/2020	NE	29.43	NA	NA	NA	413.95		0.0	*
1Q21		1/5/2021	NE	30.60	NA	NA	NA	412.78		0.1	*
2Q21		4/7/2021	NE	31.06	NA	NA	NA	412.32		0.0	*
P 89B											
3Q18	447.44	7/3/2018	NE	41.39	NA	NA	NA	406.05	370.08 - 368.08 (77.36 - 79.36)	0.0	*
4Q18		10/2/2018	NE	41.74	NA	NA	NA	405.70		0.0	*
1Q19		1/3/2019	NE	42.63	NA	NA	NA	404.81		0.0	*
2Q19		4/2/2019	NE	42.41	NA	NA	NA	405.03		0.0	*
3Q19	447.64	7/2/2019	NE	41.60	NA	NA	NA	406.04	370.28 - 368.28 (77.36 - 79.36)	0.0	*
4Q19		10/2/2019	NE	40.11	NA	NA	NA	407.53		0.0	*
1Q20		1/2/2020	NE	39.20	NA	NA	NA	408.44		0.0	*
2Q20		4/3/2020	NE	37.98	NA	NA	NA	409.66		0.0	*
3Q20		7/8/2020	NE	36.46	NA	NA	NA	411.18		0.0	*
4Q20		10/6/2020	NE	35.79	NA	NA	NA	411.85		0.0	*
1Q21		1/5/2021	NE	36.98	NA	NA	NA	410.66		0.0	*
2Q21		4/6/2021	NE	37.78	NA	NA	NA	409.86		0.0	*
P 89C											
3Q18	447.76	7/3/2018	NE	42.09	NA	NA	NA	405.67	350.13 - 348.13 (97.63 - 99.63)	0.0	*
4Q18		10/2/2018	NE	42.11	NA	NA	NA	405.65		0.0	*
1Q19		1/3/2019	NE	43.03	NA	NA	NA	404.73		0.0	*
2Q19		4/2/2019	NE	42.75	NA	NA	NA	405.01	351.36 - 349.36 (96.40 - 98.40)	0.0	*
3Q19	447.96	7/2/2019	NE	41.95	NA	NA	NA	406.01	351.56 - 349.56 (96.40 - 98.40)	0.0	*
4Q19		10/2/2019	NE	40.46	NA	NA	NA	407.50		0.0	*
1Q20		1/2/2020	NE	39.54	NA	NA	NA	408.42		0.0	*
2Q20		4/3/2020	NE	38.27	NA	NA	NA	409.69		0.0	*
3Q20		7/8/2020	NE	37.00	NA	NA	NA	410.96		0.0	*
4Q20		10/6/2020	NE	36.13	NA	NA	NA	411.83		0.0	*
1Q21		1/5/2021	NE	37.34	NA	NA	NA	410.62		0.0	*
2Q21		4/6/2021	NE	38.13	NA	NA	NA	409.83		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 89D											
3Q18	447.63	7/3/2018	NE	41.76	NA	NA	NA	405.87	307.29 - 305.29 (140.34 - 142.34)	0.0	*
4Q18		10/2/2018	NE	42.15	NA	NA	NA	405.48		0.0	*
1Q19		1/3/2019	NE	43.11	NA	NA	NA	404.52		0.0	*
2Q19		4/2/2019	NE	42.87	NA	NA	NA	404.76		0.0	*
3Q19	447.83	7/2/2019	NE	42.05	NA	NA	NA	405.78	309.33 - 307.33 (138.50 - 140.50)	0.0	*
4Q19		10/2/2019	NE	40.53	NA	NA	NA	407.30		0.0	*
1Q20		1/2/2020	NE	39.58	NA	NA	NA	408.25		0.0	*
2Q20		4/3/2020	NE	38.29	NA	NA	NA	409.54		0.0	*
3Q20		7/8/2020	NE	37.03	NA	NA	NA	410.80		0.0	*
4Q20		10/6/2020	NE	36.15	NA	NA	NA	411.68		0.0	*
1Q21		1/5/2021	NE	37.35	NA	NA	NA	410.48		0.0	*
2Q21		4/6/2021	NE	38.13	NA	NA	NA	409.70		0.0	*
P 91A											
3Q18	447.24	7/2/2018	NE	48.52	NA	NA	NA	398.72	395.72 - 380.72 (51.51 - 66.51)	151	*
4Q18		10/1/2018	NE	48.70	NA	NA	NA	398.54		5.6	*
1Q19		1/2/2019	48.87	48.90	398.34	398.37	0.03	398.36		1129	*
2Q19		4/2/2019	48.58	48.59	398.65	398.66	0.01	398.66		413	*
3Q19	447.43	7/1/2019	47.77	47.78	399.65	399.66	0.01	399.66	395.92 - 380.92 (51.51 - 66.51)	14.7	*
4Q19		10/2/2019	NE	45.72	NA	NA	NA	401.71		9.5	*
1Q20		1/2/2020	44.69	44.70	402.73	402.74	0.01	402.74		7.4	*
2Q20		4/1/2020	NE	44.10	NA	NA	NA	403.33		38.0	*
3Q20		7/6/2020	NE	42.34	NA	NA	NA	405.09		21.8	*
4Q20		10/6/2020	NE	41.66	NA	NA	NA	405.77		33.5	*
1Q21		1/5/2021	42.73	42.74	404.69	404.70	0.01	404.70		72.4	*
2Q21		4/5/2021	NE	43.52	NA	NA	NA	403.91		2.0	*
P 91B											
3Q18	447.28	7/2/2018	NE	48.69	NA	NA	NA	398.59	372.59 - 370.59 (74.69 - 76.69)	11.0	*
4Q18		10/1/2018	NE	48.88	NA	NA	NA	398.40		12.1	*
1Q19		1/2/2019	NE	49.04	NA	NA	NA	398.24		73.3	*
2Q19		4/2/2019	NE	48.75	NA	NA	NA	398.53		116	*
3Q19	447.47	7/1/2019	NE	47.97	NA	NA	NA	399.50	372.78 - 370.78 (74.69 - 76.69)	3.5	*
4Q19		10/2/2019	NE	45.89	NA	NA	NA	401.58		6.5	*
1Q20		1/2/2020	NE	44.85	NA	NA	NA	402.62		0.0	*
2Q20		4/1/2020	NE	44.05	NA	NA	NA	403.42		15.5	*
3Q20		7/6/2020	NE	42.47	NA	NA	NA	405.00		20.6	*
4Q20		10/6/2020	NE	41.79	NA	NA	NA	405.68		11.3	*
1Q21		1/5/2021	NE	42.83	NA	NA	NA	404.64		7.5	*
2Q21		4/5/2021	NE	43.67	NA	NA	NA	403.80		1.5	*
P 91C											
3Q18	447.07	7/2/2018	NE	48.44	NA	NA	NA	398.63	352.34 - 350.34 (94.73 - 96.73)	0.0	*
4Q18		10/1/2018	NE	48.61	NA	NA	NA	398.46		0.0	*
1Q19		1/2/2019	NE	48.80	NA	NA	NA	398.27		1.2	*
2Q19		4/2/2019	NE	48.47	NA	NA	NA	398.60		0.0	*
3Q19	447.27	7/1/2019	NE	47.69	NA	NA	NA	399.58	352.54 - 350.54 (94.73 - 96.73)	0.0	*
4Q19		10/2/2019	NE	45.63	NA	NA	NA	401.64		0.0	*
1Q20		1/2/2020	NE	44.60	NA	NA	NA	402.67		0.1	*
2Q20		4/1/2020	NE	43.80	NA	NA	NA	403.47		0.0	*
3Q20		7/6/2020	NE	42.22	NA	NA	NA	405.05		0.0	*
4Q20		10/6/2020	NE	41.55	NA	NA	NA	405.72		0.0	*
1Q21		1/5/2021	NE	42.60	NA	NA	NA	404.67		0.0	*
2Q21		4/5/2021	NE	43.41	NA	NA	NA	403.86		0.0	*
P 91D											
3Q18	447.06	7/2/2018	NE	48.41	NA	NA	NA	398.65	278.74 - 276.74 (168.32 - 170.32)	0.0	*
4Q18		10/1/2018	NE	48.56	NA	NA	NA	398.50		0.0	*
1Q19		1/2/2019	NE	48.76	NA	NA	NA	398.30		1.6	*
2Q19		4/2/2019	NE	48.44	NA	NA	NA	398.62		0.0	*
3Q19	447.26	7/1/2019	NE	47.66	NA	NA	NA	399.60	278.94 - 276.94 (168.32 - 170.32)	0.0	*
4Q19		10/2/2019	NE	45.60	NA	NA	NA	401.66		0.0	*
1Q20		1/2/2020	NE	44.59	NA	NA	NA	402.67		0.1	*
2Q20		4/1/2020	NE	43.77	NA	NA	NA	403.49		0.8	*
3Q20		7/6/2020	NE	42.20	NA	NA	NA	405.06		0.0	*
4Q20		10/6/2020	NE	41.54	NA	NA	NA	405.72		0.0	*
1Q21		1/5/2021	NE	42.59	NA	NA	NA	404.67		0.0	*
2Q21		4/5/2021	NE	43.41	NA	NA	NA	403.85		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 92A											
3Q18	446.24	7/3/2018	NE	45.69	NA	NA	NA	400.55	398.67 - 383.67 (47.57 - 62.57)	4.0	*
4Q18		10/2/2018	46.04	46.06	400.18	400.20	0.02	400.20		33.8	*
1Q19		1/2/2019	46.39	46.41	399.83	399.85	0.02	399.85		640	*
2Q19		4/1/2019	46.10	46.11	400.13	400.14	0.01	400.14		232	*
3Q19	446.39	7/1/2019	44.54	44.56	401.83	401.85	0.02	401.85	398.82 - 383.82 (47.57 - 62.57)	36.4	*
4Q19		10/2/2019	42.50	42.51	403.88	403.89	0.01	403.89		11.1	*
1Q20		1/2/2020	42.13	42.14	404.25	404.26	0.01	404.26		26.0	*
2Q20		4/2/2020	41.58	41.60	404.79	404.81	0.02	404.81		32.3	*
3Q20		7/7/2020	40.21	40.22	406.17	406.18	0.01	406.18		61.8	*
4Q20		10/6/2020	39.67	39.68	406.71	406.72	0.01	406.72		84.4	*
1Q21		1/5/2021	40.89	40.90	405.49	405.50	0.01	405.50		54.0	*
2Q21		4/6/2021	41.68	41.73	404.66	404.71	0.05	404.70		31.3	*
P 92B											
3Q18	446.18	7/3/2018	NE	45.65	NA	NA	NA	400.53	372.53 - 370.53 (73.65 - 75.65)	0.5	*
4Q18		10/2/2018	NE	46.01	NA	NA	NA	400.17		0.1	*
1Q19		1/2/2019	NE	46.34	NA	NA	NA	399.84		0.0	*
2Q19		4/1/2019	NE	46.06	NA	NA	NA	400.12	371.77 - 369.77 (74.41 - 76.41)	1.9	*
3Q19	446.33	7/1/2019	NE	44.53	NA	NA	NA	401.80	371.92 - 369.92 (74.41 - 76.41)	0.3	*
4Q19		10/2/2019	NE	42.46	NA	NA	NA	403.87		0.0	*
1Q20		1/2/2020	NE	42.09	NA	NA	NA	404.24		0.0	*
2Q20		4/2/2020	NE	41.54	NA	NA	NA	404.79		0.9	*
3Q20		7/7/2020	NE	40.15	NA	NA	NA	406.18		0.0	*
4Q20		10/6/2020	NE	39.63	NA	NA	NA	406.70		0.3	*
1Q21		1/5/2021	NE	40.85	NA	NA	NA	405.48		0.0	*
2Q21		4/6/2021	NE	41.64	NA	NA	NA	404.69		0.0	*
P 92C											
3Q18	446.17	7/3/2018	NE	45.60	NA	NA	NA	400.57	353.21 - 348.21 (92.96 - 97.96)	0.3	*
4Q18		10/2/2018	NE	45.97	NA	NA	NA	400.20		2.5	*
1Q19		1/2/2019	NE	46.34	NA	NA	NA	399.83		83.1	*
2Q19		4/1/2019	NE	46.03	NA	NA	NA	400.14		22.6	*
3Q19	446.34	7/1/2019	NE	44.51	NA	NA	NA	401.83	353.38 - 348.38 (92.96 - 97.96)	4.0	*
4Q19		10/2/2019	NE	42.45	NA	NA	NA	403.89		0.0	*
1Q20		1/2/2020	NE	42.10	NA	NA	NA	404.24		0.1	*
2Q20		4/2/2020	NE	41.53	NA	NA	NA	404.81		12.8	*
3Q20		7/7/2020	NE	40.15	NA	NA	NA	406.19		2.8	*
4Q20		10/6/2020	NE	39.60	NA	NA	NA	406.74		1.3	*
1Q21		1/5/2021	NE	40.83	NA	NA	NA	405.51		1.6	*
2Q21		4/6/2021	NE	41.64	NA	NA	NA	404.70		9.2	*
P 92D											
3Q18	446.00	7/3/2018	NE	45.50	NA	NA	NA	400.50	305.00 - 303.00 (141.00 - 143.00)	0.0	*
4Q18		10/2/2018	NE	45.88	NA	NA	NA	400.12		0.1	*
1Q19		1/2/2019	NE	46.24	NA	NA	NA	399.76		0.0	*
2Q19		4/1/2019	NE	45.94	NA	NA	NA	400.06		0.2	*
3Q19	446.15	7/1/2019	NE	44.45	NA	NA	NA	401.70	305.15 - 303.15 (141.00 - 143.00)	0.0	*
4Q19		10/2/2019	NE	42.35	NA	NA	NA	403.80		0.0	*
1Q20		1/2/2020	NE	41.98	NA	NA	NA	404.17		0.0	*
2Q20		4/2/2020	NE	41.43	NA	NA	NA	404.72		2.7	*
3Q20		7/7/2020	NE	40.03	NA	NA	NA	406.12		0.1	*
4Q20		10/6/2020	NE	39.46	NA	NA	NA	406.69		0.0	*
1Q21		1/5/2021	NE	40.70	NA	NA	NA	405.45		0.0	*
2Q21		4/6/2021	NE	41.49	NA	NA	NA	404.66		0.0	*
P 93A											
3Q18	445.12	7/2/2018	NE	44.03	NA	NA	NA	401.09	402.05 - 392.05 (43.07 - 53.07)	0.0	
4Q18		10/2/2018	NE	43.98	NA	NA	NA	401.14		0.0	
1Q19		1/2/2019	NE	43.83	NA	NA	NA	401.29		0.0	
2Q19		4/1/2019	NE	43.61	NA	NA	NA	401.51		0.3	
3Q19	445.37	7/1/2019	NE	39.40	NA	NA	NA	405.97	402.30 - 392.30 (43.07 - 53.07)	0.0	*
4Q19		10/1/2019	NE	38.34	NA	NA	NA	407.03		1.7	*
1Q20		1/2/2020	NE	39.77	NA	NA	NA	405.60		3.4	*
2Q20		4/1/2020	NE	39.60	NA	NA	NA	405.77		7.3	*
3Q20		7/6/2020	NE	38.41	NA	NA	NA	406.96		2.2	*
4Q20		10/5/2020	NE	38.80	NA	NA	NA	406.57		36.4	*
1Q21		1/4/2021	NE	39.93	NA	NA	NA	405.44		0.6	*
2Q21		4/5/2021	NE	40.33	NA	NA	NA	405.04		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 93B											
3Q18	446.52	7/2/2018	NE	45.60	NA	NA	NA	400.92	371.64 - 369.64 (74.88 - 76.88)	0.5	*
4Q18		10/2/2018	NE	45.36	NA	NA	NA	401.16		0.0	*
1Q19		1/2/2019	NE	45.19	NA	NA	NA	401.33		12.5	*
2Q19		4/1/2019	NE	44.99	NA	NA	NA	401.53	371.74 - 369.74 (74.78 - 76.78)	0.0	*
3Q19	446.70	7/1/2019	NE	40.31	NA	NA	NA	406.39	371.92 - 369.92 (74.78 - 76.78)	0.1	*
4Q19		10/1/2019	NE	39.67	NA	NA	NA	407.03		0.1	*
1Q20		1/2/2020	NE	41.12	NA	NA	NA	405.58		0.0	*
2Q20		4/1/2020	NE	40.97	NA	NA	NA	405.73		0.0	*
3Q20		7/6/2020	NE	39.74	NA	NA	NA	406.96		0.2	*
4Q20		10/5/2020	NE	40.21	NA	NA	NA	406.49		3.1	*
1Q21		1/4/2021	NE	41.28	NA	NA	NA	405.42		0.0	*
2Q21		4/5/2021	NE	41.67	NA	NA	NA	405.03		0.0	*
P 93C											
3Q18	446.28	7/2/2018	NE	45.28	NA	NA	NA	401.00	353.40 - 348.40 (92.88 - 97.88)	0.0	*
4Q18		10/2/2018	NE	45.19	NA	NA	NA	401.09		0.0	*
1Q19		1/2/2019	NE	45.02	NA	NA	NA	401.26		0.0	*
2Q19		4/1/2019	NE	44.81	NA	NA	NA	401.47		0.0	*
3Q19	446.55	7/1/2019	NE	40.59	NA	NA	NA	405.96	353.67 - 348.67 (92.88 - 97.88)	0.0	*
4Q19		10/1/2019	NE	39.51	NA	NA	NA	407.04		0.0	*
1Q20		1/2/2020	NE	40.96	NA	NA	NA	405.59		0.0	*
2Q20		4/1/2020	NE	40.80	NA	NA	NA	405.75		0.0	*
3Q20		7/6/2020	NE	39.60	NA	NA	NA	406.95		0.3	*
4Q20		10/5/2020	NE	40.05	NA	NA	NA	406.50		0.1	*
1Q21		1/4/2021	NE	41.11	NA	NA	NA	405.44		0.0	*
2Q21		4/5/2021	NE	41.51	NA	NA	NA	405.04		0.0	*
P 93D											
3Q18	446.73	7/2/2018	NE	45.67	NA	NA	NA	401.06	320.98 - 318.98 (125.75 - 127.75)	0.0	*
4Q18		10/2/2018	NE	45.57	NA	NA	NA	401.16		0.0	*
1Q19		1/2/2019	NE	45.36	NA	NA	NA	401.37		0.0	*
2Q19		4/1/2019	NE	45.18	NA	NA	NA	401.55		0.0	*
3Q19	446.97	7/1/2019	NE	40.97	NA	NA	NA	406.00	321.22 - 319.22 (125.75 - 127.75)	0.0	*
4Q19		10/1/2019	NE	39.87	NA	NA	NA	407.10		0.0	*
1Q20		1/2/2020	NE	41.32	NA	NA	NA	405.65		0.0	*
2Q20		4/1/2020	NE	41.15	NA	NA	NA	405.82	321.31 - 319.31 (125.66 - 127.66)	0.0	*
3Q20		7/6/2020	NE	39.99	NA	NA	NA	406.98		0.2	*
4Q20		10/5/2020	NE	40.45	NA	NA	NA	406.52		0.6	*
1Q21		1/4/2021	NE	41.47	NA	NA	NA	405.50		0.0	*
2Q21		4/5/2021	NE	41.89	NA	NA	NA	405.08		0.0	*
P 94											
3Q18	445.14	7/2/2018	NE	37.80	NA	NA	NA	407.34	398.90 - 383.90 (46.24 - 61.24)	0.0	*
4Q18		10/1/2018	NE	38.36	NA	NA	NA	406.78		0.0	*
1Q19		1/2/2019	NE	39.49	NA	NA	NA	405.65		0.0	*
2Q19		4/2/2019	NE	39.18	NA	NA	NA	405.96		0.0	*
3Q19	445.04	7/1/2019	NE	37.01	NA	NA	NA	408.03	398.80 - 383.80 (46.24 - 61.24)	0.0	*
4Q19		10/2/2019	NE	36.86	NA	NA	NA	408.18		0.0	*
1Q20		1/2/2020	NE	36.10	NA	NA	NA	408.94		0.0	*
2Q20		4/2/2020	NE	34.53	NA	NA	NA	410.51		0.0	*
3Q20		7/7/2020	NE	32.99	NA	NA	NA	412.05		0.3	*
4Q20		10/6/2020	NE	32.28	NA	NA	NA	412.76		0.0	*
1Q21		1/4/2021	NE	33.52	NA	NA	NA	411.52		0.0	*
2Q21		4/6/2021	NE	33.81	NA	NA	NA	411.23		0.0	*
P 95											
3Q18	443.42	7/2/2018	NE	31.87	NA	NA	NA	411.55	406.90 - 391.90 (36.52 - 51.52)	0.0	*
4Q18		10/3/2018	NE	32.03	NA	NA	NA	411.39		0.1	*
1Q19		1/4/2019	NE	32.63	NA	NA	NA	410.79		0.0	*
2Q19		4/2/2019	NE	32.49	NA	NA	NA	410.93		0.0	*
3Q19	443.95	7/2/2019	NE	30.02	NA	NA	NA	413.93	407.43 - 392.43 (36.52 - 51.52)	0.0	*
4Q19		10/2/2019	NE	28.89	NA	NA	NA	415.06		0.0	*
1Q20		1/3/2020	NE	29.17	NA	NA	NA	414.78		0.0	*
2Q20		4/3/2020	NE	28.24	NA	NA	NA	415.71		0.0	*
3Q20		7/7/2020	NE	27.21	NA	NA	NA	416.74		0.0	*
4Q20		10/7/2020	NE	27.09	NA	NA	NA	416.86		0.0	*
1Q21		1/5/2021	NE	28.31	NA	NA	NA	415.64		0.0	*
2Q21		4/6/2021	NE	28.84	NA	NA	NA	415.11		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 102											
3Q18	444.97	7/2/2018	NE	35.09	NA	NA	NA	409.88	402.22 - 382.22 (42.75 - 62.75)	0.0	*
4Q18		10/3/2018	NE	35.32	NA	NA	NA	409.65		6.3	*
1Q19		1/4/2019	NE	36.10	NA	NA	NA	408.87		0.2	*
2Q19		4/2/2019	NE	36.06	NA	NA	NA	408.91		0.0	*
3Q19	445.14	7/2/2019	NE	34.23	NA	NA	NA	410.91	402.39 - 382.39 (42.75 - 62.75)	0.5	*
4Q19		10/2/2019	NE	32.95	NA	NA	NA	412.19		0.1	*
1Q20		1/3/2020	NE	32.88	NA	NA	NA	412.26		0.5	*
2Q20		4/3/2020	NE	31.82	NA	NA	NA	413.32		0.5	*
3Q20		7/7/2020	NE	30.62	NA	NA	NA	414.52		0.0	*
4Q20		10/7/2020	NE	30.15	NA	NA	NA	414.99		22.6	*
1Q21		1/5/2021	NE	31.26	NA	NA	NA	413.88		9.7	*
2Q21		4/7/2021	NE	31.89	NA	NA	NA	413.25		19.1	*
P 114R											
3Q18	429.26	7/2/2018	NE	26.50	NA	NA	NA	402.76	406.25 - 396.25 (23.01 - 33.01)	0.0	
4Q18		10/2/2018	NE	26.26	NA	NA	NA	403.00		0.0	
1Q19		1/3/2019	NE	26.02	NA	NA	NA	403.24		38.7	
2Q19		4/2/2019	NE	25.47	NA	NA	NA	403.79		132	
3Q19	429.48	7/1/2019	NE	19.67	NA	NA	NA	409.81	406.47 - 396.47 (23.01 - 33.01)	1.5	*
4Q19		10/2/2019	NE	20.49	NA	NA	NA	408.99		0.0	*
1Q20		1/2/2020	NE	21.85	NA	NA	NA	407.63		0.0	*
2Q20		4/3/2020	NE	21.72	NA	NA	NA	407.76		0.0	*
3Q20		7/7/2020	NE	20.49	NA	NA	NA	408.99		0.1	*
4Q20		10/6/2020	NE	22.11	NA	NA	NA	407.37		0.0	*
1Q21		1/5/2021	NE	23.72	NA	NA	NA	405.76		0.2	
2Q21		4/6/2021	NE	23.60	NA	NA	NA	405.88		0.0	
P 115											
3Q18	433.36	7/2/2018	NE	30.38	NA	NA	NA	402.98	401.06 - 381.06 (32.30 - 52.30)	0.0	*
4Q18		10/2/2018	NE	30.07	NA	NA	NA	403.29		0.0	*
1Q19		1/3/2019	NE	29.83	NA	NA	NA	403.53		0.0	*
2Q19		4/2/2019	NE	29.08	NA	NA	NA	404.28		0.0	*
3Q19	433.54	7/1/2019	NE	23.18	NA	NA	NA	410.36	401.24 - 381.24 (32.30 - 52.30)	0.0	*
4Q19		10/2/2019	NE	24.34	NA	NA	NA	409.20		0.0	*
1Q20		1/3/2020	NE	22.02	NA	NA	NA	411.52		0.0	* Gauging results anomalous
2Q20		4/3/2020	NE	25.46	NA	NA	NA	408.08		0.0	*
3Q20		7/7/2020	NE	24.28	NA	NA	NA	409.26		0.1	*
4Q20		10/6/2020	NE	26.13	NA	NA	NA	407.41		0.0	*
1Q21		1/5/2021	NE	27.77	NA	NA	NA	405.77		0.0	*
2Q21		4/6/2021	NE	27.54	NA	NA	NA	406.00		0.0	*
P 116											
3Q18	436.63	7/2/2018	NE	33.74	NA	NA	NA	402.89	399.19 - 379.19 (37.44 - 57.44)	0.0	*
4Q18		10/2/2018	NE	33.38	NA	NA	NA	403.25		0.0	*
1Q19		1/3/2019	NE	33.18	NA	NA	NA	403.45		0.1	*
2Q19		4/3/2019	NE	32.53	NA	NA	NA	404.10		0.0	*
3Q19	436.79	7/1/2019	NE	26.27	NA	NA	NA	410.52	399.35 - 379.35 (37.44 - 57.44)	0.0	*
4Q19		10/2/2019	NE	27.66	NA	NA	NA	409.13		0.0	*
1Q20		1/2/2020	NE	29.10	NA	NA	NA	407.69		0.1	*
2Q20		4/3/2020	NE	28.80	NA	NA	NA	407.99		0.0	*
3Q20		7/7/2020	NE	27.61	NA	NA	NA	409.18		0.0	*
4Q20		10/6/2020	NE	29.81	NA	NA	NA	406.98		0.0	*
1Q21		1/5/2021	NE	31.29	NA	NA	NA	405.50		0.0	*
2Q21		4/6/2021	NE	30.98	NA	NA	NA	405.81		0.0	*
P 117											
3Q18	432.71	7/2/2018	NE	29.92	NA	NA	NA	402.79	399.78 - 379.78 (32.93 - 52.93)	0.0	*
4Q18		10/2/2018	NE	29.56	NA	NA	NA	403.15		0.0	*
1Q19		1/3/2019	NE	29.37	NA	NA	NA	403.34		0.4	*
2Q19		4/2/2019	NE	28.45	NA	NA	NA	404.26		0.0	*
3Q19	432.87	7/1/2019	NE	22.26	NA	NA	NA	410.61	399.94 - 379.94 (32.93 - 52.93)	0.0	*
4Q19		10/2/2019	NE	23.79	NA	NA	NA	409.08		0.0	*
1Q20		1/2/2020	NE	25.26	NA	NA	NA	407.61		0.0	*
2Q20		4/3/2020	NE	24.98	NA	NA	NA	407.89		0.0	*
3Q20		7/7/2020	NE	23.75	NA	NA	NA	409.12		0.0	*
4Q20		10/6/2020	NE	25.82	NA	NA	NA	407.05		0.0	*
1Q21		1/5/2021	NE	27.55	NA	NA	NA	405.32		0.0	*
2Q21		4/6/2021	NE	27.19	NA	NA	NA	405.68		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
P 118											
3Q18	431.31	7/2/2018	NE	28.63	NA	NA	NA	402.68	400.19 - 384.26 (31.12 - 47.05)	0.0	*
4Q18		10/3/2018	NE	28.11	NA	NA	NA	403.20		0.0	*
1Q19		1/3/2019	NE	28.03	NA	NA	NA	403.28		0.3	*
2Q19		4/3/2019	NE	26.92	NA	NA	NA	404.39		0.0	*
3Q19	431.48	7/1/2019	NE	20.11	NA	NA	NA	411.37	400.36 - 384.43 (31.12 - 47.05)	0.0	*
4Q19		10/2/2019	NE	22.37	NA	NA	NA	409.11		0.0	*
1Q20		1/2/2020	NE	23.99	NA	NA	NA	407.49		0.0	*
2Q20		4/3/2020	NE	23.53	NA	NA	NA	407.95		0.0	*
3Q20		7/7/2020	NE	22.37	NA	NA	NA	409.11		0.0	*
4Q20		10/6/2020	NE	24.89	NA	NA	NA	406.59		0.0	*
1Q21		1/5/2021	NE	26.69	NA	NA	NA	404.79		0.0	*
2Q21		4/6/2021	NE	25.98	NA	NA	NA	405.50		0.0	*
P 119											
3Q18	431.90	7/2/2018	NE	29.03	NA	NA	NA	402.87	401.23 - 385.30 (30.67 - 46.60)	0.0	*
4Q18		10/2/2018	NE	28.88	NA	NA	NA	403.02		0.0	*
1Q19		1/3/2019	NE	28.62	NA	NA	NA	403.28		0.5	*
2Q19		4/3/2019	NE	28.33	NA	NA	NA	403.57		0.0	*
3Q19	432.11	7/1/2019	NE	23.32	NA	NA	NA	408.79	401.44 - 385.51 (30.67 - 46.60)	0.0	*
4Q19		10/2/2019	NE	23.37	NA	NA	NA	408.74		0.0	*
1Q20		1/3/2020	NE	24.75	NA	NA	NA	407.36		0.0	*
2Q20		4/3/2020	NE	24.34	NA	NA	NA	407.77		0.0	*
3Q20		7/7/2020	NE	23.24	NA	NA	NA	408.87		0.0	*
4Q20		10/6/2020	NE	24.36	NA	NA	NA	407.75		0.0	*
1Q21		1/5/2021	NE	25.78	NA	NA	NA	406.33		0.0	*
2Q21		4/6/2021	NE	25.77	NA	NA	NA	406.34		0.0	*
P 120											
3Q18	432.82	7/2/2018	NE	29.04	NA	NA	NA	403.78	401.44 - 385.51 (31.38 - 47.31)	0.0	*
4Q18		10/2/2018	NE	28.90	NA	NA	NA	403.92		0.0	*
1Q19		1/3/2019	NE	28.65	NA	NA	NA	404.17		0.3	*
2Q19		4/2/2019	NE	27.96	NA	NA	NA	404.86		0.0	*
3Q19	433.00	7/1/2019	NE	22.74	NA	NA	NA	410.26	401.62 - 385.69 (31.38 - 47.31)	0.0	*
4Q19		10/2/2019	NE	23.40	NA	NA	NA	409.60		0.0	*
1Q20		1/3/2020	NE	24.93	NA	NA	NA	408.07		0.0	*
2Q20		4/3/2020	NE	24.21	NA	NA	NA	408.79		0.0	*
3Q20		7/7/2020	NE	23.15	NA	NA	NA	409.85		0.0	*
4Q20		10/6/2020	NE	24.75	NA	NA	NA	408.25		0.0	*
1Q21		1/5/2021	NE	26.23	NA	NA	NA	406.77		0.0	*
2Q21		4/6/2021	NE	25.94	NA	NA	NA	407.06		0.0	*
P 129											
3Q18	432.43	7/3/2018	NE	29.91	NA	NA	NA	402.52	400.46 - 384.53 (31.97 - 47.90)	0.0	*
4Q18		10/2/2018	NE	29.62	NA	NA	NA	402.81		0.0	*
1Q19		1/3/2019	NE	29.58	NA	NA	NA	402.85		0.1	*
2Q19		4/2/2019	NE	26.90	NA	NA	NA	405.53		0.0	*
3Q19	432.66	7/8/2019	NE	19.55	NA	NA	NA	413.11	400.69 - 384.76 (31.97 - 47.90)	0.0	*
4Q19		10/2/2019	NE	23.75	NA	NA	NA	408.91		0.0	*
1Q20		1/2/2020	NE	25.92	NA	NA	NA	406.74		0.0	*
2Q20		4/3/2020	NE	24.80	NA	NA	NA	407.86		0.0	*
3Q20		7/7/2020	NE	23.89	NA	NA	NA	408.77		0.0	*
4Q20		10/6/2020	NE	27.53	NA	NA	NA	405.13		0.0	*
1Q21		1/5/2021	NE	29.47	NA	NA	NA	403.19		0.0	*
2Q21		4/6/2021	NE	27.68	NA	NA	NA	404.98		0.0	*
ROST 3 MW											
3Q18	442.29	7/2/2018	NE	40.72	NA	NA	NA	401.57	404.48 - 394.48 (37.81 - 47.81)	0.0	
4Q18		10/1/2018	NE	40.78	NA	NA	NA	401.51		0.0	
1Q19		1/3/2019	NE	40.61	NA	NA	NA	401.68		0.0	
2Q19		4/1/2019	NE	40.68	NA	NA	NA	401.61		0.0	
3Q19	442.52	7/1/2019	NE	36.84	NA	NA	NA	405.68	404.71 - 394.71 (37.81 - 47.81)	134	*
4Q19		10/1/2019	NE	35.46	NA	NA	NA	407.06		50.1	*
1Q20		1/2/2020	NE	36.41	NA	NA	NA	406.11		227	*
2Q20		4/1/2020	NE	36.16	NA	NA	NA	406.36		1.1	*
3Q20		7/6/2020	NE	35.03	NA	NA	NA	407.49		14.9	*
4Q20		10/5/2020	NE	35.15	NA	NA	NA	407.37		0.5	*
1Q21		1/4/2021	NE	36.29	NA	NA	NA	406.23		0.2	*
2Q21		4/5/2021	NE	36.97	NA	NA	NA	405.55		36.1	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
ROST 4 PZ											
3Q18	442.13	7/2/2018	NE	39.77	NA	NA	NA	402.36	407.20 - 397.20 (34.93 - 44.93)	0.0	
4Q18		10/1/2018	NE	39.81	NA	NA	NA	402.32		0.0	
1Q19		1/2/2019	NE	39.72	NA	NA	NA	402.41		0.0	
2Q19		4/1/2019	NE	40.00	NA	NA	NA	402.13		0.0	
3Q19	442.15	7/1/2019	NE	37.35	NA	NA	NA	404.80	407.22 - 397.22 (34.93 - 44.93)	0.0	
4Q19		10/1/2019	NE	35.10	NA	NA	NA	407.05		31.4	
1Q20		1/2/2020	NE	35.93	NA	NA	NA	406.22		11.2	
2Q20		4/1/2020	NE	35.92	NA	NA	NA	406.23		0.1	
3Q20		7/6/2020	NE	34.79	NA	NA	NA	407.36		115	*
4Q20		10/5/2020	NE	34.49	NA	NA	NA	407.66		83.9	*
1Q21		1/4/2021	NE	35.47	NA	NA	NA	406.68		201	
2Q21		4/5/2021	NE	36.43	NA	NA	NA	405.72		119	
ROST 4 PZ(A)											
3Q18	442.11	7/2/2018	NE	39.59	NA	NA	NA	402.52	407.34 - 397.34 (34.77 - 44.77)	0.0	
4Q18		10/2/2018	NE	39.67	NA	NA	NA	402.44		0.0	
1Q19		1/2/2019	NE	39.53	NA	NA	NA	402.58		0.0	
2Q19		4/1/2019	NE	40.05	NA	NA	NA	402.06		0.0	
3Q19	442.15	7/1/2019	NE	36.34	NA	NA	NA	405.81	407.38 - 397.38 (34.77 - 44.77)	0.0	
4Q19		10/1/2019	NE	34.38	NA	NA	NA	407.77		6.0	*
1Q20		1/2/2020	NE	35.20	NA	NA	NA	406.95		0.0	
2Q20		4/1/2020	NE	35.24	NA	NA	NA	406.91		0.0	
3Q20		7/6/2020	NE	34.10	NA	NA	NA	408.05		0.0	*
4Q20		10/5/2020	NE	33.66	NA	NA	NA	408.49		0.2	*
1Q21		1/4/2021	NE	34.76	NA	NA	NA	407.39		11.1	*
2Q21		4/5/2021	NE	35.87	NA	NA	NA	406.28		0.6	
ROST 4 PZ(B)											
3Q18	442.38	7/2/2018	NE	40.02	NA	NA	NA	402.36	407.33 - 397.33 (35.05 - 45.05)	0.0	
4Q18		10/1/2018	NE	39.82	NA	NA	NA	402.56		0.0	
1Q19		1/2/2019	NE	39.86	NA	NA	NA	402.52		0.0	
2Q19		4/1/2019	NE	40.18	NA	NA	NA	402.20		0.0	
3Q19	442.40	7/1/2019	NE	37.26	NA	NA	NA	405.14	407.35 - 397.35 (35.05 - 45.05)	0.0	
4Q19		10/1/2019	NE	35.09	NA	NA	NA	407.31		0.0	
1Q20		1/2/2020	NE	35.91	NA	NA	NA	406.49		0.0	
2Q20		4/1/2020	NE	35.94	NA	NA	NA	406.46		0.0	
3Q20		7/6/2020	NE	34.78	NA	NA	NA	407.62		0.0	*
4Q20		10/5/2020	NE	34.39	NA	NA	NA	408.01		0.0	*
1Q21		1/4/2021	NE	35.44	NA	NA	NA	406.96		0.3	
2Q21		4/5/2021	NE	36.50	NA	NA	NA	405.90		0.0	
ROST 4 PZ(C)											
3Q18	442.66	7/2/2018	NE	40.88	NA	NA	NA	401.78	407.71 - 397.71 (34.95 - 44.95)	0.0	
4Q18		10/1/2018	NE	40.93	NA	NA	NA	401.73		0.0	
1Q19		1/3/2019	NE	40.78	NA	NA	NA	401.88		0.0	
2Q19		4/1/2019	NE	41.04	NA	NA	NA	401.62		0.0	
3Q19	442.97	7/1/2019	NE	38.14	NA	NA	NA	404.83	408.02 - 398.02 (34.95 - 44.95)	0.0	
4Q19		10/1/2019	NE	35.92	NA	NA	NA	407.05		0.0	
1Q20		1/2/2020	NE	36.77	NA	NA	NA	406.20		0.1	
2Q20		4/1/2020	NE	36.75	NA	NA	NA	406.22		0.0	
3Q20		7/6/2020	NE	35.55	NA	NA	NA	407.42		0.0	
4Q20		10/5/2020	NE	35.37	NA	NA	NA	407.60		120	
1Q21		1/4/2021	NE	36.24	NA	NA	NA	406.73		0.0	
2Q21		4/5/2021	NE	37.30	NA	NA	NA	405.67		0.0	
ROST 4 PZ(D)											
3Q18	442.98	7/2/2018	NE	40.77	NA	NA	NA	402.21	408.01 - 398.01 (34.97 - 44.97)	0.0	
4Q18		10/1/2018	NE	40.23	NA	NA	NA	402.75		0.0	
1Q19		1/3/2019	NE	40.65	NA	NA	NA	402.33		0.0	
2Q19		4/1/2019	NE	40.88	NA	NA	NA	402.10		0.0	
3Q19	442.92	7/1/2019	NE	37.98	NA	NA	NA	404.94	407.95 - 397.95 (34.97 - 44.97)	0.0	
4Q19		10/1/2019	NE	35.80	NA	NA	NA	407.12		2.0	
1Q20		1/2/2020	NE	36.66	NA	NA	NA	406.26		3.8	
2Q20		4/1/2020	NE	36.61	NA	NA	NA	406.31		0.1	
3Q20		7/6/2020	NE	35.51	NA	NA	NA	407.41		29.5	
4Q20		10/5/2020	NE	35.20	NA	NA	NA	407.72		77.3	
1Q21		1/4/2021	NE	36.27	NA	NA	NA	406.65		75.2	
2Q21		4/5/2021	NE	37.16	NA	NA	NA	405.76		0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
ROST 4 PZ(E)											
3Q18	441.96	7/2/2018	NE	39.54	NA	NA	NA	402.42	407.21 - 397.21 (34.75 - 44.75)	0.0	
4Q18		10/1/2018	NE	39.59	NA	NA	NA	402.37		0.0	
1Q19		1/2/2019	NE	39.48	NA	NA	NA	402.48		0.0	
2Q19		4/1/2019	NE	39.72	NA	NA	NA	402.24		0.0	
3Q19	441.98	7/1/2019	NE	37.18	NA	NA	NA	404.80	407.23 - 397.23 (34.75 - 44.75)	0.0	
4Q19		10/1/2019	NE	35.09	NA	NA	NA	406.89		35.5	
1Q20		1/2/2020	NE	35.88	NA	NA	NA	406.10		0.0	
2Q20		4/1/2020	NE	35.89	NA	NA	NA	406.09		0.0	
3Q20		7/6/2020	NE	34.78	NA	NA	NA	407.20		79.9	
4Q20		10/5/2020	NE	34.50	NA	NA	NA	407.48		87.1	*
1Q21		1/4/2021	NE	35.49	NA	NA	NA	406.49		189	
2Q21		4/5/2021	NE	36.33	NA	NA	NA	405.65		0.0	
ROST 4 PZ(F)											
3Q18	442.12	7/2/2018	NE	39.57	NA	NA	NA	402.55	407.59 - 397.59 (34.53 - 44.53)	0.0	
4Q18		10/1/2018	NE	39.59	NA	NA	NA	402.53		0.0	
1Q19		1/2/2019	NE	39.51	NA	NA	NA	402.61		0.0	
2Q19		4/1/2019	NE	39.75	NA	NA	NA	402.37		0.0	
3Q19		7/1/2019	NE	37.32	NA	NA	NA	404.80		0.0	
4Q19		10/1/2019	NE	35.29	NA	NA	NA	406.83		0.0	
1Q20		1/2/2020	NE	36.22	NA	NA	NA	405.90		4.7	
2Q20		4/1/2020	NE	36.12	NA	NA	NA	406.00		0.0	
3Q20		7/6/2020	NE	35.02	NA	NA	NA	407.10		1.3	
4Q20		10/5/2020	NE	34.71	NA	NA	NA	407.41		79.3	
1Q21		1/4/2021	NE	35.76	NA	NA	NA	406.36		23.3	
2Q21		4/5/2021	NE	36.58	NA	NA	NA	405.54		0.0	
ROST 4 PZ(G)											
3Q18	442.13	7/2/2018	NE	40.87	NA	NA	NA	401.26	407.85 - 397.85 (34.28 - 44.28)	0.0	
4Q18		10/1/2018	NE	40.94	NA	NA	NA	401.19		0.0	
1Q19		1/3/2019	NE	40.74	NA	NA	NA	401.39		0.0	
2Q19		4/1/2019	NE	40.78	NA	NA	NA	401.35		0.0	
3Q19	442.20	7/1/2019	NE	37.00	NA	NA	NA	405.20	407.92 - 397.92 (34.28 - 44.28)	0.0	
4Q19		10/1/2019	NE	35.57	NA	NA	NA	406.63		0.0	
1Q20		1/2/2020	NE	36.67	NA	NA	NA	405.53		87.2	
2Q20		4/1/2020	NE	36.07	NA	NA	NA	406.13		9.0	
3Q20		7/6/2020	NE	35.16	NA	NA	NA	407.04		27.0	
4Q20		10/5/2020	NE	35.25	NA	NA	NA	406.95		71.9	
1Q21		1/4/2021	NE	36.28	NA	NA	NA	405.92		0.6	
2Q21		4/5/2021	NE	36.84	NA	NA	NA	405.36		0.6	
S 1											
3Q18	443.90	7/3/2018	42.88	42.95	400.95	401.02	0.07	401.01	Unknown	168	
4Q18		10/2/2018	42.90	43.02	400.88	401.00	0.12	400.98		176	
1Q19		1/3/2019	43.05	43.08	400.82	400.85	0.03	400.84		212	
2Q19		4/1/2019	42.84	42.85	401.05	401.06	0.01	401.06		572	
3Q19	444.06	7/1/2019	40.03	40.05	404.01	404.03	0.02	404.03		184	
4Q19		10/1/2019	38.32	38.33	405.73	405.74	0.01	405.74		187	
1Q20		1/2/2020	38.96	38.98	405.08	405.10	0.02	405.10		129	
2Q20		4/2/2020	38.57	38.58	405.48	405.49	0.01	405.49		160	
3Q20		7/7/2020	37.42	37.43	406.63	406.64	0.01	406.64		113	
4Q20		10/6/2020	37.26	37.28	406.78	406.80	0.02	406.80		175	
1Q21		1/5/2021	38.50	38.51	405.55	405.56	0.01	405.56		61.8	
2Q21		4/6/2021	38.97	38.98	405.08	405.09	0.01	405.09		24.4	
T 1											
3Q18	445.40	7/2/2018	NE	43.16	NA	NA	NA	402.24	398.40 - 388.40 (47.00 - 57.00)	0.0	*
4Q18		10/2/2018	NE	43.33	NA	NA	NA	402.07		0.0	*
1Q19		1/2/2019	NE	43.33	NA	NA	NA	402.07		0.0	*
2Q19		4/1/2019	NE	43.44	NA	NA	NA	401.96		0.0	*
3Q19	445.61	7/1/2019	NE	40.38	NA	NA	NA	405.23	398.61 - 388.61 (47.00 - 57.00)	0.0	*
4Q19		10/1/2019	NE	38.74	NA	NA	NA	406.87		0.0	*
1Q20		1/2/2020	NE	39.17	NA	NA	NA	406.44		0.0	*
2Q20		4/1/2020	NE	38.90	NA	NA	NA	406.71		0.0	*
3Q20		7/6/2020	NE	37.62	NA	NA	NA	407.99		0.0	*
4Q20		10/5/2020	NE	37.56	NA	NA	NA	408.05		0.5	*
1Q21		1/4/2021	NE	38.68	NA	NA	NA	406.93		0.0	*
2Q21		4/5/2021	NE	39.36	NA	NA	NA	406.25		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
T 2											
3Q18	443.21	7/2/2018	NE	41.40	NA	NA	NA	401.81	392.72 - 372.56 (50.49 - 70.64)	0.0	*
4Q18		10/1/2018	NE	41.69	NA	NA	NA	401.52		0.0	*
1Q19		1/3/2019	NE	41.83	NA	NA	NA	401.38		0.0	*
2Q19		4/2/2019	NE	41.72	NA	NA	NA	401.49		0.0	*
3Q19	443.40	7/1/2019	NE	39.59	NA	NA	NA	403.81	392.90 - 372.76 (50.49 - 70.64)	0.0	*
4Q19		10/1/2019	NE	37.72	NA	NA	NA	405.68		0.0	*
1Q20		1/2/2020	NE	37.83	NA	NA	NA	405.57		0.0	*
2Q20		4/1/2020	NE	37.30	NA	NA	NA	406.10		0.0	*
3Q20		7/6/2020	NE	35.92	NA	NA	NA	407.48		0.0	*
4Q20		10/6/2020	NE	35.55	NA	NA	NA	407.85		0.0	*
1Q21		1/4/2021	NE	36.60	NA	NA	NA	406.80		0.0	*
2Q21		4/5/2021	NE	37.27	NA	NA	NA	406.13		0.0	*
T 3											
3Q18	449.03	7/2/2018	NE	48.85	NA	NA	NA	400.18	403.81 - 388.81 (45.22 - 60.22)	0.0	
4Q18		10/1/2018	NE	49.26	NA	NA	NA	399.77		0.0	
1Q19		1/2/2019	NE	49.53	NA	NA	NA	399.50		4.9	
2Q19		4/2/2019	NE	49.24	NA	NA	NA	399.79		0.0	
3Q19	449.21	7/1/2019	NE	48.00	NA	NA	NA	401.21	403.99 - 388.99 (45.22 - 60.22)	0.0	
4Q19		10/1/2019	NE	45.99	NA	NA	NA	403.22		0.0	
1Q20		1/2/2020	NE	45.34	NA	NA	NA	403.87		0.0	
2Q20		4/1/2020	NE	44.65	NA	NA	NA	404.56		0.0	*
3Q20		7/6/2020	NE	43.06	NA	NA	NA	406.15		0.2	*
4Q20		10/6/2020	NE	42.48	NA	NA	NA	406.73		0.2	*
1Q21		1/4/2021	NE	43.37	NA	NA	NA	405.84		1.2	*
2Q21		4/5/2021	NE	44.11	NA	NA	NA	405.10		0.0	*
T 4											
3Q18	446.63	7/3/2018	NE	46.96	NA	NA	NA	399.67	398.32 - 383.32 (48.31 - 63.31)	0.0	*
4Q18		10/2/2018	NE	47.04	NA	NA	NA	399.59		0.1	*
1Q19		1/2/2019	NE	47.65	NA	NA	NA	398.98		0.0	*
2Q19		4/2/2019	NE	47.14	NA	NA	NA	399.49	396.61 - 381.61 (50.02 - 65.02)	0.0	*
3Q19	446.82	7/1/2019	NE	46.87	NA	NA	NA	399.95	396.80 - 381.80 (50.02 - 65.02)	0.0	*
4Q19		10/2/2019	NE	44.83	NA	NA	NA	401.99		0.0	*
1Q20		1/2/2020	NE	43.47	NA	NA	NA	403.35		0.0	*
2Q20		4/2/2020	NE	42.06	NA	NA	NA	404.76		0.0	*
3Q20		7/8/2020	NE	40.80	NA	NA	NA	406.02		0.1	*
4Q20		10/6/2020	NE	40.07	NA	NA	NA	406.75		0.1	*
1Q21		1/5/2021	NE	41.49	NA	NA	NA	405.33		0.1	*
2Q21		4/6/2021	NE	42.40	NA	NA	NA	404.42		0.0	*
T 5											
3Q18	443.47	7/3/2018	NE	41.59	NA	NA	NA	401.88	395.14 - 378.59 (48.33 - 64.88)	2.2	*
4Q18		10/2/2018	NE	41.87	NA	NA	NA	401.60		5.7	*
1Q19		1/3/2019	NE	42.11	NA	NA	NA	401.36		17.7	*
2Q19		4/1/2019	NE	41.84	NA	NA	NA	401.63		4.2	*
3Q19	443.66	7/1/2019	NE	39.64	NA	NA	NA	404.02	395.33 - 378.78 (48.33 - 64.88)	12.0	*
4Q19		10/1/2019	NE	37.75	NA	NA	NA	405.91		5.8	*
1Q20		1/2/2020	NE	37.99	NA	NA	NA	405.67		7.2	*
2Q20		4/3/2020	NE	37.62	NA	NA	NA	406.04		12.8	*
3Q20		7/7/2020	NE	36.35	NA	NA	NA	407.31		54.0	*
4Q20		10/6/2020	NE	36.04	NA	NA	NA	407.62		28.5	*
1Q21		1/5/2021	NE	37.23	NA	NA	NA	406.43		2.0	*
2Q21		4/6/2021	NE	37.87	NA	NA	NA	405.79		3.8	*
T 6											
3Q18	446.61	7/2/2018	NE	45.61	NA	NA	NA	401.00	394.85 - 380.60 (51.76 - 66.01)	0.1	*
4Q18		10/1/2018	NE	45.58	NA	NA	NA	401.03		0.0	*
1Q19		1/2/2019	NE	45.42	NA	NA	NA	401.19		17.1	*
2Q19		4/1/2019	NE	45.24	NA	NA	NA	401.37	394.10 - 379.85 (52.51 - 66.76)	0.0	*
3Q19	446.78	7/1/2019	NE	41.12	NA	NA	NA	405.66	394.27 - 380.02 (52.51 - 66.76)	1.8	*
4Q19		10/1/2019	NE	39.90	NA	NA	NA	406.88		0.1	*
1Q20		1/2/2020	NE	41.29	NA	NA	NA	405.49		2.5	*
2Q20		4/1/2020	NE	41.10	NA	NA	NA	405.68		3.7	*
3Q20		7/6/2020	NE	39.94	NA	NA	NA	406.84		1.3	*
4Q20		10/5/2020	NE	40.28	NA	NA	NA	406.50		2.4	*
1Q21		1/4/2021	NE	41.41	NA	NA	NA	405.37		31.1	*
2Q21		4/5/2021	NE	41.83	NA	NA	NA	404.95		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
T 7											
3Q18	444.04	7/2/2018	NE	41.17	NA	NA	NA	402.87	395.32 - 380.32 (48.72 - 63.72)	0.0	*
4Q18		10/3/2018	NE	41.08	NA	NA	NA	402.96		0.0	*
1Q19		1/4/2019	NE	40.97	NA	NA	NA	403.07		5.8	*
2Q19		4/2/2019	NE	40.78	NA	NA	NA	403.26		59.6	*
3Q19	444.26	7/2/2019	NE	37.14	NA	NA	NA	407.12	395.54 - 380.54 (48.72 - 63.72)	0.6	*
4Q19		10/2/2019	NE	36.23	NA	NA	NA	408.03		0.9	*
1Q20		1/3/2020	NE	37.33	NA	NA	NA	406.93		69.9	*
2Q20		4/3/2020	NE	36.90	NA	NA	NA	407.36		0.9	*
3Q20		7/7/2020	NE	35.81	NA	NA	NA	408.45		1.8	*
4Q20		10/7/2020	NE	36.20	NA	NA	NA	408.06		1.1	*
1Q21		1/5/2021	NE	37.39	NA	NA	NA	406.87		1.1	*
2Q21		4/7/2021	NE	37.48	NA	NA	NA	406.78		0.1	*
T 12											
3Q18	444.80	7/2/2018	NE	44.21	NA	NA	NA	400.59	397.97 - 371.97 (46.83 - 72.83)	0.1	*
4Q18		10/1/2018	NE	44.18	NA	NA	NA	400.62		1.2	*
1Q19		1/2/2019	NE	44.03	NA	NA	NA	400.77		315	*
2Q19		4/1/2019	NE	44.11	NA	NA	NA	400.69		15.1	*
3Q19	444.99	7/1/2019	NE	40.35	NA	NA	NA	404.64	398.16 - 372.16 (46.83 - 72.83)	1.1	*
4Q19		10/1/2019	NE	38.66	NA	NA	NA	406.33		0.8	*
1Q20		1/2/2020	NE	40.04	NA	NA	NA	404.95		2.2	*
2Q20		4/1/2020	NE	39.10	NA	NA	NA	405.89		10.0	*
3Q20		7/6/2020	NE	38.43	NA	NA	NA	406.56		2.5	*
4Q20		10/5/2020	NE	38.26	NA	NA	NA	406.73		1.5	*
1Q21		1/4/2021	NE	39.45	NA	NA	NA	405.54		51.2	*
2Q21		4/5/2021	NE	39.90	NA	NA	NA	405.09		0.0	*
T 13											
3Q18	443.96	7/2/2018	NE	40.85	NA	NA	NA	403.11	400.15 - 374.15 (43.81 - 69.81)	0.0	*
4Q18		10/1/2018	NE	41.24	NA	NA	NA	402.72		0.1	*
1Q19		1/2/2019	NE	41.25	NA	NA	NA	402.71		0.0	*
2Q19		4/1/2019	NE	41.34	NA	NA	NA	402.62		0.0	*
3Q19	443.76	7/1/2019	NE	38.35	NA	NA	NA	405.41	399.95 - 373.95 (43.81 - 69.81)	0.0	*
4Q19		10/1/2019	NE	36.78	NA	NA	NA	406.98		0.1	*
1Q20		1/2/2020	NE	37.14	NA	NA	NA	406.62		0.0	*
2Q20		4/1/2020	NE	36.87	NA	NA	NA	406.89		0.0	*
3Q20		7/6/2020	NE	35.52	NA	NA	NA	408.24		0.1	*
4Q20		10/5/2020	NE	35.52	NA	NA	NA	408.24		0.0	*
1Q21		1/4/2021	NE	36.48	NA	NA	NA	407.28		0.0	*
2Q21		4/5/2021	NE	37.16	NA	NA	NA	406.60		0.0	*
T 15											
3Q18	445.14	7/2/2018	NE	43.32	NA	NA	NA	401.82	397.10 - 371.10 (48.04 - 74.04)	0.0	*
4Q18		10/1/2018	NE	43.53	NA	NA	NA	401.61		0.0	*
1Q19		1/4/2019	NE	43.78	NA	NA	NA	401.36		0.0	*
2Q19		4/2/2019	NE	43.76	NA	NA	NA	401.38	396.74 - 370.74 (48.40 - 74.40)	0.0	*
3Q19	445.35	7/1/2019	NE	42.13	NA	NA	NA	403.22	396.95 - 370.95 (48.40 - 74.40)	0.0	*
4Q19		10/1/2019	NE	40.23	NA	NA	NA	405.12		0.0	*
1Q20		1/2/2020	NE	39.97	NA	NA	NA	405.38		0.0	*
2Q20		4/1/2020	NE	39.25	NA	NA	NA	406.10		0.0	*
3Q20		7/6/2020	NE	37.80	NA	NA	NA	407.55		0.0	*
4Q20		10/6/2020	NE	37.28	NA	NA	NA	408.07		0.0	*
1Q21		1/4/2021	NE	38.29	NA	NA	NA	407.06		0.0	*
2Q21		4/5/2021	NE	38.86	NA	NA	NA	406.49		0.0	*
T 17											
3Q18	446.01	7/2/2018	NE	41.25	NA	NA	NA	404.76	401.91 - 375.91 (44.10 - 70.10)	0.0	*
4Q18		10/1/2018	NE	41.70	NA	NA	NA	404.31		0.0	*
1Q19		1/2/2019	NE	42.66	NA	NA	NA	403.35		0.0	*
2Q19		4/2/2019	NE	42.32	NA	NA	NA	403.69	401.54 - 375.54 (44.47 - 70.47)	0.0	*
3Q19	446.19	7/1/2019	NE	41.39	NA	NA	NA	404.80	401.72 - 375.72 (44.47 - 70.47)	0.0	*
4Q19		10/2/2019	NE	39.98	NA	NA	NA	406.21		0.0	*
1Q20		1/2/2020	NE	39.12	NA	NA	NA	407.07		0.0	*
2Q20		4/2/2020	NE	37.70	NA	NA	NA	408.49		1.0	*
3Q20		7/7/2020	NE	36.15	NA	NA	NA	410.04		0.0	*
4Q20		10/6/2020	NE	35.45	NA	NA	NA	410.74		0.3	*
1Q21		1/4/2021	NE	36.59	NA	NA	NA	409.60		2.9	*
2Q21		4/6/2021	NE	37.18	NA	NA	NA	409.01		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
T 19											
3Q18	446.79	7/3/2018	NE	46.77	NA	NA	NA	400.02	396.02 - 370.02 (50.77 - 76.77)	11.1	*
4Q18		10/2/2018	NE	46.97	NA	NA	NA	399.82		22.9	*
1Q19		1/2/2019	NE	47.55	NA	NA	NA	399.24		475	*
2Q19		4/2/2019	NE	47.12	NA	NA	NA	399.67		103	*
3Q19	446.99	7/1/2019	NE	46.81	NA	NA	NA	400.18	396.22 - 370.22 (50.77 - 76.77)	0.9	*
4Q19		10/2/2019	NE	44.74	NA	NA	NA	402.25		5.8	*
1Q20		1/2/2020	NE	43.46	NA	NA	NA	403.53		17.7	*
2Q20		4/2/2020	NE	42.14	NA	NA	NA	404.85		13.5	*
3Q20		7/8/2020	NE	40.88	NA	NA	NA	406.11		54.8	*
4Q20		10/6/2020	NE	40.10	NA	NA	NA	406.89		19.2	*
1Q21		1/5/2021	NE	41.59	NA	NA	NA	405.40		47.5	*
2Q21		4/6/2021	NE	42.48	NA	NA	NA	404.51		4.5	*
T 21											
3Q18	443.99	7/2/2018	NE	32.04	NA	NA	NA	411.95	412.03 - 386.03 (31.96 - 57.96)	0.0	
4Q18		10/3/2018	NE	32.25	NA	NA	NA	411.74		0.0	
1Q19		1/4/2019	NE	32.96	NA	NA	NA	411.03		0.0	
2Q19		4/2/2019	NE	32.84	NA	NA	NA	411.15		0.0	
3Q19	444.22	7/2/2019	NE	30.50	NA	NA	NA	413.72	412.26 - 386.26 (31.96 - 57.96)	0.0	*
4Q19		10/2/2019	NE	29.31	NA	NA	NA	414.91		0.0	*
1Q20		1/3/2020	NE	29.57	NA	NA	NA	414.65		0.0	*
2Q20		4/3/2020	NE	28.56	NA	NA	NA	415.66		0.0	*
3Q20		7/7/2020	NE	27.48	NA	NA	NA	416.74		0.0	*
4Q20		10/7/2020	NE	27.30	NA	NA	NA	416.92		0.0	*
1Q21		1/5/2021	NE	28.49	NA	NA	NA	415.73		0.0	*
2Q21		4/6/2021	NE	28.96	NA	NA	NA	415.26		0.0	*
T 22											
3Q18	442.19	7/2/2018	NE	33.76	NA	NA	NA	408.43	410.64 - 384.94 (31.55 - 57.25)	0.0	
4Q18		10/3/2018	NE	33.96	NA	NA	NA	408.23		0.0	
1Q19		1/4/2019	NE	34.06	NA	NA	NA	408.13		0.0	
2Q19		4/2/2019	NE	33.83	NA	NA	NA	408.36		0.0	
3Q19	442.37	7/2/2019	NE	30.31	NA	NA	NA	412.06	410.82 - 385.12 (31.55 - 57.25)	0.0	*
4Q19		10/2/2019	NE	29.90	NA	NA	NA	412.47		0.0	*
1Q20		1/3/2020	NE	30.49	NA	NA	NA	411.88		0.0	*
2Q20		4/3/2020	NE	29.72	NA	NA	NA	412.65		0.0	*
3Q20		7/7/2020	NE	28.73	NA	NA	NA	413.64		0.0	*
4Q20		10/7/2020	NE	29.47	NA	NA	NA	412.90		0.0	*
1Q21		1/5/2021	NE	30.63	NA	NA	NA	411.74		0.1	*
2Q21		4/7/2021	NE	30.88	NA	NA	NA	411.49		0.0	*
T 23											
3Q18	432.69	7/2/2018	NE	26.63	NA	NA	NA	406.06	405.46 - 379.46 (27.23 - 53.23)	0.0	*
4Q18		10/3/2018	NE	26.83	NA	NA	NA	405.86		0.0	*
1Q19		1/4/2019	NE	26.65	NA	NA	NA	406.04		0.0	*
2Q19		4/2/2019	NE	26.26	NA	NA	NA	406.43		0.0	*
3Q19	432.90	7/1/2019	NE	22.41	NA	NA	NA	410.49	405.67 - 379.67 (27.23 - 53.23)	0.0	*
4Q19		10/1/2019	NE	22.19	NA	NA	NA	410.71		0.0	*
1Q20		1/2/2020	NE	23.10	NA	NA	NA	409.80		0.0	*
2Q20		4/2/2020	NE	22.54	NA	NA	NA	410.36		0.0	*
3Q20		7/7/2020	NE	21.43	NA	NA	NA	411.47		0.0	*
4Q20		10/6/2020	NE	22.47	NA	NA	NA	410.43		0.0	*
1Q21		1/5/2021	NE	23.75	NA	NA	NA	409.15		0.0	*
2Q21		4/7/2021	NE	23.57	NA	NA	NA	409.33		0.0	*
T 24											
3Q18	443.81	7/2/2018	42.79	42.87	400.94	401.02	0.08	401.00	402.31 - 376.66 (41.50 - 67.15)	0.4	
4Q18		10/2/2018	42.79	43.08	400.73	401.02	0.29	400.96		0.4	
1Q19		1/3/2019	42.71	43.54	400.27	401.10	0.83	400.93		31.0	
2Q19		4/1/2019	42.69	44.05	399.76	401.12	1.36	400.85		16.0	
3Q19	444.00	7/1/2019	39.75	40.27	403.73	404.25	0.52	404.15	402.50 - 376.85 (41.50 - 67.15)	12.6	*
4Q19		10/1/2019	38.01	38.34	405.66	405.99	0.33	405.92		0.7	*
1Q20		1/2/2020	38.81	38.95	405.05	405.19	0.14	405.16		14.7	*
2Q20		4/2/2020	38.17	38.20	405.80	405.83	0.03	405.82		1.1	*
3Q20		7/6/2020	37.23	37.25	406.75	406.77	0.02	406.77		1.4	*
4Q20		10/5/2020	37.06	37.11	406.89	406.94	0.05	406.93		11.7	*
1Q21		1/5/2021	38.33	38.37	405.63	405.67	0.04	405.66		5.3	*
2Q21		4/5/2021	38.72	38.74	405.26	405.28	0.02	405.28		0.0	*

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
T 28											
3Q18	444.43	7/2/2018	NE	41.39	NA	NA	NA	403.04	Unknown	0.0	
4Q18		10/1/2018	NE	41.88	NA	NA	NA	402.55		0.0	
1Q19		1/2/2019	NE	42.55	NA	NA	NA	401.88		0.0	
2Q19		4/2/2019	NE	42.26	NA	NA	NA	402.17		0.0	
3Q19	444.56	7/1/2019	NE	41.35	NA	NA	NA	403.21		0.0	
4Q19		10/2/2019	NE	39.72	NA	NA	NA	404.84		0.0	
1Q20		1/2/2020	NE	38.80	NA	NA	NA	405.76		0.0	
2Q20		4/2/2020	NE	37.69	NA	NA	NA	406.87		0.0	
3Q20		7/8/2020	NE	36.08	NA	NA	NA	408.48		0.0	
4Q20		10/6/2020	NE	35.52	NA	NA	NA	409.04		0.0	
1Q21		1/4/2021	NE	36.48	NA	NA	NA	408.08		0.1	
2Q21		4/6/2021	NE	37.07	NA	NA	NA	407.49		0.0	
T 37											
3Q18	447.25	7/3/2018	NE	41.26	NA	NA	NA	405.99	398.40 - 378.40 (48.85 - 68.85)	0.0	*
4Q18		10/2/2018	NE	41.59	NA	NA	NA	405.66		0.1	*
1Q19		1/3/2019	NE	42.52	NA	NA	NA	404.73		0.0	*
2Q19		4/2/2019	NE	42.25	NA	NA	NA	405.00		0.0	*
3Q19	447.44	7/2/2019	NE	41.46	NA	NA	NA	405.98	398.58 - 378.58 (48.85 - 68.85)	0.0	*
4Q19		10/2/2019	NE	39.97	NA	NA	NA	407.47		0.0	*
1Q20		1/2/2020	NE	39.06	NA	NA	NA	408.38		0.0	*
2Q20		4/3/2020	NE	37.78	NA	NA	NA	409.66		0.0	*
3Q20		7/8/2020	NE	36.46	NA	NA	NA	410.98		0.0	*
4Q20		10/6/2020	NE	35.60	NA	NA	NA	411.84		0.0	*
1Q21		1/5/2021	NE	36.85	NA	NA	NA	410.59		0.0	*
2Q21		4/6/2021	NE	37.63	NA	NA	NA	409.81		0.0	*
T 38											
3Q18	445.67	7/3/2018	NE	37.95	NA	NA	NA	407.72	396.53 - 376.53 (49.14 - 69.14)	0.0	*
4Q18		10/2/2018	NE	38.32	NA	NA	NA	407.35		0.0	*
1Q19		1/3/2019	NE	39.25	NA	NA	NA	406.42		0.0	*
2Q19		4/2/2019	NE	38.99	NA	NA	NA	406.68		0.0	*
3Q19	445.89	7/2/2019	NE	37.60	NA	NA	NA	408.29	396.75 - 376.75 (49.14 - 69.14)	0.0	*
4Q19		10/2/2019	NE	36.31	NA	NA	NA	409.58		0.0	*
1Q20		1/2/2020	NE	35.88	NA	NA	NA	410.01		0.0	*
2Q20		4/3/2020	NE	34.61	NA	NA	NA	411.28		0.0	*
3Q20		7/8/2020	NE	33.26	NA	NA	NA	412.63		0.0	*
4Q20		10/6/2020	NE	32.56	NA	NA	NA	413.33		0.0	*
1Q21		1/5/2021	NE	33.86	NA	NA	NA	412.03		0.0	*
2Q21		4/6/2021	NE	34.55	NA	NA	NA	411.34		0.0	*
T 62											
3Q18	431.99	7/2/2018	NE	28.77	NA	NA	NA	403.22	412.28 - 382.28 (19.71 - 49.71)	0.0	
4Q18		10/2/2018	NE	28.78	NA	NA	NA	403.21		0.0	
1Q19		1/3/2019	NE	28.30	NA	NA	NA	403.69		0.1	
2Q19		4/2/2019	NE	27.45	NA	NA	NA	404.54		0.0	
3Q19	432.16	7/30/2019	NE	21.97	NA	NA	NA	410.19	412.45 - 382.45 (19.71 - 49.71)	0.1	
4Q19		10/2/2019	NE	22.97	NA	NA	NA	409.19		0.0	
1Q20		1/3/2020	NE	24.47	NA	NA	NA	407.69		0.2	
2Q20		4/3/2020	NE	23.71	NA	NA	NA	408.45		0.0	
3Q20		7/7/2020	NE	22.89	NA	NA	NA	409.27		0.0	
4Q20		10/6/2020	NE	24.37	NA	NA	NA	407.79		0.0	
1Q21		1/5/2021	NE	25.61	NA	NA	NA	406.55		0.0	
2Q21		4/6/2021	NE	25.47	NA	NA	NA	406.69		0.0	
T 63											
3Q18	431.43	7/2/2018	NE	28.83	NA	NA	NA	402.60	411.45 - 381.45 (19.98 - 49.98)	0.0	
4Q18		10/2/2018	NE	27.93	NA	NA	NA	403.50		0.0	
1Q19		1/3/2019	NE	27.42	NA	NA	NA	404.01		0.0	
2Q19		4/2/2019	NE	26.69	NA	NA	NA	404.74		0.0	
3Q19	431.55	7/30/2019	NE	20.84	NA	NA	NA	410.71	411.57 - 381.57 (19.98 - 49.98)	0.0	
4Q19		10/2/2019	NE	22.20	NA	NA	NA	409.35		0.0	
1Q20		1/3/2020	NE	23.70	NA	NA	NA	407.85		0.0	
2Q20		4/3/2020	NE	23.13	NA	NA	NA	408.42		0.0	
3Q20		7/7/2020	NE	22.10	NA	NA	NA	409.45		0.1	
4Q20		10/6/2020	NE	24.00	NA	NA	NA	407.55		0.1	
1Q21		1/5/2021	NE	25.40	NA	NA	NA	406.15		0.0	
2Q21		4/6/2021	NE	25.10	NA	NA	NA	406.45		0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
HISTORICAL GROUNDWATER MONITORING WELL GAUGING RESULTS

WELL ID	TOP OF CASING (elev.)	DATE GAUGED	DEPTH TO PRODUCT (ft btoc)	DEPTH TO WATER (ft btoc)	WATER PRODUCT INTERFACE (elev.)	PRODUCT (elev.)	PRODUCT THICKNESS (ft)	CORRECTED WATER LEVEL (elev.)	SCREENED INTERVAL (elev.) (ft btoc)	WELL HEAD PID (ppm)	Comments
T 64											
3Q18	428.93	7/2/2018	NE	25.63	NA	NA	NA	403.30	409.12 - 379.12 (19.81 - 49.81)	0.0	
4Q18		10/2/2018	NE	25.47	NA	NA	NA	403.46		0.0	
1Q19		1/4/2019	NE	24.88	NA	NA	NA	404.05		0.0	
2Q19		4/3/2019	NE	23.94	NA	NA	NA	404.99		0.0	
3Q19	429.10	7/30/2019	NE	17.84	NA	NA	NA	411.26	409.29 - 379.29 (19.81 - 49.81)	3.3	*
4Q19		10/2/2019	NE	19.67	NA	NA	NA	409.43		3.4	*
1Q20		1/3/2020	NE	21.50	NA	NA	NA	407.60		0.0	
2Q20		4/3/2020	NE	26.64	NA	NA	NA	402.46		13.9	Gauging result anomalous
3Q20		7/7/2020	NE	19.58	NA	NA	NA	409.52		1.1	*
4Q20		10/6/2020	NE	22.07	NA	NA	NA	407.03		0.0	
1Q21		1/5/2021	NE	23.69	NA	NA	NA	405.41		0.0	
2Q21		4/6/2021	NE	22.91	NA	NA	NA	406.19		85.6	

NOTES:

1) Elevations presented in this table are relative to the 1988 NAVD datum.

2) The corrected water level elevations presented in this table were corrected by a specific gravity of 0.80 for the wells in which LNAPL was identified.

3) PID values measured with a 10.6 electron volt (eV) lamp photoionization detector.

4) btoc Below Top of Casing; ppm parts per million; NA Not Applicable; NE Not Encountered; NM Not Measured

5) * Indicates that the LNAPL and/or water level is above the top of the screened zone of the well.

6) Table includes comprehensive groundwater monitoring well gauging data for the last 12 quarters from the combined Village of Roxana Interim Groundwater Monitoring Program and the WRB Refining LP Wood River Refinery Program.

7) The screened interval for certain monitoring wells was adjusted based on an evaluation of the results of annual bottom depth gauging conducted in the first quarter of each year.

8) Top of casing and screened interval for the groundwater monitoring wells in the Roxana Interim Groundwater Monitoring Program and the WRR Program were adjusted based on surveying conducted in 2Q19, in accordance with Permit Condition IV.J.9, which requires wells be surveyed every five (5) years.

TABLE 2
SOIL VMP DEPTHS

Location	Yellow 1st Interval	White 10 foot Depth	Blue 2nd Interval	Green 3rd Interval	Red 4th Interval	Notes:
VMP-1	5		8.5	23.5	38.5	Village of Roxana - 1st Street
VMP-2	5		8.5	22	42	Village of Roxana - Alley Between 3rd and 4th Street
VMP-3	5	10	22	31.5	39	Village of Roxana - Alley Between 2nd and 3rd Street
VMP-4	5		12	23.5	39	Village of Roxana - Alley Between 4th and 5th Street
VMP-5	5		12.5	31	40	Village of Roxana - Alley Between 5th and 6th Street
VMP-6	5		10	31.5	39	Village of Roxana - Alley Between 6th and 7th Street
VMP-7	5		13.5	29.5	38	Village of Roxana - 7th Street
VMP-8	5		9.5	23.5	35.5	Village of Roxana - Alley Between 7th and 8th Street
VMP-9	5		11.5	25.5	38.5	Village of Roxana - Alley Between 7th and 8th Street
VMP-10	5		10	20	30	Public Works Yard
VMP-11	5		8	29	38	Public Works Yard
VMP-12	5		11.5	25	39	WRR- North Property
VMP-13	5		10.5	21.5	29.5	Public Works Yard
VMP-14	5		11.5	20	29	Public Works Yard
VMP-15	5		21.5	25.5	29	Village of Roxana - SE of Route 111 and Rand Avenue
VMP-16	5		13.5	19	31	WRR- Main Property
VMP-17	5					Public Works Yard
VMP-18	8.5					Village of Roxana - 8th Street
VMP-19	5					Village of Roxana - 8th Street
VMP-20	5		10	25	39.5	Village of Roxana - Alley Between 2nd and 3rd Street
VMP-21	5		10	25	33	Village of Roxana - Alley Between 3rd and 4th Street
VMP-22	5		10	18	38	Village of Roxana - Alley Between 4th and 5th Street
VMP-23	5		10	25	40	Village of Roxana - Alley Between 5th and 6th Street
VMP-24	5		10	22	34	Village of Roxana - 7th Street
VMP-25	5		9.5	21	31	Village of Roxana - Corner of Rand Avenue and Route 111
VMP-26	10		20	30	40	WRR - North Property
VMP-27	10		20	30	40	WRR - North Property
VMP-28	10		20	30	40	WRR - North Property
VMP-29	10		18	26	40	Public Works Yard
VMP-30	10		18	26	40	Public Works Yard
VMP-31	5		10	20	30	Village of Roxana - Chaffer Avenue (Abandoned in June 2014)
VMP-32	5		10	20	30	Village of Roxana - 4th Street
VMP-33			10	20	30	WRR - North Property
VMP-34			10	20	30	WRR - North Property
VMP-35			10	20	30	WRR - North Property
VMP-36			10	20	30	WRR - North Property
VMP-37			10	20	30	WRR - North Property
VMP-38			10	20	27	WRR - North Property
VMP-39			10	20	30	WRR - North Property
VMP-40			10	20	30	WRR - North Property (Abandoned in November 2020)
VMP-41			10	20	26	Public Works Yard
VMP-42			10	20	30	Village of Roxana - Corner of Chaffer Avenue and 3rd Street
VMP-43			10	20	30	Village of Roxana - Corner of Chaffer Avenue and 4th Street
VMP-44			10	20	30	Village of Roxana - Corner of Chaffer Avenue and 5th Street
VMP-45			10	20	30	Village of Roxana - Corner of Chaffer Avenue and 6th Street
VMP-46			10	20	30	WRR - North Property
VMP-47	5		10	20	30	Village of Roxana - Corner of Chaffer Avenue and Alley Between 1st and 2nd Street
VMP-48	5		10	20	30	Village of Roxana - Alley Between 2nd and 3rd Street
VMP-49	5		10	20	30	Village of Roxana - Alley Between 3rd and 4th Street
VMP-50	5		10	20	30	Village of Roxana - Alley Between 4th and 5th Street
VMP-51	5		10	20	30	Village of Roxana - Alley Between 5th and 6th Street
VMP-52	5		10	20	30	Village of Roxana - Alley Between 6th and 7th Street
VMP-53	5		10	20	30	Village of Roxana - Alley Between 7th and 8th Street
VMP-54	5		10	20	30	Village of Roxana - Alley Between 7th and 8th Street
VMP-55	5		10	20	30	Public Works Yard Area; Route 111 Right-of-Way
VMP-56			10	25	38.5	Village of Roxana - Corner of Chaffer Avenue and 4th Street
VMP-57	5		10	20		WRR - North Property
VMP-58	5		10	20	30	WRR - North Property
VMP-59	5		10	20	30	WRR - North Property
VMP-60	5		10	20	33.5	WRR - North Property
VMP-61	5		10	20	30	WRR - North Property
VMP-62	5		10	20	30	Village of Roxana - Alley Between 1st and 2nd Street
VMP-63	5		10	20	30	Village of Roxana - Corner of Chaffer Avenue and 1st Street
VMP-64	5		10	20	28	Village of Roxana - Corner of Chaffer Avenue and Alley Between 1st and Tydeman
VMP-65			10	20	30	WRR - North Property (Installed November 2020 to replace VMP-40)

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-1	5	7/28/2020	65.9	0.0	N/A	54.2	0.1	0.0	0.1	0.0	0	0.6	19.1
		11/2/2020	61.5	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	0.9	17.8
		1/29/2021	50.2	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	0.2	20.7
		5/5/2021	51.6	0.0	N/A	52.1	0.0	0.0	0.0	0.0	0	0.3	20.3
	8.5	7/28/2020	58.5	0.2	N/A	53.8	0.3	0.0	0.0	0.0	0	0.6	19.4
		11/2/2020	50.8	0.0	N/A	57.8	0.0	0.0	0.0	0.0	0	0.9	18.0
		1/29/2021	53.9	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	0.3	20.6
		5/5/2021	53.2	0.0	N/A	50.5	0.0	0.0	0.0	0.0	0	0.2	20.2
	23.5	7/28/2020	55.2	0.0	N/A	56.3	0.0	0.0	0.0	0.0	0	0.6	19.3
		11/2/2020	50.2	0.0	N/A	50.5	0.0	0.0	0.0	0.0	0	0.9	17.8
		1/29/2021	53.4	0.0	N/A	55.6	0.0	0.0	0.0	0.0	0	0.8	20.5
		5/5/2021	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	38.5	7/28/2020	56.2	0.1	N/A	54.1	0.1	0.0	0.1	0.0	0	0.6	19.5
		11/2/2020	50.1	0.0	N/A	50.0	0.0	0.0	0.0	0.0	0	1.0	18.0
		1/29/2021	50.8	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	1.5	20.0
		5/5/2021	53.2	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	0.2	20.2
VMP-2	5	7/24/2020	66.3	0.0	N/A	51.4	0.0	0.0	0.3	0.0	0	6.2	12.8
		11/4/2020	59.7	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	5.0	15.5
		1/25/2021	53.1	0.0	N/A	50.9	0.0	0.0	0.2	0.0	0	1.5	20.4
		5/7/2021	61.1	0.0	N/A	54.4	0.0	0.0	0.0	0.0	0	1.3	20.1
	8.5	7/24/2020	54.9	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	3.4	16.4
		11/4/2020	57.6	0.0	N/A	50.7	0.0	0.0	0.1	0.0	0	4.6	15.6
		1/25/2021	51.6	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	2.6	19.4
		5/7/2021	53.0	0.1	N/A	52.4	0.0	0.0	0.0	0.0	0	1.3	19.4
	22	7/24/2020	61.3	0.0	N/A	50.7	0.0	6.2	0.7	0.0	0	3.3	16.9
		11/4/2020	50.0	0.0	N/A	54.1	0.0	0.4	0.1	0.0	0	4.7	16.0
		1/25/2021	60.6	0.0	N/A	54.9	0.0	0.0	0.1	0.0	0	3.5	18.5
		5/7/2021	52.0	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	1.4	19.3
	42	7/24/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/4/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/25/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/7/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-3	5	7/29/2020	66.4	0.0	N/A	54.1	1.8	0.6	0.3	0.0	0	0.3	20.2
		11/4/2020	55.5	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	0.3	19.5
		1/25/2021	53.9	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.1	20.7
		5/10/2021	52.4	0.0	N/A	53.6	1.8	0.0	0.0	0.0	0	0.6	19.9
	10	7/29/2020	54.4	0.0	N/A	50.4	0.5	0.7	0.4	0.0	0	0.3	20.4
		11/4/2020	63.3	0.0	N/A	54.7	0.0	12.4	0.0	0.0	0	1.1	18.7
		1/25/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/10/2021	53.5	0.0	N/A	50.0	0.6	0.0	0.0	0.0	0	0.5	20.0
	22	7/29/2020	60.0	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	1.4	19.5
		11/4/2020	58.3	0.0	N/A	52.0	0.0	10.2	0.1	0.0	0	1.8	17.1
		1/25/2021	50.8	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	0.4	20.5
		5/10/2021	52.3	0.0	N/A	59.6	0.0	0.0	0.0	0.0	0	0.5	19.7
	31.5	7/29/2020	61.8	0.0	N/A	50.4	0.0	178	3.5	0.0	0	4.8	15.1
		11/4/2020	59.5	1.0	N/A	52.8	1.0	93730	487	OVR	OVR	11.2	0.5
		1/25/2021	50.3	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	4.9	17.0
		5/10/2021	61.1	0.0	N/A	51.7	0.0	0.0	0.0	0.0	0	2.2	18.2
	39	7/29/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/4/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/25/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/10/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-4	5	7/30/2020	51.9	0.0	N/A	56.6	0.0	0.0	0.2	0.0	0	0.3	20.4
		10/30/2020	53.7	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	0.9	18.9
		1/28/2021	52.2	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	0.0	20.8
		5/5/2021	60.2	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.1	20.9
	12	7/30/2020	52.5	0.0	N/A	50.5	0.0	0.0	0.0	0.0	0	0.6	20.4
		10/30/2020	52.8	0.0	N/A	50.8	0.0	4.3	0.0	0.0	0	0.9	17.9
		1/28/2021	52.8	0.0	N/A	53.0	0.0	0.0	0.0	0.0	0	0.2	20.6
		5/5/2021	50.6	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	0.3	20.4
	23.5	7/30/2020	51.9	0.0	N/A	52.2	0.0	0.0	0.1	0.0	0	1.9	18.6
		10/30/2020	54.4	0.0	N/A	52.1	0.1	0.0	0.0	0.0	0	4.3	11.0
		1/28/2021	50.5	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	2.1	19.3
		5/5/2021	51.2	0.0	N/A	50.9	0.0	0.0	0.0	0.0	0	0.8	19.7
	39	7/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/28/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/5/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-5	5	7/23/2020	61.9	0.0	N/A	51.7	0.0	0.0	0.0	0.0	0	0.4	19.6
		10/30/2020	56.9	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	1.0	19.9
		1/22/2021	64.7	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	0.1	20.9
		5/6/2021	50.7	0.0	N/A	53.9	0.0	0.0	0.0	0.0	0	0.1	20.9
	12.5	7/23/2020	52.1	0.1	N/A	53.4	0.0	0.0	0.0	0.0	0	1.0	19.0
		10/30/2020	52.2	0.9	N/A	51.9	1.0	0.0	0.0	0.0	0	2.9	17.7
		1/22/2021	59.5	0.0	N/A	53.7	0.0	0.0	0.0	0.0	0	0.4	20.6
		5/6/2021	52.1	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.4	20.6
	31	7/23/2020	51.1	0.0	N/A	61.0	0.0	8.3	0.0	0.0	0	1.1	19.2
		10/30/2020	57.0	0.0	N/A	50.0	0.0	18.6	0.1	0.0	0	2.1	17.2
		1/22/2021	62.3	0.0	N/A	52.7	0.0	1.3	0.0	0.0	0	1.5	19.8
		5/6/2021	51.6	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	1.1	19.8
	40	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/22/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-6	5	7/22/2020	56.6	0.0	N/A	53.1	0.0	0.0	0.5	0.0	0	1.2	17.8
		10/29/2020	50.2	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	2.0	19.8
		1/29/2021	50.7	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	0.7	20.3
		5/6/2021	51.2	0.0	N/A	55.3	0.0	0.0	0.0	0.0	0	0.6	19.4
	10	7/22/2020	57.8	0.0	N/A	51.5	0.0	0.0	0.5	0.0	0	1.1	18.6
		10/29/2020	50.6	0.0	N/A	50.7	0.0	0.0	0.0	0.0	0	3.3	16.7
		1/29/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021	51.6	0.1	N/A	59.4	0.0	0.0	0.0	0.0	0	1.0	18.9
	31.5	7/22/2020	63.5	0.0	N/A	50.8	0.0	50.7	0.2	0.0	0	1.8	18.2
		10/29/2020	51.3	0.0	N/A	51.2	0.0	0.0	0.0	0.0	0	4.3	14.2
		1/29/2021	49.9	0.0	N/A	59.7	0.0	0.0	0.0	0.0	0	3.2	18.4
		5/6/2021	57.8	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	2.3	17.9
	39	7/22/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/29/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/29/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-7	5	7/30/2020	51.1	0.0	N/A	52.7	0.0	0.0	0.0	0.0	0	0.6	19.3
		11/4/2020	51.8	0.0	N/A	55.3	0.0	0.0	0.1	0.0	0	1.3	19.0
		1/26/2021	51.3	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	0.4	20.6
		5/5/2021	60.1	0.0	N/A	50.4	0.1	0.0	0.0	0.0	0	0.5	20.3
	13.5	7/30/2020	50.2	0.0	N/A	50.5	0.0	0.0	0.0	0.0	0	0.6	19.4
		11/4/2020	52.7	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	1.7	18.0
		1/26/2021	50.5	0.0	N/A	50.6	0.0	0.0	0.1	0.0	0	0.5	20.3
		5/5/2021	53.3	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	0.5	20.2
	29.5	7/30/2020	50.3	0.0	N/A	50.7	0.2	0.0	0.1	0.0	0	1.5	18.9
		11/4/2020	52.8	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	2.1	16.8
		1/26/2021	50.0	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	2.1	19.1
		5/5/2021	55.4	0.0	N/A	50.3	0.1	0.0	0.0	0.0	0	1.0	19.6
	38	7/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/4/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/26/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/5/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-8	5	7/22/2020	60.5	0.0	N/A	52.2	0.0	0.0	0.2	0.0	0	2.9	16.3
		10/28/2020	52.9	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	0.6	19.7
		1/21/2021	60.4	0.0	N/A	53.2	0.0	0.0	0.0	0.0	0	0.6	19.7
		5/4/2021	53.5	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	1.4	19.7
	9.5	7/22/2020	57.0	0.0	N/A	58.5	0.0	0.0	0.2	0.0	0	3.5	16.8
		10/28/2020	52.8	0.0	N/A	57.4	0.0	0.0	0.0	0.0	0	2.5	18.9
		1/21/2021	54.6	0.7	N/A	56.4	0.0	0.0	0.0	0.0	0	1.7	18.8
		5/4/2021	60.2	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	1.7	18.8
	23.5	7/22/2020	55.3	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	3.0	17.1
		10/28/2020	53.9	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	4.4	16.7
		1/21/2021	59.4	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	3.1	18.0
		5/4/2021	61.5	0.0	N/A	50.5	0.0	0.0	0.0	0.0	0	2.8	17.1
	35.5	7/22/2020	55.4	0.4	N/A	51.0	0.0	0.0	0.0	0.0	0	1.4	18.8
		10/28/2020	51.3	0.0	N/A	55.6	0.0	0.0	0.0	0.0	0	1.0	19.6
		1/21/2021	52.2	0.0	N/A	51.5	0.2	0.0	0.1	0.0	0	0.6	20.1
		5/4/2021	54.2	1.7	N/A	54.0	1.4	0.0	0.0	0.0	0	0.5	19.7

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-9	5	7/22/2020	60.1	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	2.6	17.1
		10/28/2020	55.0	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	0.2	20.9
		1/21/2021	53.8	0.0	N/A	54.3	0.0	3.1	0.0	0.0	0	0.4	20.4
		5/4/2021	55.8	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	0.2	20.7
	11.5	7/22/2020	59.2	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	1.6	18.5
		10/28/2020	65.0	0.0	N/A	53.4	0.0	0.0	0.0	0.0	0	0.9	20.3
		1/21/2021	54.1	0.0	N/A	56.7	0.0	0.0	0.0	0.0	0	0.6	19.9
		5/4/2021	51.6	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	0.7	20.0
	25.5	7/22/2020	58.4	0.0	N/A	51.6	0.0	0.0	0.0	0.0	0	1.5	19.0
		10/28/2020	59.8	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	1.8	19.2
		1/21/2021	57.2	0.0	N/A	54.4	0.0	0.0	0.0	0.0	0	1.7	19.3
		5/4/2021	50.4	0.0	N/A	56.7	0.0	0.0	0.0	0.0	0	1.2	19.5
	38.5	7/22/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/21/2021	53.5	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	2.3	18.9
		5/4/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-10	5	7/30/2020	62.1	0.0	N/A	55.5	0.0	0.0	0.0	0.0	0	2.0	19.0
		10/30/2020	51.3	0.0	N/A	51.6	0.0	0.0	0.0	0.0	0	0.0	20.6
		1/27/2021	61.0	0.0	N/A	57.4	0.0	0.0	0.0	0.0	0	0.2	20.4
		5/7/2021	51.3	0.0	N/A	62.4	0.0	0.0	0.0	0.0	0	0.4	20.2
	10	7/30/2020	57.3	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	1.7	19.1
		10/30/2020	51.2	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.1	20.5
		1/27/2021	50.9	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	0.2	20.5
		5/7/2021	50.9	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	0.4	20.1
	20	7/30/2020	58.1	0.0	N/A	53.8	0.0	0.0	0.0	0.0	0	1.4	19.2
		10/30/2020	51.7	0.0	N/A	50.9	0.0	0.0	0.0	0.0	0	0.1	20.4
		1/27/2021	52.7	0.0	N/A	58.5	0.0	0.0	0.0	0.0	0	0.1	20.5
		5/7/2021	53.7	0.0	N/A	54.7	0.0	0.0	0.0	0.0	0	0.2	20.0
	30	7/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/7/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-11	5	7/27/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/28/2020	56.6	0.0	N/A	50.7	0.0	0.0	0.0	0.0	0	0.1	20.5
		1/27/2021	51.7	0.0	N/A	56.0	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/10/2021	54.7	1.5	N/A	50.5	2.1	0.0	0.0	0.0	0	0.1	20.3
	8	7/27/2020	53.1	0.0	N/A	52.6	0.0	0.0	0.1	0.0	0	5.3	14.6
		10/28/2020	51.3	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	0.1	20.8
		1/27/2021	60.1	0.2	N/A	53.1	0.2	0.0	0.0	0.0	0	0.0	20.9
		5/10/2021	53.2	0.2	N/A	51.7	0.1	0.0	0.0	0.0	0	0.1	20.4
	29	7/27/2020	55.4	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	2.7	17.6
		10/28/2020	54.2	0.0	N/A	51.8	0.0	0.0	0.0	0.0	0	0.3	20.7
		1/27/2021	53.0	0.0	N/A	56.5	0.0	0.0	0.0	0.0	0	0.1	20.9
		5/10/2021	56.3	0.3	N/A	57.5	0.2	0.0	0.0	0.0	0	0.2	20.3
	38	7/27/2020	62.8	0.0	N/A	57.1	0.0	0.0	0.0	0.0	0	4.8	14.8
		10/28/2020	52.4	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.0	20.9
		1/27/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/10/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-12	5	7/29/2020	50.8	0.0	N/A	53.5	0.1	0.0	0.2	0.0	0	0.1	17.5
		11/4/2020	51.3	0.0	N/A	52.7	0.0	1.8	0.3	0.0	0	0.0	20.9
		1/28/2021	50.2	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/11/2021	61.1	0.0	N/A	56.6	0.1	0.0	0.0	0.0	0	0.0	20.7
	11.5	7/29/2020	53.4	0.0	N/A	54.5	0.0	0.0	0.0	0.0	0	2.2	14.1
		11/4/2020	52.0	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	0.0	20.7
		1/28/2021	51.4	0.0	N/A	50.8	0.0	7.8	0.1	0.0	0	0.1	20.7
		5/11/2021	52.9	0.0	N/A	53.4	0.0	0.0	0.0	0.0	0	0.0	20.5
	25	7/29/2020	51.8	0.0	N/A	51.4	0.0	3920	92.3	0.9	19	10.4	2.6
		11/4/2020	51.2	0.0	N/A	50.5	0.0	2340	112	1.2	22	10.3	4.0
		1/28/2021	50.3	0.0	N/A	52.3	0.0	109	14.8	0.0	0	9.7	7.3
		5/11/2021	50.8	0.0	N/A	50.5	0.0	14260	497	5.8	OVR	13.1	1.6
	39	7/29/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/4/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/28/2021	50.1	7.9	OVR	50.5	5.0	471000	757	OVR	OVR	10.7	3.4
		5/11/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-13	5	7/30/2020	52.8	0.0	N/A	51.1	0.0	0.0	0.3	0.0	0	1.1	18.2
		11/2/2020	54.5	0.0	N/A	53.0	0.0	0.0	0.0	0.0	0	0.1	20.9
		1/27/2021	54.7	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/10/2021	54.2	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	0.1	20.8
	10.5	7/30/2020	62.1	0.0	N/A	55.0	0.0	0.0	0.0	0.0	0	0.6	19.5
		11/2/2020	55.6	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.1	20.9
		1/27/2021	55.5	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	0.0	20.8
		5/10/2021	53.3	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.0	20.7
	21.5	7/30/2020	58.5	0.0	N/A	52.6	0.0	1.1	0.1	0.0	0	0.3	19.9
		11/2/2020	63.5	0.0	N/A	57.0	0.0	0.0	0.0	0.0	0	0.4	20.6
		1/27/2021	60.1	0.0	N/A	53.3	0.0	3.5	0.0	0.0	0	0.4	20.3
		5/10/2021	52.1	0.3	N/A	53.8	0.2	0.0	0.0	0.0	0	0.3	20.2
	29.5	7/30/2020	61.9	0.0	N/A	50.0	0.0	0.0	0.0	0.0	0	0.7	19.0
		11/2/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021	66.7	0.0	N/A	53.9	0.2	0.0	0.0	0.0	0	0.0	20.9
		5/10/2021	53.0	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	0.0	20.9
VMP-14	5	7/30/2020	60.0	0.0	N/A	52.0	0.0	0.0	0.0	0.0	0	4.7	7.8
		11/2/2020	57.0	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.1	20.9
		1/27/2021	58.8	0.0	N/A	53.4	0.0	0.0	0.0	0.0	0	0.1	20.8
		5/10/2021	57.0	0.0	N/A	56.6	0.0	0.0	0.0	0.0	0	0.4	20.1
	11.5	7/30/2020	62.3	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	3.5	11.4
		11/2/2020	57.0	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	0.2	20.9
		1/27/2021	65.0	0.0	N/A	51.1	0.1	0.0	0.0	0.0	0	0.1	20.9
		5/10/2021	51.7	0.3	N/A	54.4	0.4	0.0	0.0	0.0	0	0.3	19.3
	20	7/30/2020	59.3	0.0	N/A	51.5	0.0	2.0	0.0	0.0	0	10.2	6.0
		11/2/2020	58.0	0.0	N/A	52.7	0.0	0.0	0.0	0.0	0	7.2	11.7
		1/27/2021	61.7	0.0	N/A	50.9	0.0	0.0	0.0	0.0	0	6.5	13.6
		5/10/2021	59.4	0.0	N/A	51.2	0.0	0.0	0.0	0.0	0	6.9	11.7
	29	7/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/2/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021	58.1	0.0	N/A	50.3	0.0	2.0	0.1	0.0	0	3.7	16.5
		5/10/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-15	5	7/28/2020	58.6	0.0	N/A	56.0	0.0	0.0	0.1	0.0	0	7.4	7.8
		11/3/2020	58.7	0.0	N/A	53.5	0.0	0.0	0.0	0.0	0	3.8	14.1
		1/28/2021	62.4	0.0	N/A	55.3	0.0	0.0	0.0	0.0	0	2.8	14.6
		5/11/2021	68.8	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	3.1	15.7
	21.5	7/28/2020	57.9	0.6	N/A	50.9	0.8	105000	238	7.1	OVR	14.6	0.5
		11/3/2020	57.0	0.0	N/A	50.5	0.0	677	0.5	0.1	2	15.1	0.2
		1/28/2021	63.1	0.0	N/A	50.7	0.0	0.0	0.2	0.0	0	14.2	3.6
		5/11/2021	52.1	0.8	N/A	53.6	0.4	36280	4.6	3.4	68	15.4	0.6
	25.5	7/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020	58.6	0.0	N/A	51.1	0.0	1170	10.2	0.2	3	18.6	0.6
		1/28/2021	68.2	0.0	N/A	51.3	0.0	0.0	0.1	0.0	0	14.4	6.5
		5/11/2021	51.5	0.4	N/A	53.4	0.1	28470	10.8	2.9	58	17.4	0.5
	29	7/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/28/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/11/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-16	5	7/29/2020	54.9	0.0	N/A	50.1	0.0	65.0	4.6	0.0	0	17.6	1.8
		11/4/2020	51.8	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	4.3	17.1
		1/29/2021	53.3	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	10.8	5.8
		5/11/2021	59.9	0.0	N/A	51.8	0.0	2.4	0.0	0.0	0	2.3	18.4
	13.5	7/29/2020	56.6	0.9	N/A	52.6	1.3	71320	649	43.3	OVR	14.6	1.1
		11/4/2020	50.7	0.0	N/A	50.6	0.0	45510	573	12.6	OVR	25.9	0.8
		1/29/2021	51.4	1.3	N/A	50.1	1.2	105000	354	31.5	OVR	18.5	0.0
		5/11/2021	56.1	0.0	N/A	55.0	0.0	21840	732	5.3	OVR	15.1	1.3
	19	7/29/2020	51.9	1.2	N/A	55.7	0.7	4880	382	44.6	OVR	14.9	1.0
		11/4/2020	62.6	2.6	N/A	50.7	1.2	121000	709	53.5	OVR	19.4	0.4
		1/29/2021	51.2	1.6	N/A	50.0	1.4	118000	557	47.5	OVR	18.1	0.0
		5/11/2021	55.3	1.2	40.3	53.0	1.5	68370	1394	38.7	OVR	15.5	0.8
	31	7/29/2020	50.1	1.9	N/A	51.7	1.8	95610	693	49.4	OVR	14.1	1.2
		11/4/2020	50.6	3.2	N/A	54.6	2.6	155000	616	58.1	OVR	17.8	0.4
		1/29/2021	51.4	2.6	N/A	66.3	2.6	157000	502	74.1	OVR	18.1	0.0
		5/11/2021	50.9	2.7	OVR	63.8	2.8	264000	2365	OVR	OVR	14.9	0.1
VMP-17	5	7/22/2020	53.8	0.0	N/A	53.2	0.0	0.0	0.4	0.0	0	1.4	19.0
		11/3/2020	51.9	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	0.0	20.9
		1/28/2021	55.5	0.0	N/A	51.8	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/6/2021	50.1	0.0	N/A	54.4	0.0	0.0	0.0	0.0	0	0.1	20.9

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-18	8.5	7/31/2020[10]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/24/2020[9]	54.2	0.0	N/A	53.1	0.0	0.0	0.0	0.0	0	0.2	20.7
		1/26/2021	50.9	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	0.1	20.9
		5/12/2021[10]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-19	5	7/27/2020	55.9	0.0	N/A	54.5	0.0	0.0	0.3	0.0	0	1.6	18.6
		11/4/2020	50.4	0.0	N/A	51.5	0.1	0.0	0.0	0.0	0	0.0	20.6
		1/26/2021	57.2	0.1	N/A	52.2	0.1	0.0	0.0	0.0	0	0.0	20.9
		5/11/2021	51.2	0.6	N/A	53.5	0.7	0.0	0.0	0.0	0	0.1	20.8
VMP-20	5	7/23/2020	53.7	0.0	N/A	50.7	0.0	0.0	0.2	0.0	0	12.7	7.1
		11/24/2020[9]	53.9	0.0	N/A	51.2	0.0	0.0	0.0	0.0	0	7.2	14.1
		1/25/2021	56.4	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	4.9	17.9
		5/7/2021	69.5	0.0	N/A	50.7	0.0	0.0	0.0	0.0	0	4.9	15.7
	10	7/23/2020	59.0	0.0	N/A	52.0	0.0	0.0	0.1	0.0	0	11.9	8.5
		11/2/2020	52.7	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	7.4	14.1
		1/25/2021	53.8	0.0	N/A	54.2	0.0	0.0	0.1	0.0	0	6.5	16.9
		5/7/2021	52.7	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	5.5	15.1
	25	7/23/2020	56.0	0.0	N/A	50.6	0.0	0.0	0.2	0.0	0	4.0	16.3
		11/2/2020	50.6	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	4.5	15.8
		1/25/2021	52.2	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	6.2	16.2
		5/7/2021	51.9	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	4.1	17.2
	39.5	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/2/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/25/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/7/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-21	5	7/24/2020	55.8	0.0	N/A	52.2	0.0	0.0	0.5	0.0	0	3.2	18.7
		10/29/2020	58.1	0.0	N/A	53.9	0.0	0.0	0.0	0.0	0	1.5	18.2
		1/25/2021	58.1	0.0	N/A	54.9	0.0	0.0	0.0	0.0	0	0.2	20.7
		5/3/2021	54.0	0.0	N/A	52.0	0.0	0.0	0.0	0.0	0	0.8	19.7
	10	7/24/2020	59.0	0.0	N/A	50.1	0.0	0.0	0.5	0.0	0	5.5	15.6
		10/29/2020	56.2	0.0	N/A	51.6	0.0	0.0	0.0	0.0	0	0.4	19.3
		1/25/2021	65.4	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.9	20.7
		5/3/2021	56.0	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	1.4	18.7
		6/3/2021[11]	56.9	0.0	N/A	55.8	0.0	0.0	0.0	0.0	0	1.6	18.0
	25	7/24/2020	60.8	0.0	N/A	55.7	0.0	0.0	0.7	0.0	0	3.0	17.0
		10/29/2020	59.7	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	1.6	18.8
		1/25/2021	58.0	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	1.6	19.7
		5/3/2021	51.5	0.0	N/A	51.2	0.0	0.0	0.0	0.0	0	1.0	19.1
	33	7/24/2020	64.1	0.0	N/A	56.1	0.0	0.0	0.5	0.0	0	2.8	17.4
		10/29/2020	61.0	0.0	N/A	52.7	0.0	0.2	0.0	0.0	0	0.4	19.5
		1/25/2021	65.8	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.1	20.8
		5/3/2021	51.2	0.0	N/A	65.4	0.0	0.0	0.0	0.0	0	1.5	18.9
VMP-22	5	7/23/2020	57.9	0.0	N/A	50.9	0.0	0.0	0.0	0.0	0	1.2	19.4
		11/5/2020	74.1	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	1.6	18.4
		1/26/2021	52.5	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.2	20.6
		5/3/2021	51.9	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.4	20.0
	10	7/23/2020	54.2	0.0	N/A	54.2	0.1	0.0	0.0	0.0	0	0.6	19.6
		11/5/2020	63.6	0.5	N/A	51.5	1.6	0.0	0.0	0.0	0	0.8	19.1
		1/26/2021	51.7	1.0	0.0	51.6	2.2	0.0	0.0	0.0	0	0.1	20.4
		5/3/2021	50.3	0.4	N/A	55.1	2.1	0.0	0.0	0.0	0	0.4	19.5
	18	7/23/2020	50.6	0.0	N/A	54.3	0.0	0.0	0.6	0.0	0	1.2	18.7
		11/5/2020	51.9	0.5	N/A	50.7	1.0	0.0	0.0	0.0	0	1.4	19.0
		1/26/2021	51.9	1.0	N/A	54.1	0.8	0.0	0.0	0.0	0	0.4	20.4
		5/3/2021	50.3	0.4	N/A	51.2	0.3	0.0	0.0	0.0	0	0.3	19.8
	38	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/5/2020	51.3	0.8	N/A	50.9	1.7	0.0	0.0	0.0	0	0.8	19.3
		1/26/2021	50.7	1.1	N/A	50.9	1.0	0.0	0.0	0.0	0	0.1	20.6
		5/3/2021	52.3	0.5	N/A	50.8	1.5	0.0	0.0	0.0	0	0.4	19.7
		6/3/2021[11]	60.1	0.1	N/A	68.0	0.2	0.0	0.0	0.0	0	0.7	19.6

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-23	5	7/23/2020	58.9	0.0	N/A	51.4	0.0	0.0	0.1	0.0	0	2.0	17.7
		10/29/2020	57.7	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	3.2	18.0
		1/21/2021	50.1	0.0	N/A	54.2	0.0	0.0	0.0	0.0	0	0.4	20.3
		5/7/2021	52.7	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	1.0	19.5
	10	7/23/2020	59.7	0.0	N/A	54.4	0.0	0.0	0.1	0.0	0	1.9	18.4
		10/29/2020	58.1	0.0	N/A	52.0	0.0	0.0	0.0	0.0	0	3.6	17.6
		1/21/2021	51.1	0.0	N/A	49.6	0.0	0.0	0.0	0.0	0	0.6	20.3
		5/7/2021	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	25	7/23/2020	50.0	0.0	N/A	53.8	0.0	0.0	0.4	0.0	0	1.9	18.5
		10/29/2020	56.2	0.0	N/A	54.7	0.0	0.0	0.0	0.0	0	3.3	17.5
		1/21/2021	50.6	0.0	N/A	51.2	0.1	0.0	0.0	0.0	0	2.1	19.5
		5/7/2021	51.4	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	1.0	19.0
	40	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/29/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/21/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/7/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-24	5	7/22/2020	52.6	0.0	N/A	52.3	0.0	0.0	0.6	0.0	0	2.8	16.9
		10/29/2020	63.0	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	3.9	16.4
		1/21/2021	51.5	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	3.1	18.6
		5/11/2021	50.6	0.1	N/A	52.4	0.0	0.0	0.0	0.0	0	2.1	19.2
	10	7/22/2020	55.3	0.0	N/A	50.2	0.0	0.0	0.5	0.0	0	3.7	16.6
		10/29/2020	51.5	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	5.3	15.9
		2/25/2021[9]	54.4	0.0	N/A	71.7	0.0	0.0	0.0	0.0	0	3.2	18.2
		5/11/2021	52.8	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	2.8	18.3
	22	7/22/2020	52.4	0.0	N/A	54.9	0.0	0.0	0.3	0.0	0	2.7	16.9
		10/29/2020	50.4	0.3	N/A	51.0	0.1	0.0	0.0	0.0	0	2.6	18.1
		1/21/2021	54.3	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	2.6	19.0
		5/11/2021	50.7	0.0	N/A	50.1	0.8	0.0	0.0	0.0	0	2.1	18.7
	34	7/22/2020	53.4	0.0	N/A	53.0	0.0	0.0	0.0	0.0	0	3.5	16.8
		10/29/2020	54.9	0.0	N/A	81.1	0.0	0.0	0.0	0.0	0	5.0	16.0
		1/21/2021	51.1	0.0	N/A	55.0	0.0	0.0	0.0	0.0	0	4.1	17.8
		5/11/2021	51.2	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	2.6	18.3
VMP-25	5	7/23/2020	55.0	0.0	N/A	50.0	0.0	13.0	0.0	0.0	0	7.6	7.0
		10/30/2020	57.3	0.0	N/A	51.3	0.6	5970	0.4	0.4	7	3.2	3.0
		1/26/2021	50.1	0.0	N/A	54.2	0.0	154	0.2	0.0	0	3.0	7.4
		5/6/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	9.5	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/26/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	21	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/26/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	31	7/23/2020[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/26/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-29	10	7/27/2020	55.6	0.0	N/A	53.7	0.0	0.0	0.9	0.0	0	0.1	20.1
		11/2/2020	57.4	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.2	20.9
		1/27/2021	57.7	0.0	N/A	52.4	0.0	0.0	0.1	0.0	0	0.1	20.9
		5/10/2021	50.3	0.0	N/A	50.9	0.2	0.0	0.0	0.0	0	0.2	20.7
	18	7/27/2020	58.7	0.0	N/A	53.6	0.0	0.0	0.4	0.0	0	0.2	20.1
		11/2/2020	58.9	0.0	N/A	53.2	0.0	0.0	0.2	0.0	0	0.4	20.9
		1/27/2021	62.8	0.0	N/A	55.0	0.0	0.0	0.1	0.0	0	0.1	20.6
		5/10/2021	59.1	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.2	20.5
	26	7/27/2020	59.4	0.0	N/A	50.8	0.0	11.6	0.5	0.0	0	0.3	20.1
		11/2/2020	61.5	0.0	N/A	54.9	0.0	16.1	0.2	0.0	0	1.1	19.7
		1/27/2021	62.8	0.0	N/A	57.6	0.0	0.0	0.1	0.0	0	0.8	20.0
		5/10/2021	55.9	0.0	N/A	52.3	0.1	0.0	0.0	0.0	0	0.6	19.7
	40	7/27/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/2/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/10/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-30	10	7/27/2020	59.6	0.0	N/A	51.1	0.0	0.0	0.8	0.0	0	1.1	19.6
		11/2/2020	52.8	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	0.1	20.9
		1/27/2021	58.7	0.0	N/A	54.5	0.1	0.0	0.0	0.0	0	0.0	20.9
		5/10/2021	69.9	0.0	N/A	52.6	0.2	0.0	0.0	0.0	0	0.0	20.9
	18	7/27/2020	55.7	0.0	N/A	51.9	0.0	1.4	2.0	0.0	0	1.2	19.4
		11/2/2020	57.7	0.0	N/A	54.0	0.0	0.0	0.0	0.0	0	0.1	20.6
		1/27/2021	60.1	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/10/2021	50.7	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	0.0	20.8
	26	7/27/2020	59.8	0.0	N/A	52.9	0.0	0.7	1.1	0.0	0	1.4	18.9
		11/2/2020	56.8	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	0.2	20.5
		1/27/2021	61.2	0.0	N/A	53.3	0.0	0.0	0.1	0.0	0	0.3	20.9
		5/10/2021	51.8	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	0.3	20.2
	40	7/27/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/2/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/10/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-32	5	7/29/2020	63.5	0.0	N/A	53.2	0.0	0.0	0.0	0.0	0	2.4	18.2
		11/4/2020	56.1	0.0	N/A	54.4	0.0	0.0	0.0	0.0	0	2.7	17.8
		1/26/2021	52.7	0.0	N/A	52.0	0.0	0.0	0.0	0.0	0	0.2	20.6
		5/12/2021	51.5	0.0	N/A	58.1	0.0	0.0	0.0	0.0	0	0.6	20.5
	10	7/29/2020	59.1	0.0	N/A	55.4	0.0	0.0	0.0	0.0	0	2.6	18.2
		11/4/2020	58.0	0.0	N/A	53.9	0.0	0.0	0.0	0.0	0	2.5	18.0
		1/26/2021	60.0	0.0	N/A	53.7	0.0	0.0	0.1	0.0	0	0.6	20.5
		5/12/2021	51.7	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.7	20.2
	20	7/29/2020	60.2	0.1	N/A	52.6	0.2	0.6	0.2	0.0	0	0.2	20.5
		11/4/2020	60.5	0.0	N/A	56.8	0.0	0.0	0.0	0.0	0	1.3	18.5
		1/26/2021	53.4	0.1	N/A	52.5	1.5	0.0	0.0	0.0	0	0.1	20.6
		5/12/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	30	7/29/2020	59.1	0.1	N/A	53.3	0.2	0.0	0.2	0.0	0	1.8	18.7
		11/4/2020	58.8	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	2.1	18.2
		1/26/2021	51.6	0.6	N/A	53.7	0.9	0.0	0.0	0.0	0	0.7	20.4
		5/12/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-41	10	7/29/2020	59.8	0.0	N/A	51.6	0.0	0.0	0.1	0.0	0	1.1	19.2
		10/30/2020	56.1	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.1	20.6
		1/27/2021	51.5	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	0.2	20.8
		5/6/2021	58.8	0.0	N/A	50.7	0.0	0.0	0.0	0.0	0	0.5	20.1
	20	7/29/2020	57.8	0.0	N/A	53.1	0.0	0.0	0.2	0.0	0	0.9	19.3
		10/30/2020	55.8	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	0.2	20.5
		1/27/2021	52.6	0.0	N/A	57.1	0.3	0.0	0.0	0.0	0	0.4	20.6
		5/6/2021	51.5	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.4	20.1
	26	7/29/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020	56.3	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.5	20.1
		1/27/2021	52.6	0.2	N/A	52.8	0.0	0.0	0.0	0.0	0	0.7	20.3
		5/6/2021	55.6	0.0	N/A	56.1	0.0	0.0	0.0	0.0	0	0.4	20.0
VMP-42	10	7/28/2020	51.1	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	1.9	18.9
		11/5/2020	69.5	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	2.6	17.9
		1/29/2021	52.4	0.0	N/A	52.1	0.0	0.0	0.0	0.0	0	0.7	20.4
		5/5/2021	50.7	0.0	N/A	51.0	0.0	0.0	0.0	0.0	0	0.4	20.2
	20	7/28/2020	54.5	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	1.8	19.0
		11/5/2020	51.1	0.0	N/A	51.7	0.0	0.0	0.0	0.0	0	3.4	17.2
		1/29/2021	53.3	0.0	N/A	60.5	0.0	0.0	0.0	0.0	0	1.7	19.9
		5/5/2021	51.3	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	0.6	20.1
	30	7/28/2020	55.8	0.0	N/A	50.7	0.0	0.0	0.1	0.0	0	2.1	18.2
		11/5/2020	52.6	0.0	N/A	50.2	0.0	4.7	0.0	0.0	0	3.5	16.6
		1/29/2021	51.1	0.0	N/A	58.2	0.0	0.0	0.0	0.0	0	3.0	19.3
		5/5/2021	55.3	0.1	N/A	56.4	0.2	0.0	0.0	0.0	0	0.9	20.2
VMP-43	10	7/28/2020	59.6	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.4	19.8
		11/3/2020	58.2	0.0	N/A	53.3	0.0	0.0	0.1	0.0	0	0.9	17.6
		1/26/2021	57.4	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	0.1	20.9
		5/5/2021	50.0	0.0	N/A	50.4	0.0	0.4	0.0	0.0	0	0.3	20.6
	20	7/28/2020	59.3	0.0	N/A	54.5	0.0	57.2	0.4	0.0	0	0.7	18.8
		11/3/2020	54.1	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	3.1	12.7
		1/26/2021	55.5	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.1	20.9
		5/5/2021	50.4	0.0	N/A	52.4	0.0	0.3	0.0	0.0	0	0.1	20.8
	30	7/28/2020	60.5	0.0	N/A	50.2	0.0	1484	0.6	0.2	4	4.0	11.5
		11/3/2020	55.9	0.0	N/A	57.2	0.0	0.0	0.0	0.0	0	12.5	1.0
		2/25/2021[9]	53.3	0.0	N/A	71.8	0.0	0.0	0.0	0.0	0	0.2	20.7
		5/5/2021	52.8	0.0	N/A	51.8	0.0	0.0	0.0	0.0	0	0.5	20.0

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-44	10	7/28/2020	60.1	0.0	N/A	57.3	0.0	0.2	0.2	0.0	0	5.0	11.2
		11/3/2020[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/12/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	20	7/28/2020	61.5	0.0	N/A	54.5	0.0	0.1	0.0	0.0	0	4.7	10.8
		11/3/2020[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/12/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	30	7/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/27/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/12/2021[7]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-45	10	7/28/2020	56.8	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.8	18.6
		11/5/2020	57.1	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	1.6	18.2
		1/26/2021	51.2	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	0.3	20.8
		6/3/2021[9]	61.1	0.0	N/A	61.7	0.0	0.0	0.0	0.0	0	0.5	19.4
	20	7/28/2020	62.9	0.0	N/A	55.3	0.0	0.0	0.2	0.0	0	0.7	17.9
		11/5/2020	52.0	0.0	N/A	54.7	0.0	0.0	0.0	0.0	0	1.8	17.9
		1/26/2021	53.1	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	0.4	20.9
		5/5/2021	51.9	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.4	20.4
	30	7/28/2020	55.2	0.5	N/A	53.3	0.0	3.3	1.3	0.0	0	0.7	18.5
		11/5/2020	61.9	0.0	N/A	54.6	0.0	0.0	0.0	0.0	0	1.3	18.7
		1/26/2021	51.7	0.5	N/A	50.3	0.3	0.0	0.0	0.0	0	0.2	20.9
		5/5/2021	60.0	2.1	0.0	80.4	1.3	0.0	0.0	0.0	0	0.3	20.3
VMP-47	5	7/27/2020	56.2	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	2.3	17.5
		11/2/2020	52.4	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	2.2	18.2
		1/22/2021	50.4	0.0	N/A	56.2	0.6	0.0	0.0	0.0	0	0.2	20.6
		5/6/2021	52.2	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.3	20.6
	10	7/27/2020	56.8	0.0	N/A	56.5	0.0	0.0	0.0	0.0	0	1.7	18.2
		11/2/2020	51.3	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	2.7	17.6
		1/22/2021	53.9	0.0	N/A	52.1	0.0	0.0	0.0	0.0	0	0.7	20.2
		5/6/2021	52.8	0.0	N/A	51.7	0.0	0.0	0.0	0.0	0	0.9	20.2
	20	7/27/2020	62.8	0.0	N/A	51.4	0.0	0.0	0.0	0.0	0	1.3	19.1
		11/2/2020	50.7	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	2.3	16.7
		1/22/2021	53.3	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	0.5	20.0
		5/6/2021	50.8	0.0	N/A	53.1	0.0	0.0	0.0	0.0	0	0.6	20.0
	30	7/27/2020	57.9	0.0	N/A	54.1	0.0	0.0	0.0	0.0	0	1.4	19.3
		11/2/2020	51.4	0.0	N/A	57.7	0.0	0.0	0.0	0.0	0	2.4	13.8
		1/22/2021	55.5	0.0	N/A	65.6	0.0	0.0	0.0	0.0	0	1.7	19.2
		5/6/2021	50.5	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	0.8	19.8
VMP-48	5	7/30/2020	57.5	0.0	N/A	53.2	0.0	0.0	0.0	0.0	0	7.1	11.1
		11/2/2020	52.5	0.0	N/A	54.2	0.0	0.0	0.0	0.0	0	2.7	17.5
		1/25/2021	55.7	0.0	N/A	57.3	0.0	0.0	0.0	0.0	0	0.7	20.1
		5/7/2021	54.5	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	2.0	17.1
	10	7/30/2020	57.2	0.0	N/A	60.6	0.0	0.0	0.0	0.0	0	3.9	15.8
		11/2/2020	50.1	0.0	N/A	50.1	0.1	0.0	0.0	0.0	0	4.9	15.2
		1/25/2021	53.8	0.0	N/A	53.2	0.0	0.0	0.0	0.0	0	4.6	18.0
		5/7/2021	50.1	0.0	N/A	51.6	0.0	0.0	0.0	0.0	0	1.8	18.6
	20	7/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/2/2020	51.1	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	5.0	14.7
		1/25/2021	53.3	0.0	N/A	55.5	0.0	0.0	0.0	0.0	0	5.2	17.7
		5/7/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	30	7/30/2020	52.4	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	5.8	15.5
		11/2/2020	59.5	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	5.9	15.4
		1/25/2021	50.4	0.0	N/A	53.4	0.0	0.0	0.0	0.0	0	7.6	15.4
		5/7/2021	58.8	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	5.6	16.4

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-49	5	7/24/2020	52.3	0.0	N/A	55.8	0.0	0.0	0.2	0.0	0	0.8	20.3
		11/4/2020	62.7	0.0	N/A	51.0	0.0	0.0	0.0	0.0	0	0.7	19.5
		1/25/2021	59.3	0.0	N/A	52.0	0.0	0.0	0.1	0.0	0	0.2	20.9
		5/3/2021	54.8	0.0	N/A	56.0	0.0	0.0	0.0	0.0	0	0.3	20.2
	10	7/24/2020	63.0	0.0	N/A	53.8	0.0	0.0	0.3	0.0	0	1.8	18.9
		11/4/2020	53.1	0.0	N/A	52.9	0.0	0.0	0.0	0.0	0	0.9	19.2
		1/25/2021	60.0	0.0	N/A	52.7	0.0	0.0	0.0	0.0	0	0.4	20.7
		5/3/2021	51.5	0.0	N/A	50.0	0.0	0.0	0.0	0.0	0	0.7	19.7
	20	7/24/2020	60.6	0.0	N/A	54.6	0.1	0.0	0.3	0.0	0	1.6	19.2
		11/4/2020	54.6	0.0	N/A	51.8	0.0	168	0.3	0.0	0	1.5	17.7
		1/25/2021	59.9	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/3/2021	51.0	0.2	N/A	50.3	0.2	0.0	0.0	0.0	0	0.5	19.7
		6/3/2021[11]	58.1	0.0	N/A	58.7	0.0	0.0	0.0	0.0	0	1.4	18.5
	30	7/24/2020	69.5	0.0	N/A	51.8	0.0	0.0	0.3	0.0	0	8.0	12.0
		11/4/2020	67.4	0.0	N/A	53.3	0.0	4130	21.2	0.8	15	6.2	8.9
		1/25/2021	60.2	0.0	N/A	53.6	0.0	0.0	0.0	0.0	0	0.0	20.9
		5/3/2021	56.2	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	5.9	14.6
VMP-50	5	7/27/2020	53.6	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	2.3	18.0
		11/5/2020	61.4	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	2.2	17.4
		1/26/2021	51.9	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.2	20.7
		5/7/2021	50.8	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	0.5	19.9
	10	7/27/2020	61.4	0.0	N/A	50.1	0.0	0.0	0.2	0.0	0	1.9	18.2
		11/5/2020	68.0	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	2.6	16.6
		1/26/2021	51.8	0.0	N/A	60.5	0.0	0.0	0.1	0.0	0	0.6	20.6
		5/7/2021	52.8	0.0	N/A	56.2	0.0	0.0	0.0	0.0	0	0.6	19.6
	20	7/27/2020	51.7	0.0	N/A	56.1	0.1	0.0	0.5	0.0	0	2.2	17.6
		11/5/2020	59.2	0.0	N/A	54.4	0.0	0.0	0.0	0.0	0	3.1	17.4
		2/25/2021[9]	69.5	0.0	N/A	72.9	0.0	0.0	0.0	0.0	0	0.7	20.2
		5/7/2021	50.7	0.0	N/A	51.7	0.0	0.0	0.0	0.0	0	0.7	19.5
	30	7/27/2020	50.4	0.0	N/A	50.6	0.1	205	8.6	0.0	0	1.6	18.5
		11/5/2020	58.8	0.0	N/A	55.9	0.0	20.3	1.8	0.0	0	4.0	13.8
		1/26/2021	60.1	1.3	N/A	50.0	0.8	161	23.8	0.0	0	1.7	19.8
		5/7/2021	50.7	0.0	N/A	52.8	0.0	119	17.7	0.1	2	1.1	19.3
VMP-51	5	7/23/2020	54.7	0.0	N/A	55.3	0.0	0.0	0.0	0.0	0	1.5	18.8
		10/30/2020	54.4	0.2	N/A	51.3	0.1	0.0	0.0	0.0	0	3.1	18.1
		1/22/2021	54.4	0.0	N/A	54.5	0.0	0.0	0.0	0.0	0	0.4	20.6
		5/4/2021	57.7	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.4	20.2
	10	7/23/2020	54.4	0.2	N/A	50.4	0.1	0.0	0.0	0.0	0	2.1	18.1
		10/30/2020	55.5	0.0	N/A	54.4	0.0	0.0	0.0	0.0	0	3.5	18.0
		1/22/2021	50.9	0.0	N/A	54.2	0.0	0.0	0.0	0.0	0	0.6	20.4
		5/4/2021	54.8	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	0.9	19.8
	20	7/23/2020	51.0	0.0	N/A	51.3	0.1	0.0	0.0	0.0	0	1.8	19.0
		10/30/2020	54.4	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	2.9	17.9
		1/22/2021	50.4	0.0	N/A	51.0	0.0	0.0	0.0	0.0	0	1.4	19.8
		5/4/2021	56.9	0.0	N/A	56.2	0.0	0.0	0.0	0.0	0	0.9	19.9
	30	7/23/2020	52.4	0.1	N/A	50.4	0.1	0.0	0.0	0.0	0	1.7	19.0
		10/30/2020	60.9	0.0	N/A	53.1	0.0	0.0	0.0	0.0	0	2.7	17.9
		1/22/2021	57.6	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	2.4	18.8
		5/4/2021	56.1	0.0	N/A	55.8	0.0	0.0	0.0	0.0	0	1.4	19.8
VMP-52	5	7/23/2020	63.9	0.0	N/A	55.4	0.0	0.0	0.0	0.0	0	3.2	14.8
		10/29/2020	58.3	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	1.1	19.6
		1/22/2021	58.8	0.1	N/A	53.1	0.0	0.0	0.0	0.0	0	0.5	20.5
		5/4/2021	85.9	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	1.6	18.2
	10	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/29/2020	50.5	0.0	N/A	55.6	0.0	0.0	0.0	0.0	0	3.3	15.2
		1/22/2021	56.6	0.0	N/A	52.7	0.0	0.0	0.0	0.0	0	3.8	18.1
		5/4/2021	56.6	0.0	N/A	50.0	0.0	0.0	0.0	0.0	0	2.1	17.6
	20	7/23/2020	65.6	0.0	N/A	52.1	0.0	0.0	0.0	0.0	0	2.1	18.9
		10/29/2020	52.2	0.0	N/A	51.0	0.0	0.0	0.0	0.0	0	2.5	18.0
		1/22/2021	59.8	0.0	N/A	51.9	0.0	0.0	0.0	0.0	0	3.3	17.8
		5/4/2021	50.0	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	3.3	17.7
	30	7/23/2020	64.6	0.0	N/A	52.3	0.0	0.0	0.2	0.0	0	1.9	18.9
		10/29/2020	52.2	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	2.4	18.0
		1/22/2021	57.2	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	3.5	17.3
		5/4/2021	62.2	0.0	N/A	53.7	0.0	0.0	0.0	0.0	0	3.1	17.6

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-53	5	7/22/2020	69.9	0.0	N/A	52.9	0.0	0.0	0.0	0.0	0	2.3	17.1
		10/28/2020	50.1	0.0	N/A	43.3	0.0	0.0	0.0	0.0	0	0.8	20.2
		1/21/2021	54.6	0.0	N/A	58.8	0.0	0.0	0.0	0.0	0	0.3	20.3
		5/4/2021	50.8	0.0	N/A	52.3	0.0	0.0	0.0	0.0	0	0.7	20.2
	10	7/22/2020	56.5	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	1.8	17.9
		10/28/2020	54.5	0.0	N/A	50.4	0.0	0.0	0.0	0.0	0	0.7	20.5
		1/21/2021	53.2	0.0	N/A	53.1	0.0	0.0	0.0	0.0	0	0.3	20.2
		5/4/2021	51.7	0.0	N/A	55.4	0.0	0.0	0.0	0.0	0	0.5	20.4
		6/3/2021[11]	59.3	0.0	N/A	58.1	0.0	0.0	0.0	0.0	0	0.7	19.4
	20	7/22/2020	59.0	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	1.6	18.3
		10/28/2020	50.6	0.0	N/A	55.4	0.0	0.0	0.0	0.0	0	1.2	20.0
		1/21/2021	56.0	0.0	N/A	54.1	0.0	0.0	0.0	0.0	0	0.7	19.8
		5/4/2021	65.0	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	0.5	20.1
	30	7/22/2020	62.2	0.0	N/A	52.4	1.1	0.0	0.0	0.0	0	1.8	18.0
		10/28/2020	53.0	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	2.4	18.5
		1/21/2021	51.6	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	2.1	19.5
		5/4/2021	51.1	0.0	N/A	51.9	0.0	2.1	0.0	0.0	0	1.9	19.0
VMP-54	5	7/22/2020	60.3	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	3.9	15.9
		10/28/2020	54.5	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	3.7	16.5
		1/28/2021	56.2	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	1.8	18.9
		5/4/2021	54.0	0.0	N/A	51.2	0.0	0.0	0.0	0.0	0	3.0	17.9
	10	7/22/2020	51.1	0.0	N/A	50.9	0.0	0.0	0.2	0.0	0	3.0	16.6
		10/28/2020	57.1	0.0	N/A	52.8	0.0	0.0	0.0	0.0	0	3.9	16.2
		1/28/2021	60.0	0.0	N/A	53.8	0.0	0.0	0.0	0.0	0	2.2	18.4
		5/4/2021	54.2	0.0	N/A	50.2	0.0	0.0	0.0	0.0	0	0.0	20.9
	20	7/22/2020	55.5	0.0	N/A	54.2	0.0	0.0	0.1	0.0	0	2.5	16.7
		10/28/2020	53.6	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	3.9	15.9
		1/28/2021	66.6	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	3.0	16.9
		5/4/2021	52.4	0.0	N/A	55.4	0.0	0.0	0.0	0.0	0	2.3	17.8
	30	7/22/2020	63.5	0.0	N/A	54.2	0.0	0.0	0.7	0.0	0	2.5	16.1
		10/28/2020	50.7	0.0	N/A	51.3	0.0	0.0	0.0	0.0	0	1.6	17.1
		1/28/2021	59.9	0.0	N/A	52.2	0.7	0.0	0.0	0.0	0	0.5	19.7
		5/4/2021	60.2	0.9	N/A	86.5	0.7	0.0	0.0	0.0	0	1.8	18.5
VMP-55	5	7/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/28/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/11/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	10	7/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/28/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/11/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
	20	7/28/2020	61.5	0.0	N/A	50.5	0.0	17.0	0.8	0.0	0	23.9	0.8
		11/3/2020	55.1	0.0	N/A	52.3	0.6	89120	127	12.3	OVR	18.0	0.9
		1/28/2021	60.9	0.0	N/A	53.3	0.2	22290	338	OVR	OVR	16.6	1.2
		5/11/2021	50.7	1.2	N/A	50.5	0.7	95930	781	25.1	OVR	16.3	0.7
	30	7/28/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/28/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/11/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
VMP-56	10	7/23/2020	56.3	0.0	N/A	52.6	0.0	5.5	2.2	0.0	0	0.7	19.8
		11/3/2020	56.1	0.0	N/A	52.6	0.0	0.9	0.0	0.0	0	1.4	17.7
		1/21/2021	49.9	0.0	N/A	50.7	0.0	0.0	0.0	0.0	0	0.1	20.7
		5/5/2021	52.6	0.0	0.0	53.4	0.0	0.0	0.0	0.0	0	0.2	20.2
	25	7/23/2020	55.7	0.1	N/A	62.6	0.1	0.0	0.0	0.0	0	0.4	20.2
		11/3/2020	60.8	0.0	N/A	53.7	0.0	2.8	0.8	0.0	0	2.5	14.7
		1/21/2021	50.5	0.0	N/A	50.9	0.0	0.0	0.0	0.0	0	0.2	20.6
		5/5/2021	51.9	0.0	N/A	52.2	0.0	0.0	0.0	0.0	0	0.2	20.2
	38.5	7/23/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		11/3/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/21/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/5/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 3
SOIL VAPOR SAMPLING - TEDLAR® SAMPLING DATA

Reading Location			Shroud	Tedlar® Bag 1		Shroud	Tedlar® Bag 2						
Instrument			Dielectric		Landtec	Dielectric		FID	PID	Landtec			
Location	Depth	Date	Helium in Shroud Before (%)	Helium Before (%)	CH_4 (%)	Helium in Shroud After (%)	Helium After (%)	FID (ppmv)	PID (ppmv)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)
VMP-62	5	7/27/2020	55.8	0.0	N/A	54.6	0.0	0.0	0.2	0.0	0	7.3	11.0
		10/29/2020	57.7	0.0	N/A	52.4	0.0	0.0	0.0	0.0	0	4.9	16.6
		1/22/2021	54.6	0.0	N/A	53.6	0.0	0.0	0.0	0.0	0	1.3	19.2
		5/6/2021	63.3	0.2	N/A	55.5	0.1	0.0	0.0	0.0	0	1.9	17.9
	10	7/27/2020	59.6	0.0	N/A	52.2	0.0	0.0	0.3	0.0	0	4.7	14.5
		10/29/2020	55.2	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	5.2	15.9
		1/22/2021	50.6	0.0	N/A	54.0	0.0	0.0	0.0	0.0	0	2.0	19.4
		5/6/2021	66.2	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	1.7	18.6
	20	7/27/2020	62.7	0.0	N/A	57.2	0.0	0.0	0.1	0.0	0	2.4	17.6
		10/29/2020	53.8	0.0	N/A	50.7	0.0	0.0	0.0	0.0	0	3.6	16.7
		1/22/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021	66.0	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	1.6	18.7
	30	7/27/2020	53.5	0.0	N/A	52.1	0.0	0.0	0.1	0.0	0	1.6	18.6
		10/29/2020	56.4	0.0	N/A	52.0	0.0	0.0	0.0	0.0	0	2.3	17.9
		1/22/2021	52.0	1.2	N/A	54.9	1.1	0.0	0.0	0.0	0	1.9	19.2
		5/6/2021	51.7	0.0	N/A	53.9	0.0	0.0	0.0	0.0	0	1.2	18.9
VMP-63	5	7/28/2020	51.9	0.0	N/A	52.8	0.1	0.0	0.0	0.0	0	1.0	17.3
		11/3/2020	55.6	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	2.5	17.9
		1/29/2021	51.5	0.0	N/A	59.4	0.0	0.0	0.0	0.0	0	0.2	20.7
		5/5/2021	51.5	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	0.6	20.4
	10	7/28/2020	56.1	0.0	N/A	51.7	0.1	0.0	0.0	0.0	0	0.9	19.1
		11/3/2020	52.6	0.0	N/A	51.7	0.0	0.0	0.0	0.0	0	2.7	17.0
		1/29/2021	48.9	0.0	N/A	61.7	0.0	0.0	0.0	0.0	0	0.2	20.7
		5/5/2021	54.4	0.0	N/A	50.1	0.0	0.0	0.0	0.0	0	0.3	20.6
	20	7/28/2020	54.0	0.0	N/A	51.1	0.0	0.0	0.0	0.0	0	0.8	19.7
		11/3/2020	50.2	0.0	N/A	52.6	0.0	0.0	0.0	0.0	0	1.2	18.0
		1/29/2021	52.4	0.0	N/A	59.8	0.0	0.0	0.0	0.0	0	0.7	20.3
		5/5/2021	55.7	0.0	N/A	51.5	0.0	0.0	0.0	0.0	0	0.6	20.4
	30	7/28/2020	52.4	0.0	N/A	61.4	0.0	0.0	0.0	0.0	0	1.0	19.8
		11/3/2020	53.4	2.8	N/A	50.7	1.0	0.0	0.0	0.0	0	1.1	18.3
		1/29/2021	52.3	0.0	N/A	58.7	0.0	0.0	0.0	0.0	0	1.2	19.7
		5/5/2021	51.8	0.0	N/A	53.3	0.0	0.0	0.0	0.0	0	0.9	20.0
VMP-64	5	7/24/2020	67.2	0.0	N/A	52.4	0.0	0.0	0.2	0.0	0	0.7	14.8
		10/30/2020	53.6	0.0	N/A	50.3	0.0	0.0	0.0	0.0	0	1.1	19.1
		1/22/2021	65.2	0.0	N/A	52.5	0.0	0.0	0.0	0.0	0	0.4	20.6
		5/6/2021	51.6	2.1	N/A	53.3	3.0	0.0	0.0	0.0	0	0.2	20.0
	10	7/24/2020	51.2	0.0	N/A	51.4	0.0	0.8	1.1	0.0	0	2.4	16.4
		10/30/2020	50.4	0.0	N/A	50.6	0.0	0.0	0.0	0.0	0	4.1	15.3
		1/22/2021	51.7	0.0	N/A	56.2	0.0	0.0	0.0	0.0	0	2.6	19.0
		5/6/2021	58.0	0.8	N/A	58.1	0.0	0.0	0.0	0.0	0	1.7	18.8
	20	7/24/2020	51.2	0.0	N/A	53.4	0.0	0.0	0.0	0.0	0	1.6	17.9
		10/30/2020	50.7	0.0	N/A	50.8	0.0	0.0	0.0	0.0	0	3.1	16.4
		1/22/2021	55.1	0.0	N/A	52.7	0.0	0.0	0.0	0.0	0	3.8	17.7
		5/6/2021	51.9	0.0	N/A	59.9	0.2	0.0	0.0	0.0	0	2.3	18.1
	28	7/24/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		10/30/2020[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		1/22/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS
		5/6/2021[8]	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS	NS

Notes:

1. OVR is used to indicate a reading over range for the FID, PID, or Landtec.
2. N/A is used to indicate that a reading was not collected because it was unnecessary (i.e., CH_4 measurement on Tedlar® Bag 1 if helium in Bag was minimal).
3. NM is used to indicate that a reading was not measured.
4. NS is used to indicate that a reading was not collected because the port could not be sampled.
5. FID readings were taken with a TVA-2020. When oxygen concentrations were less than 14%, or when the sample put the flame out, a dilution tip was used when analyzing samples with the FID. The dilution tip introduced ambient air in a 10:1 ratio with the sample, which required the sample readings to be multiplied by 10 to get the actual value. The FID readings in this spreadsheet illustrate the actual FID values that were represented in each sample.
6. Negative readings on the FID are recorded as zero.
7. VMP not sampled due to port integrity.
8. VMP not sampled because screen submerged below water table or a temporary water condition.
9. VMP re-sampled due to elevated helium readings (>10% of shroud) in canister at the laboratory.
10. VMP not sampled because vehicle was consistently parked on well vault.
11. VMP re-sampled due to anomalous results in the initial sample.

TABLE 4
SOIL VAPOR SCREENING CRITERIA

Chemical	Residential (mg/m^3)	Industrial/ Commercial (mg/m^3)
TO-15 Analytes		
Acetone	750,000	750,000
Benzene	0.37	2.8
Bromodichloromethane	450,000	450,000
Bromoform	11.0	52.0
Bromomethane	6.9	42.0
1,3-Butadiene		
2-Butanone	6,400	40,000
Carbon disulfide	780	5,300
Carbon tetrachloride	0.21	1.5
Chlorobenzene	69.0	420
Chlorodibromomethane	57,000	57,000
Chloroethane		
Chloroform	0.11	0.92
Chloromethane		
Allyl chloride (3-Chloropropene)		
alpha-Chlorotoluene		
Cyclohexane		
1,2-Dibromo-3-chloropropane (DBCP)	0.0012	0.0062
1,2-Dibromoethane	0.0078	0.048
1,2-Dichlorobenzene	290	1,700
1,3-Dichlorobenzene		
1,4-Dichlorobenzene	1,200	6,800
1,1-Dichloroethane	690	4,200
1,2-Dichloroethane	0.099	0.81
1,1-Dichloroethene	240	1,600
cis-1,2-Dichloroethene	1,100,000	1,100,000
trans-1,2-Dichloroethene	85.0	510
Dichloromethane (Methylene chloride)	5.6	45.0
1,2-Dichloropropane	0.31	2.3
cis-1,3-Dichloropropene	0.9	6.2
trans-1,3-Dichloropropene	0.9	6.2
1,4-Dioxane	0.22	2.3
Ethanol		
Ethylbenzene	1.3	9.3
4-Ethyltoluene		
Freon 11		
Freon 12		
Freon 113		
Freon 114		
Heptane		
Hexachlorobutadiene		
Hexane		
2-Hexanone (Methyl N-Butyl Ketone)		
Isopropylbenzene (Cumene)	600	3,500
4-Methyl-2-pentanone (Methyl Isobutyl Ketone)		
Methyl tert-Butyl Ether (MTBE)	3,700	24,000
n-Propylbenzene		
2-Propanol		
Styrene	1,400	8,500
Tetrachloroethene	0.55	4.0
1,1,2,2-Tetrachloroethane		
Tetrahydrofuran		
Toluene	6,200	40,000
1,2,4-Trichlorobenzene	5.4	25.0
Trichloroethene	1.5	12.0
1,1,1-Trichloroethane (Methyl chloroform)	6,600	41,000
1,1,2-Trichloroethane	170,000	170,000
Trichloroflouromethane	860	5,600
1,2,4-Trimethylbenzene		
1,3,5-Trimethylbenzene		
2,2,4-Trimethylpentane		
Vinyl chloride	0.29	4.8
Xylenes (total)	140	840
m,p-Xylene	130	820
o-Xylenes	120	790

Note:

1. Screening criteria source: Illinois Pollution Control Board, Tiered Approach to Corrective Action (TACO) Title 35 - Subtitle G; Chapter I, Subchapter f; Part 742; Appendix B, Table H: Tier 1 Indoor Inhalation Remediation Objectives for Residential and Industrial/Commercial Properties for the Diffusion and Advection Exposure Route, July 15, 2013.

2. Blank cells indicate that chemical does not have screening criteria.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	0.013	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		0.0016	J		<0.015	U	
		VMP-1-5-110220	11/2/2020	0.01	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-1-5-012921	1/29/2021	0.0098	J		<0 0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-1-5-050521	5/5/2021	0.05			0 00056	J		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		0.0049	J		0.0014	J	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	0.024	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		0.0019	J		<0.016	U	
		VMP-1-8.5-110220	11/2/2020	0.012	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-1-8.5-012921	1/29/2021	0.0058	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0051	J	
		VMP-1-8.5-050521	5/5/2021	0.013	J		<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.014	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	0.031			<0 0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.012	U		0.0017	J		<0.016	U	
		VMP-1-23.5-110220	11/2/2020	0.01	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-1-23.5-012921	1/29/2021	0.014	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.0073	J	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.031	U		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	0.038			<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		0.0073	J		<0.016	U	
		VMP-1-38.5-110220	11/2/2020	0.011	J		<0 0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-1-38.5-012921	1/29/2021	0.013	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-1-38.5-050521	5/5/2021	0.023	J		<0 0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.011	U		0.0024	J		<0.014	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	0.019	J		<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-2-5-110420	11/4/2020	0.023	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0046	J		<0.016	J	U
		VMP-2-5-012521	1/25/2021	0.0066	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-2-5-050721	5/7/2021	0.018	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	0.017	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0018	J	
		VMP-2-8.5-110420	11/4/2020	0.036			<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		0.0018	J		<0.015	U	
		VMP-2-8.5-012521	1/25/2021	0.018	J		0 00094	J		<0.0086	U		<0.013	U		<0.05	U		0.011	J		<0.015	U		<0.016	U	
		VMP-2-8.5-050721	5/7/2021	0.012	J		<0 0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
	22 ft	VMP-2-22-072420	7/24/2020	0.01	J		<0 0041	U		0.0015	J		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-2-22-110420	11/4/2020	0.045	J		0.091			<0.082	U		<0.13	U		<0.19	U		17			<0.14	U		<0.15	U	
		VMP-2-22-012521	1/25/2021	0.0064	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-2-22-050721	5/7/2021	0.013	J		<0 0034	U		0.0012	J		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	0.022	J		<0 0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		0.0026	J		0.0023	J	
		VMP-3-5-110420	11/4/2020	0.024	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0032	J		<0.015	J	U
		VMP-3-5-012521	1/25/2021	0.0065	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-3-5-051021	5/10/2021	0.022	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		0.004	J		<0.013	U	
	10 ft	VMP-3-10-072920	7/29/2020	0.018	J		<0.004	U		0.0015	J		<0.013	U		<0.049	U		0.0021	J		0.0039	J		0.003	J	
		VMP-3-10-110420	11/4/2020	0.021	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.0034	J		<0.017	U	
		VMP-3-10-051021	5/10/2021	0.011	J		<0 0032	U		0.0019	J		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	
	22 ft	VMP-3-22-072920	7/29/2020	0.012	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0016	J		<0.016	U	
		VMP-3-22-110420	11/4/2020	0.02	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.0021	J		<0.017	J	U
		VMP-3-22-012521	1/25/2021	0.0069	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-3-22-051021	5/10/2021	0.0063	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.0029	J		<0.012	U	
		VMP-3-22-051021-DUP	5/10/2021	0.01	J		0.0012	J		<0.0067	U		<0.01	U		<0.039	U		<0.0095	U		0.0038	J		<0.012	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	0.019	J		0.0089	J		<0.069	U		<0.11	U		<0.4	U		<0.098	U		<0.12	U		<0.13	U	
		VMP-3-31.5-110420	11/4/2020	<12	U		<4	U		<8.4	U		<13	U		<20	U		6000			<15	U		<16	U	
		VMP-3-31.5-012521	1/25/2021	0.0091	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-3-31.5-051021	5/10/2021	0.04			0.0011	J		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.003	J		<0.012	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	0.037			<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		0.0034	J		0.0033	J	
		VMP-4-5-073020-DUP	7/30/2020	0.037			<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0042	J		0.0048	J	
		VMP-4-5-103020	10/30/2020	<0.029	J	U	0.0012	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-4-5-012821	1/28/2021	0.0082	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-4-5-050521	5/5/2021	0.016	J		0 00055	J		<0.007	U		<0.011	U		<0.04	U		<0.0099	U		<0.012	U		<0.013	U	
	12 ft	VMP-4-12-073020	7/30/2020	0.031			0.0046			<0.0084	U		<0.013	U		<0.049	U		0.037			0.0025	J		0.002	J	
		VMP-4-12-103020	10/30/2020	<0.029	J	U	<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-4-12-012821	1/28/2021	0.0082	J		<0 0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-4-12-050521	5/5/2021	0.023	J		0.002	J		<0.0075	U		<0.012	U		<0.043	U		<0.011	U		0.0036	J		0.0012	J	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	0.018	J		<0 0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.012	U		0.0042	J		<0.016	U	
		VMP-4-23.5-103020	10/30/2020	<0.029	J	U	<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.029	J	U	<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-4-23.5-012821	1/28/2021	0.054			<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-4-23.5-050521	5/5/2021	0.03			0 00071	J		<0.0075	U		<0.012	U		<0.043	U		<0.011	U		0.004	J		<0.014	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	0.021	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0024	J		<0.016	U	
		VMP-5-5-103020	10/30/2020	0.021	J		<0 0038	U		<0.008	U		<0.012	U		<0.047	U		<0.011	U		0.0062	J		<0.015	U	
		VMP-5-5-012221	1/22/2021	0.012	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-5-5-050621	5/6/2021	0.012	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.0038	J		<0.012	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	0.014	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0015	J		0.0019	J	
		VMP-5-12.5-103020	10/30/2020	<0.029	J	U	<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-5-12.5-012221	1/22/2021	0.015	J		0 00042	J		<0.0097	U		<0.015	U		<0.056	U		<0.014	U		0.0027	J		<0.018	J	U
		VMP-5-12.5-050621	5/6/2021	0.022	J		<0 0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
		VMP-5-12.5-050621-DUP	5/6/2021	0.0087	J		<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
	31 ft	VMP-5-31-072320	7/23/2020	0.012	J		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		0.0024	J		<0.015	U	
		VMP-5-31-072320-DUP	7/23/2020	0.018	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		0.003	J		<0.016	U	
		VMP-5-31-103020	10/30/2020	0.017	J		<0 0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.031	J	U	<0 0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-5-31-012221	1/22/2021	<0.029	J	U	0 00041	J		<0.0082	U		0.0014	J		<0.048	U		<0.012	U		0.0018	J		<0.015	J	U
		VMP-5-31-050621	5/6/2021	0.26			0.0018	J		<0.0068	U		<0.01	U		<0.039	U		0.0043	J		0.049			<0.012	U	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	0.032			<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-6-5-102920	10/29/2020	0.013	J		0.0004	J		<0.0083	U		<0.013	U		<0.048	U		0.03			<0.014	U		<0.015	J	U
		VMP-6-5-012921	1/29/2021	<0.029	U		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-6-5-050621	5/6/2021	0.012	J		0 00053	J		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.014	U	
	10 ft	VMP-6-10-072220	7/22/2020	0.011	J		<0 0042	U		0.0044	J		<0.013	U		0.004	J		<0.012	U		<0.015	U		<0.016	U	
		VMP-6-10-102920	10/29/2020	0.017	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-6-10-050621	5/6/2021	0.016	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		0.0032	J		0.0012	J	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	0.013	J		0.0013	J		<0.0091	U		<0.014	U		<0.053	U		0.0095	J		0.0015	J		<0.017	U	
		VMP-6-31.5-102920	10/29/2020	0.021	J		0.0009	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-6-31.5-012921	1/29/2021	0.0066	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-6-31.5-012921-DUP	1/29/2021	0.0088	J		0.001	J		<0.0092	U		<0.014	U		<0.054	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-6-31.5-050621	5/6/2021	0.0078	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		0.011	J	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	0.037			<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0029	J		<0.015	U	
		VMP-7-5-110420	11/4/2020	0.01	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0049	J	
		VMP-7-5-012621	1/26/2021	0.014	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-7-5-050521	5/5/2021	0.02	J		<0 0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		0.0028	J		0.0014	J	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	0.045			<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0075	J		0.0024	J	
		VMP-7-13.5-110420	11/4/2020	0.02	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0023	J		0.0082	J	
		VMP-7-13.5-012621	1/26/2021	0.0099	J		0 00099	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-7-13.5-050521	5/5/2021	0.022	J		0 00093	J		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		0.0034	J		0.0014	J	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	0.035			<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-7-29.5-110420	11/4/2020	0.097			<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0018	J		0.012	J	
		VMP-7-29.5-012621	1/26/2021	0.0049	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-7-29.5-050521	5/5/2021	0.019	J		0 00049	J		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.0089	J	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	0.019	J		<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		0.0019	J		<0.015	U	
		VMP-8-5-102820	10/28/2020	0.018	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-8-5-012121	1/21/2021	0.0086	J		<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		0.002	J		<0.015	U	
		VMP-8-5-050421	5/4/2021	0.0088	J		<0 0029	U		<0.0061	U		<0 0094	U		<0.036	U		<0.0087	U		<0.011	U		0.0015	J	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	0.02	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0018	J		<0.016	J	U
		VMP-8-9.5-072220-DUP	7/22/2020	0.02	J		<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		0.002	J		<0.015	U	
		VMP-8-9.5-102820	10/28/2020	0.017	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-8-9.5-012121	1/21/2021	0.01	J		0.0011	J		<0.0083	U		<0.013	U		<0.048	U		0.013			<0.014	U		<0.015	U	
		VMP-8-9.5-050421	5/4/2021	0.011	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.0014	J		<0.012	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	0.029			<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		0.0034	J		<0.015	U	
		VMP-8-23.5-102820	10/28/2020	<0.029	J	U	<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-8-23.5-012121	1/21/2021	0.023	J		0.001	J		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		0.0016	J		0.0017	J	
		VMP-8-23.5-050421	5/4/2021	0.012	J		<0.003	U		<0.0063	U		<0 0097	U		<0.036	U		<0.0089	U		0.0023	J		<0.012	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	0.013	J		0 00084	J		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0024	J		0.018		
		VMP-8-35.5-102820	10/28/2020	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		0.0022	J	
		VMP-8-35.5-102820-DUP	10/28/2020	0.012	J		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-8-35.5-012121	1/21/2021	0.015	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0014	J		<0.016	U	
		VMP-8-35.5-050421	5/4/2021	0.0084	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.027		
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	0.02	J		<0 0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.012	U		0.0026	J		0.004	J	
		VMP-9-5-072220-DUP	7/22/2020	0.017	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0017	J		<0.016	U	
		VMP-9-5-102820	10/28/2020	0.026	J		<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		0.0027	J		<0.015	U	
		VMP-9-5-012121	1/21/2021	0.0095	J		0 00051	J		<0.0083	U		<0.013	U		<0.048	U		0.0072	J		<0.015	U		<0.016	U	
		VMP-9-5-050421	5/4/2021	0.012	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	0.026	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0037	J		<0.016	U	
		VMP-9-11.5-102820	10/28/2020	0.013	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-9-11.5-012121	1/21/2021	0.0084	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		0.0046	J		<0.015	U		<0.016	U	
		VMP-9-11.5-050421	5/4/2021	0.017	J		0 00067	J		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		0.0016	J	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	0.019	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-9-25.5-102820	10/28/2020	<0.029	J	U	<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-9-25.5-102820-DUP	10/28/2020	0.011	J		0.0004	J		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-9-25.5-012121	1/21/2021	0.0071	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0017	J		<0.016	U	
		VMP-9-25.5-050421	5/4/2021	0.018	J		<0 0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	0.0044	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-9-38.5-012121-DUP	1/21/2021	0.0098	J		0.002	J		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	0.019	J		<0 0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-18-8.5-012621	1/26/2021	0.0064	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	0.023	J		<0 0038	U		<0.008	U		<0.012	U		<0.047	U		0.0018	J		0.0026	J		0.002	J	
		VMP-19-5-110420	11/4/2020	0.036			<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0056	J		<0.016	U	
		VMP-19-5-012621	1/26/2021	0.0062	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		0.0062	J		<0.014	U		<0.015	U	
		VMP-19-5-051121	5/11/2021	0.017	J		<0 0031	U		<0.0065	U		<0.01	U		<0.038	U		<0.0093	U		<0.012	U		<0.012	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	0.012	J		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		0.0027	J		<0.015	U	
		VMP-20-5-112420	11/24/2020	0.08			0 00094	J		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		0.0044	J		0.013	J	
		VMP-20-5-012521	1/25/2021	<0.028	U		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-20-5-050721	5/7/2021	0.014	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	
	10 ft	VMP-20-10-072320	7/23/2020	0.0096	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		0.0015	J		<0.016	U	
		VMP-20-10-110220	11/2/2020	0.0079	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-20-10-012521	1/25/2021	0.0068	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-20-10-050721	5/7/2021	0.013	J		<0.003	U		<0.0064	U		<0 0098	U		<0.037	U		<0.009	U		<0.011	U		<0.012	U	
	25 ft	VMP-20-25-072320	7/23/2020	0.024	J		<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		0.0066	J		0.0033	J	
		VMP-20-25-110220	11/2/2020	0.022	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		0.0092	J	
		VMP-20-25-012521	1/25/2021	0.039			<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-20-25-050721	5/7/2021	0.014	J		<0 0031	U		<0.0065	U		<0.01	U		<0.038	U		<0.0092	U		<0.011	U		<0.012	U	
		VMP-20-25-050721-DUP	5/7/2021	0.018	J		<0.003	U		<0.0064	U		<0 0098	U		<0.037	U		<0.009	U		<0.011	U		<0.012	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	0.018	J		0 00038	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.0066	J	
		VMP-21-5-102920	10/29/2020	<0.029	J	U	<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0018	J		<0.015	J	U
		VMP-21-5-012521	1/25/2021	0.0058	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-21-5-050321	5/3/2021	0.023	J		<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.014	U	
	10 ft	VMP-21-10-072420	7/24/2020	0.013	J		<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		0.04		
		VMP-21-10-102920	10/29/2020	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		0.0041	J		<0.015	U		<0.016	J	U
		VMP-21-10-012521	1/25/2021	0.017	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-21-10-012521-DUP	1/25/2021	0.0094	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-21-10-050321	5/3/2021	0.035			<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
		VMP-21-10-060321-R	6/3/2021	0.018	J		0.0031	J		<0.0075	U		<0.012	U		<0.043	U		0.0013	J		<0.013	U		<0.014	U	
	25 ft	VMP-21-25-072420	7/24/2020	0.028	J		<0 0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.016	U	
		VMP-21-25-102920	10/29/2020	0.029	J		<0 0041	U		0.0037	J		<0.013	U		<0.05	U		<0.012	U		0.0052	J		<0.016	J	U
		VMP-21-25-012521	1/25/2021	0.011	J		0.0012	J		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-21-25-050321	5/3/2021	0.0074	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-21-25-050321-DUP	5/3/2021	0.0069	J		<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
	33 ft	VMP-21-33-072420	7/24/2020	0.027	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0039	J		0.0021	J	
		VMP-21-33-102920	10/29/2020	0.01	J		0 00042	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	J	U
		VMP-21-33-012521	1/25/2021	0.013	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-21-33-050321	5/3/2021	0.011	J		<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	0.04			<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0068	J		0.005	J	
		VMP-22-5-110520	11/5/2020	0.012	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-22-5-012621	1/26/2021	0.0042	J		<0 0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-22-5-050321	5/3/2021	0.16			<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
	10 ft	VMP-22-10-072320	7/23/2020	0.054			0.0022	J		0.0043	J		<0.013	U		<0.048	U		0.008	J		0.0042	J		0.0032	J	
		VMP-22-10-110520	11/5/2020	0.018	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		0.0073	J		0.003	J		<0.016	U	
		VMP-22-10-012621	1/26/2021	0.01	J		0 00054	J		<0.0086	U		<0.013	U		<0.05	U		0.0084	J		<0.015	U		<0.016	U	
		VMP-22-10-050321	5/3/2021	0.019	J		<0 0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.011	U		<0.014	U		0.0022	J	
	18 ft	VMP-22-18-072320	7/23/2020	0.024	J		<0 0044	U		0.0096			<0.014	U		<0.053	U		<0.013	U		0.0023	J		0.0025	J	
		VMP-22-18-110520	11/5/2020	0.011	J		0 00063	J		<0.0081	U		<0.012	U		<0.047	U		0.0052	J		<0.014	U		<0.015	U	
		VMP-22-18-012621	1/26/2021	0.0087	J		0 00043	J		0.0015	J		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	J	U
		VMP-22-18-050321	5/3/2021	0.015	J		<0 0036	U		0.0057	J		<0.012	U		<0.043	U		<0.011	U		<0.013	U		0.0014	J	
	38 ft	VMP-22-38-110520	11/5/2020	0.013	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		0.0098	J		<0.015	U		<0.016	J	U
		VMP-22-38-012621	1/26/2021	0.0065	J		0 00042	J		<0.0094	U		<0.014	U		<0.054	U		0.0068	J		<0.016	U		<0.017	U	
		VMP-22-38-050321	5/3/2021	<0.26	U		<0.035	U		<0.074	U		<0.11	U		<0.43	U		<0.1	U		<0.13	U		<0.14	U	
		VMP-22-38-060321-R	6/3/2021	0.012	J		<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0022	J	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	0.042			0.033			<0.0086	U		<0.013	U		<0.05	U		0.036			0.011	J		0.0019	J	
		VMP-23-5-102920	10/29/2020	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-23-5-012121	1/21/2021	0.0077	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-23-5-050721	5/7/2021	0.014	J		<0 0034	U		0.0011	J		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	10 ft	VMP-23-10-072320	7/23/2020	0.012	J		<0 0043	U		0.0034	J		<0.014	U		<0.053	U		<0.013	U		0.0026	J		<0.017	U	
		VMP-23-10-102920	10/29/2020	0.049			<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0017	J		<0.015	J	U
		VMP-23-10-102920-DUP	10/29/2020	0.029			<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	J	U
		VMP-23-10-012121	1/21/2021	0.0055	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
	25 ft	VMP-23-25-072320	7/23/2020	0.012	J		0.0015	J		0.01			<0.014	U		<0.052	U		<0.013	U		0.0025	J		<0.017	U	
		VMP-23-25-102920	10/29/2020	0.011	J		<0 0039	U		0.0035	J		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	J	U
		VMP-23-25-012121	1/21/2021	0.013	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		0.0019	J		0.037		
		VMP-23-25-050721	5/7/2021	0.018	J		<0 0031	U		0.0013	J		<0.01	U		<0.038	U		<0.0092	U		0.002	J		0.0045	J	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	0.019	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0022	J		<0.016	J	U
		VMP-24-5-102920	10/29/2020	0.012	J		0.0005	J		<0.0086	U		<0.013	U		<0.05	U		0.0086	J		0.0017	J		0.0078	J	
		VMP-24-5-012121	1/21/2021	0.0098	J		0 00036	J		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-24-5-051121	5/11/2021	0.015	J		<0 0031	U		<0.0064	U		<0 0099	U		<0.037	U		<0.0091	U		<0.011	U		0.0019	J	
	10 ft	VMP-24-10-072220	7/22/2020	0.013	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0031	J		<0.015	U	
		VMP-24-10-102920	10/29/2020	0.0089	J		0 00035	J		<0.0081	U		<0.012	U		<0.047	U		0.0046	J		<0.014	U		<0.015	U	
		VMP-24-10-022521	2/25/2021	0.0064	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		0.0044	J		<0.014	U		<0.015	U	
		VMP-24-10-051121	5/11/2021	0.011	J		<0 0028	U		<0.006	U		<0 0092	U		<0.034	U		<0.0085	U		<0.01	U		0.0011	J	
		VMP-24-10-051121-DUP	5/11/2021	0.014	J		<0 0029	U		<0.0061	U		<0 0094	U		<0.035	U		<0.0086	U		<0.011	U		0.0031	J	
	22 ft	VMP-24-22-072220	7/22/2020	0.02	J		0 00037	J		<0.0079	U		<0.012	U		<0.046	U		0.0037	J		0.0017	J		<0.015	U	
		VMP-24-22-102920	10/29/2020	0.008	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0037	J	
		VMP-24-22-012121	1/21/2021	0.0072	J		0 00038	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-24-22-051121	5/11/2021	0.02	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.005	J	
	34 ft	VMP-24-34-072220	7/22/2020	0.024	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0028	J		<0.016	U	
		VMP-24-34-102920	10/29/2020	0.015	J		0.0008	J		<0.0086	U		<0.013	U		<0.05	U		0.0058	J		<0.015	U		0.0024	J	
		VMP-24-34-102920-DUP	10/29/2020	0.009	J		0 00033	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.0025	J	
		VMP-24-34-012121	1/21/2021	0.014	J		0 00038	J		<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.0024	J		<0.017	U	
		VMP-24-34-051121	5/11/2021	0.02	J		<0 0032	U		<0.0067	U		<0.01	U		<0.039	U		<0.0095	U		<0.012	U		0.0057	J	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	0.025	J		<0 0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.012	U		0.0029	J		0.0022	J	
		VMP-32-5-110420	11/4/2020	0.018	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0034	J		<0.016	U	
		VMP-32-5-012621	1/26/2021	0.017	J		0 00034	J		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0015	J		<0.016	J	U
		VMP-32-5-051221	5/12/2021	0.011	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		0.0012	J	
	10 ft	VMP-32-10-072920	7/29/2020	0.028	J		0.0012	J		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0047	J		<0.016	U	
		VMP-32-10-110420	11/4/2020	0.02	J		<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		0.0015	J		<0.015	U	
		VMP-32-10-012621	1/26/2021	0.0077	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0014	J		<0.016	U	
		VMP-32-10-051221	5/12/2021	0.015	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		0.0019	J		0.0014	J	
		VMP-32-10-051221-DUP	5/12/2021	0.0096	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	20 ft	VMP-32-20-072920	7/29/2020	0.018	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.003	J		<0.016	U	
		VMP-32-20-110420	11/4/2020	0.028	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0016	J		<0.016	U	
		VMP-32-20-012621	1/26/2021	0.015	J		0.0006	J		<0.009	U		<0.014	U		<0.052	U		0.0091	J		<0.016	U		<0.017	U	
		VMP-32-20-012621-DUP	1/26/2021	0.011	J		0.0006	J		<0.0087	U		<0.013	U		<0.05	U		0.01	J		<0.015	U		<0.016	U	
	30 ft	VMP-32-30-072920	7/29/2020	0.021	J		<0 0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		0.0022	J		0.017		
		VMP-32-30-110420	11/4/2020	0.021	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.058		
		VMP-32-30-110420-DUP	11/4/2020	0.025	J		<0 0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.013	U		<0.017	U		<0.018	U	
		VMP-32-30-012621	1/26/2021	0.008	J		0 00041	J		<0.0085	U		<0.013	U		<0.049	U		0.0096	J		0.002	J		<0.016	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	0.02	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.003	J		<0.016	U	
		VMP-42-10-110520	11/5/2020	0.0086	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-42-10-012921	1/29/2021	0.012	J		0.025			<0.0085	U		<0.013	U		<0.05	U		0.058			<0.015	U		<0.016	U	
		VMP-42-10-050521	5/5/2021	0.013	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0 00095	J	
	20 ft	VMP-42-20-072820	7/28/2020	0.017	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0013	J		<0.015	U	
		VMP-42-20-110520	11/5/2020	0.021	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0019	J		<0.015	J	U
		VMP-42-20-012921	1/29/2021	<0.031	U		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-42-20-050521	5/5/2021	0.018	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
	30 ft	VMP-42-30-072820	7/28/2020	0.012	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-42-30-110520	11/5/2020	0.012	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	J	U
		VMP-42-30-110520-DUP	11/5/2020	0.018	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.002	J		<0.015	J	U
		VMP-42-30-012921	1/29/2021	0.007	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-42-30-050521	5/5/2021	0.0083	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	0.042			<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.005	J		<0.016	U	
		VMP-43-10-110320	11/3/2020	0.018	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-43-10-012621	1/26/2021	0.0056	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-43-10-050521	5/5/2021	0.012	J		0.0014	J		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		<0.013	U		<0.014	U	
	20 ft	VMP-43-20-072820	7/28/2020	0.048			<0 0044	U		<0.0092	U		<0.014	U		<0.053	U		0.12			0.0041	J		<0.017	U	
		VMP-43-20-110320	11/3/2020	0.016	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0018	J		0.002	J	
		VMP-43-20-012621	1/26/2021	0.0076	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0016	J		<0.015	J	U
		VMP-43-20-050521	5/5/2021	0.01	J		<0 0032	U		<0.0068	U		<0.01	U		<0.04	U		<0.0097	U		<0.012	U		0.0016	J	
	30 ft	VMP-43-30-072820	7/28/2020	0.02	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0022	J		0.0041	J	
		VMP-43-30-110320	11/3/2020	0.018	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		0.0094	J		0.0036	J		<0.015	U	
		VMP-43-30-022521	2/25/2021	0.02	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		0.0025	J	
		VMP-43-30-050521	5/5/2021	0.018	J		0 00094	J		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		0.0026	J		0.0015	J	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	0.0032	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		0.004	J		<0.014	U		<0.015	U	
	20 ft	VMP-44-20-072820	7/28/2020	0.0083	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	0.011	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		0.0019	J		<0.016	U		0.0077	J	
		VMP-45-10-110520	11/5/2020	0.013	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0016	J		<0.016	U	
		VMP-45-10-012621	1/26/2021	0.011	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-45-10-060321	6/3/2021	0.009	J		<0 0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		<0.013	U		0.0021	J	
	20 ft	VMP-45-20-072820	7/28/2020	0.016	J		<0 0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.013	U		0.0022	J		<0.017	U	
		VMP-45-20-110520	11/5/2020	0.033			0.0011	J		<0.0083	U		<0.013	U		<0.048	U		0.0058	J		0.0022	J		<0.015	J	U
		VMP-45-20-012621	1/26/2021	0.0037	J		<0 0039	U		<0.0081	U		0.0015	J		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-45-20-050521	5/5/2021	0.021	J		0 00054	J		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	30 ft	VMP-45-30-072820	7/28/2020	0.028	J		<0 0047	U		<0.0098	U		<0.015	U		<0.057	U		0.021			0.0036	J		0.004	J	
		VMP-45-30-110520	11/5/2020	<0.028	J	U	<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	J	U
		VMP-45-30-012621	1/26/2021	0.0043	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-45-30-050521	5/5/2021	0.021	J		0 00058	J		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.0021	J		0.0024	J	
		VMP-45-30-050521-DUP	5/5/2021	0.013	J		<0 0032	U		<0.0067	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	0.058			<0 0039	U		0.0078	J		<0.013	U		<0.048	U		<0.012	U		0.011	J		<0.015	U	
		VMP-47-5-110220	11/2/2020	0.012	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-47-5-012221	1/22/2021	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-47-5-050621	5/6/2021	0.0076	J		<0 0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
	10 ft	VMP-47-10-072720	7/27/2020	0.02	J		<0 0038	U		0.024			<0.012	U		<0.046	U		<0.011	U		0.0029	J		<0.015	U	
		VMP-47-10-072720-DUP	7/27/2020	0.012	J		<0 0038	U		0.025			<0.012	U		<0.047	U		<0.011	U		<0.014	U		0.0098	J	
		VMP-47-10-110220	11/2/2020	<0.028	J	U	<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-47-10-012221	1/22/2021	0.02	J		<0 0039	U		0.012			<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-47-10-050621	5/6/2021	0.01	J		<0 0032	U		0.038			<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.0018	J	
	20 ft	VMP-47-20-072720	7/27/2020	0.013	J		<0 0038	U		0.009			<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0023	J	
		VMP-47-20-110220	11/2/2020	0.056			<0 0042	U		0.0022	J		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-47-20-012221	1/22/2021	<0.029	J	U	<0 0039	U		0.0019	J		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-47-20-012221-DUP	1/22/2021	0.013	J		<0 0038	U		0.002	J		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-47-20-050621	5/6/2021	0.0078	J		<0 0032	U		0.0063	J		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		0.0012	J	
	30 ft	VMP-47-30-072720	7/27/2020	0.024	J		<0 0039	U		0.0035	J		<0.012	U		<0.047	U		<0.012	U		<0.014	U		0.002	J	
		VMP-47-30-110220	11/2/2020	0.016	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-47-30-110220-DUP	11/2/2020	0.023	J		<0 0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-47-30-012221	1/22/2021	<0.03	J	U	<0 0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-47-30-050621	5/6/2021	0.0092	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
		VMP-47-30-050621-DUP	5/6/2021	0.018	J		0 00042	J		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	0.045			<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		0.003	J		0.0026	J	
		VMP-48-5-110220	11/2/2020	0.014	J		<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-48-5-012521	1/25/2021	0.014	J		0 00081	J		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-48-5-050721	5/7/2021	0.011	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	10 ft	VMP-48-10-073020	7/30/2020	0.016	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0015	J		<0.016	U	
		VMP-48-10-073020-DUP	7/30/2020	0.015	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0021	J		<0.015	U	
		VMP-48-10-110220	11/2/2020	0.011	J		<0 0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-48-10-012521	1/25/2021	0.0077	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-48-10-050721	5/7/2021	0.016	J		<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		0.016		
	20 ft	VMP-48-20-110220	11/2/2020	0.009	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		0.0067	J	
		VMP-48-20-012521	1/25/2021	0.037			<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-48-20-012521-DUP	1/25/2021	0.025	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
	30 ft	VMP-48-30-073020	7/30/2020	0.015	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-48-30-110220	11/2/2020	0.014	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-48-30-012521	1/25/2021	0.0097	J		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-48-30-050721	5/7/2021	0.0092	J		<0 0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	0.023	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-49-5-072420-DUP	7/24/2020	0.042			<0 0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		0.003	J		0.0032	J	
		VMP-49-5-110420	11/4/2020	0.017	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		0.021			0.0019	J		<0.016	U	
		VMP-49-5-012521	1/25/2021	0.0083	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-49-5-050321	5/3/2021	0.0089	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
	10 ft	VMP-49-10-072420	7/24/2020	0.05			0 00037	J		<0.0094	U		<0.014	U		<0.054	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-49-10-110420	11/4/2020	0.039			<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0018	J		<0.016	U	
		VMP-49-10-012521	1/25/2021	0.012	J		<0 0036	U		<0.0075	U		<0.012	U		<0.043	U		0.0079	J		<0.013	U		<0.014	U	
		VMP-49-10-050321	5/3/2021	0.0074	J		<0 0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		<0.013	U		<0.014	U	
	20 ft	VMP-49-20-072420	7/24/2020	0.054			0 00044	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		0.0063	J		0.0027	J	
		VMP-49-20-110420	11/4/2020	0.0075	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-49-20-012521	1/25/2021	0.0062	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-49-20-050321	5/3/2021	0.013	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-49-20-060321-R	6/3/2021	0.011	J		0.001	J		<0.0071	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	30 ft	VMP-49-30-072420	7/24/2020	0.032			0 00037	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.003	J		0.0037	J	
		VMP-49-30-110420	11/4/2020	<0.95	U		<0.32	U		<0.67	U		<1	U		<1.6	U		240			<1.2	U		<1.2	U	
		VMP-49-30-012521	1/25/2021	0.0084	J		0.001	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-49-30-050321	5/3/2021	0.0077	J		<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.014	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	0.024	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.0027	J	
		VMP-50-5-110520	11/5/2020	0.013	J		<0 0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.011	U		0.0015	J		<0.014	J	U
		VMP-50-5-012621	1/26/2021	0.0094	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-50-5-050721	5/7/2021	0.016	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	10 ft	VMP-50-10-072720	7/27/2020	0.017	J		<0 0037	U		0.0048	J		<0.012	U		<0.045	U		<0.011	U		<0.014	U		0.0017	J	
		VMP-50-10-110520	11/5/2020	0.016	J		<0 0039	U		0.0038	J		<0.012	U		<0.047	U		0.0044	J		0.0024	J		<0.015	J	U
		VMP-50-10-012621	1/26/2021	0.013	J		<0.004	U		0.003	J		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-50-10-050721	5/7/2021	0.016	J		<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
	20 ft	VMP-50-20-072720	7/27/2020	0.13			<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		0.0047	J		0.0078	J		0.03		
		VMP-50-20-110520	11/5/2020	0.012	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	J	U
		VMP-50-20-110520-DUP	11/5/2020	0.013	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		0.0049	J		<0.016	U		<0.016	U	
		VMP-50-20-022521	2/25/2021	0.02	J		<0 0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-50-20-022521-DUP	2/25/2021	0.01	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-50-20-050721	5/7/2021	0.014	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
		VMP-50-20-050721-DUP	5/7/2021	0.011	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	30 ft	VMP-50-30-072720	7/27/2020	0.039	J		<0.04	U		<0.084	U		<0.13	U		<0.48	U		5.3			<0.15	U		<0.16	U	
		VMP-50-30-110520	11/5/2020	0.022	J		<0 0079	U		<0.016	U		<0.026	U		<0.096	U		1.1			<0.029	U		<0.031	J	U
		VMP-50-30-012621	1/26/2021	0.034	J		<0.08	U		<0.17	U		<0.26	U		<0.97	U		7			<0.3	U		<0.31	U	
		VMP-50-30-050721	5/7/2021	<0.48	U		<0.064	U		<0.14	U		<0.21	U		<0.78	U		4.1			<0.24	U		<0.25	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	0.024	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		0.0028	J		0.0073	J		0.0022	J	
		VMP-51-5-103020	10/30/2020	<0.03	J	U	<0 0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-51-5-012221	1/22/2021	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-51-5-050421	5/4/2021	0.009	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	10 ft	VMP-51-10-072320	7/23/2020	0.028			0 00098	J		0.0014	J		<0.012	U		<0.045	U		<0.011	U		0.005	J		0.0022	J	
		VMP-51-10-103020	10/30/2020	<0.03	J	U	<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-51-10-012221	1/22/2021	0.011	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0018	J		<0.016	U	
		VMP-51-10-050421	5/4/2021	0.013	J		<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.014	U	
	20 ft	VMP-51-20-072320	7/23/2020	0.0074	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-51-20-103020	10/30/2020	<0.031	J	U	<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-51-20-012221	1/22/2021	<0.029	J	U	<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-51-20-050421	5/4/2021	0.05			0 00048	J		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
	30 ft	VMP-51-30-072320	7/23/2020	0.013	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0022	J		<0.015	U	
		VMP-51-30-103020	10/30/2020	0.018	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-51-30-012221	1/22/2021	0.013	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-51-30-050421	5/4/2021	0.015	J		0 00075	J		<0.0075	U		<0.012	U		0.0024	J		<0.011	U		<0.013	U		<0.014	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	0.04			<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		0.0026	J		0.0044	J		<0.014	U	
		VMP-52-5-072320-DUP	7/23/2020	0.01	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-52-5-102920	10/29/2020	<0.031	J	U	<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-52-5-012221	1/22/2021	0.0082	J		<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-52-5-012221-DUP	1/22/2021	0.0081	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-52-5-050421	5/4/2021	0.0072	J		0.0011	J		<0.0066	U		<0.01	U		<0.038	U		0.0019	J		<0.012	U		<0.012	U	
	10 ft	VMP-52-10-102920	10/29/2020	0.011	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-52-10-012221	1/22/2021	0.0095	J		<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-52-10-050421	5/4/2021	0.01	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.0015	J	
	20 ft	VMP-52-20-072320	7/23/2020	0.011	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.0022	J		<0.017	U	
		VMP-52-20-102920	10/29/2020	0.01	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-52-20-012221	1/22/2021	<0.028	U		<0 0038	U		<0.008	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-52-20-050421	5/4/2021	0.011	J		<0 0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		0.004	J	
	30 ft	VMP-52-30-072320	7/23/2020	0.014	J		<0 0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		0.0024	J		<0.017	U	
		VMP-52-30-102920	10/29/2020	<0.029	J	U	<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-52-30-012221	1/22/2021	<0.027	J	U	<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-52-30-050421	5/4/2021	0.012	J		0 00052	J		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	0.016	J		0 00067	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		0.0028	J		0.0049	J	
		VMP-53-5-102820	10/28/2020	0.019	J		<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-53-5-012121	1/21/2021	0.0098	J		0.0011	J		<0.0081	U		<0.012	U		<0.047	U		0.021			0.006	J		<0.015	U	
		VMP-53-5-050421	5/4/2021	0.0077	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	10 ft	VMP-53-10-072220	7/22/2020	0.017	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.017	J	U
		VMP-53-10-102820	10/28/2020	<0.028	J	U	<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		0.002	J	
		VMP-53-10-012121	1/21/2021	0.0048	J		<0 0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-53-10-050421	5/4/2021	0.009	J		<0.003	U		<0.0064	U		<0 0098	U		<0.037	U		<0.009	U		<0.011	U		0.0012	J	
		VMP-53-10-050421-DUP	5/4/2021	0.0081	J		<0 0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
		VMP-53-10-060321-R	6/3/2021	0.013	J		0.0029	J		<0.0075	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
	20 ft	VMP-53-20-072220	7/22/2020	0.015	J		0 00083	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.002	J		<0.016	J	U
		VMP-53-20-102820	10/28/2020	0.011	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-53-20-012121	1/21/2021	0.0055	J		0.0018	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-53-20-050421	5/4/2021	0.011	J		<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.014	U	
	30 ft	VMP-53-30-072220	7/22/2020	0.011	J		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-53-30-102820	10/28/2020	0.015	J		<0 0038	U		<0.008	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-53-30-012121	1/21/2021	0.006	J		<0 0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-53-30-050421	5/4/2021	0.015	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	0.012	J		0 00036	J		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		0.0028	J		<0.016	U	
		VMP-54-5-102820	10/28/2020	0.015	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.0021	J		<0.015	U	
		VMP-54-5-012821	1/28/2021	0.0067	J		0 00072	J		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		<0.013	U		<0.014	U	
		VMP-54-5-050421	5/4/2021	0.01	J		<0 0031	U		<0.0065	U		<0.01	U		<0.038	U		<0.0092	U		<0.011	U		<0.012	U	
	10 ft	VMP-54-10-072220	7/22/2020	0.014	J		<0 0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-54-10-102820	10/28/2020	0.019	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-54-10-012821	1/28/2021	<0.027	U		<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.028	U		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-54-10-050421	5/4/2021	0.013	J		<0 0031	U		<0.0065	U		<0.01	U		<0.038	U		<0.0092	U		<0.011	U		0.0018	J	
	20 ft	VMP-54-20-072220	7/22/2020	0.016	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-54-20-102820	10/28/2020	<0.03	J	U	<0 0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-54-20-012821	1/28/2021	0.017	J		<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-54-20-050421	5/4/2021	0.0074	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	
	30 ft	VMP-54-30-072220	7/22/2020	0.023	J		0.0015	J		<0.0087	U		<0.013	U		<0.051	U		0.0056	J		0.0024	J		0.0018	J	
		VMP-54-30-102820	10/28/2020	0.0084	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-54-30-012821	1/28/2021	0.0059	J		<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		0.0033	J		<0.015	U	
		VMP-54-30-050421	5/4/2021	0.01	J		0 00093	J		<0.0064	U		<0 0098	U		<0.037	U		0.0071	J		<0.011	U		0.0011	J	
		VMP-54-30-050421-DUP	5/4/2021	0.02	J		<0.003	U		<0.0063	U		<0 0097	U		<0.036	U		0.0019	J		<0.011	U		<0.012	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	0.048			0.0016	J		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0066	J		0.0029	J	
		VMP-56-10-072320-DUP	7/23/2020	0.029	J		0.0021	J		<0.0093	U		<0.014	U		<0.054	U		<0.013	U		0.0049	J		0.0048	J	
		VMP-56-10-110320	11/3/2020	<0.029	J	U	<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-56-10-012121	1/21/2021	0.0059	J		<0 0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-56-10-050521	5/5/2021	0.013	J		<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
	25 ft	VMP-56-25-072320	7/23/2020	0.012	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-56-25-110320	11/3/2020	0.023	J		0 00094	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.0035	J	
		VMP-56-25-110320-DUP	11/3/2020	0.029	J		0.0023	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		0.002	J	
		VMP-56-25-012121	1/21/2021	0.014	J		<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0014	J		<0.016	U	
		VMP-56-25-012121-DUP	1/21/2021	0.011	J		0 00084	J		<0.0084	U		<0.013	U		<0.048	U		0.0099	J		<0.015	U		<0.016	U	
		VMP-56-25-050521	5/5/2021	0.017	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-56-25-050521-DUP	5/5/2021	0.013	J		<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	0.029			<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-62-5-102920	10/29/2020	0.011	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		0.0095	J		0.0014	J		<0.015	U	
		VMP-62-5-012221	1/22/2021	<0.028	J	U	<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-62-5-050621	5/6/2021	0.012	J		<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.002	J		0.0018	J	
	10 ft	VMP-62-10-072720	7/27/2020	0.012	J		<0 0036	U		0.0021	J		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-62-10-102920	10/29/2020	0.016	J		<0 0039	U		0.0031	J		<0.012	U		<0.047	U		<0.012	U		0.0031	J		<0.015	J	U
		VMP-62-10-012221	1/22/2021	<0.029	J	U	<0.004	U		0.0024	J		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-62-10-050621	5/6/2021	0.014	J		<0 0032	U		0.01			<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	
	20 ft	VMP-62-20-072720	7/27/2020	0.022	J		<0 0037	U		0.0021	J		<0.012	U		<0.045	U		<0.011	U		0.0048	J		<0.014	U	
		VMP-62-20-102920	10/29/2020	0.023	J		<0.004	U		0.0013	J		<0.013	U		<0.049	U		<0.012	U		0.0036	J		<0.016	U	
		VMP-62-20-050621	5/6/2021	0.014	J		<0 0032	U		0.014			<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	30 ft	VMP-62-30-072720	7/27/2020	0.018	J		<0 0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-62-30-102920	10/29/2020	0.016	J		<0 0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0014	J		<0.015	U	
		VMP-62-30-012221	1/22/2021	0.011	J		<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
		VMP-62-30-050621	5/6/2021	0.025			<0 0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		0.003	J		<0.012	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			0.37			450000			11			6.9						6400			780		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	0.018	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		0.0026	J		0.0092	J	
		VMP-63-5-110320	11/3/2020	<0.029	J	U	0 00089	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-63-5-012921	1/29/2021	0.0069	J		<0 0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-63-5-050521	5/5/2021	0.02	J		0 00064	J		<0.0075	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		0.013	J	
	10 ft	VMP-63-10-072820	7/28/2020	0.015	J		<0 0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.002	J		<0.017	U	
		VMP-63-10-110320	11/3/2020	<0.028	J	U	<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-63-10-012921	1/29/2021	<0.12	U		0.18			<0.035	U		<0.054	U		<0.2	U		0.27			<0.062	U		<0.065	U	
		VMP-63-10-050521	5/5/2021	0.016	J		0 00058	J		<0.0071	U		<0.011	U		<0.041	U		<0.01	U		0.0021	J		0.0018	J	
	20 ft	VMP-63-20-072820	7/28/2020	0.04			<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		0.0031	J		<0.015	U	
		VMP-63-20-110320	11/3/2020	0.021	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0028	J		<0.016	U	
		VMP-63-20-012921	1/29/2021	0.0087	J		0.045			<0.0088	U		<0.014	U		<0.051	U		0.015			<0.015	U		<0.016	U	
		VMP-63-20-050521	5/5/2021	0.015	J		0 00065	J		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		0.0013	J	
	30 ft	VMP-63-30-072820	7/28/2020	0.01	J		<0 0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-63-30-072820-DUP	7/28/2020	0.014	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		0.0012	J		<0.014	U	
		VMP-63-30-110320	11/3/2020	0.012	J		0 00062	J		<0.0081	U		<0.012	U		<0.047	U		0.0047	J		<0.014	U		<0.015	J	U
		VMP-63-30-110320-DUP	11/3/2020	0.013	J		0.0005	J		<0.0081	U		<0.012	U		<0.047	U		0.0066	J		0.0013	J		<0.015	J	U
		VMP-63-30-012921	1/29/2021	0.0076	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-63-30-050521	5/5/2021	0.013	J		<0 0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		<0.013	U		<0.014	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	0.068			0 00091	J		<0.0082	U		<0.013	U		<0.047	U		0.0074	J		0.0062	J		0.0019	J	
		VMP-64-5-103020	10/30/2020	0.04			<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		0.0026	J		<0.014	U	
		VMP-64-5-012221	1/22/2021	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-64-5-050621	5/6/2021	0.034			<0 0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.01	U		0.0052	J		<0.014	U	
	10 ft	VMP-64-10-072420	7/24/2020	0.019	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-64-10-103020	10/30/2020	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		0.0024	J		<0.015	U		<0.016	U	
		VMP-64-10-012221	1/22/2021	0.0087	J		<0 0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-64-10-050621	5/6/2021	0.016	J		<0 0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		0.0048	J		<0.013	U	
	20 ft	VMP-64-20-072420	7/24/2020	0.0097	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-64-20-072420-DUP	7/24/2020	0.012	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-64-20-103020	10/30/2020	<0.027	J	U	<0 0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		<0.014	U		<0.014	U	
		VMP-64-20-012221	1/22/2021	0.022	J		<0 0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-64-20-050621	5/6/2021	0.01	J		<0 0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		0.002	J		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		0.0018	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-1-5-110220	11/2/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0014	J		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-1-5-012921	1/29/2021	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U		<0.0039	U	
		VMP-1-5-050521	5/5/2021	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		0.0061	J		<0.0056	U		<0.0037	U	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.0015	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-1-8.5-110220	11/2/2020	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		0.0012	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-1-8.5-012921	1/29/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-1-8.5-050521	5/5/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U		<0.0038	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0016	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-1-23.5-110220	11/2/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.0018	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-1-23.5-012921	1/29/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.0013	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-1-38.5-110220	11/2/2020	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		0.0018	J		<0.024	U		<0.0059	U		<0.0039	U	
		VMP-1-38.5-012921	1/29/2021	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-1-38.5-050521	5/5/2021	<0.007	U		<0 0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U		<0.0038	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-2-5-110420	11/4/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-2-5-012521	1/25/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-2-5-050721	5/7/2021	0.0016	J		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-2-8.5-110420	11/4/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-2-8.5-012521	1/25/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-2-8.5-050721	5/7/2021	<0.0065	U		<0 0047	U		<0.0088	U		<0.011	U		0.001	J		<0.021	U		<0.0053	U		<0.0035	U	
	22 ft	VMP-2-22-072420	7/24/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.0078			<0.026	U		<0.0066	U		<0.0044	U	
		VMP-2-22-110420	11/4/2020	<0.077	U		<0.056	U		<0.1	U		<0.13	U		<0.06	U		<0.1	U		<0.063	U		0.46		
		VMP-2-22-012521	1/25/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0025	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-2-22-050721	5/7/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.0047	J		<0.022	U		<0.0054	U		<0.0036	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	<0.0084	U		0 00063	J		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U		<0.0046	U	
		VMP-3-5-110420	11/4/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-3-5-012521	1/25/2021	<0.0085	U		<0 0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0046	U	
		VMP-3-5-051021	5/10/2021	<0.0064	U		<0 0047	U		<0.0086	U		<0.011	U		<0.005	U		<0.021	U		<0.0052	U		<0.0035	U	
	10 ft	VMP-3-10-072920	7/29/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.003	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-3-10-110420	11/4/2020	<0.0085	U		<0 0062	U		<0.012	U		<0.014	U		0.0059	J		<0.028	U		<0.007	U		<0.0046	U	
		VMP-3-10-051021	5/10/2021	0.00061	J		<0 0046	U		<0.0084	U		<0.01	U		0.0057			<0.02	U		<0.0051	U		<0.0034	U	
	22 ft	VMP-3-22-072920	7/29/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		0.0039	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-3-22-110420	11/4/2020	<0.0085	U		<0 0062	U		<0.012	U		<0.014	U		0.0051	J		<0.028	U		<0.007	U		<0.0046	U	
		VMP-3-22-012521	1/25/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0019	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-3-22-051021	5/10/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.0012	J		<0.02	U		<0.0051	U		<0.0034	U	
		VMP-3-22-051021-DUP	5/10/2021	<0.0063	U		<0 0046	U		<0.0085	U		<0.01	U		0.0012	J		<0.02	U		<0.0052	U		0.0034	J	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	<0.065	U		<0.047	U		<0.088	U		<0.11	U		<0.05	U		<0.21	U		<0.053	U		<0.035	U	
		VMP-3-31.5-110420	11/4/2020	<7.9	U		<5.8	U		<11	U		<13	U		<6.2	U		<10	U		2.4	J		17		
		VMP-3-31.5-012521	1/25/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-3-31.5-051021	5/10/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-4-5-103020	10/30/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-4-5-012821	1/28/2021	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0039	U	
		VMP-4-5-050521	5/5/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
	12 ft	VMP-4-12-073020	7/30/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0011	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-4-12-103020	10/30/2020	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		0.0014	J		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-4-12-012821	1/28/2021	<0.007	U		<0 0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U		<0.0038	U	
		VMP-4-12-050521	5/5/2021	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		0 00097	J	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	<0.008	U		<0 0059	U		<0.011	U		<0.013	U		0.00073	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-4-23.5-103020	10/30/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-4-23.5-012821	1/28/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-4-23.5-050521	5/5/2021	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0038	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-5-5-103020	10/30/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-5-5-012221	1/22/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-5-5-050621	5/6/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-5-12.5-103020	10/30/2020	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		0.003	J		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-5-12.5-012221	1/22/2021	<0.0091	U		<0 0066	U		<0.012	U		<0.015	U		0.00069	J		<0.03	U		<0.0075	U		<0.005	U	
		VMP-5-12.5-050621	5/6/2021	<0.0065	U		<0 0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
		VMP-5-12.5-050621-DUP	5/6/2021	<0.0067	U		<0 0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0037	U	
	31 ft	VMP-5-31-072320	7/23/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.0018	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.0019	J		<0.026	U		<0.0065	U		<0.0044	U	
		VMP-5-31-103020	10/30/2020	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		0.0021	J		<0.028	U		<0.0071	U		<0.0047	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		0.0017	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-5-31-012221	1/22/2021	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.0028	J		<0.025	U		0.0013	J		<0.0042	U	
		VMP-5-31-050621	5/6/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		0.002	J		<0.021	U		<0.0052	U		0.0025	J	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	0.0017	J		<0.006	U		<0.011	U		<0.014	U		0.0077			<0.027	U		<0.0067	U		<0.0045	U	
		VMP-6-5-102920	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0049	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-6-5-012921	1/29/2021	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0063	U		<0.0042	U	
		VMP-6-5-050621	5/6/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U		0 00062	J	
	10 ft	VMP-6-10-072220	7/22/2020	0.002	J		<0.006	U		<0.011	U		<0.014	U		0.087			<0.027	U		<0.0067	U		<0.0045	U	
		VMP-6-10-102920	10/29/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0087			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-6-10-050621	5/6/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.0025	J		<0.022	U		<0.0054	U		<0.0036	U	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		0.0059	J		<0.028	U		<0.0071	U		<0.0047	U	
		VMP-6-31.5-102920	10/29/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		0.004	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-6-31.5-012921	1/29/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0038	J		<0.026	U	UJ	<0.0065	U		<0.0043	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0087	U		<0 0064	U		<0.012	U		<0.014	U		0.00078	J		<0.028	U	UJ	<0.0071	U		<0.0048	U	
		VMP-6-31.5-050621	5/6/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.0029	J		<0.022	U		<0.0054	U		<0.0036	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0024	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-7-5-110420	11/4/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.013	U		0.0013	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-7-5-012621	1/26/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-7-5-050521	5/5/2021	<0.007	U		<0 0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U		<0.0038	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.0024	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-7-13.5-110420	11/4/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0029	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-7-13.5-012621	1/26/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.00091	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-7-13.5-050521	5/5/2021	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		0.0019	J		<0.022	U		<0.0056	U		<0.0037	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.021			<0.027	U		<0.0067	U		<0.0044	U	
		VMP-7-29.5-110420	11/4/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0049	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-7-29.5-012621	1/26/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0035	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-7-29.5-050521	5/5/2021	<0.0064	U		<0 0047	U		<0.0086	U		<0.011	U		0.0018	J		<0.021	U		<0.0052	U		<0.0035	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		0.0034	J		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-8-5-102820	10/28/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-8-5-012121	1/21/2021	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		0.00037	J		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-8-5-050421	5/4/2021	<0.0058	U		<0 0042	U		<0.0078	U		<0 0096	U		0.00048	J		<0.019	U		<0.0047	U		<0.0031	U	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	<0.008	U		<0 0059	U		<0.011	U		0.0031	J		0.0011	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0044	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-8-9.5-102820	10/28/2020	<0.008	U		0.0049	J		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-8-9.5-012121	1/21/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		0 00084	J	
		VMP-8-9.5-050421	5/4/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.00056	J		<0.02	U		<0.0051	U		<0.0034	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-8-23.5-102820	10/28/2020	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-8-23.5-012121	1/21/2021	<0.0084	U		<0 0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-8-23.5-050421	5/4/2021	<0.0059	U		<0 0043	U		<0.008	U		<0 0099	U		<0.0046	U		<0.019	U		<0.0048	U		<0.0032	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.015			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-8-35.5-102820	10/28/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0044	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-8-35.5-012121	1/21/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-8-35.5-050421	5/4/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		0.0012	J		<0.0052	U		<0.0035	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0011	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.00079	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-9-5-102820	10/28/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-9-5-012121	1/21/2021	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		0.00051	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-9-5-050421	5/4/2021	0.00074	J		<0 0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0076			<0.027	U		<0.0067	U		<0.0045	U	
		VMP-9-11.5-102820	10/28/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0012	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-9-11.5-012121	1/21/2021	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.002	J		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-9-11.5-050421	5/4/2021	<0.0067	U		<0 0049	U		<0.0091	U		<0.011	U		<0.0052	U		0.0014	J		<0.0055	U		<0.0037	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.003	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-9-25.5-102820	10/28/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0028	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0024	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-9-25.5-012121	1/21/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0079			<0.026	U		<0.0065	U		<0.0043	U	
		VMP-9-25.5-050421	5/4/2021	<0.0065	U		<0 0047	U		<0.0088	U		<0.011	U		0.0048	J		<0.021	U		<0.0053	U		<0.0035	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.014			<0.027	U		<0.0068	U		<0.0045	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		0.014			<0.027	U		<0.0067	U		<0.0044	U	
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0038	U	
		VMP-18-8.5-012621	1/26/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0035	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-19-5-110420	11/4/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		0.0012	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-19-5-012621	1/26/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-19-5-051121	5/11/2021	<0.0061	U		<0 0045	U		<0.0083	U		<0.01	U		<0.0048	U		<0.02	U		<0.005	U		<0.0034	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.0008	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-20-5-112420	11/24/2020	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U		<0.0037	U	
		VMP-20-5-012521	1/25/2021	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-20-5-050721	5/7/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.00078	J		<0.02	U		<0.0051	U		<0.0034	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-20-10-110220	11/2/2020	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-20-10-012521	1/25/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-20-10-050721	5/7/2021	<0.006	U		<0 0044	U		<0.0081	U		<0.01	U		0.00063	J		<0.02	U		<0.0049	U		<0.0033	U	
	25 ft	VMP-20-25-072320	7/23/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		0.0038	J	
		VMP-20-25-110220	11/2/2020	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0039	U	
		VMP-20-25-012521	1/25/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-20-25-050721	5/7/2021	<0.0061	U		<0 0045	U		<0.0083	U		<0.01	U		<0.0047	U		<0.02	U		<0.005	U		<0.0033	U	
		VMP-20-25-050721-DUP	5/7/2021	<0.006	U		<0 0044	U		<0.0081	U		<0.01	U		<0.0046	U		<0.02	U		<0.0049	U		<0.0033	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-21-5-102920	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.00071	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-21-5-012521	1/25/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-21-5-050321	5/3/2021	<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U		<0.0038	U	
	10 ft	VMP-21-10-072420	7/24/2020	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-21-10-102920	10/29/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.00074	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-21-10-012521	1/25/2021	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-21-10-050321	5/3/2021	<0.0068	U		<0 0049	U		<0.0092	U		<0.011	U		<0.0052	U		<0.022	U		<0.0056	U		<0.0037	U	
		VMP-21-10-060321-R	6/3/2021	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		0.0024	J	
	25 ft	VMP-21-25-072420	7/24/2020	<0.0084	U		<0 0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U		<0.0046	U	
		VMP-21-25-102920	10/29/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.0096			<0.027	U		<0.0067	U		<0.0044	U	
		VMP-21-25-012521	1/25/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-21-25-050321	5/3/2021	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0039	U	
		VMP-21-25-050321-DUP	5/3/2021	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U		<0.0037	U	
	33 ft	VMP-21-33-072420	7/24/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-21-33-102920	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.00074	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-21-33-012521	1/25/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-21-33-050321	5/3/2021	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U		<0.004	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.01			<0.027	U		<0.0067	U		<0.0045	U	
		VMP-22-5-110520	11/5/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0005	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-22-5-012621	1/26/2021	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0047	U	
		VMP-22-5-050321	5/3/2021	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
	10 ft	VMP-22-10-072320	7/23/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.1			<0.026	U		<0.0064	U		<0.0043	U	
		VMP-22-10-110520	11/5/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0014	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-22-10-012621	1/26/2021	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-22-10-050321	5/3/2021	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		0.0013	J		<0.024	U		<0.0059	U		<0.0039	U	
	18 ft	VMP-22-18-072320	7/23/2020	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		0.035			<0.028	U		<0.0071	U		<0.0047	U	
		VMP-22-18-110520	11/5/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0047	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-22-18-012621	1/26/2021	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		0.0048	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-22-18-050321	5/3/2021	<0.007	U		<0 0051	U		<0.0095	U		<0.012	U		0.028			<0.023	U		<0.0058	U		<0.0038	U	
	38 ft	VMP-22-38-110520	11/5/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0013	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-22-38-012621	1/26/2021	<0.0088	U		<0 0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U		<0.0048	U	
		VMP-22-38-050321	5/3/2021	<0.07	U		<0.051	U		<0.094	U		<0.12	U		<0.054	U		<0.23	U		<0.057	U		<0.038	U	
		VMP-22-38-060321-R	6/3/2021	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.0084			<0.024	U		<0.0061	U		<0.0041	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.0029	J		<0.026	U		<0.0066	U		0.027		
		VMP-23-5-102920	10/29/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0036	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-23-5-012121	1/21/2021	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		0.00045	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-23-5-050721	5/7/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.0029	J		<0.022	U		<0.0054	U		<0.0036	U	
	10 ft	VMP-23-10-072320	7/23/2020	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		0.016			<0.028	U		<0.007	U		0 00036	J	
		VMP-23-10-102920	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0062			<0.026	U		<0.0064	U		<0.0042	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0058	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-23-10-012121	1/21/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.0029	J		<0.027	U		<0.0067	U		<0.0044	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.0084	U		<0 0062	U		<0.011	U		<0.014	U		0.017			<0.028	U		<0.0069	U		0.0014	J	
		VMP-23-25-102920	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.008			<0.026	U		<0.0064	U		<0.0042	U	
		VMP-23-25-012121	1/21/2021	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.0023	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-23-25-050721	5/7/2021	<0.0061	U		<0 0045	U		<0.0083	U		<0.01	U		0.007			<0.02	U		<0.005	U		<0.0033	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-24-5-102920	10/29/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.00068	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-24-5-012121	1/21/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-24-5-051121	5/11/2021	<0.006	U		<0 0044	U		<0.0082	U		<0.01	U		<0.0047	U		<0.02	U		<0.005	U		<0.0033	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.00034	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-24-10-102920	10/29/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-24-10-022521	2/25/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-24-10-051121	5/11/2021	<0.0056	U		<0 0041	U		<0.0076	U		<0 0094	U		<0.0043	U		<0.018	U		<0.0046	U		<0.0031	U	
		VMP-24-10-051121-DUP	5/11/2021	<0.0057	U		<0 0042	U		<0.0077	U		<0 0096	U		<0.0044	U		<0.019	U		<0.0047	U		<0.0031	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.0018	J		<0.024	U		<0.0061	U		<0.004	U	
		VMP-24-22-102920	10/29/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-24-22-012121	1/21/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-24-22-051121	5/11/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		0.0027	J		<0.021	U		<0.0052	U		<0.0035	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-24-34-102920	10/29/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.00043	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-24-34-012121	1/21/2021	<0.0085	U		<0 0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0046	U	
		VMP-24-34-051121	5/11/2021	<0.0063	U		<0 0046	U		<0.0085	U		<0.01	U		<0.0048	U		<0.02	U		<0.0052	U		<0.0034	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.00074	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-32-5-110420	11/4/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	ND,UJ	UJ	<0.0067	U		<0.0045	U	
		VMP-32-5-012621	1/26/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.00041	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-32-5-051221	5/12/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
	10 ft	VMP-32-10-072920	7/29/2020	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		0.0013	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-32-10-110420	11/4/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0014	J		<0.025	U		<0.0062	U		0.0004	J	
		VMP-32-10-012621	1/26/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-32-10-051221	5/12/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
		VMP-32-10-051221-DUP	5/12/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
	20 ft	VMP-32-20-072920	7/29/2020	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-32-20-110420	11/4/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-32-20-012621	1/26/2021	<0.0085	U		<0 0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0046	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
	30 ft	VMP-32-30-072920	7/29/2020	<0.0084	U		<0 0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U		<0.0046	U	
		VMP-32-30-110420	11/4/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.0089	U		<0 0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U		<0.0048	U	
		VMP-32-30-012621	1/26/2021	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0035	J		<0.026	U		0.00067	J		<0.0043	U	
		VMP-42-10-110520	11/5/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0023	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-42-10-012921	1/29/2021	<0.008	U		<0 0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U	UJ	<0.0066	U		0.048		
		VMP-42-10-050521	5/5/2021	<0.0064	U		<0 0047	U		<0.0086	U		<0.011	U		<0.005	U		<0.021	U		<0.0052	U		<0.0035	U	
	20 ft	VMP-42-20-072820	7/28/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0033	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-42-20-110520	11/5/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.014			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-42-20-012921	1/29/2021	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0037	J		<0.027	U	UJ	<0.0068	U		<0.0045	U	
		VMP-42-20-050521	5/5/2021	<0.0072	U		<0 0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U		<0.0039	U	
	30 ft	VMP-42-30-072820	7/28/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0014	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-42-30-110520	11/5/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0028	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0025	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-42-30-012921	1/29/2021	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.0067			<0.026	U	UJ	<0.0066	U		<0.0044	U	
		VMP-42-30-050521	5/5/2021	<0.0072	U		<0 0052	U		<0.0097	U		<0.012	U		0.00095	J		<0.024	U		<0.0059	U		<0.0039	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-43-10-110320	11/3/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-43-10-012621	1/26/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-43-10-050521	5/5/2021	<0.007	U		<0 0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U		<0.0038	U	
	20 ft	VMP-43-20-072820	7/28/2020	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		0.0013	J		<0.028	U		<0.0071	U		<0.0047	U	
		VMP-43-20-110320	11/3/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0018	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-43-20-012621	1/26/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-43-20-050521	5/5/2021	<0.0064	U		<0 0047	U		<0.0087	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
	30 ft	VMP-43-30-072820	7/28/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-43-30-110320	11/3/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-43-30-022521	2/25/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-43-30-050521	5/5/2021	<0.007	U		<0 0051	U		<0.0094	U		<0.012	U		0.0064			<0.023	U		<0.0057	U		<0.0038	U	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
	20 ft	VMP-44-20-072820	7/28/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0056	J		<0.026	U		<0.0065	U		<0.0043	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	<0.0085	U		<0 0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0046	U	
		VMP-45-10-110520	11/5/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-45-10-012621	1/26/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-45-10-060321	6/3/2021	<0.007	U		<0 0051	U		<0.0094	U		<0.012	U		0.0025	J		<0.023	U		<0.0057	U		<0.0038	U	
	20 ft	VMP-45-20-072820	7/28/2020	<0.0086	U		<0 0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U		<0.0047	U	
		VMP-45-20-110520	11/5/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.00042	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-45-20-012621	1/26/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-45-20-050521	5/5/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		0.0018	J		<0.021	U		0.0006	J		<0.0035	U	
	30 ft	VMP-45-30-072820	7/28/2020	<0.0092	U		<0 0068	U		<0.012	U		<0.016	U		0.0065	J		<0.03	U		<0.0076	U		<0.005	U	
		VMP-45-30-110520	11/5/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-45-30-012621	1/26/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-45-30-050521	5/5/2021	<0.0062	U		<0 0045	U		<0.0084	U		<0.01	U		0.0012	J		<0.02	U		<0.0051	U		<0.0034	U	
		VMP-45-30-050521-DUP	5/5/2021	<0.0063	U		<0 0046	U		<0.0086	U		<0.011	U		0.0013	J		<0.021	U		<0.0052	U		<0.0034	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.03			<0.026	U		<0.0064	U		<0.0042	U	
		VMP-47-5-110220	11/2/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.026			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-47-5-012221	1/22/2021	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-47-5-050621	5/6/2021	<0.0065	U		<0 0047	U		<0.0088	U		<0.011	U		0.0026	J		<0.021	U		<0.0053	U		<0.0035	U	
	10 ft	VMP-47-10-072720	7/27/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.064			<0.024	U		<0.0061	U		<0.0041	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.069			<0.025	U		<0.0062	U		<0.0041	U	
		VMP-47-10-110220	11/2/2020	<0.0073	U		<0 0053	U		<0.0099	U		<0.012	U		0.0082			<0.024	U		<0.006	U		<0.004	U	
		VMP-47-10-012221	1/22/2021	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		0.023			<0.025	U		<0.0064	U		<0.0042	U	
		VMP-47-10-050621	5/6/2021	<0.0064	U		<0 0046	U		0.0032	J		<0.011	U		0.084			<0.021	U		<0.0052	U		<0.0035	U	
	20 ft	VMP-47-20-072720	7/27/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.036			<0.024	U		<0.0061	U		<0.004	U	
		VMP-47-20-110220	11/2/2020	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		0.017			<0.027	U		<0.0068	U		0.0035	J	
		VMP-47-20-012221	1/22/2021	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.0073			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0077			<0.025	U		<0.0062	U		<0.0041	U	
		VMP-47-20-050621	5/6/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.015			<0.02	U		<0.0051	U		<0.0034	U	
	30 ft	VMP-47-30-072720	7/27/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.014			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-47-30-110220	11/2/2020	<0.0073	U		<0 0053	U		<0.0099	U		<0.012	U		0.0071			<0.024	U		<0.006	U		<0.004	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		0.0066			<0.023	U		<0.0058	U		<0.0038	U	
		VMP-47-30-012221	1/22/2021	<0.008	U		<0 0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-47-30-050621	5/6/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
		VMP-47-30-050621-DUP	5/6/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	<0.0071	U		<0 0052	U		<0.0097	U		<0.012	U		0.0081			<0.023	U		<0.0059	U		0 00038	J	
		VMP-48-5-110220	11/2/2020	<0.0073	U		<0 0053	U		<0.0098	U		<0.012	U		0.0011	J		<0.024	U		<0.006	U		<0.004	U	
		VMP-48-5-012521	1/25/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-48-5-050721	5/7/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.00074	J		<0.022	U		<0.0054	U		<0.0036	U	
	10 ft	VMP-48-10-073020	7/30/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-48-10-110220	11/2/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-48-10-012521	1/25/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-48-10-050721	5/7/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U		<0.0038	U	
	20 ft	VMP-48-20-110220	11/2/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-48-20-012521	1/25/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		0.0015	J	
		VMP-48-20-012521-DUP	1/25/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
	30 ft	VMP-48-30-073020	7/30/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-48-30-110220	11/2/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-48-30-012521	1/25/2021	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-48-30-050721	5/7/2021	<0.0065	U		<0 0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0084	U		<0 0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-49-5-110420	11/4/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-49-5-012521	1/25/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-49-5-050321	5/3/2021	<0.0073	U		<0 0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
	10 ft	VMP-49-10-072420	7/24/2020	<0.0088	U		<0 0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U		<0.0048	U	
		VMP-49-10-110420	11/4/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0019	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-49-10-012521	1/25/2021	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		0.0033	J		<0.023	U		<0.0058	U		<0.0038	U	
		VMP-49-10-050321	5/3/2021	<0.007	U		<0 0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U		<0.0038	U	
	20 ft	VMP-49-20-072420	7/24/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-49-20-110420	11/4/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-49-20-012521	1/25/2021	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-49-20-050321	5/3/2021	<0.0073	U		<0 0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-49-20-060321-R	6/3/2021	<0.0067	U		<0 0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0037	U	
	30 ft	VMP-49-30-072420	7/24/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-49-30-110420	11/4/2020	<0.63	U		<0.46	U		<0.86	U		<1.1	U		<0.49	U		<0.83	U		<0.52	U		<0.34	U	
		VMP-49-30-012521	1/25/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		0 00098	J	
		VMP-49-30-050321	5/3/2021	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U		<0.0037	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-50-5-110520	11/5/2020	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		0.0026	J		<0.024	U		<0.0059	U		<0.0039	U	
		VMP-50-5-012621	1/26/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.00053	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-50-5-050721	5/7/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.0031	J		<0.022	U		<0.0054	U		<0.0036	U	
	10 ft	VMP-50-10-072720	7/27/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.013			<0.024	U		<0.006	U		<0.004	U	
		VMP-50-10-110520	11/5/2020	0.0017	J		<0 0056	U		<0.01	U		<0.013	U		0.021			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-50-10-012621	1/26/2021	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.077			<0.026	U		<0.0065	U		<0.0044	U	
		VMP-50-10-050721	5/7/2021	0.00076	J		<0 0049	U		<0.0091	U		<0.011	U		0.0055			<0.022	U		<0.0055	U		<0.0037	U	
	20 ft	VMP-50-20-072720	7/27/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.0039	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-50-20-110520	11/5/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0056	J		<0.026	U		<0.0064	U		0 00082	J	
		VMP-50-20-110520-DUP	11/5/2020	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		0.0058	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-50-20-022521	2/25/2021	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		0.027			<0.027	U		<0.0068	U		<0.0046	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.028			<0.026	U		<0.0065	U		<0.0043	U	
		VMP-50-20-050721	5/7/2021	0.0007	J		<0 0046	U		<0.0086	U		<0.011	U		0.0088			<0.021	U		<0.0052	U		<0.0035	U	
		VMP-50-20-050721-DUP	5/7/2021	0.00073	J		<0 0046	U		<0.0086	U		<0.011	U		0.0095			<0.021	U		<0.0052	U		<0.0035	U	
	30 ft	VMP-50-30-072720	7/27/2020	<0.079	U		<0.058	U		<0.11	U		<0.13	U		<0.061	U		<0.26	U		<0.065	U		0.88		
		VMP-50-30-110520	11/5/2020	<0.016	U		<0.011	U		<0.021	U		<0.026	U		<0.012	U		0.025	J		<0.013	U		0.016		
		VMP-50-30-012621	1/26/2021	<0.16	U		<0.12	U		<0.21	U		<0.26	U		<0.12	U		<0.52	U		<0.13	U		1.6		
		VMP-50-30-050721	5/7/2021	<0.13	U		<0.093	U		<0.17	U		<0.21	U		<0.098	U		<0.42	U		<0.1	U		1		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-51-5-103020	10/30/2020	<0.008	U		<0 0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-51-5-012221	1/22/2021	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0044	U	
		VMP-51-5-050421	5/4/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
	10 ft	VMP-51-10-072320	7/23/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.003	J		<0.024	U		<0.006	U		0 00038	J	
		VMP-51-10-103020	10/30/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.0011	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-51-10-012221	1/22/2021	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-51-10-050421	5/4/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U		<0.0038	U	
	20 ft	VMP-51-20-072320	7/23/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0022	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-51-20-103020	10/30/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0035	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-51-20-012221	1/22/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.00082	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-51-20-050421	5/4/2021	<0.0065	U		<0 0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
	30 ft	VMP-51-30-072320	7/23/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0014	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-51-30-103020	10/30/2020	<0.0085	U		<0 0062	U		<0.012	U		<0.014	U		0.0023	J		<0.028	U		<0.007	U		<0.0046	U	
		VMP-51-30-012221	1/22/2021	<0.0083	U		<0 0061	U		<0.011	U		<0.014	U		0.0012	J		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-51-30-050421	5/4/2021	<0.007	U		<0 0052	U		<0.0095	U		<0.012	U		0.00073	J		<0.023	U		<0.0058	U		<0.0038	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.00089	J		<0.024	U		<0.006	U		<0.004	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.00094	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-52-5-102920	10/29/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-52-5-012221	1/22/2021	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0039	U	
		VMP-52-5-050421	5/4/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		0.0011	J	
	10 ft	VMP-52-10-102920	10/29/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-52-10-012221	1/22/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-52-10-050421	5/4/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.0085	U		<0 0062	U		<0.012	U		<0.014	U		0.0021	J		<0.028	U		<0.007	U		<0.0046	U	
		VMP-52-20-102920	10/29/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		0.0024	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-52-20-012221	1/22/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0013	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-52-20-050421	5/4/2021	<0.0066	U		<0 0048	U		<0.0089	U		<0.011	U		0.0019	J		<0.022	U		<0.0054	U		<0.0036	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.0084	U		<0 0061	U		<0.011	U		<0.014	U		0.0023	J		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-52-30-102920	10/29/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.003	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-52-30-012221	1/22/2021	<0.0073	U		<0 0053	U		<0.0098	U		<0.012	U		0.0025	J		<0.024	U		<0.006	U		<0.004	U	
		VMP-52-30-050421	5/4/2021	<0.0062	U		0.05			<0.0084	U		<0.01	U		0.0038	J		0.0013	J		0.00062	J		<0.0034	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.013	U		0.00063	J		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-53-5-102820	10/28/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-53-5-012121	1/21/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		0 00063	J	
		VMP-53-5-050421	5/4/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		0.00085	J		<0.021	U		<0.0052	U		<0.0035	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.0084	U		<0 0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-53-10-102820	10/28/2020	<0.0073	U		<0 0053	U		<0.0099	U		<0.012	U		0.0013	J		<0.024	U		<0.006	U		<0.004	U	
		VMP-53-10-012121	1/21/2021	<0.0077	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U		<0.0042	U	
		VMP-53-10-050421	5/4/2021	<0.006	U		<0 0044	U		<0.0081	U		<0.01	U		<0.0046	U		<0.02	U		<0.0049	U		<0.0033	U	
		VMP-53-10-050421-DUP	5/4/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
		VMP-53-10-060321-R	6/3/2021	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0039	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.0014	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-53-20-102820	10/28/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.001	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-53-20-012121	1/21/2021	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		0.0025	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-53-20-050421	5/4/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U		<0.0038	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.00076	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-53-30-102820	10/28/2020	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.0092			<0.025	U		<0.0062	U		<0.0041	U	
		VMP-53-30-012121	1/21/2021	<0.0076	U		<0 0055	U		<0.01	U		<0.013	U		0.028			<0.025	U		<0.0062	U		<0.0041	U	
		VMP-53-30-050421	5/4/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.03			<0.02	U		<0.0051	U		<0.0034	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	<0.008	U		<0 0058	U		<0.011	U		<0.013	U		0.00036	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-54-5-102820	10/28/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.0028	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-54-5-012821	1/28/2021	<0.0069	U		<0 0051	U		<0.0094	U		<0.012	U		0.00087	J		<0.023	U		<0.0057	U		<0.0038	U	
		VMP-54-5-050421	5/4/2021	<0.0061	U		<0 0045	U		<0.0083	U		<0.01	U		0.001	J		<0.02	U		<0.005	U		<0.0033	U	
	10 ft	VMP-54-10-072220	7/22/2020	<0.0084	U		<0 0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-54-10-102820	10/28/2020	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		0.00056	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-54-10-012821	1/28/2021	<0.0072	U		<0 0053	U		<0.0098	U		<0.012	U		0.0015	J		<0.024	U		<0.006	U		<0.004	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		0.0014	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-54-10-050421	5/4/2021	<0.0061	U		<0 0045	U		<0.0083	U		<0.01	U		0.0011	J		<0.02	U		<0.005	U		<0.0033	U	
	20 ft	VMP-54-20-072220	7/22/2020	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-54-20-102820	10/28/2020	<0.008	U		<0 0059	U		<0.011	U		<0.014	U		0.00085	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-54-20-012821	1/28/2021	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-54-20-050421	5/4/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
	30 ft	VMP-54-30-072220	7/22/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0007	J		<0.027	U		<0.0068	U		0.0025	J	
		VMP-54-30-102820	10/28/2020	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		0.0062			<0.024	U		<0.0062	U		<0.0041	U	
		VMP-54-30-012821	1/28/2021	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.0016	J		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-54-30-050421	5/4/2021	<0.006	U		<0 0044	U		<0.0081	U		<0.01	U		0.003	J		<0.02	U		<0.0049	U		0 00043	J	
		VMP-54-30-050421-DUP	5/4/2021	<0.0059	U		<0 0043	U		<0.008	U		<0 0099	U		0.0033	J		<0.019	U		<0.0048	U		<0.0032	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		0.038		
		VMP-56-10-072320-DUP	7/23/2020	<0.0087	U		<0 0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U		0.039		
		VMP-56-10-110320	11/3/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-56-10-012121	1/21/2021	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-56-10-050521	5/5/2021	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0013	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-56-25-110320	11/3/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0081	U		<0 0059	U		<0.011	U		<0.014	U		0.001	J		<0.027	U		<0.0067	U		0.0067		
		VMP-56-25-012121	1/21/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		0 00053	J	
		VMP-56-25-050521	5/5/2021	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-56-25-050521-DUP	5/5/2021	<0.0067	U		<0 0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0037	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-62-5-102920	10/29/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-62-5-012221	1/22/2021	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-62-5-050621	5/6/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
	10 ft	VMP-62-10-072720	7/27/2020	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		0.019			<0.023	U		<0.0058	U		<0.0039	U	
		VMP-62-10-102920	10/29/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		0.015			<0.025	U		<0.0063	U		<0.0042	U	
		VMP-62-10-012221	1/22/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.01			<0.026	U		<0.0064	U		<0.0043	U	
		VMP-62-10-050621	5/6/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.034			<0.02	U		<0.0051	U		<0.0034	U	
	20 ft	VMP-62-20-072720	7/27/2020	<0.0073	U		<0 0053	U		<0.0099	U		<0.012	U		0.021			<0.024	U		<0.006	U		<0.004	U	
		VMP-62-20-102920	10/29/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.021			<0.026	U		<0.0065	U		<0.0043	U	
		VMP-62-20-050621	5/6/2021	<0.0064	U		<0 0046	U		<0.0086	U		<0.011	U		0.045			<0.021	U		<0.0052	U		<0.0035	U	
	30 ft	VMP-62-30-072720	7/27/2020	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.0087			<0.024	U		<0.0061	U		<0.004	U	
		VMP-62-30-102920	10/29/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		0.0083			<0.026	U		<0.0064	U		<0.0042	U	
		VMP-62-30-012221	1/22/2021	<0.0067	U		<0 0049	U		<0.0091	U		<0.011	U		0.0021	J		<0.022	U		<0.0055	U		<0.0037	U	
		VMP-62-30-050621	5/6/2021	<0.0062	U		<0 0046	U		<0.0084	U		<0.01	U		0.0038	J		<0.02	U		<0.0051	U		<0.0034	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				0.21			69			57000						0.11											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		0 00057	J	
		VMP-63-5-110320	11/3/2020	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-63-5-012921	1/29/2021	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U	UJ	<0.0063	U		<0.0042	U	
		VMP-63-5-050521	5/5/2021	<0.0071	U		<0 0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U		<0.0039	U	
	10 ft	VMP-63-10-072820	7/28/2020	<0.0084	U		<0 0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-63-10-110320	11/3/2020	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-63-10-012921	1/29/2021	<0.033	U		<0.024	U		<0.045	U		<0.055	U		<0.026	U		<0.11	U	UJ	<0.027	U		0.28		
		VMP-63-10-050521	5/5/2021	<0.0066	U		<0 0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0036	U	
	20 ft	VMP-63-20-072820	7/28/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-63-20-110320	11/3/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-63-20-012921	1/29/2021	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		0.069		
		VMP-63-20-050521	5/5/2021	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
	30 ft	VMP-63-30-072820	7/28/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-63-30-110320	11/3/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0076	U		<0 0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-63-30-012921	1/29/2021	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-63-30-050521	5/5/2021	<0.007	U		<0 0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U		<0.0038	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	<0.0077	U		<0 0056	U		<0.01	U		<0.013	U		0.0018	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-64-5-103020	10/30/2020	<0.0073	U		<0 0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-64-5-012221	1/22/2021	<0.0078	U		<0 0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-64-5-050621	5/6/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		0.0013	J		<0.023	U		<0.0057	U		<0.0038	U	
	10 ft	VMP-64-10-072420	7/24/2020	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		0.00098	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-64-10-103020	10/30/2020	<0.0079	U		<0 0058	U		<0.011	U		<0.013	U		0.0011	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-64-10-012221	1/22/2021	<0.0071	U		<0 0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U		<0.0039	U	
		VMP-64-10-050621	5/6/2021	<0.0067	U		<0 0049	U		<0.0091	U		<0.011	U		0.00056	J		<0.022	U		<0.0055	U		<0.0037	U	
	20 ft	VMP-64-20-072420	7/24/2020	<0.0078	U		0.0022	J		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0078	U		<0 0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-64-20-103020	10/30/2020	<0.0073	U		<0 0053	U		<0.0098	U		<0.012	U		0.00092	J		<0.024	U		<0.006	U		<0.004	U	
		VMP-64-20-012221	1/22/2021	<0.0075	U		<0 0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-64-20-050621	5/6/2021	<0.0074	U		<0 0054	U		<0.01	U		<0.012	U		0.00075	J		<0.024	U		<0.006	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0022	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-1-5-110220	11/2/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-1-5-012921	1/29/2021	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0026	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-1-5-050521	5/5/2021	<0.0083	U		<0 0065	U		<0.0065	U		<0 0065	U		0.0028	J		<0.0044	U		<0.0044	U		<0.0043	U	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0024	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-1-8.5-110220	11/2/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0022	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-1-8.5-012921	1/29/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0029	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-1-8.5-050521	5/5/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0024	J		<0.0044	U		<0.0044	U		<0.0043	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0023	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-1-23.5-110220	11/2/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.002	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-1-23.5-012921	1/29/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0028	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0026	J		<0.0053	U		<0.0053	U		<0.0052	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-1-38.5-110220	11/2/2020	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0027	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-1-38.5-012921	1/29/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0031	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-1-38.5-050521	5/5/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0023	J		<0.0045	U		<0.0045	U		<0.0044	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0028	J		<0.0046	U		<0.0046	U		<0.0046	U	
		VMP-2-5-110420	11/4/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0028	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-2-5-012521	1/25/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-2-5-050721	5/7/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0031	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-2-8.5-110420	11/4/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.003	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-2-8.5-012521	1/25/2021	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0033	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-2-8.5-050721	5/7/2021	<0.0079	U		<0 0062	U		<0.0062	U		<0 0062	U		0.0026	J		<0.0042	U		<0.0042	U		<0.0041	U	
	22 ft	VMP-2-22-072420	7/24/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0049	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-2-22-110420	11/4/2020	<0.094	U		<0.074	U		<0.074	U		<0.074	U		<0.06	U		<0.05	U		<0.05	U		<0.048	U	
		VMP-2-22-012521	1/25/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0028	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-2-22-050721	5/7/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0027	J		<0.0042	U		<0.0042	U		<0.0042	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0022	J		0.0023	J		<0.0054	U		<0.0053	U	
		VMP-3-5-110420	11/4/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0034	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-3-5-012521	1/25/2021	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0028	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-3-5-051021	5/10/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.003	J		<0.0041	U		<0.0041	U		<0.004	U	
	10 ft	VMP-3-10-072920	7/29/2020	<0.0097	U		<0 0076	U		0.00074	J		<0 0076	J	U	0.0018	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-3-10-110420	11/4/2020	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0026	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-3-10-051021	5/10/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0029	J		<0.004	U		<0.004	U		<0.0039	U	
	22 ft	VMP-3-22-072920	7/29/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0024	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-3-22-110420	11/4/2020	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0026	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-3-22-012521	1/25/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-3-22-051021	5/10/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.003	J		<0.004	U		<0.004	U		<0.0039	U	
		VMP-3-22-051021-DUP	5/10/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0026	J		<0.004	U		<0.004	U		<0.0039	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	<0.079	U		<0.062	U		<0.062	U		<0.062	U		<0.051	U		<0.042	U		<0.042	U		<0.041	U	
		VMP-3-31.5-110420	11/4/2020	<9.7	U		<7.6	U		<7.6	U		<7.6	U		<6.2	U		<5.1	U		<5.1	U		<5	U	
		VMP-3-31.5-012521	1/25/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-3-31.5-051021	5/10/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0025	J		<0.004	U		<0.004	U		<0.0039	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	J	U	0.0022	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0023	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-4-5-103020	10/30/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0023	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-4-5-012821	1/28/2021	<0.0087	U		<0 0068	U		<0.0068	U		<0 0068	U		0.003	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-4-5-050521	5/5/2021	<0.008	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0026	J		<0.0042	U		<0.0042	U		<0.0041	U	
	12 ft	VMP-4-12-073020	7/30/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0024	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-4-12-103020	10/30/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-4-12-012821	1/28/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0029	J		<0.0045	U		<0.0045	U		<0.0044	U	
		VMP-4-12-050521	5/5/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0025	J		<0.0045	U		<0.0045	U		<0.0044	U	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.002	J		<0.0052	U		<0.0052	U		<0.005	U	
		VMP-4-23.5-103020	10/30/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0024	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-4-23.5-012821	1/28/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0031	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-4-23.5-050521	5/5/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0025	J		<0.0045	U		<0.0045	U		<0.0044	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0018	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-5-5-103020	10/30/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0025	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-5-5-012221	1/22/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0028	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-5-5-050621	5/6/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.002	J		<0.004	U		<0.004	U		<0.0039	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0024	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-5-12.5-103020	10/30/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0024	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-5-12.5-012221	1/22/2021	<0.011	U		<0 0087	U		<0.0087	U		<0 0087	U		0.0034	J		<0.0058	U		<0.0058	U		<0.0057	U	
		VMP-5-12.5-050621	5/6/2021	<0.0079	U		<0 0062	U		<0.0062	U		0.014			0.0019	J		<0.0042	U		<0.0042	U		<0.0041	U	
		VMP-5-12.5-050621-DUP	5/6/2021	<0.0082	U		<0 0064	U		<0.0064	U		0.015			0.0018	J		<0.0043	U		<0.0043	U		<0.0042	U	
	31 ft	VMP-5-31-072320	7/23/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0021	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0023	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-5-31-103020	10/30/2020	<0.01	U		<0 0082	U		<0.0082	U		<0 0082	U		0.0026	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0026	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-5-31-012221	1/22/2021	0.0011	J		0.0023	J		0.002	J		0.002	J		0.0028	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-5-31-050621	5/6/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0019	J		<0.0041	U		<0.0041	U		<0.004	U	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0023	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-6-5-102920	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0028	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-6-5-012921	1/29/2021	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0021	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-6-5-050621	5/6/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0019	J		<0.0044	U		<0.0044	U		<0.0043	U	
	10 ft	VMP-6-10-072220	7/22/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.003	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-6-10-102920	10/29/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-6-10-050621	5/6/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0017	J		<0.0042	U		<0.0042	U		<0.0042	U	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.01	U		<0 0082	U		<0.0082	U		<0 0082	U		0.0032	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-6-31.5-102920	10/29/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.003	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-6-31.5-012921	1/29/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		<0.0062	U		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.011	U		<0 0083	U		<0.0083	U		<0 0083	U		0.0026	J		<0.0056	U		<0.0056	U		<0.0055	U	
		VMP-6-31.5-050621	5/6/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.002	J		<0.0042	U		<0.0042	U		<0.0042	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	<0.0093	U		<0 0073	U		0.00063	J		0.0006	J		0.0023	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-7-5-110420	11/4/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0029	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-7-5-012621	1/26/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.003	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-7-5-050521	5/5/2021	<0.0085	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0022	J		<0.0045	U		<0.0045	U		<0.0044	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0028	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-7-13.5-110420	11/4/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0028	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-7-13.5-012621	1/26/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0025	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-7-13.5-050521	5/5/2021	<0.0083	U		<0 0065	U		<0.0065	U		<0 0065	U		0.0024	J		<0.0044	U		<0.0044	U		<0.0043	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0019	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-7-29.5-110420	11/4/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0043	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-7-29.5-012621	1/26/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0028	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-7-29.5-050521	5/5/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0022	J		<0.0041	U		<0.0041	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-8-5-102820	10/28/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0032	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-8-5-012121	1/21/2021	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-8-5-050421	5/4/2021	<0.007	U		<0 0055	U		<0.0055	U		<0 0055	U		0.0019	J		<0.0037	U		<0.0037	U		<0.0036	U	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0027	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-8-9.5-102820	10/28/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0026	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-8-9.5-012121	1/21/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-8-9.5-050421	5/4/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0018	J		<0.004	U		<0.004	U		<0.0039	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0031	J		<0.0048	U		<0.0048	U		0.0007	J	
		VMP-8-23.5-102820	10/28/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0028	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-8-23.5-012121	1/21/2021	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.003	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-8-23.5-050421	5/4/2021	<0.0072	U		<0 0056	U		<0.0056	U		<0 0056	U		0.0018	J		<0.0038	U		<0.0038	U		<0.0037	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0034	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-8-35.5-102820	10/28/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0023	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-8-35.5-012121	1/21/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-8-35.5-050421	5/4/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.002	J		<0.0041	U		<0.0041	U		<0.004	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0028	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-9-5-102820	10/28/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-9-5-012121	1/21/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-9-5-050421	5/4/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0023	J		<0.0042	U		<0.0042	U		<0.0042	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0033	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-9-11.5-102820	10/28/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0029	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-9-11.5-012121	1/21/2021	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-9-11.5-050421	5/4/2021	<0.0082	U		<0 0064	U		<0.0064	U		<0 0064	U		0.0035	J		<0.0043	U		<0.0043	U		<0.0042	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0039	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-9-25.5-102820	10/28/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0033	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0033	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-9-25.5-012121	1/21/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-9-25.5-050421	5/4/2021	<0.0079	U		<0 0062	U		<0.0062	U		<0 0062	U		0.0026	J		<0.0042	U		<0.0042	U		<0.0041	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.003	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0024	J		<0.0045	U		<0.0045	U		<0.0044	U	
		VMP-18-8.5-012621	1/26/2021	<0.0099	U		<0 0078	J	U	<0.0078	J	U	<0 0078	J	U	0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0021	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-19-5-110420	11/4/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0026	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-19-5-012621	1/26/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-19-5-051121	5/11/2021	<0.0075	U		<0 0059	U		<0.0059	U		<0 0059	U		0.0026	J		<0.0039	U		<0.0039	U		<0.0039	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-20-5-112420	11/24/2020	<0.0083	U		<0 0065	U		<0.0065	U		<0 0065	U		0.0027	J		<0.0044	U		<0.0044	U		<0.0043	U	
		VMP-20-5-012521	1/25/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.003	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-20-5-050721	5/7/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0026	J		<0.004	U		<0.004	U		<0.0039	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	J	U	0.002	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-20-10-110220	11/2/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0023	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-20-10-012521	1/25/2021	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0026	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-20-10-050721	5/7/2021	<0.0073	U		<0 0057	U		<0.0057	U		<0 0057	U		0.0024	J		<0.0038	U		<0.0038	U		<0.0038	U	
	25 ft	VMP-20-25-072320	7/23/2020	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0021	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-20-25-110220	11/2/2020	<0.0087	U		<0 0068	U		<0.0068	U		<0 0068	U		0.003	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-20-25-012521	1/25/2021	<0.0093	U		<0 0073	U		0.006	J		<0 0073	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-20-25-050721	5/7/2021	<0.0074	U		<0 0058	U		<0.0058	U		<0 0058	U		0.0024	J		<0.0039	U		<0.0039	U		<0.0038	U	
		VMP-20-25-050721-DUP	5/7/2021	<0.0073	U		<0 0057	U		<0.0057	U		<0 0057	U		0.0023	J		<0.0038	U		<0.0038	U		<0.0038	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-21-5-102920	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-21-5-012521	1/25/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-21-5-050321	5/3/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.003	J		<0.0044	U		<0.0044	U		<0.0043	U	
	10 ft	VMP-21-10-072420	7/24/2020	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0025	J		<0.0046	U		<0.0046	U		<0.0046	U	
		VMP-21-10-102920	10/29/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.003	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-21-10-012521	1/25/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.003	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0032	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-21-10-050321	5/3/2021	<0.0083	U		<0 0065	U		<0.0065	U		<0 0065	U		0.0025	J		<0.0044	U		<0.0044	U		<0.0043	U	
		VMP-21-10-060321-R	6/3/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0034	J		<0.0045	U		<0.0045	U		<0.0044	U	
	25 ft	VMP-21-25-072420	7/24/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0032	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-21-25-102920	10/29/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-21-25-012521	1/25/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0035	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-21-25-050321	5/3/2021	<0.0087	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0047	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-21-25-050321-DUP	5/3/2021	<0.0083	U		<0 0065	U		<0.0065	U		<0 0065	U		0.0048	J		<0.0044	U		<0.0044	U		<0.0043	U	
	33 ft	VMP-21-33-072420	7/24/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0032	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-21-33-102920	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0028	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-21-33-012521	1/25/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-21-33-050321	5/3/2021	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0029	J		<0.0046	U		<0.0046	U		<0.0046	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.002	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-22-5-110520	11/5/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0024	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-22-5-012621	1/26/2021	<0.01	U		<0 0082	U		<0.0082	U		<0 0082	U		0.0029	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-22-5-050321	5/3/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0025	J		<0.0047	U		<0.0047	U		<0.0046	U	
	10 ft	VMP-22-10-072320	7/23/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0023	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-22-10-110520	11/5/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0025	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-22-10-012621	1/26/2021	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-22-10-050321	5/3/2021	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0027	J		<0.0046	U		<0.0046	U		<0.0045	U	
	18 ft	VMP-22-18-072320	7/23/2020	<0.01	U		<0 0083	U		<0.0083	U		<0 0083	U		0.0024	J		<0.0056	U		<0.0056	U		<0.0054	U	
		VMP-22-18-110520	11/5/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-22-18-012621	1/26/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.003	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-22-18-050321	5/3/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0026	J		<0.0045	U		<0.0045	U		<0.0044	U	
	38 ft	VMP-22-38-110520	11/5/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0031	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-22-38-012621	1/26/2021	<0.011	U		<0 0084	U		<0.0084	U		<0 0084	U		0.0031	J		<0.0057	U		<0.0057	U		<0.0056	U	
		VMP-22-38-050321	5/3/2021	<0.085	U		<0.066	U		<0.066	U		<0.066	U		<0.055	U		<0.045	U		<0.045	U		<0.044	U	
		VMP-22-38-060321-R	6/3/2021	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.002	J		<0.0048	U		<0.0048	U		<0.0047	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0024	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-23-5-102920	10/29/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.003	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-23-5-012121	1/21/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0028	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-23-5-050721	5/7/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0027	J		<0.0042	U		<0.0042	U		<0.0042	U	
	10 ft	VMP-23-10-072320	7/23/2020	<0.01	U		<0 0082	U		<0.0082	J	U	<0 0082	J	U	0.0024	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-23-10-102920	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.003	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0033	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-23-10-012121	1/21/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0031	J		<0.0052	U		<0.0052	U		<0.0051	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0022	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-23-25-102920	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0033	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-23-25-012121	1/21/2021	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0029	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-23-25-050721	5/7/2021	<0.0074	U		<0 0058	U		<0.0058	U		<0 0058	U		0.0031	J		<0.0039	U		<0.0039	U		<0.0038	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-24-5-102920	10/29/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-24-5-012121	1/21/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-24-5-051121	5/11/2021	<0.0074	U		<0 0058	U		<0.0058	U		<0 0058	U		0.0023	J		<0.0039	U		<0.0039	U		<0.0038	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.003	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-24-10-102920	10/29/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0024	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-24-10-022521	2/25/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0025	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-24-10-051121	5/11/2021	<0.0068	U		<0 0054	U		<0.0054	U		<0 0054	U		0.0026	J		<0.0036	U		<0.0036	U		<0.0035	U	
		VMP-24-10-051121-DUP	5/11/2021	<0.007	U		<0 0054	U		<0.0054	U		<0 0054	U		0.0026	J		<0.0037	U		<0.0037	U		<0.0036	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.009	U		<0 0071	U		<0.0071	U		<0 0071	U		0.003	J		<0.0048	U		<0.0048	U		<0.0046	U	
		VMP-24-22-102920	10/29/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0031	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-24-22-012121	1/21/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0025	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-24-22-051121	5/11/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0023	J		<0.0041	U		<0.0041	U		<0.004	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0036	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-24-34-102920	10/29/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.003	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-24-34-012121	1/21/2021	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0072			<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-24-34-051121	5/11/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0025	J		<0.004	U		<0.004	U		<0.0039	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-32-5-110420	11/4/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0018	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-32-5-012621	1/26/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0027	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-32-5-051221	5/12/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0024	J		<0.004	U		<0.004	U		<0.0039	U	
	10 ft	VMP-32-10-072920	7/29/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0022	J		<0.0053	U		0.0016	J		<0.0052	U	
		VMP-32-10-110420	11/4/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-32-10-012621	1/26/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0029	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-32-10-051221	5/12/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0026	J		<0.0042	U		<0.0042	U		<0.0042	U	
		VMP-32-10-051221-DUP	5/12/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0026	J		<0.0041	U		<0.0041	U		<0.004	U	
	20 ft	VMP-32-20-072920	7/29/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-32-20-110420	11/4/2020	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0026	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-32-20-012621	1/26/2021	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0024	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0028	J		<0.0052	U		<0.0052	U		<0.0051	U	
	30 ft	VMP-32-30-072920	7/29/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0027	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-32-30-110420	11/4/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0028	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.011	U		<0 0085	U		<0.0085	U		<0 0085	U		0.0026	J		<0.0057	U		<0.0057	U		<0.0056	U	
		VMP-32-30-012621	1/26/2021	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0023	J		<0.0051	U		<0.0051	U		<0.005	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	0.00086	J		0.0016	J		0.00097	J		0.0012	J		0.0023	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-42-10-110520	11/5/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.003	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-42-10-012921	1/29/2021	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0024	J		<0.0052	U		<0.0052	U		<0.005	U	
		VMP-42-10-050521	5/5/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
	20 ft	VMP-42-20-072820	7/28/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0023	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-42-20-110520	11/5/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0031	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-42-20-012921	1/29/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0024	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-42-20-050521	5/5/2021	<0.0088	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0025	J		<0.0046	U		<0.0046	U		<0.0045	U	
	30 ft	VMP-42-30-072820	7/28/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0021	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-42-30-110520	11/5/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0028	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-42-30-012921	1/29/2021	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0025	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-42-30-050521	5/5/2021	<0.0088	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0025	J		<0.0046	U		<0.0046	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0023	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-43-10-110320	11/3/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0025	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-43-10-012621	1/26/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-43-10-050521	5/5/2021	<0.0085	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0027	J		<0.0045	U		<0.0045	U		<0.0044	U	
	20 ft	VMP-43-20-072820	7/28/2020	<0.01	U		<0 0082	U		<0.0082	U		<0 0082	U		0.0023	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-43-20-110320	11/3/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0033	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-43-20-012621	1/26/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-43-20-050521	5/5/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0021	J		<0.0041	U		<0.0041	U		<0.004	U	
	30 ft	VMP-43-30-072820	7/28/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0024	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-43-30-110320	11/3/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0032	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-43-30-022521	2/25/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-43-30-050521	5/5/2021	<0.0085	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0025	J		<0.0045	U		<0.0045	U		<0.0044	U	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0022	J		<0.0048	U		<0.0048	U		<0.0047	U	
	20 ft	VMP-44-20-072820	7/28/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0019	J		<0.0051	U		<0.0051	U		<0.005	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.002	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-45-10-110520	11/5/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.003	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-45-10-012621	1/26/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.002	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-45-10-060321	6/3/2021	<0.0085	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0021	J		<0.0045	U		<0.0045	U		<0.0044	U	
	20 ft	VMP-45-20-072820	7/28/2020	<0.01	U		<0 0082	U		<0.0082	U		<0 0082	U		0.0022	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-45-20-110520	11/5/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0034	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-45-20-012621	1/26/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-45-20-050521	5/5/2021	<0.0078	U		<0 0061	J	U	<0.0061	J	U	<0 0061	J	U	0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
	30 ft	VMP-45-30-072820	7/28/2020	<0.011	U		<0 0088	U		<0.0088	U		0 00071	J		0.0019	J		<0.006	U		<0.0059	U		<0.0058	U	
		VMP-45-30-110520	11/5/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0028	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-45-30-012621	1/26/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		<0.006	U		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-45-30-050521	5/5/2021	<0.0076	U		<0 0059	U		<0.0059	U		<0 0059	U		0.0023	J		<0.004	U		<0.004	U		<0.0039	U	
		VMP-45-30-050521-DUP	5/5/2021	<0.0077	U		<0.006	U		<0.006	U		<0.006	U		0.0025	J		<0.0041	U		<0.0041	U		<0.004	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0037	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-47-5-110220	11/2/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-47-5-012221	1/22/2021	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0024	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-47-5-050621	5/6/2021	<0.0079	U		<0 0062	U		<0.0062	U		<0 0062	U		0.0022	J		<0.0042	U		<0.0042	U		<0.0041	U	
	10 ft	VMP-47-10-072720	7/27/2020	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0033	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0034	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-47-10-110220	11/2/2020	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0034	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-47-10-012221	1/22/2021	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0022	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-47-10-050621	5/6/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0019	J		<0.0041	U		<0.0041	U		<0.004	U	
	20 ft	VMP-47-20-072720	7/27/2020	<0.009	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0026	J		<0.0048	U		<0.0048	U		<0.0046	U	
		VMP-47-20-110220	11/2/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.004	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-47-20-012221	1/22/2021	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0022	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0022	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-47-20-050621	5/6/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0019	J		<0.004	U		<0.004	U		<0.0039	U	
	30 ft	VMP-47-30-072720	7/27/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0034	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-47-30-110220	11/2/2020	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0078			<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0065			<0.0045	U		<0.0045	U		<0.0044	U	
		VMP-47-30-012221	1/22/2021	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0022	J		<0.0052	U		<0.0052	U		<0.005	U	
		VMP-47-30-050621	5/6/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0021	J		<0.0041	U		<0.0041	U		<0.004	U	
		VMP-47-30-050621-DUP	5/6/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0019	J		<0.0041	U		<0.0041	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	<0.0087	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0023	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-48-5-110220	11/2/2020	<0.0089	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0024	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-48-5-012521	1/25/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-48-5-050721	5/7/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0024	J		<0.0042	U		<0.0042	U		<0.0042	U	
	10 ft	VMP-48-10-073020	7/30/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0022	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-48-10-110220	11/2/2020	<0.01	U		0.0017	J		<0.0078	U		0.0014	J		0.0039	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-48-10-012521	1/25/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.003	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-48-10-050721	5/7/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0025	J		<0.0044	U		<0.0044	U		<0.0043	U	
	20 ft	VMP-48-20-110220	11/2/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0031	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-48-20-012521	1/25/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.003	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0027	J		<0.0051	U		<0.0051	U		<0.005	U	
	30 ft	VMP-48-30-073020	7/30/2020	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0022	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-48-30-110220	11/2/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0027	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-48-30-012521	1/25/2021	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0032	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-48-30-050721	5/7/2021	<0.0079	U		<0 0062	U		<0.0062	U		<0 0062	U		0.0025	J		<0.0042	U		<0.0042	U		<0.0041	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0029	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0038	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-49-5-110420	11/4/2020	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0026	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-49-5-012521	1/25/2021	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0025	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-49-5-050321	5/3/2021	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0024	J		<0.0047	U		<0.0047	U		<0.0046	U	
	10 ft	VMP-49-10-072420	7/24/2020	<0.011	U		<0 0084	U		<0.0084	U		<0 0084	U		0.0026	J		<0.0057	U		<0.0057	U		<0.0056	U	
		VMP-49-10-110420	11/4/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0023	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-49-10-012521	1/25/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.003	J		<0.0045	U		<0.0045	U		<0.0044	U	
		VMP-49-10-050321	5/3/2021	<0.0085	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0025	J		<0.0045	U		<0.0045	U		<0.0044	U	
	20 ft	VMP-49-20-072420	7/24/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0027	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-49-20-110420	11/4/2020	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0025	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-49-20-012521	1/25/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0028	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-49-20-050321	5/3/2021	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0024	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-49-20-060321-R	6/3/2021	<0.0082	U		<0 0064	U		<0.0064	U		<0 0064	U		0.0024	J		<0.0043	U		<0.0043	U		<0.0042	U	
	30 ft	VMP-49-30-072420	7/24/2020	<0.0099	U		<0 0077	U		<0.0077	U		<0 0077	U		0.003	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-49-30-110420	11/4/2020	<0.77	U		<0.6	U		<0.6	U		<0.6	U		<0.5	U		<0.41	U		<0.41	U		<0.4	U	
		VMP-49-30-012521	1/25/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-49-30-050321	5/3/2021	<0.0083	U		<0 0065	U		<0.0065	U		<0 0065	U		0.0027	J		<0.0044	U		<0.0044	U		<0.0043	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		<0.0063	U		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-50-5-110520	11/5/2020	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.003	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-50-5-012621	1/26/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0028	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-50-5-050721	5/7/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0025	J		<0.0042	U		<0.0042	U		<0.0042	U	
	10 ft	VMP-50-10-072720	7/27/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0034	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-50-10-110520	11/5/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-50-10-012621	1/26/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0023	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-50-10-050721	5/7/2021	<0.0082	U		<0 0064	U		<0.0064	U		<0 0064	U		0.0024	J		<0.0043	U		<0.0043	U		<0.0042	U	
	20 ft	VMP-50-20-072720	7/27/2020	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0028	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-50-20-110520	11/5/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0025	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-50-20-022521	2/25/2021	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0026	J		<0.0054	U		<0.0054	U		<0.0052	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0024	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-50-20-050721	5/7/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
		VMP-50-20-050721-DUP	5/7/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0027	J		<0.0041	U		<0.0041	U		<0.004	U	
	30 ft	VMP-50-30-072720	7/27/2020	<0.096	U		<0.075	U		<0.075	U		<0.075	U		<0.062	U		<0.05	U		<0.05	U		<0.05	U	
		VMP-50-30-110520	11/5/2020	<0.019	U		<0.015	U		<0.015	U		<0.015	U		0.0035	J		<0.01	U		<0.01	U		<0.0098	U	
		VMP-50-30-012621	1/26/2021	<0.19	U		<0.15	U		<0.15	U		<0.15	U		<0.12	U		<0.1	U		<0.1	U		<0.099	U	
		VMP-50-30-050721	5/7/2021	<0.15	U		<0.12	U		<0.12	U		<0.12	U		<0.1	U		<0.082	U		<0.082	U		<0.08	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0023	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-51-5-103020	10/30/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0023	J		<0.0052	U		<0.0052	U		<0.005	U	
		VMP-51-5-012221	1/22/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0025	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-51-5-050421	5/4/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.002	J		<0.0042	U		<0.0042	U		<0.0042	U	
	10 ft	VMP-51-10-072320	7/23/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0024	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-51-10-103020	10/30/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0026	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-51-10-012221	1/22/2021	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-51-10-050421	5/4/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0027	J		<0.0044	U		<0.0044	U		<0.0043	U	
	20 ft	VMP-51-20-072320	7/23/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0029	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-51-20-103020	10/30/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0037	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-51-20-012221	1/22/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-51-20-050421	5/4/2021	<0.0079	U		<0 0062	U		<0.0062	U		<0 0062	U		0.0025	J		<0.0042	U		<0.0042	U		<0.0041	U	
	30 ft	VMP-51-30-072320	7/23/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0037	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-51-30-103020	10/30/2020	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0033	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-51-30-012221	1/22/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0035	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-51-30-050421	5/4/2021	<0.0086	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0034	J		<0.0045	U		<0.0045	U		<0.0044	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0019	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0023	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-52-5-102920	10/29/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0028	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-52-5-012221	1/22/2021	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0022	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0087	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0023	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-52-5-050421	5/4/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0018	J		<0.004	U		<0.004	U		<0.0039	U	
	10 ft	VMP-52-10-102920	10/29/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.003	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-52-10-012221	1/22/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0024	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-52-10-050421	5/4/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0018	J		<0.0041	U		<0.0041	U		<0.004	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.01	U		<0 0081	U		<0.0081	U		<0 0081	U		0.0023	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-52-20-102920	10/29/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.003	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-52-20-012221	1/22/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0023	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-52-20-050421	5/4/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0025	J		<0.0042	U		<0.0042	U		<0.0042	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0024	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-52-30-102920	10/29/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-52-30-012221	1/22/2021	<0.0089	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0027	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-52-30-050421	5/4/2021	<0.0076	U		0.0009	J		<0.006	U		<0.006	U		0.0026	J		<0.004	U		<0.004	U		<0.0039	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0032	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-53-5-102820	10/28/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-53-5-012121	1/21/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-53-5-050421	5/4/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0023	J		<0.0041	U		<0.0041	U		<0.004	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0026	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-53-10-102820	10/28/2020	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0029	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-53-10-012121	1/21/2021	<0.0094	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0029	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-53-10-050421	5/4/2021	<0.0073	U		<0 0057	U		<0.0057	U		<0 0057	U		0.0025	J		<0.0038	U		<0.0038	U		<0.0038	U	
		VMP-53-10-050421-DUP	5/4/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.0022	J		<0.0041	U		<0.0041	U		<0.004	U	
		VMP-53-10-060321-R	6/3/2021	<0.0086	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0023	J		<0.0046	U		<0.0046	U		<0.0045	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0031	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-53-20-102820	10/28/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0028	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-53-20-012121	1/21/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0026	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-53-20-050421	5/4/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0026	J		<0.0044	U		<0.0044	U		<0.0043	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0024	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-53-30-102820	10/28/2020	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0029	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-53-30-012121	1/21/2021	<0.0092	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-53-30-050421	5/4/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0026	J		<0.004	U		<0.004	U		<0.0039	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	<0.0098	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0032	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-54-5-102820	10/28/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.003	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-54-5-012821	1/28/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0025	J		<0.0044	U		<0.0044	U		<0.0044	U	
		VMP-54-5-050421	5/4/2021	<0.0074	U		<0 0058	U		<0.0058	U		<0 0058	U		0.0019	J		<0.0039	U		<0.0039	U		<0.0038	U	
	10 ft	VMP-54-10-072220	7/22/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0036	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-54-10-102820	10/28/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.003	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-54-10-012821	1/28/2021	<0.0088	U		<0 0069	U		<0.0069	U		<0 0069	U		0.003	J		<0.0046	U		<0.0046	U		<0.0046	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0028	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-54-10-050421	5/4/2021	<0.0074	U		<0 0058	U		<0.0058	U		<0 0058	U		0.0019	J		<0.0039	U		<0.0039	U		<0.0038	U	
	20 ft	VMP-54-20-072220	7/22/2020	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0041	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-54-20-102820	10/28/2020	<0.0098	U		<0 0077	U		<0.0077	U		<0 0077	U		0.0028	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-54-20-012821	1/28/2021	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0033	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-54-20-050421	5/4/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.002	J		<0.004	U		<0.004	U		<0.0039	U	
	30 ft	VMP-54-30-072220	7/22/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0028	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-54-30-102820	10/28/2020	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.003	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-54-30-012821	1/28/2021	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0028	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-54-30-050421	5/4/2021	<0.0073	U		<0 0057	U		<0.0057	U		<0 0057	U		0.0019	J		<0.0038	U		<0.0038	U		<0.0038	U	
		VMP-54-30-050421-DUP	5/4/2021	<0.0072	U		<0 0056	U		<0.0056	U		<0 0056	U		0.0019	J		<0.0038	U		<0.0038	U		<0.0037	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	<0.01	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0026	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.011	U		<0 0083	U		<0.0083	U		<0 0083	U		0.0033	J		<0.0056	U		<0.0056	U		<0.0055	U	
		VMP-56-10-110320	11/3/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0027	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-56-10-012121	1/21/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0025	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-56-10-050521	5/5/2021	<0.0091	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0024	J		<0.0048	U		<0.0048	U		<0.0047	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0022	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-56-25-110320	11/3/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0025	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0099	U		<0 0078	U		<0.0078	U		<0 0078	U		0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-56-25-012121	1/21/2021	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0029	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0026	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-56-25-050521	5/5/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0029	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-56-25-050521-DUP	5/5/2021	<0.0082	U		<0 0064	U		<0.0064	U		<0 0064	U		0.0025	J		<0.0043	U		<0.0043	U		<0.0042	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-62-5-102920	10/29/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-62-5-012221	1/22/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0026	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-62-5-050621	5/6/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0021	J		<0.004	U		<0.004	U		<0.0039	U	
	10 ft	VMP-62-10-072720	7/27/2020	<0.0086	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0021	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-62-10-102920	10/29/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0033	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-62-10-012221	1/22/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0023	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-62-10-050621	5/6/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0022	J		<0.004	U		<0.004	U		<0.0039	U	
	20 ft	VMP-62-20-072720	7/27/2020	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0032	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-62-20-102920	10/29/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.003	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-62-20-050621	5/6/2021	<0.0078	U		<0 0061	U		<0.0061	U		<0 0061	U		0.002	J		<0.0041	U		<0.0041	U		<0.004	U	
	30 ft	VMP-62-30-072720	7/27/2020	<0.009	U		<0 0071	U		<0.0071	U		<0 0071	U		0.0036	J		<0.0048	U		<0.0048	U		<0.0046	U	
		VMP-62-30-102920	10/29/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0028	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-62-30-012221	1/22/2021	<0.0082	U		<0 0064	U		<0.0064	U		<0 0064	U		0.0021	J		<0.0043	U		<0.0043	U		<0.0042	U	
		VMP-62-30-050621	5/6/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0021	J		<0.004	U		<0.004	U		<0.0039	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.0078			290						1200			270			690			0.099			240		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0026	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-63-5-110320	11/3/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.003	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-63-5-012921	1/29/2021	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-63-5-050521	5/5/2021	<0.0086	U		<0 0068	U		<0.0068	U		<0 0068	U		0.0024	J		<0.0046	U		<0.0046	U		<0.0045	U	
	10 ft	VMP-63-10-072820	7/28/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0022	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-63-10-110320	11/3/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0028	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-63-10-012921	1/29/2021	<0.04	U		<0.032	U		<0.032	U		<0.032	U		<0.026	U		<0.021	U		<0.021	U		<0.021	U	
		VMP-63-10-050521	5/5/2021	<0.0081	U		<0 0063	U		<0.0063	U		<0 0063	U		0.0026	J		<0.0043	U		<0.0043	U		<0.0042	U	
	20 ft	VMP-63-20-072820	7/28/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0023	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-63-20-110320	11/3/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-63-20-012921	1/29/2021	<0.01	U		<0 0079	U		<0.0079	U		<0 0079	U		0.0032	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-63-20-050521	5/5/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0025	J		<0.0047	U		<0.0047	U		<0.0046	U	
	30 ft	VMP-63-30-072820	7/28/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.002	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0022	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-63-30-110320	11/3/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0093	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0027	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-63-30-012921	1/29/2021	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0034	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-63-30-050521	5/5/2021	<0.0085	U		<0 0067	U		<0.0067	U		<0 0067	U		0.0026	J		<0.0045	U		<0.0045	U		<0.0044	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	<0.0094	U		<0 0073	U		<0.0073	U		<0 0073	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-64-5-103020	10/30/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0026	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-64-5-012221	1/22/2021	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0023	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-64-5-050621	5/6/2021	<0.0084	U		<0 0066	U		<0.0066	U		<0 0066	U		0.0019	J		<0.0044	U		<0.0044	U		<0.0043	U	
	10 ft	VMP-64-10-072420	7/24/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0028	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-64-10-103020	10/30/2020	<0.0097	U		<0 0076	U		<0.0076	U		<0 0076	U		0.0035	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-64-10-012221	1/22/2021	<0.0087	U		<0 0068	U		<0.0068	U		<0 0068	U		0.002	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-64-10-050621	5/6/2021	<0.0082	U		<0 0064	U		<0.0064	U		<0 0064	U		0.002	J		<0.0043	U		<0.0043	U		<0.0042	U	
	20 ft	VMP-64-20-072420	7/24/2020	<0.0095	U		<0 0074	U		<0.0074	U		<0 0074	U		0.0031	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0096	U		<0 0075	U		<0.0075	U		<0 0075	U		0.0032	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-64-20-103020	10/30/2020	<0.0089	U		<0 0069	U		<0.0069	U		<0 0069	U		0.0058			<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-64-20-012221	1/22/2021	<0.0091	U		<0 0072	U		<0.0072	U		<0 0072	U		0.0031	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-64-20-050621	5/6/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0019	J		<0.0047	U		<0.0047	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		0.014			<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-1-5-110220	11/2/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.01	J	J	<0.0056	U		<0.0064	U		<0.01	U	
		VMP-1-5-012921	1/29/2021	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		0.0087	J		<0.005	U		<0.0056	U		<0.0088	U	
		VMP-1-5-050521	5/5/2021	<0.0043	U		<0.038	U		<0.005	U		<0.016	U		<0.02	U		<0.0047	U		<0.0053	U		<0.0083	U	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		0.016			<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-1-8.5-110220	11/2/2020	<0.0049	U		<0.043	U		<0.0058	U		<0.018	U		0.014	J	J	<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-1-8.5-012921	1/29/2021	<0.0047	U		<0.042	U		<0.0055	U		<0.017	U		<0.022	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-1-8.5-050521	5/5/2021	<0.0043	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0084	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.0097	J		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-1-23.5-110220	11/2/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.011	J	J	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-1-23.5-012921	1/29/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	U		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		<0.025	U		<0.0057	U		<0.0065	U		<0.01	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		0.017			<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-1-38.5-110220	11/2/2020	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		0.011	J	J	<0.005	U		<0.0056	U		<0.0088	U	
		VMP-1-38.5-012921	1/29/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-1-38.5-050521	5/5/2021	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		<0.021	U		<0.0048	U		<0.0055	U		<0.0085	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	<0.0046	U		<0.04	U		<0.0053	U		<0.016	U		0.01			<0.005	U		<0.0056	U		<0.0088	U	
		VMP-2-5-110420	11/4/2020	0.0014	J		<0.046	U		<0.006	U		<0.019	U		<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-2-5-012521	1/25/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	J	U	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-2-5-050721	5/7/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		0.0052	J	J	<0.0044	U		<0.005	U		<0.0077	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-2-8.5-110420	11/4/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-2-8.5-012521	1/25/2021	<0.0051	U		<0.045	U		<0.0059	U		<0.018	U		0.0078	J		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-2-8.5-050721	5/7/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		<0.019	U	UJ	<0.0045	U		<0.0051	U		<0.0079	U	
	22 ft	VMP-2-22-072420	7/24/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		0.0068	J		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-2-22-110420	11/4/2020	<0.048	U		<0.17	U		<0.057	U		<0.18	U		<0.092	U		<0.053	U		<0.06	U		<0.094	U	
		VMP-2-22-012521	1/25/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-2-22-050721	5/7/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U	UJ	<0.0046	U		<0.0052	U		<0.008	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	<0.0053	U		<0.046	U		<0.0061	U		<0.019	U		0.012			<0.0058	U		0.0016	J		<0.01	U	
		VMP-3-5-110420	11/4/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.021			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-3-5-012521	1/25/2021	<0.0053	U		<0.047	U		<0.0062	U		<0.019	U		0.0045	J		<0.0058	U		<0.0066	U		<0.01	U	
		VMP-3-5-051021	5/10/2021	<0.004	U		<0.035	U		<0.0047	U		<0.015	U		<0.019	U		<0.0044	U		<0.005	U		<0.0078	U	
	10 ft	VMP-3-10-072920	7/29/2020	<0.005	U		<0.044	U		<0.0058	U		0.001	J		0.0077	J		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-3-10-110420	11/4/2020	<0.0054	U		<0.047	U		<0.0062	U		<0.019	U		<0.01	U		<0.0059	U		<0.0066	U		<0.01	U	
		VMP-3-10-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	22 ft	VMP-3-22-072920	7/29/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.011			<0.0057	U		<0.0065	U		<0.01	U	
		VMP-3-22-110420	11/4/2020	<0.0054	U		<0.047	U		<0.0062	U		<0.019	U		<0.01	U		<0.0059	U		<0.0066	U		<0.01	U	
		VMP-3-22-012521	1/25/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.0054	J		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-3-22-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
		VMP-3-22-051021-DUP	5/10/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	<0.041	U		<0.36	U		<0.048	U		<0.15	U		<0.078	U		<0.045	U		<0.051	U		<0.079	U	
		VMP-3-31.5-110420	11/4/2020	<5	U		<18	U		<5.8	U		<18	U		<9.5	U		<5.5	U		1.3	J		<9.6	U	
		VMP-3-31.5-012521	1/25/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.0048	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-3-31.5-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0093			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0051	U		<0.045	U		<0.0059	U		0.0017	J		0.012			<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-4-5-103020	10/30/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0063	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-4-5-012821	1/28/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		0.0054	J		<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-4-5-050521	5/5/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		0.006	J		<0.0045	U		<0.0051	U		<0.008	U	
	12 ft	VMP-4-12-073020	7/30/2020	<0.005	U		<0.044	U		<0.0058	U		0.0019	J		<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U	
		VMP-4-12-103020	10/30/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-4-12-012821	1/28/2021	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		0.0031	J		<0.0048	U		<0.0055	U		<0.0085	U	
		VMP-4-12-050521	5/5/2021	<0.0044	U		<0.039	U		<0.0052	U		0.0023	J		0.0038	J		<0.0049	U		<0.0055	U		<0.0086	U	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	<0.005	U		<0.044	U		<0.0059	U		0.0014	J		0.0082	J		0.0014	J		<0.0063	U		<0.0098	U	
		VMP-4-23.5-103020	10/30/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.0069	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0048	U		<0.042	U		<0.0057	U		<0.018	U		0.014			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-4-23.5-012821	1/28/2021	<0.0047	U		<0.042	U		<0.0055	U		<0.017	U		0.005	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-4-23.5-050521	5/5/2021	<0.0044	U		<0.039	U		<0.0052	U		0.0016	J		<0.021	U		<0.0049	U		<0.0055	U		<0.0086	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	0.0013	J		<0.045	U		<0.0059	U		0.0015	J		<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-5-5-103020	10/30/2020	<0.0048	U		<0.042	U		<0.0055	U		<0.017	U		<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-5-5-012221	1/22/2021	<0.005	U		0.0034	J		<0.0058	U		<0.018	U		0.0077	J		<0.0054	U		<0.0062	U		0 00072	J	
		VMP-5-5-050621	5/6/2021	<0.0039	U		<0.034	U		<0.0046	U		0.004	J		0.0057	J		<0.0043	U		<0.0049	U		<0.0076	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	<0.0049	U		0.0037	J		<0.0057	U		0.0028	J		0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-5-12.5-103020	10/30/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U	UJ	<0.0053	U		0.0016	J		<0.0094	U	
		VMP-5-12.5-012221	1/22/2021	<0.0057	U		0.022	J		<0.0067	U		<0.021	U		0.012	J		<0.0063	U		<0.0071	U		0.0013	J	
		VMP-5-12.5-050621	5/6/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		0.0066	J		<0.0045	U		<0.0051	U		<0.0079	U	
		VMP-5-12.5-050621-DUP	5/6/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		<0.02	U		<0.0046	U		<0.0053	U		<0.0082	U	
	31 ft	VMP-5-31-072320	7/23/2020	<0.0048	U		<0.042	U		<0.0056	U		0.0021	J		0.0017	J		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.005	U		0.0028	J		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-5-31-103020	10/30/2020	<0.0054	U		<0.047	U		<0.0063	U		<0.02	U		<0.026	U	UJ	<0.0059	U		<0.0067	U		<0.01	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0051	U		<0.045	U		<0.006	U		<0.019	U		<0.024	U	UJ	0 00079	J		<0.0064	U		<0.0099	U	
		VMP-5-31-012221	1/22/2021	<0.0048	U		0.0013	J		<0.0057	U		<0.018	U		0.0089	J		<0.0053	U		0.00095	J		0 00064	J	
		VMP-5-31-050621	5/6/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		0.056			0.0022	J		0.0038	J		<0.0077	U	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-6-5-102920	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-6-5-012921	1/29/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.023	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-6-5-050621	5/6/2021	<0.0043	U		<0.038	U		<0.0051	U		<0.016	U		0.0056	J		<0.0048	U		<0.0054	U		<0.0084	U	
	10 ft	VMP-6-10-072220	7/22/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-6-10-102920	10/29/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.013		J	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-6-10-050621	5/6/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U		<0.0046	U		0.0034	J		<0.008	U	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.0054	U		<0.047	U		<0.0063	U		<0.02	U		<0.01	U		<0.0059	U		<0.0067	U		<0.01	U	
		VMP-6-31.5-102920	10/29/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-6-31.5-012921	1/29/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0054	U		<0.0062	U		<0.0096	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0055	U		<0.048	U		<0.0064	U		<0.02	U		<0.026	U		<0.006	U		<0.0068	U		<0.01	U	
		VMP-6-31.5-050621	5/6/2021	<0.0042	U		<0.036	U		<0.0048	U		0.16			0.0067	J		<0.0046	U		<0.0052	U		<0.008	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.014			<0.0053	U		<0.006	U		<0.0093	U	
		VMP-7-5-110420	11/4/2020	<0.0047	U		<0.042	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-7-5-012621	1/26/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-7-5-050521	5/5/2021	<0.0044	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0085	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.0074	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-7-13.5-110420	11/4/2020	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		0.021			<0.0057	U		<0.0064	U		<0.01	U	
		VMP-7-13.5-012621	1/26/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0076	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-7-13.5-050521	5/5/2021	<0.0043	U		<0.038	U		<0.005	U		<0.016	U		0.016	J		<0.0047	U		<0.0053	U		<0.0083	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	<0.0051	U		<0.045	U		<0.006	U		0.0012	J		0.0023	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-7-29.5-110420	11/4/2020	<0.0048	U		0.013	J		<0.0056	U		<0.018	U		0.046			<0.0053	U		<0.006	U		0.0011	J	
		VMP-7-29.5-012621	1/26/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-7-29.5-050521	5/5/2021	<0.004	U		<0.035	U		<0.0047	U		<0.015	U		<0.019	U		<0.0044	U		<0.005	U		<0.0078	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	<0.0049	U		0.0019	J		<0.0057	U		<0.018	U		<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-8-5-102820	10/28/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-8-5-012121	1/21/2021	<0.0049	U		0 00094	J		<0.0057	U		<0.018	U		0.026			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-8-5-050421	5/4/2021	<0.0036	U		<0.032	U		<0.0042	U		<0.013	U		<0.017	U		<0.004	U		<0.0045	U		<0.007	U	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	<0.0051	U		0 00096	J		<0.0059	U		<0.018	U		0.0076	J		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0048	U		0.0011	J		<0.0056	U		<0.017	U		0.007	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-8-9.5-102820	10/28/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		<0.024	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-8-9.5-012121	1/21/2021	<0.0049	U		0.0058	J		<0.0057	U		<0.018	U		0.052			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-8-9.5-050421	5/4/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		0.0046	J		<0.0043	U		<0.0049	U		<0.0076	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	0.0057			<0.041	U		<0.0054	U		<0.017	U		0.0065	J		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-8-23.5-102820	10/28/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-8-23.5-012121	1/21/2021	<0.0053	U		0.0075	J		<0.0062	U		<0.019	U		0.031			<0.0058	U		<0.0066	U		<0.01	U	
		VMP-8-23.5-050421	5/4/2021	<0.0037	U		<0.032	U		<0.0043	U		0.0015	J		<0.018	U		<0.004	U		<0.0046	U		<0.0072	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U	
		VMP-8-35.5-102820	10/28/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.023	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-8-35.5-012121	1/21/2021	<0.005	U		0.0011	J		<0.0058	U		<0.018	U		0.0072	J		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-8-35.5-050421	5/4/2021	<0.004	U		<0.035	U		<0.0047	U		0.0018	J		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		<0.0098	U		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-9-5-072220-DUP	7/22/2020	0.0037	J		<0.044	U		<0.0059	U		<0.018	U		0.0064	J		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-9-5-102820	10/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.015			<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-9-5-012121	1/21/2021	<0.0049	U		<0.043	U		<0.0058	U		<0.018	U		0.0092	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-9-5-050421	5/4/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		0.0063	J		<0.0046	U		<0.0052	U		<0.008	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	<0.0052	U		0.0014	J		<0.006	U		<0.019	U		0.11			<0.0056	U		<0.0064	U		<0.01	U	
		VMP-9-11.5-102820	10/28/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-9-11.5-012121	1/21/2021	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.029			<0.0056	U		<0.0064	U		<0.01	U	
		VMP-9-11.5-050421	5/4/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		0.0054	J		<0.0046	U		<0.0053	U		<0.0082	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	<0.0051	U		0.022	J		<0.0059	U		<0.018	U		0.018			<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-9-25.5-102820	10/28/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-9-25.5-012121	1/21/2021	<0.005	U		0.0086	J		<0.0058	U		<0.018	U		0.038			<0.0055	U		<0.0062	U		0.0007	J	
		VMP-9-25.5-050421	5/4/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		<0.019	U		<0.0045	U		<0.0051	U		<0.0079	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	<0.0052	U		0.0028	J		<0.006	U		<0.019	U		0.022	J		0.0022	J		0.0018	J		<0.01	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.0051	U		0.022	J		<0.006	U		<0.019	U		0.04			0.011			0.0038	J		<0.0099	U	
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		<0.021	U	UJ	<0.0049	U		<0.0055	U		<0.0086	U	
		VMP-18-8.5-012621	1/26/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.003	J		<0.0056	U		<0.0063	U		<0.0099	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	0.0017	J		<0.042	U		<0.0055	U		0.0028	J		0.0045	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-19-5-110420	11/4/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.019			<0.0057	U		<0.0065	U		<0.01	U	
		VMP-19-5-012621	1/26/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-19-5-051121	5/11/2021	<0.0039	U		<0.034	U		<0.0045	U		<0.014	U		0.0061	J		<0.0042	U		<0.0048	U		<0.0075	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.0065	J		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-20-5-112420	11/24/2020	<0.0043	U		0.0017	J	J	<0.005	U		<0.016	U		0.01	J	J	<0.0047	U		<0.0053	U		<0.0083	U	
		VMP-20-5-012521	1/25/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	J	U	<0.005	U		<0.0057	U		<0.0089	U	
		VMP-20-5-050721	5/7/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U	UJ	<0.0043	U		<0.0049	U		<0.0076	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.005	U		0.0027	J		<0.0058	U		0.0028	J		<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-20-10-110220	11/2/2020	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		0.0081	J	J	<0.005	U		<0.0057	U		<0.0089	U	
		VMP-20-10-012521	1/25/2021	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.022	J	U	<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-20-10-050721	5/7/2021	<0.0038	U		<0.033	U		<0.0044	U		<0.014	U		<0.018	U	UJ	<0.0041	U		<0.0047	U		<0.0073	U	
	25 ft	VMP-20-25-072320	7/23/2020	<0.0047	U		0.0015	J		<0.0054	U		0.0016	J		0.0065	J		0.0045	J		0.0031	J		<0.009	U	
		VMP-20-25-110220	11/2/2020	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		0.015	J	J	<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-20-25-012521	1/25/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	J	U	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-20-25-050721	5/7/2021	<0.0038	U		<0.034	U		<0.0045	U		<0.014	U		<0.018	U	UJ	<0.0042	U		<0.0048	U		<0.0074	U	
		VMP-20-25-050721-DUP	5/7/2021	<0.0038	U		<0.033	U		<0.0044	U		<0.014	U		0.004	J		<0.0041	U		<0.0047	U		<0.0073	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	<0.0051	U		<0.045	U		<0.0059	U		<0.018	U		<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-21-5-102920	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-21-5-012521	1/25/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	J	U	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-21-5-050321	5/3/2021	<0.0043	U		<0.038	U		<0.005	U		<0.016	U		<0.02	U		<0.0047	U		<0.0054	U		<0.0084	U	
	10 ft	VMP-21-10-072420	7/24/2020	<0.0046	U		<0.04	U		<0.0053	U		<0.016	U		<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U	
		VMP-21-10-102920	10/29/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-21-10-012521	1/25/2021	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.0077	J		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	J	U	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-21-10-050321	5/3/2021	<0.0043	U		<0.037	U		<0.005	U		<0.015	U		<0.02	U		<0.0047	U		<0.0053	U		<0.0082	U	
		VMP-21-10-060321-R	6/3/2021	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		0.015	J		0.0015	J		<0.0055	U		<0.0086	U	
	25 ft	VMP-21-25-072420	7/24/2020	<0.0053	U		<0.046	U		<0.0061	U		<0.019	U		<0.01	U		<0.0058	U		<0.0065	U		<0.01	U	
		VMP-21-25-102920	10/29/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-21-25-012521	1/25/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	J	U	<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-21-25-050321	5/3/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		<0.021	U		<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-21-25-050321-DUP	5/3/2021	<0.0043	U		<0.038	U		<0.005	U		<0.016	U		<0.02	U		<0.0047	U		<0.0053	U		<0.0083	U	
	33 ft	VMP-21-33-072420	7/24/2020	<0.0052	U		0.0081	J		<0.0061	U		<0.019	U		0.014			<0.0057	U		<0.0065	U		<0.01	U	
		VMP-21-33-102920	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-21-33-012521	1/25/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	J	U	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-21-33-050321	5/3/2021	<0.0046	U		<0.04	U		<0.0053	U		<0.016	U		<0.022	U		<0.005	U		<0.0056	U		<0.0088	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	<0.0052	U		0.0027	J		<0.006	U		<0.019	U		0.0033	J		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-22-5-110520	11/5/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.0092			<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-22-5-012621	1/26/2021	<0.0054	U		<0.047	U		<0.0063	U		<0.02	U		<0.026	U	UJ	<0.0059	U		<0.0067	U		<0.01	U	
		VMP-22-5-050321	5/3/2021	<0.0046	U		<0.04	U		<0.0054	U		0.0032	J		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
	10 ft	VMP-22-10-072320	7/23/2020	<0.0049	U		<0.043	U		<0.0057	U		0.001	J		0.0016	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-22-10-110520	11/5/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-22-10-012621	1/26/2021	<0.0051	U		0.0011	J		<0.0059	U		<0.018	U		<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-22-10-050321	5/3/2021	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		<0.022	U		<0.005	U		<0.0056	U		<0.0088	U	
	18 ft	VMP-22-18-072320	7/23/2020	<0.0054	U		0.0034	J		<0.0064	U		0.0018	J		<0.01	U		<0.006	U		<0.0068	U		<0.01	U	
		VMP-22-18-110520	11/5/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-22-18-012621	1/26/2021	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		<0.025	U	UJ	<0.0057	U		<0.0065	U		<0.01	U	
		VMP-22-18-050321	5/3/2021	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		<0.021	U		<0.0048	U		<0.0055	U		<0.0085	U	
	38 ft	VMP-22-38-110520	11/5/2020	<0.005	U		<0.044	U		<0.0058	U		0.012	J		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-22-38-012621	1/26/2021	<0.0056	U		0 00089	J		<0.0065	U		<0.02	U		<0.026	U	UJ	<0.0061	U		<0.0069	U		<0.011	U	
		VMP-22-38-050321	5/3/2021	<0.044	U		<0.38	U		<0.051	U		<0.16	U		<0.21	U		<0.048	U		<0.054	U		<0.085	U	
		VMP-22-38-060321-R	6/3/2021	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		0.014	J		<0.0051	U		<0.0058	U		<0.009	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	<0.0051	U		0.12			<0.0059	U		0.0074	J		0.034			0.001	J		0.00098	J		<0.0098	U	
		VMP-23-5-102920	10/29/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-23-5-012121	1/21/2021	<0.0052	U		0.0021	J		<0.0061	U		<0.019	U		0.028			<0.0057	U		<0.0065	U		<0.01	U	
		VMP-23-5-050721	5/7/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U		<0.0046	U		<0.0052	U		<0.008	U	
	10 ft	VMP-23-10-072320	7/23/2020	<0.0054	U		<0.047	U		<0.0063	U		<0.02	U		0.0039	J		<0.0059	U		<0.0067	U		<0.01	U	
		VMP-23-10-102920	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-23-10-012121	1/21/2021	<0.0051	U		0.0067	J		<0.006	U		<0.018	U		0.01	J		<0.0056	U		<0.0063	U		<0.0099	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.0053	U		<0.046	U		<0.0062	U		<0.019	U		0.0048	J		<0.0058	U		<0.0066	U		<0.01	U	
		VMP-23-25-102920	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-23-25-012121	1/21/2021	<0.005	U		0.0038	J		<0.0059	U		<0.018	U		0.032			<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-23-25-050721	5/7/2021	<0.0038	U		<0.034	U		<0.0045	U		0.0012	J		<0.018	U		<0.0042	U		<0.0048	U		<0.0074	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.0049	U		0.0078	J		<0.0058	U		<0.018	U		<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-24-5-102920	10/29/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.012		J	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-24-5-012121	1/21/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.79			<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-24-5-051121	5/11/2021	<0.0038	U		<0.033	U		<0.0044	U		<0.014	U		<0.018	U		<0.0042	U		<0.0047	U		<0.0074	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.0049	U		0.0019	J		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-24-10-102920	10/29/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-24-10-022521	2/25/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-24-10-051121	5/11/2021	<0.0035	U		<0.031	U		<0.0041	U		<0.013	U		0.0033	J		<0.0039	U		<0.0044	U		<0.0068	U	
		VMP-24-10-051121-DUP	5/11/2021	<0.0036	U		<0.031	U		<0.0042	U		<0.013	U		0.0039	J		<0.0039	U		<0.0044	U		<0.0069	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.0046	U		0.004	J		<0.0054	U		<0.017	U		<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-24-22-102920	10/29/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-24-22-012121	1/21/2021	<0.0047	U		<0.042	U		<0.0055	U		<0.017	U		<0.022	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-24-22-051121	5/11/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		0.0066	J		<0.0044	U		<0.005	U		<0.0077	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.0052	U		0.0025	J		<0.006	U		<0.019	U		0.0064	J		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-24-34-102920	10/29/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.017		J	0 00073	J		<0.0063	U		<0.0099	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-24-34-012121	1/21/2021	<0.0053	U		0.011	J		<0.0062	U		0.011	J		<0.025	U		<0.0058	U		<0.0066	U		0.002	J	
		VMP-24-34-051121	5/11/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		0.0042	J		<0.0043	U		<0.0049	U		<0.0076	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.0011	J		0.0056	J		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-32-5-110420	11/4/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.0095	J		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-32-5-012621	1/26/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.0059	J	J	<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-32-5-051221	5/12/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	10 ft	VMP-32-10-072920	7/29/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.0083	J		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-32-10-110420	11/4/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.014			<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-32-10-012621	1/26/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-32-10-051221	5/12/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U		<0.0046	U		<0.0052	U		<0.008	U	
		VMP-32-10-051221-DUP	5/12/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	20 ft	VMP-32-20-072920	7/29/2020	<0.0049	U		<0.043	U		<0.0058	U		<0.018	U		0.0045	J		<0.0054	U		0.0014	J		<0.0095	U	
		VMP-32-20-110420	11/4/2020	<0.0051	U		<0.045	U		<0.0059	U		<0.018	U		0.0077	J		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-32-20-012621	1/26/2021	<0.0053	U		0 00098	J		<0.0062	U		<0.019	U		<0.025	U	UJ	<0.0058	U		<0.0066	U		<0.01	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0051	U		0.0011	J		<0.006	U		<0.019	U		0.0057	J	J	<0.0056	U		<0.0064	U		<0.0099	U	
	30 ft	VMP-32-30-072920	7/29/2020	<0.0053	U		<0.046	U		<0.0061	U		0.0012	J		0.0048	J		<0.0058	U		<0.0065	U		<0.01	U	
		VMP-32-30-110420	11/4/2020	<0.0051	U		0.004	J		<0.0059	U		<0.018	U		<0.0096	U		0.0012	J		0.002	J		<0.0098	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.0056	U		<0.049	U		<0.0065	U		<0.02	U		<0.011	U		<0.0061	U		<0.0069	U		<0.011	U	
		VMP-32-30-012621	1/26/2021	<0.005	U		0 00085	J		<0.0059	U		<0.018	U		0.0051	J	J	<0.0055	U		<0.0062	U		<0.0097	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.0014	J		<0.0054	U		0.0009	J		<0.0096	U	
		VMP-42-10-110520	11/5/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-42-10-012921	1/29/2021	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.024	U		0.0022	J		<0.0063	U		<0.0098	U	
		VMP-42-10-050521	5/5/2021	<0.004	U		<0.035	U		<0.0047	U		<0.015	U		0.0053	J	J	<0.0044	U		<0.005	U		<0.0078	U	
	20 ft	VMP-42-20-072820	7/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.013			<0.0053	U		<0.006	U		<0.0093	U	
		VMP-42-20-110520	11/5/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.02			<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-42-20-012921	1/29/2021	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		<0.025	U		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-42-20-050521	5/5/2021	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		0.011	J	J	<0.0049	U		<0.0056	U		<0.0087	U	
	30 ft	VMP-42-30-072820	7/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.015			<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-42-30-110520	11/5/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-42-30-012921	1/29/2021	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-42-30-050521	5/5/2021	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		0.006	J	J	<0.0049	U		<0.0056	U		<0.0087	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		0.0073	J		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-43-10-110320	11/3/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.017	J	J	<0.0057	U		<0.0065	U		<0.01	U	
		VMP-43-10-012621	1/26/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-43-10-050521	5/5/2021	<0.0044	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0085	U	
	20 ft	VMP-43-20-072820	7/28/2020	<0.0054	U		<0.048	U		<0.0063	U		<0.02	U		0.0081	J		<0.0059	U		<0.0067	U		<0.01	U	
		VMP-43-20-110320	11/3/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.021			<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-43-20-012621	1/26/2021	<0.0048	U		0.0011	J		<0.0056	U		0.0013	J		<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-43-20-050521	5/5/2021	<0.004	U		<0.035	U		<0.0047	U		<0.015	U		<0.019	U		<0.0044	U		<0.005	U		<0.0078	U	
	30 ft	VMP-43-30-072820	7/28/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.0065	J		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-43-30-110320	11/3/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.016			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-43-30-022521	2/25/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.008	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-43-30-050521	5/5/2021	<0.0044	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0085	U	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.0047	U		<0.042	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U	
	20 ft	VMP-44-20-072820	7/28/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.0028	J		<0.0055	U		<0.0062	U		<0.0096	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	<0.0054	U		<0.047	U		<0.0062	U		0.0016	J		0.13			<0.0059	U		<0.0066	U		<0.01	U	
		VMP-45-10-110520	11/5/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-45-10-012621	1/26/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-45-10-060321	6/3/2021	<0.0044	U		<0.038	U		<0.0051	U		0.0011	J		0.013	J		<0.0048	U		<0.0054	U		<0.0085	U	
	20 ft	VMP-45-20-072820	7/28/2020	<0.0054	U		<0.047	U		<0.0063	U		<0.02	U		0.0047	J		<0.0059	U		<0.0067	U		<0.01	U	
		VMP-45-20-110520	11/5/2020	<0.0049	U		<0.043	U		0.0009	J		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-45-20-012621	1/26/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-45-20-050521	5/5/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	30 ft	VMP-45-30-072820	7/28/2020	<0.0058	U		<0.051	U		<0.0068	U		0.0026	J		0.0093	J		<0.0064	U		<0.0072	U		<0.011	U	
		VMP-45-30-110520	11/5/2020	<0.0047	U		0.0014	J		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-45-30-012621	1/26/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-45-30-050521	5/5/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		0.011	J		<0.0043	U		<0.0048	U		<0.0075	U	
		VMP-45-30-050521-DUP	5/5/2021	<0.004	U		<0.035	U		<0.0046	U		<0.014	U		<0.019	U		<0.0044	U		<0.0049	U		<0.0077	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	0.0072			<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-47-5-110220	11/2/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.023		J	<0.0053	U		<0.006	U		<0.0093	U	
		VMP-47-5-012221	1/22/2021	<0.005	U		<0.044	U		<0.0059	U		<0.018	ND,UJ	UJ	0.0058	J		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-47-5-050621	5/6/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		<0.019	U		<0.0045	U		<0.0051	U		<0.0079	U	
	10 ft	VMP-47-10-072720	7/27/2020	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0048	U		<0.042	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-47-10-110220	11/2/2020	<0.0046	U		0.0021	J		<0.0054	U		<0.017	U		0.014	J	J	<0.005	U		<0.0057	U		<0.0089	U	
		VMP-47-10-012221	1/22/2021	<0.0049	U		0.01	J		<0.0057	U		<0.018	ND,UJ	UJ	0.0061	J		0 00072	J		<0.006	U		<0.0094	U	
		VMP-47-10-050621	5/6/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	20 ft	VMP-47-20-072720	7/27/2020	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-47-20-110220	11/2/2020	<0.0052	U		0.004	J		<0.0061	U		<0.019	U		0.059		J	<0.0057	U		<0.0065	U		<0.01	U	
		VMP-47-20-012221	1/22/2021	<0.0048	U		<0.042	U		<0.0057	U		<0.018	ND,UJ	UJ	0.018	J		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0048	U		0.0019	J		<0.0056	U		<0.017	ND,UJ	UJ	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-47-20-050621	5/6/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	30 ft	VMP-47-30-072720	7/27/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U	
		VMP-47-30-110220	11/2/2020	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		0.012	J	J	<0.005	U		<0.0057	U		<0.0089	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		0.0094	J	J	<0.0049	U		<0.0055	U		<0.0086	U	
		VMP-47-30-012221	1/22/2021	<0.005	U		0.0032	J		<0.0059	U		<0.018	ND,UJ	UJ	<0.024	U		<0.0055	U		<0.0063	U		<0.0098	U	
		VMP-47-30-050621	5/6/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
		VMP-47-30-050621-DUP	5/6/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	0.00093	J		<0.039	U		<0.0052	U		0.0017	J		<0.0086	U		0 00056	J		<0.0056	U		<0.0087	U	
		VMP-48-5-110220	11/2/2020	<0.0046	U		<0.04	U		<0.0053	U		<0.017	U		0.008	J	J	<0.005	U		<0.0057	U		<0.0088	U	
		VMP-48-5-012521	1/25/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		1.3			<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-48-5-050721	5/7/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U		<0.0046	U		<0.0052	U		<0.008	U	
	10 ft	VMP-48-10-073020	7/30/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-48-10-110220	11/2/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.0094	J	J	0 00044	J		<0.0064	U		<0.01	U	
		VMP-48-10-012521	1/25/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.0088	J		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-48-10-050721	5/7/2021	<0.0043	U		<0.038	U		<0.0051	U		<0.016	U		0.012	J		<0.0048	U		<0.0054	U		<0.0084	U	
	20 ft	VMP-48-20-110220	11/2/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		<0.024	U	UJ	<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-48-20-012521	1/25/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0094	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U	
	30 ft	VMP-48-30-073020	7/30/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-48-30-110220	11/2/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		0.012	J	J	<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-48-30-012521	1/25/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.023	J	U	<0.0053	U		<0.006	U		<0.0094	U	
		VMP-48-30-050721	5/7/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		<0.019	U		<0.0045	U		<0.0051	U		<0.0079	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0053	U		<0.046	U		<0.0062	U		<0.019	U		0.0064	J		<0.0058	U		<0.0066	U		<0.01	U	
		VMP-49-5-110420	11/4/2020	<0.0051	U		<0.045	U		<0.0059	U		<0.018	U		<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-49-5-012521	1/25/2021	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		0.03			<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-49-5-050321	5/3/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
	10 ft	VMP-49-10-072420	7/24/2020	<0.0056	U		<0.049	U		<0.0065	U		<0.02	U		0.0084	J		<0.0061	U		<0.0069	U		<0.011	U	
		VMP-49-10-110420	11/4/2020	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-49-10-012521	1/25/2021	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		0.0075	J		<0.0049	U		<0.0055	U		<0.0086	U	
		VMP-49-10-050321	5/3/2021	<0.0044	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0085	U	
	20 ft	VMP-49-20-072420	7/24/2020	<0.0047	U		0.018	J		<0.0055	U		<0.017	U		0.03			<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-49-20-110420	11/4/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-49-20-012521	1/25/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-49-20-050321	5/3/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-49-20-060321-R	6/3/2021	<0.0042	U		0.0012	J		<0.0049	U		<0.015	U		0.047			<0.0046	U		<0.0052	U		<0.0082	U	
	30 ft	VMP-49-30-072420	7/24/2020	<0.0051	U		<0.045	U		<0.0059	U		<0.018	U		<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-49-30-110420	11/4/2020	<0.4	U		<1.4	U		<0.46	U		<1.4	U		<0.76	U		<0.44	U		<0.49	U		<0.77	U	
		VMP-49-30-012521	1/25/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	U		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-49-30-050321	5/3/2021	<0.0043	U		<0.038	U		<0.005	U		<0.016	U		<0.02	U		<0.0047	U		<0.0053	U		<0.0083	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-50-5-110520	11/5/2020	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U	
		VMP-50-5-012621	1/26/2021	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		<0.024	U	UJ	<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-50-5-050721	5/7/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U		<0.0046	U		<0.0052	U		<0.008	U	
	10 ft	VMP-50-10-072720	7/27/2020	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		0.013			<0.0051	U		<0.0058	U		<0.009	U	
		VMP-50-10-110520	11/5/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-50-10-012621	1/26/2021	<0.005	U		0.0013	J		<0.0058	U		0.0023	J		<0.024	U	UJ	<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-50-10-050721	5/7/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		<0.02	U		<0.0046	U		<0.0053	U		<0.0082	U	
	20 ft	VMP-50-20-072720	7/27/2020	<0.0048	U		0.0074	J		<0.0057	U		<0.018	U		0.023			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-50-20-110520	11/5/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0052	U		<0.046	U		0.0014	J		<0.019	U		0.0082	J		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-50-20-022521	2/25/2021	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.011	J		<0.0058	U		<0.0065	U		<0.01	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-50-20-050721	5/7/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
		VMP-50-20-050721-DUP	5/7/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	30 ft	VMP-50-30-072720	7/27/2020	<0.05	U		<0.43	U		<0.058	U		<0.18	U		<0.094	U		<0.054	U		<0.061	U		<0.096	U	
		VMP-50-30-110520	11/5/2020	<0.0098	U		<0.086	U		<0.011	U		<0.036	U		<0.019	U		<0.011	U		<0.012	U		<0.019	U	
		VMP-50-30-012621	1/26/2021	<0.099	U		<0.87	U		<0.12	U		<0.36	U		<0.47	U	UJ	0.015	J		<0.12	U		<0.19	U	
		VMP-50-30-050721	5/7/2021	<0.08	U		<0.7	U		<0.093	U		<0.29	U		<0.38	U		<0.087	U		<0.099	U		<0.15	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	<0.0047	U		0.14			<0.0055	U		<0.017	U		0.034			<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-51-5-103020	10/30/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.024	U	UJ	<0.0055	U		<0.0063	U		<0.0098	U	
		VMP-51-5-012221	1/22/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-51-5-050421	5/4/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		0.0029	J		<0.0046	U		<0.0052	U		<0.008	U	
	10 ft	VMP-51-10-072320	7/23/2020	<0.0046	U		0.043			<0.0054	U		<0.017	U		0.018			0 00078	J		<0.0058	U		<0.009	U	
		VMP-51-10-103020	10/30/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-51-10-012221	1/22/2021	<0.0051	U		0 00097	J		<0.006	U		<0.018	U		0.007	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-51-10-050421	5/4/2021	<0.0043	U		<0.038	U		<0.0051	U		<0.016	U		0.0047	J		<0.0048	U		<0.0054	U		<0.0084	U	
	20 ft	VMP-51-20-072320	7/23/2020	<0.0052	U		<0.046	U		<0.006	U		0.0012	J		0.0049	J		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-51-20-103020	10/30/2020	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		<0.025	U	UJ	<0.0057	U		<0.0064	U		<0.01	U	
		VMP-51-20-012221	1/22/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.0087	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-51-20-050421	5/4/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		0.0045	J		<0.0045	U		<0.0051	U		<0.0079	U	
	30 ft	VMP-51-30-072320	7/23/2020	<0.0048	U		0.0025	J		<0.0056	U		0.0024	J		0.0035	J		<0.0053	U		<0.006	U		<0.0093	U	
		VMP-51-30-103020	10/30/2020	<0.0054	U		0.0018	J		<0.0062	U		<0.019	U		0.033		J	<0.0059	U		<0.0066	U		<0.01	U	
		VMP-51-30-012221	1/22/2021	<0.0052	U		0.0017	J		<0.0061	U		<0.019	U		0.008	J		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-51-30-050421	5/4/2021	<0.0044	U		<0.039	U		<0.0052	U		<0.016	U		0.005	J	J	<0.0049	U		<0.0055	U		<0.0086	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	<0.0046	U		<0.041	U		<0.0054	U		0.012	J		0.0068	J		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0035	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-52-5-102920	10/29/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-52-5-012221	1/22/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	ND,UJ	UJ	0.066		J	<0.0053	U		<0.006	U		<0.0094	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	ND,UJ	UJ	0.0086	J	J	<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-52-5-050421	5/4/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	10 ft	VMP-52-10-102920	10/29/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.018		J	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-52-10-012221	1/22/2021	<0.0048	U		0.0021	J		<0.0056	U		<0.017	ND,UJ	UJ	0.0077	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-52-10-050421	5/4/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.0054	U		<0.047	U		<0.0062	U		<0.019	U		0.0032	J		<0.0059	U		<0.0066	U		<0.01	U	
		VMP-52-20-102920	10/29/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-52-20-012221	1/22/2021	<0.0048	U		<0.042	U		<0.0055	U		<0.017	ND,UJ	UJ	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-52-20-050421	5/4/2021	<0.0042	U		<0.036	U		<0.0048	U		0.0048	J		0.0055	J		<0.0046	U		<0.0052	U		<0.008	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.0053	U		<0.046	U		<0.0062	U		0.0016	J		0.0048	J		<0.0058	U		<0.0066	U		<0.01	U	
		VMP-52-30-102920	10/29/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-52-30-012221	1/22/2021	<0.0046	U		<0.04	U		<0.0053	U		<0.017	ND,UJ	UJ	0.0062	J		<0.005	U		<0.0057	U		<0.0088	U	
		VMP-52-30-050421	5/4/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		0.0046	J		<0.0043	U		<0.0049	U		<0.0076	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.0047	U		<0.042	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-53-5-102820	10/28/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	U		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-53-5-012121	1/21/2021	<0.0048	U		0.0014	J		<0.0056	U		<0.017	U		0.022	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-53-5-050421	5/4/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		0.0046	J		<0.0044	U		<0.005	U		<0.0077	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.0053	U		<0.046	U		<0.0062	U		0.0016	J		<0.01	U		<0.0058	U		<0.0066	U		<0.01	U	
		VMP-53-10-102820	10/28/2020	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-53-10-012121	1/21/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.032			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-53-10-050421	5/4/2021	0.0025	J		<0.033	U		<0.0044	U		<0.014	U		0.006	J		<0.0041	U		<0.0047	U		<0.0073	U	
		VMP-53-10-050421-DUP	5/4/2021	0.0037	J		<0.035	U		<0.0047	U		<0.014	U		0.0033	J		<0.0044	U		<0.005	U		<0.0077	U	
		VMP-53-10-060321-R	6/3/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		0.011	J		<0.0049	U		<0.0055	U		<0.0086	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		0.0068	J		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-53-20-102820	10/28/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		<0.024	U		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-53-20-012121	1/21/2021	<0.0049	U		0.0052	J		<0.0058	U		<0.018	U		0.045			0.04			0.037			<0.0095	U	
		VMP-53-20-050421	5/4/2021	<0.0043	U		<0.038	U		<0.0051	U		<0.016	U		0.0048	J		<0.0048	U		<0.0054	U		<0.0084	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.0048	U		0.0012	J		<0.0056	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-53-30-102820	10/28/2020	<0.0048	U		<0.042	U		<0.0055	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-53-30-012121	1/21/2021	<0.0048	U		0.0058	J		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-53-30-050421	5/4/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		0.0049	J		<0.0043	U		<0.0049	U		<0.0076	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	<0.005	U		0.042	J		<0.0059	U		0.004	J		0.018			<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-54-5-102820	10/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U	
		VMP-54-5-012821	1/28/2021	<0.0044	U		<0.038	U		<0.0051	U		<0.016	U		0.0034	J		<0.0048	U		<0.0054	U		<0.0084	U	
		VMP-54-5-050421	5/4/2021	<0.0038	U		<0.034	U		<0.0045	U		<0.014	U		<0.018	U		<0.0042	U		<0.0048	U		<0.0074	U	
	10 ft	VMP-54-10-072220	7/22/2020	<0.0053	U		<0.046	U		<0.0062	U		<0.019	U		<0.01	U		<0.0058	U		<0.0066	U		<0.01	U	
		VMP-54-10-102820	10/28/2020	<0.0049	U		<0.043	U		<0.0058	U		<0.018	U		<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-54-10-012821	1/28/2021	<0.0046	U		<0.04	U		<0.0053	U		<0.016	U		<0.022	U		<0.005	U		<0.0056	U		<0.0088	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.022	U		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-54-10-050421	5/4/2021	<0.0038	U		<0.034	U		<0.0045	U		0 00094	J		<0.018	U		<0.0042	U		<0.0048	U		<0.0074	U	
	20 ft	VMP-54-20-072220	7/22/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U	
		VMP-54-20-102820	10/28/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-54-20-012821	1/28/2021	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		0.0057	J		<0.0051	U		<0.0058	U		<0.0091	U	
		VMP-54-20-050421	5/4/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	30 ft	VMP-54-30-072220	7/22/2020	<0.0052	U		0.0023	J		<0.006	U		0.0026	J		0.017			<0.0057	U		0.0056	J		<0.01	U	
		VMP-54-30-102820	10/28/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-54-30-012821	1/28/2021	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		0.0037	J		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-54-30-050421	5/4/2021	<0.0038	U		<0.033	U		<0.0044	U		0.0022	J		<0.018	U		<0.0041	U		<0.0047	U		<0.0073	U	
		VMP-54-30-050421-DUP	5/4/2021	<0.0037	U		<0.032	U		<0.0043	U		<0.013	U		<0.018	U		<0.004	U		<0.0046	U		<0.0072	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	<0.0051	U		0.0041	J		<0.006	U		<0.019	U		0.015			0.0073			<0.0064	U		<0.0099	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.0055	U		<0.048	U		<0.0064	U		<0.02	U		0.005	J		0.0051	J		<0.0068	U		<0.011	U	
		VMP-56-10-110320	11/3/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.018	J	J	<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-56-10-012121	1/21/2021	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		0.015	J		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-56-10-050521	5/5/2021	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		0.0071	J	J	<0.0051	U		<0.0058	U		<0.009	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-56-25-110320	11/3/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-56-25-012121	1/21/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.016	J		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.005	U		0 00088	J		<0.0058	U		<0.018	U		0.019	J		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-56-25-050521	5/5/2021	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		0.0062	J	J	<0.0051	U		<0.0058	U		<0.009	U	
		VMP-56-25-050521-DUP	5/5/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		0.0068	J	J	<0.0046	U		<0.0053	U		<0.0082	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	<0.0048	U		<0.042	U		<0.0056	U		0.0012	J		0.0025	J		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-62-5-102920	10/29/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-62-5-012221	1/22/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	ND,UJ	UJ	0.0045	J		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-62-5-050621	5/6/2021	<0.0039	U		<0.034	U		<0.0046	U		0.0027	J		0.0046	J		<0.0043	U		<0.0049	U		<0.0076	U	
	10 ft	VMP-62-10-072720	7/27/2020	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U	
		VMP-62-10-102920	10/29/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.012			<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-62-10-012221	1/22/2021	<0.0049	U		<0.043	U		<0.0057	U		<0.018	ND,UJ	UJ	<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-62-10-050621	5/6/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	20 ft	VMP-62-20-072720	7/27/2020	<0.0046	U		0.035	J		<0.0054	U		<0.017	U		0.069			<0.005	U		<0.0057	U		<0.0089	U	
		VMP-62-20-102920	10/29/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-62-20-050621	5/6/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	30 ft	VMP-62-30-072720	7/27/2020	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-62-30-102920	10/29/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.012			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-62-30-012221	1/22/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	ND,UJ	UJ	0.036			<0.0046	U		<0.0053	U		<0.0082	U	
		VMP-62-30-050621	5/6/2021	<0.0039	U		<0.034	U		<0.0046	U		0.0013	J		0.0062	J		<0.0043	U		<0.0049	U		<0.0076	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			5.6			0.31			0.22						1.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		0.016			<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-63-5-110320	11/3/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.018			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-63-5-012921	1/29/2021	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.023	U		<0.0053	U		<0.006	U		<0.0093	U	
		VMP-63-5-050521	5/5/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		0.0094	J		<0.0049	U		<0.0055	U		<0.0086	U	
	10 ft	VMP-63-10-072820	7/28/2020	<0.0053	U		<0.046	U		<0.0062	U		0.001	J		0.016			<0.0058	U		<0.0066	U		<0.01	U	
		VMP-63-10-110320	11/3/2020	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-63-10-012921	1/29/2021	<0.021	U		<0.18	U		<0.024	U		<0.076	U		<0.099	U		0.019	J		<0.026	U		<0.04	U	
		VMP-63-10-050521	5/5/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		<0.02	U		<0.0046	U		<0.0052	U		<0.0081	U	
	20 ft	VMP-63-20-072820	7/28/2020	<0.0048	U		<0.042	U		<0.0056	U		0.001	J		0.013			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-63-20-110320	11/3/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-63-20-012921	1/29/2021	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		<0.025	U		0.0052	J		<0.0064	U		<0.01	U	
		VMP-63-20-050521	5/5/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
	30 ft	VMP-63-30-072820	7/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.0091	J		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		0.014			<0.005	U		<0.0057	U		<0.0089	U	
		VMP-63-30-110320	11/3/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.015			<0.0052	U		0.0014	J		<0.0093	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.012			<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-63-30-012921	1/29/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0054	U		<0.0062	U		<0.0096	U	
		VMP-63-30-050521	5/5/2021	<0.0044	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0085	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	<0.0048	U		0.0024	J		<0.0056	U		<0.018	U		0.013			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-64-5-103020	10/30/2020	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		0.008	J		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-64-5-012221	1/22/2021	<0.0049	U		0.0066	J		<0.0057	U		<0.018	ND,UJ	UJ	0.0054	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-64-5-050621	5/6/2021	<0.0043	U		<0.038	U		<0.0051	U		0.0013	J		0.006	J		<0.0048	U		<0.0054	U		<0.0084	U	
	10 ft	VMP-64-10-072420	7/24/2020	<0.0049	U		0.0018	J		<0.0058	U		<0.018	U		<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-64-10-103020	10/30/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-64-10-012221	1/22/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	ND,UJ	UJ	0.01	J		<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-64-10-050621	5/6/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		0.0075	J		<0.0046	U		<0.0053	U		<0.0082	U	
	20 ft	VMP-64-20-072420	7/24/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0056	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0049	U		<0.043	U		<0.0058	U		<0.018	U		0.011			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-64-20-103020	10/30/2020	<0.0046	U		<0.04	U		<0.0053	U		<0.017	U		<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U	
		VMP-64-20-012221	1/22/2021	<0.0047	U		<0.041	U		<0.0055	U		<0.017	ND,UJ	UJ	0.012	J		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-64-20-050621	5/6/2021	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		0.0048	J		<0.0051	U		<0.0058	U		<0.009	U	

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-1-5-110220	11/2/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-1-5-012921	1/29/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-1-5-050521	5/5/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-1-8.5-110220	11/2/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-1-8.5-012921	1/29/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-1-8.5-050521	5/5/2021	<0.0045	U		<0.047	U		<0.0038	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	<0.0053	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-1-23.5-110220	11/2/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-1-23.5-012921	1/29/2021	<0.0053	U		<0.055	U		0.0036	J		<0.021	U		0.0026	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0054	U		<0.056	U		0.0027	J		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	<0.0052	U		<0.054	U		<0.0045	U		0.0013	J		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-1-38.5-110220	11/2/2020	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-1-38.5-012921	1/29/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-1-38.5-050521	5/5/2021	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-2-5-110420	11/4/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-2-5-012521	1/25/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-2-5-050721	5/7/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-2-8.5-110420	11/4/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-2-8.5-012521	1/25/2021	0.0028	J		<0.055	U		0.0032	J		<0.021	U		0.007	J		0.0026	J		<0.0053	U		<0.018	U	
		VMP-2-8.5-050721	5/7/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
	22 ft	VMP-2-22-072420	7/24/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-2-22-110420	11/4/2020	0.13			<0.52	U		1.5			<0.2	U		71			<0.06	U		<0.05	U		<0.044	U	
		VMP-2-22-012521	1/25/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-2-22-050721	5/7/2021	<0.0043	U		<0.045	U		0.00096	J		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	<0.0054	U		<0.057	U		0.002	J		<0.022	U		0.0072	J		0.007			<0.0054	U		<0.019	U	
		VMP-3-5-110420	11/4/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-3-5-012521	1/25/2021	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-3-5-051021	5/10/2021	<0.0042	U		<0.043	U		<0.0036	U		<0.017	U		<0.012	U		0 00042	J		<0.0042	U		<0.015	U	
	10 ft	VMP-3-10-072920	7/29/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		0.0024	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-3-10-110420	11/4/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		0.002	J		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-3-10-051021	5/10/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		0 00027	J		<0.004	U		<0.014	U	
	22 ft	VMP-3-22-072920	7/29/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		0.004	J		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-3-22-110420	11/4/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-3-22-012521	1/25/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-3-22-051021	5/10/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
		VMP-3-22-051021-DUP	5/10/2021	0.0022	J		<0.042	U		0.005			<0.016	U		0.0026	J		0 00045	J		<0.0041	U		<0.014	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	<0.042	U		<0.44	U		<0.036	U		<0.17	U		0.12			<0.051	U		<0.042	U		<0.15	U	
		VMP-3-31.5-110420	11/4/2020	<5.2	U		<54	U		48			<21	U		7300			4.8	J		<5.2	U		<4.5	U	
		VMP-3-31.5-012521	1/25/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-3-31.5-051021	5/10/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-4-5-103020	10/30/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-4-5-012821	1/28/2021	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-4-5-050521	5/5/2021	<0.0043	U		<0.044	U		<0.0037	U		<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U	
	12 ft	VMP-4-12-073020	7/30/2020	<0.0051	U		<0.054	U		0.0064			<0.02	U		0.012	J		<0.0062	U		<0.0051	U		<0.018	U	
		VMP-4-12-103020	10/30/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-4-12-012821	1/28/2021	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
		VMP-4-12-050521	5/5/2021	<0.0046	U		<0.048	U		0.0056			<0.018	U		0.015			<0.0055	U		<0.0046	U		<0.016	U	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-4-23.5-103020	10/30/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.005	U		<0.052	U		0.00082	J		<0.02	U		0.0051	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-4-23.5-012821	1/28/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-4-23.5-050521	5/5/2021	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-5-5-103020	10/30/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-5-5-012221	1/22/2021	0.00058	J		<0.054	U		<0.0044	U		<0.02	U		<0.015	U		0 00085	J		<0.0051	U		<0.018	U	
		VMP-5-5-050621	5/6/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-5-12.5-103020	10/30/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-5-12.5-012221	1/22/2021	0.00057	J		<0.062	U		<0.0051	U		<0.024	U		0.0046	J		0 00039	J		<0.0059	U		<0.021	U	
		VMP-5-12.5-050621	5/6/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
		VMP-5-12.5-050621-DUP	5/6/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
	31 ft	VMP-5-31-072320	7/23/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-5-31-103020	10/30/2020	<0.0056	U		0.026	J	J	0.0032	J		<0.022	U		0.0065	J		<0.0067	U		<0.0056	U		<0.02	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0053	U		0.24		J	<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-5-31-012221	1/22/2021	<0.005	U		0.0084	J		<0.0043	U		0 00069	J		<0.014	U		0.0007	J		<0.005	U		<0.018	U	
		VMP-5-31-050621	5/6/2021	0.0093			<0.043	U		0.0077			<0.016	U		0.28			0.0017	J		<0.0041	U		<0.014	U	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-6-5-102920	10/29/2020	<0.0051	U		<0.053	U		0.0029	J		<0.02	U		0.023			<0.0061	U		<0.005	U		<0.018	U	
		VMP-6-5-012921	1/29/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-6-5-050621	5/6/2021	<0.0045	U		<0.047	U		0.0022	J		<0.018	U		0.0046	J		<0.0054	U		<0.0045	U		<0.016	U	
	10 ft	VMP-6-10-072220	7/22/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-6-10-102920	10/29/2020	0.00084	J		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-6-10-050621	5/6/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		0.002	J		0 00073	J		<0.0043	U		<0.015	U	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.0056	U		<0.058	U		<0.0048	U		<0.022	U		0.0045	J		<0.0067	U		<0.0056	U		<0.02	U	
		VMP-6-31.5-102920	10/29/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		0.002	J		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-6-31.5-012921	1/29/2021	<0.0051	U		<0.054	U		0.0049			<0.02	U		0.0089	J		<0.0062	U		<0.0051	U		<0.018	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0056	U		<0.059	U		0.0044	J		<0.023	U		0.008	J		<0.0068	U		<0.0056	U		<0.02	U	
		VMP-6-31.5-050621	5/6/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-7-5-110420	11/4/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-7-5-012621	1/26/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-7-5-050521	5/5/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0045	U		0.0012	J		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-7-13.5-110420	11/4/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		0.0017	J		0 00052	J		<0.0054	U		<0.019	U	
		VMP-7-13.5-012621	1/26/2021	<0.0051	U		<0.053	U		0.00093	J		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-7-13.5-050521	5/5/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		0.0034	J		<0.0053	U		<0.0044	U		<0.016	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-7-29.5-110420	11/4/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-7-29.5-012621	1/26/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-7-29.5-050521	5/5/2021	<0.0042	U		<0.043	U		<0.0036	U		<0.017	U		<0.012	U		<0.005	U		<0.0042	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-8-5-102820	10/28/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-8-5-012121	1/21/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-8-5-050421	5/4/2021	<0.0037	U		<0.039	U		<0.0032	U		<0.015	U		<0.011	U		<0.0045	U		<0.0037	U		<0.013	U	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-8-9.5-102820	10/28/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-8-9.5-012121	1/21/2021	<0.0051	U		<0.053	U		0.0033	J		<0.02	U		0.011	J		<0.0061	U		<0.005	U		<0.018	U	
		VMP-8-9.5-050421	5/4/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	<0.0048	U		<0.05	U		<0.0042	U		0 00088	J		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-8-23.5-102820	10/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-8-23.5-012121	1/21/2021	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		0.0036	J		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-8-23.5-050421	5/4/2021	<0.0038	U		<0.04	U		<0.0033	U		<0.015	U		<0.011	U		<0.0046	U		<0.0038	U		<0.013	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-8-35.5-102820	10/28/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-8-35.5-012121	1/21/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-8-35.5-050421	5/4/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.0053	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-9-5-102820	10/28/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		0.0008	J		<0.017	U	
		VMP-9-5-012121	1/21/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.014	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-9-5-050421	5/4/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-9-11.5-102820	10/28/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-9-11.5-012121	1/21/2021	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		0.0063	J		<0.0064	J	U	<0.0053	U		<0.019	U	
		VMP-9-11.5-050421	5/4/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		0.007	J		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-9-25.5-102820	10/28/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-9-25.5-102820-DUP	10/28/2020	0.0012	J		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-9-25.5-012121	1/21/2021	<0.0052	U		<0.054	U		0.0011	J		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-9-25.5-050421	5/4/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		0.0019	J		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-9-38.5-012121-DUP	1/21/2021	0.0024	J		<0.055	U		0.0032	J		<0.021	U		0.0054	J		0 00081	J		<0.0053	U		<0.019	U	
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
		VMP-18-8.5-012621	1/26/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0024	J		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-19-5-110420	11/4/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-19-5-012621	1/26/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0052	J		<0.0061	U		<0.005	U		<0.018	U	
		VMP-19-5-051121	5/11/2021	<0.004	U		<0.042	U		<0.0034	U		<0.016	U		0.0027	J		<0.0048	U		<0.004	U		<0.014	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0019	J		0.0006	J		<0.005	U		<0.018	U	
		VMP-20-5-112420	11/24/2020	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U	
		VMP-20-5-012521	1/25/2021	<0.0048	U		<0.05	U		0.0016	J		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-20-5-050721	5/7/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-20-10-110220	11/2/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-20-10-012521	1/25/2021	<0.0049	U		<0.051	U		0.0017	J		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-20-10-050721	5/7/2021	<0.0039	U		<0.04	U		<0.0033	U		<0.016	U		<0.011	U		<0.0047	U		<0.0039	U		<0.014	U	
	25 ft	VMP-20-25-072320	7/23/2020	0.0099			<0.05	U		0.0054			0.0033	J		0.0038	J		0.0046	J		<0.0048	U		<0.017	U	
		VMP-20-25-110220	11/2/2020	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		0.0038	J		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-20-25-012521	1/25/2021	<0.005	U		<0.052	U		0.001	J		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-20-25-050721	5/7/2021	<0.004	U		<0.041	U		<0.0034	U		<0.016	U		<0.011	U		<0.0048	U		<0.004	U		<0.014	U	
		VMP-20-25-050721-DUP	5/7/2021	<0.0039	U		<0.04	J	U	<0.0033	U		<0.016	U		<0.011	U		<0.0047	U		<0.0039	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-21-5-102920	10/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-21-5-012521	1/25/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-21-5-050321	5/3/2021	<0.0045	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	10 ft	VMP-21-10-072420	7/24/2020	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-21-10-102920	10/29/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-21-10-012521	1/25/2021	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-21-10-050321	5/3/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U	
		VMP-21-10-060321-R	6/3/2021	0.0058			0.012	J		0.026			<0.018	U		0.034			<0.0055	U		<0.0046	U		<0.016	U	
	25 ft	VMP-21-25-072420	7/24/2020	<0.0054	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-21-25-102920	10/29/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		0.0011	J		<0.019	U	
		VMP-21-25-012521	1/25/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		0.0011	J		<0.0052	U		<0.018	U	
		VMP-21-25-050321	5/3/2021	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-21-25-050321-DUP	5/3/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U	
	33 ft	VMP-21-33-072420	7/24/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		0.0091	J		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-21-33-102920	10/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-21-33-012521	1/25/2021	0.0014	J		<0.052	U		0.0021	J		<0.02	U		0.0025	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-21-33-050321	5/3/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	<0.0053	U		<0.055	U		<0.0046	U		0.0019	J		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-22-5-110520	11/5/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-22-5-012621	1/26/2021	<0.0056	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U	
		VMP-22-5-050321	5/3/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		0.0012	J		<0.0057	U		<0.0048	U		<0.017	U	
	10 ft	VMP-22-10-072320	7/23/2020	<0.0051	U		<0.053	U		0.0034	J		<0.02	U		0.0096	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-22-10-110520	11/5/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		0.0048	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-22-10-012621	1/26/2021	0.0011	J		<0.055	U		0.0021	J		<0.021	U		0.0039	J		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-22-10-050321	5/3/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		0.0015	J		<0.0056	U		<0.0047	U		<0.016	U	
	18 ft	VMP-22-18-072320	7/23/2020	<0.0056	U		<0.059	U		<0.0048	U		<0.022	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U	
		VMP-22-18-110520	11/5/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0027	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-22-18-012621	1/26/2021	0.00069	J		<0.056	U		<0.0046	U		<0.022	U		0.0024	J		<0.0065	U		<0.0054	J	U	<0.019	U	
		VMP-22-18-050321	5/3/2021	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		0.0016	J		0.0011	J		<0.0046	U		<0.016	U	
	38 ft	VMP-22-38-110520	11/5/2020	0.001	J		<0.054	U		<0.0044	U		<0.021	U		0.0071	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-22-38-012621	1/26/2021	<0.0057	U		<0.06	U		<0.0049	U		<0.023	U		0.0027	J		<0.0069	U		<0.0057	U		<0.02	U	
		VMP-22-38-050321	5/3/2021	<0.045	U		<0.47	U		<0.039	U		<0.18	U		<0.13	U		<0.054	U		<0.045	U		<0.16	U	
		VMP-22-38-060321-R	6/3/2021	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		0.0022	J		<0.0058	U		<0.0048	U		<0.017	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	0.042			<0.055	U		0.087			0.0024	J		0.097			0.0013	J		<0.0052	U		<0.018	U	
		VMP-23-5-102920	10/29/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-23-5-012121	1/21/2021	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-23-5-050721	5/7/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	10 ft	VMP-23-10-072320	7/23/2020	0.00065	J		<0.058	U		<0.0048	U		<0.022	U		0.0023	J		0 00078	J		<0.0056	U		<0.02	U	
		VMP-23-10-102920	10/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	J	U	<0.018	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-23-10-012121	1/21/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		0.0082	J		0.017			<0.0055	U		<0.019	U	
		VMP-23-25-102920	10/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-23-25-012121	1/21/2021	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-23-25-050721	5/7/2021	<0.004	U		<0.041	U		<0.0034	U		<0.016	U		<0.011	U		<0.0048	U		<0.004	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-24-5-102920	10/29/2020	0.00095	J		<0.055	U		0.0026	J		<0.021	U		0.007	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-24-5-012121	1/21/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-24-5-051121	5/11/2021	<0.0039	U		<0.041	U		<0.0034	U		<0.016	U		<0.011	U		<0.0047	U		<0.0039	U		<0.014	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-24-10-102920	10/29/2020	<0.005	U		<0.052	U		0.0013	J		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-24-10-022521	2/25/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0045	J		<0.0061	U		<0.005	U		<0.018	U	
		VMP-24-10-051121	5/11/2021	<0.0036	U		<0.038	U		<0.0031	U		<0.014	U		<0.01	U		<0.0044	U		<0.0036	U		<0.013	U	
		VMP-24-10-051121-DUP	5/11/2021	<0.0037	U		<0.039	U		<0.0032	U		<0.015	U		<0.011	U		<0.0044	U		<0.0037	U		<0.013	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-24-22-102920	10/29/2020	<0.0049	U		<0.051	U		0.0011	J		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-24-22-012121	1/21/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0028	J		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-24-22-051121	5/11/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-24-34-102920	10/29/2020	<0.0053	U		<0.055	U		0.0018	J		<0.021	U		0.0041	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-24-34-102920-DUP	10/29/2020	0.00071	J		<0.055	U		<0.0045	U		<0.021	U		0.003	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-24-34-012121	1/21/2021	0.00072	J		<0.057	U		0.0016	J		<0.022	U		0.0033	J		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-24-34-051121	5/11/2021	<0.0041	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.0041	U		<0.014	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	<0.0053	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-32-5-110420	11/4/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-32-5-012621	1/26/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		0.0025	J		0 00046	J		<0.0052	U		<0.018	U	
		VMP-32-5-051221	5/12/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	10 ft	VMP-32-10-072920	7/29/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-32-10-110420	11/4/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-32-10-012621	1/26/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-32-10-051221	5/12/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
		VMP-32-10-051221-DUP	5/12/2021	0.0018	J		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		0.0016	J		<0.0041	U		<0.014	U	
	20 ft	VMP-32-20-072920	7/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0018	J		0.0061			<0.0051	U		<0.018	U	
		VMP-32-20-110420	11/4/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-32-20-012621	1/26/2021	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		0.0042	J		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		0.004	J		<0.0064	U		<0.0053	U		<0.019	U	
	30 ft	VMP-32-30-072920	7/29/2020	<0.0054	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-32-30-110420	11/4/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.0058	U		<0.06	U		<0.005	U		<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U	
		VMP-32-30-012621	1/26/2021	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		0.003	J		<0.0062	U		<0.0052	U		<0.018	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	<0.0051	U		0.0025	J		<0.0044	U		<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U	
		VMP-42-10-110520	11/5/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-42-10-012921	1/29/2021	0.022			<0.054	U		0.32			<0.021	U		0.78			<0.0063	U		<0.0052	U		<0.018	U	
		VMP-42-10-050521	5/5/2021	<0.0042	U		<0.043	U		<0.0036	U		<0.017	U		<0.012	U		<0.005	U		<0.0042	U		<0.015	U	
	20 ft	VMP-42-20-072820	7/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-42-20-110520	11/5/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-42-20-012921	1/29/2021	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-42-20-050521	5/5/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U	
	30 ft	VMP-42-30-072820	7/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-42-30-110520	11/5/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-42-30-012921	1/29/2021	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		0.0026	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-42-30-050521	5/5/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-43-10-110320	11/3/2020	<0.0054	U		<0.056	J	U	<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-43-10-012621	1/26/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-43-10-050521	5/5/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	20 ft	VMP-43-20-072820	7/28/2020	<0.0056	U		<0.058	U		<0.0048	U		<0.022	U		0.21			<0.0067	U		<0.0056	U		<0.02	U	
		VMP-43-20-110320	11/3/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		0.003	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-43-20-012621	1/26/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-43-20-050521	5/5/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.005	U		<0.0042	U		<0.015	U	
	30 ft	VMP-43-30-072820	7/28/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		0 00066	J		<0.0054	U		<0.019	U	
		VMP-43-30-110320	11/3/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0035	J		<0.0061	U		<0.005	U		<0.018	U	
		VMP-43-30-022521	2/25/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-43-30-050521	5/5/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0071	J		<0.0059	U		<0.0049	U		<0.017	U	
	20 ft	VMP-44-20-072820	7/28/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-45-10-110520	11/5/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-45-10-012621	1/26/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-45-10-060321	6/3/2021	<0.0045	U		<0.047	U		0.0011	J		<0.018	U		0.011	J		<0.0054	U		<0.0045	U		<0.016	U	
	20 ft	VMP-45-20-072820	7/28/2020	<0.0056	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U	
		VMP-45-20-110520	11/5/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0035	J		<0.0061	U		0.0013	J		<0.018	U	
		VMP-45-20-012621	1/26/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-45-20-050521	5/5/2021	<0.0041	U		0.0052	J		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	30 ft	VMP-45-30-072820	7/28/2020	<0.006	U		<0.063	U		<0.0052	U		<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U	
		VMP-45-30-110520	11/5/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-45-30-012621	1/26/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0016	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-45-30-050521	5/5/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		0.0072	J		<0.0048	U		<0.004	U		<0.014	U	
		VMP-45-30-050521-DUP	5/5/2021	<0.0041	U		<0.043	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.0041	U		<0.014	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-47-5-110220	11/2/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-47-5-012221	1/22/2021	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-47-5-050621	5/6/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
	10 ft	VMP-47-10-072720	7/27/2020	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-47-10-110220	11/2/2020	<0.0048	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-47-10-012221	1/22/2021	<0.005	U		<0.052	U		0.00098	J		<0.02	U		0.0046	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-47-10-050621	5/6/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	20 ft	VMP-47-20-072720	7/27/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-47-20-110220	11/2/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		0.022			<0.0065	U		<0.0054	U		<0.019	U	
		VMP-47-20-012221	1/22/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0049	U		<0.051	U		0.0014	J		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-47-20-050621	5/6/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		0.0018	J		<0.0049	U		<0.004	U		<0.014	U	
	30 ft	VMP-47-30-072720	7/27/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-47-30-110220	11/2/2020	<0.0048	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
		VMP-47-30-012221	1/22/2021	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-47-30-050621	5/6/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
		VMP-47-30-050621-DUP	5/6/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		0.0028	J		<0.005	U		<0.0041	U		<0.014	U	

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene) 600			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE) 3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-48-5-110220	11/2/2020	<0.0047	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U	
		VMP-48-5-012521	1/25/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-48-5-050721	5/7/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	10 ft	VMP-48-10-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-48-10-110220	11/2/2020	<0.0053	U		0.024	J		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-48-10-012521	1/25/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-48-10-050721	5/7/2021	<0.0045	U		<0.047	U		<0.0038	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	20 ft	VMP-48-20-110220	11/2/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-48-20-012521	1/25/2021	0.002	J		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
	30 ft	VMP-48-30-073020	7/30/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-48-30-110220	11/2/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-48-30-012521	1/25/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-48-30-050721	5/7/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-49-5-110420	11/4/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		0.0018	J		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-49-5-012521	1/25/2021	<0.0049	U		<0.051	U		0.00071	J		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-49-5-050321	5/3/2021	<0.0048	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
	10 ft	VMP-49-10-072420	7/24/2020	<0.0057	U		<0.06	U		0.0012	J		<0.023	U		<0.016	U		<0.0069	U		<0.0057	U		<0.02	U	
		VMP-49-10-110420	11/4/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-49-10-012521	1/25/2021	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		0.01	J		<0.0055	U		<0.0046	U		<0.016	U	
		VMP-49-10-050321	5/3/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	20 ft	VMP-49-20-072420	7/24/2020	<0.0049	U		<0.051	U		0.0039	J		<0.019	U		0.022			<0.0058	U		<0.0049	U		<0.017	U	
		VMP-49-20-110420	11/4/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		0.029			<0.0062	U		<0.0052	U		<0.018	U	
		VMP-49-20-012521	1/25/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-49-20-050321	5/3/2021	<0.0048	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-49-20-060321-R	6/3/2021	<0.0044	U		<0.045	U		<0.0038	U		<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U	
	30 ft	VMP-49-30-072420	7/24/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-49-30-110420	11/4/2020	<0.41	U		<4.3	U		0.61			<1.6	U		120			<0.49	U		<0.41	U		<0.36	U	
		VMP-49-30-012521	1/25/2021	<0.0053	U		<0.055	U		0.0022	J		<0.021	U		0.0032	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-49-30-050321	5/3/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		0.006	J		<0.0053	U		<0.0044	U		<0.016	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-50-5-110520	11/5/2020	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-50-5-012621	1/26/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-50-5-050721	5/7/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	10 ft	VMP-50-10-072720	7/27/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-50-10-110520	11/5/2020	<0.005	U		<0.052	U		<0.0043	U		0.0046	J		0.012	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-50-10-012621	1/26/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-50-10-050721	5/7/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
	20 ft	VMP-50-20-072720	7/27/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.011	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-50-20-110520	11/5/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		0.0049	J		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-50-20-022521	2/25/2021	<0.0054	U		<0.056	U		<0.0047	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-50-20-050721	5/7/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
		VMP-50-20-050721-DUP	5/7/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	30 ft	VMP-50-30-072720	7/27/2020	0.19			<0.53	U		1.2			<0.2	U		9			<0.061	U		<0.051	U		<0.18	U	
		VMP-50-30-110520	11/5/2020	<0.01	U		<0.1	U		0.014			<0.04	U		1.9			<0.012	U		<0.01	U		<0.036	U	
		VMP-50-30-012621	1/26/2021	0.52			<1.1	U		3.9			<0.41	U		17			<0.12	U		<0.1	U		<0.36	U	
		VMP-50-30-050721	5/7/2021	0.37			<0.86	U		2.6			<0.33	U		9.6			<0.099	U		<0.082	U		<0.29	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene) 600			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE) 3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	0.00088	J		<0.051	U		0.0012	J		<0.019	U		0.016			<0.0058	U		<0.0049	U		<0.017	U	
		VMP-51-5-103020	10/30/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-51-5-012221	1/22/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-51-5-050421	5/4/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	10 ft	VMP-51-10-072320	7/23/2020	0.0023	J		<0.05	U		0.0032	J		<0.019	U		0.0077	J		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-51-10-103020	10/30/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-51-10-012221	1/22/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-51-10-050421	5/4/2021	<0.0045	U		<0.047	U		<0.0038	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	20 ft	VMP-51-20-072320	7/23/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-51-20-103020	10/30/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-51-20-012221	1/22/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0022	J		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-51-20-050421	5/4/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
	30 ft	VMP-51-30-072320	7/23/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-51-30-103020	10/30/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-51-30-012221	1/22/2021	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-51-30-050421	5/4/2021	<0.0046	U		<0.048	U		<0.0039	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	0.00087	J		<0.05	U		0.002	J		0.001	J		0.003	J		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-52-5-102920	10/29/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-52-5-012221	1/22/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0036	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		0.0026	J		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-52-5-050421	5/4/2021	<0.004	U		<0.042	U		0.0065			<0.016	U		0.033			<0.0049	U		<0.004	U		<0.014	U	
	10 ft	VMP-52-10-102920	10/29/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-52-10-012221	1/22/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-52-10-050421	5/4/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-52-20-102920	10/29/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-52-20-012221	1/22/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.013	J		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-52-20-050421	5/4/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		0.0014	J		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-52-30-102920	10/29/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-52-30-012221	1/22/2021	<0.0047	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U	
		VMP-52-30-050421	5/4/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		0.00087	J		<0.017	U	
		VMP-53-5-102820	10/28/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-53-5-012121	1/21/2021	0.00087	J		<0.051	U		0.0033	J		<0.02	U		0.019			0.0026	J		<0.0049	U		<0.017	U	
		VMP-53-5-050421	5/4/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		0.003	J		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-53-10-102820	10/28/2020	0.0018	J		<0.049	U		0.0042			<0.019	U		0.0075	J		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-53-10-012121	1/21/2021	<0.005	U		<0.052	U		0.00091	J		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-53-10-050421	5/4/2021	<0.0039	U		<0.04	U		<0.0033	U		<0.016	U		<0.011	U		<0.0047	U		<0.0039	U		<0.014	U	
		VMP-53-10-050421-DUP	5/4/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
		VMP-53-10-060321-R	6/3/2021	<0.0046	U		<0.048	U		0.0011	J		<0.018	U		0.0035	J		<0.0055	U		<0.0046	U		<0.016	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-53-20-102820	10/28/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-53-20-012121	1/21/2021	0.0024	J		<0.053	U		0.0025	J		<0.02	U		0.0034	J		0.0051	J		<0.0051	U		<0.018	U	
		VMP-53-20-050421	5/4/2021	<0.0045	U		<0.047	U		<0.0038	U		<0.018	U		0.0032	J		<0.0054	U		<0.0045	U		<0.016	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.005	U		<0.052	U		0.00068	J		<0.02	U		0.0022	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-53-30-102820	10/28/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-53-30-012121	1/21/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0032	J		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-53-30-050421	5/4/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		0.0064	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-54-5-102820	10/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-54-5-012821	1/28/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
		VMP-54-5-050421	5/4/2021	<0.004	U		<0.041	U		<0.0034	U		<0.016	U		<0.011	U		<0.0048	U		<0.004	U		<0.014	U	
	10 ft	VMP-54-10-072220	7/22/2020	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-54-10-102820	10/28/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		0 00063	J		<0.0051	U		<0.018	U	
		VMP-54-10-012821	1/28/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-54-10-050421	5/4/2021	<0.004	U		<0.041	U		<0.0034	U		<0.016	U		<0.011	U		<0.0048	U		<0.004	U		<0.014	U	
	20 ft	VMP-54-20-072220	7/22/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-54-20-102820	10/28/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-54-20-012821	1/28/2021	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-54-20-050421	5/4/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	30 ft	VMP-54-30-072220	7/22/2020	0.0046	J		<0.056	U		0.01			<0.021	U		0.018			0.022			<0.0053	U		<0.019	U	
		VMP-54-30-102820	10/28/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		0 00044	J		<0.0049	U		<0.017	U	
		VMP-54-30-012821	1/28/2021	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-54-30-050421	5/4/2021	<0.0039	U		<0.04	U		0.0034			<0.016	U		0.0085	J		<0.0047	U		<0.0039	U		<0.014	U	
		VMP-54-30-050421-DUP	5/4/2021	<0.0038	U		<0.04	U		<0.0033	U		<0.015	U		0.0021	J		<0.0046	U		<0.0038	U		<0.013	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	0.14			<0.055	U		0.12			<0.021	U		0.022			0.0012	J		<0.0053	U		<0.019	U	
		VMP-56-10-072320-DUP	7/23/2020	0.15			<0.059	U		0.12			<0.023	U		0.02			0 00096	J		<0.0057	U		<0.02	U	
		VMP-56-10-110320	11/3/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-56-10-012121	1/21/2021	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-56-10-050521	5/5/2021	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-56-25-110320	11/3/2020	<0.0053	U		<0.055	U		<0.0045	U	UJ	<0.021	U		0.025			<0.0063	U		<0.0053	U		<0.019	U	
		VMP-56-25-110320-DUP	11/3/2020	0.007			<0.055	U		0.014		J	<0.021	U		0.031			<0.0063	U		<0.0053	U		<0.019	U	
		VMP-56-25-012121	1/21/2021	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		0.0086	J		0.002	J		<0.0052	U		<0.018	U	
		VMP-56-25-012121-DUP	1/21/2021	0.0013	J		<0.053	U		0.0022	J		<0.02	U		0.0098	J		0.0017	J		<0.0051	U		<0.018	U	
		VMP-56-25-050521	5/5/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-56-25-050521-DUP	5/5/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-62-5-102920	10/29/2020	0.06			<0.052	U		0.062			<0.02	U		0.013	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-62-5-012221	1/22/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-62-5-050621	5/6/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		0.0041	J		<0.0049	U		<0.004	U		<0.014	U	
	10 ft	VMP-62-10-072720	7/27/2020	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
		VMP-62-10-102920	10/29/2020	<0.005	U		<0.052	U		<0.0043	U		0 00076	J		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-62-10-012221	1/22/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0056	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-62-10-050621	5/6/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	20 ft	VMP-62-20-072720	7/27/2020	<0.0048	U		<0.049	U		<0.0041	U		<0.019	U		0.042			<0.0057	U		<0.0048	U		<0.017	U	
		VMP-62-20-102920	10/29/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-62-20-050621	5/6/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	30 ft	VMP-62-30-072720	7/27/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		0.0082			<0.017	U	
		VMP-62-30-102920	10/29/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-62-30-012221	1/22/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
		VMP-62-30-050621	5/6/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			600						3700		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	<0.0051	U		<0.053	U		0.0017	J		<0.02	U		0.0034	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-63-5-110320	11/3/2020	0.0012	J		<0.053	U		0.004	J		<0.02	U		0.0037	J		<0.0061	U		<0.005	U		<0.018	U	
		VMP-63-5-012921	1/29/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-63-5-050521	5/5/2021	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U	
	10 ft	VMP-63-10-072820	7/28/2020	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-63-10-110320	11/3/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-63-10-012921	1/29/2021	0.15			<0.22	U		2			<0.086	U		4.1			<0.026	U		<0.022	U		<0.076	U	
		VMP-63-10-050521	5/5/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	20 ft	VMP-63-20-072820	7/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-63-20-110320	11/3/2020	<0.0052	U		<0.054	U		0.0023	J		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-63-20-012921	1/29/2021	0.034			<0.056	U		0.33			<0.021	U		0.28			0 00097	J		<0.0054	U		<0.019	U	
		VMP-63-20-050521	5/5/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
	30 ft	VMP-63-30-072820	7/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0034	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		0.0034	J		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-63-30-110320	11/3/2020	0.00086	J		<0.052	U		0.0025	J		<0.02	U		0.0045	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-63-30-110320-DUP	11/3/2020	0.00075	J		<0.052	U		0.0021	J		<0.02	U		0.005	J		<0.0059	U		<0.005	U		<0.017	U	
		VMP-63-30-012921	1/29/2021	<0.0051	U		<0.054	U		<0.0044	U		<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U	
		VMP-63-30-050521	5/5/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	<0.005	U		<0.052	U		0.0013	J		<0.02	U		0.0068	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-64-5-103020	10/30/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-64-5-012221	1/22/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-64-5-050621	5/6/2021	<0.0045	U		<0.047	U		<0.0038	U		0.0015	J		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U	
	10 ft	VMP-64-10-072420	7/24/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-64-10-103020	10/30/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-64-10-012221	1/22/2021	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-64-10-050621	5/6/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
	20 ft	VMP-64-20-072420	7/24/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-64-20-103020	10/30/2020	<0.0047	U		<0.049	U		<0.0041	U		<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U	
		VMP-64-20-012221	1/22/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		0.0029	J		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-64-20-050621	5/6/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		0.0018	J		0 00049	J		<0.0048	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	0.0084	J		<0 0058	U		<0.0081	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-1-5-110220	11/2/2020	0.0092	J		<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-1-5-012921	1/29/2021	0.023			<0 0056	U		<0.0049	U		<0 0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-1-5-050521	5/5/2021	0.0064	J		<0 0053	U		<0.0046	U		<0 0074	U		<0.0074	U		<0.0032	U		<0.0041	J	U	<0.032	U	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	0.011	J		0.0013	J		<0.0086	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-1-8.5-110220	11/2/2020	0.0049	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0037	U		0.00049	J		<0.037	U	
		VMP-1-8.5-012921	1/29/2021	0.0025	J		<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-1-8.5-050521	5/5/2021	0.0071	J		<0 0054	U		<0.0047	U		<0 0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	0.0098	J		<0 0064	U		<0.0089	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U	
		VMP-1-23.5-110220	11/2/2020	0.0057	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		0.00063	J		<0.038	U	
		VMP-1-23.5-012921	1/29/2021	0.011	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		0.0011	J		<0.038	U	
		VMP-1-23.5-012921-DUP	1/29/2021	0.0056	J		<0 0065	U		<0.0056	U		<0 0091	U		<0.009	U		<0.0039	U		0.0011	J		<0.039	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	0.0076	J		<0 0062	U		<0.0086	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-1-38.5-110220	11/2/2020	0.01	J		<0 0056	U		<0.0049	U		<0 0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-1-38.5-012921	1/29/2021	0.0065	J		<0 0057	U		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-1-38.5-050521	5/5/2021	0.004	J		<0 0055	U		<0.0047	U		<0 0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	0.017			<0 0056	U		<0.0049	U		<0 0079	U		0.012			<0.0034	U		<0.0043	U		<0.034	U	
		VMP-2-5-110420	11/4/2020	0.0082	J		<0 0064	U		<0.0056	U		<0.009	U		0.84			<0.0039	U		<0.0049	U		<0.039	U	
		VMP-2-5-012521	1/25/2021	0.0047	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-2-5-050721	5/7/2021	0.0061	J		<0.005	U		<0.0043	U		<0 0069	U		0.0058	J		<0.003	U		<0.0038	U		<0.03	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	0.032			<0 0058	U		<0.0051	U		<0 0082	U		0.0092			<0.0035	U		<0.0045	U		<0.035	U	
		VMP-2-8.5-110420	11/4/2020	0.014			<0.006	U		<0.0052	U		<0 0084	U		0.0066	J		<0.0036	U		0.00048	J		<0.036	U	
		VMP-2-8.5-012521	1/25/2021	0.017			<0 0063	U		<0.0055	U		<0 0088	U		<0.0087	U		<0.0038	U		0.0034	J		<0.038	U	
		VMP-2-8.5-050721	5/7/2021	0.0036	J		<0 0051	U		<0.0044	U		<0 0071	U		0.004	J		<0.003	U		<0.0039	U		<0.03	U	
	22 ft	VMP-2-22-072420	7/24/2020	0.01	J		<0 0063	U		<0.0054	U		<0 0088	U		0.0059	J		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-2-22-110420	11/4/2020	<0.12	U		0.016	J		<0.052	U		<0.084	U		<0.083	U		<0.036	U		<0.046	U		<0.36	U	
		VMP-2-22-012521	1/25/2021	0.0078	J		<0 0062	U		<0.0054	U		<0 0086	U		0.0036	J		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-2-22-050721	5/7/2021	0.0031	J		<0 0052	U		<0.0045	U		<0 0072	U		0.0034	J		<0.0031	U		<0.004	U		<0.031	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	0.006	J		0.023			<0.0091	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-3-5-110420	11/4/2020	0.02			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-3-5-012521	1/25/2021	0.0074	J		<0 0066	U		<0.0057	U		<0 0092	U		<0.0091	U		<0.004	U		0.0011	J		<0.04	U	
		VMP-3-5-051021	5/10/2021	0.012			0.0012	J		<0.0043	U		<0.007	U		<0.0069	U		<0.003	U		0.00044	J		<0.03	U	
	10 ft	VMP-3-10-072920	7/29/2020	0.0096	J		<0 0062	U		<0.0086	U		0 00078	J		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	J	U
		VMP-3-10-110420	11/4/2020	0.014			<0 0066	U		<0.0058	U		<0 0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-3-10-051021	5/10/2021	0.012			0 00042	J		<0.0042	U		<0 0068	U		0.001	J		<0.0029	U		<0.0037	U		<0.029	U	
	22 ft	VMP-3-22-072920	7/29/2020	0.0073	J		<0 0065	J	U	<0.009	U		<0 0091	U		0.02			<0.0039	U		<0.005	U		<0.039	U	
		VMP-3-22-110420	11/4/2020	0.0096	J		<0 0066	U		<0.0058	U		<0 0093	U		0.0015	J		<0.004	U		0.0007	J		<0.04	U	
		VMP-3-22-012521	1/25/2021	0.0088	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		0.0011	J		<0.037	U	
		VMP-3-22-051021	5/10/2021	0.014			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	
		VMP-3-22-051021-DUP	5/10/2021	0.014			0 00061	J		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		0.00033	J		<0.03	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	0.014	J		<0.051	U		<0.07	U		<0.071	U		<0.07	U		<0.03	U		<0.039	U		<0.3	U	
		VMP-3-31.5-110420	11/4/2020	<12	U		18			<5.4	U		<8.6	U		<8.5	U		<3.7	U		<4.7	U		<37	U	
		VMP-3-31.5-012521	1/25/2021	0.0074	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-3-31.5-051021	5/10/2021	0.02			<0 0049	U		<0.0042	U		<0 0068	U		0.0014	J		<0.0029	U		<0.0037	U		<0.029	J	U

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	0.01	J		<0.006	U		<0.0084	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	J	U
		VMP-4-5-073020-DUP	7/30/2020	0.0065	J		<0 0063	U		<0.0088	U		<0 0088	U		<0.0087	U		<0.0038	U		0.001	J		<0.038	U	
		VMP-4-5-103020	10/30/2020	0.0089	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-4-5-012821	1/28/2021	0.0056	J		<0 0056	U		<0.0048	U		<0 0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U	
		VMP-4-5-050521	5/5/2021	0.018			<0 0051	U		<0.0044	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.0039	J	U	<0.031	U	
	12 ft	VMP-4-12-073020	7/30/2020	0.0082	J		<0 0062	U		<0.0086	U		<0 0086	U		<0.0085	U		<0.0037	U		0.0012	J		<0.037	U	
		VMP-4-12-103020	10/30/2020	0.0075	J		<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-4-12-012821	1/28/2021	0.0032	J		<0 0055	U		<0.0047	U		<0 0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U	
		VMP-4-12-050521	5/5/2021	0.0046	J		<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		0.0026	J		<0.033	U	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	0.0075	J		0 00055	J		<0.0087	U		<0 0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-4-23.5-103020	10/30/2020	0.0069	J		<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-4-23.5-103020-DUP	10/30/2020	0.011	J		<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-4-23.5-012821	1/28/2021	0.023			<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-4-23.5-050521	5/5/2021	0.0094	J		<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		<0.0042	J	U	<0.033	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	0.003	J		<0 0063	U		<0.0088	U		<0 0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-5-5-103020	10/30/2020	0.0049	J		<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U	
		VMP-5-5-012221	1/22/2021	0.0071	J		0.0021	J		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		0.00035	J		<0.037	U	
		VMP-5-5-050621	5/6/2021	0.0064	J		<0 0049	U		<0.0042	U		<0 0068	U		0.038			<0.0029	U		<0.0037	U		<0.029	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	0.0044	J		<0 0061	U		<0.0084	U		<0 0085	U		<0.0084	U		<0.0036	U		0.00095	J		<0.037	U	
		VMP-5-12.5-103020	10/30/2020	0.0074	J		0.0017	J		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-5-12.5-012221	1/22/2021	0.023			<0 0071	U		<0.0062	U		<0 0099	U		<0.0098	U		<0.0043	U		0.0016	J		<0.043	U	
		VMP-5-12.5-050621	5/6/2021	2.1		J	<0 0051	U		<0.0044	U		<0 0071	U		<0.007	U		<0.003	U		<0.0039	U		<0.03	U	
		VMP-5-12.5-050621-DUP	5/6/2021	0.54		J	<0 0053	U		<0.0046	U		<0 0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U	
	31 ft	VMP-5-31-072320	7/23/2020	0.0025	J		<0.006	U		<0.0083	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-5-31-072320-DUP	7/23/2020	0.0026	J		<0 0062	U		<0.0086	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-5-31-103020	10/30/2020	0.016			<0 0067	U		<0.0058	U		<0 0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-5-31-103020-DUP	10/30/2020	0.0049	J		<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U	
		VMP-5-31-012221	1/22/2021	0.0072	J		0 00088	J		0.0006	J		0.0014	J		<0.0083	U		<0.0036	U		0.00042	J		<0.036	U	
		VMP-5-31-050621	5/6/2021	0.26			0.0011	J		<0.0043	U		<0 0069	U		0.012			<0.003	U		0.01			<0.03	U	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	<0.013	U		<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-6-5-102920	10/29/2020	0.012			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-6-5-012921	1/29/2021	0.0021	J		<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-6-5-050621	5/6/2021	0.04			<0 0054	U		<0.0047	U		<0 0075	U		<0.0074	U		<0.0032	U		0.00036	J		<0.032	U	
	10 ft	VMP-6-10-072220	7/22/2020	0.0054	J		0.0021	J		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-6-10-102920	10/29/2020	0.035			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-6-10-050621	5/6/2021	0.0082	J		0.0016	J		<0.0045	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.013	J	U	<0 0067	U		<0.0058	U		<0 0094	U		0.0038	J		<0.004	U		<0.0051	U		<0.04	U	
		VMP-6-31.5-102920	10/29/2020	0.015			<0 0058	U		<0.0051	U		<0 0082	U		0.0026	J		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-6-31.5-012921	1/29/2021	0.0046	J		<0 0062	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-6-31.5-012921-DUP	1/29/2021	0.015			<0 0068	U		<0.0059	U		<0 0095	U		<0.0094	U		<0.0041	U		0.001	J		<0.041	U	
		VMP-6-31.5-050621	5/6/2021	0.0067	J		<0 0052	U		<0.0045	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	0.0089	J		<0.006	U		<0.0083	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		0.0012	J		
		VMP-7-5-110420	11/4/2020	0.0071	J		<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-7-5-012621	1/26/2021	0.0073	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-7-5-050521	5/5/2021	0.007	J		<0 0054	U		<0.0047	U		<0 0076	U		<0.0075	U		<0.0032	U		<0.0042	J	U	<0.033	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	0.0088	J		<0 0063	U		<0.0088	U		<0 0088	U		0.0026	J		<0.0038	U		0.00099	J		<0.038	U	
		VMP-7-13.5-110420	11/4/2020	0.014			0.0019	J		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.00049	J		<0.039	U	
		VMP-7-13.5-012621	1/26/2021	0.015			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-7-13.5-050521	5/5/2021	0.0061	J		<0 0053	U		<0.0046	U		<0 0074	U		0.0074			<0.0032	U		0.0012	J		<0.032	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	0.0062	J		<0 0063	U		<0.0088	U		<0 0088	U		0.0099			<0.0038	U		<0.0049	U		<0.038	U	
		VMP-7-29.5-110420	11/4/2020	0.38			<0.006	U		<0.0052	U		<0 0083	U		0.0093			<0.0036	U		0.00052	J		<0.036	U	
		VMP-7-29.5-012621	1/26/2021	0.0031	J		<0 0061	U		<0.0053	U		<0 0085	U		0.016			<0.0036	U		<0.0046	U		<0.037	U	
		VMP-7-29.5-050521	5/5/2021	0.0093	J		<0.005	U		<0.0043	U		<0.007	U		0.012			<0.003	U		<0.0038	U		<0.03	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	0.01	J		<0.006	U		<0.0052	U		<0 0084	U		0.22			<0.0036	U		<0.0046	U		<0.036	U	
		VMP-8-5-102820	10/28/2020	0.0089	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		0.00038	J		<0.037	U	
		VMP-8-5-012121	1/21/2021	0.0095	J		<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-8-5-050421	5/4/2021	0.013			<0 0045	U		<0.0039	U		<0 0063	U		<0.0062	U		<0.0027	U		0.0003	J		<0.027	U	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	<0.012	J	U	<0 0063	U		<0.0054	U		<0 0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-8-9.5-072220-DUP	7/22/2020	0.0051	J		<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-8-9.5-102820	10/28/2020	0.044			<0 0063	U		<0.0054	U		<0 0088	U		<0.0087	U		<0.0038	U		0.00023	J		<0.038	U	
		VMP-8-9.5-012121	1/21/2021	0.009	J		<0 0061	J	U	<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		0.00035	J		<0.037	U	
		VMP-8-9.5-050421	5/4/2021	0.011			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	<0.012	J	U	<0 0058	U		<0.005	U		<0 0081	U		0.016			<0.0035	U		<0.0044	U		<0.035	U	
		VMP-8-23.5-102820	10/28/2020	0.015			<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-8-23.5-012121	1/21/2021	0.017			<0 0066	U		<0.0057	U		<0 0092	U		0.0016	J		<0.0039	U		0.00062	J		<0.04	U	
		VMP-8-23.5-050421	5/4/2021	0.0036	J		<0 0046	U		<0.004	U		<0 0064	U		<0.0063	U		0.002	J		<0.0035	U		<0.028	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.012	U		<0.006	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		0.00042	J		<0.036	U	
		VMP-8-35.5-102820	10/28/2020	0.02			<0 0062	U		<0.0054	U		<0 0087	U		<0.0086	U		<0.0037	U		0.0013	J		<0.038	U	
		VMP-8-35.5-102820-DUP	10/28/2020	0.03			<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-8-35.5-012121	1/21/2021	0.011	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-8-35.5-050421	5/4/2021	0.0045	J		<0.005	U		<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.013	J	U	<0 0064	U		<0.0056	U		<0.009	U		0.0043	J		<0.0038	U		<0.0049	U		<0.039	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.012	J	U	<0 0063	U		<0.0054	U		<0 0088	U		0.057			<0.0038	U		<0.0048	U		<0.038	U	
		VMP-9-5-102820	10/28/2020	0.029			<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-9-5-012121	1/21/2021	0.02			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-9-5-050421	5/4/2021	0.0078	J		<0 0052	U		<0.0045	U		<0 0072	U		0.0026	J		<0.0031	U		<0.004	U		<0.031	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	0.013			<0 0064	U		<0.0055	U		<0 0089	U		0.0011	J		<0.0038	U		0.00098	J		<0.038	U	
		VMP-9-11.5-102820	10/28/2020	0.015			<0 0061	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-9-11.5-012121	1/21/2021	0.0083	J		0.0012	J		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-9-11.5-050421	5/4/2021	0.0028	J		<0 0053	U		<0.0046	U		<0 0073	U		<0.0072	U		<0.0032	U		<0.004	J	U	<0.032	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	0.0064	J		<0 0063	U		<0.0054	U		<0 0088	U		<0.0087	U		<0.0038	U		0.0022	J		<0.038	U	
		VMP-9-25.5-102820	10/28/2020	0.0093	J		<0 0061	U		<0.0053	U		<0 0085	U		0.0012	J		<0.0036	U		0.0011	J		<0.037	U	
		VMP-9-25.5-102820-DUP	10/28/2020	0.0055	J		<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		0.00098	J		<0.036	U	
		VMP-9-25.5-012121	1/21/2021	0.024			<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		0.00082	J		<0.037	U	
		VMP-9-25.5-050421	5/4/2021	0.0049	J		<0 0051	U		<0.0044	U		<0 0071	U		0.0018	J		<0.003	U		<0.0039	U		<0.03	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	0.008	J		0 00049	J		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.0026	J	J	<0.039	U	
		VMP-9-38.5-012121-DUP	1/21/2021	0.027			0.0011	J		<0.0055	U		<0 0089	U		0.0019	J		<0.0038	U		0.023		J	<0.038	U	
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	0.007	J		<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U	
		VMP-18-8.5-012621	1/26/2021	0.0082	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	<0.012	J	U	<0 0059	U		<0.0082	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U	
		VMP-19-5-110420	11/4/2020	0.013	J		<0 0065	U		<0.0056	U		<0 0091	U		0.002	J		<0.0039	U		<0.005	U		<0.039	U	
		VMP-19-5-012621	1/26/2021	0.0051	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		0.0017	J		<0.037	U	
		VMP-19-5-051121	5/11/2021	0.015			<0 0048	U		<0.0042	U		<0 0067	U		<0.0066	U		<0.0029	U		0.00077	J		<0.029	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.012	J	U	0.0016	J		<0.0083	U		<0 0084	U		<0.0083	U		<0.0036	U		0.00092	J		<0.036	U	
		VMP-20-5-112420	11/24/2020	0.018		J	<0 0053	U		<0.0046	U		<0 0074	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U	
		VMP-20-5-012521	1/25/2021	0.0037	J		<0 0057	U		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-20-5-050721	5/7/2021	0.019			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.012	J	U	<0 0061	U		<0.0085	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	J	U
		VMP-20-10-110220	11/2/2020	0.0086	J		<0 0057	U		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-20-10-012521	1/25/2021	0.0034	J		<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		0.006	J	J
		VMP-20-10-050721	5/7/2021	0.0065	J		<0 0047	U		<0.004	U		<0 0065	U		<0.0064	U		<0.0028	U		0.00062	J		<0.028	U	
	25 ft	VMP-20-25-072320	7/23/2020	0.0056	J		0.0076			<0.008	U		<0 0081	U		<0.008	U		<0.0035	U		0.00093	J		<0.035	U	
		VMP-20-25-110220	11/2/2020	0.016			<0 0056	U		<0.0048	U		<0 0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U	
		VMP-20-25-012521	1/25/2021	0.038			<0 0059	U		<0.0052	U		<0 0083	U		0.0028	J		<0.0036	U		0.0021	J		<0.036	U	
		VMP-20-25-050721	5/7/2021	0.016			<0 0048	U		<0.0041	U		<0 0066	U		<0.0066	U		<0.0029	U		<0.0036	U		<0.029	U	
		VMP-20-25-050721-DUP	5/7/2021	0.021			<0 0047	U		<0.004	U		<0 0065	U		<0.0064	U		<0.0028	U		<0.0036	U		<0.028	J	U

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	0.01	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-21-5-102920	10/29/2020	0.0044	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-21-5-012521	1/25/2021	0.0043	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-21-5-050321	5/3/2021	0.017			<0 0054	U		<0.0046	U		<0 0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U	
	10 ft	VMP-21-10-072420	7/24/2020	0.02			0.0015	J		<0.0049	U		<0 0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-21-10-102920	10/29/2020	0.0055	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-21-10-012521	1/25/2021	0.0099	J		<0 0065	U		<0.0056	U		<0 0091	U		<0.009	U		<0.0039	U		0.001	J		<0.039	U	
		VMP-21-10-012521-DUP	1/25/2021	0.0054	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-21-10-050321	5/3/2021	0.0023	J		<0 0053	U		<0.0046	U		<0 0074	U		0.62			<0.0032	U		0.00054	J		<0.032	U	
		VMP-21-10-060321-R	6/3/2021	0.012			<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		0.019			<0.033	U	
	25 ft	VMP-21-25-072420	7/24/2020	0.012	J		0.0031	J		<0.0057	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-21-25-102920	10/29/2020	0.0058	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-21-25-012521	1/25/2021	0.0082	J		0.0038	J		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-21-25-050321	5/3/2021	0.0038	J		<0 0056	U		<0.0048	U		<0 0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U	
		VMP-21-25-050321-DUP	5/3/2021	0.0084	J		<0 0053	U		<0.0046	U		<0 0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U	
	33 ft	VMP-21-33-072420	7/24/2020	0.013			<0 0065	U		<0.0056	U		<0 0091	U		0.0037	J		<0.0039	U		0.0021	J		<0.039	U	
		VMP-21-33-102920	10/29/2020	0.0084	J		0.0018	J		<0.0053	U		<0 0085	U		0.0021	J		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-21-33-012521	1/25/2021	0.0081	J		0 00089	J		<0.0052	U		<0 0083	U		0.0042	J		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-21-33-050321	5/3/2021	0.0056	J		<0 0056	U		<0.0049	U		<0 0079	U		0.003	J		<0.0034	U		<0.0043	U		<0.034	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	0.0092	J		<0 0064	U		<0.0088	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-22-5-110520	11/5/2020	0.0077	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		0.00046	J		<0.036	U	
		VMP-22-5-012621	1/26/2021	0.0083	J		<0 0067	U		<0.0058	U		<0 0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-22-5-050321	5/3/2021	0.0017	J		0.0011	J		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
	10 ft	VMP-22-10-072320	7/23/2020	0.009	J		<0 0061	U		<0.0084	U		<0 0085	U		0.014			<0.0036	U		<0.0047	U		<0.037	U	
		VMP-22-10-110520	11/5/2020	0.0052	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-22-10-012621	1/26/2021	0.012	J		<0 0063	U		<0.0054	U		<0 0088	U		<0.0087	U		<0.0038	U		<0.0048	J	U	<0.038	U	
		VMP-22-10-050321	5/3/2021	0.0049	J		<0 0056	U		<0.0049	U		<0 0079	U		<0.0078	U		<0.0034	U		0.00053	J		<0.034	U	
	18 ft	VMP-22-18-072320	7/23/2020	0.0021	J		<0 0068	U		<0.0094	U		<0 0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U	
		VMP-22-18-110520	11/5/2020	0.0053	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-22-18-012621	1/26/2021	0.0031	J		<0 0065	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	J	U	<0.039	U	
		VMP-22-18-050321	5/3/2021	0.011			0.0041	J		0.0007	J		<0 0076	U		<0.0076	U		<0.0033	U		0.0014	J		<0.033	U	
	38 ft	VMP-22-38-110520	11/5/2020	0.004	J		<0 0062	U		<0.0054	U		<0 0086	U		0.14			<0.0037	U		<0.0047	U		<0.037	U	
		VMP-22-38-012621	1/26/2021	0.0054	J		<0 0069	U		<0.006	U		<0 0096	U		<0.0095	U		<0.0041	U		<0.0053	J	U	<0.042	U	
		VMP-22-38-050321	5/3/2021	<0.11	U		<0.054	U		<0.047	U		<0.076	U		14			<0.032	U		<0.042	U		<0.33	U	
		VMP-22-38-060321-R	6/3/2021	0.012			0.0014	J		<0.005	U		<0 0081	U		<0.008	U		<0.0035	U		0.0005	J		<0.035	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	0.023			0.003	J		<0.0087	U		<0 0088	U		<0.0087	U		<0.0038	U		0.034			<0.038	U	
		VMP-23-5-102920	10/29/2020	0.0046	J		<0 0062	U		<0.0054	U		<0 0086	U		0.00098	J		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-23-5-012121	1/21/2021	0.0079	J		<0 0065	U		<0.0056	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-23-5-050721	5/7/2021	0.0047	J		<0 0052	U		<0.0045	U		<0 0072	U		0.002	J		<0.0031	U		<0.004	U		<0.031	U	
	10 ft	VMP-23-10-072320	7/23/2020	<0.013	J	U	0.0019	J		<0.0093	U		<0 0093	U		0.0022	J		<0.004	U		<0.0051	U		<0.04	J	U
		VMP-23-10-102920	10/29/2020	0.014			<0 0061	U		<0.0053	U		<0 0085	U		0.002	J		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-23-10-102920-DUP	10/29/2020	0.012			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-23-10-012121	1/21/2021	0.0087	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.013	J	U	0.052			<0.0091	U		<0 0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U	
		VMP-23-25-102920	10/29/2020	0.0069	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-23-25-012121	1/21/2021	0.029			<0 0062	U		<0.0054	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	J	U	<0.038	U	
		VMP-23-25-050721	5/7/2021	0.0061	J		<0 0048	U		<0.0041	U		<0 0066	U		<0.0066	U		<0.0029	U		<0.0036	U		<0.029	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.012	J	U	<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0037	U		0.0008	J		<0.037	U	
		VMP-24-5-102920	10/29/2020	0.0088	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-24-5-012121	1/21/2021	0.021			<0 0059	U		<0.0051	U		<0 0083	U		0.0016	J		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-24-5-051121	5/11/2021	0.013			<0 0047	U		<0.0041	U		<0 0066	U		<0.0065	U		<0.0028	U		<0.0036	U		<0.028	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.012	U		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-24-10-102920	10/29/2020	0.0073	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-24-10-022521	2/25/2021	0.0046	J		<0 0061	U		<0.0053	U		<0 0085	U		0.0084			<0.0036	U		0.00035	J		<0.037	U	
		VMP-24-10-051121	5/11/2021	0.0087			<0 0044	U		<0.0038	U		<0 0061	U		<0.006	U		<0.0026	U		<0.0034	U		<0.026	U	
		VMP-24-10-051121-DUP	5/11/2021	0.021			<0 0044	U		<0.0038	U		<0 0062	U		<0.0061	U		<0.0027	U		<0.0034	U		<0.027	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.012	U		<0 0058	U		<0.005	U		<0 0081	U		<0.008	U		<0.0035	U		0.0014	J		<0.035	U	
		VMP-24-22-102920	10/29/2020	0.005	J		<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-24-22-012121	1/21/2021	0.0047	J		<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-24-22-051121	5/11/2021	0.024			<0.005	U		<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		0.00085	J		<0.03	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.013	J	U	<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-24-34-102920	10/29/2020	0.027			<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		0.00048	J		<0.038	U	
		VMP-24-34-102920-DUP	10/29/2020	0.012	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-24-34-012121	1/21/2021	0.0082	J		<0 0066	U		<0.0057	U		<0 0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-24-34-051121	5/11/2021	0.014			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.03	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	0.0095	J		<0 0064	J	U	<0.0089	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U	
		VMP-32-5-110420	11/4/2020	0.0075	J		<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-32-5-012621	1/26/2021	0.014			<0 0062	J	U	<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		0.0011	J		<0.037	U	
		VMP-32-5-051221	5/12/2021	0.014			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	
	10 ft	VMP-32-10-072920	7/29/2020	0.0068	J		<0 0065	U		<0.009	U		<0.009	U		0.003	J		<0.0039	U		<0.005	U		<0.039	U	
		VMP-32-10-110420	11/4/2020	0.013			<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-32-10-012621	1/26/2021	0.0043	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-32-10-051221	5/12/2021	0.014			<0 0052	U		<0.0045	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.004	U		0.003	J	
		VMP-32-10-051221-DUP	5/12/2021	0.018			0.0056			<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U	
	20 ft	VMP-32-20-072920	7/29/2020	0.0058	J		0.018			<0.0085	U		<0 0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-32-20-110420	11/4/2020	0.012	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-32-20-012621	1/26/2021	0.006	J		<0 0066	U		<0.0057	U		<0 0092	U		<0.0091	U		<0.004	U		<0.0051	J	U	<0.04	U	
		VMP-32-20-012621-DUP	1/26/2021	0.006	J		<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U	
	30 ft	VMP-32-30-072920	7/29/2020	0.0099	J		<0 0065	J	U	<0.0091	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-32-30-110420	11/4/2020	0.014			<0 0063	U		<0.0054	U		<0 0088	U		<0.0087	U		<0.0038	U		0.0075			<0.038	U	
		VMP-32-30-110420-DUP	11/4/2020	0.022			<0 0069	U		<0.006	U		<0 0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U	
		VMP-32-30-012621	1/26/2021	0.0054	J		<0 0062	U		<0.0054	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	0.0073	J		0 00071	J		<0.0086	U		0.0012	J		<0.0085	U		<0.0037	U		<0.0047	U		0.0021	J	
		VMP-42-10-110520	11/5/2020	0.0092	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-42-10-012921	1/29/2021	0.0045	J		<0 0063	U		<0.0054	U		<0 0088	U		<0.0086	U		<0.0038	U		0.0015	J		<0.038	U	
		VMP-42-10-050521	5/5/2021	0.0051	J		<0.005	U		<0.0043	U		<0.007	U		<0.0069	U		<0.003	U		<0.0038	U		<0.03	U	
	20 ft	VMP-42-20-072820	7/28/2020	0.0093	J		<0.006	U		<0.0083	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-42-20-110520	11/5/2020	0.023			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		0.0014	J		<0.036	U	
		VMP-42-20-012921	1/29/2021	0.0028	J		<0 0064	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.00057	J		<0.039	U	
		VMP-42-20-050521	5/5/2021	0.02			<0 0056	U		<0.0048	U		<0 0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U	
	30 ft	VMP-42-30-072820	7/28/2020	0.01	J		<0 0059	U		<0.0082	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-42-30-110520	11/5/2020	0.0057	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-42-30-110520-DUP	11/5/2020	0.0076	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-42-30-012921	1/29/2021	0.0043	J		0.0028	J		<0.0054	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-42-30-050521	5/5/2021	0.0079	J		<0 0056	U		<0.0048	U		<0 0078	U		<0.0077	U		<0.0034	U		0.0019	J		<0.034	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	0.0073	J		0.0009	J		<0.0089	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-43-10-110320	11/3/2020	0.033			<0 0065	U		<0.0056	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-43-10-012621	1/26/2021	0.004	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-43-10-050521	5/5/2021	0.0047	J		<0 0054	U		<0.0047	U		<0 0076	U		<0.0075	U		<0.0033	U		<0.0042	J	U	<0.033	U	
	20 ft	VMP-43-20-072820	7/28/2020	0.016			0.0013	J		<0.0093	U		<0 0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U	
		VMP-43-20-110320	11/3/2020	0.0064	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-43-20-012621	1/26/2021	0.0071	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	J	U	<0.036	U	
		VMP-43-20-050521	5/5/2021	0.01			<0.005	U		<0.0043	U		<0.007	U		<0.0069	U		<0.003	U		<0.0038	U		<0.03	U	
	30 ft	VMP-43-30-072820	7/28/2020	0.0081	J		0.0018	J		<0.009	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-43-30-110320	11/3/2020	0.019			<0 0061	U		<0.0053	U		<0 0085	U		0.0014	J		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-43-30-022521	2/25/2021	0.013			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-43-30-050521	5/5/2021	0.0069	J		0 00067	J		<0.0047	U		<0 0076	U		<0.0075	U		<0.0033	U		0.0022	J		<0.033	U	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.012	J	U	<0 0059	U		<0.0081	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
	20 ft	VMP-44-20-072820	7/28/2020	0.0066	J		0 00093	J		<0.0086	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	0.0049	J		<0 0066	U		<0.0092	U		<0 0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-45-10-110520	11/5/2020	0.0073	J		<0 0065	U		<0.0056	U		<0 0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-45-10-012621	1/26/2021	0.012			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-45-10-060321	6/3/2021	0.006	J		<0 0054	U		<0.0047	U		<0 0076	U		<0.0075	U		<0.0032	U		0.00057	J		<0.033	U	
	20 ft	VMP-45-20-072820	7/28/2020	0.008	J		0 00092	J		<0.0093	U		<0 0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-45-20-110520	11/5/2020	0.0094	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		0.00044	J		<0.037	U	
		VMP-45-20-012621	1/26/2021	0.0027	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-45-20-050521	5/5/2021	0.0054	J		<0.005	U		<0.0043	U		0 00061	J		0.0041	J		<0.003	U		<0.0038	U		0.0058	J	
	30 ft	VMP-45-30-072820	7/28/2020	0.011	J		0 00097	J		<0.01	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		0.0017	J	
		VMP-45-30-110520	11/5/2020	0.0041	J		<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-45-30-012621	1/26/2021	0.0072	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-45-30-050521	5/5/2021	0.027			<0 0048	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		0.0089			<0.029	U	
		VMP-45-30-050521-DUP	5/5/2021	0.0086	J		<0 0049	U		<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		<0.0038	J	U	<0.03	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	0.015			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		0.00086	J		<0.037	U	
		VMP-47-5-110220	11/2/2020	0.029			<0.006	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-47-5-012221	1/22/2021	0.006	J		<0 0062	U		<0.0054	U		<0 0087	ND,UJ	UJ	<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-47-5-050621	5/6/2021	0.0053	J		<0 0051	U		<0.0044	U		<0 0071	U		<0.007	U		<0.003	U		0.00083	J		<0.03	U	
	10 ft	VMP-47-10-072720	7/27/2020	0.0097	J		<0 0058	U		<0.005	U		<0 0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U	
		VMP-47-10-072720-DUP	7/27/2020	0.012	J		<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U	
		VMP-47-10-110220	11/2/2020	0.0067	J		<0 0057	U		<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-47-10-012221	1/22/2021	0.011	J		<0.006	U		<0.0052	U		<0 0084	ND,UJ	UJ	<0.0083	U		<0.0036	U		0.00059	J		<0.036	U	
		VMP-47-10-050621	5/6/2021	0.011			<0.005	U		<0.0043	U		<0 0069	U		0.0019	J		<0.003	U		0.001	J		<0.03	U	
	20 ft	VMP-47-20-072720	7/27/2020	0.0089	J		<0 0058	U		<0.005	U		<0 0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U	
		VMP-47-20-110220	11/2/2020	0.067			<0 0065	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.0021	J		<0.039	U	
		VMP-47-20-012221	1/22/2021	0.0055	J		<0.006	U		<0.0052	U		<0 0084	ND,UJ	UJ	<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-47-20-012221-DUP	1/22/2021	0.0092	J		<0 0059	U		<0.0051	U		<0 0083	ND,UJ	UJ	<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-47-20-050621	5/6/2021	0.0066	J		0.001	J		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		0.00073	J		<0.029	U	
	30 ft	VMP-47-30-072720	7/27/2020	0.0047	J		<0.006	U		<0.0052	U		<0 0083	U		0.0064	J		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-47-30-110220	11/2/2020	0.0095	J		<0 0057	U		<0.0049	U		<0.008	U		0.0045	J		<0.0034	U		0.00058	J		<0.034	U	
		VMP-47-30-110220-DUP	11/2/2020	0.0098	J		<0 0055	U		<0.0048	U		<0 0077	U		0.012			<0.0033	U		<0.0042	U		<0.033	U	
		VMP-47-30-012221	1/22/2021	0.0088	J		<0 0063	U		<0.0054	U		<0 0088	ND,UJ	UJ	<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-47-30-050621	5/6/2021	0.015			<0.005	U		<0.0043	U		<0 0069	U		0.0046	J	J	<0.003	U		<0.0038	U		<0.03	U	
		VMP-47-30-050621-DUP	5/6/2021	0.012			<0.005	U		<0.0043	U		<0 0069	U		0.027		J	<0.003	U		0.00029	J		<0.03	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	0.0021	J		0.001	J		<0.0077	U		<0 0078	U		0.046			<0.0033	U		<0.0043	U		<0.034	U	
		VMP-48-5-110220	11/2/2020	0.02			<0 0057	U		<0.0049	U		<0 0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-48-5-012521	1/25/2021	0.045			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-48-5-050721	5/7/2021	0.016			<0 0052	U		<0.0045	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.004	J	U	<0.031	J	U
	10 ft	VMP-48-10-073020	7/30/2020	0.0062	J		<0 0064	U		<0.0088	U		<0 0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-48-10-073020-DUP	7/30/2020	0.003	J		<0 0059	U		<0.0082	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-48-10-110220	11/2/2020	0.0099	J		<0 0064	U		<0.0055	U		<0 0089	U		<0.0088	U		<0.0038	U		0.00049	J		0.0081	J	
		VMP-48-10-012521	1/25/2021	0.0096	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-48-10-050721	5/7/2021	0.052			<0 0054	U		<0.0047	U		<0 0075	U		<0.0074	U		<0.0032	U		<0.0041	J	U	<0.032	U	
	20 ft	VMP-48-20-110220	11/2/2020	0.0056	J		<0 0061	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-48-20-012521	1/25/2021	0.028			<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		0.0011	J		<0.037	U	
		VMP-48-20-012521-DUP	1/25/2021	0.016			<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
	30 ft	VMP-48-30-073020	7/30/2020	0.011	J		<0 0062	U		<0.0086	U		<0 0087	U		0.0053	J		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-48-30-110220	11/2/2020	0.0097	J		<0 0061	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-48-30-012521	1/25/2021	0.0057	J		<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		0.00098	J		<0.036	U	
		VMP-48-30-050721	5/7/2021	0.014			<0 0051	U		<0.0044	U		<0 0071	U		<0.007	U		<0.003	U		<0.0039	U		<0.03	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	0.008	J		<0 0061	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-49-5-072420-DUP	7/24/2020	0.0071	J		<0 0066	U		<0.0057	U		<0 0092	U		<0.009	U		<0.0039	U		<0.005	J	U	<0.04	U	
		VMP-49-5-110420	11/4/2020	0.0066	J		<0 0063	U		<0.0055	U		<0 0088	U		0.31			<0.0038	U		<0.0048	U		<0.038	U	
		VMP-49-5-012521	1/25/2021	0.014			<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		0.0012	J		<0.035	U	
		VMP-49-5-050321	5/3/2021	0.0078	J		<0 0057	U		<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
	10 ft	VMP-49-10-072420	7/24/2020	0.012	J		<0 0069	U		<0.006	U		<0 0096	U		<0.0095	U		<0.0041	U		<0.0053	J	U	<0.042	U	
		VMP-49-10-110420	11/4/2020	0.017			<0 0064	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-49-10-012521	1/25/2021	0.012			<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U	
		VMP-49-10-050321	5/3/2021	0.0014	J		<0 0054	U		<0.0047	U		<0 0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U	
	20 ft	VMP-49-20-072420	7/24/2020	0.032			<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		0.0055			<0.035	U	
		VMP-49-20-110420	11/4/2020	0.013			<0 0062	U		<0.0054	U		<0 0087	U		0.0016	J		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-49-20-012521	1/25/2021	0.0038	J		<0 0057	U		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-49-20-050321	5/3/2021	0.0054	J		<0 0057	U		<0.0049	U		<0.008	U		0.32			<0.0034	U		<0.0044	U		<0.034	U	
		VMP-49-20-060321-R	6/3/2021	0.015			<0 0052	U		<0.0045	U		<0 0073	U		<0.0072	U		<0.0031	U		0.0012	J		<0.032	U	
	30 ft	VMP-49-30-072420	7/24/2020	0.014			<0 0063	U		<0.0055	U		<0 0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-49-30-110420	11/4/2020	<0.99	U		<0.49	U		<0.43	U		<0.69	U		<0.68	U		<0.3	U		<0.38	U		<3	U	
		VMP-49-30-012521	1/25/2021	0.0063	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-49-30-050321	5/3/2021	0.0063	J		<0 0053	U		0.00061	J		<0 0074	U		0.0016	J		<0.0032	U		<0.0041	U		<0.032	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.012	U		<0 0063	U		<0.0054	U		<0 0088	U		0.016			<0.0038	U		<0.0048	U		<0.038	U	
		VMP-50-5-110520	11/5/2020	0.0071	J		<0 0056	U		<0.0049	U		<0 0079	U		0.005	J		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-50-5-012621	1/26/2021	0.018			<0 0061	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-50-5-050721	5/7/2021	0.0025	J		<0 0052	U		<0.0045	U		<0 0072	U		0.003	J		<0.0031	U		<0.004	U		<0.031	U	
	10 ft	VMP-50-10-072720	7/27/2020	0.024			<0 0058	U		<0.005	U		<0.008	U		0.018			<0.0034	U		<0.0044	U		<0.035	U	
		VMP-50-10-110520	11/5/2020	0.0058	J		<0 0059	U		<0.0052	U		<0 0083	U		0.012			<0.0036	U		<0.0046	U		<0.036	U	
		VMP-50-10-012621	1/26/2021	0.012	J		<0 0062	U		<0.0054	U		<0 0087	U		0.0017	J		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-50-10-050721	5/7/2021	0.0046	J		<0 0053	U		<0.0046	U		<0 0073	U		0.0054	J		<0.0032	U		<0.004	U		<0.032	U	
	20 ft	VMP-50-20-072720	7/27/2020	0.024			<0.006	U		<0.0052	U		<0 0084	U		0.013			<0.0036	U		0.002	J		<0.036	U	
		VMP-50-20-110520	11/5/2020	0.011	J		<0 0061	U		<0.0053	U		<0 0085	U		0.0058	J		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-50-20-110520-DUP	11/5/2020	0.0074	J		<0 0065	U		<0.0056	U		<0 0091	U		0.0058	J		<0.0039	U		<0.005	U		<0.039	U	
		VMP-50-20-022521	2/25/2021	0.0074	J		<0 0065	U		<0.0056	U		<0 0091	U		0.0022	J		<0.0039	U		0.00037	J		<0.039	U	
		VMP-50-20-022521-DUP	2/25/2021	0.0046	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-50-20-050721	5/7/2021	0.0061	J		<0.005	U		<0.0043	U		<0 0069	U		0.0046	J		<0.003	U		<0.0038	U		<0.03	U	
		VMP-50-20-050721-DUP	5/7/2021	0.0032	J		<0.005	U		<0.0043	U		<0 0069	U		0.0038	J		<0.003	U		<0.0038	U		<0.03	U	
	30 ft	VMP-50-30-072720	7/27/2020	<0.12	U		<0.061	U		<0.053	U		<0.086	U		<0.085	U		<0.037	U		<0.047	U		<0.37	U	
		VMP-50-30-110520	11/5/2020	0.0092	J		<0.012	U		<0.01	U		<0.017	U		0.0019	J		<0.0073	U		0.0014	J		<0.073	U	
		VMP-50-30-012621	1/26/2021	<0.25	U		<0.12	U		<0.11	U		<0.17	U		<0.17	U		<0.074	U		0.043	J		<0.74	U	
		VMP-50-30-050721	5/7/2021	<0.2	U		<0.099	U		<0.086	U		<0.14	U		<0.14	U		<0.059	U		0.045	J		<0.6	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	0.016			<0 0058	U		<0.0081	U		<0 0082	U		0.0044	J		<0.0035	U		0.014			<0.035	U	
		VMP-51-5-103020	10/30/2020	0.0048	J		<0 0063	U		<0.0054	U		<0 0088	U		0.0031	J		<0.0038	U		<0.0048	J	U	<0.038	U	
		VMP-51-5-012221	1/22/2021	0.0063	J		<0 0062	U		<0.0054	U		<0 0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-51-5-050421	5/4/2021	0.0027	J		<0 0052	U		<0.0045	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U	
	10 ft	VMP-51-10-072320	7/23/2020	0.025			<0 0058	U		<0.008	U		<0.008	U		0.0031	J		<0.0034	U		0.0063			<0.035	U	
		VMP-51-10-103020	10/30/2020	0.0088	J		<0 0063	U		<0.0054	U		<0 0088	U		0.0032	J		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-51-10-012221	1/22/2021	0.0079	J		<0 0063	U		<0.0055	U		<0 0088	U		0.0018	J		<0.0038	U		0.0005	J		<0.038	U	
		VMP-51-10-050421	5/4/2021	0.0027	J		<0 0054	U		<0.0047	U		<0 0075	U		0.0021	J		<0.0032	U		<0.0041	U		<0.032	U	
	20 ft	VMP-51-20-072320	7/23/2020	0.0052	J		<0 0064	U		<0.0089	U		<0.009	U		0.0088	J		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-51-20-103020	10/30/2020	0.0076	J		<0 0064	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-51-20-012221	1/22/2021	0.0098	J		<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-51-20-050421	5/4/2021	0.023			0.0018	J		<0.0044	U		<0 0071	U		<0.007	U		<0.003	U		0.0022	J		<0.03	U	
	30 ft	VMP-51-30-072320	7/23/2020	0.0026	J		<0.006	U		<0.0083	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-51-30-103020	10/30/2020	0.044			<0 0066	U		<0.0058	U		<0 0093	U		<0.0092	U		<0.004	U		0.00088	J		<0.04	U	
		VMP-51-30-012221	1/22/2021	0.022			<0 0065	U		<0.0056	U		<0 0091	U		<0.009	U		<0.0039	U		0.00064	J		<0.039	U	
		VMP-51-30-050421	5/4/2021	0.002	J		<0 0055	U		<0.0048	U		<0 0077	U		0.023			<0.0033	U		<0.0042	J	U	<0.033	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	0.0073	J		<0 0058	U		<0.008	U		<0.008	U		0.0034	J		<0.0034	U		<0.0044	U		<0.035	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.012	J	U	<0 0061	U		<0.0084	U		<0 0085	U		0.0014	J		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-52-5-102920	10/29/2020	0.006	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-52-5-012221	1/22/2021	0.0073	J		<0.006	U		<0.0052	U		<0 0084	ND,UJ	UJ	<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-52-5-012221-DUP	1/22/2021	0.0065	J		<0 0056	U		<0.0048	U		<0 0078	ND,UJ	UJ	<0.0077	U		<0.0033	U		0.00056	J		<0.034	U	
		VMP-52-5-050421	5/4/2021	0.0066	J		<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		0.00054	J		<0.029	U	
	10 ft	VMP-52-10-102920	10/29/2020	0.016			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		0.00055	J		<0.036	U	
		VMP-52-10-012221	1/22/2021	0.0098	J		<0 0059	U		<0.0051	U		<0 0083	ND,UJ	UJ	<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-52-10-050421	5/4/2021	0.0074	J		<0.005	U		<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.013	J	U	<0 0066	U		<0.0092	U		<0 0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-52-20-102920	10/29/2020	0.006	J		<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		0.00063	J		<0.035	U	
		VMP-52-20-012221	1/22/2021	0.022			<0 0059	U		<0.0051	U		<0 0082	ND,UJ	UJ	<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U	
		VMP-52-20-050421	5/4/2021	0.1			<0 0052	U		<0.0045	U		<0 0072	U		<0.0071	U		<0.0031	U		<0.004	J	U	<0.031	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.013	J	U	<0 0066	U		<0.0091	U		<0 0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U	
		VMP-52-30-102920	10/29/2020	0.007	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-52-30-012221	1/22/2021	0.0061	J		<0 0057	U		<0.0049	U		<0 0079	ND,UJ	UJ	<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-52-30-050421	5/4/2021	0.012			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	J	U	<0.029	J	U
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.012	J	U	<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		0.00042	J		<0.035	U	
		VMP-53-5-102820	10/28/2020	0.015			<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-53-5-012121	1/21/2021	0.017			<0 0059	U		<0.0051	U		<0 0083	U		0.00097	J		<0.0036	U		0.0034	J		<0.036	U	
		VMP-53-5-050421	5/4/2021	0.0077	J		0.0028	J		<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.013	J	U	<0 0066	U		<0.0057	U		<0 0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U	
		VMP-53-10-102820	10/28/2020	0.011	J		<0 0057	U		<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		0.00046	J		<0.034	U	
		VMP-53-10-012121	1/21/2021	0.0049	J		<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		0.00033	J		<0.036	U	
		VMP-53-10-050421	5/4/2021	0.0036	J		<0 0047	U		<0.004	U		<0 0065	U		0.87		J	<0.0028	U		<0.0036	U		<0.028	U	
		VMP-53-10-050421-DUP	5/4/2021	0.0039	J		<0.005	U		<0.0043	U		<0 0069	U		2.6		J	<0.003	U		<0.0038	U		<0.03	U	
		VMP-53-10-060321-R	6/3/2021	0.0039	J		<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		0.00032	J		<0.033	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.012	J	U	<0 0063	U		<0.0054	U		<0 0088	U		0.0081	J		<0.0038	U		0.00046	J		<0.038	U	
		VMP-53-20-102820	10/28/2020	0.0081	J		<0 0061	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-53-20-012121	1/21/2021	0.0082	J		0.0094			<0.0053	U		<0 0085	U		<0.0084	U		<0.0037	U		0.042			<0.037	U	
		VMP-53-20-050421	5/4/2021	0.0032	J		0 00066	J		<0.0047	U		<0 0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.012	J	U	<0.006	U		<0.0052	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-53-30-102820	10/28/2020	0.0094	J		<0 0059	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U	
		VMP-53-30-012121	1/21/2021	0.0052	J		<0 0059	U		<0.0051	U		<0 0083	U		<0.0082	U		<0.0036	U		0.00032	J		<0.036	U	
		VMP-53-30-050421	5/4/2021	0.0098			<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	0.012	J		<0 0062	U		<0.0054	U		<0 0087	U		0.0048	J		<0.0037	U		0.0034	J		<0.038	U	
		VMP-54-5-102820	10/28/2020	0.012			<0.006	U		<0.0052	U		<0 0083	U		0.0017	J		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-54-5-012821	1/28/2021	0.0044	J		<0 0054	U		<0.0047	U		<0 0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U	
		VMP-54-5-050421	5/4/2021	0.0018	J		<0 0048	U		<0.0041	U		<0 0066	U		0.0012	J		<0.0029	U		<0.0036	U		<0.029	U	
	10 ft	VMP-54-10-072220	7/22/2020	0.004	J		<0 0066	U		<0.0057	U		<0 0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U	
		VMP-54-10-102820	10/28/2020	0.012	J		0.0017	J		<0.0053	U		<0 0085	U		0.0028	J		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-54-10-012821	1/28/2021	0.0041	J		<0 0056	U		<0.0049	U		<0 0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-54-10-012821-DUP	1/28/2021	0.002	J		<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-54-10-050421	5/4/2021	0.0054	J		<0 0048	U		<0.0041	U		<0 0066	U		0.008			<0.0029	U		0.00043	J		<0.029	U	
	20 ft	VMP-54-20-072220	7/22/2020	0.0028	J		<0 0065	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-54-20-102820	10/28/2020	0.011	J		<0 0063	U		<0.0054	U		<0 0088	U		0.002	J		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-54-20-012821	1/28/2021	0.012			<0 0058	U		<0.005	U		<0 0081	U		0.003	J		<0.0035	U		0.00094	J		<0.035	U	
		VMP-54-20-050421	5/4/2021	0.0082	J		<0 0049	U		<0.0042	U		<0 0068	U		0.0014	J		<0.0029	U		<0.0037	U		<0.029	U	
	30 ft	VMP-54-30-072220	7/22/2020	0.028			0.074			<0.0056	U		<0.009	U		0.004	J		<0.0038	U		0.0011	J		<0.039	U	
		VMP-54-30-102820	10/28/2020	0.012			<0 0058	U		<0.0051	U		<0 0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-54-30-012821	1/28/2021	0.0038	J		<0 0058	U		<0.005	U		<0 0081	U		<0.008	U		0.0043			<0.0044	U		<0.035	U	
		VMP-54-30-050421	5/4/2021	0.0049	J		<0 0047	U		<0.004	U		<0 0065	U		0.0014	J		<0.0028	U		0.00051	J		<0.028	U	
		VMP-54-30-050421-DUP	5/4/2021	0.007	J		<0 0046	U		<0.004	U		<0 0064	U		0.001	J		<0.0028	U		<0.0035	U		<0.028	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	0.032			<0 0064	U		<0.0088	U		<0 0089	U		<0.0088	U		<0.0038	U		0.052			<0.038	J	U
		VMP-56-10-072320-DUP	7/23/2020	0.011	J		<0 0068	U		<0.0094	U		<0 0095	U		0.0013	J		<0.0041	U		0.042			<0.041	U	
		VMP-56-10-110320	11/3/2020	0.0067	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-56-10-012121	1/21/2021	0.008	J		<0 0064	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-56-10-050521	5/5/2021	0.0096	J		<0 0058	U		<0.005	U		<0 0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.012	J	U	<0 0061	U		<0.0085	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-56-25-110320	11/3/2020	0.016			<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-56-25-110320-DUP	11/3/2020	0.012	J		<0 0063	U		<0.0055	U		<0 0088	U		<0.0088	U		<0.0038	U		0.0014	J		<0.038	U	
		VMP-56-25-012121	1/21/2021	0.011	J		0.0056	J		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-56-25-012121-DUP	1/21/2021	0.022			0.0045	J		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U	
		VMP-56-25-050521	5/5/2021	0.012			<0 0058	U		<0.005	U		<0.008	U		0.001	J		<0.0034	U		0.00062	J		<0.035	U	
		VMP-56-25-050521-DUP	5/5/2021	0.01			<0 0053	U		<0.0046	U		<0 0073	U		0.0051	J		<0.0032	U		0.00087	J		<0.032	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	0.0029	J		<0.006	U		<0.0083	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-62-5-102920	10/29/2020	0.009	J		<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-62-5-012221	1/22/2021	<0.011	J	U	<0 0057	U		<0.005	U		<0.008	ND,UJ	UJ	<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-62-5-050621	5/6/2021	0.0065	J		<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		0.00029	J		<0.029	U	
	10 ft	VMP-62-10-072720	7/27/2020	0.0048	J		<0 0055	U		<0.0077	U		<0 0077	U		0.0014	J		<0.0033	U		<0.0042	U		<0.033	U	
		VMP-62-10-102920	10/29/2020	0.021			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-62-10-012221	1/22/2021	0.0043	J		<0 0061	U		<0.0053	U		<0 0085	ND,UJ	UJ	<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-62-10-050621	5/6/2021	0.0072	J		<0 0049	U		<0.0042	U		<0 0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	
	20 ft	VMP-62-20-072720	7/27/2020	0.044			<0 0057	U		<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		0.014			<0.034	U	
		VMP-62-20-102920	10/29/2020	0.012			<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-62-20-050621	5/6/2021	0.011			<0.005	U		<0.0043	U		<0 0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U	
	30 ft	VMP-62-30-072720	7/27/2020	0.0086	J		<0 0058	U		<0.005	U		<0 0081	U		0.0096			<0.0035	U		<0.0044	U		<0.035	U	
		VMP-62-30-102920	10/29/2020	0.0092	J		<0 0061	U		<0.0053	U		<0 0085	U		0.0067	J		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-62-30-012221	1/22/2021	0.0069	J		<0 0053	U		<0.0046	U		<0 0073	ND,UJ	UJ	<0.0072	J	U	<0.0032	U		0.00033	J		<0.032	U	
		VMP-62-30-050621	5/6/2021	0.0086	J		<0 0049	U		<0.0042	U		<0 0068	U		0.0085			<0.0029	U		<0.0037	U		<0.029	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										1400						0.55						6200			5.4		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	0.013			<0 0061	U		<0.0085	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-63-5-110320	11/3/2020	0.0091	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-63-5-012921	1/29/2021	0.0052	J		<0.006	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-63-5-050521	5/5/2021	0.021			<0 0055	U		<0.0048	U		<0 0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U	
	10 ft	VMP-63-10-072820	7/28/2020	0.0084	J		<0 0066	U		<0.0091	U		<0 0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U	
		VMP-63-10-110320	11/3/2020	0.017			<0 0057	U		<0.005	U		<0.008	U		0.0009	J		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-63-10-012921	1/29/2021	0.0048	J		<0.026	U		<0.022	U		<0.036	U		<0.036	U		<0.015	U		0.0082	J		<0.16	U	
		VMP-63-10-050521	5/5/2021	0.0067	J		<0 0052	U		<0.0045	U		<0 0072	U		<0.0072	U		<0.0031	U		<0.004	J	U	<0.031	U	
	20 ft	VMP-63-20-072820	7/28/2020	0.007	J		<0.006	U		<0.0083	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-63-20-110320	11/3/2020	0.006	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-63-20-012921	1/29/2021	0.006	J		<0 0064	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.0025	J		<0.039	U	
		VMP-63-20-050521	5/5/2021	0.0094	J		0 00052	J		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		0.0027	J		<0.034	U	
	30 ft	VMP-63-30-072820	7/28/2020	0.011	J		<0.006	U		<0.0083	U		<0 0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-63-30-072820-DUP	7/28/2020	0.0088	J		<0 0057	U		<0.0079	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-63-30-110320	11/3/2020	0.014			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		0.00056	J		<0.036	U	
		VMP-63-30-110320-DUP	11/3/2020	0.015			<0 0059	U		<0.0052	U		<0 0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-63-30-012921	1/29/2021	0.0075	J		<0 0062	U		<0.0053	U		<0 0086	U		<0.0085	U		<0.0037	U		0.00095	J		<0.037	U	
		VMP-63-30-050521	5/5/2021	0.022			<0 0054	U		<0.0047	U		<0 0076	U		0.0029	J		<0.0033	U		<0.0042	U		<0.033	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	0.0079	J		<0.006	U		<0.0052	U		<0 0084	U		0.0022	J		<0.0036	U		0.0017	J		<0.036	U	
		VMP-64-5-103020	10/30/2020	0.02			<0 0057	U		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-64-5-012221	1/22/2021	0.0054	J		<0 0061	U		<0.0053	U		<0 0085	ND,UJ	UJ	<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-64-5-050621	5/6/2021	0.0094	J		<0 0054	U		<0.0047	U		<0 0075	U		<0.0074	U		<0.0032	U		0.00046	J		<0.032	U	
	10 ft	VMP-64-10-072420	7/24/2020	0.0034	J		<0 0061	U		<0.0053	U		<0 0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-64-10-103020	10/30/2020	0.0057	J		<0 0062	U		<0.0054	U		<0 0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-64-10-012221	1/22/2021	0.01	J		<0 0056	U		<0.0048	U		<0 0078	ND,UJ	UJ	<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U	
		VMP-64-10-050621	5/6/2021	0.0081	J		<0 0053	U		<0.0046	U		<0 0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U	
	20 ft	VMP-64-20-072420	7/24/2020	0.003	J		<0 0061	U		<0.0053	U		<0 0085	U		0.12			<0.0036	U		<0.0047	U		<0.037	U	
		VMP-64-20-072420-DUP	7/24/2020	0.0065	J		<0 0061	U		<0.0053	U		<0 0085	U		0.13			<0.0037	U		<0.0047	U		<0.037	U	
		VMP-64-20-103020	10/30/2020	0.0049	J		<0 0057	U		<0.0049	U		<0 0079	U		0.052			<0.0034	U		<0.0044	U		<0.034	U	
		VMP-64-20-012221	1/22/2021	0.0069	J		<0 0058	U		<0.0051	U		<0 0082	ND,UJ	UJ	0.024			<0.0035	U		<0.0045	U		<0.035	U	
		VMP-64-20-050621	5/6/2021	0.013			0.0016	J		<0.005	U		<0.008	U		0.069			<0.0034	U		0.00031	J		<0.035	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	<0.0065	U		<0 0064	U		0.00085	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-1-5-110220	11/2/2020	<0.0071	U		<0.007	U		0.002	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-1-5-012921	1/29/2021	<0.0062	U		<0 0062	U		0.0016	J		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U	
		VMP-1-5-050521	5/5/2021	<0.0059	U		<0 0058	U		0.0016	J		<0 0053	U		<0.0053	U		<0.0051	U		<0.0028	U		<0.0047	U	
	8 5 ft	VMP-1-8.5-072820	7/28/2020	<0.0069	U		0.001	J		0.0012	J		<0 0062	U		<0.0062	U		0.0012	J		<0.0032	U		<0.0055	U	
		VMP-1-8.5-110220	11/2/2020	<0.0068	U		<0 0067	U		0.002	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-1-8.5-012921	1/29/2021	<0.0065	U		<0 0064	U		0.0015	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-1-8.5-050521	5/5/2021	<0.006	U		<0 0059	U		0.00083	J		<0 0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	<0.0071	U		0 00082	J		0.0009	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-1-23.5-110220	11/2/2020	<0.007	U		<0 0069	U		0.0019	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-1-23.5-012921	1/29/2021	<0.007	U		<0 0069	U		0.0014	J		<0 0063	U		<0.0063	U		0.0012	J		<0.0033	U		<0.0056	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0072	U		<0 0071	U		0.0015	J		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	<0.0069	U		<0 0068	U		0.00087	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-1-38.5-110220	11/2/2020	<0.0062	U		<0 0062	U		0.002	J		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U	
		VMP-1-38.5-012921	1/29/2021	<0.0064	U		<0 0063	U		0.0014	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-1-38.5-050521	5/5/2021	<0.0061	U		<0.006	U		0.0011	J		<0 0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	<0.0063	U		<0 0062	U		0.0022	J		<0 0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U	
		VMP-2-5-110420	11/4/2020	<0.0071	U		0.041			0.0016	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-2-5-012521	1/25/2021	<0.007	U		<0 0069	U		0.0016	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-2-5-050721	5/7/2021	<0.0055	U		<0 0054	U		0.0013	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	8 5 ft	VMP-2-8.5-072420	7/24/2020	<0.0065	U		<0 0064	U		0.0025	J		<0 0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0052	U	
		VMP-2-8.5-110420	11/4/2020	<0.0066	U		<0 0066	U		0.0023	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-2-8.5-012521	1/25/2021	<0.007	U		<0 0069	U		0.0016	J		<0 0063	U		<0.0063	U		0.0095			<0.0033	U		<0.0056	U	
		VMP-2-8.5-050721	5/7/2021	<0.0056	U		<0 0055	U		0.0015	J		<0 0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
	22 ft	VMP-2-22-072420	7/24/2020	<0.007	U		<0 0069	U		0.0028	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-2-22-110420	11/4/2020	<0.067	U		<0.066	U		<0.069	U		<0.06	U		<0.06	U		0.98			<0.031	U		<0.053	U	
		VMP-2-22-012521	1/25/2021	<0.0069	U		<0 0068	U		0.0023	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-2-22-050721	5/7/2021	<0.0057	U		<0 0056	U		0.0013	J		<0 0052	U		<0.0052	U		0.0016	J		<0.0027	U		<0.0046	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	0.0019	J		<0 0071	U		<0.0075	U		0.0013	J		<0.0065	U		0.036			<0.0034	U		<0.0058	U	
		VMP-3-5-110420	11/4/2020	<0.0067	U		<0 0066	U		0.0012	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-3-5-012521	1/25/2021	<0.0073	U		<0 0072	U		0.002	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U	
		VMP-3-5-051021	5/10/2021	<0.0055	U		<0 0054	U		0.0014	J		<0.005	U		<0.005	U		0.0051			<0.0026	U		<0.0044	J	U
	10 ft	VMP-3-10-072920	7/29/2020	<0.0069	U		<0 0068	U		<0.0071	U		<0 0062	U		<0.0062	U		0.004	J		<0.0032	U		<0.0055	U	
		VMP-3-10-110420	11/4/2020	<0.0074	U		<0 0072	U		0.0014	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U	
		VMP-3-10-051021	5/10/2021	<0.0054	U		<0 0053	U		0.0017	J		<0 0049	U		<0.0049	U		0.003	J		<0.0025	U		<0.0043	J	U
	22 ft	VMP-3-22-072920	7/29/2020	<0.0072	U		0.0016	J		<0.0074	U		<0 0065	U		<0.0065	U		0.004	J		<0.0034	U		<0.0057	U	
		VMP-3-22-110420	11/4/2020	<0.0074	U		<0 0072	U		0.0013	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0 00069	J	
		VMP-3-22-012521	1/25/2021	<0.0069	U		<0 0068	U		0.0018	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-3-22-051021	5/10/2021	<0.0054	U		<0 0053	U		0.0011	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
		VMP-3-22-051021-DUP	5/10/2021	<0.0054	U		<0 0053	U		0.0016	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	<0.056	U		<0.055	U		<0.058	U		<0.051	U		<0.051	U		12			<0.026	U		<0.045	U	
		VMP-3-31.5-110420	11/4/2020	<6.9	U		<6.8	U		<7.1	U		<6.2	U		<6.2	U		570			<3.2	U		<5.5	U	
		VMP-3-31.5-012521	1/25/2021	<0.007	U		<0 0069	U		0.0026	J		<0 0063	U		<0.0063	U		0.022			<0.0033	U		<0.0056	U	
		VMP-3-31.5-051021	5/10/2021	<0.0054	U		<0 0053	U		0.0019	J		<0 0049	J	U	<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform) 6600			Trichloroethene 1.5			Trichlorofluoromethane 860			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride 0.29			m,p-Xylenes 130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	<0.0067	U		<0 0066	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-4-5-103020	10/30/2020	<0.0068	U		<0 0067	U		0.0013	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-4-5-012821	1/28/2021	<0.0062	U		<0 0061	U		0.0016	J		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U	
		VMP-4-5-050521	5/5/2021	<0.0057	U		<0 0056	U		0.0011	J		<0 0051	U		<0.0051	U		<0.0049	U		<0.0027	U		<0.0045	U	
	12 ft	VMP-4-12-073020	7/30/2020	<0.0068	U		<0 0067	U		0.0012	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U	
		VMP-4-12-103020	10/30/2020	<0.0067	U		<0 0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-4-12-012821	1/28/2021	<0.0061	U		<0.006	U		0.0013	J		<0 0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U	
		VMP-4-12-050521	5/5/2021	<0.0061	U		<0.006	U		0.00096	J		<0 0055	U		<0.0055	U		0.0064			<0.0029	U		0 00097	J	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	<0.007	U		<0 0068	U		0.0011	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U	
		VMP-4-23.5-103020	10/30/2020	<0.0066	U		<0 0065	U		0.0047	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0067	U		<0 0066	U		0.0047	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-4-23.5-012821	1/28/2021	<0.0065	U		<0 0064	U		0.0015	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-4-23.5-050521	5/5/2021	<0.0061	U		<0.006	U		0.0012	J		0 00058	J		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	<0.007	U		0 00078	J		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-5-5-103020	10/30/2020	<0.0065	U		<0 0064	U		<0.0067	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-5-5-012221	1/22/2021	<0.0068	U		<0 0067	U		0.0017	J		<0 0062	U		<0.0062	U		0.0031	J		<0.0032	U		<0.0054	U	
		VMP-5-5-050621	5/6/2021	<0.0054	U		0 00098	J		0.0011	J		<0 0049	U		<0.0049	U		0.0051			<0.0025	U		<0.0043	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	<0.0068	U		<0 0067	U		0.0014	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-5-12.5-103020	10/30/2020	<0.0067	U		<0 0066	U		<0.0069	U		0.003	J		<0.006	U		<0.0057	U		<0.0031	U		0.0007	J	
		VMP-5-12.5-012221	1/22/2021	<0.0079	U		<0 0078	U		0.0023	J		<0 0071	U		<0.0071	U		<0.0068	U		<0.0037	U		0 00062	J	
		VMP-5-12.5-050621	5/6/2021	<0.0056	U		<0 0055	U		0.001	J		<0 0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
		VMP-5-12.5-050621-DUP	5/6/2021	<0.0058	U		<0 0058	U		0.00097	J		<0 0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
	31 ft	VMP-5-31-072320	7/23/2020	<0.0066	U		<0 0066	U		0.0018	J		<0.006	U		<0.006	U		0.0015	J		<0.0031	U		<0.0053	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0069	U		<0 0068	U		0.0016	J		<0 0062	U		<0.0062	U		0.0017	J		<0.0032	U		<0.0055	U	
		VMP-5-31-103020	10/30/2020	<0.0074	U		<0 0073	U		0.0023	J		<0 0067	U		<0.0067	U		0.0056	J		<0.0035	U		<0.0059	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0071	U		<0.007	U		0.0032	J		<0 0064	U		<0.0064	U		0.0052	J		<0.0033	U		0 00081	J	
		VMP-5-31-012221	1/22/2021	<0.0067	U		<0 0066	U		0.004	J		0.0014	J		<0.006	U		<0.0057	U		<0.0031	U		0 00054	J	
		VMP-5-31-050621	5/6/2021	<0.0055	U		<0 0054	U		0.0044	J		0.01			0.0027	J		0.023			<0.0026	U		0.013		
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	<0.0071	U		<0.007	U		0.0032	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-6-5-102920	10/29/2020	<0.0067	U		<0 0066	U		0.0018	J		<0 0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U	
		VMP-6-5-012921	1/29/2021	<0.0066	U		<0 0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-6-5-050621	5/6/2021	<0.006	U		<0 0059	U		0.001	J		<0 0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U	
	10 ft	VMP-6-10-072220	7/22/2020	<0.0071	U		<0.007	U		0.0027	J		<0 0064	U		<0.0064	U		0.0069			<0.0033	U		<0.0056	U	
		VMP-6-10-102920	10/29/2020	<0.0066	U		<0 0065	U		0.0016	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-6-10-050621	5/6/2021	<0.0057	U		<0 0056	U		0.0011	J		0.0049	J		0.002	J		0.0091			<0.0027	U		0.0034	J	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.0074	U		<0 0073	U		0.0029	J		<0 0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U	
		VMP-6-31.5-102920	10/29/2020	<0.0065	U		<0 0064	U		0.0021	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-6-31.5-012921	1/29/2021	<0.0068	U		<0 0067	U		<0.007	U		<0 0062	U		<0.0062	U		0.0023	J		<0.0032	U		<0.0054	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0075	U		<0 0074	U		<0.0078	U		<0 0068	U		<0.0068	U		0.0025	J		<0.0035	U		<0.006	U	
		VMP-6-31.5-050621	5/6/2021	<0.0057	U		<0 0056	U		0.001	J		<0 0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	<0.0066	U		<0 0065	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-7-5-110420	11/4/2020	<0.0065	U		<0 0064	U		0.0013	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-7-5-012621	1/26/2021	<0.0069	U		<0 0068	U		<0.0071	U		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-7-5-050521	5/5/2021	<0.006	U		<0 0059	U		0.0015	J		<0 0054	J	U	<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	<0.007	U		<0 0069	U		0.001	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-7-13.5-110420	11/4/2020	<0.0071	U		<0.007	U		0.0013	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-7-13.5-012621	1/26/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-7-13.5-050521	5/5/2021	<0.0059	U		<0 0058	U		0.00096	J		<0 0053	U		<0.0053	U		0.0022	J		<0.0028	U		<0.0047	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	<0.007	U		0.0014	J		0.0009	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-7-29.5-110420	11/4/2020	<0.0066	U		<0 0065	U		0.0022	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-7-29.5-012621	1/26/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-7-29.5-050521	5/5/2021	<0.0055	U		<0 0054	U		0.001	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	<0.0067	U		0.0053	J		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-8-5-102820	10/28/2020	<0.0068	U		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-8-5-012121	1/21/2021	<0.0067	U		<0 0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-8-5-050421	5/4/2021	<0.005	U		<0 0049	U		0.0011	J		<0 0045	U		<0.0045	U		<0.0043	U		<0.0023	U		<0.004	U	
	9 5 ft	VMP-8-9.5-072220	7/22/2020	<0.007	U		<0 0069	U		0.0015	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0066	U		<0 0065	U		0.0017	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-8-9.5-102820	10/28/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-8-9.5-012121	1/21/2021	<0.0067	U		<0 0066	U		0.0014	J		<0 0061	U		<0.0061	U		0.001	J		<0.0032	U		<0.0054	U	
		VMP-8-9.5-050421	5/4/2021	<0.0054	U		0.0022	J		0.0012	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	0.00075	J		0.0053	J		0.0015	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		0 00046	J	
		VMP-8-23.5-102820	10/28/2020	<0.0067	U		<0 0066	U		0.0017	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-8-23.5-012121	1/21/2021	<0.0073	U		<0 0072	U		0.0013	J		<0 0066	U		<0.0066	U		<0.0062	U		<0.0034	U		0.0005	J	
		VMP-8-23.5-050421	5/4/2021	<0.0051	U		<0.005	U		0.00095	J		<0 0046	U		<0.0046	U		<0.0044	U		<0.0024	U		<0.0041	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.0066	U		<0 0065	U		0.0018	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-8-35.5-102820	10/28/2020	<0.0069	U		<0 0068	U		<0.0071	U		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0 00073	J	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0066	U		<0 0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-8-35.5-012121	1/21/2021	<0.0069	U		<0 0068	U		0.0013	J		<0 0062	U		<0.0062	U		0 00081	J		<0.0032	U		<0.0055	U	
		VMP-8-35.5-050421	5/4/2021	<0.0055	U		<0 0054	U		0.00091	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.0071	U		0.0013	J		0.0018	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.007	U		0.017			0.0021	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-9-5-102820	10/28/2020	<0.0066	U		<0 0065	U		0.0012	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-9-5-012121	1/21/2021	<0.0068	U		<0 0067	U		0.0016	J		<0 0061	U		<0.0061	U		0.24			<0.0032	U		<0.0054	U	
		VMP-9-5-050421	5/4/2021	<0.0057	U		<0 0056	U		0.001	J		0 00038	J		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	<0.0071	U		<0.007	U		0.0014	J		<0 0064	U		<0.0064	U		0.001	J		<0.0033	U		<0.0056	J	U
		VMP-9-11.5-102820	10/28/2020	<0.0068	U		<0 0067	U		0.0019	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-9-11.5-012121	1/21/2021	<0.0071	U		<0.007	U		0.0015	J		<0 0064	U		<0.0064	U		0.074			<0.0033	U		<0.0056	U	
		VMP-9-11.5-050421	5/4/2021	<0.0058	U		<0 0058	U		0.0012	J		<0 0052	U		<0.0053	U		0 00043	J		<0.0027	U		<0.0046	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	<0.007	U		<0 0069	U		0.0015	J		<0 0063	U		<0.0063	U		0 00089	J		<0.0033	U		<0.0056	U	
		VMP-9-25.5-102820	10/28/2020	<0.0067	U		<0 0066	U		0.0013	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0 00048	J	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0066	U		<0 0065	U		0.0015	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-9-25.5-012121	1/21/2021	<0.0069	U		<0 0068	U		0.0016	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-9-25.5-050421	5/4/2021	<0.0056	U		<0 0055	U		0.00082	J		0.0011	J		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	<0.0071	U		<0.007	U		0.0015	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.009		J
		VMP-9-38.5-012121-DUP	1/21/2021	<0.0071	U		<0.007	U		0.0014	J		<0 0064	J	U	<0.0064	U		0.0037	J		<0.0033	U		0.042		J
VMP-18	8 5 ft	VMP-18-8.5-112420	11/24/2020	<0.0061	U		<0.006	U		<0.0063	U		<0 0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U	
		VMP-18-8.5-012621	1/26/2021	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	J	U	<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	<0.0065	U		0.0032	J		0.0011	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-19-5-110420	11/4/2020	<0.0072	U		<0 0071	U		0.0013	J		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-19-5-012621	1/26/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U	
		VMP-19-5-051121	5/11/2021	<0.0053	U		<0 0052	U		0.0011	J		<0 0048	U		<0.0048	U		<0.0046	U		<0.0025	U		<0.0042	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.0066	U		<0 0066	U		0.0014	J		<0.006	U		<0.006	U		0.0098			<0.0031	U		<0.0053	U	
		VMP-20-5-112420	11/24/2020	<0.0059	U		<0 0058	U		0.0054	J		<0 0053	U		<0.0053	U		<0.0051	U		<0.0028	U		<0.0047	U	
		VMP-20-5-012521	1/25/2021	<0.0064	U		<0 0063	U		0.0027	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-20-5-050721	5/7/2021	<0.0054	U		<0 0053	U		0.0015	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.0068	U		<0 0067	U		0.0017	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-20-10-110220	11/2/2020	<0.0064	U		<0 0063	U		0.0046	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-20-10-012521	1/25/2021	<0.0065	U		<0 0064	U		0.0027	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-20-10-050721	5/7/2021	<0.0052	U		<0 0051	U		0.0012	J		<0 0047	U		<0.0047	U		<0.0044	U		<0.0024	U		<0.0041	U	
	25 ft	VMP-20-25-072320	7/23/2020	<0.0064	U		<0 0063	U		0.011			0.0012	J		0.0056	J		0.034			<0.003	U		0.0065		
		VMP-20-25-110220	11/2/2020	<0.0062	U		<0 0061	U		0.02			<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U	
		VMP-20-25-012521	1/25/2021	<0.0066	U		<0 0065	U		0.0085			<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-20-25-050721	5/7/2021	<0.0053	U		<0 0052	U		0.0037	J		<0 0048	U		<0.0048	U		<0.0045	U		<0.0025	U		<0.0042	U	
		VMP-20-25-050721-DUP	5/7/2021	<0.0052	U		<0 0051	U		0.0034	J		<0 0047	J	U	<0.0047	U		<0.0044	U		<0.0024	U		<0.0041	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-21-5-102920	10/29/2020	<0.0067	U		<0 0066	U		0.0013	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-21-5-012521	1/25/2021	<0.007	U		<0 0069	U		0.0018	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-21-5-050321	5/3/2021	<0.0059	U		0 00089	J		<0.0061	U		<0 0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U	
	10 ft	VMP-21-10-072420	7/24/2020	<0.0063	U		<0 0062	U		0.0017	J		<0 0056	U		<0.0056	U		0.0039	J		<0.0029	U		<0.005	U	
		VMP-21-10-102920	10/29/2020	<0.0069	U		<0 0068	U		0.0015	J		<0 0062	U		<0.0062	U		0.0025	J		<0.0032	U		<0.0055	U	
		VMP-21-10-012521	1/25/2021	<0.0072	U		<0 0071	U		0.0015	J		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.007	U		<0 0069	U		0.0016	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-21-10-050321	5/3/2021	<0.0059	U		0.0029	J		0.0017	J		<0 0053	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0047	U	
		VMP-21-10-060321-R	6/3/2021	<0.0061	U		<0.006	U		0.0012	J		0 00082	J		<0.0055	U		0.046			<0.0029	U		0.0052		
	25 ft	VMP-21-25-072420	7/24/2020	<0.0072	U		<0 0071	U		<0.0075	U		<0 0065	U		<0.0065	U		0.008			<0.0034	U		<0.0058	U	
		VMP-21-25-102920	10/29/2020	<0.007	U		<0 0069	U		0.0016	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-21-25-012521	1/25/2021	<0.0069	U		<0 0068	U		0.0011	J		<0 0062	U		<0.0062	U		0.0024	J		<0.0032	U		<0.0055	U	
		VMP-21-25-050321	5/3/2021	<0.0062	U		<0 0061	U		0.0014	J		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U	
		VMP-21-25-050321-DUP	5/3/2021	<0.0059	U		<0 0058	U		<0.0061	U		<0 0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U	
	33 ft	VMP-21-33-072420	7/24/2020	<0.0072	U		<0 0071	U		<0.0074	U		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-21-33-102920	10/29/2020	<0.0067	U		<0 0066	U		0.0016	J		<0 0061	U		<0.0061	U		0.0081			<0.0032	U		<0.0054	U	
		VMP-21-33-012521	1/25/2021	<0.0066	U		<0 0065	U		0.0016	J		<0 0059	U		<0.0059	U		0.0038	J		<0.0031	U		<0.0052	U	
		VMP-21-33-050321	5/3/2021	<0.0063	U		<0 0062	U		0.0015	J		<0 0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	<0.0071	U		<0.007	U		0.001	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-22-5-110520	11/5/2020	<0.0066	U		<0 0065	U		0.0017	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-22-5-012621	1/26/2021	<0.0074	U		<0 0073	U		0.0014	J		<0 0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U	
		VMP-22-5-050321	5/3/2021	<0.0064	U		<0 0063	U		<0.0065	U		<0 0057	U		<0.0057	U		0.0029	J		<0.003	U		<0.005	U	
	10 ft	VMP-22-10-072320	7/23/2020	<0.0068	U		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-22-10-110520	11/5/2020	<0.0069	U		<0 0068	U		0.0013	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-22-10-012621	1/26/2021	<0.007	U		<0 0069	U		0.0014	J		<0 0063	U		<0.0063	U		0 00094	J		<0.0033	U		<0.0056	J	U
		VMP-22-10-050321	5/3/2021	<0.0062	U		<0 0062	U		<0.0064	U		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U	
	18 ft	VMP-22-18-072320	7/23/2020	<0.0075	U		<0 0074	U		0.001	J		<0 0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U	
		VMP-22-18-110520	11/5/2020	<0.0066	U		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-22-18-012621	1/26/2021	<0.0072	U		<0 0071	U		0.0013	J		<0 0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	J	U
		VMP-22-18-050321	5/3/2021	<0.0061	U		<0.006	U		<0.0063	U		<0 0055	U		<0.0055	U		0.0016	J		<0.0028	U		<0.0048	U	
	38 ft	VMP-22-38-110520	11/5/2020	<0.0069	U		0.005	J		0.0012	J		0.002	J		<0.0062	U		0.0026	J		<0.0032	U		0.0018	J	
		VMP-22-38-012621	1/26/2021	<0.0076	U		<0 0075	U		0.0016	J		<0 0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U	
		VMP-22-38-050321	5/3/2021	<0.06	U		0.13			<0.062	U		<0.054	U		<0.054	U		<0.052	U		<0.028	U		<0.048	U	
		VMP-22-38-060321-R	6/3/2021	<0.0064	U		0.0012	J		0.00095	J		<0 0058	U		<0.0058	U		0.005	J		<0.003	U		<0.0051	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	<0.007	U		0 00093	J		0.0009	J		0.0013	J		<0.0063	U		0.0084			<0.0033	U		0.0068		
		VMP-23-5-102920	10/29/2020	<0.0069	U		<0 0068	U		0.0016	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-23-5-012121	1/21/2021	<0.0072	U		<0 0071	U		0.0015	J		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-23-5-050721	5/7/2021	<0.0057	U		<0 0056	U		0.0016	J		<0 0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	10 ft	VMP-23-10-072320	7/23/2020	<0.0074	U		<0 0073	U		0.0015	J		<0 0067	U		<0.0067	U		0.015			<0.0035	U		<0.0059	U	
		VMP-23-10-102920	10/29/2020	<0.0067	U		<0 0066	U		0.0019	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0067	U		<0 0066	U		0.0018	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-23-10-012121	1/21/2021	<0.007	U		<0 0069	U		0.0012	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.0073	U		<0 0072	U		0.0012	J		0.0026	J		<0.0066	U		0.082			<0.0034	U		<0.0058	U	
		VMP-23-25-102920	10/29/2020	<0.0067	U		<0 0066	U		0.0022	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-23-25-012121	1/21/2021	<0.0069	U		<0 0068	U		0.0014	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-23-25-050721	5/7/2021	<0.0053	U		<0 0052	U		0.0021	J		<0 0048	U		<0.0048	U		0.0018	J		<0.0025	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.0068	U		<0 0067	U		0.0024	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-24-5-102920	10/29/2020	<0.007	U		<0 0069	U		0.0016	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-24-5-012121	1/21/2021	<0.0066	U		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-24-5-051121	5/11/2021	<0.0052	U		<0 0052	U		0.0014	J		<0 0047	U		<0.0047	U		<0.0045	U		<0.0024	U		<0.0042	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.0067	U		<0 0066	U		0.0019	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-24-10-102920	10/29/2020	<0.0066	U		<0 0065	U		0.0013	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-24-10-022521	2/25/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-24-10-051121	5/11/2021	<0.0048	U		<0 0048	U		0.0012	J		<0 0044	U		<0.0044	U		<0.0042	U		<0.0023	U		<0.0039	U	
		VMP-24-10-051121-DUP	5/11/2021	<0.0049	U		<0 0049	U		0.0012	J		<0 0044	U		<0.0044	U		<0.0042	U		<0.0023	U		<0.0039	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.0064	U		<0 0063	U		0.0025	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-24-22-102920	10/29/2020	<0.0065	U		<0 0064	U		0.0013	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-24-22-012121	1/21/2021	<0.0065	U		<0 0064	U		0.0012	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-24-22-051121	5/11/2021	<0.0055	U		<0 0054	U		0.0013	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.0071	U		<0.007	U		0.0018	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-24-34-102920	10/29/2020	<0.007	U		<0 0069	U		0.0017	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		0 00072	J	
		VMP-24-34-102920-DUP	10/29/2020	<0.007	U		<0 0069	U		0.0014	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-24-34-012121	1/21/2021	<0.0073	U		<0 0072	U		0.0018	J		<0 0066	U		<0.0066	U		0.001	J		<0.0034	U		<0.0058	U	
		VMP-24-34-051121	5/11/2021	<0.0054	U		<0 0053	U		0.0012	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	<0.0071	U		<0.007	U		<0.0073	U		<0 0064	U		<0.0064	U		0.0046	J		<0.0033	U		<0.0057	U	
		VMP-32-5-110420	11/4/2020	<0.0071	U		<0.007	U		<0.0073	U		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-32-5-012621	1/26/2021	<0.0069	U		<0 0068	U		0.0012	J		<0 0062	U		<0.0062	U		0.0053	J		<0.0032	U		<0.0055	J	U
		VMP-32-5-051221	5/12/2021	<0.0054	U		<0 0053	U		0.001	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
	10 ft	VMP-32-10-072920	7/29/2020	<0.0072	U		<0 0071	U		<0.0074	U		<0 0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U	
		VMP-32-10-110420	11/4/2020	<0.0066	U		<0 0065	U		0.0016	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-32-10-012621	1/26/2021	<0.0069	U		<0 0068	U		0.0015	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-32-10-051221	5/12/2021	<0.0057	U		<0 0056	U		0.0014	J		<0 0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
		VMP-32-10-051221-DUP	5/12/2021	<0.0055	U		<0 0054	U		0.0013	J		<0.005	J	U	<0.005	U		0 00075	J		<0.0026	U		<0.0044	U	
	20 ft	VMP-32-20-072920	7/29/2020	<0.0068	U		<0 0067	U		0.00086	J		<0 0061	J	U	<0.0061	U		0.027			<0.0032	U		<0.0054	U	
		VMP-32-20-110420	11/4/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-32-20-012621	1/26/2021	<0.0073	U		<0 0072	U		0.0016	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0071	U		<0.007	U		0.0014	J		<0 0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	J	U
	30 ft	VMP-32-30-072920	7/29/2020	<0.0072	U		<0 0071	U		0.00096	J		<0 0065	U		<0.0065	U		0.0019	J		<0.0034	U		<0.0058	U	
		VMP-32-30-110420	11/4/2020	<0.007	U		<0 0069	U		0.001	J		0.0018	J		<0.0063	U		<0.006	U		<0.0033	U		0.0066		
		VMP-32-30-110420-DUP	11/4/2020	<0.0077	U		<0 0076	U		<0.0079	U		<0 0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U	
		VMP-32-30-012621	1/26/2021	<0.0069	U		<0 0068	U		0.0014	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	<0.0068	U		0.0012	J		<0.007	U		0.0012	J		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U	
		VMP-42-10-110520	11/5/2020	<0.0066	U		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-42-10-012921	1/29/2021	<0.007	U		<0 0068	U		<0.0072	U		<0 0063	U		<0.0063	U		0.11			<0.0032	U		<0.0055	U	
		VMP-42-10-050521	5/5/2021	<0.0055	U		<0 0054	U		0.0011	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	20 ft	VMP-42-20-072820	7/28/2020	<0.0066	U		<0 0065	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-42-20-110520	11/5/2020	<0.0066	U		<0 0065	U		0.0015	J		<0 0059	U		<0.0059	U		0.0066			<0.0031	U		0 00054	J	
		VMP-42-20-012921	1/29/2021	<0.0071	U		<0.007	U		<0.0074	U		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-42-20-050521	5/5/2021	<0.0062	U		<0 0061	U		0.001	J		<0 0056	U		<0.0056	U		0.004	J		<0.0029	U		<0.005	U	
	30 ft	VMP-42-30-072820	7/28/2020	<0.0066	U		<0 0065	U		0.0013	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-42-30-110520	11/5/2020	<0.0069	U		<0 0068	U		0.002	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0067	U		<0 0066	U		0.0019	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0008	J	
		VMP-42-30-012921	1/29/2021	<0.0069	U		<0 0068	U		<0.0071	U		<0 0062	U		<0.0062	U		0.002	J		<0.0032	U		<0.0055	U	
		VMP-42-30-050521	5/5/2021	<0.0062	U		<0 0061	U		0.00092	J		<0 0056	U		<0.0056	U		0.0051	J		<0.0029	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	<0.0071	U		<0.007	U		0.00087	J		<0 0064	U		<0.0064	U		0 00066	J		<0.0033	U		<0.0057	U	
		VMP-43-10-110320	11/3/2020	<0.0072	U		<0 0071	U		<0.0074	U		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-43-10-012621	1/26/2021	<0.0066	U		<0 0065	U		<0.0068	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-43-10-050521	5/5/2021	<0.006	U		<0.006	U		0.0014	J		<0 0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U	
	20 ft	VMP-43-20-072820	7/28/2020	<0.0075	U		<0 0074	U		<0.0077	U		<0 0067	U		<0.0067	U		0.89			<0.0035	U		<0.0059	U	
		VMP-43-20-110320	11/3/2020	<0.0069	U		<0 0068	U		0.0012	J		<0 0062	U		<0.0062	U		0.0026	J		<0.0032	U		<0.0055	U	
		VMP-43-20-012621	1/26/2021	<0.0066	U		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-43-20-050521	5/5/2021	<0.0056	U		<0 0055	U		0.0012	J		<0.005	U		<0.005	U		<0.0048	U		<0.0026	U		<0.0044	U	
	30 ft	VMP-43-30-072820	7/28/2020	<0.0072	U		<0 0071	U		0.00092	J		<0 0065	U		<0.0065	U		0.0039	J		<0.0034	U		<0.0057	U	
		VMP-43-30-110320	11/3/2020	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-43-30-022521	2/25/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-43-30-050521	5/5/2021	<0.006	U		<0.006	U		0.0011	J		<0 0054	U		<0.0054	U		0.035			<0.0028	U		0 00072	J	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.0065	U		<0 0064	U		<0.0067	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U	
	20 ft	VMP-44-20-072820	7/28/2020	<0.0069	U		<0 0068	U		0.0011	J		<0 0062	U		<0.0062	U		0 00056	J		<0.0032	U		<0.0055	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	<0.0074	U		<0 0072	U		0.0011	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U	
		VMP-45-10-110520	11/5/2020	<0.0072	U		<0 0071	U		0.0015	J		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-45-10-012621	1/26/2021	<0.0066	U		<0 0065	U		<0.0068	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-45-10-060321	6/3/2021	<0.006	U		<0 0059	U		0.00087	J		<0 0054	U		<0.0054	U		0.0034	J		<0.0028	U		<0.0048	U	
	20 ft	VMP-45-20-072820	7/28/2020	<0.0074	U		<0 0073	U		0.0009	J		<0 0067	U		<0.0067	U		0 00066	J		<0.0035	U		<0.0059	U	
		VMP-45-20-110520	11/5/2020	<0.0067	U		<0 0066	U		0.002	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0 00041	J	
		VMP-45-20-012621	1/26/2021	<0.0066	U		<0 0065	U		<0.0068	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-45-20-050521	5/5/2021	<0.0055	U		<0 0054	U		0.0012	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	30 ft	VMP-45-30-072820	7/28/2020	<0.008	U		<0 0079	U		0.0012	J		<0 0072	U		<0.0072	U		0.0046	J		<0.0038	U		<0.0064	U	
		VMP-45-30-110520	11/5/2020	<0.0065	U		<0 0064	U		0.0013	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-45-30-012621	1/26/2021	<0.0066	U		<0 0065	U		<0.0068	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-45-30-050521	5/5/2021	<0.0054	U		<0 0053	U		0.0011	J		<0 0048	J	U	<0.0048	U		<0.0046	U		<0.0025	U		0 00052	J	
		VMP-45-30-050521-DUP	5/5/2021	<0.0055	U		<0 0054	U		0.0011	J		<0 0049	U		<0.0049	U		<0.0047	U		<0.0026	U		<0.0044	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	<0.0067	U		0.0038	J		0.0023	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-47-5-110220	11/2/2020	<0.0066	U		<0 0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-47-5-012221	1/22/2021	<0.0069	U		<0 0068	U		<0.0071	U		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-47-5-050621	5/6/2021	<0.0056	U		<0 0055	U		0.00097	J		<0 0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
	10 ft	VMP-47-10-072720	7/27/2020	<0.0064	U		<0 0063	U		0.0019	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0065	U		<0 0064	U		0.0022	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-47-10-110220	11/2/2020	<0.0063	U		<0 0062	U		<0.0065	U		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-47-10-012221	1/22/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0028	J	
		VMP-47-10-050621	5/6/2021	<0.0055	U		<0 0054	U		0.0013	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	20 ft	VMP-47-20-072720	7/27/2020	<0.0064	U		<0 0063	U		0.002	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-47-20-110220	11/2/2020	<0.0072	U		<0 0071	U		<0.0074	U		<0 0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U	
		VMP-47-20-012221	1/22/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0066	U		<0 0065	U		<0.0068	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0 00053	J	
		VMP-47-20-050621	5/6/2021	<0.0054	U		<0 0053	U		0.0012	J		<0 0049	U		<0.0049	U		0 00067	J		<0.0025	U		<0.0043	U	
	30 ft	VMP-47-30-072720	7/27/2020	<0.0066	U		<0 0065	U		0.002	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-47-30-110220	11/2/2020	<0.0063	U		<0 0062	U		0.0019	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0061	U		<0.006	U		0.002	J		<0 0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U	
		VMP-47-30-012221	1/22/2021	<0.007	U		<0 0068	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U	
		VMP-47-30-050621	5/6/2021	<0.0055	U		<0 0054	U		0.00096	J		<0.005	U		<0.005	U		0 00082	J		<0.0026	U		<0.0044	U	
		VMP-47-30-050621-DUP	5/6/2021	<0.0055	U		<0 0054	U		0.0011	J		<0.005	U		<0.005	U		0 00075	J		<0.0026	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	<0.0062	U		0.0071			0.0022	J		0.0012	J		<0.0056	U		0.0013	J		<0.0029	U		0.0013	J	
		VMP-48-5-110220	11/2/2020	<0.0063	U		<0 0062	U		0.0018	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-48-5-012521	1/25/2021	<0.0066	U		<0 0065	U		0.0021	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-48-5-050721	5/7/2021	<0.0057	U		<0 0056	U		0.0016	J		<0 0052	J	U	<0.0052	U		<0.0049	U		<0.0027	U		0 00095	J	
	10 ft	VMP-48-10-073020	7/30/2020	<0.0071	U		<0.007	U		0.0016	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0066	U		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-48-10-110220	11/2/2020	0.001	J		<0.007	U		0.0023	J		<0 0064	U		0.00088	J		<0.0061	U		<0.0033	U		0 00072	J	
		VMP-48-10-012521	1/25/2021	0.00094	J		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		0 00099	J		<0.0031	U		<0.0052	U	
		VMP-48-10-050721	5/7/2021	<0.006	U		<0 0059	U		0.0012	J		<0 0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U	
	20 ft	VMP-48-20-110220	11/2/2020	<0.0068	U		<0 0067	U		0.0024	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-48-20-012521	1/25/2021	0.00098	J		<0 0066	U		0.0019	J		<0 0061	U		<0.0061	U		0.0011	J		<0.0032	U		<0.0054	U	
		VMP-48-20-012521-DUP	1/25/2021	0.0011	J		<0 0068	U		0.0024	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
	30 ft	VMP-48-30-073020	7/30/2020	<0.0069	U		<0 0068	U		0.03			<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-48-30-110220	11/2/2020	<0.0068	U		<0 0067	U		0.03			<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-48-30-012521	1/25/2021	<0.0066	U		<0 0066	U		0.031			<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-48-30-050721	5/7/2021	<0.0056	U		<0 0055	U		0.02			<0 0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	<0.0068	U		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0073	U		<0 0072	U		<0.0075	U		<0 0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-49-5-110420	11/4/2020	0.001	J		0.0024	J		0.0014	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-49-5-012521	1/25/2021	<0.0065	U		<0 0064	U		0.0017	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-49-5-050321	5/3/2021	<0.0063	U		<0 0062	U		<0.0065	U		<0 0057	U		<0.0057	U		0.001	J		<0.003	U		<0.005	U	
	10 ft	VMP-49-10-072420	7/24/2020	<0.0076	U		<0 0075	U		<0.0079	U		<0 0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U	
		VMP-49-10-110420	11/4/2020	<0.0071	U		<0.007	U		0.00095	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-49-10-012521	1/25/2021	<0.0061	U		<0.006	U		0.0013	J		<0 0055	U		<0.0055	U		0.0017	J		<0.0029	U		<0.0049	U	
		VMP-49-10-050321	5/3/2021	<0.006	U		<0.006	U		<0.0062	U		<0 0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U	
	20 ft	VMP-49-20-072420	7/24/2020	<0.0065	U		<0 0064	U		<0.0067	U		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	J	U
		VMP-49-20-110420	11/4/2020	<0.0069	U		<0 0068	U		0.00094	J		<0 0062	U		<0.0062	U		0.0073			<0.0032	U		<0.0055	U	
		VMP-49-20-012521	1/25/2021	<0.0064	U		<0 0063	U		0.0017	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-49-20-050321	5/3/2021	<0.0063	U		0.0037	J		<0.0065	U		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-49-20-060321-R	6/3/2021	<0.0058	U		<0 0057	U		0.00096	J		<0 0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U	
	30 ft	VMP-49-30-072420	7/24/2020	<0.007	U		<0 0069	U		0.027			<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-49-30-110420	11/4/2020	<0.55	U		0.11	J		<0.56	U		<0.49	U		<0.49	U		1.5			<0.26	U		<0.44	U	
		VMP-49-30-012521	1/25/2021	<0.007	U		<0 0069	U		0.045			<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-49-30-050321	5/3/2021	<0.0059	U		<0 0058	U		0.03			<0 0053	U		<0.0053	U		0.0084			<0.0028	U		<0.0047	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-50-5-110520	11/5/2020	<0.0062	U		<0 0062	U		0.0018	J		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U	
		VMP-50-5-012621	1/26/2021	<0.0068	U		<0 0067	U		0.0012	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-50-5-050721	5/7/2021	<0.0057	U		<0 0056	U		0.0014	J		<0 0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	10 ft	VMP-50-10-072720	7/27/2020	<0.0064	U		<0 0063	U		0.0024	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-50-10-110520	11/5/2020	<0.0066	U		0.0041	J		0.0016	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-50-10-012621	1/26/2021	<0.0069	U		<0 0068	U		0.0018	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-50-10-050721	5/7/2021	<0.0058	U		<0 0058	U		0.0014	J		<0 0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
	20 ft	VMP-50-20-072720	7/27/2020	<0.0067	U		<0 0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0026	J		<0.0031	U		<0.0053	U	
		VMP-50-20-110520	11/5/2020	<0.0067	U		<0 0066	U		0.0013	J		<0 0061	U		<0.0061	U		0.053			<0.0032	U		<0.0054	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0072	U		<0 0071	U		0.0016	J		<0 0065	U		<0.0065	U		0.053			<0.0034	U		<0.0057	U	
		VMP-50-20-022521	2/25/2021	<0.0072	U		<0 0071	U		<0.0074	U		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0069	U		<0 0068	U		<0.0071	U		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-50-20-050721	5/7/2021	<0.0055	U		<0 0054	U		0.0014	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
		VMP-50-20-050721-DUP	5/7/2021	<0.0055	U		<0 0054	U		0.0013	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	30 ft	VMP-50-30-072720	7/27/2020	<0.068	U		<0.067	U		<0.07	U		<0.061	U		0.01	J		3.9			<0.032	U		<0.054	U	
		VMP-50-30-110520	11/5/2020	<0.014	U		<0.013	U		0.0025	J		<0.012	U		<0.012	U		1.9			<0.0063	U		<0.011	U	
		VMP-50-30-012621	1/26/2021	<0.14	U		<0.13	U		<0.14	U		<0.12	U		<0.12	U		3.6			<0.064	U		<0.11	U	
		VMP-50-30-050721	5/7/2021	<0.11	U		<0.11	U		<0.11	U		<0.099	U		<0.099	U		2.5			<0.052	U		<0.087	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	<0.0065	U		0 00083	J		0.001	J		<0 0058	U		<0.0058	U		0.0033	J		<0.003	U		<0.0052	U	
		VMP-51-5-103020	10/30/2020	<0.007	U		0.0028	J		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U	
		VMP-51-5-012221	1/22/2021	<0.0069	U		<0 0068	U		0.0015	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0 00067	J	
		VMP-51-5-050421	5/4/2021	<0.0057	U		<0 0056	U		0.0014	J		<0 0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	10 ft	VMP-51-10-072320	7/23/2020	<0.0064	U		<0 0063	U		0.0017	J		<0 0058	U		<0.0058	U		0.0028	J		<0.003	U		0.0013	J	
		VMP-51-10-103020	10/30/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-51-10-012221	1/22/2021	<0.007	U		<0 0069	U		0.0016	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-51-10-050421	5/4/2021	<0.006	U		<0 0059	U		0.0014	J		<0 0054	U		<0.0054	U		0.0041	J		<0.0028	U		<0.0048	U	
	20 ft	VMP-51-20-072320	7/23/2020	<0.0071	U		<0.007	U		0.002	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-51-20-103020	10/30/2020	<0.0071	U		<0.007	U		0.0022	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-51-20-012221	1/22/2021	<0.0066	U		<0 0065	U		0.0018	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-51-20-050421	5/4/2021	<0.0056	U		<0 0055	U		0.0022	J		<0 0051	U		<0.0051	U		0 00095	J		<0.0026	U		0.0011	J	
	30 ft	VMP-51-30-072320	7/23/2020	<0.0066	U		<0 0065	U		0.0019	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-51-30-103020	10/30/2020	<0.0074	U		<0 0072	U		0.0022	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.0007	J	
		VMP-51-30-012221	1/22/2021	<0.0072	U		<0 0071	U		0.0022	J		<0 0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U	
		VMP-51-30-050421	5/4/2021	<0.0061	U		<0.006	U		0.0045	J		<0 0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	<0.0064	U		<0 0063	U		0.0011	J		<0 0058	U		<0.0058	U		0.001	J		<0.003	U		<0.0051	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0068	U		<0 0067	U		0.0012	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-52-5-102920	10/29/2020	<0.007	U		<0 0069	U		0.0014	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-52-5-012221	1/22/2021	<0.0067	U		<0 0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0043	J		<0.0031	U		<0.0053	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0062	U		<0 0061	U		<0.0063	U		0.0011	J		<0.0056	U		0.0033	J		<0.0029	U		0 00053	J	
		VMP-52-5-050421	5/4/2021	<0.0054	U		<0 0053	U		0.0015	J		<0 0049	U		<0.0049	U		0.012			<0.0025	U		<0.0043	U	
	10 ft	VMP-52-10-102920	10/29/2020	<0.0066	U		<0 0065	U		0.0016	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-52-10-012221	1/22/2021	<0.0066	U		<0 0065	U		0.0016	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-52-10-050421	5/4/2021	<0.0055	U		<0 0054	U		0.0012	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.0074	U		<0 0072	U		0.00092	J		<0 0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U	
		VMP-52-20-102920	10/29/2020	<0.0065	U		<0 0064	U		0.0016	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		0 00045	J	
		VMP-52-20-012221	1/22/2021	<0.0065	U		<0 0064	U		<0.0067	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-52-20-050421	5/4/2021	<0.0057	U		<0 0056	U		0.0015	J		<0 0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.0073	U		<0 0072	U		0.001	J		<0 0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-52-30-102920	10/29/2020	<0.0066	U		<0 0065	U		0.0017	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-52-30-012221	1/22/2021	<0.0063	U		<0 0062	U		<0.0065	U		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-52-30-050421	5/4/2021	<0.0054	U		<0 0053	U		0.0012	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.0065	U		<0 0064	U		0.0019	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-53-5-102820	10/28/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-53-5-012121	1/21/2021	<0.0066	U		<0 0065	U		0.0012	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.001	J	
		VMP-53-5-050421	5/4/2021	<0.0055	U		<0 0054	U		0.0012	J		<0.005	U		<0.005	U		0.0015	J		<0.0026	U		<0.0044	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.0073	U		<0 0072	U		0.0016	J		<0 0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-53-10-102820	10/28/2020	<0.0063	U		<0 0062	U		<0.0065	U		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		0 00081	J	
		VMP-53-10-012121	1/21/2021	<0.0067	U		<0 0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-53-10-050421	5/4/2021	<0.0052	U		0.029		J	0.0012	J		<0 0047	U		<0.0047	U		<0.0044	U		<0.0024	U		<0.0041	U	
		VMP-53-10-050421-DUP	5/4/2021	<0.0055	U		0.054		J	0.0011	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
		VMP-53-10-060321-R	6/3/2021	<0.0061	U		<0.006	U		0.00083	J		<0 0055	U		<0.0055	U		0 00055	J		<0.0029	U		<0.0049	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.007	U		<0 0069	U		0.002	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-53-20-102820	10/28/2020	<0.0068	U		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-53-20-012121	1/21/2021	<0.0068	U		<0 0067	U		0.0012	J		0.022			0.011			0.004	J		<0.0032	U		0.2		
		VMP-53-20-050421	5/4/2021	<0.006	U		<0 0059	U		0.0014	J		0.0011	J		<0.0054	U		0.0047	J		<0.0028	U		<0.0048	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.0066	U		<0 0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-53-30-102820	10/28/2020	<0.0065	U		<0 0064	U		<0.0067	U		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-53-30-012121	1/21/2021	<0.0066	U		<0 0065	U		0.0015	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-53-30-050421	5/4/2021	<0.0054	U		<0 0053	U		0.001	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	<0.0069	U		<0 0068	U		0.0017	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-54-5-102820	10/28/2020	<0.0066	U		<0 0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-54-5-012821	1/28/2021	<0.006	U		<0 0059	U		0.0014	J		<0 0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U	
		VMP-54-5-050421	5/4/2021	<0.0053	U		<0 0052	U		0.0011	J		<0 0048	U		<0.0048	U		<0.0045	U		<0.0025	U		<0.0042	U	
	10 ft	VMP-54-10-072220	7/22/2020	<0.0073	U		<0 0072	U		0.0015	J		<0 0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-54-10-102820	10/28/2020	<0.0068	U		<0 0067	U		0.0016	J		<0 0061	U		<0.0061	U		0.0019	J		<0.0032	U		<0.0054	U	
		VMP-54-10-012821	1/28/2021	<0.0063	U		<0 0062	U		0.0016	J		<0 0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0065	U		<0 0064	U		0.0016	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-54-10-050421	5/4/2021	<0.0053	U		<0 0052	U		0.0011	J		<0 0048	U		<0.0048	U		<0.0045	U		<0.0025	U		<0.0042	U	
	20 ft	VMP-54-20-072220	7/22/2020	<0.0072	U		<0 0071	U		0.0016	J		<0 0065	U		<0.0065	U		<0.0061	U		0.0022	J		<0.0057	U	
		VMP-54-20-102820	10/28/2020	<0.007	U		<0 0069	U		0.0017	J		<0 0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-54-20-012821	1/28/2021	<0.0065	U		<0 0064	U		0.0015	J		<0 0058	U		<0.0058	U		0.0039	J		<0.003	U		<0.0051	U	
		VMP-54-20-050421	5/4/2021	<0.0054	U		<0 0053	U		0.0011	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
	30 ft	VMP-54-30-072220	7/22/2020	<0.0071	U		<0.007	U		0.0024	J		0.0036	J		<0.0064	U		0.14			<0.0033	U		0.0015	J	
		VMP-54-30-102820	10/28/2020	<0.0065	U		<0 0064	U		0.0016	J		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-54-30-012821	1/28/2021	<0.0064	U		<0 0063	U		0.0015	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-54-30-050421	5/4/2021	<0.0052	U		<0 0051	U		0.0012	J		<0 0047	U		<0.0047	U		<0.0044	U		<0.0024	U		0 00064	J	
		VMP-54-30-050421-DUP	5/4/2021	<0.0051	U		<0.005	U		0.00096	J		<0 0046	U		<0.0046	U		<0.0044	U		<0.0024	U		<0.0041	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	<0.0071	U		<0.007	U		0.00096	J		0 00081	J		<0.0064	U		0.57			<0.0033	U		0.0053	J	
		VMP-56-10-072320-DUP	7/23/2020	<0.0076	U		<0 0074	U		<0.0078	U		<0 0068	U		<0.0068	U		0.6			<0.0035	U		0.0022	J	
		VMP-56-10-110320	11/3/2020	<0.0067	U		<0 0066	U		<0.0069	U		<0 0061	U		<0.0061	U		0.0038	J		<0.0032	U		<0.0054	U	
		VMP-56-10-012121	1/21/2021	<0.0071	U		<0.007	U		0.0013	J		<0 0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U	
		VMP-56-10-050521	5/5/2021	<0.0064	U		<0 0063	U		0.0011	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.0068	U		<0 0067	U		0.001	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-56-25-110320	11/3/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		0.82			<0.0033	U		<0.0056	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.007	U		<0 0069	U		<0.0072	U		<0 0063	U		<0.0063	U		0.85			<0.0033	U		0.0005	J	
		VMP-56-25-012121	1/21/2021	<0.0069	U		<0 0068	U		0.0017	J		<0 0062	U		<0.0062	U		0.016			<0.0032	U		<0.0055	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.0068	U		<0 0067	U		0.0015	J		<0 0061	U		<0.0061	U		0.014			<0.0032	U		<0.0054	J	U
		VMP-56-25-050521	5/5/2021	<0.0064	U		<0 0063	U		0.001	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-56-25-050521-DUP	5/5/2021	<0.0058	U		<0 0058	U		0.0013	J		<0 0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	<0.0066	U		<0 0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-62-5-102920	10/29/2020	<0.0066	U		<0 0065	U		0.0012	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-62-5-012221	1/22/2021	<0.0064	U		<0 0063	U		<0.0065	U		<0 0057	U		<0.0057	U		0.0028	J		<0.003	U		<0.005	U	
		VMP-62-5-050621	5/6/2021	<0.0054	U		<0 0053	U		0.0013	J		<0 0049	U		<0.0049	U		0.003	J		<0.0025	U		<0.0043	U	
	10 ft	VMP-62-10-072720	7/27/2020	<0.0061	U		<0.006	U		0.0012	J		<0 0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U	
		VMP-62-10-102920	10/29/2020	<0.0066	U		<0 0065	U		0.0018	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-62-10-012221	1/22/2021	<0.0068	U		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0 00074	J	
		VMP-62-10-050621	5/6/2021	<0.0054	U		<0 0053	U		0.0011	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	
	20 ft	VMP-62-20-072720	7/27/2020	<0.0063	U		<0 0062	U		0.002	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	J	U
		VMP-62-20-102920	10/29/2020	<0.0069	U		<0 0068	U		0.002	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-62-20-050621	5/6/2021	<0.0055	U		<0 0054	U		0.0013	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	30 ft	VMP-62-30-072720	7/27/2020	<0.0064	U		<0 0063	U		0.002	J		<0 0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-62-30-102920	10/29/2020	<0.0067	U		<0 0066	U		0.002	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-62-30-012221	1/22/2021	<0.0058	U		<0 0058	U		<0.006	U		<0 0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
		VMP-62-30-050621	5/6/2021	<0.0054	U		<0 0053	U		0.001	J		<0 0049	U		<0.0049	U		<0.0046	U		<0.0025	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				6600			1.5			860												0.29			130		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	<0.0068	U		0 00099	J		0.00088	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-63-5-110320	11/3/2020	<0.0067	U		<0 0066	U		0.0013	J		<0 0061	U		<0.0061	U		0.0018	J		<0.0032	U		<0.0054	U	
		VMP-63-5-012921	1/29/2021	<0.0066	U		<0 0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-63-5-050521	5/5/2021	<0.0061	U		<0.006	U		0.0015	J		<0 0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U	
	10 ft	VMP-63-10-072820	7/28/2020	<0.0073	U		<0 0072	U		<0.0075	U		<0 0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-63-10-110320	11/3/2020	<0.0064	U		<0 0063	U		0.0017	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-63-10-012921	1/29/2021	<0.029	U		<0.028	U		<0.029	U		<0.026	U		<0.026	U		0.63			<0.013	U		<0.023	U	
		VMP-63-10-050521	5/5/2021	<0.0058	U		<0 0057	U		0.0011	J		<0 0052	U		<0.0052	U		0.0053			<0.0027	U		<0.0046	U	
	20 ft	VMP-63-20-072820	7/28/2020	<0.0066	U		<0 0066	U		0.001	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-63-20-110320	11/3/2020	<0.0069	U		<0 0068	U		0.0014	J		<0 0062	U		<0.0062	U		0.0012	J		<0.0032	U		<0.0055	U	
		VMP-63-20-012921	1/29/2021	<0.0071	U		<0.007	U		0.0015	J		<0 0064	U		<0.0064	U		0.15			<0.0033	U		0.0018	J	
		VMP-63-20-050521	5/5/2021	<0.0064	U		0.0053	J		0.0011	J		<0 0057	U		<0.0057	U		0.0039	J		<0.003	U		<0.005	U	
	30 ft	VMP-63-30-072820	7/28/2020	<0.0066	U		<0 0066	U		0.001	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0064	U		<0 0063	U		0.00093	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-63-30-110320	11/3/2020	<0.0066	U		<0 0065	U		0.0018	J		<0 0059	J	U	<0.0059	U		0.001	J		<0.0031	U		0 00062	J	
		VMP-63-30-110320-DUP	11/3/2020	<0.0066	U		<0 0065	U		0.0014	J		<0 0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-63-30-012921	1/29/2021	<0.0068	U		<0 0067	U		0.0017	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U	
		VMP-63-30-050521	5/5/2021	<0.006	U		<0.006	U		0.0012	J		<0 0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	<0.0066	U		<0 0066	U		0.0038	J		<0.006	U		0.00073	J		<0.0057	U		<0.0031	U		<0.0053	J	U
		VMP-64-5-103020	10/30/2020	<0.0064	U		<0 0063	U		0.0014	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-64-5-012221	1/22/2021	<0.0068	U		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0 00086	J	
		VMP-64-5-050621	5/6/2021	<0.006	U		<0 0059	U		0.001	J		<0 0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U	
	10 ft	VMP-64-10-072420	7/24/2020	<0.0068	U		<0 0067	U		0.0018	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-64-10-103020	10/30/2020	<0.0069	U		<0 0068	U		0.0015	J		<0 0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-64-10-012221	1/22/2021	<0.0062	U		<0 0061	U		<0.0064	U		<0 0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U	
		VMP-64-10-050621	5/6/2021	<0.0058	U		<0 0058	U		0.00098	J		<0 0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
	20 ft	VMP-64-20-072420	7/24/2020	0.0017	J		<0 0067	U		0.0018	J		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-64-20-072420-DUP	7/24/2020	0.0015	J		<0 0067	U		<0.007	U		<0 0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-64-20-103020	10/30/2020	<0.0063	U		<0 0062	U		0.0014	J		<0 0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-64-20-012221	1/22/2021	<0.0065	U		<0 0064	U		<0.0067	U		<0 0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-64-20-050621	5/6/2021	<0.0064	U		<0 0063	U		0.00091	J		<0 0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	<0.0052	U	
		VMP-1-5-110220	11/2/2020	<0.0056	U	
		VMP-1-5-012921	1/29/2021	<0.005	U	
		VMP-1-5-050521	5/5/2021	<0.0047	U	
	8.5 ft	VMP-1-8.5-072820	7/28/2020	<0.0055	U	
		VMP-1-8.5-110220	11/2/2020	<0.0054	U	
		VMP-1-8.5-012921	1/29/2021	<0.0052	U	
		VMP-1-8.5-050521	5/5/2021	<0.0048	U	
	23.5 ft	VMP-1-23.5-072820	7/28/2020	<0.0057	U	
		VMP-1-23.5-110220	11/2/2020	<0.0056	U	
		VMP-1-23.5-012921	1/29/2021	<0.0056	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0057	U	
	38.5 ft	VMP-1-38.5-072820	7/28/2020	<0.0055	U	
		VMP-1-38.5-110220	11/2/2020	<0.005	U	
		VMP-1-38.5-012921	1/29/2021	<0.005	U	
		VMP-1-38.5-050521	5/5/2021	<0.0048	U	
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	<0.005	U	
		VMP-2-5-110420	11/4/2020	<0.0057	U	
		VMP-2-5-012521	1/25/2021	<0.0056	U	
		VMP-2-5-050721	5/7/2021	<0.0044	U	
	8.5 ft	VMP-2-8.5-072420	7/24/2020	<0.0052	U	
		VMP-2-8.5-110420	11/4/2020	<0.0053	U	
		VMP-2-8.5-012521	1/25/2021	<0.0056	U	
		VMP-2-8.5-050721	5/7/2021	<0.0045	U	
	22 ft	VMP-2-22-072420	7/24/2020	<0.0056	U	
		VMP-2-22-110420	11/4/2020	<0.053	U	
		VMP-2-22-012521	1/25/2021	<0.0055	U	
		VMP-2-22-050721	5/7/2021	<0.0046	U	
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	<0.0058	U	
		VMP-3-5-110420	11/4/2020	<0.0054	U	
		VMP-3-5-012521	1/25/2021	<0.0058	U	
		VMP-3-5-051021	5/10/2021	<0.0044	U	
	10 ft	VMP-3-10-072920	7/29/2020	<0.0055	U	
		VMP-3-10-110420	11/4/2020	<0.0059	U	
		VMP-3-10-051021	5/10/2021	<0.0043	U	
	22 ft	VMP-3-22-072920	7/29/2020	<0.0057	U	
		VMP-3-22-110420	11/4/2020	<0.0059	U	
		VMP-3-22-012521	1/25/2021	<0.0055	U	
		VMP-3-22-051021	5/10/2021	<0.0043	U	
		VMP-3-22-051021-DUP	5/10/2021	<0.0043	U	
	31.5 ft	VMP-3-31.5-072920	7/29/2020	<0.045	U	
		VMP-3-31.5-110420	11/4/2020	<5.5	U	
		VMP-3-31.5-012521	1/25/2021	<0.0056	U	
		VMP-3-31.5-051021	5/10/2021	<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	<0.0053	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0056	U	
		VMP-4-5-103020	10/30/2020	<0.0054	U	
		VMP-4-5-012821	1/28/2021	<0.0049	U	
		VMP-4-5-050521	5/5/2021	<0.0045	U	
	12 ft	VMP-4-12-073020	7/30/2020	<0.0054	U	
		VMP-4-12-103020	10/30/2020	<0.0053	U	
		VMP-4-12-012821	1/28/2021	<0.0048	U	
		VMP-4-12-050521	5/5/2021	<0.0049	U	
	23.5 ft	VMP-4-23.5-073020	7/30/2020	<0.0055	U	
		VMP-4-23.5-103020	10/30/2020	<0.0052	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0053	U	
		VMP-4-23.5-012821	1/28/2021	<0.0052	U	
		VMP-4-23.5-050521	5/5/2021	<0.0049	U	
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	<0.0056	U	
		VMP-5-5-103020	10/30/2020	<0.0052	U	
		VMP-5-5-012221	1/22/2021	<0.0054	U	
		VMP-5-5-050621	5/6/2021	<0.0043	U	
	12.5 ft	VMP-5-12.5-072320	7/23/2020	<0.0054	U	
		VMP-5-12.5-103020	10/30/2020	<0.0053	U	
		VMP-5-12.5-012221	1/22/2021	<0.0063	U	
		VMP-5-12.5-050621	5/6/2021	<0.0045	U	
		VMP-5-12.5-050621-DUP	5/6/2021	<0.0046	U	
	31 ft	VMP-5-31-072320	7/23/2020	<0.0053	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0055	U	
		VMP-5-31-103020	10/30/2020	<0.0059	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0056	U	
		VMP-5-31-012221	1/22/2021	<0.0053	U	
		VMP-5-31-050621	5/6/2021	0.0037	J	
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	<0.0056	U	
		VMP-6-5-102920	10/29/2020	<0.0054	U	
		VMP-6-5-012921	1/29/2021	<0.0053	U	
		VMP-6-5-050621	5/6/2021	<0.0048	U	
	10 ft	VMP-6-10-072220	7/22/2020	<0.0056	U	
		VMP-6-10-102920	10/29/2020	<0.0052	U	
		VMP-6-10-050621	5/6/2021	0.0024	J	
	31.5 ft	VMP-6-31.5-072220	7/22/2020	<0.0059	U	
		VMP-6-31.5-102920	10/29/2020	<0.0052	U	
		VMP-6-31.5-012921	1/29/2021	<0.0054	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.006	U	
		VMP-6-31.5-050621	5/6/2021	<0.0046	U	
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	<0.0053	U	
		VMP-7-5-110420	11/4/2020	<0.0052	U	
		VMP-7-5-012621	1/26/2021	<0.0055	U	
		VMP-7-5-050521	5/5/2021	<0.0048	U	
	13.5 ft	VMP-7-13.5-073020	7/30/2020	<0.0056	U	
		VMP-7-13.5-110420	11/4/2020	<0.0057	U	
		VMP-7-13.5-012621	1/26/2021	<0.0054	U	
		VMP-7-13.5-050521	5/5/2021	<0.0047	U	
	29.5 ft	VMP-7-29.5-073020	7/30/2020	<0.0056	U	
		VMP-7-29.5-110420	11/4/2020	<0.0053	U	
		VMP-7-29.5-012621	1/26/2021	<0.0054	U	
		VMP-7-29.5-050521	5/5/2021	<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	<0.0053	U	
		VMP-8-5-102820	10/28/2020	<0.0054	U	
		VMP-8-5-012121	1/21/2021	<0.0053	U	
		VMP-8-5-050421	5/4/2021	<0.004	U	
	9.5 ft	VMP-8-9.5-072220	7/22/2020	<0.0056	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0052	U	
		VMP-8-9.5-102820	10/28/2020	<0.0056	U	
		VMP-8-9.5-012121	1/21/2021	<0.0054	U	
		VMP-8-9.5-050421	5/4/2021	<0.0043	U	
	23.5 ft	VMP-8-23.5-072220	7/22/2020	<0.0051	U	
		VMP-8-23.5-102820	10/28/2020	<0.0053	U	
		VMP-8-23.5-012121	1/21/2021	<0.0058	U	
		VMP-8-23.5-050421	5/4/2021	<0.0041	U	
	35.5 ft	VMP-8-35.5-072220	7/22/2020	<0.0053	U	
		VMP-8-35.5-102820	10/28/2020	<0.0055	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0053	U	
		VMP-8-35.5-012121	1/21/2021	<0.0055	U	
		VMP-8-35.5-050421	5/4/2021	<0.0044	U	
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	<0.0057	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.0056	U	
		VMP-9-5-102820	10/28/2020	<0.0052	U	
		VMP-9-5-012121	1/21/2021	<0.0054	U	
		VMP-9-5-050421	5/4/2021	<0.0046	U	
	11.5 ft	VMP-9-11.5-072220	7/22/2020	<0.0056	U	
		VMP-9-11.5-102820	10/28/2020	<0.0054	U	
		VMP-9-11.5-012121	1/21/2021	<0.0056	U	
		VMP-9-11.5-050421	5/4/2021	<0.0046	U	
	25.5 ft	VMP-9-25.5-072220	7/22/2020	<0.0056	U	
		VMP-9-25.5-102820	10/28/2020	<0.0054	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0052	U	
		VMP-9-25.5-012121	1/21/2021	<0.0055	U	
		VMP-9-25.5-050421	5/4/2021	<0.0045	U	
	38.5 ft	VMP-9-38.5-012121	1/21/2021	0.0033	J	
		VMP-9-38.5-012121-DUP	1/21/2021	0.012		
VMP-18	8.5 ft	VMP-18-8.5-112420	11/24/2020	<0.0049	U	
		VMP-18-8.5-012621	1/26/2021	<0.0056	U	
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	<0.0052	U	
		VMP-19-5-110420	11/4/2020	<0.0057	U	
		VMP-19-5-012621	1/26/2021	<0.0054	U	
		VMP-19-5-051121	5/11/2021	<0.0042	U	
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	<0.0053	U	
		VMP-20-5-112420	11/24/2020	<0.0047	U	
		VMP-20-5-012521	1/25/2021	<0.005	U	
		VMP-20-5-050721	5/7/2021	<0.0043	U	
	10 ft	VMP-20-10-072320	7/23/2020	<0.0054	U	
		VMP-20-10-110220	11/2/2020	<0.005	U	
		VMP-20-10-012521	1/25/2021	<0.0052	U	
		VMP-20-10-050721	5/7/2021	<0.0041	U	
	25 ft	VMP-20-25-072320	7/23/2020	0.0022	J	
		VMP-20-25-110220	11/2/2020	<0.0049	U	
		VMP-20-25-012521	1/25/2021	<0.0052	U	
		VMP-20-25-050721	5/7/2021	<0.0042	U	
		VMP-20-25-050721-DUP	5/7/2021	<0.0041	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	<0.0056	U	
		VMP-21-5-102920	10/29/2020	<0.0054	U	
		VMP-21-5-012521	1/25/2021	<0.0056	U	
		VMP-21-5-050321	5/3/2021	<0.0047	U	
	10 ft	VMP-21-10-072420	7/24/2020	<0.005	U	
		VMP-21-10-102920	10/29/2020	<0.0055	U	
		VMP-21-10-012521	1/25/2021	<0.0057	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0056	U	
		VMP-21-10-050321	5/3/2021	<0.0047	U	
		VMP-21-10-060321-R	6/3/2021	0.0018	J	
	25 ft	VMP-21-25-072420	7/24/2020	<0.0058	U	
		VMP-21-25-102920	10/29/2020	<0.0056	U	
		VMP-21-25-012521	1/25/2021	<0.0055	U	
		VMP-21-25-050321	5/3/2021	<0.0049	U	
		VMP-21-25-050321-DUP	5/3/2021	<0.0047	U	
	33 ft	VMP-21-33-072420	7/24/2020	<0.0057	U	
		VMP-21-33-102920	10/29/2020	<0.0054	U	
		VMP-21-33-012521	1/25/2021	<0.0052	U	
		VMP-21-33-050321	5/3/2021	<0.005	U	
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	<0.0056	U	
		VMP-22-5-110520	11/5/2020	<0.0052	U	
		VMP-22-5-012621	1/26/2021	<0.0059	U	
		VMP-22-5-050321	5/3/2021	<0.005	U	
	10 ft	VMP-22-10-072320	7/23/2020	<0.0054	U	
		VMP-22-10-110520	11/5/2020	<0.0055	U	
		VMP-22-10-012621	1/26/2021	<0.0056	U	
		VMP-22-10-050321	5/3/2021	<0.005	U	
	18 ft	VMP-22-18-072320	7/23/2020	<0.006	U	
		VMP-22-18-110520	11/5/2020	<0.0052	U	
		VMP-22-18-012621	1/26/2021	<0.0057	U	
		VMP-22-18-050321	5/3/2021	<0.0048	U	
	38 ft	VMP-22-38-110520	11/5/2020	<0.0055	U	
		VMP-22-38-012621	1/26/2021	<0.0061	U	
		VMP-22-38-050321	5/3/2021	<0.048	U	
		VMP-22-38-060321-R	6/3/2021	<0.0051	U	
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	0.0029	J	
		VMP-23-5-102920	10/29/2020	<0.0055	U	
		VMP-23-5-012121	1/21/2021	<0.0057	U	
		VMP-23-5-050721	5/7/2021	<0.0046	U	
	10 ft	VMP-23-10-072320	7/23/2020	<0.0059	U	
		VMP-23-10-102920	10/29/2020	<0.0054	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0054	U	
		VMP-23-10-012121	1/21/2021	<0.0056	U	
	25 ft	VMP-23-25-072320	7/23/2020	<0.0058	U	
		VMP-23-25-102920	10/29/2020	<0.0054	U	
		VMP-23-25-012121	1/21/2021	<0.0055	U	
		VMP-23-25-050721	5/7/2021	<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	<0.0054	U	
		VMP-24-5-102920	10/29/2020	<0.0056	U	
		VMP-24-5-012121	1/21/2021	<0.0052	U	
		VMP-24-5-051121	5/11/2021	<0.0042	U	
	10 ft	VMP-24-10-072220	7/22/2020	<0.0054	U	
		VMP-24-10-102920	10/29/2020	<0.0052	U	
		VMP-24-10-022521	2/25/2021	<0.0054	U	
		VMP-24-10-051121	5/11/2021	<0.0039	U	
		VMP-24-10-051121-DUP	5/11/2021	<0.0039	U	
	22 ft	VMP-24-22-072220	7/22/2020	<0.0051	U	
		VMP-24-22-102920	10/29/2020	<0.0052	U	
		VMP-24-22-012121	1/21/2021	<0.0052	U	
		VMP-24-22-051121	5/11/2021	<0.0044	U	
	34 ft	VMP-24-34-072220	7/22/2020	<0.0056	U	
		VMP-24-34-102920	10/29/2020	<0.0056	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0056	U	
		VMP-24-34-012121	1/21/2021	<0.0058	U	
		VMP-24-34-051121	5/11/2021	<0.0043	U	
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	<0.0057	U	
		VMP-32-5-110420	11/4/2020	<0.0056	U	
		VMP-32-5-012621	1/26/2021	<0.0055	U	
		VMP-32-5-051221	5/12/2021	<0.0043	U	
	10 ft	VMP-32-10-072920	7/29/2020	<0.0057	U	
		VMP-32-10-110420	11/4/2020	<0.0052	U	
		VMP-32-10-012621	1/26/2021	<0.0055	U	
		VMP-32-10-051221	5/12/2021	<0.0046	U	
		VMP-32-10-051221-DUP	5/12/2021	<0.0044	U	
	20 ft	VMP-32-20-072920	7/29/2020	<0.0054	U	
		VMP-32-20-110420	11/4/2020	<0.0056	U	
		VMP-32-20-012621	1/26/2021	<0.0058	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0056	U	
	30 ft	VMP-32-30-072920	7/29/2020	<0.0058	U	
		VMP-32-30-110420	11/4/2020	0.0014	J	
		VMP-32-30-110420-DUP	11/4/2020	<0.0061	U	
		VMP-32-30-012621	1/26/2021	<0.0055	U	
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	<0.0054	U	
		VMP-42-10-110520	11/5/2020	<0.0052	U	
		VMP-42-10-012921	1/29/2021	<0.0055	U	
		VMP-42-10-050521	5/5/2021	<0.0044	U	
	20 ft	VMP-42-20-072820	7/28/2020	<0.0053	U	
		VMP-42-20-110520	11/5/2020	<0.0052	U	
		VMP-42-20-012921	1/29/2021	<0.0057	U	
		VMP-42-20-050521	5/5/2021	<0.005	U	
	30 ft	VMP-42-30-072820	7/28/2020	<0.0052	U	
		VMP-42-30-110520	11/5/2020	<0.0055	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0054	U	
		VMP-42-30-012921	1/29/2021	<0.0055	U	
		VMP-42-30-050521	5/5/2021	<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	<0.0057	U	
		VMP-43-10-110320	11/3/2020	<0.0057	U	
		VMP-43-10-012621	1/26/2021	<0.0052	U	
		VMP-43-10-050521	5/5/2021	<0.0048	U	
	20 ft	VMP-43-20-072820	7/28/2020	<0.0059	U	
		VMP-43-20-110320	11/3/2020	<0.0055	U	
		VMP-43-20-012621	1/26/2021	<0.0052	U	
		VMP-43-20-050521	5/5/2021	<0.0044	U	
	30 ft	VMP-43-30-072820	7/28/2020	<0.0057	U	
		VMP-43-30-110320	11/3/2020	<0.0054	U	
		VMP-43-30-022521	2/25/2021	<0.0054	U	
		VMP-43-30-050521	5/5/2021	<0.0048	U	
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	<0.0052	U	
	20 ft	VMP-44-20-072820	7/28/2020	<0.0055	U	
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	<0.0059	U	
		VMP-45-10-110520	11/5/2020	<0.0057	U	
		VMP-45-10-012621	1/26/2021	<0.0052	U	
		VMP-45-10-060321	6/3/2021	<0.0048	U	
	20 ft	VMP-45-20-072820	7/28/2020	<0.0059	U	
		VMP-45-20-110520	11/5/2020	<0.0054	U	
		VMP-45-20-012621	1/26/2021	<0.0052	U	
		VMP-45-20-050521	5/5/2021	<0.0044	U	
	30 ft	VMP-45-30-072820	7/28/2020	<0.0064	U	
		VMP-45-30-110520	11/5/2020	<0.0052	U	
		VMP-45-30-012621	1/26/2021	<0.0052	U	
		VMP-45-30-050521	5/5/2021	<0.0043	U	
		VMP-45-30-050521-DUP	5/5/2021	<0.0044	U	
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	<0.0054	U	
		VMP-47-5-110220	11/2/2020	<0.0053	U	
		VMP-47-5-012221	1/22/2021	<0.0055	U	
		VMP-47-5-050621	5/6/2021	<0.0045	U	
	10 ft	VMP-47-10-072720	7/27/2020	<0.0051	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0052	U	
		VMP-47-10-110220	11/2/2020	<0.005	U	
		VMP-47-10-012221	1/22/2021	0.00085	J	
		VMP-47-10-050621	5/6/2021	<0.0044	U	
	20 ft	VMP-47-20-072720	7/27/2020	<0.0051	U	
		VMP-47-20-110220	11/2/2020	<0.0057	U	
		VMP-47-20-012221	1/22/2021	<0.0053	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0052	U	
		VMP-47-20-050621	5/6/2021	<0.0043	U	
	30 ft	VMP-47-30-072720	7/27/2020	<0.0053	U	
		VMP-47-30-110220	11/2/2020	<0.005	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0049	U	
		VMP-47-30-012221	1/22/2021	<0.0055	U	
		VMP-47-30-050621	5/6/2021	<0.0044	U	
		VMP-47-30-050621-DUP	5/6/2021	<0.0044	U	

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	<0.0049	U	
		VMP-48-5-110220	11/2/2020	<0.005	U	
		VMP-48-5-012521	1/25/2021	<0.0052	U	
		VMP-48-5-050721	5/7/2021	<0.0046	U	
	10 ft	VMP-48-10-073020	7/30/2020	<0.0056	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0052	U	
		VMP-48-10-110220	11/2/2020	0.00069	J	
		VMP-48-10-012521	1/25/2021	<0.0052	U	
		VMP-48-10-050721	5/7/2021	<0.0048	U	
	20 ft	VMP-48-20-110220	11/2/2020	<0.0054	U	
		VMP-48-20-012521	1/25/2021	<0.0054	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.0055	U	
	30 ft	VMP-48-30-073020	7/30/2020	<0.0055	U	
		VMP-48-30-110220	11/2/2020	<0.0054	U	
		VMP-48-30-012521	1/25/2021	<0.0053	U	
		VMP-48-30-050721	5/7/2021	<0.0045	U	
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	<0.0054	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0058	U	
		VMP-49-5-110420	11/4/2020	<0.0056	U	
		VMP-49-5-012521	1/25/2021	<0.0052	U	
		VMP-49-5-050321	5/3/2021	<0.005	U	
	10 ft	VMP-49-10-072420	7/24/2020	<0.0061	U	
		VMP-49-10-110420	11/4/2020	<0.0057	U	
		VMP-49-10-012521	1/25/2021	<0.0049	U	
		VMP-49-10-050321	5/3/2021	<0.0048	U	
	20 ft	VMP-49-20-072420	7/24/2020	<0.0052	U	
		VMP-49-20-110420	11/4/2020	<0.0055	U	
		VMP-49-20-012521	1/25/2021	<0.005	U	
		VMP-49-20-050321	5/3/2021	<0.005	U	
		VMP-49-20-060321-R	6/3/2021	<0.0046	U	
	30 ft	VMP-49-30-072420	7/24/2020	<0.0056	U	
		VMP-49-30-110420	11/4/2020	<0.44	U	
		VMP-49-30-012521	1/25/2021	<0.0056	U	
		VMP-49-30-050321	5/3/2021	<0.0047	U	
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	<0.0056	U	
		VMP-50-5-110520	11/5/2020	<0.005	U	
		VMP-50-5-012621	1/26/2021	<0.0054	U	
		VMP-50-5-050721	5/7/2021	<0.0046	U	
	10 ft	VMP-50-10-072720	7/27/2020	<0.0051	U	
		VMP-50-10-110520	11/5/2020	<0.0052	U	
		VMP-50-10-012621	1/26/2021	<0.0055	U	
		VMP-50-10-050721	5/7/2021	<0.0046	U	
	20 ft	VMP-50-20-072720	7/27/2020	<0.0053	U	
		VMP-50-20-110520	11/5/2020	<0.0054	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0057	U	
		VMP-50-20-022521	2/25/2021	<0.0058	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0055	U	
		VMP-50-20-050721	5/7/2021	<0.0044	U	
		VMP-50-20-050721-DUP	5/7/2021	<0.0044	U	
	30 ft	VMP-50-30-072720	7/27/2020	<0.054	U	
		VMP-50-30-110520	11/5/2020	<0.011	U	
		VMP-50-30-012621	1/26/2021	<0.11	U	
		VMP-50-30-050721	5/7/2021	<0.087	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	<0.0052	U	
		VMP-51-5-103020	10/30/2020	<0.0055	U	
		VMP-51-5-012221	1/22/2021	<0.0055	U	
		VMP-51-5-050421	5/4/2021	<0.0046	U	
	10 ft	VMP-51-10-072320	7/23/2020	0.00054	J	
		VMP-51-10-103020	10/30/2020	<0.0056	U	
		VMP-51-10-012221	1/22/2021	<0.0056	U	
		VMP-51-10-050421	5/4/2021	<0.0048	U	
	20 ft	VMP-51-20-072320	7/23/2020	<0.0057	U	
		VMP-51-20-103020	10/30/2020	<0.0057	U	
		VMP-51-20-012221	1/22/2021	<0.0052	U	
		VMP-51-20-050421	5/4/2021	<0.0045	U	
	30 ft	VMP-51-30-072320	7/23/2020	<0.0053	U	
		VMP-51-30-103020	10/30/2020	<0.0059	U	
		VMP-51-30-012221	1/22/2021	<0.0057	U	
		VMP-51-30-050421	5/4/2021	<0.0049	U	
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	<0.0051	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0054	U	
		VMP-52-5-102920	10/29/2020	<0.0056	U	
		VMP-52-5-012221	1/22/2021	<0.0053	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0049	U	
		VMP-52-5-050421	5/4/2021	<0.0043	U	
	10 ft	VMP-52-10-102920	10/29/2020	<0.0052	U	
		VMP-52-10-012221	1/22/2021	<0.0052	U	
		VMP-52-10-050421	5/4/2021	<0.0044	U	
	20 ft	VMP-52-20-072320	7/23/2020	<0.0059	U	
		VMP-52-20-102920	10/29/2020	<0.0052	U	
		VMP-52-20-012221	1/22/2021	<0.0052	U	
		VMP-52-20-050421	5/4/2021	<0.0046	U	
	30 ft	VMP-52-30-072320	7/23/2020	<0.0058	U	
		VMP-52-30-102920	10/29/2020	<0.0052	U	
		VMP-52-30-012221	1/22/2021	<0.005	U	
		VMP-52-30-050421	5/4/2021	<0.0043	U	
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	<0.0052	U	
		VMP-53-5-102820	10/28/2020	<0.0056	U	
		VMP-53-5-012121	1/21/2021	<0.0052	U	
		VMP-53-5-050421	5/4/2021	<0.0044	U	
	10 ft	VMP-53-10-072220	7/22/2020	<0.0058	U	
		VMP-53-10-102820	10/28/2020	<0.005	U	
		VMP-53-10-012121	1/21/2021	<0.0053	U	
		VMP-53-10-050421	5/4/2021	<0.0041	U	
		VMP-53-10-050421-DUP	5/4/2021	<0.0044	U	
		VMP-53-10-060321-R	6/3/2021	<0.0049	U	
	20 ft	VMP-53-20-072220	7/22/2020	<0.0056	U	
		VMP-53-20-102820	10/28/2020	<0.0054	U	
		VMP-53-20-012121	1/21/2021	0.072		
		VMP-53-20-050421	5/4/2021	<0.0048	U	
	30 ft	VMP-53-30-072220	7/22/2020	<0.0053	U	
		VMP-53-30-102820	10/28/2020	<0.0052	U	
		VMP-53-30-012121	1/21/2021	<0.0052	U	
		VMP-53-30-050421	5/4/2021	<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	<0.0055	U	
		VMP-54-5-102820	10/28/2020	<0.0053	U	
		VMP-54-5-012821	1/28/2021	<0.0048	U	
		VMP-54-5-050421	5/4/2021	<0.0042	U	
	10 ft	VMP-54-10-072220	7/22/2020	<0.0058	U	
		VMP-54-10-102820	10/28/2020	<0.0054	U	
		VMP-54-10-012821	1/28/2021	<0.005	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0052	U	
		VMP-54-10-050421	5/4/2021	<0.0042	U	
	20 ft	VMP-54-20-072220	7/22/2020	<0.0057	U	
		VMP-54-20-102820	10/28/2020	<0.0056	U	
		VMP-54-20-012821	1/28/2021	<0.0051	U	
		VMP-54-20-050421	5/4/2021	<0.0043	U	
	30 ft	VMP-54-30-072220	7/22/2020	<0.0057	U	
		VMP-54-30-102820	10/28/2020	<0.0052	U	
		VMP-54-30-012821	1/28/2021	<0.0051	U	
		VMP-54-30-050421	5/4/2021	<0.0041	U	
		VMP-54-30-050421-DUP	5/4/2021	<0.0041	U	
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	0.00068	J	
		VMP-56-10-072320-DUP	7/23/2020	<0.006	U	
		VMP-56-10-110320	11/3/2020	<0.0054	U	
		VMP-56-10-012121	1/21/2021	<0.0057	U	
		VMP-56-10-050521	5/5/2021	<0.0051	U	
	25 ft	VMP-56-25-072320	7/23/2020	<0.0054	U	
		VMP-56-25-110320	11/3/2020	<0.0056	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0056	U	
		VMP-56-25-012121	1/21/2021	<0.0055	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.0054	U	
		VMP-56-25-050521	5/5/2021	<0.0051	U	
		VMP-56-25-050521-DUP	5/5/2021	<0.0046	U	
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	<0.0053	U	
		VMP-62-5-102920	10/29/2020	<0.0052	U	
		VMP-62-5-012221	1/22/2021	<0.005	U	
		VMP-62-5-050621	5/6/2021	<0.0043	U	
	10 ft	VMP-62-10-072720	7/27/2020	<0.0049	U	
		VMP-62-10-102920	10/29/2020	<0.0052	U	
		VMP-62-10-012221	1/22/2021	<0.0054	U	
		VMP-62-10-050621	5/6/2021	<0.0043	U	
	20 ft	VMP-62-20-072720	7/27/2020	<0.005	U	
		VMP-62-20-102920	10/29/2020	<0.0055	U	
		VMP-62-20-050621	5/6/2021	<0.0044	U	
	30 ft	VMP-62-30-072720	7/27/2020	<0.0051	U	
		VMP-62-30-102920	10/29/2020	<0.0054	U	
		VMP-62-30-012221	1/22/2021	<0.0046	U	
		VMP-62-30-050621	5/6/2021	<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: VILLAGE - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				120		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	<0.0054	U	
		VMP-63-5-110320	11/3/2020	<0.0054	U	
		VMP-63-5-012921	1/29/2021	<0.0053	U	
		VMP-63-5-050521	5/5/2021	<0.0049	U	
	10 ft	VMP-63-10-072820	7/28/2020	<0.0058	U	
		VMP-63-10-110320	11/3/2020	<0.005	U	
		VMP-63-10-012921	1/29/2021	<0.023	U	
		VMP-63-10-050521	5/5/2021	<0.0046	U	
	20 ft	VMP-63-20-072820	7/28/2020	<0.0053	U	
		VMP-63-20-110320	11/3/2020	<0.0055	U	
		VMP-63-20-012921	1/29/2021	<0.0057	U	
		VMP-63-20-050521	5/5/2021	<0.005	U	
	30 ft	VMP-63-30-072820	7/28/2020	<0.0053	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.005	U	
		VMP-63-30-110320	11/3/2020	<0.0052	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0052	U	
		VMP-63-30-012921	1/29/2021	<0.0054	U	
		VMP-63-30-050521	5/5/2021	<0.0048	U	
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	<0.0053	U	
		VMP-64-5-103020	10/30/2020	<0.005	U	
		VMP-64-5-012221	1/22/2021	<0.0054	U	
		VMP-64-5-050621	5/6/2021	<0.0048	U	
	10 ft	VMP-64-10-072420	7/24/2020	<0.0054	U	
		VMP-64-10-103020	10/30/2020	<0.0055	U	
		VMP-64-10-012221	1/22/2021	<0.0049	U	
		VMP-64-10-050621	5/6/2021	<0.0046	U	
	20 ft	VMP-64-20-072420	7/24/2020	<0.0054	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0054	U	
		VMP-64-20-103020	10/30/2020	<0.005	U	
		VMP-64-20-012221	1/22/2021	<0.0052	U	
		VMP-64-20-050621	5/6/2021	<0.0051	U	

Notes:
Analytes shown were detected in at least one location on Table 5 or Table 6 during the current quarter or previous 3 quarters.
Yellow highlighted cells indicate readings that exceed residential screening criterion.
Blank cells in Result column indicate that analyte was not on target analyte list.

Lab Qualifiers
J = Estimated value; results between the MDL and RL
U = Compound analyzed for but not detected above the RL
CN = Indicates potential high bias due to use of Tedlar© bag for off-line dilution
ND,UJ = Non-detected compound associated with low bias in the continuing calibration verification (CCV)
J0 = Estimated value due to bias in the CCV

AECOM Qualifiers
J = Estimated detection
UJ = Estimated non-detect
U = Non-detect due to blank contamination

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			2.8			450000			52			42						40000			5300		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	0.013	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.002	J		<0.016	U	
		VMP-10-5-103020	10/30/2020	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.015	U	
		VMP-10-5-012721	1/27/2021	0.0061	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-10-5-050721	5/7/2021	0.013	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
	10 ft	VMP-10-10-073020	7/30/2020	0.028	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0067	J		0.0058	J	
		VMP-10-10-103020	10/30/2020	<0.03	J	U	0.0009	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-10-10-012721	1/27/2021	0.0074	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-10-10-050721	5/7/2021	0.012	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		0.0067	J	
	20 ft	VMP-10-20-073020	7/30/2020	0.016	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0023	J		<0.016	U	
		VMP-10-20-103020	10/30/2020	0.016	J		0.00041	J		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0033	J		0.048		
		VMP-10-20-012721	1/27/2021	0.0069	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-10-20-050721	5/7/2021	0.013	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.011	U		<0.014	U		0.0096	J	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.029	J	U	0.0004	J		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-11-5-012721	1/27/2021	0.0075	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		0.0086	J		<0.014	U		<0.015	U	
		VMP-11-5-051021	5/10/2021	0.012	J		<0.0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.0014	J	
	8 ft	VMP-11-8-072720	7/27/2020	0.019	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.012	U		0.0025	J		0.0021	J	
		VMP-11-8-072720-DUP	7/27/2020	0.013	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-11-8-102820	10/28/2020	0.019	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-11-8-012721	1/27/2021	0.0077	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		0.0056	J		<0.014	U		<0.014	U	
		VMP-11-8-051021	5/10/2021	0.01	J		<0.0032	U		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		<0.012	U	
	29 ft	VMP-11-29-072720	7/27/2020	0.023	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		0.0083	J		0.0031	J		<0.015	U	
		VMP-11-29-102820	10/28/2020	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-11-29-012721	1/27/2021	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.011	U		0.0013	J		<0.014	U	
		VMP-11-29-051021	5/10/2021	0.039			<0.0032	U		<0.0067	U		<0.01	U		<0.039	U		<0.0095	U		0.0039	J		<0.012	U	
	38 ft	VMP-11-38-072720	7/27/2020	0.039			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0079	J		0.0021	J	
		VMP-11-38-102820	10/28/2020	0.071			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		0.009	J		0.0034	J		<0.015	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	0.02	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		0.0033	J		<0.015	U	
		VMP-12-5-110420	11/4/2020	0.014	J		0.00082	J		<0.0084	U		<0.013	U		<0.049	U		0.11			0.0016	J		<0.016	U	
		VMP-12-5-012821	1/28/2021	0.011	J		0.00033	J		<0.0081	U		<0.012	U		<0.047	U		0.0056	J		0.0025	J		<0.015	U	
		VMP-12-5-012821-DUP	1/28/2021	0.011	J		0.00046	J		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		0.0026	J		<0.015	U	
		VMP-12-5-051121	5/11/2021	0.016	J		0.00052	J		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		0.0026	J		<0.013	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	0.018	J		0.0012	J		<0.0085	U		<0.013	U		<0.049	U		0.0017	J		<0.015	U		0.0019	J	
		VMP-12-11.5-110420	11/4/2020	<0.03	J	U	0.00038	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-12-11.5-012821	1/28/2021	0.008	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		0.02			<0.014	U		<0.014	U	
		VMP-12-11.5-051121	5/11/2021	0.014	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0099	U		<0.012	U		0.0017	J	
	25 ft	VMP-12-25-072920	7/29/2020	1	J		2.1			<2.5	U		<3.9	U		<15	U		140			<4.4	U		<4.7	U	
		VMP-12-25-072920-DUP	7/29/2020	1.2	J		2.1			<2.4	U		<3.7	U		<14	U		140			<4.2	U		0.6	J	
		VMP-12-25-110420	11/4/2020	<1.2	U		<0.41	U		<0.86	U		<1.3	U		<2	U		91			<1.5	U		<1.6	U	
		VMP-12-25-012821	1/28/2021	0.028	J		<0.075	U		<0.16	U		<0.24	U		<0.91	U		<0.22	U		<0.28	U		<0.29	U	
		VMP-12-25-051121	5/11/2021	<4.9	U		0.53	J		<3.4	U		<5.3	U		<8	U		96			<6.1	U		<6.4	U	
	39 ft	VMP-12-39-012821	1/28/2021	<58	U		300			<41	U		<63	U		<95	U		1900			<72	U		<76	U	

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			2.8			450000			52			42						40000			5300		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	0.026	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		0.011	J		0.004	J		<0.016	U	
		VMP-13-5-110220	11/2/2020	0.019	J		0.00033	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		0.0018	J		<0.015	U	
		VMP-13-5-012721	1/27/2021	0.0062	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-13-5-051021	5/10/2021	0.012	J		<0.0032	U		<0.0067	U		<0.01	U		<0.039	U		<0.0095	U		<0.012	U		<0.012	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	0.02	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0032	J		<0.016	U	
		VMP-13-10.5-110220	11/2/2020	0.015	J		0.00034	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-13-10.5-012721	1/27/2021	0.018	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		0.002	J		<0.013	U	
		VMP-13-10.5-051021	5/10/2021	0.016	J		0.00059	J		<0.0061	U		<0.0094	U		<0.035	U		<0.0086	U		<0.011	U		<0.011	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	0.0079	J		0.0012	J		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-13-21.5-110220	11/2/2020	0.014	J		0.0005	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		0.0026	J		<0.016	U	
		VMP-13-21.5-110220-DUP	11/2/2020	0.016	J		0.00041	J		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-13-21.5-012721	1/27/2021	0.029			<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.011	U		<0.013	U		<0.014	U	
		VMP-13-21.5-051021	5/10/2021	0.04			<0.0031	U		<0.0065	U		<0.01	U		<0.038	U		<0.0093	U		0.0033	J		0.0027	J	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	0.023	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		0.0016	J		<0.016	U	
		VMP-13-29.5-012721	1/27/2021	0.0099	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-13-29.5-051021	5/10/2021	0.016	J		0.00081	J		<0.0066	U		<0.01	U		<0.038	U		<0.0094	U		<0.012	U		0.045		
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	0.016	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.012	U		0.0015	J		<0.016	U	
		VMP-14-5-110220	11/2/2020	0.014	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		0.0022	J		<0.015	J	U
		VMP-14-5-012721	1/27/2021	0.018	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.011	U		0.0032	J		<0.015	U	
		VMP-14-5-051021	5/10/2021	0.0051	J		<0.0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.013	U	
	11.5 ft	VMP-14-11.5-073020	7/30/2020	0.0072	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		0.0021	J		<0.015	U		0.0047	J	
		VMP-14-11.5-073020-DUP	7/30/2020	0.02	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.013	U		0.0026	J		<0.018	U	
		VMP-14-11.5-110220	11/2/2020	0.037			<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.012	U		0.0046	J		<0.016	U	
		VMP-14-11.5-012721	1/27/2021	0.016	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
		VMP-14-11.5-051021	5/10/2021	0.016	J		<0.0031	U		<0.0066	U		<0.01	U		<0.038	U		<0.0093	U		<0.012	U		<0.012	U	
	20 ft	VMP-14-20-073020	7/30/2020	0.016	J		0.0014	J		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-14-20-110220	11/2/2020	0.019	J		0.0011	J		<0.0081	U		<0.012	U		<0.047	U		0.0067	J		0.0016	J		<0.015	U	
		VMP-14-20-012721	1/27/2021	0.0061	J		0.00086	J		<0.0078	U		<0.012	U		<0.045	U		0.0038	J		<0.014	U		<0.014	U	
		VMP-14-20-051021	5/10/2021	0.0098	J		0.00058	J		<0.0073	U		<0.011	U		<0.042	U		0.0099	J		<0.013	U		<0.014	U	
		VMP-14-20-051021-DUP	5/10/2021	0.0092	J		0.00045	J		<0.0069	U		<0.011	U		<0.04	U		0.0076	J		<0.012	U		<0.013	U	
	29 ft	VMP-14-29-012721	1/27/2021	0.0093	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		0.015			<0.015	U		<0.016	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	0.026	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.013	U		<0.017	U		<0.018	U	
		VMP-15-5-110320	11/3/2020	0.06			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		0.0016	J		0.0024	J	
		VMP-15-5-012821	1/28/2021	0.0079	J		<0.0033	U		<0.0069	U		<0.01	U		<0.04	U		0.0052	J		0.0013	J		0.0013	J	
		VMP-15-5-051121	5/11/2021	0.011	J		<0.0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.32	U		<0.043	U		<0.09	U		<0.14	U		<0.52	U		<0.13	U		<0.16	U		<0.17	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.31	U		<0.042	U		<0.088	U		<0.14	U		<0.51	U		0.09	J		<0.16	U		<0.16	U	
		VMP-15-21.5-110320	11/3/2020	0.022	J		0.0016	J		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-15-21.5-012821	1/28/2021	<0.032	J	U	<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-15-21.5-051121	5/11/2021	<0.12	U		<0.016	U		<0.034	U		<0.052	U		<0.2	U		0.033	J		<0.06	U		<0.063	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	0.066	J		0.01	J		<0.035	U		<0.054	U		<0.2	U		0.056			<0.061	U		<0.065	U	
		VMP-15-25.5-012821	1/28/2021	0.012	J		0.00055	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-15-25.5-051121	5/11/2021	<0.45	U		<0.061	U		<0.13	U		<0.2	U		<0.74	U		0.18			<0.22	U		<0.24	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			2.8			450000			52			42						40000			5300		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	0.022	J		0.0012	J		<0.0087	U		<0.013	U		<0.05	U		0.071			0.0026	J		0.0028	J	
		VMP-16-5-110420	11/4/2020	0.011	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.012	U		0.0026	J		<0.015	U	
		VMP-16-5-012921	1/29/2021	0.0082	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-16-5-012921-DUP	1/29/2021	0.012	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	U	
		VMP-16-5-051121	5/11/2021	0.013	J		<0.0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		<0.012	U		<0.013	U	
		VMP-16-5-051121-DUP	5/11/2021	0.013	J		<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		0.00097	J	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	10	J		1.8	J		<13	U		<20	U		<75	U		300			<23	U		2.9	J	
		VMP-16-13.5-110420	11/4/2020	<0.57	U		<0.19	U		<0.4	U		<0.62	U		<0.94	U		11		J	<0.71	U		<0.75	U	
		VMP-16-13.5-012921	1/29/2021	10	J		<2.4	U		<5.1	U		<7.8	U		<29	U		98			<8.9	U		1.5	J	
		VMP-16-13.5-051121	5/11/2021	<0.68	U		0.46			<0.48	U		<0.74	U		<1.1	U		4.2			<0.85	U		<0.9	U	
	19 ft	VMP-16-19-072920	7/29/2020	9.9	J		<5.5	U		<12	U		<18	U		<67	U		260			<20	U		<21	U	
		VMP-16-19-110420	11/4/2020	<2.4	U		<0.82	U		<1.7	U		<2.7	U		<4	U		150			<3	U		<3.2	U	
		VMP-16-19-012921	1/29/2021	20	J		<4	U		<8.4	U		<13	U		<48	U		130			<15	U		3.8	J	
		VMP-16-19-051121	5/11/2021	<5.2	U		10			<3.6	U		<5.6	U		<8.5	U		130			<6.4	U		<6.8	U	
	31 ft	VMP-16-31-072920	7/29/2020	15	J		<10	U		<22	U		<34	U		<130	U		250			<38	U		<41	U	
		VMP-16-31-110420	11/4/2020	<6.1	U		<2.1	U		<4.3	U		<6.7	U		<10	U		190			<7.6	U		<8	U	
		VMP-16-31-110420-DUP	11/4/2020	<5.6	U		<1.9	U		<4	U		<6.2	U		<9.2	U		190			<7	U		<7.4	U	
		VMP-16-31-012921	1/29/2021	23	J		16			<12	U		<19	U		<71	U		200			<22	U		3.7	J	
		VMP-16-31-051121	5/11/2021	<4.9	U		910			<3.5	U		<5.4	U		<8.1	U		550			<6.1	U		<6.5	U	
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	0.014	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		<0.016	U		<0.017	U	
		VMP-17-5-110320	11/3/2020	0.018	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.012	U		<0.016	U		<0.016	J	U
		VMP-17-5-012821	1/28/2021	0.0067	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.01	U		<0.013	U		<0.013	U	
		VMP-17-5-050621	5/6/2021	0.0052	J		<0.0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		<0.012	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	0.013	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		0.0058	J		<0.015	U		<0.016	U	
		VMP-25-5-072320-DUP	7/23/2020	0.0081	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		0.0053	J		<0.015	U		0.002	J	
		VMP-25-5-103020	10/30/2020	<0.029	J	U	0.0026	J		<0.0082	U		<0.013	U		<0.048	U		0.15			<0.014	U		<0.015	U	
		VMP-25-5-103020-DUP	10/30/2020	<0.03	J	U	0.0027	J		<0.0085	U		<0.013	U		<0.049	U		0.16			<0.015	U		<0.016	U	
		VMP-25-5-012621	1/26/2021	0.018	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-25-5-012621-DUP	1/26/2021	0.035			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.012	U		<0.014	U		<0.015	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	0.11			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.012	U		0.39			0.023		
		VMP-29-10-110220	11/2/2020	0.017	J		0.00048	J		<0.0081	U		<0.012	U		<0.047	U		0.023			0.002	J		<0.015	U	
		VMP-29-10-012721	1/27/2021	0.007	J		0.00055	J		<0.0081	U		<0.012	U		<0.047	U		0.0089	J		0.0016	J		0.0015	J	
		VMP-29-10-051021	5/10/2021	0.011	J		0.01			<0.0063	U		<0.0098	U		<0.037	U		<0.009	U		<0.011	U		0.0013	J	
	18 ft	VMP-29-18-072720	7/27/2020	0.33			0.007			<0.0084	U		<0.013	U		<0.049	U		<0.012	U		1			0.027		
		VMP-29-18-110220	11/2/2020	0.1			0.00088	J		<0.0079	U		<0.012	U		<0.046	U		0.016			0.17			0.0049	J	
		VMP-29-18-012721	1/27/2021	0.037			0.00086	J		<0.008	U		<0.012	U		<0.047	U		0.0088	J		0.072			0.0025	J	
		VMP-29-18-051021	5/10/2021	0.26			0.0043			<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.69			0.23		
	26 ft	VMP-29-26-072720	7/27/2020	0.19			0.016			<0.0076	U		<0.012	U		<0.044	U		<0.011	U		0.73			0.058		
		VMP-29-26-110220	11/2/2020	0.02	J		0.00075	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		0.011	J		0.049		
		VMP-29-26-012721	1/27/2021	0.018	J		0.00028	J		<0.0069	U		<0.011	U		<0.04	U		<0.0098	U		0.012			0.011	J	
		VMP-29-26-051021	5/10/2021	0.01	J		0.00088	J		<0.0065	U		<0.01	U		<0.038	U		<0.0093	U		0.003	J		0.014		
		VMP-29-26-051021-DUP	5/10/2021	0.022	J		0.0012	J		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		<0.012	U		0.012	J	

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			Butane			2-Butanone			Carbon disulfide		
				750000			2.8			450000			52			42						40000			5300		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	0.035			<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.011	U		0.0064	J		0.0044	J	
		VMP-30-10-110220	11/2/2020	0.04			0.00086	J		<0.0079	U		<0.012	U		<0.046	U		0.011	J		0.042			0.0035	J	
		VMP-30-10-012721	1/27/2021	0.015	J		0.00046	J		<0.0071	U		<0.011	U		<0.041	U		<0.01	U		0.014			0.0016	J	
		VMP-30-10-012721-DUP	1/27/2021	0.013	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.01	U		0.016			0.0018	J	
		VMP-30-10-051021	5/10/2021	0.069			0.002	J		<0.0067	U		<0.01	U		<0.039	U		<0.0096	U		0.04			0.019		
	18 ft	VMP-30-18-072720	7/27/2020	3.4			0.007	J		<0.034	U		<0.053	U		<0.2	U		<0.049	U		10			0.23		
		VMP-30-18-110220	11/2/2020	0.016	J		0.0022	J		<0.0078	U		<0.012	U		<0.045	U		0.013			0.01	J		0.0047	J	
		VMP-30-18-012721	1/27/2021	0.012	J		0.0012	J		<0.0079	U		<0.012	U		<0.046	U		0.007	J		0.0079	J		0.0019	J	
		VMP-30-18-051021	5/10/2021	0.022	J		0.0028	J		<0.0068	U		<0.01	U		<0.039	U		<0.0096	U		0.011	J		0.078		
	26 ft	VMP-30-26-072720	7/27/2020	0.064			0.0012	J		<0.008	U		<0.012	U		<0.046	U		<0.011	U		0.15			0.11		
		VMP-30-26-110220	11/2/2020	0.04			0.004			<0.0082	U		<0.013	U		<0.048	U		0.011	J		0.016			0.01	J	
		VMP-30-26-012721	1/27/2021	0.014	J		0.0016	J		<0.008	U		<0.012	U		<0.047	U		0.0067	J		0.0052	J		0.004	J	
		VMP-30-26-051021	5/10/2021	0.019	J		0.035			<0.0063	U		<0.0097	U		<0.036	U		<0.0089	U		0.0046	J		0.086		
		VMP-30-26-051021-DUP	5/10/2021	0.012	J		0.034			<0.0064	U		<0.0099	U		<0.037	U		<0.0091	U		0.0038	J		0.084		
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	0.018	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.013	U		0.002	J		<0.017	U	
		VMP-41-10-072920-DUP	7/29/2020	0.011	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.013	U		0.0022	J		0.0027	J	
		VMP-41-10-103020	10/30/2020	<0.031	J	U	<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.012	U		<0.015	U		<0.016	U	
		VMP-41-10-012721	1/27/2021	0.0069	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.011	U		0.0012	J		<0.014	U	
		VMP-41-10-050621	5/6/2021	0.03		J	<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
	20 ft	VMP-41-20-072920	7/29/2020	0.0068	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		0.0039	J		0.0018	J		0.0029	J	
		VMP-41-20-103020	10/30/2020	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		0.0028	J		<0.015	U	
		VMP-41-20-012721	1/27/2021	0.031			0.00047	J		<0.0081	U		<0.012	U		<0.047	U		0.011	J		0.0043	J		<0.015	U	
		VMP-41-20-050621	5/6/2021	0.022	J		<0.003	U		<0.0064	U		<0.0098	U		<0.037	U		<0.009	U		<0.011	U		0.072		
	26 ft	VMP-41-26-103020	10/30/2020	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		<0.015	U	
		VMP-41-26-012721	1/27/2021	0.009	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.011	U		<0.014	U		0.0015	J	
		VMP-41-26-050621	5/6/2021	<0.025	U	UJ	<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.01	U		<0.012	U		<0.013	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	0.045			0.0015	J		<0.0097	U		<0.015	U		<0.056	U		<0.014	U		0.0036	J		0.0021	J	
		VMP-55-20-110320	11/3/2020	1.3	J		0.1	J		<0.43	U		0.12	J		<2.5	U		<0.61	U		<0.75	U		0.12	J	
		VMP-55-20-012821	1/28/2021	<0.11	U		<0.036	U		<0.077	U		<0.12	U		<0.18	U		0.098	J		<0.14	U		<0.14	U	
		VMP-55-20-051121	5/11/2021	<4.8	U		<1.6	U		<3.4	U		<5.2	U		<7.8	U		9.5			<5.9	U		<6.2	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				1.5			420			57000						0.92											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-10-5-103020	10/30/2020	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-10-5-012721	1/27/2021	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-10-5-050721	5/7/2021	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0037	U	
	10 ft	VMP-10-10-073020	7/30/2020	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-10-10-103020	10/30/2020	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-10-10-012721	1/27/2021	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00052	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-10-10-050721	5/7/2021	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0037	U	
	20 ft	VMP-10-20-073020	7/30/2020	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		0.00052	J	
		VMP-10-20-103020	10/30/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0011	J		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-10-20-012721	1/27/2021	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.00046	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-10-20-050721	5/7/2021	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U		<0.0039	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-11-5-012721	1/27/2021	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-11-5-051021	5/10/2021	<0.0064	U		<0.0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		0.0013	J	
	8 ft	VMP-11-8-072720	7/27/2020	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0024	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0022	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-11-8-102820	10/28/2020	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-11-8-012721	1/27/2021	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-11-8-051021	5/10/2021	<0.0062	U		<0.0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
	29 ft	VMP-11-29-072720	7/27/2020	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.0046	J		<0.026	U		<0.0064	U		0.0019	J	
		VMP-11-29-102820	10/28/2020	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-11-29-012721	1/27/2021	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-11-29-051021	5/10/2021	<0.0063	U		<0.0046	U		<0.0085	U		<0.01	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0034	U	
	38 ft	VMP-11-38-072720	7/27/2020	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.0022	J		<0.026	U		<0.0064	U		<0.0042	U	
		VMP-11-38-102820	10/28/2020	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		0.0024	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-12-5-110420	11/4/2020	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		0.014		
		VMP-12-5-012821	1/28/2021	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U		<0.004	U	
		VMP-12-5-051121	5/11/2021	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0037	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U		<0.0044	U	
		VMP-12-11.5-110420	11/4/2020	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-12-11.5-012821	1/28/2021	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U		0.00053	J	
		VMP-12-11.5-051121	5/11/2021	<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
	25 ft	VMP-12-25-072920	7/29/2020	<2.4	U		<1.7	U		<3.2	U		<4	U		<1.8	U		<7.8	U		<2	U		<1.3	U	
		VMP-12-25-072920-DUP	7/29/2020	<2.2	U		<1.6	U		<3	U		<3.8	U		<1.8	U		<7.4	U		<1.8	U		<1.2	U	
		VMP-12-25-110420	11/4/2020	<0.81	U		<0.59	U		<1.1	U		<1.4	U		<0.63	U		<1.1	U		<0.67	U		2.1		
		VMP-12-25-012821	1/28/2021	<0.15	U		0.0076	J		<0.2	U		<0.25	U		<0.11	U		<0.48	U		<0.12	U		0.15		
		VMP-12-25-051121	5/11/2021	<3.2	U		<2.4	U		<4.4	U		<5.4	U		<2.5	U		<4.2	U		<2.7	U		27		
	39 ft	VMP-12-39-012821	1/28/2021	<38	U		<28	U		<52	U		<65	U		<30	U		<50	U		<32	U		600		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				1.5			420			57000						0.92											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		0.0025	J		<0.027	U		<0.0069	U		0.0008	J	
		VMP-13-5-110220	11/2/2020	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.00038	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-13-5-012721	1/27/2021	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U	UJ	<0.0065	U		<0.0043	U	
		VMP-13-5-051021	5/10/2021	<0.0063	U		<0.0046	U		<0.0085	U		<0.01	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0034	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-13-10.5-110220	11/2/2020	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0011	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-13-10.5-012721	1/27/2021	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.00052	J		<0.022	U	UJ	<0.0055	U		<0.0037	U	
		VMP-13-10.5-051021	5/10/2021	<0.0057	U		<0.0042	U		<0.0078	U		<0.0096	U		0.00076	J		<0.019	U		<0.0047	U		<0.0031	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		0.00063	J		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-13-21.5-110220	11/2/2020	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		0.00096	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.001	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-13-21.5-012721	1/27/2021	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.001	J		<0.023	U	UJ	<0.0058	U		<0.0039	U	
		VMP-13-21.5-051021	5/10/2021	<0.0061	U		<0.0045	U		<0.0083	U		<0.01	U		<0.0048	U		<0.02	U		<0.005	U		<0.0034	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-13-29.5-012721	1/27/2021	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U	UJ	<0.0062	U		<0.0041	U	
		VMP-13-29.5-051021	5/10/2021	<0.0062	U		<0.0046	U		<0.0084	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.00097	J		<0.026	U		<0.0066	U		<0.0044	U	
		VMP-14-5-110220	11/2/2020	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-14-5-012721	1/27/2021	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U	UJ	<0.0062	U		<0.0041	U	
		VMP-14-5-051021	5/10/2021	<0.0064	U		<0.0047	U		<0.0086	U		<0.011	U		<0.005	U		<0.021	U		<0.0052	U		<0.0035	U	
	11.5 ft	VMP-14-11.5-073020	7/30/2020	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0043	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		0.00095	J		<0.029	U		<0.0073	U		<0.0049	U	
		VMP-14-11.5-110220	11/2/2020	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-14-11.5-012721	1/27/2021	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0063	U		<0.0042	U	
		VMP-14-11.5-051021	5/10/2021	<0.0062	U		<0.0045	U		<0.0083	U		<0.01	U		<0.0048	U		<0.02	U		<0.0051	U		<0.0034	U	
	20 ft	VMP-14-20-073020	7/30/2020	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-14-20-110220	11/2/2020	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-14-20-012721	1/27/2021	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U	UJ	<0.006	U		<0.004	U	
		VMP-14-20-051021	5/10/2021	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U		<0.0038	U	
		VMP-14-20-051021-DUP	5/10/2021	<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
	29 ft	VMP-14-29-012721	1/27/2021	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U	UJ	<0.0065	U		<0.0043	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U		<0.0048	U	
		VMP-15-5-110320	11/3/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U	UJ	<0.0068	U		<0.0045	U	
		VMP-15-5-012821	1/28/2021	<0.0064	U		<0.0047	U		<0.0087	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
		VMP-15-5-051121	5/11/2021	<0.0064	U		<0.0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.085	U		<0.062	U		<0.11	U		<0.14	U		<0.066	U		<0.28	U		<0.07	U		<0.046	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.083	U		<0.061	U		<0.11	U		<0.14	U		<0.064	U		<0.27	U		<0.068	U		<0.045	U	
		VMP-15-21.5-110320	11/3/2020	<0.0082	U		0.0014	J		<0.011	U		<0.014	U		<0.0064	U		<0.027	U	UJ	<0.0068	U		<0.0045	U	
		VMP-15-21.5-012821	1/28/2021	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
		VMP-15-21.5-051121	5/11/2021	<0.032	U		<0.023	U		<0.043	U		<0.053	U		<0.025	U		<0.1	U		<0.026	U		<0.017	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	<0.033	U		<0.024	U		<0.044	U		<0.055	U		<0.025	U		<0.11	U	UJ	<0.027	U		<0.018	U	
		VMP-15-25.5-012821	1/28/2021	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-15-25.5-051121	5/11/2021	<0.12	U		<0.087	U		<0.16	U		<0.2	U		<0.093	U		<0.39	U		<0.098	U		<0.065	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				1.5			420			57000						0.92											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		0.0011	J		<0.0045	U	
		VMP-16-5-110420	11/4/2020	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-16-5-012921	1/29/2021	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-16-5-012921-DUP	1/29/2021	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U		<0.0046	U	
		VMP-16-5-051121	5/11/2021	<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U		<0.0035	U	
		VMP-16-5-051121-DUP	5/11/2021	<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	<12	U		<8.9	U		<16	U		<20	U		<9.5	U		<40	U		<10	U		<6.7	U	
		VMP-16-13.5-110420	11/4/2020	<0.38	U		<0.28	U		<0.52	U		<0.64	U		<0.3	U		<0.5	U		<0.31	U		1.9		J
		VMP-16-13.5-012921	1/29/2021	<4.8	U		<3.5	U		<6.4	U		<8	U		<3.7	U		<16	U		<3.9	U		11		
		VMP-16-13.5-051121	5/11/2021	<0.45	U		<0.33	U		<0.61	U		<0.76	U		<0.35	U		<0.59	U		<0.37	U		<0.25	U	
	19 ft	VMP-16-19-072920	7/29/2020	<11	U		<7.9	U		<15	U		<18	U		<8.4	U		<36	U		<8.9	U		<5.9	U	
		VMP-16-19-110420	11/4/2020	<1.6	U		<1.2	U		<2.2	U		<2.7	U		<1.2	U		<2.1	U		<1.3	U		17		
		VMP-16-19-012921	1/29/2021	<7.8	U		<5.7	U		<11	U		<13	U		<6.1	U		<26	U		<6.4	U		16		
		VMP-16-19-051121	5/11/2021	<3.4	U		<2.5	U		<4.6	U		<5.8	U		<2.7	U		<4.5	U		<2.8	U		28		
	31 ft	VMP-16-31-072920	7/29/2020	<20	U		<15	U		<28	U		<34	U		<16	U		<67	U		<17	U		<11	U	
		VMP-16-31-110420	11/4/2020	<4	U		<3	U		<5.5	U		<6.8	U		<3.1	U		<5.3	U		<3.3	U		28		
		VMP-16-31-110420-DUP	11/4/2020	<3.7	U		<2.7	U		<5.1	U		<6.3	U		<2.9	U		<4.9	U		<3.1	U		28		
		VMP-16-31-012921	1/29/2021	<12	U		<8.4	U		<16	U		<19	U		<9	U		<38	U		<9.5	U		44		
		VMP-16-31-051121	5/11/2021	<3.3	U		<2.4	U		<4.4	U		<5.5	U		<2.5	U		<4.3	U		<2.7	U		530		
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0046	U	
		VMP-17-5-110320	11/3/2020	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U		<0.0045	U	
		VMP-17-5-012821	1/28/2021	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U		<0.0037	U	
		VMP-17-5-050621	5/6/2021	<0.0064	U		<0.0046	U		<0.0086	U		<0.011	U		0.0014	J		<0.021	U		<0.0052	U		<0.0035	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.0028	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-25-5-072320-DUP	7/23/2020	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.0026	J		<0.027	U		<0.0067	U		<0.0044	U	
		VMP-25-5-103020	10/30/2020	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U		0.0077		
		VMP-25-5-103020-DUP	10/30/2020	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U		0.007		
		VMP-25-5-012621	1/26/2021	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-25-5-012621-DUP	1/26/2021	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U		<0.0042	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.00083	J		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-29-10-110220	11/2/2020	<0.0076	U		0.0022	J		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-29-10-012721	1/27/2021	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U		<0.0042	U	
		VMP-29-10-051021	5/10/2021	<0.0059	U		<0.0044	U		<0.008	U		<0.01	U		<0.0046	U		<0.02	U		<0.0049	U		<0.0032	U	
	18 ft	VMP-29-18-072720	7/27/2020	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.00074	J		<0.026	U		<0.0065	U		<0.0043	U	
		VMP-29-18-110220	11/2/2020	<0.0074	U		0.00051	J		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-29-18-012721	1/27/2021	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-29-18-051021	5/10/2021	<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U		<0.0046	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		0.00067	J		<0.024	U		<0.0059	U		<0.0039	U	
		VMP-29-26-110220	11/2/2020	<0.0075	U		0.00057	J		<0.01	U		<0.012	U		0.002	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-29-26-012721	1/27/2021	<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		0.0035	J		<0.021	U		<0.0053	U		<0.0035	U	
		VMP-29-26-051021	5/10/2021	<0.0061	U		<0.0045	U		<0.0083	U		<0.01	U		0.0025	J		<0.02	U		<0.005	U		<0.0034	U	
		VMP-29-26-051021-DUP	5/10/2021	<0.0064	U		<0.0046	U		<0.0086	U		<0.011	U		0.0023	J		<0.021	U		<0.0052	U		<0.0035	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene			Cyclohexane		
				1.5			420			57000						0.92											
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-30-10-110220	11/2/2020	<0.0074	U		0.00064	J		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-30-10-012721	1/27/2021	<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U		<0.0036	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U	UJ	<0.0057	U		<0.0038	U	
		VMP-30-10-051021	5/10/2021	<0.0063	U		<0.0046	U		<0.0086	U		<0.011	U		0.00077	J		<0.021	U		<0.0052	U		<0.0034	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.032	U		<0.024	U		<0.044	U		<0.054	U		<0.025	U		0.01	J		<0.027	U		<0.018	U	
		VMP-30-18-110220	11/2/2020	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-30-18-012721	1/27/2021	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-30-18-051021	5/10/2021	<0.0064	U		<0.0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U		<0.0035	U	
	26 ft	VMP-30-26-072720	7/27/2020	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00099	J		<0.024	U		<0.0062	U		<0.0041	U	
		VMP-30-26-110220	11/2/2020	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U		0.00087	J	
		VMP-30-26-012721	1/27/2021	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-30-26-051021	5/10/2021	<0.0059	U		<0.0043	U		<0.008	U		<0.0099	U		<0.0046	U		<0.019	U		<0.0048	U		<0.0032	U	
		VMP-30-26-051021-DUP	5/10/2021	<0.006	U		<0.0044	U		<0.0081	U		<0.01	U		<0.0047	U		<0.02	U		<0.0049	U		<0.0033	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U		<0.0046	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U		<0.0048	U	
		VMP-41-10-103020	10/30/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-41-10-012721	1/27/2021	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U		<0.004	U	
		VMP-41-10-050621	5/6/2021	<0.0066	U		0.00046	J		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
	20 ft	VMP-41-20-072920	7/29/2020	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U		<0.0045	U	
		VMP-41-20-103020	10/30/2020	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0069			<0.024	U		<0.0061	U		<0.004	U	
		VMP-41-20-012721	1/27/2021	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U		<0.0041	U	
		VMP-41-20-050621	5/6/2021	<0.006	U		<0.0044	U		<0.0081	U		<0.01	U		<0.0046	U		<0.02	U		<0.0049	U		<0.0033	U	
	26 ft	VMP-41-26-103020	10/30/2020	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-41-26-012721	1/27/2021	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U		<0.0041	U	
		VMP-41-26-050621	5/6/2021	<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U		<0.0036	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U		<0.005	U	
		VMP-55-20-110320	11/3/2020	0.089	J		<0.29	U		0.12	J		<0.68	U		<0.31	U		<1.3	U	UJ	0.072	J		0.15	J	
		VMP-55-20-012821	1/28/2021	<0.072	U		<0.053	U		<0.098	U		<0.12	U		<0.056	U		<0.094	U		<0.059	U		<0.039	U	
		VMP-55-20-051121	5/11/2021	<3.1	U		<2.3	U		<4.2	U		<5.3	U		<2.4	U		<4.1	U		<2.6	U		<1.7	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.048			1700						6800			1700			4200			0.81			1600		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0027	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-10-5-103020	10/30/2020	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0032	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-10-5-012721	1/27/2021	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-10-5-050721	5/7/2021	<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0028	J		<0.0043	U		<0.0043	U		<0.0042	U	
	10 ft	VMP-10-10-073020	7/30/2020	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-10-10-103020	10/30/2020	<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0029	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-10-10-012721	1/27/2021	<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-10-10-050721	5/7/2021	<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0024	J		<0.0043	U		<0.0043	U		<0.0042	U	
	20 ft	VMP-10-20-073020	7/30/2020	<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.002	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-10-20-103020	10/30/2020	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0023	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-10-20-012721	1/27/2021	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-10-20-050721	5/7/2021	<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0024	J		<0.0046	U		<0.0046	U		<0.0045	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-11-5-012721	1/27/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-11-5-051021	5/10/2021	<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0026	J		<0.0041	U		<0.0041	U		<0.004	U	
	8 ft	VMP-11-8-072720	7/27/2020	<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	J	U	0.0022	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-11-8-102820	10/28/2020	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0029	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-11-8-012721	1/27/2021	<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0027	J		<0.0046	U		<0.0046	U		<0.0046	U	
		VMP-11-8-051021	5/10/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0025	J		<0.004	U		<0.004	U		<0.0039	U	
	29 ft	VMP-11-29-072720	7/27/2020	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-11-29-102820	10/28/2020	<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0032	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-11-29-012721	1/27/2021	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0025	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-11-29-051021	5/10/2021	<0.0077	U		<0.006	U		<0.006	U		<0.006	U		0.0023	J		<0.004	U		<0.004	U		<0.004	U	
	38 ft	VMP-11-38-072720	7/27/2020	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-11-38-102820	10/28/2020	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0031	J		<0.005	U		<0.005	U		<0.0049	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-12-5-110420	11/4/2020	<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-12-5-012821	1/28/2021	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0028	J		<0.0048	U		<0.0048	U		<0.0046	U	
		VMP-12-5-051121	5/11/2021	<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0025	J		<0.0043	U		<0.0043	U		<0.0042	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	<0.0097	U		<0.0076	U		<0.0076	J	U	<0.0076	J	U	0.002	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-12-11.5-110420	11/4/2020	<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0023	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-12-11.5-012821	1/28/2021	<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0026	J		<0.0046	U		<0.0046	U		<0.0046	U	
		VMP-12-11.5-051121	5/11/2021	<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0026	J		<0.0042	U		<0.0042	U		<0.0041	U	
	25 ft	VMP-12-25-072920	7/29/2020	<2.9	U		<2.3	U		<2.3	U		<2.3	U		<1.9	U		<1.5	U		<1.5	U		<1.5	U	
		VMP-12-25-072920-DUP	7/29/2020	<2.8	U		<2.2	U		<2.2	U		<2.2	U		<1.8	U		<1.4	U		<1.4	U		<1.4	U	
		VMP-12-25-110420	11/4/2020	<0.99	U		<0.78	U		<0.78	U		<0.78	U		<0.64	U		<0.52	U		<0.52	U		<0.51	U	
		VMP-12-25-012821	1/28/2021	<0.18	U		<0.14	U		<0.14	U		<0.14	U		<0.12	U		<0.095	U		<0.095	U		<0.093	U	
		VMP-12-25-051121	5/11/2021	<4	U		<3.1	U		<3.1	U		<3.1	U		<2.5	U		<2.1	U		<2.1	U		<2	U	
	39 ft	VMP-12-39-012821	1/28/2021	<47	U		<37	U		<37	U		<37	U		<30	U		<25	U		<25	U		<24	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.048			1700						6800			1700			4200			0.81			1600		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0024	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-13-5-110220	11/2/2020	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.003	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-13-5-012721	1/27/2021	<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0027	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-13-5-051021	5/10/2021	<0.0077	U		<0.006	U		<0.006	U		<0.006	U		0.0025	J		<0.004	U		<0.004	U		<0.004	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0019	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-13-10.5-110220	11/2/2020	<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0027	J		<0.0048	U		<0.0048	U		0.0012	J	
		VMP-13-10.5-012721	1/27/2021	<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0023	J		<0.0043	U		<0.0043	U		<0.0042	U	
		VMP-13-10.5-051021	5/10/2021	<0.007	U		<0.0055	U		<0.0055	U		<0.0055	U		0.0028	J		<0.0037	U		<0.0037	U		<0.0036	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0023	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-13-21.5-110220	11/2/2020	<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0026	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-13-21.5-012721	1/27/2021	<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0027	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-13-21.5-051021	5/10/2021	<0.0075	U		<0.0059	U		<0.0059	U		<0.0059	U		0.0032	J		<0.0039	U		<0.0039	U		<0.0039	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-13-29.5-012721	1/27/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-13-29.5-051021	5/10/2021	<0.0076	U		<0.006	U		<0.006	U		<0.006	U		0.0025	J		<0.004	U		<0.004	U		<0.0039	U	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0023	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-14-5-110220	11/2/2020	<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-14-5-012721	1/27/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-14-5-051021	5/10/2021	<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
	11.5 ft	VMP-14-11.5-073020	7/30/2020	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0023	J		<0.0057	U		<0.0057	U		<0.0056	U	
		VMP-14-11.5-110220	11/2/2020	<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0027	J		<0.005	U		<0.005	U		<0.005	U	
		VMP-14-11.5-012721	1/27/2021	<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0021	J		<0.005	U		<0.005	U		<0.0048	U	
		VMP-14-11.5-051021	5/10/2021	<0.0075	U		<0.0059	U		<0.0059	U		<0.0059	U		0.0026	J		<0.004	U		<0.004	U		<0.0039	U	
	20 ft	VMP-14-20-073020	7/30/2020	<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-14-20-110220	11/2/2020	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-14-20-012721	1/27/2021	<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0021	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-14-20-051021	5/10/2021	<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0026	J		<0.0044	U		<0.0044	U		<0.0043	U	
		VMP-14-20-051021-DUP	5/10/2021	<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		0.0029	J		<0.0042	U		<0.0042	U		<0.0041	U	
	29 ft	VMP-14-29-012721	1/27/2021	<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0022	J		<0.0051	U		<0.0051	U		<0.005	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0038	J		<0.0057	U		<0.0057	U		<0.0056	U	
		VMP-15-5-110320	11/3/2020	<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0024	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-15-5-012821	1/28/2021	<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		0.0018	J		<0.0041	U		<0.0041	U		<0.0041	U	
		VMP-15-5-051121	5/11/2021	<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.1	U		<0.081	U		<0.081	U		<0.081	U		<0.066	U		<0.054	U		<0.054	U		<0.053	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.1	U		<0.079	U		<0.079	U		<0.079	U		<0.065	U		<0.053	U		<0.053	U		<0.052	U	
		VMP-15-21.5-110320	11/3/2020	<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0012	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-15-21.5-012821	1/28/2021	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0018	J		<0.0054	U		<0.0054	U		<0.0053	U	
		VMP-15-21.5-051121	5/11/2021	<0.039	U		<0.03	U		<0.03	U		<0.03	U		<0.025	U		<0.02	U		<0.02	U		<0.02	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	<0.04	U		<0.031	U		<0.031	U		<0.031	U		<0.026	U		<0.021	U		<0.021	U		<0.021	U	
		VMP-15-25.5-012821	1/28/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0021	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-15-25.5-051121	5/11/2021	<0.15	U		<0.11	U		<0.11	U		<0.11	U		<0.094	U		<0.077	U		<0.077	U		<0.075	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.048			1700						6800			1700			4200			0.81			1600		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	<0.01	U		0.00076	J		0.001	J		0.0013	J		0.0019	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-16-5-110420	11/4/2020	<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-16-5-012921	1/29/2021	<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0027	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-16-5-012921-DUP	1/29/2021	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0027	J		<0.0054	U		<0.0054	U		<0.0052	U	
		VMP-16-5-051121	5/11/2021	<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		0.0024	J		<0.0042	U		<0.0042	U		<0.0041	U	
		VMP-16-5-051121-DUP	5/11/2021	<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0027	J		<0.0042	U		<0.0042	U		<0.0042	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	<15	U		<12	U		<12	U		<12	U		<9.6	U		<7.8	U		<7.8	U		<7.7	U	
		VMP-16-13.5-110420	11/4/2020	<0.46	U		<0.36	U		<0.36	U		<0.36	U		<0.3	U		<0.24	U		<0.24	U		<0.24	U	
		VMP-16-13.5-012921	1/29/2021	<5.8	U		<4.6	U		<4.6	U		<4.6	U		<3.7	U		<3.1	U		<3.1	U		<3	U	
		VMP-16-13.5-051121	5/11/2021	<0.55	U		<0.43	U		<0.43	U		<0.43	U		<0.36	U		<0.29	U		<0.29	U		<0.28	U	
	19 ft	VMP-16-19-072920	7/29/2020	<13	U		<10	U		<10	U		<10	U		<8.5	U		<7	U		<7	U		<6.8	U	
		VMP-16-19-110420	11/4/2020	<2	U		<1.6	U		<1.6	U		<1.6	U		<1.3	U		<1	U		<1	U		<1	U	
		VMP-16-19-012921	1/29/2021	<9.6	U		<7.5	U		<7.5	U		<7.5	U		<6.2	U		<5	U		<5	U		<4.9	U	
		VMP-16-19-051121	5/11/2021	<4.2	U		<3.3	U		<3.3	U		<3.3	U		<2.7	U		<2.2	U		<2.2	U		<2.2	U	
	31 ft	VMP-16-31-072920	7/29/2020	<25	U		<20	U		<20	U		<20	U		<16	U		<13	U		<13	U		<13	U	
		VMP-16-31-110420	11/4/2020	<5	U		<3.9	U		<3.9	U		<3.9	U		<3.2	U		<2.6	U		<2.6	U		<2.6	U	
		VMP-16-31-110420-DUP	11/4/2020	<4.6	U		<3.6	U		<3.6	U		<3.6	U		<2.9	U		<2.4	U		<2.4	U		<2.4	U	
		VMP-16-31-012921	1/29/2021	<14	U		<11	U		<11	U		<11	U		<9.1	U		<7.4	U		<7.4	U		<7.3	U	
		VMP-16-31-051121	5/11/2021	<4	U		<3.1	U		<3.1	U		<3.1	U		<2.6	U		<2.1	U		<2.1	U		<2.1	U	
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.003	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-17-5-110320	11/3/2020	<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0027	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-17-5-012821	1/28/2021	<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0028	J		<0.0044	U		<0.0044	U		<0.0043	U	
		VMP-17-5-050621	5/6/2021	<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0019	J		<0.0041	U		<0.0041	U		<0.004	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0014	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-25-5-072320-DUP	7/23/2020	<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0018	J		<0.0052	U		<0.0052	U		<0.0051	U	
		VMP-25-5-103020	10/30/2020	<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U		<0.0049	U	
		VMP-25-5-103020-DUP	10/30/2020	<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0013	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-25-5-012621	1/26/2021	<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-25-5-012621-DUP	1/26/2021	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U		<0.0049	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0023	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-29-10-110220	11/2/2020	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-29-10-012721	1/27/2021	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0031	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-29-10-051021	5/10/2021	<0.0073	U		<0.0057	U		<0.0057	U		<0.0057	U		0.0026	J		<0.0038	U		<0.0038	U		<0.0037	U	
	18 ft	VMP-29-18-072720	7/27/2020	<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0024	J		<0.0051	U		<0.0051	U		<0.005	U	
		VMP-29-18-110220	11/2/2020	<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0027	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-29-18-012721	1/27/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-29-18-051021	5/10/2021	<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0024	J		<0.0054	U		<0.0054	U		<0.0053	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0023	J		<0.0046	U		<0.0046	U		<0.0045	U	
		VMP-29-26-110220	11/2/2020	<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-29-26-012721	1/27/2021	<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		0.0022	J		<0.0042	U		<0.0042	U		<0.0041	U	
		VMP-29-26-051021	5/10/2021	<0.0075	U		<0.0059	U		<0.0059	U		<0.0059	U		0.0024	J		<0.0039	U		<0.0039	U		<0.0039	U	
		VMP-29-26-051021-DUP	5/10/2021	<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0025	J		<0.0041	U		<0.0041	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane			1,1-Dichloroethene		
				0.048			1700						6800			1700			4200			0.81			1600		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-30-10-110220	11/2/2020	<0.0091	U		0.0021	J		<0.0071	U		0.0013	J		0.003	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-30-10-012721	1/27/2021	<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0027	J		<0.0043	U		<0.0043	U		<0.0042	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0025	J		<0.0044	U		<0.0044	U		<0.0044	U	
		VMP-30-10-051021	5/10/2021	<0.0077	U		<0.006	U		<0.006	U		<0.006	U		0.0024	J		<0.0041	U		<0.0041	U		<0.004	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.04	U		<0.031	U		<0.031	U		<0.031	U		0.0022	J		<0.021	U		<0.021	U		<0.02	U	
		VMP-30-18-110220	11/2/2020	<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0028	J		<0.0047	U		<0.0047	U		<0.0046	U	
		VMP-30-18-012721	1/27/2021	<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-30-18-051021	5/10/2021	<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0026	J		<0.0041	U		<0.0041	U		<0.004	U	
	26 ft	VMP-30-26-072720	7/27/2020	<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-30-26-110220	11/2/2020	<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0031	J		<0.005	U		<0.005	U		<0.0049	U	
		VMP-30-26-012721	1/27/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U		<0.0048	U	
		VMP-30-26-051021	5/10/2021	<0.0072	U		<0.0056	U		<0.0056	U		<0.0056	U		0.0025	J		<0.0038	U		<0.0038	U		<0.0037	U	
		VMP-30-26-051021-DUP	5/10/2021	<0.0073	U		<0.0057	U		<0.0057	U		<0.0057	U		0.0026	J		<0.0039	U		<0.0039	U		<0.0038	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0019	J		<0.0055	U		<0.0055	U		<0.0054	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0023	J		<0.0056	U		<0.0056	U		<0.0055	U	
		VMP-41-10-103020	10/30/2020	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0021	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-41-10-012721	1/27/2021	<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0023	J		<0.0046	U		<0.0046	U		<0.0046	U	
		VMP-41-10-050621	5/6/2021	<0.0081	U		<0.0063	U		0.00074	J		0.00086	J		0.0026	J		<0.0042	U		<0.0042	U		<0.0042	U	
	20 ft	VMP-41-20-072920	7/29/2020	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0053	U		<0.0053	U		<0.0052	U	
		VMP-41-20-103020	10/30/2020	<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U		<0.0046	U	
		VMP-41-20-012721	1/27/2021	<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0024	J		<0.0049	U		<0.0049	U		<0.0048	U	
		VMP-41-20-050621	5/6/2021	<0.0073	U		<0.0057	U		<0.0057	U		<0.0057	U		0.0027	J		<0.0038	U		<0.0038	U		<0.0038	U	
	26 ft	VMP-41-26-103020	10/30/2020	<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0025	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-41-26-012721	1/27/2021	<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.003	J		<0.0048	U		<0.0048	U		<0.0047	U	
		VMP-41-26-050621	5/6/2021	<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0022	J		<0.0042	U		<0.0042	U		<0.0042	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	U		<0.0058	U		<0.0058	U		<0.0057	U	
		VMP-55-20-110320	11/3/2020	<0.49	U		0.075	J		0.067	J		0.086	J		<0.32	U		0.036	J		0.09	J		<0.25	U	
		VMP-55-20-012821	1/28/2021	<0.088	U		<0.069	U		<0.069	U		<0.069	U		<0.057	U		<0.046	U		<0.046	U		<0.045	U	
		VMP-55-20-051121	5/11/2021	<3.8	U		<3	U		<3	U		<3	U		<2.5	U		<2	U		<2	U		<2	U	

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			45			2.3			2.3						9.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.0041	J		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-10-5-103020	10/30/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-10-5-012721	1/27/2021	<0.0048	U		<0.042	J	U	<0.0056	U		<0.018	U		<0.023	U	UJ	<0.0053	U		<0.006	U		<0.0093	U	
		VMP-10-5-050721	5/7/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		<0.02	U		<0.0046	U		<0.0053	U		<0.0082	U	
	10 ft	VMP-10-10-073020	7/30/2020	<0.0051	U		<0.045	U		<0.006	U		<0.019	U		0.0086	J		<0.0056	U		<0.0064	U		<0.0099	U	
		VMP-10-10-103020	10/30/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		0.0086	J	J	<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-10-10-012721	1/27/2021	<0.0047	U		<0.041	J	U	<0.0055	U		<0.017	U		0.0051	J	J	<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-10-10-050721	5/7/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		<0.02	U		<0.0046	U		<0.0053	U		<0.0082	U	
	20 ft	VMP-10-20-073020	7/30/2020	<0.005	U		0.0027	J		<0.0058	U		<0.018	U		0.0098			<0.0055	U		0.001	J		<0.0096	U	
		VMP-10-20-103020	10/30/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		<0.024	U	UJ	<0.0056	U		<0.0064	U		<0.01	U	
		VMP-10-20-012721	1/27/2021	<0.0048	U		<0.042	J	U	<0.0056	U		0.013	J		<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-10-20-050721	5/7/2021	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		<0.022	U		<0.005	U		<0.0056	U		<0.0088	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-11-5-012721	1/27/2021	<0.0048	U		<0.042	J	U	<0.0056	U		<0.017	U		<0.023	U	UJ	<0.0052	U		<0.0059	U		0.00088	J	
		VMP-11-5-051021	5/10/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	8 ft	VMP-11-8-072720	7/27/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-11-8-102820	10/28/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-11-8-012721	1/27/2021	<0.0046	U		<0.04	U		<0.0053	U		<0.016	U		<0.022	U	UJ	<0.005	U		<0.0056	U		<0.0088	U	
		VMP-11-8-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
	29 ft	VMP-11-29-072720	7/27/2020	0.0058			<0.043	U		<0.0057	U		0.0013	J		0.034			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-11-29-102820	10/28/2020	<0.0048	U		<0.042	U		<0.0057	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-11-29-012721	1/27/2021	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		0.0054	J	J	<0.0051	U		<0.0058	U		<0.009	U	
		VMP-11-29-051021	5/10/2021	<0.004	U		0.00079	J		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0077	U	
	38 ft	VMP-11-38-072720	7/27/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.0067	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-11-38-102820	10/28/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.013			<0.0054	U		<0.0061	U		<0.0095	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	0.0022	J		<0.042	U		<0.0057	U		0.0022	J		<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-12-5-110420	11/4/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.0095	U		<0.0055	U		0.0022	J		<0.0096	U	
		VMP-12-5-012821	1/28/2021	<0.0048	U		0.001	J		<0.0056	U		<0.018	U		0.0051	J	J	<0.0053	U		<0.006	U		<0.0093	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.0046	U		<0.041	U		<0.0054	U		0.0016	J		<0.022	U	UJ	<0.0051	U		<0.0058	U		<0.009	U	
		VMP-12-5-051121	5/11/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		0.0074	J		<0.0046	U		<0.0053	U		<0.0082	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	<0.005	U		<0.044	U		<0.0058	U		0.0014	J		0.0045	J		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-12-11.5-110420	11/4/2020	<0.0051	U		<0.045	U		<0.0059	U		<0.018	U		<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-12-11.5-012821	1/28/2021	<0.0046	U		<0.04	U		<0.0053	U		0.0021	J		<0.022	U	UJ	<0.005	U		<0.0056	U		<0.0088	U	
		VMP-12-11.5-051121	5/11/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		<0.02	U		<0.0045	U		<0.0051	U		<0.008	U	
	25 ft	VMP-12-25-072920	7/29/2020	<1.5	U		<13	U		<1.7	U		<5.4	U		2.4	J		<1.6	U		<1.8	U		<2.9	U	
		VMP-12-25-072920-DUP	7/29/2020	<1.4	U		0.6	J		<1.6	U		<5.2	U		3.1			<1.6	U		<1.8	U		<2.8	U	
		VMP-12-25-110420	11/4/2020	<0.51	U		<1.8	U		<0.6	U		<1.8	U		<0.97	U		<0.56	U		<0.63	U		<0.99	U	
		VMP-12-25-012821	1/28/2021	<0.093	U		<0.82	U		<0.11	U		<0.34	U		<0.44	U	UJ	<0.1	U		<0.12	U		<0.18	U	
		VMP-12-25-051121	5/11/2021	<2	U		<7.2	U		<2.4	U		<7.4	U		<3.9	U		0.41	J		<2.5	U		<3.9	U	
	39 ft	VMP-12-39-012821	1/28/2021	<24	U		<85	U		<28	U		<88	U		<46	U		12	J		<30	U		<47	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			45			2.3			2.3						9.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	<0.0053	U		0.0079	J		<0.0061	U		<0.019	U		0.02			<0.0058	U		0.001	J		<0.01	U	
		VMP-13-5-110220	11/2/2020	<0.0049	U		<0.043	U		<0.0057	U		0.0059	J		0.01			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-13-5-012721	1/27/2021	<0.005	U		<0.043	U		<0.0058	U		0.0028	J		<0.024	U		<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-13-5-051021	5/10/2021	<0.004	U		<0.035	U		<0.0046	U		<0.014	U		0.0054	J		<0.0043	U		<0.0049	U		<0.0077	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	<0.0051	U		<0.045	U		<0.006	U		<0.019	U		0.0071	J		<0.0056	U		<0.0064	U		<0.0099	U	
		VMP-13-10.5-110220	11/2/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		0.012			<0.0052	U		<0.0058	U		0.0029	J	
		VMP-13-10.5-012721	1/27/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		0.021			<0.0046	U		<0.0053	U		<0.0082	U	
		VMP-13-10.5-051021	5/10/2021	<0.0036	U		<0.032	U		<0.0042	U		<0.013	U		<0.017	U		<0.004	U		<0.0045	U		<0.007	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	<0.0049	U		<0.043	U		<0.0058	U		<0.018	U		0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-13-21.5-110220	11/2/2020	<0.0051	U		<0.044	U		<0.0059	U		<0.018	U		0.014			<0.0056	U		<0.0063	U		<0.0098	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-13-21.5-012721	1/27/2021	<0.0045	U		<0.039	U		<0.0052	U		<0.016	U		<0.021	U		<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-13-21.5-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0045	U		<0.014	U		0.01	J		<0.0042	U		<0.0048	U		<0.0075	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.0056	J		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-13-29.5-012721	1/27/2021	<0.0048	U		<0.042	U		<0.0056	U		0.0033	J		<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-13-29.5-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0046	U		<0.014	U		<0.019	U		<0.0043	U		<0.0049	U		<0.0076	U	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		0.011			<0.0055	U		<0.0062	U		<0.0097	U	
		VMP-14-5-110220	11/2/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U	
		VMP-14-5-012721	1/27/2021	<0.0048	U		<0.042	U		<0.0055	U		<0.017	U		<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-14-5-051021	5/10/2021	<0.004	U		<0.035	U		<0.0047	U		<0.015	U		<0.019	U		0.0062			0.012			<0.0078	U	
	11.5 ft	VMP-14-11.5-073020	7/30/2020	<0.0049	U		0.0027	J		<0.0057	U		0.0029	J		0.011			<0.0054	U		<0.0061	U		<0.0095	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0056	U		<0.049	U		<0.0065	U		<0.02	U		0.01	J		<0.0061	U		<0.007	U		<0.011	U	
		VMP-14-11.5-110220	11/2/2020	<0.005	U		<0.043	U		<0.0058	U		<0.018	U		0.013			<0.0054	U		<0.0061	U		<0.0096	U	
		VMP-14-11.5-012721	1/27/2021	<0.0048	U		<0.042	U		<0.0057	U		0.0058	J		<0.023	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-14-11.5-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0045	U		<0.014	U		<0.018	U		<0.0042	U		<0.0048	U		<0.0075	U	
	20 ft	VMP-14-20-073020	7/30/2020	<0.0051	U		0.0027	J		<0.006	U		<0.018	U		0.0085	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-14-20-110220	11/2/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.0097			<0.0053	U		<0.006	U		<0.0093	U	
		VMP-14-20-012721	1/27/2021	<0.0046	U		<0.04	U		<0.0054	U		<0.017	U		<0.022	U		<0.005	U		<0.0057	U		<0.0089	U	
		VMP-14-20-051021	5/10/2021	<0.0043	U		<0.038	U		<0.0051	U		<0.016	U		<0.021	U		<0.0048	U		<0.0054	U		<0.0084	U	
		VMP-14-20-051021-DUP	5/10/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		<0.019	U		<0.0045	U		<0.0051	U		<0.0079	U	
	29 ft	VMP-14-29-012721	1/27/2021	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		<0.024	U		<0.0054	U		<0.0062	U		<0.0096	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	<0.0056	U		<0.049	U		<0.0065	U		<0.02	U		0.059			<0.0061	U		<0.0069	U		<0.011	U	
		VMP-15-5-110320	11/3/2020	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		0.0089	J		<0.0057	U		<0.0064	U		<0.01	U	
		VMP-15-5-012821	1/28/2021	<0.0041	U		<0.036	U		<0.0047	U		<0.015	U		<0.019	U	UJ	<0.0044	U		<0.005	U		<0.0078	U	
		VMP-15-5-051121	5/11/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		0.0053	J		<0.0044	U		<0.005	U		<0.0077	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.053	U		<0.47	U		<0.062	U		<0.19	U		<0.1	U		<0.058	U		<0.066	U		<0.1	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.052	U		<0.46	U		<0.061	U		<0.19	U		<0.099	U		<0.057	U		<0.065	U		<0.1	U	
		VMP-15-21.5-110320	11/3/2020	<0.0052	U		<0.046	U		<0.006	U		<0.019	U		0.016			<0.0057	U		<0.0064	U		<0.01	U	
		VMP-15-21.5-012821	1/28/2021	<0.0053	U		<0.046	J	U	<0.0062	U		<0.019	U		<0.025	U	UJ	<0.0058	U		<0.0066	U		<0.01	U	
		VMP-15-21.5-051121	5/11/2021	<0.02	U		<0.18	U		<0.023	U		<0.073	U		<0.095	U		<0.022	U		<0.025	U		<0.039	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	<0.021	U		<0.18	U		<0.024	U		<0.075	U		0.017	J		<0.022	U		<0.026	U		<0.04	U	
		VMP-15-25.5-012821	1/28/2021	<0.0047	U		<0.042	J	U	<0.0055	U		<0.017	U		<0.022	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-15-25.5-051121	5/11/2021	<0.075	U		<0.66	U		<0.088	U		<0.27	U		<0.36	U		<0.082	U		<0.093	U		<0.14	U	

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			45			2.3			2.3						9.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	<0.0052	U		0.0016	J		<0.006	U		<0.019	U		<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-16-5-110420	11/4/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U	
		VMP-16-5-012921	1/29/2021	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.0052	J	J	<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-16-5-012921-DUP	1/29/2021	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.056		J	<0.0058	U		<0.0065	U		<0.01	U	
		VMP-16-5-051121	5/11/2021	<0.0041	U		<0.036	U		<0.0048	U		<0.015	U		0.008	J		<0.0045	U		<0.0051	U		<0.0079	U	
		VMP-16-5-051121-DUP	5/11/2021	<0.0042	U		<0.036	U		<0.0048	U		<0.015	U		0.0097	J		<0.0046	U		<0.0052	U		<0.008	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	<7.7	U		3.2	J		<9	U		<28	U		43			<8.4	U		1.5	J		<15	U	
		VMP-16-13.5-110420	11/4/2020	<0.24	U		<0.84	U		<0.28	U		<0.87	U		<0.46	U		<0.26	U		<0.3	U		<0.46	U	
		VMP-16-13.5-012921	1/29/2021	<3	U		3.2	J		<3.5	U		<11	U		14			0.88	J		<3.7	U		<5.8	U	
		VMP-16-13.5-051121	5/11/2021	<0.28	U		<1	U		<0.33	U		<1	U		<0.54	U		0.11	J		0.079	J		<0.55	U	
	19 ft	VMP-16-19-072920	7/29/2020	<6.8	U		2.4	J		<8	U		<25	U		33			1.3	J		4.4	J		<13	U	
		VMP-16-19-110420	11/4/2020	<1	U		<3.6	U		<1.2	U		<3.7	U		<1.9	U		1.2			4.7			<2	U	
		VMP-16-19-012921	1/29/2021	<4.9	U		7.6	J		<5.8	U		<18	U		36			1.7	J		4	J		<9.6	U	
		VMP-16-19-051121	5/11/2021	<2.2	U		<7.6	U		<2.5	U		<7.8	U		<4.1	U		1.6	J		7.5			<4.2	U	
	31 ft	VMP-16-31-072920	7/29/2020	<13	U		<110	U		<15	U		<47	U		47			<14	U		<16	U		<25	U	
		VMP-16-31-110420	11/4/2020	<2.6	U		<9	U		<3	U		<9.3	U		<4.9	U		0.9	J		2.5	J		<4.9	U	
		VMP-16-31-110420-DUP	11/4/2020	<2.4	U		<8.3	U		<2.7	U		<8.6	U		<4.5	U		1.1	J		2.6	J		<4.6	U	
		VMP-16-31-012921	1/29/2021	<7.3	U		8.2	J		<8.5	U		<26	U		30	J		2.4	J		<9	U		<14	U	
		VMP-16-31-051121	5/11/2021	<2.1	U		<7.2	U		<2.4	U		<7.5	U		<3.9	U		350			140			<4	U	
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.0054	U		<0.047	U		<0.0062	U		<0.019	U		<0.01	U		<0.0059	U		<0.0066	U		<0.01	U	
		VMP-17-5-110320	11/3/2020	<0.0052	U		<0.046	U		<0.0061	U		<0.019	U		0.016			<0.0057	U		<0.0065	U		<0.01	U	
		VMP-17-5-012821	1/28/2021	<0.0043	U		<0.038	U		<0.005	U		<0.016	U		0.0039	J		<0.0047	U		<0.0053	U		<0.0083	U	
		VMP-17-5-050621	5/6/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.0042	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-25-5-072320-DUP	7/23/2020	<0.0051	U		<0.045	U		<0.006	U		<0.018	U		0.0088	J		<0.0056	U		<0.0063	U		<0.0099	U	
		VMP-25-5-103020	10/30/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		<0.023	U	UJ	<0.0053	U		<0.006	U		<0.0094	U	
		VMP-25-5-103020-DUP	10/30/2020	<0.005	U		<0.044	U		<0.0059	U		<0.018	U		<0.024	U	UJ	<0.0055	U		0.0013	J		<0.0097	U	
		VMP-25-5-012621	1/26/2021	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.022	U		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-25-5-012621-DUP	1/26/2021	<0.0049	U		0.0022	J		<0.0057	U		<0.018	U		0.012	J		<0.0054	U		<0.0061	U		<0.0095	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.017	U		0.0041	J		<0.0052	U		<0.0059	U		<0.0093	U	
		VMP-29-10-110220	11/2/2020	<0.0048	U		<0.042	U		<0.0056	U		<0.018	U		0.015			<0.0053	U		<0.006	U		<0.0093	U	
		VMP-29-10-012721	1/27/2021	<0.0048	U		0.0016	J		<0.0056	U		<0.018	U		0.0048	J	J	<0.0053	U		<0.006	U		<0.0093	U	
		VMP-29-10-051021	5/10/2021	<0.0037	U		<0.033	U		<0.0044	U		<0.014	U		0.0058	J		<0.0041	U		<0.0046	U		<0.0072	U	
	18 ft	VMP-29-18-072720	7/27/2020	<0.005	U		<0.044	U		<0.0058	U		<0.018	U		0.013			<0.0055	U		<0.0062	U		<0.0096	U	
		VMP-29-18-110220	11/2/2020	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		0.026			<0.0051	U		<0.0058	U		<0.009	U	
		VMP-29-18-012721	1/27/2021	<0.0048	U		<0.042	J	U	<0.0055	U		<0.017	U		0.0077	J	J	<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-29-18-051021	5/10/2021	<0.0053	U		<0.046	U		<0.0062	U		<0.019	U		0.0064	J		<0.0058	U		<0.0066	U		<0.01	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.0045	U		<0.04	U		<0.0053	U		<0.016	U		0.0061	J		<0.0049	U		<0.0056	U		<0.0087	U	
		VMP-29-26-110220	11/2/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		0.014			<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-29-26-012721	1/27/2021	<0.0041	U		<0.036	U		0.00085	J		<0.015	U		0.0088	J	J	<0.0045	U		<0.0051	U		<0.0079	U	
		VMP-29-26-051021	5/10/2021	<0.0039	U		<0.034	U		<0.0045	U		<0.014	U		<0.018	U		<0.0042	U		<0.0048	U		<0.0075	U	
		VMP-29-26-051021-DUP	5/10/2021	<0.004	U		<0.035	U		<0.0047	U		<0.014	U		0.018	J		<0.0044	U		<0.005	U		<0.0077	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	cis-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			1,4-Dioxane			Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113		
				1100000			45			2.3			2.3						9.3								
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.0048	U		<0.042	U		<0.0056	U		0.0022	J		0.0043	J		<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-30-10-110220	11/2/2020	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		0.021			<0.0051	U		<0.0058	U		<0.009	U	
		VMP-30-10-012721	1/27/2021	<0.0042	U		<0.037	U		<0.0049	U		<0.015	U		0.0074	J	J	<0.0046	U		<0.0052	U		0.00062	J	
		VMP-30-10-012721-DUP	1/27/2021	<0.0044	U		0.00095	J		<0.0051	U		<0.016	U		0.003	J		<0.0048	U		<0.0054	U		<0.0084	U	
		VMP-30-10-051021	5/10/2021	<0.004	U		<0.035	U		<0.0046	U		0.0016	J		<0.019	U		<0.0044	U		<0.0049	U		<0.0077	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.02	U		<0.18	U		<0.024	U		<0.074	U		<0.039	U		<0.022	U		<0.025	U		<0.039	U	
		VMP-30-18-110220	11/2/2020	<0.0046	U		<0.041	U		<0.0054	U		<0.017	U		0.016			<0.0051	U		<0.0058	U		<0.009	U	
		VMP-30-18-012721	1/27/2021	<0.0047	U		0.0023	J		<0.0055	U		<0.017	U		0.008	J	J	<0.0051	U		<0.0058	U		0.00071	J	
		VMP-30-18-051021	5/10/2021	<0.004	U		<0.035	U		<0.0047	U		0.0026	J		<0.019	U		<0.0044	U		<0.005	U		<0.0077	U	
	26 ft	VMP-30-26-072720	7/27/2020	<0.0047	U		<0.041	U		<0.0055	U		<0.017	U		<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U	
		VMP-30-26-110220	11/2/2020	<0.0049	U		<0.043	U		<0.0057	U		<0.018	U		0.023			<0.0053	U		<0.006	U		<0.0094	U	
		VMP-30-26-012721	1/27/2021	<0.0048	U		<0.042	J	U	<0.0055	U		0.0021	J		<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-30-26-051021	5/10/2021	<0.0037	U		<0.032	U		<0.0043	U		<0.013	U		0.0066	J		<0.004	U		<0.0046	U		<0.0072	U	
		VMP-30-26-051021-DUP	5/10/2021	<0.0038	U		<0.033	U		<0.0044	U		<0.014	U		<0.018	U		<0.0041	U		<0.0047	U		<0.0073	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	<0.0054	U		<0.047	U		<0.0062	U		<0.019	U		0.0035	J		<0.0059	U		<0.0066	U		<0.01	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0055	U		<0.048	U		<0.0064	U		<0.02	U		<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U	
		VMP-41-10-103020	10/30/2020	<0.0052	U		<0.045	U		<0.006	U		<0.019	U		0.0064	J		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-41-10-012721	1/27/2021	<0.0046	U		<0.04	J	U	<0.0053	U		<0.016	U		<0.022	U	UJ	<0.005	U		<0.0056	U		<0.0088	U	
		VMP-41-10-050621	5/6/2021	<0.0042	U		<0.036	U	UJ	<0.0048	U		<0.015	U		<0.02	U	UJ	<0.0046	U		<0.0052	U		<0.008	U	
	20 ft	VMP-41-20-072920	7/29/2020	<0.0052	U		0.0044	J		<0.006	U		0.0015	J		0.0084	J		<0.0056	U		<0.0064	U		<0.01	U	
		VMP-41-20-103020	10/30/2020	<0.0046	U		0.0016	J		<0.0054	U		<0.017	U		0.0057	J		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-41-20-012721	1/27/2021	<0.0048	U		0.0026	J		<0.0056	U		0.0027	J		0.016	J	J	<0.0052	U		<0.0059	U		<0.0092	U	
		VMP-41-20-050621	5/6/2021	<0.0038	U		<0.033	U		<0.0044	U		<0.014	U		0.011	J		<0.0041	U		<0.0047	U		<0.0073	U	
	26 ft	VMP-41-26-103020	10/30/2020	<0.0047	U		<0.041	U		<0.0054	U		<0.017	U		0.0067	J		<0.0051	U		<0.0058	U		<0.009	U	
		VMP-41-26-012721	1/27/2021	<0.0047	U		<0.041	J	U	<0.0054	U		<0.017	U		<0.022	U	UJ	<0.0051	U		<0.0058	U		<0.009	U	
		VMP-41-26-050621	5/6/2021	<0.0042	U		<0.036	U	UJ	<0.0048	U		<0.015	U		<0.02	U	UJ	<0.0046	U		<0.0052	U		<0.008	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	<0.0057	U		<0.05	U		<0.0067	U		<0.021	U		<0.011	U		<0.0063	U		<0.0071	U		<0.011	U	
		VMP-55-20-110320	11/3/2020	<0.25	U		0.45	J		<0.3	U		<0.92	U		1.8			0.089	J		0.065	J		<0.49	U	
		VMP-55-20-012821	1/28/2021	<0.045	U		<0.16	U		<0.053	U		<0.16	U		<0.086	U		<0.05	U		<0.056	U		<0.088	U	
		VMP-55-20-051121	5/11/2021	<2	U		<6.9	U		<2.3	U		<7.2	U		<3.8	U		<2.2	U		<2.4	U		<3.8	U	

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			3500						24000		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-10-5-103020	10/30/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-10-5-012721	1/27/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-10-5-050721	5/7/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
	10 ft	VMP-10-10-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0046	U		0.0019	J		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-10-10-103020	10/30/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-10-10-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		0.002	J		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-10-10-050721	5/7/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
	20 ft	VMP-10-20-073020	7/30/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		0.0061	J		<0.0052	U		<0.018	U	
		VMP-10-20-103020	10/30/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-10-20-012721	1/27/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-10-20-050721	5/7/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-11-5-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-11-5-051021	5/10/2021	<0.0041	U		<0.043	U		0.002	J		<0.016	U		0.0031	J		<0.005	U		<0.0041	U		<0.014	U	
	8 ft	VMP-11-8-072720	7/27/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-11-8-102820	10/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-11-8-012721	1/27/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-11-8-051021	5/10/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
	29 ft	VMP-11-29-072720	7/27/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0034	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-11-29-102820	10/28/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-11-29-012721	1/27/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-11-29-051021	5/10/2021	<0.0041	U		<0.043	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.0041	U		<0.014	U	
	38 ft	VMP-11-38-072720	7/27/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U	
		VMP-11-38-102820	10/28/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0073	J		<0.0061	U		0.0012	J		<0.018	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-12-5-110420	11/4/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		0.9			0.016			<0.0052	U		<0.018	U	
		VMP-12-5-012821	1/28/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0044	J		0.0012	J		<0.005	U		<0.018	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		0.0038	J		0.0012	J		<0.0048	U		<0.017	U	
		VMP-12-5-051121	5/11/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		0.0056	J		<0.0052	U		<0.0044	U		<0.015	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	<0.0052	U		<0.054	U		0.00082	J		<0.021	U		0.0019	J		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-12-11.5-110420	11/4/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U	
		VMP-12-11.5-012821	1/28/2021	<0.0047	U		<0.049	U		0.01			<0.019	U		0.23			<0.0056	U		<0.0047	U		<0.016	U	
		VMP-12-11.5-051121	5/11/2021	<0.0043	U		<0.044	U		<0.0037	U		<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U	
	25 ft	VMP-12-25-072920	7/29/2020	1.6			<16	U		16			<6.2	U		150			<1.8	U		<1.5	U		<5.4	U	
		VMP-12-25-072920-DUP	7/29/2020	1.2	J		<15	U		14			<5.9	U		150			<1.8	U		<1.5	U		<5.2	U	
		VMP-12-25-110420	11/4/2020	<0.63	U		<5.5	U		5.6			<2.1	U		470			<0.63	U		<0.53	U		<0.46	U	
		VMP-12-25-012821	1/28/2021	<0.096	U		<1	U		<0.083	U		<0.38	U		12			<0.12	U		<0.096	U		<0.34	U	
		VMP-12-25-051121	5/11/2021	1.7	J		<22	U		140			<8.4	U		1100			0.7	J		<2.1	U		<1.8	U	
	39 ft	VMP-12-39-012821	1/28/2021	170			<260	U		5200			<100	U		25000			<30	U		<25	U		<22	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			3500						24000		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	<0.0054	U		<0.057	U		<0.0047	U		<0.022	U		0.0064	J		0.0042	J		<0.0054	U		<0.019	U	
		VMP-13-5-110220	11/2/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-13-5-012721	1/27/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-13-5-051021	5/10/2021	<0.0041	U		<0.043	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.0041	U		<0.014	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-13-10.5-110220	11/2/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-13-10.5-012721	1/27/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U	
		VMP-13-10.5-051021	5/10/2021	<0.0037	U		<0.039	U		<0.0032	U		<0.015	U		<0.011	U		<0.0045	U		<0.0037	U		<0.013	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.002	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-13-21.5-110220	11/2/2020	<0.0052	U		<0.055	U		<0.0045	U		<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-13-21.5-012721	1/27/2021	<0.0046	U		<0.048	U		<0.004	U		<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U	
		VMP-13-21.5-051021	5/10/2021	<0.004	U		<0.042	U		<0.0034	U		<0.016	U		<0.012	U		<0.0048	U		<0.004	U		<0.014	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-13-29.5-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-13-29.5-051021	5/10/2021	<0.004	U		<0.042	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.004	U		<0.014	U	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-14-5-110220	11/2/2020	<0.0048	U		<0.05	J	U	<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		0.00086	J		<0.017	U	
		VMP-14-5-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-14-5-051021	5/10/2021	0.00046	J		<0.043	U		<0.0036	U		<0.017	U		<0.012	U		0.0012	J		<0.0042	U		<0.015	U	
	11.5 ft	VMP-14-11.5-073020	7/30/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0021	J		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0058	U		<0.06	U		<0.005	U		<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U	
		VMP-14-11.5-110220	11/2/2020	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U	
		VMP-14-11.5-012721	1/27/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-14-11.5-051021	5/10/2021	<0.004	U		<0.042	U		<0.0034	U		<0.016	U		<0.012	U		<0.0048	U		<0.004	U		<0.014	U	
	20 ft	VMP-14-20-073020	7/30/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		0.0024	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-14-20-110220	11/2/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0015	J		<0.006	U		<0.005	U		<0.018	U	
		VMP-14-20-012721	1/27/2021	<0.0048	U		<0.049	U		<0.0041	U		<0.019	U		0.0013	J		<0.0057	U		<0.0048	U		<0.017	U	
		VMP-14-20-051021	5/10/2021	<0.0045	U		<0.047	U		<0.0038	U		<0.018	U		0.0012	J		<0.0054	U		<0.0045	U		<0.016	U	
		VMP-14-20-051021-DUP	5/10/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
	29 ft	VMP-14-29-012721	1/27/2021	<0.0051	U		<0.054	U		<0.0044	U		<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	<0.0058	U		<0.06	U		<0.005	U		<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U	
		VMP-15-5-110320	11/3/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-15-5-012821	1/28/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.005	U		<0.0042	U		<0.015	U	
		VMP-15-5-051121	5/11/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.055	U		<0.57	U		<0.047	U		<0.22	U		<0.16	U		<0.066	U		<0.055	U		<0.19	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.054	U		<0.56	U		<0.046	U		<0.22	U		<0.16	U		<0.065	U		<0.054	U		<0.19	U	
		VMP-15-21.5-110320	11/3/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U	
		VMP-15-21.5-012821	1/28/2021	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		0.00064	J		<0.0055	U		<0.019	U	
		VMP-15-21.5-051121	5/11/2021	<0.021	U		<0.22	U		<0.018	U		<0.083	U		0.014	J		<0.025	U		<0.021	U		<0.073	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	<0.021	U		<0.22	U		<0.018	U		<0.085	U		0.047	J		<0.026	U		<0.021	U		<0.075	U	
		VMP-15-25.5-012821	1/28/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-15-25.5-051121	5/11/2021	<0.078	U		<0.81	U		<0.067	U		<0.31	U		0.076	J		<0.093	U		<0.078	U		<0.27	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			3500						24000		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		0.0026	J		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-16-5-110420	11/4/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U	
		VMP-16-5-012921	1/29/2021	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		0.0035	J		<0.0063	U		<0.0053	U		<0.019	U	
		VMP-16-5-012921-DUP	1/29/2021	<0.0054	U		<0.056	U		<0.0047	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-16-5-051121	5/11/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U	
		VMP-16-5-051121-DUP	5/11/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	<8	U		<83	U		2.5	J		<32	U		310			16			<7.9	U		<28	U	
		VMP-16-13.5-110420	11/4/2020	0.25		J	<2.6	U		1.7		J	<0.99	U		120		J	4.2		J	<0.25	U		<0.22	U	
		VMP-16-13.5-012921	1/29/2021	0.87	J		<32	U		2.3	J		<12	U		500			5			<3.1	U		<11	U	
		VMP-16-13.5-051121	5/11/2021	<0.3	U		<3.1	U		2.4			<1.2	U		58			2.4			<0.29	U		<0.26	U	
	19 ft	VMP-16-19-072920	7/29/2020	<7.1	U		<74	U		2.2	J		<28	U		360			20			<7.1	U		<25	U	
		VMP-16-19-110420	11/4/2020	<1	U		<11	U		3.5			<4.2	U		900			32			<1	U		<0.93	U	
		VMP-16-19-012921	1/29/2021	1.7	J		<53	U		4	J		<20	U		690			31			<5.1	U		<18	U	
		VMP-16-19-051121	5/11/2021	3.6			<23	U		95			<8.9	U		1600			51			<2.2	U		<2	U	
	31 ft	VMP-16-31-072920	7/29/2020	<13	U		<140	U		<11	U		<53	U		610			24			<13	U		<47	U	
		VMP-16-31-110420	11/4/2020	<2.6	U		<28	U		<2.3	U		<10	U		1600			26			<2.6	U		<2.3	U	
		VMP-16-31-110420-DUP	11/4/2020	<2.4	U		<25	U		2.7			<9.7	U		1600			29			<2.4	U		<2.1	U	
		VMP-16-31-012921	1/29/2021	14			<78	U		120			<30	U		1800			21			<7.5	U		<26	U	
		VMP-16-31-051121	5/11/2021	1600			<22	U		11000			<8.5	U		16000			30			<2.1	U		<1.9	U	
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-17-5-110320	11/3/2020	<0.0054	U		<0.056	U		<0.0046	U		<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U	
		VMP-17-5-012821	1/28/2021	<0.0044	U		<0.046	U		<0.0038	U		<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U	
		VMP-17-5-050621	5/6/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		0.01	J		<0.0063	U		<0.0053	U		0.0011	J	
		VMP-25-5-072320-DUP	7/23/2020	<0.0053	U		<0.055	U		<0.0045	U		<0.021	U		0.0092	J		<0.0063	U		<0.0053	U		0.0016	J	
		VMP-25-5-103020	10/30/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.2			<0.006	U		<0.005	U		<0.018	U	
		VMP-25-5-103020-DUP	10/30/2020	<0.0052	U		<0.054	U		<0.0045	U		<0.021	U		0.18			<0.0062	U		<0.0052	U		<0.018	U	
		VMP-25-5-012621	1/26/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		0.0022	J		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-25-5-012621-DUP	1/26/2021	<0.0051	U		<0.053	U		<0.0044	U		<0.02	U		0.0039	J		<0.0061	U		<0.005	U		<0.018	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U	
		VMP-29-10-110220	11/2/2020	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0074	J		0.0005	J		<0.005	U		<0.018	U	
		VMP-29-10-012721	1/27/2021	<0.005	U		<0.052	U		<0.0043	U		<0.02	U		0.0038	J		0.0009	J		<0.005	U		<0.018	U	
		VMP-29-10-051021	5/10/2021	<0.0039	U		<0.04	U		0.00078	J		<0.015	U		<0.011	U		0.00074	J		<0.0039	U		<0.014	U	
	18 ft	VMP-29-18-072720	7/27/2020	<0.0052	U		<0.054	U		<0.0044	U		<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U	
		VMP-29-18-110220	11/2/2020	<0.0048	U		<0.05	U		0.0027	J		<0.019	U		0.0082	J		0.0013	J		<0.0048	U		<0.017	U	
		VMP-29-18-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0034	J		0.0024	J		<0.0049	U		<0.017	U	
		VMP-29-18-051021	5/10/2021	<0.0055	U		<0.057	U		<0.0047	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-29-26-110220	11/2/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		0.004	J		0.0016	J		<0.0049	U		<0.017	U	
		VMP-29-26-012721	1/27/2021	<0.0042	U		<0.044	U		<0.0036	U		<0.017	U		<0.012	U		0.00034	J		<0.0042	U		<0.015	U	
		VMP-29-26-051021	5/10/2021	<0.004	U		<0.042	U		<0.0034	U		<0.016	U		<0.012	U		<0.0048	U		<0.004	U		<0.014	U	
		VMP-29-26-051021-DUP	5/10/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	Heptane			Hexachlorobutadiene			Hexane			2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)		
																			3500						24000		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-30-10-110220	11/2/2020	<0.0048	U		<0.05	U		0.0023	J		0.0011	J		0.0076	J		0.0061			<0.0048	U		<0.017	U	
		VMP-30-10-012721	1/27/2021	<0.0043	U		<0.045	U		<0.0037	U		<0.017	U		0.0026	J		0.002	J		<0.0043	U		<0.015	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0045	U		<0.047	U		<0.0039	U		<0.018	U		<0.013	U		0.0022	J		<0.0045	U		<0.016	U	
		VMP-30-10-051021	5/10/2021	<0.0041	U		<0.043	U		<0.0035	U		<0.016	U		<0.012	U		<0.0049	U		<0.0041	U		<0.014	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.021	U		<0.22	U		<0.018	U		<0.084	U		<0.061	U		<0.025	U		0.011	J		<0.074	U	
		VMP-30-18-110220	11/2/2020	<0.0048	U		<0.05	U		0.0021	J		<0.019	U		0.008	J		0.003	J		<0.0048	U		<0.017	U	
		VMP-30-18-012721	1/27/2021	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		0.0032	J		0.0013	J		<0.0048	U		<0.017	U	
		VMP-30-18-051021	5/10/2021	<0.0041	U		<0.043	U		<0.0036	U		<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U	
	26 ft	VMP-30-26-072720	7/27/2020	<0.0049	U		<0.051	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U	
		VMP-30-26-110220	11/2/2020	<0.005	U		<0.052	U		0.0031	J		<0.02	U		0.0093	J		0.0048	J		<0.005	U		<0.018	U	
		VMP-30-26-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0033	J		0.0012	J		<0.0049	U		<0.017	U	
		VMP-30-26-051021	5/10/2021	<0.0038	U		<0.04	U		<0.0033	U		<0.015	U		<0.011	U		<0.0046	U		<0.0038	U		<0.013	U	
		VMP-30-26-051021-DUP	5/10/2021	<0.0039	U		<0.041	U		<0.0034	U		<0.016	U		<0.011	U		<0.0047	U		<0.0039	U		<0.014	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	<0.0055	U		<0.058	U		<0.0048	U		<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0057	U		<0.059	U		<0.0049	U		<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U	
		VMP-41-10-103020	10/30/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-41-10-012721	1/27/2021	<0.0047	U		<0.049	U		<0.004	U		<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U	
		VMP-41-10-050621	5/6/2021	<0.0043	U		<0.045	U		<0.0037	U	UJ	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
	20 ft	VMP-41-20-072920	7/29/2020	<0.0053	U		<0.055	U		<0.0046	U		<0.021	U		0.0029	J		<0.0064	U		<0.0053	U		<0.019	U	
		VMP-41-20-103020	10/30/2020	<0.0048	U		<0.05	U		<0.0041	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-41-20-012721	1/27/2021	<0.0049	U		<0.051	U		<0.0042	U		<0.02	U		0.0041	J		<0.0059	U		<0.0049	U		<0.017	U	
		VMP-41-20-050621	5/6/2021	<0.0039	U		<0.04	U		<0.0033	U		<0.016	U		0.0045	J		<0.0047	U		<0.0039	U		<0.014	U	
	26 ft	VMP-41-26-103020	10/30/2020	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U	
		VMP-41-26-012721	1/27/2021	<0.0048	U		<0.05	U		<0.0042	U		<0.019	U		<0.014	U		<0.0058	U		0.00076	J		<0.017	U	
		VMP-41-26-050621	5/6/2021	<0.0043	U		<0.045	U		<0.0037	U	UJ	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	<0.0059	U		<0.062	U		<0.0051	U		<0.024	U		0.014	J		<0.0071	U		<0.0059	U		0.04		
		VMP-55-20-110320	11/3/2020	<0.26	U		0.18	J		0.11	J		<1	U		9.6			0.049	J		<0.26	U		0.07	J	
		VMP-55-20-012821	1/28/2021	<0.047	U		<0.49	U		<0.04	U		<0.19	U		0.81			<0.056	U		<0.047	U		<0.041	U	
		VMP-55-20-051121	5/11/2021	<2	U		<21	U		2.9			<8.2	U		830			<2.4	U		<2	U		<1.8	U	

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										8500						4						40000			25		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	0.0065	J		<0.0062	U		<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-10-5-103020	10/30/2020	0.008	J		<0.0061	U		<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-10-5-012721	1/27/2021	0.013			<0.006	U		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-10-5-050721	5/7/2021	0.022			<0.0053	J	U	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U	
	10 ft	VMP-10-10-073020	7/30/2020	0.0078	J		0.00055	J		<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-10-10-103020	10/30/2020	0.012			<0.0063	U		<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-10-10-012721	1/27/2021	0.0056	J		<0.0058	U		<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-10-10-050721	5/7/2021	0.034			<0.0053	U		<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U	
	20 ft	VMP-10-20-073020	7/30/2020	0.0097	J		0.019			<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0012	J		<0.037	U	
		VMP-10-20-103020	10/30/2020	0.01	J		<0.0064	U		<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-10-20-012721	1/27/2021	0.0095	J		<0.0059	U		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.00055	J		<0.036	U	
		VMP-10-20-050721	5/7/2021	0.019			<0.0056	U		<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	0.012	J		<0.0059	U		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-11-5-012721	1/27/2021	0.0045	J		<0.0059	U		<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U	
		VMP-11-5-051021	5/10/2021	0.0095	J		<0.005	U		<0.0043	U		<0.0069	U		<0.0068	U		<0.003	U		0.0003	J		<0.03	U	
	8 ft	VMP-11-8-072720	7/27/2020	0.0071	J		<0.0062	U		<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.012	J	U	<0.0059	U		<0.0082	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-11-8-102820	10/28/2020	0.026			<0.0059	U		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-11-8-012721	1/27/2021	0.005	J		<0.0056	U		<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-11-8-051021	5/10/2021	0.01			<0.0049	U		<0.0042	U		<0.0068	U		<0.0067	U		<0.0029	U		<0.0037	U		<0.029	U	
	29 ft	VMP-11-29-072720	7/27/2020	0.021			<0.0061	U		<0.0084	U		<0.0085	U		0.0038	J		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-11-29-102820	10/28/2020	0.009	J		<0.006	U		<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.00037	J		<0.036	U	
		VMP-11-29-012721	1/27/2021	0.0089	J		<0.0058	U		<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U	
		VMP-11-29-051021	5/10/2021	0.02			<0.0049	U		<0.0042	U		<0.0069	U		<0.0068	U		<0.0029	U		<0.0038	U		<0.03	U	
	38 ft	VMP-11-38-072720	7/27/2020	0.0064	J		<0.0061	U		<0.0084	U		<0.0085	U		0.0013	J		<0.0036	U		<0.0046	U		<0.037	U	
		VMP-11-38-102820	10/28/2020	0.047			<0.0061	U		<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	0.0027	J		<0.006	U		<0.0083	U		<0.0084	U		0.025			<0.0036	U		<0.0046	U		<0.036	U	
		VMP-12-5-110420	11/4/2020	0.009	J		0.042			<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-12-5-012821	1/28/2021	0.01	J		<0.006	U		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0041	J		<0.036	U	
		VMP-12-5-012821-DUP	1/28/2021	0.0087	J		<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.0012	J		<0.035	U	
		VMP-12-5-051121	5/11/2021	0.023			<0.0053	U		<0.0046	U		<0.0073	U		0.0066	J		<0.0032	U		0.001	J		<0.032	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	0.017			<0.0062	U		<0.0086	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	J	U
		VMP-12-11.5-110420	11/4/2020	0.0075	J		<0.0063	U		<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-12-11.5-012821	1/28/2021	0.0064	J		<0.0056	U		<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-12-11.5-051121	5/11/2021	0.0073	J		<0.0051	U		<0.0044	U		<0.0072	U		0.00093	J		<0.0031	U		<0.0039	U		<0.031	U	
	25 ft	VMP-12-25-072920	7/29/2020	0.98	J		<1.8	U		<2.6	U		<2.6	U		<2.6	U		<1.1	U		1.5			0.29	J	
		VMP-12-25-072920-DUP	7/29/2020	1.6	J		<1.8	U		<2.4	U		<2.5	U		<2.4	U		<1	U		1.9			<11	U	
		VMP-12-25-110420	11/4/2020	<1.3	U		<0.63	U		<0.55	U		<0.88	U		<0.88	U		<0.38	U		<0.49	U		<3.8	U	
		VMP-12-25-012821	1/28/2021	<0.23	U		<0.12	U		<0.1	U		<0.16	U		<0.16	U		<0.069	U		<0.088	U		<0.7	U	
		VMP-12-25-051121	5/11/2021	<5.1	U		<2.5	U		<2.2	U		<3.5	U		<3.5	U		<1.5	U		<1.9	U		<15	U	
	39 ft	VMP-12-39-012821	1/28/2021	<60	U		<30	U		<26	U		<42	U		<42	U		<18	U		8	J		<180	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										8500						4						40000			25		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	0.015			0.012			<0.0091	U		<0.0091	U		0.0069	J		<0.0039	U		0.0036	J		<0.039	U	
		VMP-13-5-110220	11/2/2020	0.013			<0.0061	U		<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-13-5-012721	1/27/2021	0.0081	J		<0.0061	U		<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-13-5-051021	5/10/2021	0.015			<0.0049	U		<0.0042	U		<0.0069	U		<0.0068	U		<0.0029	U		<0.0038	U		<0.03	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	0.0062	J		<0.0064	U		<0.0088	U		<0.0089	U		0.0013	J		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-13-10.5-110220	11/2/2020	0.019			0.00058	J		<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00045	J		<0.035	U	
		VMP-13-10.5-012721	1/27/2021	0.007	J		<0.0053	U		<0.0046	U		<0.0073	U		0.0027	J		<0.0032	U		0.00087	J		<0.032	U	
		VMP-13-10.5-051021	5/10/2021	0.018			<0.0045	U		<0.0039	U		<0.0062	U		<0.0062	U		<0.0027	U		<0.0034	J	U	<0.027	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	0.0056	J		<0.0061	U		<0.0085	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-13-21.5-110220	11/2/2020	0.0068	J		<0.0063	U		<0.0054	U		<0.0088	U		0.0029	J		<0.0038	U		<0.0048	U		<0.038	U	
		VMP-13-21.5-110220-DUP	11/2/2020	0.0098	J		<0.0062	U		<0.0054	U		<0.0087	U		0.0031	J		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-13-21.5-012721	1/27/2021	0.009	J		<0.0056	U		<0.0048	U		<0.0078	U		0.006	J		<0.0033	U		<0.0042	U		<0.034	U	
		VMP-13-21.5-051021	5/10/2021	0.033			<0.0048	U		<0.0042	U		<0.0067	U		0.0047	J		<0.0029	U		<0.0037	U		<0.029	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	0.0065	J		<0.0064	U		<0.0088	U		<0.0089	U		0.0014	J		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-13-29.5-012721	1/27/2021	0.006	J		<0.0059	U		<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		0.00048	J		<0.036	U	
		VMP-13-29.5-051021	5/10/2021	0.026			<0.0049	U		<0.0042	U		<0.0068	U		<0.0067	U		<0.0029	U		0.0023	J		<0.029	U	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	0.0048	J		0.00071	J		<0.0086	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U	
		VMP-14-5-110220	11/2/2020	0.0052	J		<0.0058	J	U	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-14-5-012721	1/27/2021	0.01	J		<0.0059	U		<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U	
		VMP-14-5-051021	5/10/2021	0.0092	J		0.0022	J		0.0049			<0.007	U		<0.0069	U		<0.003	U		0.0081			<0.03	U	
	11.5 ft	VMP-14-11.5-073020	7/30/2020	0.0089	J		<0.0061	U		<0.0084	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U	
		VMP-14-11.5-073020-DUP	7/30/2020	0.012	J		<0.007	U		<0.0096	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U	
		VMP-14-11.5-110220	11/2/2020	0.026			<0.0061	U		<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
		VMP-14-11.5-012721	1/27/2021	0.0053	J		0.0027	J		<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-14-11.5-051021	5/10/2021	0.015			<0.0048	U		<0.0042	U		<0.0067	U		<0.0066	U		<0.0029	U		0.00026	J		<0.029	U	
	20 ft	VMP-14-20-073020	7/30/2020	0.0059	J		<0.0063	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-14-20-110220	11/2/2020	0.01	J		0.001	J		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-14-20-012721	1/27/2021	0.005	J		<0.0057	U		<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U	
		VMP-14-20-051021	5/10/2021	0.0098	J		<0.0054	U		<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U	
		VMP-14-20-051021-DUP	5/10/2021	0.0082	J		<0.0051	U		<0.0044	U		<0.0071	U		<0.007	U		<0.003	U		<0.0039	U		<0.03	U	
	29 ft	VMP-14-29-012721	1/27/2021	0.012			<0.0062	U		<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	0.012	J		<0.0069	U		<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U	
		VMP-15-5-110320	11/3/2020	0.022			<0.0064	U		<0.0056	U		<0.009	U		0.0016	J		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-15-5-012821	1/28/2021	0.021			<0.005	U		<0.0044	U		<0.007	U		<0.007	U		<0.003	U		<0.0039	U		<0.03	U	
		VMP-15-5-051121	5/11/2021	0.0096	J		<0.005	U		<0.0043	U		<0.0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.13	U		<0.066	U		<0.057	U		<0.092	U		<0.091	U		<0.04	U		<0.051	U		<0.4	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.13	U		<0.065	U		<0.056	U		<0.091	U		<0.09	U		<0.039	U		<0.05	U		<0.39	U	
		VMP-15-21.5-110320	11/3/2020	0.0078	J		<0.0064	U		<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U	
		VMP-15-21.5-012821	1/28/2021	0.007	J		0.002	J		<0.0057	U		<0.0092	U		0.0032	J		<0.0039	U		<0.005	U		<0.04	U	
		VMP-15-21.5-051121	5/11/2021	0.015	J		<0.025	U		<0.022	U		<0.035	U		<0.034	U		<0.015	U		<0.019	U		<0.15	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	0.035	J		<0.026	U		<0.022	U		<0.036	U		<0.035	U		<0.015	U		<0.02	U		<0.15	U	
		VMP-15-25.5-012821	1/28/2021	0.017			<0.0059	U		<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-15-25.5-051121	5/11/2021	0.024	J		<0.093	U		<0.081	U		<0.13	U		<0.13	U		<0.056	U		<0.072	U		<0.56	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										8500						4						40000			25		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	0.0036	J		<0.0064	U		<0.0088	U		<0.0089	U		0.01			<0.0038	U		<0.0049	U		0.0044	J	
		VMP-16-5-110420	11/4/2020	0.0045	J		<0.006	U		<0.0052	U		<0.0084	U		0.0015	J		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-16-5-012921	1/29/2021	0.0078	J		<0.0063	U		<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-16-5-012921-DUP	1/29/2021	0.01	J		<0.0065	U		<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-16-5-051121	5/11/2021	0.012			<0.0051	U		<0.0044	U		<0.0071	U		0.0021	J		<0.003	U		0.00043	J		<0.03	U	
		VMP-16-5-051121-DUP	5/11/2021	0.013			<0.0052	U		<0.0045	U		<0.0072	U		0.0025	J		<0.0031	U		<0.004	U		<0.031	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	22			29			1.1	J		<13	U		<13	U		<5.7	U		17			<58	U	
		VMP-16-13.5-110420	11/4/2020	<0.59	U		4		J	<0.26	U		<0.42	U		<0.41	U		<0.18	U		<0.23	U		<1.8	U	
		VMP-16-13.5-012921	1/29/2021	12			6.3			<3.2	U		<5.2	U		<5.1	U		<2.2	U		2.8	J		<22	U	
		VMP-16-13.5-051121	5/11/2021	<0.71	U		1			<0.31	U		<0.49	U		<0.49	U		<0.21	U		0.82			<2.1	U	
	19 ft	VMP-16-19-072920	7/29/2020	16	J		39			<12	U		<12	U		2.2	J		<5.1	U		15			<51	U	
		VMP-16-19-110420	11/4/2020	0.74	J		63			<1.1	U		<1.8	U		<1.8	U		<0.76	U		<0.97	U		<7.6	U	
		VMP-16-19-012921	1/29/2021	29			56			<5.3	U		<8.6	U		<8.5	U		<3.7	U		5.5			<37	U	
		VMP-16-19-051121	5/11/2021	<5.4	U		120			<2.3	U		<3.7	U		<3.7	U		<1.6	U		5.3			<16	U	
	31 ft	VMP-16-31-072920	7/29/2020	21	J		54			<22	U		<22	U		<22	U		<9.6	U		20			<97	U	
		VMP-16-31-110420	11/4/2020	<6.3	U		53			<2.7	U		<4.4	U		<4.4	U		<1.9	U		<2.4	U		<19	U	
		VMP-16-31-110420-DUP	11/4/2020	<5.8	U		63			<2.5	U		<4.1	U		<4	U		<1.8	U		<2.2	U		<18	U	
		VMP-16-31-012921	1/29/2021	25			39			<7.8	U		<12	U		<12	U		<5.4	U		48			<54	U	
		VMP-16-31-051121	5/11/2021	<5.1	U		78			<2.2	U		<3.6	U		<3.5	U		<1.5	U		6200			<15	U	
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.013	J	U	<0.0066	U		<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-17-5-110320	11/3/2020	0.012	J		<0.0065	U		<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U	
		VMP-17-5-012821	1/28/2021	0.004	J		<0.0053	U		<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U	
		VMP-17-5-050621	5/6/2021	0.0042	J		<0.005	U		<0.0043	U		<0.0069	U		0.041			<0.003	U		<0.0038	U		<0.03	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.013	J	U	<0.0063	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-25-5-072320-DUP	7/23/2020	<0.013	J	U	<0.0063	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-25-5-103020	10/30/2020	0.0087	J		<0.006	U		<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U	
		VMP-25-5-103020-DUP	10/30/2020	0.0083	J		<0.0062	U		<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		0.0006	J		<0.038	U	
		VMP-25-5-012621	1/26/2021	0.0061	J	J	<0.0058	U		<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U	
		VMP-25-5-012621-DUP	1/26/2021	0.048		J	<0.0061	U		<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.0015	J		<0.037	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	0.015			0.0009	J		<0.0082	U		<0.0083	U		0.0027	J		0.27			<0.0046	U		<0.036	U	
		VMP-29-10-110220	11/2/2020	0.026			0.00043	J		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.001	J		<0.036	U	
		VMP-29-10-012721	1/27/2021	0.0047	J		<0.006	U		<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0014	J		<0.036	U	
		VMP-29-10-051021	5/10/2021	0.01			<0.0046	U		<0.004	U		<0.0065	U		<0.0064	U		<0.0028	U		<0.0036	U		<0.028	U	
	18 ft	VMP-29-18-072720	7/27/2020	0.014			<0.0062	U		<0.0086	U		<0.0086	U		<0.0085	U		0.84			<0.0047	U		<0.037	U	
		VMP-29-18-110220	11/2/2020	0.022			<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		0.092			0.0022	J		<0.035	U	
		VMP-29-18-012721	1/27/2021	0.0084	J		<0.0059	U		<0.0051	U		<0.0082	U		<0.0081	U		0.04			0.0024	J		<0.036	U	
		VMP-29-18-051021	5/10/2021	0.02			<0.0066	U		<0.0057	U		<0.0092	U		<0.0091	U		0.64			<0.005	U		<0.04	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.011	U		<0.0056	U		<0.0078	U		<0.0078	U		0.0045	J		0.38			<0.0043	U		<0.034	U	
		VMP-29-26-110220	11/2/2020	0.016			0.0048	J		<0.0051	U		<0.0082	U		<0.0081	U		0.11			0.00057	J		<0.035	U	
		VMP-29-26-012721	1/27/2021	0.0063	J		0.00095	J		<0.0044	U		<0.0071	U		<0.007	U		0.051			0.00042	J		<0.03	U	
		VMP-29-26-051021	5/10/2021	0.014			<0.0048	U		<0.0042	U		<0.0067	U		<0.0066	U		0.078			<0.0037	U		<0.029	U	
		VMP-29-26-051021-DUP	5/10/2021	0.024			<0.005	U		<0.0043	U		<0.0069	U		0.0027	J		0.078			<0.0038	U		<0.03	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	2-Propanol			n-Propylbenzene			Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene		
										8500						4						40000			25		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.012	J	U	0.0006	J		<0.0082	U		<0.0083	U		<0.0082	U		0.0072			<0.0045	U		<0.036	U	
		VMP-30-10-110220	11/2/2020	0.026			<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		0.02			0.0022	J		<0.035	U	
		VMP-30-10-012721	1/27/2021	0.0062	J		0.0045	J		<0.0045	U		<0.0073	U		0.0018	J		0.017			0.0012	J		<0.031	U	
		VMP-30-10-012721-DUP	1/27/2021	0.0063	J		0.0047	J		<0.0047	U		<0.0076	U		0.0059	J		0.015			0.0014	J		0.0047	J	
		VMP-30-10-051021	5/10/2021	0.025			<0.0049	U		<0.0043	U		<0.0069	U		<0.0068	U		0.22			<0.0038	J	U	<0.03	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.051	U		<0.025	U		<0.035	U		<0.035	U		<0.035	U		8.4			<0.019	U		<0.15	U	
		VMP-30-18-110220	11/2/2020	0.016			0.00096	J		<0.005	U		<0.008	U		<0.0079	U		0.038			0.0018	J		<0.035	U	
		VMP-30-18-012721	1/27/2021	0.016			<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		0.011			0.0018	J		<0.035	U	
		VMP-30-18-051021	5/10/2021	0.011			<0.005	U		<0.0043	U		<0.0069	U		<0.0068	U		0.36			<0.0038	J	U	<0.03	U	
	26 ft	VMP-30-26-072720	7/27/2020	0.0078	J		<0.0058	U		<0.0081	U		<0.0082	U		<0.0081	U		3			<0.0045	U		<0.035	U	
		VMP-30-26-110220	11/2/2020	0.026			0.0014	J		<0.0052	U		<0.0084	U		<0.0083	U		0.011			0.0023	J		<0.036	U	
		VMP-30-26-012721	1/27/2021	0.01	J		<0.0059	U		<0.0051	U		<0.0082	U		<0.0081	U		0.01			0.0015	J		<0.036	U	
		VMP-30-26-051021	5/10/2021	0.019			<0.0046	U		<0.004	U		<0.0064	U		0.00096	J		0.035			<0.0035	U		<0.028	U	
		VMP-30-26-051021-DUP	5/10/2021	0.026			<0.0047	U		<0.0041	U		<0.0066	U		<0.0065	U		0.034			<0.0036	J	U	<0.028	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	0.0066	J		<0.0066	U		<0.0092	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	
		VMP-41-10-072920-DUP	7/29/2020	0.0062	J		<0.0068	U		<0.0094	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U	
		VMP-41-10-103020	10/30/2020	0.014			<0.0064	U		<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U	
		VMP-41-10-012721	1/27/2021	0.0044	J		<0.0056	U		<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U	
		VMP-41-10-050621	5/6/2021	0.0054	J		<0.0052	U		<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		0.00069	J		<0.031	U	
	20 ft	VMP-41-20-072920	7/29/2020	0.012	J		<0.0064	J	U	<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		0.0021	J		<0.038	U	
		VMP-41-20-103020	10/30/2020	0.0081	J		<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U	
		VMP-41-20-012721	1/27/2021	0.038			<0.0059	U		<0.0051	U		<0.0083	U		0.0016	J		<0.0036	U		0.0012	J		<0.036	U	
		VMP-41-20-050621	5/6/2021	0.026			<0.0047	U		<0.004	U		<0.0065	U		0.0014	J		<0.0028	U		0.0032	J		<0.028	U	
	26 ft	VMP-41-26-103020	10/30/2020	0.011	J		<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U	
		VMP-41-26-012721	1/27/2021	0.0088	J		<0.0058	U		<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U	
		VMP-41-26-050621	5/6/2021	0.0011	J		<0.0052	U		<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	0.011	J		0.0016	J		<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U	
		VMP-55-20-110320	11/3/2020	3.1			0.063	J		0.048	J		<0.44	U		0.1	J		<0.19	U		0.19	J		0.12	J	
		VMP-55-20-012821	1/28/2021	<0.11	U		<0.056	U		<0.049	U		<0.079	U		<0.078	U		<0.034	U		<0.043	U		<0.34	U	
		VMP-55-20-051121	5/11/2021	<4.9	U		<2.4	U		<2.1	U		<3.4	U		<3.4	U		<1.5	U		<1.9	U		<15	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				41000			12			5600												4.8			580		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	<0.0069	U		<0.0068	U		0.0011	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-10-5-103020	10/30/2020	<0.0068	U		<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-10-5-012721	1/27/2021	<0.0066	U		<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-10-5-050721	5/7/2021	<0.0058	U		<0.0058	U		0.001	J		<0.0052	U		<0.0053	U		0.0032	J		<0.0027	U		<0.0046	U	
	10 ft	VMP-10-10-073020	7/30/2020	<0.0071	U		<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		0.0034	J		<0.0033	U		<0.0056	U	
		VMP-10-10-103020	10/30/2020	<0.007	U		<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0011	J	
		VMP-10-10-012721	1/27/2021	<0.0065	U		<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-10-10-050721	5/7/2021	<0.0058	U		<0.0058	U		0.0012	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
	20 ft	VMP-10-20-073020	7/30/2020	<0.0069	U		<0.0068	U		0.0012	J		0.00085	J		<0.0062	U		0.028			<0.0032	U		<0.0055	U	
		VMP-10-20-103020	10/30/2020	<0.0071	U		<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-10-20-012721	1/27/2021	<0.0066	U		<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00031	J	
		VMP-10-20-050721	5/7/2021	<0.0062	U		<0.0062	U		0.0011	J		<0.0056	J	U	<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.0066	U		<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-11-5-012721	1/27/2021	<0.0066	U		<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-11-5-051021	5/10/2021	<0.0055	U		<0.0054	U		0.0016	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	8 ft	VMP-11-8-072720	7/27/2020	<0.0069	U		<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0066	U		<0.0065	U		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-11-8-102820	10/28/2020	<0.0066	U		<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-11-8-012721	1/27/2021	<0.0063	U		<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U	
		VMP-11-8-051021	5/10/2021	<0.0054	U		<0.0053	U		0.0013	J		<0.0049	U		<0.0049	U		0.0028	J		<0.0025	U		<0.0043	U	
	29 ft	VMP-11-29-072720	7/27/2020	<0.0068	U		0.018			0.001	J		<0.0061	U		<0.0061	U		<0.0058	U		0.018			<0.0054	U	
		VMP-11-29-102820	10/28/2020	<0.0067	U		<0.0066	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0015	J	
		VMP-11-29-012721	1/27/2021	<0.0064	U		<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-11-29-051021	5/10/2021	<0.0054	U		<0.0054	U		0.0015	J		<0.0049	U		<0.0049	U		<0.0047	U		<0.0026	U		<0.0043	U	
	38 ft	VMP-11-38-072720	7/27/2020	<0.0067	U		<0.0066	U		0.0011	J		<0.0061	U		<0.0061	U		0.0022	J		<0.0032	U		<0.0054	U	
		VMP-11-38-102820	10/28/2020	<0.0067	U		<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	<0.0067	U		0.0073			0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-12-5-110420	11/4/2020	<0.0069	U		<0.0068	U		0.0015	J		0.0012	J		<0.0062	U		0.63			<0.0032	U		<0.0055	U	
		VMP-12-5-012821	1/28/2021	<0.0066	U		<0.0065	U		0.0017	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	J	U
		VMP-12-5-012821-DUP	1/28/2021	<0.0064	U		<0.0063	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	J	U
		VMP-12-5-051121	5/11/2021	<0.0058	U		<0.0058	U		0.0011	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	<0.0069	U		<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-12-11.5-110420	11/4/2020	<0.007	U		<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-12-11.5-012821	1/28/2021	<0.0063	U		<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		0.0017	J		<0.0029	U		<0.005	U	
		VMP-12-11.5-051121	5/11/2021	<0.0057	U		<0.0056	U		0.0012	J		<0.0051	U		<0.0051	U		<0.0049	U		<0.0027	U		<0.0045	U	
	25 ft	VMP-12-25-072920	7/29/2020	<2	U		<2	U		<2.1	U		<1.8	U		<1.8	U		99			<0.96	U		<1.6	U	
		VMP-12-25-072920-DUP	7/29/2020	<2	U		<1.9	U		<2	U		<1.8	U		<1.8	U		97			<0.92	U		<1.6	U	
		VMP-12-25-110420	11/4/2020	<0.7	U		<0.69	U		<0.72	U		<0.63	U		<0.63	U		14			<0.33	U		<0.56	U	
		VMP-12-25-012821	1/28/2021	<0.13	U		<0.13	U		<0.13	U		<0.12	U		<0.12	U		8.2			<0.06	U		<0.1	U	
		VMP-12-25-051121	5/11/2021	<2.8	U		<2.8	U		<2.9	U		<2.5	U		1.5	J		80			<1.3	U		0.77	J	
	39 ft	VMP-12-39-012821	1/28/2021	<33	U		<33	U		<34	U		<30	U		<30	U		910			<16	U		<26	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				41000			12			5600												4.8			580		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	<0.0072	U		<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		0.027			<0.0034	U		<0.0058	U	
		VMP-13-5-110220	11/2/2020	<0.0068	U		<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-13-5-012721	1/27/2021	<0.0068	U		<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-13-5-051021	5/10/2021	<0.0054	U		<0.0054	U		0.0012	J		<0.0049	U		<0.0049	U		<0.0047	U		<0.0026	U		<0.0043	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	<0.0071	U		<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-13-10.5-110220	11/2/2020	<0.0065	U		0.0013	J		0.0016	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-13-10.5-012721	1/27/2021	<0.0058	U		<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U	
		VMP-13-10.5-051021	5/10/2021	<0.005	U		<0.0049	U		0.0014	J		<0.0045	U		<0.0045	U		0.00091	J		<0.0023	U		<0.004	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	<0.0068	U		<0.0067	U		0.00087	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-13-21.5-110220	11/2/2020	<0.007	U		<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0069	U		<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-13-21.5-012721	1/27/2021	<0.0062	U		<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.00068	J		<0.0029	U		<0.0049	U	
		VMP-13-21.5-051021	5/10/2021	<0.0053	U		<0.0052	U		0.0013	J		<0.0048	U		<0.0048	U		<0.0046	U		<0.0025	U		<0.0042	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	<0.0071	U		<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-13-29.5-012721	1/27/2021	<0.0066	U		<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-13-29.5-051021	5/10/2021	<0.0054	U		<0.0053	U		0.0012	J		<0.0049	U		<0.0049	U		<0.0046	U		<0.0025	U		0.0012	J	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	<0.0069	U		<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		0.00049	J		<0.0032	U		<0.0055	U	
		VMP-14-5-110220	11/2/2020	<0.0065	U		<0.0064	U		0.0011	J		<0.0058	J	U	<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-14-5-012721	1/27/2021	<0.0065	U		<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U	
		VMP-14-5-051021	5/10/2021	<0.0055	U		<0.0054	U		0.0011	J		0.014			0.007			0.00077	J		<0.0026	U		0.052		
	11.5 ft	VMP-14-11.5-073020	7/30/2020	<0.0068	U		<0.0067	U		0.00091	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0077	U		<0.0076	U		0.0012	J		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U	
		VMP-14-11.5-110220	11/2/2020	<0.0068	U		<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U	
		VMP-14-11.5-012721	1/27/2021	<0.0067	U		<0.0066	U		<0.0069	U		0.0011	J		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-14-11.5-051021	5/10/2021	<0.0053	U		<0.0053	U		0.0011	J		<0.0048	U		<0.0048	U		<0.0046	U		<0.0025	U		<0.0042	U	
	20 ft	VMP-14-20-073020	7/30/2020	<0.007	U		<0.0069	U		0.0011	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-14-20-110220	11/2/2020	<0.0066	U		<0.0065	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-14-20-012721	1/27/2021	<0.0063	U		<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U	
		VMP-14-20-051021	5/10/2021	<0.006	U		<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U	
		VMP-14-20-051021-DUP	5/10/2021	<0.0056	U		<0.0055	U		0.0012	J		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
	29 ft	VMP-14-29-012721	1/27/2021	<0.0068	U		<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	<0.0077	U		<0.0076	U		0.002	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U	
		VMP-15-5-110320	11/3/2020	<0.0071	U		<0.007	U		0.00093	J		<0.0064	U		<0.0064	U		0.0026	J		<0.0033	U		<0.0057	U	
		VMP-15-5-012821	1/28/2021	<0.0056	U		<0.0055	U		0.00097	J		<0.005	U		<0.005	U		<0.0048	U		<0.0026	U		<0.0044	U	
		VMP-15-5-051121	5/11/2021	<0.0055	U		<0.0054	U		0.0011	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.073	U		<0.072	U		<0.076	U		<0.066	U		<0.066	U		20			<0.034	U		<0.058	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.072	U		<0.071	U		<0.074	U		<0.065	U		<0.065	U		23			<0.034	U		<0.057	U	
		VMP-15-21.5-110320	11/3/2020	<0.0071	U		<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.059			<0.0033	U		<0.0057	U	
		VMP-15-21.5-012821	1/28/2021	<0.0073	U		0.0011	J		<0.0075	U		<0.0066	U		<0.0066	U		0.0018	J		<0.0034	U		<0.0058	U	
		VMP-15-21.5-051121	5/11/2021	<0.028	U		<0.027	U		<0.028	U		<0.025	U		<0.025	U		6.5			<0.013	U		<0.022	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	<0.028	U		<0.028	U		<0.029	U		<0.026	U		<0.026	U		5.7			<0.013	U		<0.022	U	
		VMP-15-25.5-012821	1/28/2021	<0.0065	U		<0.0064	U		0.00092	J		<0.0059	U		<0.0059	U		0.0011	J		<0.003	U		<0.0052	U	
		VMP-15-25.5-051121	5/11/2021	<0.1	U		<0.1	U		<0.11	U		<0.093	U		<0.093	U		14			<0.048	U		<0.082	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform) 41000			Trichloroethene 12			Trichlorofluoromethane 5600			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride 4.8			m,p-Xylenes 580		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	<0.0071	U		<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		1.6			<0.0033	U		<0.0056	U	
		VMP-16-5-110420	11/4/2020	<0.0066	U		<0.0066	U		0.0013	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.00038	J	
		VMP-16-5-012921	1/29/2021	<0.007	U		<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U	
		VMP-16-5-012921-DUP	1/29/2021	<0.0072	U		<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U	
		VMP-16-5-051121	5/11/2021	<0.0056	U		<0.0055	U		0.0013	J		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
		VMP-16-5-051121-DUP	5/11/2021	<0.0057	U		<0.0056	U		0.0012	J		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	<10	U		<10	U		<11	U		<9.5	U		<9.5	U		1400			<5	U		<8.4	U	
		VMP-16-13.5-110420	11/4/2020	<0.33	U		<0.32	U		<0.34	U		<0.3	U		<0.3	U		840		J	<0.15	U		<0.26	U	
		VMP-16-13.5-012921	1/29/2021	<4.1	U		<4.1	U		<4.2	U		<3.7	U		<3.7	U		1100			<1.9	U		1.5	J	
		VMP-16-13.5-051121	5/11/2021	<0.39	U		<0.39	U		<0.4	U		0.097	J		<0.35	U		610			<0.18	U		0.2	J	
	19 ft	VMP-16-19-072920	7/29/2020	<9.4	U		<9.3	U		<9.7	U		1.9	J		<8.5	U		1300			<4.4	U		<7.5	U	
		VMP-16-19-110420	11/4/2020	<1.4	U		<1.4	U		<1.4	U		2.2			<1.3	U		1500			<0.66	U		<1.1	U	
		VMP-16-19-012921	1/29/2021	<6.8	U		<6.7	U		<7	U		<6.1	U		<6.1	U		1700			<3.2	U		3.2	J	
		VMP-16-19-051121	5/11/2021	<3	U		<2.9	U		<3.1	U		2.3	J		<2.7	U		1800			<1.4	U		<2.4	U	
	31 ft	VMP-16-31-072920	7/29/2020	<18	U		<18	U		<18	U		<16	U		<16	U		1400			<8.3	U		<14	U	
		VMP-16-31-110420	11/4/2020	<3.5	U		<3.5	U		<3.6	U		1.2	J		<3.2	U		1300			<1.6	U		<2.8	U	
		VMP-16-31-110420-DUP	11/4/2020	<3.2	U		<3.2	U		<3.3	U		1.2	J		<2.9	U		1400			<1.5	U		<2.6	U	
		VMP-16-31-012921	1/29/2021	<10	U		<9.9	U		<10	U		<9	U		<9	U		1700			<4.7	U		4.6	J	
		VMP-16-31-051121	5/11/2021	<2.8	U		<2.8	U		<2.9	U		100			37			8800			<1.3	U		1100		
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.0074	U		<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U	
		VMP-17-5-110320	11/3/2020	<0.0072	U		<0.0071	U		0.0018	J		<0.0065	U		<0.0065	U		0.0012	J		<0.0034	U		<0.0057	U	
		VMP-17-5-012821	1/28/2021	<0.0059	U		<0.0058	U		0.0018	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U	
		VMP-17-5-050621	5/6/2021	<0.0055	U		0.0021	J		0.00093	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.007	U		<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0055	J		<0.0033	U		<0.0056	U	
		VMP-25-5-072320-DUP	7/23/2020	<0.007	U		<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.005	J		<0.0033	U		<0.0056	U	
		VMP-25-5-103020	10/30/2020	<0.0067	U		<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.22			<0.0031	U		<0.0053	U	
		VMP-25-5-103020-DUP	10/30/2020	<0.0069	U		<0.0068	U		<0.0071	U		0.0021	J		0.0009	J		0.21			<0.0032	U		0.0011	J	
		VMP-25-5-012621	1/26/2021	<0.0065	U		<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0036	J		<0.003	U		<0.0052	U	
		VMP-25-5-012621-DUP	1/26/2021	<0.0067	U		<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0044	J		<0.0032	U		<0.0054	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	<0.0066	U		<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0021	J		<0.0031	U		<0.0052	U	
		VMP-29-10-110220	11/2/2020	<0.0066	U		<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.00077	J	
		VMP-29-10-012721	1/27/2021	<0.0066	U		<0.0065	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U	
		VMP-29-10-051021	5/10/2021	<0.0052	U		<0.0051	U		0.0014	J		<0.0046	U		<0.0046	U		0.0018	J		<0.0024	U		<0.0041	U	
	18 ft	VMP-29-18-072720	7/27/2020	<0.0069	U		<0.0068	U		0.00099	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U	
		VMP-29-18-110220	11/2/2020	<0.0064	U		<0.0063	U		0.0016	J		0.0009	J		<0.0058	U		<0.0055	U		<0.003	U		0.0011	J	
		VMP-29-18-012721	1/27/2021	<0.0065	U		<0.0064	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0011	J	
		VMP-29-18-051021	5/10/2021	<0.0073	U		<0.0072	U		0.0012	J		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.0062	U		<0.0061	U		0.0009	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U	
		VMP-29-26-110220	11/2/2020	<0.0065	U		<0.0064	U		0.0017	J		<0.0058	U		<0.0058	U		0.0043	J		<0.003	U		<0.0052	U	
		VMP-29-26-012721	1/27/2021	<0.0056	U		<0.0055	U		0.0014	J		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U	
		VMP-29-26-051021	5/10/2021	<0.0053	U		<0.0052	U		0.0011	J		<0.0048	U		<0.0048	U		<0.0046	U		<0.0025	U		<0.0042	U	
		VMP-29-26-051021-DUP	5/10/2021	<0.0055	U		<0.0054	U		0.001	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes		
				41000			12			5600												4.8			580		
				Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.0066	U		<0.0065	U		0.00088	J		<0.0059	U		<0.0059	U		0.0013	J		<0.0031	U		<0.0052	U	
		VMP-30-10-110220	11/2/2020	<0.0064	U		<0.0063	U		0.002	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0009	J	
		VMP-30-10-012721	1/27/2021	<0.0058	U		<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		0.006			<0.0027	U		<0.0046	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.006	U		<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0055			<0.0028	U		<0.0048	U	
		VMP-30-10-051021	5/10/2021	<0.0055	U		<0.0054	U		0.001	J		<0.0049	U		<0.0049	U		<0.0047	U		<0.0026	U		<0.0044	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.028	U		<0.028	U		<0.029	U		<0.025	U		<0.025	U		<0.024	U		<0.013	U		<0.022	U	
		VMP-30-18-110220	11/2/2020	<0.0064	U		<0.0063	U		0.0021	J		0.00092	J		<0.0058	U		0.0032	J		<0.003	U		0.00093	J	
		VMP-30-18-012721	1/27/2021	<0.0065	U		<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.00073	J	
		VMP-30-18-051021	5/10/2021	<0.0055	U		<0.0054	U		0.0012	J		<0.005	U		<0.005	U		0.00066	J		<0.0026	U		<0.0044	U	
	26 ft	VMP-30-26-072720	7/27/2020	<0.0065	U		<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U	
		VMP-30-26-110220	11/2/2020	<0.0067	U		<0.0066	U		0.0018	J		0.0013	J		<0.006	U		0.0032	J		<0.0031	U		0.002	J	
		VMP-30-26-012721	1/27/2021	<0.0065	U		<0.0064	U		0.0017	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00069	J	
		VMP-30-26-051021	5/10/2021	<0.0051	U		<0.005	U		0.0013	J		<0.0046	U		<0.0046	U		<0.0044	U		<0.0024	U		<0.0041	U	
		VMP-30-26-051021-DUP	5/10/2021	<0.0052	U		<0.0051	U		0.0012	J		<0.0047	U		<0.0047	U		<0.0045	U		<0.0024	U		<0.0041	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	<0.0074	U		<0.0072	U		0.00093	J		<0.0066	U		<0.0066	U		0.001	J		<0.0034	U		<0.0059	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0076	U		<0.0074	U		0.0011	J		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U	
		VMP-41-10-103020	10/30/2020	<0.0071	U		<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U	
		VMP-41-10-012721	1/27/2021	<0.0063	U		<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U	
		VMP-41-10-050621	5/6/2021	<0.0057	U		<0.0056	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
	20 ft	VMP-41-20-072920	7/29/2020	<0.0071	U		<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		0.0038	J		<0.0033	U		<0.0056	U	
		VMP-41-20-103020	10/30/2020	<0.0064	U		<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-41-20-012721	1/27/2021	<0.0066	U		<0.0065	U		0.0019	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00064	J	
		VMP-41-20-050621	5/6/2021	<0.0052	U		<0.0051	U		0.0012	J		<0.0047	U		<0.0047	U		<0.0044	U		<0.0024	U		<0.0041	U	
	26 ft	VMP-41-26-103020	10/30/2020	<0.0064	U		<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-41-26-012721	1/27/2021	<0.0064	U		<0.0063	U		0.0019	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U	
		VMP-41-26-050621	5/6/2021	<0.0057	U		<0.0056	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	<0.0079	U		<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.12			<0.0037	U		<0.0063	U	
		VMP-55-20-110320	11/3/2020	<0.35	U		1.9			0.082	J		0.065	J		0.046	J		35			<0.16	U		0.12	J	
		VMP-55-20-012821	1/28/2021	<0.062	U		<0.062	U		<0.064	U		<0.056	U		<0.056	U		57			<0.029	U		<0.05	U	
		VMP-55-20-051121	5/11/2021	<2.7	U		<2.7	U		<2.8	U		<2.4	U		<2.4	U		260			<1.3	U		<2.2	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				790		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	<0.0055	U	
		VMP-10-5-103020	10/30/2020	<0.0054	U	
		VMP-10-5-012721	1/27/2021	<0.0053	U	
		VMP-10-5-050721	5/7/2021	<0.0046	U	
	10 ft	VMP-10-10-073020	7/30/2020	<0.0056	U	
		VMP-10-10-103020	10/30/2020	0.0007	J	
		VMP-10-10-012721	1/27/2021	<0.0052	U	
		VMP-10-10-050721	5/7/2021	<0.0046	U	
	20 ft	VMP-10-20-073020	7/30/2020	<0.0055	U	
		VMP-10-20-103020	10/30/2020	<0.0056	U	
		VMP-10-20-012721	1/27/2021	<0.0052	U	
		VMP-10-20-050721	5/7/2021	<0.005	U	
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	<0.0052	U	
		VMP-11-5-012721	1/27/2021	<0.0052	U	
		VMP-11-5-051021	5/10/2021	<0.0044	U	
	8 ft	VMP-11-8-072720	7/27/2020	<0.0055	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0052	U	
		VMP-11-8-102820	10/28/2020	<0.0052	U	
		VMP-11-8-012721	1/27/2021	<0.005	U	
		VMP-11-8-051021	5/10/2021	<0.0043	U	
	29 ft	VMP-11-29-072720	7/27/2020	<0.0054	U	
		VMP-11-29-102820	10/28/2020	<0.0053	U	
		VMP-11-29-012721	1/27/2021	<0.0051	U	
		VMP-11-29-051021	5/10/2021	<0.0043	U	
	38 ft	VMP-11-38-072720	7/27/2020	<0.0054	U	
		VMP-11-38-102820	10/28/2020	<0.0054	U	
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	<0.0053	U	
		VMP-12-5-110420	11/4/2020	<0.0055	U	
		VMP-12-5-012821	1/28/2021	<0.0053	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.0051	U	
		VMP-12-5-051121	5/11/2021	<0.0046	U	
	11.5 ft	VMP-12-11.5-072920	7/29/2020	<0.0055	U	
		VMP-12-11.5-110420	11/4/2020	<0.0056	U	
		VMP-12-11.5-012821	1/28/2021	<0.005	U	
		VMP-12-11.5-051121	5/11/2021	<0.0045	U	
	25 ft	VMP-12-25-072920	7/29/2020	<1.6	U	
		VMP-12-25-072920-DUP	7/29/2020	<1.6	U	
		VMP-12-25-110420	11/4/2020	<0.56	U	
		VMP-12-25-012821	1/28/2021	<0.1	U	
		VMP-12-25-051121	5/11/2021	<2.2	U	
	39 ft	VMP-12-39-012821	1/28/2021	<26	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				790		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	<0.0058	U	
		VMP-13-5-110220	11/2/2020	<0.0054	U	
		VMP-13-5-012721	1/27/2021	<0.0054	U	
		VMP-13-5-051021	5/10/2021	<0.0043	U	
	10.5 ft	VMP-13-10.5-073020	7/30/2020	<0.0056	U	
		VMP-13-10.5-110220	11/2/2020	<0.0052	U	
		VMP-13-10.5-012721	1/27/2021	<0.0046	U	
		VMP-13-10.5-051021	5/10/2021	<0.004	U	
	21.5 ft	VMP-13-21.5-073020	7/30/2020	<0.0054	U	
		VMP-13-21.5-110220	11/2/2020	<0.0056	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0055	U	
		VMP-13-21.5-012721	1/27/2021	<0.0049	U	
		VMP-13-21.5-051021	5/10/2021	<0.0042	U	
	29.5 ft	VMP-13-29.5-073020	7/30/2020	<0.0056	U	
		VMP-13-29.5-012721	1/27/2021	<0.0052	U	
		VMP-13-29.5-051021	5/10/2021	<0.0043	U	
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	<0.0055	U	
		VMP-14-5-110220	11/2/2020	<0.0051	U	
		VMP-14-5-012721	1/27/2021	<0.0052	U	
		VMP-14-5-051021	5/10/2021	0.016		
	11.5 ft	VMP-14-11.5-073020	7/30/2020	<0.0054	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0061	U	
		VMP-14-11.5-110220	11/2/2020	<0.0054	U	
		VMP-14-11.5-012721	1/27/2021	<0.0053	U	
		VMP-14-11.5-051021	5/10/2021	<0.0042	U	
	20 ft	VMP-14-20-073020	7/30/2020	<0.0056	U	
		VMP-14-20-110220	11/2/2020	<0.0053	U	
		VMP-14-20-012721	1/27/2021	<0.005	U	
		VMP-14-20-051021	5/10/2021	<0.0048	U	
		VMP-14-20-051021-DUP	5/10/2021	<0.0045	U	
	29 ft	VMP-14-29-012721	1/27/2021	<0.0054	U	
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	<0.0061	U	
		VMP-15-5-110320	11/3/2020	<0.0057	U	
		VMP-15-5-012821	1/28/2021	<0.0044	U	
		VMP-15-5-051121	5/11/2021	<0.0044	U	
	21.5 ft	VMP-15-21.5-072820	7/28/2020	<0.058	U	
		VMP-15-21.5-072820-DUP	7/28/2020	<0.057	U	
		VMP-15-21.5-110320	11/3/2020	<0.0057	U	
		VMP-15-21.5-012821	1/28/2021	<0.0058	U	
		VMP-15-21.5-051121	5/11/2021	<0.022	U	
	25.5 ft	VMP-15-25.5-110320	11/3/2020	<0.022	U	
		VMP-15-25.5-012821	1/28/2021	<0.0052	U	
		VMP-15-25.5-051121	5/11/2021	<0.082	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				790		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	<0.0056	U	
		VMP-16-5-110420	11/4/2020	<0.0053	U	
		VMP-16-5-012921	1/29/2021	<0.0056	U	
		VMP-16-5-012921-DUP	1/29/2021	<0.0058	U	
		VMP-16-5-051121	5/11/2021	<0.0045	U	
		VMP-16-5-051121-DUP	5/11/2021	<0.0046	U	
	13.5 ft	VMP-16-13.5-072920	7/29/2020	<8.4	U	
		VMP-16-13.5-110420	11/4/2020	<0.26	U	
		VMP-16-13.5-012921	1/29/2021	<3.3	U	
		VMP-16-13.5-051121	5/11/2021	0.12	J	
	19 ft	VMP-16-19-072920	7/29/2020	<7.5	U	
		VMP-16-19-110420	11/4/2020	<1.1	U	
		VMP-16-19-012921	1/29/2021	1.1	J	
		VMP-16-19-051121	5/11/2021	0.38	J	
	31 ft	VMP-16-31-072920	7/29/2020	<14	U	
		VMP-16-31-110420	11/4/2020	<2.8	U	
		VMP-16-31-110420-DUP	11/4/2020	<2.6	U	
		VMP-16-31-012921	1/29/2021	<8	U	
		VMP-16-31-051121	5/11/2021	350		
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	<0.0059	U	
		VMP-17-5-110320	11/3/2020	<0.0057	U	
		VMP-17-5-012821	1/28/2021	<0.0047	U	
		VMP-17-5-050621	5/6/2021	<0.0044	U	
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	<0.0056	U	
		VMP-25-5-072320-DUP	7/23/2020	<0.0056	U	
		VMP-25-5-103020	10/30/2020	<0.0053	U	
		VMP-25-5-103020-DUP	10/30/2020	0.00086	J	
		VMP-25-5-012621	1/26/2021	<0.0052	U	
		VMP-25-5-012621-DUP	1/26/2021	<0.0054	U	
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	<0.0052	U	
		VMP-29-10-110220	11/2/2020	<0.0053	U	
		VMP-29-10-012721	1/27/2021	<0.0053	U	
		VMP-29-10-051021	5/10/2021	<0.0041	U	
	18 ft	VMP-29-18-072720	7/27/2020	<0.0055	U	
		VMP-29-18-110220	11/2/2020	<0.0051	U	
		VMP-29-18-012721	1/27/2021	<0.0052	U	
		VMP-29-18-051021	5/10/2021	<0.0058	U	
	26 ft	VMP-29-26-072720	7/27/2020	<0.005	U	
		VMP-29-26-110220	11/2/2020	<0.0052	U	
		VMP-29-26-012721	1/27/2021	<0.0045	U	
		VMP-29-26-051021	5/10/2021	<0.0042	U	
		VMP-29-26-051021-DUP	5/10/2021	<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 6
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS: PUBLIC WORKS YARD AND WRR - VOCS

Location	Depth	Sample ID	Sample Date	o-Xylenes		
				790		
				Result (mg/m^3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	<0.0052	U	
		VMP-30-10-110220	11/2/2020	<0.0051	U	
		VMP-30-10-012721	1/27/2021	<0.0046	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0048	U	
		VMP-30-10-051021	5/10/2021	<0.0044	U	
	18 ft	VMP-30-18-072720	7/27/2020	<0.022	U	
		VMP-30-18-110220	11/2/2020	<0.0051	U	
		VMP-30-18-012721	1/27/2021	<0.0051	U	
		VMP-30-18-051021	5/10/2021	<0.0044	U	
	26 ft	VMP-30-26-072720	7/27/2020	<0.0052	U	
		VMP-30-26-110220	11/2/2020	0.001	J	
		VMP-30-26-012721	1/27/2021	<0.0052	U	
		VMP-30-26-051021	5/10/2021	<0.0041	U	
		VMP-30-26-051021-DUP	5/10/2021	<0.0041	U	
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	<0.0059	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.006	U	
		VMP-41-10-103020	10/30/2020	<0.0056	U	
		VMP-41-10-012721	1/27/2021	<0.005	U	
		VMP-41-10-050621	5/6/2021	<0.0046	U	
	20 ft	VMP-41-20-072920	7/29/2020	<0.0056	U	
		VMP-41-20-103020	10/30/2020	<0.0051	U	
		VMP-41-20-012721	1/27/2021	<0.0052	U	
		VMP-41-20-050621	5/6/2021	<0.0041	U	
	26 ft	VMP-41-26-103020	10/30/2020	<0.0051	U	
		VMP-41-26-012721	1/27/2021	<0.0051	U	
		VMP-41-26-050621	5/6/2021	<0.0046	U	
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	<0.0063	U	
		VMP-55-20-110320	11/3/2020	0.063	J	
		VMP-55-20-012821	1/28/2021	<0.05	U	
		VMP-55-20-051121	5/11/2021	<2.2	U	

Notes:
Analytes shown were detected in at least one location on Table 5 or Table 6 during the current quarter or previous 3 quarters.
Yellow highlighted cells indicate readings that exceed commercial/industrial screening criterion.
Blank cells in Result column indicate that analyte was not on target analyte list.

Lab Qualifiers
J = Estimated value; results between the MDL and RL
U = Compound analyzed for but not detected above the RL
CN = Indicates potential high bias due to use of Tedlar© bag for off-line dilution
ND,UJ = Non-detected compound associated with low bias in the continuing calibration verification (CCV)
J0 = Estimated value due to bias in the CCV

AECOM Qualifiers
J = Estimated detection
UJ = Estimated non-detect
U = Non-detect due to blank contamination

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-072820	7/28/2020	0.74			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			19		
		VMP-1-5-110220	11/2/2020	0.98			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		81			18		
		VMP-1-5-012921	1/29/2021	0.16			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		79			21		
		VMP-1-5-050521	5/5/2021	0.25			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			21		
	8.5 ft	VMP-1-8.5-072820	7/28/2020	0.74			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			20		
		VMP-1-8.5-110220	11/2/2020	1			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		81			18		
		VMP-1-8.5-012921	1/29/2021	0.22			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-1-8.5-050521	5/5/2021	0.24			<0.022	U		<0.0022	U		<0.0022	U		0.024	J		<0.00022	U		80			20		
	23.5 ft	VMP-1-23.5-072820	7/28/2020	0.74			<0.026	U		<0.0026	U		<0.0026	U		0.0084	J		<0.00026	U		80			19		
		VMP-1-23.5-110220	11/2/2020	1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		81			18		
		VMP-1-23.5-012921	1/29/2021	0.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			21		
		VMP-1-23.5-012921-DUP	1/29/2021	0.64			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			21		
	38.5 ft	VMP-1-38.5-072820	7/28/2020	0.74			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		80			19		
		VMP-1-38.5-110220	11/2/2020	1.1			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		81			18		
		VMP-1-38.5-012921	1/29/2021	1.4			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			20		
		VMP-1-38.5-050521	5/5/2021	0.21			<0.022	U		<0.0022	U		<0.0022	U		0.017	J		<0.00022	U		79			21		
VMP-2	5 ft	VMP-2-5-072420	7/24/2020	6.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		82			12		
		VMP-2-5-110420	11/4/2020	5.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			16		
		VMP-2-5-012521	1/25/2021	1.5			<0.026	U		<0.0026	U		<0.0026	U		0.052	J		<0.00026	U		78			20		
		VMP-2-5-050721	5/7/2021	1.2			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		81			18		
	8.5 ft	VMP-2-8.5-072420	7/24/2020	4			<0.024	U		<0.0024	U		<0.0024	U		0.012	J		<0.00024	U		80			16		
		VMP-2-8.5-110420	11/4/2020	5.2			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			16		
		VMP-2-8.5-012521	1/25/2021	1.8			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			20		
		VMP-2-8.5-050721	5/7/2021	1.4			<0.021	U		<0.0021	U		<0.0021	U		0.026	J		<0.00021	U		80			19		
	22 ft	VMP-2-22-072420	7/24/2020	3.8			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			16		
		VMP-2-22-110420	11/4/2020	5.2			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.098			79			16		
		VMP-2-22-012521	1/25/2021	3.2			<0.025	U		<0.0025	U		<0.0025	U		0.0046	J		<0.00025	U		78			19		
		VMP-2-22-050721	5/7/2021	1.6			<0.021	U		<0.0021	U		<0.0021	U		0.0054	J		<0.00021	U		80			18		
VMP-3	5 ft	VMP-3-5-072920	7/29/2020	0.22			<0.027	U		<0.0027	U		<0.0027	U		0.79			0.00021	J		79			20		
		VMP-3-5-110420	11/4/2020	0.34			<0.025	U		<0.0025	U		<0.0025	U		0.0072	J		0.00036			80			20		
		VMP-3-5-012521	1/25/2021	0.042			<0.027	U		<0.0027	U		<0.0027	U		0.021	J		<0.00027	U		79			21		
		VMP-3-5-051021	5/10/2021	0.53			<0.02	U		<0.002	U		<0.002	U		0.22			0.000085	J		79			20		
	10 ft	VMP-3-10-072920	7/29/2020	0.28			<0.025	U		<0.0025	U		<0.0025	U		0.21			0.00031			78			21		
		VMP-3-10-110420	11/4/2020	1.3			<0.027	U		<0.0027	U		<0.0027	U		0.0067	J		0.0015			80			19		
		VMP-3-10-051021	5/10/2021	0.5			<0.02	U		<0.002	U		<0.002	U		0.37			0.00016	J		79			20		
	22 ft	VMP-3-22-072920	7/29/2020	1.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00011	J		79			20		
		VMP-3-22-110420	11/4/2020	2.1			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		0.0012			81			17		
		VMP-3-22-012521	1/25/2021	0.43			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			21		
		VMP-3-22-051021	5/10/2021	0.53			<0.02	U		<0.002	U		<0.002	U		0.011	J		<0.0002	U		79			20		
		VMP-3-22-051021-DUP	5/10/2021	0.54			<0.02	U		<0.002	U		<0.002	U		0.011	J		<0.0002	U		79			20		
	31.5 ft	VMP-3-31.5-072920	7/29/2020	5.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.018			80			15		
		VMP-3-31.5-110420	11/4/2020	12			<0.025	U		0.001	J		<0.0025	U		<0.13	U		5.3			80			1.5		
		VMP-3-31.5-012521	1/25/2021	4.4			<0.026	U		<0.0026	U		<0.0026	U		0.15			<0.00026	U		77			18		
		VMP-3-31.5-051021	5/10/2021	2.2			<0.02	U		<0.002	U		<0.002	U		<0.099	U		0.00011	J		80			18		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-4	5 ft	VMP-4-5-073020	7/30/2020	0.37			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		80			20		
		VMP-4-5-073020-DUP	7/30/2020	0.38			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			20		
		VMP-4-5-103020	10/30/2020	0.98			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00016	J		79			20		
		VMP-4-5-012821	1/28/2021	0.066			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		0.0001	J		79			21		
		VMP-4-5-050521	5/5/2021	0.24			<0.021	U		<0.0021	U		<0.0021	U		0.1	J		0.000099	J		79			21		
	12 ft	VMP-4-12-073020	7/30/2020	0.66			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			20		
		VMP-4-12-103020	10/30/2020	1			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00084			80			19		
		VMP-4-12-012821	1/28/2021	0.096			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			21		
		VMP-4-12-050521	5/5/2021	0.42			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		78			21		
	23.5 ft	VMP-4-23.5-073020	7/30/2020	2.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-4-23.5-103020	10/30/2020	4.8			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		83			12		
		VMP-4-23.5-103020-DUP	10/30/2020	4.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		84			12		
		VMP-4-23.5-012821	1/28/2021	1.9			<0.024	U		<0.0024	U		<0.0024	U		0.027	J		<0.00024	U		78			20		
		VMP-4-23.5-050521	5/5/2021	1			<0.022	U		<0.0022	U		<0.0022	U		0.0073	J		<0.00022	U		79			20		
VMP-5	5 ft	VMP-5-5-072320	7/23/2020	0.51			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			20		
		VMP-5-5-103020	10/30/2020	0.91			<0.024	U		<0.0024	U		<0.0024	U		0.018	J		<0.00024	U		78			21		
		VMP-5-5-012221	1/22/2021	0.068			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00018	J		78			22		
		VMP-5-5-050621	5/6/2021	0.098			<0.02	U		<0.002	U		<0.002	U		0.027	J		0.00015	J		80			20		
	12.5 ft	VMP-5-12.5-072320	7/23/2020	1.1			<0.025	U		<0.0025	U		<0.0025	U		0.037	J		<0.00025	U		80			19		
		VMP-5-12.5-103020	10/30/2020	2.9			<0.025	U		<0.0025	U		<0.0025	U		1.6			<0.00025	U		78			18		
		VMP-5-12.5-012221	1/22/2021	0.4			<0.029	U		<0.0029	U		<0.0029	U		<0.14	U		<0.00029	U		79			21		
		VMP-5-12.5-050621	5/6/2021	0.34			<0.021	U		<0.0021	U		<0.0021	U		0.017	J		<0.00021	U		80			20		
		VMP-5-12.5-050621-DUP	5/6/2021	0.35			<0.022	U		<0.0022	U		<0.0022	U		0.011	J		<0.00022	U		80			20		
	31 ft	VMP-5-31-072320	7/23/2020	1.3			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.001			80			19		
		VMP-5-31-072320-DUP	7/23/2020	1.3			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00097			80			19		
		VMP-5-31-103020	10/30/2020	2.1			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		0.0024			80			18		
		VMP-5-31-103020-DUP	10/30/2020	2.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.0024			80			18		
		VMP-5-31-012221	1/22/2021	1.6			<0.024	U		<0.0024	U		<0.0024	U		0.011	J		0.00041			78			20		
		VMP-5-31-050621	5/6/2021	1.1			<0.02	U		<0.002	U		<0.002	U		0.02	J		0.00016	J		80			19		
VMP-6	5 ft	VMP-6-5-072220	7/22/2020	1.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		81			18		
		VMP-6-5-102920	10/29/2020	2.2			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00015	J		78			20		
		VMP-6-5-012921	1/29/2021	0.86			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			21		
		VMP-6-5-050621	5/6/2021	0.61			<0.022	U		<0.0022	U		<0.0022	U		0.011	J		<0.00022	U		80			19		
	10 ft	VMP-6-10-072220	7/22/2020	1.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00017	J		80			19		
		VMP-6-10-102920	10/29/2020	3.7			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			17		
		VMP-6-10-050621	5/6/2021	1.1			<0.021	U		<0.0021	U		<0.0021	U		0.086	J		<0.00021	U		81			18		
	31.5 ft	VMP-6-31.5-072220	7/22/2020	2			<0.027	U		<0.0027	U		<0.0027	U		0.018	J		0.0049			79			19		
		VMP-6-31.5-102920	10/29/2020	4.7			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00016	J		80			15		
		VMP-6-31.5-012921	1/29/2021	3.5			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			18		
		VMP-6-31.5-012921-DUP	1/29/2021	0.9			<0.028	U		<0.0028	U		<0.0028	U		4.1			0.00012	J		75			20		
		VMP-6-31.5-050621	5/6/2021	2.5			<0.021	U		<0.0021	U		<0.0021	U		0.0092	J		<0.00021	U		80			18		
VMP-7	5 ft	VMP-7-5-073020	7/30/2020	0.76			<0.024	U		<0.0024	U		<0.0024	U		0.007	J		<0.00024	U		80			19		
		VMP-7-5-110420	11/4/2020	1.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			19		
		VMP-7-5-012621	1/26/2021	0.47			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			21		
		VMP-7-5-050521	5/5/2021	0.54			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			20		
	13.5 ft	VMP-7-13.5-073020	7/30/2020	0.8			<0.026	U		<0.0026	U		<0.0026	U		0.014	J		<0.00026	U		79			20		
		VMP-7-13.5-110420	11/4/2020	2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-7-13.5-012621	1/26/2021	0.57			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			21		
		VMP-7-13.5-050521	5/5/2021	0.56			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			20		
	29.5 ft	VMP-7-29.5-073020	7/30/2020	1.7			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-7-29.5-110420	11/4/2020	2.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-7-29.5-012621	1/26/2021	2.3			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			20		
		VMP-7-29.5-050521	5/5/2021	1.3			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		80			19		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-8	5 ft	VMP-8-5-072220	7/22/2020	3.3			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		81			16		
		VMP-8-5-102820	10/28/2020	0.67			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			20		
		VMP-8-5-012121	1/21/2021	0.65			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			20		
		VMP-8-5-050421	5/4/2021	1.2			<0.018	U		<0.0018	U		<0.0018	U		0.0084	J		0.000059	J		80			19		
	9.5 ft	VMP-8-9.5-072220	7/22/2020	4			<0.026	U		<0.0026	U		<0.0026	U		0.0078	J		<0.00026	U		80			16		
		VMP-8-9.5-072220-DUP	7/22/2020	4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			16		
		VMP-8-9.5-102820	10/28/2020	2.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			19		
		VMP-8-9.5-012121	1/21/2021	1.8			<0.025	U		<0.0025	U		<0.0025	U		0.0059	J		<0.00025	U		79			19		
		VMP-8-9.5-050421	5/4/2021	1.7			<0.02	U		<0.002	U		<0.002	U		0.034	J		<0.0002	U		80			18		
	23.5 ft	VMP-8-23.5-072220	7/22/2020	3.5			<0.024	U		<0.0024	U		<0.0024	U		0.0077	J		0.0072			80			16		
		VMP-8-23.5-102820	10/28/2020	4.6			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			17		
		VMP-8-23.5-012121	1/21/2021	3.3			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		79			18		
		VMP-8-23.5-050421	5/4/2021	2.8			<0.019	U		<0.0019	U		<0.0019	U		0.023	J		<0.00019	U		80			17		
	35.5 ft	VMP-8-35.5-072220	7/22/2020	1.8			<0.024	U		<0.0024	U		<0.0024	U		0.46			<0.00024	U		80			18		
		VMP-8-35.5-102820	10/28/2020	1.1			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			20		
		VMP-8-35.5-102820-DUP	10/28/2020	1.1			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			20		
		VMP-8-35.5-012121	1/21/2021	0.46			<0.025	U		<0.0025	U		<0.0025	U		0.041	J		<0.00025	U		80			20		
		VMP-8-35.5-050421	5/4/2021	0.32			<0.02	U		<0.002	U		<0.002	U		1.4			0.00015	J		79			19		
VMP-9	5 ft	VMP-9-5-072220	7/22/2020	2.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		81			17		
		VMP-9-5-072220-DUP	7/22/2020	2.5			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			17		
		VMP-9-5-102820	10/28/2020	0.16			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00016	J		79			21		
		VMP-9-5-012121	1/21/2021	0.33			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00045			80			20		
		VMP-9-5-050421	5/4/2021	0.2			<0.021	U		<0.0021	U		<0.0021	U		0.021	J		0.00015	J		80			20		
	11.5 ft	VMP-9-11.5-072220	7/22/2020	1.5			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			19		
		VMP-9-11.5-102820	10/28/2020	0.8			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			21		
		VMP-9-11.5-012121	1/21/2021	0.57			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00026	J		79			20		
		VMP-9-11.5-050421	5/4/2021	0.69			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			19		
	25.5 ft	VMP-9-25.5-072220	7/22/2020	1.5			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00013	J		78			20		
		VMP-9-25.5-102820	10/28/2020	2			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			20		
		VMP-9-25.5-102820-DUP	10/28/2020	2			<0.024	U		<0.0024	U		<0.0024	U		0.0087	J		<0.00024	U		79			19		
		VMP-9-25.5-012121	1/21/2021	1.6			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			20		
		VMP-9-25.5-050421	5/4/2021	1.2			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		80			19		
	38.5 ft	VMP-9-38.5-012121	1/21/2021	2.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-9-38.5-012121-DUP	1/21/2021	2.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
VMP-10	5 ft	VMP-10-5-073020	7/30/2020	2			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			19		
		VMP-10-5-103020	10/30/2020	0.2			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			21		
		VMP-10-5-012721	1/27/2021	0.1			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-10-5-050721	5/7/2021	0.47			<0.022	U		<0.0022	U		<0.0022	U		0.021	J		<0.00022	U		80			20		
	10 ft	VMP-10-10-073020	7/30/2020	1.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-10-10-103020	10/30/2020	0.22			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00021	J		79			21		
		VMP-10-10-012721	1/27/2021	0.16			<0.024	U		<0.0024	U		<0.0024	U		0.014	J		<0.00024	U		79			21		
		VMP-10-10-050721	5/7/2021	0.49			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			20		
	20 ft	VMP-10-20-073020	7/30/2020	1.4			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			20		
		VMP-10-20-103020	10/30/2020	0.21			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			21		
		VMP-10-20-012721	1/27/2021	0.16			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-10-20-050721	5/7/2021	0.28			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		80			20		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-11	5 ft	VMP-11-5-102820	10/28/2020	0.077			<0.024	U		<0.0024	U		<0.0024	U		0.033	J		0.00017	J		79			21		
		VMP-11-5-012721	1/27/2021	0.05			<0.024	U		<0.0024	U		<0.0024	U		0.068	J		0.00021	J		79			21		
		VMP-11-5-051021	5/10/2021	0.052			<0.02	U		<0.002	U		<0.002	U		4.7			0.00017	J		76			19		
	8 ft	VMP-11-8-072720	7/27/2020	5.3			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00016	J		81			14		
		VMP-11-8-072720-DUP	7/27/2020	5.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00018	J		81			14		
		VMP-11-8-102820	10/28/2020	0.11			<0.024	U		<0.0024	U		<0.0024	U		0.0092	J		0.00013	J		79			21		
		VMP-11-8-012721	1/27/2021	0.058			<0.023	U		<0.0023	U		<0.0023	U		0.1	J		0.00014	J		79			21		
		VMP-11-8-051021	5/10/2021	0.099			<0.02	U		<0.002	U		<0.002	U		0.088	J		0.00014	J		80			20		
	29 ft	VMP-11-29-072720	7/27/2020	3.1			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		80			17		
		VMP-11-29-102820	10/28/2020	0.11			<0.024	U		<0.0024	U		<0.0024	U		0.036	J		0.00012	J		79			21		
		VMP-11-29-012721	1/27/2021	0.15			<0.023	U		<0.0023	U		<0.0023	U		0.041	J		0.00012	J		79			21		
		VMP-11-29-051021	5/10/2021	0.17			<0.02	U		<0.002	U		<0.002	U		0.34			0.00013	J		79			20		
	38 ft	VMP-11-38-072720	7/27/2020	5			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00038			80			15		
		VMP-11-38-102820	10/28/2020	0.075			<0.025	U		<0.0025	U		<0.0025	U		0.082	J		0.00023	J		79			21		
VMP-12	5 ft	VMP-12-5-072920	7/29/2020	0.26			<0.024	U		<0.0024	U		<0.0024	U		0.0076	J		<0.00024	U		82			18		
		VMP-12-5-110420	11/4/2020	0.076			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.0082			79			21		
		VMP-12-5-012821	1/28/2021	0.042			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.0002	J		79			21		
		VMP-12-5-012821-DUP	1/28/2021	0.045			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00023	J		78			22		
		VMP-12-5-051121	5/11/2021	0.055			<0.021	U		<0.0021	U		<0.0021	U		0.071	J		0.00022			79			21		
	11.5 ft	VMP-12-11.5-072920	7/29/2020	2.5			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		84			14		
		VMP-12-11.5-110420	11/4/2020	0.089			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.0002	J		79			21		
		VMP-12-11.5-012821	1/28/2021	0.05			<0.023	U		<0.0023	U		<0.0023	U		0.029	J		0.00054			78			22		
		VMP-12-11.5-051121	5/11/2021	0.071			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		0.00016	J		80			20		
	25 ft	VMP-12-25-072920	7/29/2020	13			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.27			85			1.5		
		VMP-12-25-072920-DUP	7/29/2020	13			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.28			85			1.5		
		VMP-12-25-110420	11/4/2020	11			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.079			84			5.2		
		VMP-12-25-012821	1/28/2021	9.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.0032			81			9.2		
		VMP-12-25-051121	5/11/2021	13			<0.02	U		<0.002	U		<0.002	U		0.026	J		0.73			84			2.4		
	39 ft	VMP-12-39-012821	1/28/2021	11			<0.024	U		0.00067	J		<0.0024	U		4.7			19			57			4.7		
VMP-13	5 ft	VMP-13-5-073020	7/30/2020	1			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		81			18		
		VMP-13-5-110220	11/2/2020	0.17			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			21		
		VMP-13-5-012721	1/27/2021	0.087			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			21		
		VMP-13-5-051021	5/10/2021	0.17			<0.02	U		<0.002	U		<0.002	U		0.0073	J		<0.0002	U		80			20		
	10.5 ft	VMP-13-10.5-073020	7/30/2020	0.61			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00016	J		79			20		
		VMP-13-10.5-110220	11/2/2020	0.21			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-13-10.5-012721	1/27/2021	0.11			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			21		
		VMP-13-10.5-051021	5/10/2021	0.096			<0.018	U		<0.0018	U		<0.0018	U		<0.092	U		<0.00018	U		80			20		
	21.5 ft	VMP-13-21.5-073020	7/30/2020	0.31			<0.025	U		<0.0025	U		<0.0025	U		0.0076	J		0.00038			80			20		
		VMP-13-21.5-110220	11/2/2020	0.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00014	J		80			20		
		VMP-13-21.5-110220-DUP	11/2/2020	0.4			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00014	J		80			20		
		VMP-13-21.5-012721	1/27/2021	0.44			<0.022	U		<0.0022	U		<0.0022	U		0.0091	J		0.00058			80			20		
		VMP-13-21.5-051021	5/10/2021	0.32			<0.019	U		<0.0019	U		<0.0019	U		0.26			0.000082	J		80			19		
	29.5 ft	VMP-13-29.5-073020	7/30/2020	0.67			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			20		
		VMP-13-29.5-012721	1/27/2021	0.056			<0.024	U		<0.0024	U		<0.0024	U		0.1	J		0.00018	J		79			21		
		VMP-13-29.5-051021	5/10/2021	0.12			<0.02	U		<0.002	U		<0.002	U		0.012	J		<0.0002	U		80			20		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-073020	7/30/2020	4.1			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00034			88			7.5		
		VMP-14-5-110220	11/2/2020	0.21			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			20		
		VMP-14-5-012721	1/27/2021	0.16			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-14-5-051021	5/10/2021	0.3			<0.02	U		<0.002	U		<0.002	U		0.01	J		<0.0002	U		80			20		
	11.5 ft	VMP-14-11.5-073020	7/30/2020	3.6			<0.025	U		<0.0025	U		<0.0025	U		0.023	J		0.00014	J		85			11		
		VMP-14-11.5-073020-DUP	7/30/2020	4.2			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		0.00022	J		84			12		
		VMP-14-11.5-110220	11/2/2020	0.21			<0.025	U		<0.0025	U		<0.0025	U		0.01	J		<0.00025	U		80			20		
		VMP-14-11.5-012721	1/27/2021	0.16			<0.024	U		<0.0024	U		<0.0024	U		1.7			<0.00024	U		77			21		
		VMP-14-11.5-051021	5/10/2021	0.3			<0.02	U		<0.002	U		<0.002	U		0.34			<0.0002	U		79			20		
	20 ft	VMP-14-20-073020	7/30/2020	10			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00037			83			6.7		
		VMP-14-20-110220	11/2/2020	7.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00019	J		81			12		
		VMP-14-20-012721	1/27/2021	7			<0.023	U		<0.0023	U		<0.0023	U		0.02	J		0.00015	J		79			14		
		VMP-14-20-051021	5/10/2021	6.4			<0.022	U		<0.0022	U		<0.0022	U		0.057	J		0.00021	J		82			12		
		VMP-14-20-051021-DUP	5/10/2021	6.4			<0.021	U		<0.0021	U		<0.0021	U		0.058	J		0.00019	J		82			12		
	29 ft	VMP-14-29-012721	1/27/2021	4.1			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00039			79			17		
VMP-15	5 ft	VMP-15-5-072820	7/28/2020	7.2			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		<0.00028	U		85			8.2		
		VMP-15-5-110320	11/3/2020	3.9			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		81			15		
		VMP-15-5-012821	1/28/2021	3			<0.02	U		<0.002	U		<0.002	U		0.036	J		<0.0002	U		82			15		
		VMP-15-5-051121	5/11/2021	2.9			<0.02	U		<0.002	U		<0.002	U		0.0068	J		<0.0002	U		81			16		
	21.5 ft	VMP-15-21.5-072820	7/28/2020	14			<0.027	U		0.00034	J		<0.0027	U		<0.13	U		6.2			78			1.4		
		VMP-15-21.5-072820-DUP	7/28/2020	15			<0.026	U		0.00056	J		<0.0026	U		<0.13	U		6.4			77			1.4		
		VMP-15-21.5-110320	11/3/2020	15			<0.026	U		<0.0026	U		<0.0026	U		0.0084	J		0.071			82			2.4		
		VMP-15-21.5-012821	1/28/2021	16			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		82			2.3		
		VMP-15-21.5-051121	5/11/2021	15			<0.02	U		0.00028	J		<0.002	U		0.016	J		3.3			80			1.4		
	25.5 ft	VMP-15-25.5-110320	11/3/2020	19			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.11			78			2.5		
		VMP-15-25.5-012821	1/28/2021	15			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			7.1		
		VMP-15-25.5-051121	5/11/2021	17			<0.019	U		0.00072	J		<0.0019	U		<0.095	U		2.7			79			1.4		
VMP-16	5 ft	VMP-16-5-072920	7/29/2020	19			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.0022			79			2.1		
		VMP-16-5-110420	11/4/2020	4			<0.024	U		<0.0024	U		<0.0024	U		0.0071	J		<0.00024	U		78			18		
		VMP-16-5-012921	1/29/2021	11			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		83			6.2		
		VMP-16-5-012921-DUP	1/29/2021	11			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		83			6.4		
		VMP-16-5-051121	5/11/2021	2.4			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		80			18		
		VMP-16-5-051121-DUP	5/11/2021	2.4			<0.021	U		<0.0021	U		<0.0021	U		0.0066	J		<0.00021	U		80			18		
	13.5 ft	VMP-16-13.5-072920	7/29/2020	16			<0.027	U		0.00024	J		<0.0027	U		<0.14	U		6.2			76			1.4		
		VMP-16-13.5-110420	11/4/2020	30			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.81			68			1.5		
		VMP-16-13.5-012921	1/29/2021	19			<0.024	U		0.00033	J		<0.0024	U		<0.12	U		8.1			72			1.3		
		VMP-16-13.5-051121	5/11/2021	15			<0.02	U		<0.002	U		<0.002	U		<0.1	U		0.26			83			1.4		
	19 ft	VMP-16-19-072920	7/29/2020	16			<0.024	U		0.00024	J		<0.0024	U		<0.12	U		6.7			76			1.6		
		VMP-16-19-110420	11/4/2020	21			<0.026	U		0.00036	J		<0.0026	U		<0.13	U		11			66			1.3		
		VMP-16-19-012921	1/29/2021	19			<0.025	U		0.00028	J		<0.0025	U		0.1	J		9.4			70			1.3		
		VMP-16-19-051121	5/11/2021	15			<0.022	U		0.00019	J		<0.0022	U		0.0065	J		8			75			1.3		
	31 ft	VMP-16-31-072920	7/29/2020	16			<0.026	U		0.00022	J		<0.0026	U		<0.13	U		7.2			75			1.4		
		VMP-16-31-110420	11/4/2020	19			<0.026	U		0.00039	J		<0.0026	U		0.15			12			67			1.2		
		VMP-16-31-110420-DUP	11/4/2020	19			<0.024	U		0.0004	J		<0.0024	U		0.0064	J		13			67			1.1		
		VMP-16-31-012921	1/29/2021	19			<0.026	U		0.00035	J		<0.0026	U		<0.13	U		13			66			1.2		
		VMP-16-31-051121	5/11/2021	14			<0.021	U		0.00022	J		<0.0021	U		0.0052	J		10			71			1.7		
VMP-17	5 ft	VMP-17-5-072220	7/22/2020	1.6			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		<0.00027	U		79			19		
		VMP-17-5-110320	11/3/2020	0.063			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00014	J		80			20		
		VMP-17-5-012821	1/28/2021	0.054			<0.022	U		<0.0022	U		<0.0022	U		0.02	J		0.00018	J		79			21		
		VMP-17-5-050621	5/6/2021	0.14			<0.02	U		<0.002	U		<0.002	U		0.0086	J		0.00013	J		80			20		
VMP-18	8.5 ft	VMP-18-8.5-103020	10/30/2020	0.23			<0.024	U		<0.0024	U		<0.0024	U		8.2			0.00012	J		72			20		
		VMP-18-8.5-112420	11/24/2020	0.29			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			21		
		VMP-18-8.5-012621	1/26/2021	0.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			21		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-072720	7/27/2020	1.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			19		
		VMP-19-5-110420	11/4/2020	0.07			<0.026	U		<0.0026	U		<0.0026	U		0.13			0.00015	J		79			21		
		VMP-19-5-012621	1/26/2021	0.047			<0.025	U		<0.0025	U		<0.0025	U		0.17			0.0002	J		79			21		
		VMP-19-5-051121	5/11/2021	0.075			<0.019	U		<0.0019	U		<0.0019	U		0.68			0.00021			79			20		
VMP-20	5 ft	VMP-20-5-072320	7/23/2020	14			<0.024	U		<0.0024	U		<0.0024	U		0.0092	J		<0.00024	U		78			8		
		VMP-20-5-110220	11/2/2020	7.3			<0.022	U		<0.0022	U		<0.0022	U		5.4			<0.00022	U		79			14		
		VMP-20-5-112420	11/24/2020	8.2			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		78			14		
		VMP-20-5-012521	1/25/2021	4.9			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		78			17		
		VMP-20-5-050721	5/7/2021	5.1			<0.02	U		<0.002	U		<0.002	U		<0.099	U		<0.0002	U		79			16		
	10 ft	VMP-20-10-072320	7/23/2020	13			<0.025	U		<0.0025	U		<0.0025	U		0.0064	J		<0.00025	U		79			8.4		
		VMP-20-10-110220	11/2/2020	8			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		78			14		
		VMP-20-10-012521	1/25/2021	6.3			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			16		
		VMP-20-10-050721	5/7/2021	5.6			<0.019	U		<0.0019	U		<0.0019	U		<0.095	U		<0.00019	U		79			15		
	25 ft	VMP-20-25-072320	7/23/2020	4.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			16		
		VMP-20-25-110220	11/2/2020	4.9			<0.023	U		<0.0023	U		<0.0023	U		0.015	J		<0.00023	U		79			16		
		VMP-20-25-012521	1/25/2021	5.7			<0.024	U		<0.0024	U		<0.0024	U		0.046	J		<0.00024	U		78			16		
		VMP-20-25-050721	5/7/2021	4.2			<0.019	U		<0.0019	U		<0.0019	U		<0.097	U		<0.00019	U		79			17		
		VMP-20-25-050721-DUP	5/7/2021	4.2			<0.019	U		<0.0019	U		<0.0019	U		<0.095	U		<0.00019	U		79			17		
VMP-21	5 ft	VMP-21-5-072420	7/24/2020	3.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00011	J		79			18		
		VMP-21-5-102920	10/29/2020	1.5			<0.025	U		<0.0025	U		<0.0025	U		0.028	J		<0.00025	U		80			19		
		VMP-21-5-012521	1/25/2021	0.23			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			21		
		VMP-21-5-050321	5/3/2021	0.83			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		0.000094	J		79			20		
	10 ft	VMP-21-10-072420	7/24/2020	6.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		78			16		
		VMP-21-10-102920	10/29/2020	0.33			<0.025	U		<0.0025	U		<0.0025	U		0.15			0.00016	J		80			20		
		VMP-21-10-012521	1/25/2021	1.3			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			20		
		VMP-21-10-012521-DUP	1/25/2021	1.3			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			20		
		VMP-21-10-050321	5/3/2021	1.5			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			19		
		VMP-21-10-060321-R	6/3/2021	1.8			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			18		
	25 ft	VMP-21-25-072420	7/24/2020	3.1			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		80			17		
		VMP-21-25-102920	10/29/2020	1.8			<0.026	U		<0.0026	U		<0.0026	U		0.0081	J		<0.00026	U		79			19		
		VMP-21-25-012521	1/25/2021	1.8			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			20		
		VMP-21-25-050321	5/3/2021	1			<0.022	U		<0.0022	U		<0.0022	U		0.0046	J		<0.00022	U		80			19		
		VMP-21-25-050321-DUP	5/3/2021	1			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			19		
	33 ft	VMP-21-33-072420	7/24/2020	2.8			<0.026	U		<0.0026	U		<0.0026	U		0.0079	J		<0.00026	U		80			17		
		VMP-21-33-102920	10/29/2020	0.35			<0.025	U		<0.0025	U		<0.0025	U		0.8			0.00012	J		80			20		
		VMP-21-33-012521	1/25/2021	2.8			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			19		
		VMP-21-33-050321	5/3/2021	1.6			<0.023	U		<0.0023	U		<0.0023	U		0.069	J		<0.00023	U		79			19		
VMP-22	5 ft	VMP-22-5-072320	7/23/2020	1.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.000095	J		80			19		
		VMP-22-5-110520	11/5/2020	1.7			<0.024	U		<0.0024	U		<0.0024	U		0.06	J		<0.00024	U		79			19		
		VMP-22-5-012621	1/26/2021	0.12			<0.027	U		<0.0027	U		<0.0027	U		0.033	J		0.00014	J		79			21		
		VMP-22-5-050321	5/3/2021	0.56			<0.023	U		<0.0023	U		<0.0023	U		0.0098	J		<0.00023	U		79			20		
	10 ft	VMP-22-10-072320	7/23/2020	0.77			<0.025	U		<0.0025	U		<0.0025	U		0.058	J		0.00014	J		79			20		
		VMP-22-10-110520	11/5/2020	0.95			<0.025	U		<0.0025	U		<0.0025	U		0.7			0.000086	J		78			20		
		VMP-22-10-012621	1/26/2021	0.054			<0.026	U		<0.0026	U		<0.0026	U		1.9			0.00019	J		77			21		
		VMP-22-10-050321	5/3/2021	0.48			<0.023	U		<0.0023	U		<0.0023	U		0.7			0.00018	J		80			20		
	18 ft	VMP-22-18-072320	7/23/2020	1.7			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		<0.00028	U		79			19		
		VMP-22-18-110520	11/5/2020	1.4			<0.024	U		<0.0024	U		<0.0024	U		0.56			<0.00024	U		79			19		
		VMP-22-18-012621	1/26/2021	0.25			<0.026	U		<0.0026	U		<0.0026	U		0.82			0.00013	J		78			21		
		VMP-22-18-050321	5/3/2021	0.47			<0.022	U		<0.0022	U		<0.0022	U		0.14			<0.00022	U		80			20		
	38 ft	VMP-22-38-110520	11/5/2020	0.91			<0.025	U		<0.0025	U		<0.0025	U		0.59			0.00012	J		78			20		
		VMP-22-38-012621	1/26/2021	0.057			<0.028	U		<0.0028	U		<0.0028	U		0.65			0.00023	J		78			21		
		VMP-22-38-050321	5/3/2021	0.46			<0.022	U		<0.0022	U		<0.0022	U		0.56			0.00019	J		80			20		
		VMP-22-38-060321-R	6/3/2021	0.81			<0.024	U		<0.0024	U		<0.0024	U		0.13			0.00016	J		79			20		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-072320	7/23/2020	2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			18		
		VMP-23-5-102920	10/29/2020	3.3			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			18		
		VMP-23-5-012121	1/21/2021	0.38			<0.026	U		<0.0026	U		<0.0026	U		0.042	J		<0.00026	U		80			20		
		VMP-23-5-050721	5/7/2021	1.1			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		80			19		
	10 ft	VMP-23-10-072320	7/23/2020	2			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		<0.00027	U		80			18		
		VMP-23-10-102920	10/29/2020	3.7			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			18		
		VMP-23-10-102920-DUP	10/29/2020	3.6			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			18		
		VMP-23-10-012121	1/21/2021	0.55			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			20		
	25 ft	VMP-23-25-072320	7/23/2020	2			<0.027	U		<0.0027	U		<0.0027	U		0.05	J		0.00022	J		80			18		
		VMP-23-25-102920	10/29/2020	3.5			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			18		
		VMP-23-25-012121	1/21/2021	2.4			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			19		
		VMP-23-25-050721	5/7/2021	1.1			<0.019	U		<0.0019	U		<0.0019	U		0.0097	J		<0.00019	U		80			19		
VMP-24	5 ft	VMP-24-5-072220	7/22/2020	3.3			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		81			16		
		VMP-24-5-102920	10/29/2020	4.2			<0.026	U		<0.0026	U		<0.0026	U		0.0092	J		<0.00026	U		79			17		
		VMP-24-5-012121	1/21/2021	2.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			18		
		VMP-24-5-051121	5/11/2021	2.4			<0.019	U		<0.0019	U		<0.0019	U		<0.096	U		<0.00019	U		79			19		
	10 ft	VMP-24-10-072220	7/22/2020	4.2			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		80			16		
		VMP-24-10-102920	10/29/2020	5.8			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			16		
		VMP-24-10-022521	2/25/2021	2.9			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00009	J		78			19		
		VMP-24-10-051121	5/11/2021	2.9			<0.018	U		<0.0018	U		<0.0018	U		<0.089	U		<0.00018	U		79			18		
		VMP-24-10-051121-DUP	5/11/2021	2.9			<0.018	U		<0.0018	U		<0.0018	U		<0.09	U		<0.00018	U		79			18		
	22 ft	VMP-24-22-072220	7/22/2020	2.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			17		
		VMP-24-22-102920	10/29/2020	4.1			<0.024	U		<0.0024	U		<0.0024	U		0.11	J		<0.00024	U		78			18		
		VMP-24-22-012121	1/21/2021	2.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			19		
		VMP-24-22-051121	5/11/2021	1.8			<0.02	U		<0.002	U		<0.002	U		4.2			<0.0002	U		76			18		
	34 ft	VMP-24-34-072220	7/22/2020	4.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			16		
		VMP-24-34-102920	10/29/2020	4.9			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			17		
		VMP-24-34-102920-DUP	10/29/2020	5.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			16		
		VMP-24-34-012121	1/21/2021	3.8			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		78			18		
		VMP-24-34-051121	5/11/2021	2.7			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		79			18		
VMP-25	5 ft	VMP-25-5-072320	7/23/2020	8.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00067			88			4.2		
		VMP-25-5-072320-DUP	7/23/2020	8.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00063			88			4.2		
		VMP-25-5-103020	10/30/2020	3			<0.025	U		0.0011	J		<0.0025	U		0.053	J		0.82			94			2.3		
		VMP-25-5-103020-DUP	10/30/2020	2.8			<0.025	U		0.001	J		<0.0025	U		1.9			0.76			91			3.1		
		VMP-25-5-012621	1/26/2021	2.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.0042			91			6.1		
		VMP-25-5-012621-DUP	1/26/2021	2.7			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.0038			90			7.3		
VMP-29	10 ft	VMP-29-10-072720	7/27/2020	0.18			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			20		
		VMP-29-10-110220	11/2/2020	0.14			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00012	J		79			21		
		VMP-29-10-012721	1/27/2021	0.076			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00015	J		79			21		
		VMP-29-10-051021	5/10/2021	0.15			<0.019	U		<0.0019	U		<0.0019	U		0.75			<0.00019	U		79			20		
	18 ft	VMP-29-18-072720	7/27/2020	0.24			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00013	J		80			20		
		VMP-29-18-110220	11/2/2020	0.078			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00021	J		79			21		
		VMP-29-18-012721	1/27/2021	0.055			<0.024	U		<0.0024	U		<0.0024	U		3.6			0.00017	J		76			20		
		VMP-29-18-051021	5/10/2021	0.22			<0.019	U		<0.0019	U		<0.0019	U		0.087	J		<0.00019	U		80			20		
	26 ft	VMP-29-26-072720	7/27/2020	0.31			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		0.0012			80			20		
		VMP-29-26-110220	11/2/2020	0.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00014	J		79			20		
		VMP-29-26-012721	1/27/2021	0.79			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		0.0001	J		79			20		
		VMP-29-26-051021	5/10/2021	0.6			<0.02	U		<0.002	U		<0.002	U		0.081	J		<0.0002	U		80			19		
		VMP-29-26-051021-DUP	5/10/2021	0.6			<0.02	U		<0.002	U		<0.002	U		0.076	J		<0.0002	U		80			19		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-072720	7/27/2020	1			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			19		
		VMP-30-10-110220	11/2/2020	0.076			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00019	J		79			21		
		VMP-30-10-012721	1/27/2021	0.053			<0.021	U		<0.0021	U		<0.0021	U		<0.11	U		0.00018	J		79			21		
		VMP-30-10-012721-DUP	1/27/2021	0.053			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		0.00016	J		79			21		
		VMP-30-10-051021	5/10/2021	0.054			<0.02	U		<0.002	U		<0.002	U		0.026	J		<0.0002	U		80			20		
	18 ft	VMP-30-18-072720	7/27/2020	0.99			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			19		
		VMP-30-18-110220	11/2/2020	0.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		0.00016	J		79			21		
		VMP-30-18-012721	1/27/2021	0.052			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00024			79			21		
		VMP-30-18-051021	5/10/2021	0.08			<0.02	U		<0.002	U		<0.002	U		0.03	J		0.000094	J		80			20		
	26 ft	VMP-30-26-072720	7/27/2020	1.3			<0.024	U		<0.0024	U		<0.0024	U		0.0082	J		0.00015	J		80			19		
		VMP-30-26-110220	11/2/2020	0.13			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00017	J		79			21		
		VMP-30-26-012721	1/27/2021	0.05			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00021	J		79			21		
		VMP-30-26-051021	5/10/2021	0.3			<0.019	U		<0.0019	U		<0.0019	U		0.0098	J		0.000088	J		80			20		
		VMP-30-26-051021-DUP	5/10/2021	0.3			<0.019	U		<0.0019	U		<0.0019	U		0.0084	J		0.000087	J		80			20		
VMP-32	5 ft	VMP-32-5-072920	7/29/2020	2.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-32-5-110420	11/4/2020	2.7			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			18		
		VMP-32-5-012621	1/26/2021	0.17			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00015	J		79			21		
		VMP-32-5-051221	5/12/2021	0.58			<0.02	U		<0.002	U		<0.002	U		<0.099	U		<0.0002	U		79			20		
	10 ft	VMP-32-10-072920	7/29/2020	2.7			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			18		
		VMP-32-10-110420	11/4/2020	2.6			<0.024	U		<0.0024	U		<0.0024	U		0.046	J		<0.00024	U		78			19		
		VMP-32-10-012621	1/26/2021	0.62			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			21		
		VMP-32-10-051221	5/12/2021	0.68			<0.021	U		<0.0021	U		<0.0021	U		0.0047	J		<0.00021	U		79			20		
		VMP-32-10-051221-DUP	5/12/2021	0.68			<0.02	U		<0.002	U		<0.002	U		0.0047	J		<0.0002	U		79			20		
	20 ft	VMP-32-20-072920	7/29/2020	0.14			<0.025	U		<0.0025	U		<0.0025	U		0.027	J		0.00021	J		79			21		
		VMP-32-20-110420	11/4/2020	1.3			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			19		
		VMP-32-20-012621	1/26/2021	0.063			<0.027	U		<0.0027	U		<0.0027	U		0.63			0.00024	J		78			21		
		VMP-32-20-012621-DUP	1/26/2021	0.064			<0.026	U		<0.0026	U		<0.0026	U		0.66			0.00023	J		77			22		
	30 ft	VMP-32-30-072920	7/29/2020	0.94			<0.027	U		<0.0027	U		<0.0027	U		0.18			0.00014	J		79			20		
		VMP-32-30-110420	11/4/2020	1.9			<0.026	U		<0.0026	U		<0.0026	U		0.008	J		<0.00026	U		79			19		
		VMP-32-30-110420-DUP	11/4/2020	1.9			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		<0.00028	U		79			19		
		VMP-32-30-012621	1/26/2021	0.23			<0.025	U		<0.0025	U		<0.0025	U		0.84			0.00011	J		78			21		
VMP-41	10 ft	VMP-41-10-072920	7/29/2020	1.3			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		<0.00027	U		80			19		
		VMP-41-10-072920-DUP	7/29/2020	1.3			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		<0.00028	U		80			19		
		VMP-41-10-103020	10/30/2020	0.16			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			21		
		VMP-41-10-012721	1/27/2021	0.14			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			21		
		VMP-41-10-050621	5/6/2021	0.51			<0.021	U		<0.0021	U		<0.0021	U		0.015	J		<0.00021	U		79			20		
	20 ft	VMP-41-20-072920	7/29/2020	1.1			<0.026	U		<0.0026	U		<0.0026	U		0.013	J		<0.00026	U		80			19		
		VMP-41-20-103020	10/30/2020	0.28			<0.024	U		<0.0024	U		<0.0024	U		0.0083	J		<0.00024	U		79			21		
		VMP-41-20-012721	1/27/2021	0.28			<0.024	U		<0.0024	U		<0.0024	U		0.029	J		<0.00024	U		79			21		
		VMP-41-20-050621	5/6/2021	0.43			<0.019	U		<0.0019	U		<0.0019	U		0.0024	J		<0.00019	U		80			20		
	26 ft	VMP-41-26-103020	10/30/2020	0.63			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			21		
		VMP-41-26-012721	1/27/2021	0.65			<0.024	U		<0.0024	U		<0.0024	U		0.024	J		<0.00024	U		79			20		
		VMP-41-26-050621	5/6/2021	0.5			<0.021	U		<0.0021	U		<0.0021	U		0.01	J		<0.00021	U		80			19		
VMP-42	10 ft	VMP-42-10-072820	7/28/2020	2.2			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			19		
		VMP-42-10-110520	11/5/2020	3			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			18		
		VMP-42-10-012921	1/29/2021	0.62			<0.026	U		<0.0026	U		<0.0026	U		0.013	J		<0.00026	U		78			21		
		VMP-42-10-050521	5/5/2021	0.53			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		79			20		
	20 ft	VMP-42-20-072820	7/28/2020	2.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			18		
		VMP-42-20-110520	11/5/2020	3.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00014	J		78			18		
		VMP-42-20-012921	1/29/2021	1.9			<0.026	U		<0.0026	U		<0.0026	U		0.011	J		<0.00026	U		77			21		
		VMP-42-20-050521	5/5/2021	0.69			<0.023	U		<0.0023	U		<0.0023	U		0.0032	J		<0.00023	U		79			20		
	30 ft	VMP-42-30-072820	7/28/2020	2.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.000096	J		80			18		
		VMP-42-30-110520	11/5/2020	3.9			<0.025	U		<0.0025	U		<0.0025	U		0.01	J		0.00082			79			17		
		VMP-42-30-110520-DUP	11/5/2020	3.9			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00082			79			17		
		VMP-42-30-012921	1/29/2021	3.4			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		77			20		
		VMP-42-30-050521	5/5/2021	1			<0.023	U		<0.0023	U		<0.0023	U		0.19			<0.00023	U		79			20		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-072820	7/28/2020	0.49			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.0002	J		80			20		
		VMP-43-10-110320	11/3/2020	0.95			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00013	J		82			17		
		VMP-43-10-012621	1/26/2021	0.059			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00024			79			21		
		VMP-43-10-050521	5/5/2021	0.14			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		0.00021	J		79			21		
	20 ft	VMP-43-20-072820	7/28/2020	0.8			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		0.0056			80			19		
		VMP-43-20-110320	11/3/2020	3.2			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		84			13		
		VMP-43-20-012621	1/26/2021	0.062			<0.024	U		<0.0024	U		<0.0024	U		0.49			0.00018	J		78			21		
		VMP-43-20-050521	5/5/2021	0.16			<0.02	U		<0.002	U		<0.002	U		<0.1	U		0.0002			79			21		
	30 ft	VMP-43-30-072820	7/28/2020	4.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.2			83			12		
		VMP-43-30-110320	11/3/2020	14			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		84			1.8		
		VMP-43-30-022521	2/25/2021	0.25			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			21		
		VMP-43-30-050521	5/5/2021	0.63			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		0.000099	J		79			20		
VMP-44	10 ft	VMP-44-10-072820	7/28/2020	5.1			<0.024	U		<0.0024	U		<0.0024	U		0.0068	J		0.00052			82			13		
	20 ft	VMP-44-20-072820	7/28/2020	5.3			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00044			83			12		
VMP-45	10 ft	VMP-45-10-072820	7/28/2020	0.88			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		<0.00027	U		80			19		
		VMP-45-10-110520	11/5/2020	1.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			19		
		VMP-45-10-012621	1/26/2021	0.19			<0.024	U		<0.0024	U		<0.0024	U		0.037	J		0.00011	J		79			21		
		VMP-45-10-050521	5/5/2021	0.26			<0.02	U		<0.002	U		<0.002	U		25			0.00011	J		59			16		
		VMP-45-10-060321	6/3/2021	0.52			<0.022	U		<0.0022	U		<0.0022	U		0.011	J		0.000085	J		79			20		
	20 ft	VMP-45-20-072820	7/28/2020	0.9			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		<0.00027	U		80			19		
		VMP-45-20-110520	11/5/2020	1.8			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		80			18		
		VMP-45-20-012621	1/26/2021	0.24			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-45-20-050521	5/5/2021	0.42			<0.02	U		<0.002	U		<0.002	U		0.034	J		<0.0002	U		78			21		
	30 ft	VMP-45-30-072820	7/28/2020	0.8			<0.029	U		<0.0029	U		<0.0029	U		<0.15	U		0.00024	J		81			18		
		VMP-45-30-110520	11/5/2020	0.88			<0.024	U		<0.0024	U		<0.0024	U		0.053	J		<0.00024	U		79			20		
		VMP-45-30-012621	1/26/2021	0.17			<0.024	U		<0.0024	U		<0.0024	U		0.36			0.00018	J		78			21		
		VMP-45-30-050521	5/5/2021	0.32			<0.02	U		<0.002	U		<0.002	U		1.4			0.00019	J		78			20		
		VMP-45-30-050521-DUP	5/5/2021	0.34			<0.02	U		<0.002	U		<0.002	U		1.5			0.0002	J		78			20		
VMP-47	5 ft	VMP-47-5-072720	7/27/2020	2.8			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		80			17		
		VMP-47-5-110220	11/2/2020	2.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-47-5-012221	1/22/2021	0.11			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00015	J		79			21		
		VMP-47-5-050621	5/6/2021	0.35			<0.021	U		<0.0021	U		<0.0021	U		0.0056	J		0.00018	J		79			21		
	10 ft	VMP-47-10-072720	7/27/2020	1.9			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-47-10-072720-DUP	7/27/2020	1.9			<0.024	U		<0.0024	U		<0.0024	U		0.0074	J		<0.00024	U		80			18		
		VMP-47-10-110220	11/2/2020	2.9			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			18		
		VMP-47-10-012221	1/22/2021	0.58			<0.025	U		<0.0025	U		<0.0025	U		0.0075	J		0.00012	J		78			21		
		VMP-47-10-050621	5/6/2021	0.87			<0.02	U		<0.002	U		<0.002	U		0.017	J		<0.0002	U		79			20		
	20 ft	VMP-47-20-072720	7/27/2020	1.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			19		
		VMP-47-20-110220	11/2/2020	2.2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			18		
		VMP-47-20-012221	1/22/2021	0.45			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			21		
		VMP-47-20-012221-DUP	1/22/2021	0.46			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			21		
		VMP-47-20-050621	5/6/2021	0.72			<0.02	U		<0.002	U		<0.002	U		0.0039	J		<0.0002	U		79			20		
	30 ft	VMP-47-30-072720	7/27/2020	1.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			19		
		VMP-47-30-110220	11/2/2020	2.6			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		0.00014	J		83			14		
		VMP-47-30-110220-DUP	11/2/2020	2.7			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		0.00014	J		83			14		
		VMP-47-30-012221	1/22/2021	1.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			20		
		VMP-47-30-050621	5/6/2021	0.89			<0.02	U		<0.002	U		<0.002	U		0.024	J		<0.0002	U		80			19		
		VMP-47-30-050621-DUP	5/6/2021	0.88			<0.02	U		<0.002	U		<0.002	U		0.0071	J		<0.0002	U		80			19		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-48	5 ft	VMP-48-5-073020	7/30/2020	7.5			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		80			12		
		VMP-48-5-110220	11/2/2020	3			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			18		
		VMP-48-5-012521	1/25/2021	0.53			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			21		
		VMP-48-5-050721	5/7/2021	2.1			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		81			17		
	10 ft	VMP-48-10-073020	7/30/2020	4.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			16		
		VMP-48-10-073020-DUP	7/30/2020	4.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			16		
		VMP-48-10-110220	11/2/2020	5.8			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			15		
		VMP-48-10-012521	1/25/2021	4			<0.024	U		<0.0024	U		<0.0024	U		0.03	J		<0.00024	U		78			18		
		VMP-48-10-050721	5/7/2021	1.9			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			18		
	20 ft	VMP-48-20-110220	11/2/2020	5.7			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		80			14		
		VMP-48-20-012521	1/25/2021	4.8			<0.025	U		<0.0025	U		<0.0025	U		0.0093	J		<0.00025	U		77			18		
		VMP-48-20-012521-DUP	1/25/2021	5			<0.025	U		<0.0025	U		<0.0025	U		0.098	J		<0.00025	U		77			18		
	30 ft	VMP-48-30-073020	7/30/2020	6.5			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			16		
		VMP-48-30-110220	11/2/2020	6.4			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			15		
		VMP-48-30-012521	1/25/2021	7.2			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		77			16		
		VMP-48-30-050721	5/7/2021	5.9			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		78			16		
VMP-49	5 ft	VMP-49-5-072420	7/24/2020	0.73			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			20		
		VMP-49-5-072420-DUP	7/24/2020	0.72			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		79			20		
		VMP-49-5-110420	11/4/2020	0.83			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			20		
		VMP-49-5-012521	1/25/2021	0.13			<0.024	U		<0.0024	U		<0.0024	U		0.0098	J		<0.00024	U		79			21		
		VMP-49-5-050321	5/3/2021	0.33			<0.023	U		<0.0023	U		<0.0023	U		0.0088	J		<0.00023	U		80			20		
	10 ft	VMP-49-10-072420	7/24/2020	1.8			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		0.00014	J		79			19		
		VMP-49-10-110420	11/4/2020	0.96			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00058			79			20		
		VMP-49-10-012521	1/25/2021	0.28			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			21		
		VMP-49-10-050321	5/3/2021	0.73			<0.022	U		<0.0022	U		<0.0022	U		0.017	J		0.00013	J		79			20		
	20 ft	VMP-49-20-072420	7/24/2020	1.4			<0.024	U		<0.0024	U		<0.0024	U		0.16			0.0002	J		80			19		
		VMP-49-20-110420	11/4/2020	1.7			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.028			80			18		
		VMP-49-20-012521	1/25/2021	0.04			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		0.00014	J		79			21		
		VMP-49-20-050321	5/3/2021	0.6			<0.023	U		<0.0023	U		<0.0023	U		0.19			0.00013	J		79			20		
		VMP-49-20-060321-R	6/3/2021	1.4			<0.021	U		<0.0021	U		<0.0021	U		<0.11	U		0.00011	J		80			19		
	30 ft	VMP-49-30-072420	7/24/2020	8.9			<0.026	U		<0.0026	U		<0.0026	U		0.065	J		<0.00026	U		79			12		
		VMP-49-30-110420	11/4/2020	6.6			<0.024	U		<0.0024	U		<0.0024	U		0.014	J		0.61			83			10		
		VMP-49-30-012521	1/25/2021	10			<0.026	U		<0.0026	U		<0.0026	U		0.02	J		<0.00026	U		78			12		
		VMP-49-30-050321	5/3/2021	6.2			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			15		
VMP-50	5 ft	VMP-50-5-072720	7/27/2020	2.5			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			18		
		VMP-50-5-110520	11/5/2020	2.4			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		80			18		
		VMP-50-5-012621	1/26/2021	0.18			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			21		
		VMP-50-5-050721	5/7/2021	0.46			<0.021	U		<0.0021	U		<0.0021	U		0.011	J		<0.00021	U		80			19		
	10 ft	VMP-50-10-072720	7/27/2020	2.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		80			18		
		VMP-50-10-110520	11/5/2020	2.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			17		
		VMP-50-10-012621	1/26/2021	0.54			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		78			21		
		VMP-50-10-050721	5/7/2021	0.66			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			19		
	20 ft	VMP-50-20-072720	7/27/2020	2.3			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		81			17		
		VMP-50-20-110520	11/5/2020	3.5			<0.025	U		<0.0025	U		<0.0025	U		0.04	J		<0.00025	U		78			18		
		VMP-50-20-110520-DUP	11/5/2020	3.4			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			18		
		VMP-50-20-022521	2/25/2021	0.76			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			21		
		VMP-50-20-022521-DUP	2/25/2021	0.75			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		79			20		
		VMP-50-20-050721	5/7/2021	0.76			<0.02	U		<0.002	U		<0.002	U		0.0045	J		<0.0002	U		80			19		
		VMP-50-20-050721-DUP	5/7/2021	0.77			<0.02	U		<0.002	U		<0.002	U		0.0067	J		<0.0002	U		80			19		
	30 ft	VMP-50-30-072720	7/27/2020	1.9			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.017			80			18		
		VMP-50-30-110520	11/5/2020	4.4			<0.025	U		<0.0025	U		<0.0025	U		0.011	J		0.0022			82			14		
		VMP-50-30-012621	1/26/2021	1.5			<0.025	U		<0.0025	U		<0.0025	U		0.98			0.00042			78			20		
		VMP-50-30-050721	5/7/2021	1.1			<0.02	U		<0.002	U		<0.002	U		<0.1	U		0.00013	J		80			19		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-51	5 ft	VMP-51-5-072320	7/23/2020	1.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.0001	J		80			19		
		VMP-51-5-103020	10/30/2020	3.1			<0.026	U		<0.0026	U		<0.0026	U		0.16			<0.00026	U		78			19		
		VMP-51-5-012221	1/22/2021	0.38			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.0001	J		79			21		
		VMP-51-5-050421	5/4/2021	0.38			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		81			19		
	10 ft	VMP-51-10-072320	7/23/2020	2.2			<0.023	U		<0.0023	U		<0.0023	U		0.14			<0.00023	U		80			18		
		VMP-51-10-103020	10/30/2020	3.6			<0.026	U		<0.0026	U		<0.0026	U		0.016	J		<0.00026	U		78			18		
		VMP-51-10-012221	1/22/2021	0.57			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			21		
		VMP-51-10-050421	5/4/2021	0.84			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			19		
	20 ft	VMP-51-20-072320	7/23/2020	2			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			19		
		VMP-51-20-103020	10/30/2020	3			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			18		
		VMP-51-20-012221	1/22/2021	1.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			20		
		VMP-51-20-050421	5/4/2021	0.94			<0.021	U		<0.0021	U		<0.0021	U		0.0076	J		<0.00021	U		80			19		
	30 ft	VMP-51-30-072320	7/23/2020	2			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			19		
		VMP-51-30-103020	10/30/2020	2.9			<0.027	U		<0.0027	U		<0.0027	U		0.13	J		<0.00027	U		79			18		
		VMP-51-30-012221	1/22/2021	2.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		77			20		
		VMP-51-30-050421	5/4/2021	1.5			<0.022	U		<0.0022	U		<0.0022	U		0.03	J		<0.00022	U		80			19		
VMP-52	5 ft	VMP-52-5-072320	7/23/2020	3			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		0.00012	J		82			15		
		VMP-52-5-072320-DUP	7/23/2020	3.1			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.0001	J		82			15		
		VMP-52-5-102920	10/29/2020	1.2			<0.026	U		<0.0026	U		<0.0026	U		0.0085	J		<0.00026	U		79			20		
		VMP-52-5-012221	1/22/2021	0.6		J	<0.025	U		<0.0025	U		<0.0025	U		0.094	J	J	0.00016	J		78			21		
		VMP-52-5-012221-DUP	1/22/2021	0.37		J	<0.023	U		<0.0023	U		<0.0023	U		5.1		J	0.00016	J		74			20		
		VMP-52-5-050421	5/4/2021	1.7			<0.02	U		<0.002	U		<0.002	U		0.0049	J		<0.0002	U		80			18		
	10 ft	VMP-52-10-102920	10/29/2020	2.8			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		81			16		
		VMP-52-10-012221	1/22/2021	3.7			<0.024	U		<0.0024	U		<0.0024	U		0.029	J		<0.00024	U		77			19		
		VMP-52-10-050421	5/4/2021	1.8			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		81			17		
	20 ft	VMP-52-20-072320	7/23/2020	2.1			<0.027	U		<0.0027	U		<0.0027	U		<0.14	U		<0.00027	U		79			19		
		VMP-52-20-102920	10/29/2020	2.8			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00015	J		79			18		
		VMP-52-20-012221	1/22/2021	3.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00012	J		78			18		
		VMP-52-20-050421	5/4/2021	3.2			<0.021	U		<0.0021	U		<0.0021	U		0.015	J		0.000089	J		80			17		
	30 ft	VMP-52-30-072320	7/23/2020	2			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		79			19		
		VMP-52-30-102920	10/29/2020	2.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		0.00017	J		79			18		
		VMP-52-30-012221	1/22/2021	3.4			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			18		
		VMP-52-30-050421	5/4/2021	3.1			<0.02	U		<0.002	U		<0.002	U		0.02	J		0.000095	J		80			17		
VMP-53	5 ft	VMP-53-5-072220	7/22/2020	2.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			18		
		VMP-53-5-102820	10/28/2020	0.9			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			21		
		VMP-53-5-012121	1/21/2021	0.2			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-53-5-050421	5/4/2021	0.73			<0.02	U		<0.002	U		<0.002	U		0.0096	J		<0.0002	U		80			19		
	10 ft	VMP-53-10-072220	7/22/2020	2.1			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		80			18		
		VMP-53-10-102820	10/28/2020	0.78			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		78			21		
		VMP-53-10-012121	1/21/2021	0.27			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			21		
		VMP-53-10-050421	5/4/2021	0.48			<0.019	U		<0.0019	U		<0.0019	U		<0.095	U		<0.00019	U		80			20		
		VMP-53-10-050421-DUP	5/4/2021	0.48			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		80			20		
		VMP-53-10-060321-R	6/3/2021	0.86			<0.022	U		<0.0022	U		<0.0022	U		0.01	J		<0.00022	U		79			20		
	20 ft	VMP-53-20-072220	7/22/2020	1.9			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			18		
		VMP-53-20-102820	10/28/2020	1.3			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			20		
		VMP-53-20-012121	1/21/2021	0.64			<0.025	U		<0.0025	U		<0.0025	U		0.021	J		<0.00025	U		79			20		
		VMP-53-20-050421	5/4/2021	0.53			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			19		
	30 ft	VMP-53-30-072220	7/22/2020	2.1			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-53-30-102820	10/28/2020	2.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			19		
		VMP-53-30-012121	1/21/2021	1.9			<0.024	U		<0.0024	U		<0.0024	U		0.025	J		<0.00024	U		79			19		
		VMP-53-30-050421	5/4/2021	1.9			<0.02	U		<0.002	U		<0.002	U		0.011	J		0.0003			80			18		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-54	5 ft	VMP-54-5-072220	7/22/2020	3.9			<0.026	U		<0.0026	U		<0.0026	U		0.028	J		<0.00026	U		80			16		
		VMP-54-5-102820	10/28/2020	3.6			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			17		
		VMP-54-5-012821	1/28/2021	1.9			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		79			19		
		VMP-54-5-050421	5/4/2021	2.8			<0.019	U		<0.0019	U		<0.0019	U		0.01	J		<0.00019	U		80			17		
	10 ft	VMP-54-10-072220	7/22/2020	3.1			<0.027	U		<0.0027	U		<0.0027	U		0.0072	J		<0.00027	U		80			17		
		VMP-54-10-102820	10/28/2020	3.9			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		79			17		
		VMP-54-10-012821	1/28/2021	2.5			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		80			18		
		VMP-54-10-012821-DUP	1/28/2021	2.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-54-10-050421	5/4/2021	2.2			<0.019	U		<0.0019	U		<0.0019	U		0.015	J		<0.00019	U		80			18		
	20 ft	VMP-54-20-072220	7/22/2020	2.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		80			17		
		VMP-54-20-102820	10/28/2020	3.9			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			17		
		VMP-54-20-012821	1/28/2021	3.4			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			17		
		VMP-54-20-050421	5/4/2021	2.3			<0.02	U		<0.002	U		<0.002	U		0.029	J		<0.0002	U		81			17		
	30 ft	VMP-54-30-072220	7/22/2020	2.1			<0.026	U		<0.0026	U		<0.0026	U		0.09	J		<0.00026	U		82			16		
		VMP-54-30-102820	10/28/2020	1.1			<0.024	U		<0.0024	U		<0.0024	U		0.1	J		<0.00024	U		81			18		
		VMP-54-30-012821	1/28/2021	0.32			<0.024	U		<0.0024	U		<0.0024	U		1.1			0.00011	J		78			20		
		VMP-54-30-050421	5/4/2021	1.7			<0.019	U		<0.0019	U		<0.0019	U		1.6			0.000083	J		79			18		
		VMP-54-30-050421-DUP	5/4/2021	1.7			<0.019	U		<0.0019	U		<0.0019	U		1.6			0.000088	J		79			18		
VMP-55	20 ft	VMP-55-20-072820	7/28/2020	21			<0.029	U		<0.0029	U		<0.0029	U		<0.14	U		0.0016			76			2.7		
		VMP-55-20-110320	11/3/2020	22			<0.026	U		0.00073	J		<0.0026	U		0.032	J		3.5			73			1.5		
		VMP-55-20-012821	1/28/2021	15			<0.023	U		0.00026	J		<0.0023	U		0.069	J		1.4			77			6.9		
		VMP-55-20-051121	5/11/2021	16			<0.02	U		0.003			<0.002	U		0.026	J		7.3			75			1.6		
VMP-56	10 ft	VMP-56-10-072320	7/23/2020	0.88			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00011	J		79			20		
		VMP-56-10-072320-DUP	7/23/2020	0.93			<0.028	U		<0.0028	U		<0.0028	U		<0.14	U		0.00011	J		80			19		
		VMP-56-10-110320	11/3/2020	1.4			<0.025	U		<0.0025	U		<0.0025	U		0.0085	J		0.00024	J		81			18		
		VMP-56-10-012121	1/21/2021	0.1			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		79			21		
		VMP-56-10-050521	5/5/2021	0.28			<0.024	U		<0.0024	U		<0.0024	U		0.013	J		0.00013	J		79			21		
	25 ft	VMP-56-25-072320	7/23/2020	0.58			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.000087	J		79			20		
		VMP-56-25-110320	11/3/2020	2.5			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00044			82			15		
		VMP-56-25-110320-DUP	11/3/2020	2.6			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		0.00041			82			15		
		VMP-56-25-012121	1/21/2021	0.11			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		0.00012	J		79			21		
		VMP-56-25-012121-DUP	1/21/2021	0.11			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		0.00013	J		79			21		
		VMP-56-25-050521	5/5/2021	0.27			<0.023	U		<0.0023	U		<0.0023	U		0.0056	J		0.00016	J		79			21		
		VMP-56-25-050521-DUP	5/5/2021	0.27			<0.022	U		<0.0022	U		<0.0022	U		0.0068	J		0.00014	J		79			21		
VMP-62	5 ft	VMP-62-5-072720	7/27/2020	8.1			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		81			11		
		VMP-62-5-102920	10/29/2020	5.2			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		78			17		
		VMP-62-5-012221	1/22/2021	1.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			20		
		VMP-62-5-050621	5/6/2021	2.1			<0.02	U		<0.002	U		<0.002	U		0.16			<0.0002	U		81			17		
	10 ft	VMP-62-10-072720	7/27/2020	5.1			<0.022	U		<0.0022	U		<0.0022	U		<0.11	U		<0.00022	U		80			15		
		VMP-62-10-102920	10/29/2020	5.4			<0.024	U		<0.0024	U		<0.0024	U		0.0074	J		<0.00024	U		79			16		
		VMP-62-10-012221	1/22/2021	1.8			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		78			20		
		VMP-62-10-050621	5/6/2021	1.8			<0.02	U		<0.002	U		<0.002	U		0.015	J		<0.0002	U		80			18		
	20 ft	VMP-62-20-072720	7/27/2020	2.3			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		80			18		
		VMP-62-20-102920	10/29/2020	3.4			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		80			17		
		VMP-62-20-050621	5/6/2021	1.7			<0.02	U		<0.002	U		<0.002	U		<0.1	U		<0.0002	U		80			18		
	30 ft	VMP-62-30-072720	7/27/2020	1.8			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-62-30-102920	10/29/2020	2.3			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			18		
		VMP-62-30-012221	1/22/2021	1.6			<0.021	U		<0.0021	U		<0.0021	U		3.6			<0.00021	U		76			19		
		VMP-62-30-050621	5/6/2021	1.2			<0.02	U		<0.002	U		<0.002	U		<0.099	U		<0.0002	U		80			19		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 7
HISTORICAL SUMMARY OF SOIL VAPOR ANALYTICAL RESULTS - NATURAL GASES

Location	Depth	Sample ID	Sample Date	Carbon Dioxide			Carbon Monoxide			Ethane			Ethene			Helium			Methane			Nitrogen			Oxygen		
				Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
VMP-63	5 ft	VMP-63-5-072820	7/28/2020	1.1			<0.025	U		<0.0025	U		<0.0025	U		<0.12	U		<0.00025	U		81			18		
		VMP-63-5-110320	11/3/2020	2.5			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		80			17		
		VMP-63-5-012921	1/29/2021	0.18			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			21		
		VMP-63-5-050521	5/5/2021	0.6			<0.022	U		<0.0022	U		<0.0022	U		0.0098	J		0.000087	J		79			20		
	10 ft	VMP-63-10-072820	7/28/2020	1			<0.027	U		<0.0027	U		<0.0027	U		<0.13	U		<0.00027	U		80			19		
		VMP-63-10-110320	11/3/2020	3.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		80			17		
		VMP-63-10-012921	1/29/2021	0.22			<0.026	U		<0.0026	U		<0.0026	U		0.017	J		0.00022	J		79			21		
		VMP-63-10-050521	5/5/2021	0.57			<0.021	U		<0.0021	U		<0.0021	U		<0.1	U		<0.00021	U		79			20		
	20 ft	VMP-63-20-072820	7/28/2020	0.95			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		79			20		
		VMP-63-20-110320	11/3/2020	1.3			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		81			18		
		VMP-63-20-012921	1/29/2021	0.67			<0.026	U		<0.0026	U		<0.0026	U		<0.13	U		<0.00026	U		78			21		
		VMP-63-20-050521	5/5/2021	0.57			<0.023	U		<0.0023	U		<0.0023	U		0.0053	J		<0.00023	U		79			20		
	30 ft	VMP-63-30-072820	7/28/2020	1.1			<0.024	U		<0.0024	U		<0.0024	U		0.0083	J		<0.00024	U		79			20		
		VMP-63-30-072820-DUP	7/28/2020	1.1			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			20		
		VMP-63-30-110320	11/3/2020	1.2			<0.024	U		<0.0024	U		<0.0024	U		2.6			<0.00024	U		81			18		
		VMP-63-30-110320-DUP	11/3/2020	1.3			<0.024	U		<0.0024	U		<0.0024	U		0.069	J		<0.00024	U		81			18		
		VMP-63-30-012921	1/29/2021	1.4			<0.025	U		<0.0025	U		<0.0025	U		0.018	J		<0.00025	U		78			21		
		VMP-63-30-050521	5/5/2021	0.87			<0.022	U		<0.0022	U		<0.0022	U		0.025	J		<0.00022	U		79			20		
VMP-64	5 ft	VMP-64-5-072420	7/24/2020	0.78			<0.024	U		<0.0024	U		<0.0024	U		<0.12	U		<0.00024	U		84			15		
		VMP-64-5-103020	10/30/2020	1.3			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		79			20		
		VMP-64-5-012221	1/22/2021	0.34			<0.025	U		<0.0025	U		<0.0025	U		0.066	J		0.000093	J		79			21		
		VMP-64-5-050621	5/6/2021	0.24			<0.022	U		<0.0022	U		<0.0022	U		2.2			<0.00022	U		80			20		
	10 ft	VMP-64-10-072420	7/24/2020	2.7			<0.025	U		<0.0025	U		<0.0025	U		0.11	J		<0.00025	U		81			16		
		VMP-64-10-103020	10/30/2020	4.4			<0.025	U		<0.0025	U		<0.0025	U		<0.13	U		<0.00025	U		80			16		
		VMP-64-10-012221	1/22/2021	2.4			<0.023	U		<0.0023	U		<0.0023	U		<0.11	U		<0.00023	U		78			20		
		VMP-64-10-050621	5/6/2021	1.8			<0.022	U		<0.0022	U		<0.0022	U		0.24			<0.00022	U		80			18		
	20 ft	VMP-64-20-072420	7/24/2020	1.8			<0.025	U		<0.0025	U		<0.0025	U		0.014	J		<0.00025	U		80			18		
		VMP-64-20-072420-DUP	7/24/2020	1.8			<0.025	U		<0.0025	U		<0.0025	U		0.01	J		<0.00025	U		80			18		
		VMP-64-20-103020	10/30/2020	3.1			<0.023	U		<0.0023	U		<0.0023	U		0.0077	J		<0.00023	U		79			18		
		VMP-64-20-012221	1/22/2021	3.6			<0.024	U		<0.0024	U		<0.0024	U		0.022	J		<0.00024	U		78			18		
		VMP-64-20-050621	5/6/2021	2.3			<0.023	U		<0.0023	U		<0.0023	U		<0.12	U		<0.00023	U		80			18		

Notes:

Lab Qualifiers

J = Estimated value; results between the MDL and RL

U = Compound analyzed for but not detected above the RL

AECOM Qualifiers

J = Estimated detection

U = Non-detect due to blank contamination

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-03R	400.71 - 410.71 (31 - 41)	7/9/2020	1200	-14.80	32.55	0.0	0	1.8	18.7	0.4	3.6	1.9	1.7	
SVE-03R		7/23/2020	1000	-15.00	33.75	8.0	OVR	1.7	16.3	227	14300	12118	2182	
SVE-03R		7/24/2020	0920	-11.00	32.70	16.6	OVR	2.5	14.4	366	18700	16941	1759	
SVE-03R		7/29/2020	0925	-14.17	32.74	24.4	OVR	5.2	10.3	419	39510	31610	7900	
SVE-03R		7/30/2020	0850	-13.82	32.68	33.8	OVR	5.7	9.6	508	49940	38310	11630	
SVE-03R		7/31/2020	0827	-15.15	32.67	27.9	OVR	6.5	8.8	382	48150	36890	11260	
SVE-03R		8/6/2020	1254	-14.75	32.54	31.4	OVR	8.2	7.3	567	50470	40040	10430	
SVE-03R		8/12/2020	1457	-15.20	32.39	26.5	OVR	7.4	8.6	486	40950	32370	8580	
SVE-03R		8/19/2020	1143	-16.09	23.24	30.5	OVR	7.8	8.3	441	39340	28350	10990	
SVE-03R		8/20/2020	1431	-15.34	32.12	30.5	OVR	7.7	8.3	438	36970	25720	11250	
SVE-03R		8/25/2020	1254	-18.57	31.86	25.3	OVR	7.5	9.0	547	34480	27300	7180	
SVE-03R		9/2/2020	1235	-20.49	31.63	19.3	OVR	7.2	9.6	418	32160	25180	6980	
SVE-03R		9/9/2020	1128	-20.99	31.73	15.8	OVR	6.9	10.2	378	28480	22900	5580	
SVE-03R		9/17/2020	1350	-20.74	31.98	13.7	OVR	6.7	10.6	353	28410	21590	6820	
SVE-03R		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-03R		11/23/2020	1345	-16.68	33.03	0.0	0	0.5	20.5	0.0	0.0	0.0	0.0	
SVE-03R		12/17/2020	1238	-14.84	33.31	0.0	0	0.3	20.6	0.0	0.0	0.0	0.0	
SVE-03R		1/22/2021	0831	-12.10	34.41	0.0	0	0.4	20.4	0.2	1.8	0.0	1.8	
SVE-03R		2/23/2021	1457	-12.98	35.11	0.0	0	0.3	20.7	1.1	17.8	10.3	7.5	
SVE-03R		3/18/2021	1248	-15.00	34.89	0.0	0	0.3	20.5	0.1	5.9	2.3	3.6	
SVE-03R		4/29/2021	1216	-15.14	34.19	0.0	0	0.4	20.6	1.5	11.8	0.0	11.8	
SVE-03R		5/19/2021	1340	-13.63	33.88	0.0	0	0.6	19.8	0.0	0.3	0.0	0.3	
SVE-03R		6/15/2021	1420	-1.62	35.25	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04	427.04 - 437.04 (5 - 15)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-04		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05	424.23 - 434.23 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-05		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-06	424.04 - 434.04 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-06		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07	423.71 - 433.71 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-07		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08	424.12 - 434.12 (9 - 19)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-08		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09	422.41 - 432.41 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-09		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-10	422.74 - 432.74 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-10		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11	423.56 - 433.56 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-11		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12	423.78 - 433.78 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-12		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13	423.77 - 433.77 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-13		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-14	423.87 - 433.87 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-14		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15	424.15 - 434.15 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-15		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16	423.97 - 433.97 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-16		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17	424.42 - 434.42 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-17		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-18	426.93 - 436.93 (8 - 18)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-18		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19	423.44 - 433.44 (11 - 21)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-19		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-20	409.67 - 419.67 (25 - 35)	7/13/2020	1249	-70.80	37.86	9.6	OVR	5.9	12.6	410	31610	28350	3260	
SVE-20		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-20		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-20		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-20		9/23/2020	1445	-46.60	37.73	11.8	OVR	9.6	5.0	261	44010	41650	2360	
SVE-20		9/29/2020	1034	-47.20	37.55	19.6	OVR	9.7	6.3	345	54440	48540	5900	
SVE-20		10/2/2020	1046	-47.50	37.55	19.8	OVR	9.8	7.3	423	61550	58950	2600	
SVE-20		10/7/2020	1456	-42.57	34.62	22.9	OVR	9.8	6.9	398	61770	51550	10220	
SVE-20		10/13/2020	1001	-46.29	37.80	27.9	OVR	9.7	7.0	423	71960	58270	13690	
SVE-20		10/20/2020	1045	-58.60	34.52	42.4	OVR	10.1	6.6	391	94380	74360	20020	
SVE-20		10/26/2020	0900	-58.20	34.97	71.5	OVR	10.4	5.9	412	99890	81950	17940	
SVE-20		10/27/2020	1125	-57.70	34.05	76.1	OVR	10.3	5.9	414	111000	89970	21030	
SVE-20		11/3/2020	1224	-56.13	34.05	OVR	OVR	10.7	5.0	489	124000	113000	11000	
SVE-20		11/23/2020	1054	-65.10	33.97	OVR	OVR	10.0	5.9	508	136000	104000	32000	
SVE-20		12/16/2020	1342	-61.60	33.12	OVR	OVR	10.2	5.4	381	131000	106000	25000	
SVE-20		1/19/2021	1159	-36.10	36.69	OVR	OVR	10.6	4.5	588	104000	71760	32240	
SVE-20		2/23/2021	1235	-51.10	35.17	78.4	OVR	9.4	6.7	483	105000	83130	21870	
SVE-20		3/17/2021	1127	-57.60	34.91	OVR	OVR	9.5	6.4	445	118000	109000	9000	
SVE-20		4/28/2021	1218	-58.50	33.98	OVR	OVR	10.4	4.7	516	112000	88840	23160	
SVE-20		5/19/2021	1110	-57.20	35.95	84.5	OVR	9.6	5.7	634	97350	81150	16200	
SVE-20		6/15/2021	1303	-54.90	33.73	83.9	OVR	10.2	5.1	461	115000	79330	35670	

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-21	408.29 - 418.29 (25 - 35)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-21		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-21		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-21		9/23/2020	1258	-15.85	34.53	0.0	0	1.9	18.5	0.8	44.7	44.7	0.0	
SVE-21		9/29/2020	1334	-16.19	34.53	0.0	0	1.4	20.0	4.1	118	58.0	60.0	
SVE-21		10/1/2020	1328	-16.48	34.52	0.0	0	1.5	20.3	11.2	196	79.4	117	
SVE-21		10/7/2020	1425	-16.14	34.76	0.0	0	1.1	20.2	24.8	357	123	234	
SVE-21		10/13/2020	0811	-18.81	34.66	0.2	5	1.0	20.2	24.2	534	261	273	
SVE-21		10/20/2020	1140	-32.13	34.35	0.5	10	1.2	19.9	52.4	1829	1427	402	
SVE-21		10/26/2020	1024	-32.66	34.40	0.7	15	1.1	19.7	77.6	2419	1528	891	
SVE-21		10/27/2020	1220	-32.19	34.40	0.6	12	0.9	20.2	70.9	1912	1255	657	
SVE-21		11/3/2020	1112	-32.04	34.43	0.9	19	1.2	19.5	102	2287	1299	988	
SVE-21		11/23/2020	1414	-32.84	34.43	1.7	34	1.0	19.8	151	2926	1017	1909	
SVE-21		12/17/2020	1350	-31.37	34.44	2.5	50	1.1	19.6	161	3558	1073	2485	
SVE-21		1/22/2021	0841	-22.00	34.45	1.1	22	1.4	19.2	158	2284	713	1571	
SVE-21		2/24/2021	0950	-26.95	34.42	2.3	46	1.1	19.6	257	3269	599	2670	
SVE-21		3/18/2021	1236	-32.60	34.45	1.5	31	1.0	19.6	205	2974	1174	1800	
SVE-21		4/29/2021	1231	-31.82	34.38	1.4	29	1.3	19.3	241	3309	1826	1483	
SVE-21		5/19/2021	1432	-31.24	34.39	1.2	24	1.3	19.0	183	2330	1258	1072	
SVE-21		6/16/2021	1401	-29.47	34.43	0.9	19	1.5	18.6	134	2682	1516	1166	
SVE-22	404.37 - 414.37 (25 - 35)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		9/23/2020	1317	-11.67	31.04	0.0	0	1.5	19.9	0.1	2.4	2.4	0.0	
SVE-22		9/29/2020	1400	-12.11	31.10	0.0	0	0.7	20.8	0.1	2.3	2.1	0.2	
SVE-22		9/30/2020	1225	-14.74	30.82	0.0	0	0.7	20.6	0.3	2.5	2.3	0.2	
SVE-22		10/7/2020	1406	-12.03	31.22	0.0	0	0.4	20.4	0.2	1.2	1.2	0.0	
SVE-22		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-22		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23	405.75 - 415.75 (15 - 25)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		9/23/2020	1315	-11.35	22.79	0.0	0	1.8	19.5	0.0	0.0	0.0	0.0	
SVE-23		9/29/2020	1348	-11.68	22.86	0.0	0	1.1	20.6	0.6	1.8	0.0	1.8	
SVE-23		9/30/2020	1338	-15.42	22.53	0.0	0	0.9	20.2	1.8	66.7	53.7	13.0	
SVE-23		10/7/2020	1414	-11.54	22.96	0.0	0	0.7	20.5	2.3	65.8	43.7	22.1	
SVE-23		10/13/2020	0909	-16.29	22.80	0.0	0	0.7	20.5	1.5	7.1	1.3	5.8	
SVE-23		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-23		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-24	409.22 - 419.22 (15 - 25)	7/9/2020	1148	-74.00	17.31	0.1	2	2.9	17.1	22.4	374	264	110	
SVE-24		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-24		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-24		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-24		9/23/2020	1418	-13.97	24.57	0.4	8	5.5	14.6	27.7	2110	2091	19.0	
SVE-24		9/29/2020	1408	-14.51	23.88	0.2	5	3.6	17.3	26.9	1820	1395	425	
SVE-24		9/30/2020	1025	-14.50	23.84	0.2	5	3.7	17.3	28.7	1820	1571	249	
SVE-24		10/7/2020	1320	-14.37	23.32	0.1	3	3.1	18.1	20.6	957	749	208	
SVE-24		10/13/2020	0828	-18.71	21.71	0.2	4	2.8	18.2	19.0	1061	877	184	
SVE-24		10/20/2020	1112	-42.50	18.43	0.1	2	2.9	18.1	17.7	378	308	70.0	
SVE-24		10/26/2020	1000	-43.70	19.58	0.1	3	3.1	17.4	19.2	563	467	96.0	
SVE-24		10/27/2020	1320	-42.20	19.11	0.1	3	3.1	17.5	20.7	666	536	130	
SVE-24		11/3/2020	1126	-42.72	19.32	0.2	5	3.4	17.0	35.3	892	744	148	
SVE-24		11/23/2020	1453	-43.70	19.17	0.3	6	3.1	17.3	30.8	1353	1186	167	
SVE-24		12/17/2020	1326	-42.33	19.18	0.4	9	2.9	17.4	41.6	2268	2001	267	
SVE-24		1/22/2021	0858	-28.80	19.33	0.5	11	3.0	17.3	79.1	3297	2885	412	
SVE-24		2/24/2021	1005	-35.66	19.25	0.6	12	3.0	17.3	62.7	3192	2762	430	
SVE-24		3/18/2021	1039	-43.00	19.15	1.0	20	3.1	16.8	59.9	6277	5948	329	
SVE-24		4/29/2021	1245	-44.10	16.85	1.1	22	3.2	16.8	89.6	6601	6266	335	
SVE-24		5/19/2021	1456	-40.00	21.72	0.4	8	2.7	17.4	47.8	2008	1817	191	
SVE-24		6/16/2021	1328	-43.30	19.75	0.4	8	2.7	17.2	52.8	2019	1668	351	
SVE-25	422 - 432 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-25		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26	405.6 - 415.6 (20 - 30)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		9/23/2020	1354	-13.94	27.89	0.0	0	1.7	17.3	0.1	2.7	2.7	0.0	
SVE-26		9/29/2020	1421	-14.36	27.94	0.0	0	1.8	20.0	0.1	0.5	0.5	0.0	
SVE-26		9/30/2020	1255	-17.05	27.85	0.0	0	1.5	17.3	3.4	21.2	4.3	16.9	
SVE-26		10/7/2020	1352	-14.25	28.07	0.0	0	1.2	20.1	0.0	0.0	0.0	0.0	
SVE-26		10/13/2020	0840	-18.59	27.90	0.0	0	1.0	20.3	0.1	1.4	1.1	0.3	
SVE-26		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-26		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-27	405.93 - 415.93 (20 - 30)	7/9/2020	1221	-68.00	25.17	12.6	OVR	2.6	17.0	602	11000	2895	8105	
SVE-27		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-27		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-27		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-27		9/23/2020	1407	-22.91	26.03	77.5	OVR	5.5	11.3	670	55750	32020	23730	
SVE-27		9/29/2020	1430	-23.59	25.70	OVR	OVR	5.2	12.9	1270	57120	18260	38860	
SVE-27		9/30/2020	1157	-25.46	25.60	OVR	OVR	5.1	13.5	1380	58880	17710	41170	
SVE-27		10/7/2020	1340	-23.30	25.34	OVR	OVR	4.9	13.9	1342	58330	14390	43940	
SVE-27		10/13/2020	0852	-27.03	24.71	OVR	OVR	5.2	13.4	1632	70430	13780	56650	
SVE-27		10/20/2020	1125	-45.78	29.94	OVR	OVR	3.2	17.3	1421	54200	3445	50755	
SVE-27		10/26/2020	0935	-46.31	27.06	OVR	OVR	5.2	13.8	1465	62240	7820	54420	
SVE-27		10/27/2020	1345	-44.57	25.84	OVR	OVR	5.2	13.7	1468	64910	8440	56470	
SVE-27		11/3/2020	1139	-44.49	30.52	OVR	OVR	4.9	14.0	1476	65310	7690	57620	
SVE-27		11/23/2020	1441	-46.90	26.82	OVR	OVR	5.0	13.9	1392	77920	7870	70050	
SVE-27		12/17/2020	1338	-44.80	30.11	OVR	OVR	4.9	13.8	1486	76240	9570	66670	
SVE-27		1/22/2021	0913	-30.70	26.93	OVR	OVR	6.3	11.9	1564	84120	16170	67950	
SVE-27		2/24/2021	1430	-38.08	NE	OVR	OVR	5.6	12.4	1703	67910	16940	50970	
SVE-27		3/18/2021	1051	-45.80	29.19	OVR	OVR	5.6	12.5	1602	48970	11560	37410	
SVE-27		4/29/2021	1301	-47.20	25.83	OVR	OVR	6.4	10.9	1667	50390	13470	36920	
SVE-27		5/19/2021	1445	-42.74	NE	OVR	OVR	6.1	11.4	1784	35500	12540	22960	
SVE-27		6/16/2021	1348	-43.30	28.01	OVR	OVR	7.0	10.0	1709	58870	20350	38520	
SVE-28	392.94 - 402.94 (41 - 51)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		11/24/2020	NM	NM	39.18	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		12/17/2020	NM	NM	39.45	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		1/19/2021	NM	NM	39.90	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		2/23/2021	NM	NM	40.54	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		3/18/2021	NM	NM	40.78	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		4/28/2021	NM	NM	40.39	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		5/19/2021	NM	NM	40.25	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-28		6/16/2021	NM	NM	40.07	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29	412.93 - 422.93 (21 - 31)	7/16/2020	1413	-37.60	27.86	0.0	0	1.6	19.0	4.5	106	75.6	30.4	
SVE-29		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		2/23/2021	1327	-27.06	33.57	0.0	0	2.5	19.0	0.5	22.8	14.4	8.4	
SVE-29		3/17/2021	1216	-35.91	33.33	0.0	0	2.1	19.4	0.4	14.6	5.9	8.7	
SVE-29		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-29		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-30		7/13/2020	1330	-44.90	32.81	1.2	25	4.9	14.3	230	2183	844	1339	
SVE-30		7/16/2020	1422	-37.60	34.86	1.2	24	4.6	14.6	213	1672	671	1001	
SVE-30		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-30		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-30		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-30		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-30	407.67 - 417.67	11/23/2020	1153	-47.42	34.51	5.3	OVR	7.5	11.1	415	10540	6450	4090	
SVE-30	(25 - 35)	12/16/2020	1448	-50.10	32.44	4.1	82	6.7	12.0	337	7200	3555	3645	
SVE-30		1/19/2021	1237	-22.53	37.51	1.3	26	7.2	11.8	202	1598	712	886	
SVE-30		2/23/2021	1317	-27.17	NE	6.8	OVR	9.2	7.8	573	9420	4290	5130	
SVE-30		3/17/2021	1207	-35.98	34.61	11.0	OVR	8.7	9.1	512	16160	9890	6270	
SVE-30		4/28/2021	1320	-40.50	34.23	1.8	36	5.3	14.3	306	2113	984	1129	
SVE-30		5/19/2021	1211	-45.20	33.44	1.6	32	5.2	13.4	358	2250	678	1572	
SVE-30		6/16/2021	1155	-37.52	34.47	0.7	15	4.5	14.4	136	1213	291	922	
SVE-31		7/13/2020	1400	-44.80	35.11	13.0	OVR	3.3	16.4	854	11600	5766	5834	
SVE-31		7/17/2020	1150	-38.70	34.33	9.9	OVR	3.1	16.6	728	10300	4877	5423	
SVE-31		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-31		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-31		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-31		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-31	407.81 - 417.81	11/23/2020	1136	-44.83	32.08	38.2	OVR	4.6	14.5	1245	30990	16330	14660	
SVE-31	(25 - 35)	12/16/2020	1441	-51.30	34.92	62.1	OVR	5.1	13.1	1218	42470	23090	19380	
SVE-31		1/19/2021	1237	-22.59	36.10	28.2	OVR	5.0	13.7	1082	11600	7387	4213	
SVE-31		2/23/2021	1310	-27.29	34.44	35.4	OVR	4.0	15.0	1190	17250	9560	7690	
SVE-31		3/17/2021	1156	-36.09	35.56	63.5	OVR	4.3	13.6	1385	40260	20250	20010	
SVE-31		4/28/2021	1301	-41.40	31.41	33.8	OVR	4.7	13.7	1172	20440	8920	11520	
SVE-31		5/19/2021	1159	-46.10	31.57	22.1	OVR	4.5	13.6	1602	11300	3034	8266	
SVE-31		6/16/2021	1142	-40.20	34.13	3.7	74	2.7	17.0	424	5783	2178	3605	
SVE-32		7/14/2020	1452	-47.70	34.61	69.2	OVR	6.2	10.7	742	73750	56520	17230	
SVE-32		7/17/2020	1203	-39.40	35.99	52.5	OVR	5.6	11.9	602	61130	41160	19970	
SVE-32		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-32		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-32		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-32		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-32	408.63 - 418.63	11/23/2020	1121	-48.20	37.76	OVR	OVR	7.2	10.3	528	114000	89440	24560	
SVE-32	(25 - 35)	12/16/2020	1424	-52.60	34.92	63.7	OVR	7.1	9.8	393	93920	67170	26750	
SVE-32		1/19/2021	1224	-22.40	37.48	80.7	OVR	7.6	8.8	648	81650	54980	26670	
SVE-32		2/23/2021	1303	-27.42	37.06	OVR	OVR	7.2	9.6	623	110000	77490	32510	
SVE-32		3/17/2021	1148	-36.02	36.49	82.5	OVR	6.4	11.0	589	97190	61070	36120	
SVE-32		4/28/2021	1250	-41.40	36.67	82.9	OVR	6.7	10.2	682	74760	50270	24490	
SVE-32		5/19/2021	1148	-46.30	35.58	77.0	OVR	6.5	10.5	863	47410	33620	13790	
SVE-32		6/15/2021	1336	-42.80	34.47	53.8	OVR	5.6	11.8	628	61210	40190	21020	
SVE-33		7/13/2020	1341	-61.30	34.86	1.8	38	5.2	13.8	151	5641	5462	179	
SVE-33		7/17/2020	1214	-41.20	37.03	2.3	46	5.0	13.7	172	6513	5975	538	
SVE-33		7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-33		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-33		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-33		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-33	408.46 - 418.46	11/23/2020	1112	-50.20	36.88	1.7	34	5.9	12.5	128	8590	7170	1420	
SVE-33	(25 - 35)	12/16/2020	1424	-52.60	33.65	0.1	2	4.7	14.6	10.7	111	51.1	59.9	
SVE-33		1/19/2021	1212	-23.92	37.49	0.7	14	5.3	13.3	54.7	2237	2109	128	
SVE-33		2/23/2021	1249	-29.22	NE	0.7	14	4.6	14.7	52.7	2878	2586	292	
SVE-33		3/17/2021	1139	-37.34	36.82	0.4	9	4.2	15.5	35.1	1617	1501	116	
SVE-33		4/28/2021	1236	-43.30	36.34	1.4	29	4.2	15.1	105	5214	4719	495	
SVE-33		5/19/2021	1140	-47.10	NE	1.8	37	4.1	15.0	106	7308	7195	113	
SVE-33		6/15/2021	1323	-44.00	34.92	3.0	60	4.7	13.9	176	10700	9786	914	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-34	398.76 - 418.76 (25 - 45)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-34		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35	402.84 - 412.84 (31 - 41)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-35		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36	423.65 - 433.65 (10 - 20)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-36		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37	409 - 419 (25 - 35)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-37		5/19/2021	1230	-36.06	35.62	0.0	0	2.9	18.6	0.0	0.0	0.0	0.0	
SVE-37		6/16/2021	1215	-36.97	34.79	0.0	0	1.9	18.9	1.1	6.4	1.0	5.4	

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-38	409 - 419 (25 - 35)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-38		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-38		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-38		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-38		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-38		12/3/2020	1038	-45.50	27.62	0.0	0	2.7	17.3	0.6	9.2	7.1	2.1	DTW: 27.62
SVE-38		12/8/2020	1239	-45.50	NM	0.0	0	2.3	18.5	0.2	3.6	1.5	2.1	
SVE-38		12/16/2020	1406	-45.10	26.97	0.0	0	2.1	18.5	0.6	1.5	0.0	1.5	
SVE-38		1/19/2021	1321	-31.02	28.34	0.0	0	2.4	18.5	0.0	0.0	0.0	0.0	
SVE-38		2/23/2021	1345	-38.28	28.91	0.0	1	2.2	19.0	7.4	182	128	54	
SVE-38		3/17/2021	1234	-41.74	27.07	0.0	0	1.9	19.5	0.3	3.2	0.0	3.2	
SVE-38		4/29/2021	1006	-48.50	26.17	0.0	0	1.9	19.4	5.7	50.6	23.4	27.2	
SVE-38		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-38		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-39	409.5 - 419.5 (25 - 35)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-39		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-39		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-39		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-39		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-39		12/3/2020	1138	-45.60	31.41	12.8	OVR	3.8	13.6	154	25760	18600	7160	DTW: 31.41
SVE-39		12/8/2020	1318	-46.90	NM	2.9	58	3.9	15.6	112	8663	6786	1877	
SVE-39		12/17/2020	1132	-48.60	30.22	1.4	28	3.4	16.7	88.9	4556	3677	879	
SVE-39		1/20/2021	1339	-30.18	32.26	2.0	40	3.4	16.6	98.7	6201	4899	1302	
SVE-39		2/24/2021	0935	-36.81	29.93	1.4	29	3.2	16.8	97.2	4215	3179	1036	
SVE-39		3/18/2021	1216	-46.10	30.78	1.5	30	2.9	17.2	211	3273	1809	1464	
SVE-39		4/30/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Vehicle parked on well vault. Could not access.
SVE-39		5/19/2021	1414	-35.06	30.52	0.8	16	2.8	17.0	89.7	1530	876	654	
SVE-39		6/16/2021	1306	-36.26	30.81	1.0	20	2.8	16.9	93.8	3095	1784	1311	
SVE-40	409 - 419 (25 - 35)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-40		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41	413 - 423 (20 - 30)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-41		6/16/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-42	407.08 - 417.08 (25 - 35)	7/9/2020	1312	-61.30	25.45	0.0	0	1.8	18.9	1.6	86.2	62.5	23.7	
SVE-42		7/23/2020	0913	-28.80	30.93	0.3	6	2.3	17.8	18.3	1276	1009	267	
SVE-42		7/24/2020	0857	-28.01	30.85	0.3	7	2.3	17.5	27.3	1191	849	342	
SVE-42		7/29/2020	0839	-27.41	32.29	0.7	14	2.9	16.7	57.3	2059	1524	535	
SVE-42		7/30/2020	0840	-28.28	30.98	1.1	21	3.1	16.5	93.6	2821	2056	765	
SVE-42		7/31/2020	0903	-28.80	30.67	1.0	21	3.1	16.2	107	2694	1843	851	
SVE-42		8/6/2020	1227	-28.90	29.78	0.7	14	3.2	16.7	99.4	1719	1043	676	
SVE-42		8/12/2020	1542	-29.80	29.41	0.5	11	3.2	16.7	66.9	1378	773	605	
SVE-42		8/19/2020	1155	-30.40	28.16	0.4	8	2.9	17.2	45.2	1061	541	520	
SVE-42		8/20/2020	1156	-30.42	27.57	0.4	8	2.9	17.2	43.2	959	529	430	
SVE-42		8/25/2020	1335	-29.77	27.80	0.4	9	3.0	17.4	65.5	1300	590	710	
SVE-42		9/2/2020	1147	-31.72	27.74	0.7	14	2.9	17.3	99.7	1693	876	817	
SVE-42		9/9/2020	1056	-32.35	27.11	0.7	14	2.9	17.2	104	1547	843	704	
SVE-42		9/16/2020	1345	-32.10	28.35	1.1	22	3.0	17.0	115	2485	1489	996	
SVE-42		10/27/2020	NM	NM	34.17	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-42		11/23/2020	1314	-30.30	32.59	0.3	7	2.6	18.3	24.3	1129	743	386	
SVE-42		12/17/2020	1150	-26.65	32.68	0.3	6	1.9	19.3	20.5	887	576	311	
SVE-42		1/20/2021	1246	-17.07	33.08	1.0	20	2.4	18.1	88.6	3523	2565	958	
SVE-42		2/24/2021	0853	-22.20	33.46	2.0	41	3.0	17.4	155	5446	3505	1941	
SVE-42		3/18/2021	1105	-25.50	33.41	0.8	16	2.7	17.9	85.7	2138	1338	800	
SVE-42		4/29/2021	1041	-25.17	33.18	0.4	9	2.4	18.5	38.3	1434	884	550	
SVE-42		5/19/2021	1315	-24.15	30.61	0.5	10	1.9	18.4	73.3	1124	751	373	
SVE-42		6/15/2021	1435	-1.89	33.56	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-43	407.12 - 417.12 (25 - 35)	7/23/2020	0833	-28.70	32.61	0.0	0	1.5	19.3	0.8	5.2	3.1	2.1	
SVE-43		7/24/2020	0910	-27.81	31.75	0.0	0	1.5	19.3	1.3	7.1	2.4	4.7	
SVE-43		7/29/2020	0855	-27.15	31.72	0.6	12	1.7	18.8	105	1386	671	715	
SVE-43		7/30/2020	0905	-28.13	31.55	0.8	15	1.7	18.6	147	1713	817	896	
SVE-43		7/31/2020	0908	-29.68	31.52	0.9	19	2.0	18.7	174	2092	1011	1081	
SVE-43		8/6/2020	1235	-28.63	31.37	1.4	28	2.0	18.4	281	3512	1898	1614	
SVE-43		8/12/2020	1523	-30.00	31.25	2.4	49	2.3	18.0	335	4935	2508	2427	
SVE-43		8/19/2020	1208	-30.32	31.03	2.8	55	2.1	18.3	305	5304	2513	2791	
SVE-43		8/20/2020	1326	-29.81	30.93	3.3	67	2.3	18.0	349	5826	2809	3017	
SVE-43		8/25/2020	1323	-29.78	30.95	2.6	52	2.3	18.3	379	5334	2103	3231	
SVE-43		9/2/2020	1158	-31.72	30.77	3.1	62	2.3	18.2	375	6224	2665	3559	
SVE-43		9/9/2020	1113	-32.08	30.75	3.9	79	2.3	18.3	455	6361	2776	3585	
SVE-43		9/16/2020	1412	-31.00	30.85	3.8	77	2.2	18.2	304	6622	3337	3285	
SVE-43		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-43		11/24/2020	1300	-27.04	32.39	0.0	1	2.4	18.9	3.7	228	189	39.0	
SVE-43		12/17/2020	1203	-25.81	32.45	0.0	0	1.0	20.2	0.3	22.5	14.8	7.7	
SVE-43		1/20/2021	1300	-16.98	33.46	0.0	1	0.9	20.2	1.7	104	70.7	33.3	
SVE-43		2/24/2021	0904	-22.27	33.42	0.0	0	1.0	20.2	0.8	25.5	14.3	11.2	
SVE-43		3/18/2021	1114	-25.90	33.85	0.0	0	0.8	20.2	0.2	7.9	3.7	4.2	
SVE-43		4/29/2021	1054	-24.97	33.57	0.0	0	0.9	20.3	0.0	0.0	0.0	0.0	
SVE-43		5/19/2021	1326	-24.06	32.80	0.0	0	1.1	19.5	6.0	15.5	0.0	15.5	
SVE-43		6/15/2021	1440	-0.97	34.57	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-44	407.46 - 417.46 (25 - 35)	7/23/2020	0757	-29.00	33.16	0.1	2	1.9	18.8	6.0	309	232	77.0	
SVE-44		7/24/2020	0915	-27.35	33.11	0.2	5	1.9	18.8	33.9	786	506	280	
SVE-44		7/29/2020	0909	-26.57	33.16	0.5	11	2.2	18.2	67.4	1667	1178	489	
SVE-44		7/30/2020	0911	-27.74	32.94	0.6	13	2.2	18.4	76.1	2112	1542	570	
SVE-44		7/31/2020	0929	-28.19	32.84	0.6	12	2.3	18.5	72.7	1823	1278	545	
SVE-44		8/6/2020	1245	-28.22	32.75	0.8	17	2.3	18.3	138	2509	1620	889	
SVE-44		8/12/2020	1517	-29.40	32.73	0.7	15	2.4	18.2	84.9	2272	1545	727	
SVE-44		8/19/2020	1221	-29.85	32.40	0.8	17	2.3	18.3	88.9	2401	1593	808	
SVE-44		8/20/2020	1352	-29.65	32.33	0.8	16	2.2	18.4	89.8	2386	1545	841	
SVE-44		8/25/2020	1307	-29.46	32.30	0.8	16	2.2	18.7	115	2285	1479	806	
SVE-44		9/2/2020	1208	-31.22	32.12	0.6	12	2.3	18.5	72.6	2266	1405	861	
SVE-44		9/9/2020	1105	-31.72	32.21	0.6	12	2.2	18.7	81.4	2022	1232	790	
SVE-44		9/17/2020	1415	-30.70	32.49	0.5	11	2.2	18.3	46.7	1805	1302	503	
SVE-44		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-44		11/23/2020	1330	-29.33	33.36	0.0	0	1.5	19.8	0.8	26.2	17.5	8.7	
SVE-44		12/17/2020	1219	-25.81	33.92	0.0	0	1.1	20.0	0.3	12.3	3.4	8.9	
SVE-44		1/20/2021	1312	-16.41	34.44	0.0	0	1.1	19.7	1.2	54.8	34.8	20.0	
SVE-44		2/24/2021	0915	-21.31	24.45	0.0	1	1.2	19.9	0.7	44.1	29.7	14.4	
SVE-44		3/18/2021	1206	-24.70	34.44	0.0	0	0.8	20.3	0.6	38.2	26.9	11.3	
SVE-44		4/29/2021	1116	-24.42	34.43	0.0	0	0.8	20.3	0.7	75.8	52.9	22.9	
SVE-44		5/19/2021	1350	-23.33	34.35	0.0	0	0.8	19.8	1.5	50.8	35.0	15.8	
SVE-44		6/15/2021	1443	-1.28	34.44	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45	400.58 - 405.58 (37 - 42)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		8/18/2020	NM	NM	34.46	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		9/16/2020	NM	NM	35.19	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		10/27/2020	NM	NM	36.24	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		11/23/2020	NM	NM	35.64	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		12/17/2020	NM	NM	35.45	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		1/20/2021	NM	NM	36.68	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		2/24/2021	NM	NM	37.36	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		3/18/2021	NM	NM	37.04	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-45		6/15/2021	1429	-0.76	36.88	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46	417.85 - 427.85 (15 - 25)	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		11/24/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		12/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		1/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		2/23/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		3/18/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		4/28/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		5/19/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-46		6/15/2021	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 8
SVE SYSTEM MONTHLY MONITORING - SVE SAMPLING DATA

Sample ID	Well Screen Interval (elev. ft) (ft bgs)	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure	Water	Fixed Gases				Soil Vapor Concentrations				Comments
				Initial Reading (Inches of H_2O)	Depth to Water (feet btoc)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
SVE-47	419.01 - 429.01 (15 - 25)	7/13/2020	1410	-64.10	19.01	0.0	0	0.6	20.5	0.1	0.6	0.0	0.6	
SVE-47		7/22/2020	1350	-31.10	18.92	0.0	0	0.7	19.6	0.2	0.0	0.0	0.0	
SVE-47		7/24/2020	0930	-31.38	18.65	0.0	0	0.7	20.1	0.4	0.0	0.0	0.0	
SVE-47		7/29/2020	0936	-30.46	18.67	0.0	0	0.8	20.1	0.7	0.9	0.0	0.9	
SVE-47		7/30/2020	0900	-31.85	18.70	0.0	0	1.0	19.9	0.8	0.0	0.0	0.0	
SVE-47		7/31/2020	0917	-32.20	18.44	0.0	0	1.0	19.9	1.3	7.3	5.1	2.2	
SVE-47		8/6/2020	1217	-32.39	18.45	0.0	0	0.9	19.9	1.4	9.9	3.7	6.2	
SVE-47		8/12/2020	1509	-33.90	18.27	0.0	0	0.9	19.8	2.4	19.2	12.4	6.8	
SVE-47		8/19/2020	1222	-33.70	18.08	0.0	0	1.0	19.9	2.3	17.6	9.0	8.6	
SVE-47		8/21/2020	0835	-34.32	17.91	0.0	0	1.0	19.5	1.4	14.1	8.5	5.6	
SVE-47		8/25/2020	1346	-33.09	17.91	0.0	0	1.0	20.0	1.1	9.6	3.0	6.6	
SVE-47		9/2/2020	1224	-35.08	17.64	0.0	0	1.0	19.8	2.4	12.1	4.6	7.5	
SVE-47		9/9/2020	1139	-35.27	17.74	0.0	0	1.0	20.0	1.8	9.6	3.7	5.9	
SVE-47		9/16/2020	1300	-34.56	18.37	0.0	0	1.0	20.0	0.3	2.2	0.6	1.6	
SVE-47		10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.
SVE-47		11/23/2020	1400	-32.81	19.09	0.0	0	0.6	20.4	0.1	0.0	0.0	0.0	
SVE-47		12/17/2020	1256	-29.40	19.72	0.0	0	0.4	20.5	0.0	0.0	0.0	0.0	
SVE-47		1/20/2021	1323	-19.20	20.90	0.0	0	0.4	20.5	0.0	0.0	0.0	0.0	
SVE-47		2/23/2021	1510	-23.65	20.65	0.0	0	0.4	20.5	0.0	0.0	0.0	0.0	
SVE-47		3/18/2021	1154	-28.40	20.50	0.0	0	0.4	20.4	0.0	0.0	0.0	0.0	
SVE-47		4/29/2021	1128	-28.18	19.61	0.0	0	0.5	20.3	0.0	0.0	0.0	0.0	
SVE-47		5/19/2021	1400	-26.94	18.97	0.0	0	0.5	20.2	0.0	0.0	0.0	0.0	
SVE-47		6/15/2021	1442	-0.11	21.25	NM	NM	NM	NM	NM	NM	NM	NM	Well valve closed off from SVE System.

Notes

1) NM = Not Measured; NA = Not Applicable; NE = Not Encountered; PID = Photo Ionization Detector; THC = Total Hydrocarbon Concentration; PHC = Petroleum Hydrocarbon Concentration; OVR = Over-range; ppmv = Parts Per Million By Volume; btoc = Below Top of Casing; bgs = Below Ground Surface.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-1-5	7/21/2020	0808	-0.34	0.00	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-1-5	8/20/2020	0939	0.00	0.00	0.0	0	0.5	19.3	0 0	0 0	0.0	0.0	
VMP-1-5	9/17/2020	1220	-0.27	0.00	0.0	0	1.0	17.8	0 0	0 0	0.0	0.0	
VMP-1-5	10/27/2020	1150	0.05	0.04	0.0	0	1.0	18.0	0 0	0 0	0.0	0.0	
VMP-1-5	11/24/2020	1303	0.18	0.00	0.0	0	0.6	19.0	0 0	0 0	0.0	0.0	
VMP-1-5	12/17/2020	1015	-1.23	-0.72	0.0	0	0.7	20.4	0 0	0 0	0.0	0.0	
VMP-1-5-Dup	12/17/2020	1015	NM	NM	0.0	0	0.6	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-1-5	1/20/2021	0900	-0.68	-0.63	0.0	0	0.2	20.4	0 0	0 0	0.0	0.0	
VMP-1-5	2/24/2021	1015	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water in tedlar. Sample not screened.
VMP-1-5	3/18/2021	1010	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water in tedlar. Sample not screened.
VMP-1-5	4/30/2021	1015	-1.28	-0.77	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-1-5	5/20/2021	0850	-1.47	-0.66	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-1-5	6/17/2021	1000	-1.09	-0.33	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-1-8 5	7/21/2020	0809	-0.97	-0.45	0.0	0	0.5	20.2	0 0	0 0	0.0	0.0	
VMP-1-8 5	8/20/2020	0940	0.00	0.00	0.0	0	0.5	19.3	0 0	0 0	0.0	0.0	
VMP-1-8 5	9/17/2020	1221	0.00	0.00	0.0	0	0.8	18.8	0 0	0 0	0.0	0.0	
VMP-1-8 5	10/27/2020	1151	0.16	0.05	0.0	0	0.7	19.1	0 0	0 0	0.0	0.0	
VMP-1-8 5	11/24/2020	1304	0.60	0.00	0.0	0	0.8	18.7	0.1	0 0	0.0	0.0	
VMP-1-8 5	12/17/2020	1017	-0.82	-0.69	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-1-8 5	1/20/2021	0901	-4.20	-1.32	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-1-8 5	2/24/2021	1017	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water in tedlar. Sample not screened.
VMP-1-8 5	3/18/2021	1011	-1.83	-2.07	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-1-8.5-Dup	3/18/2021	1011	NM	NM	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-1-8 5	4/30/2021	1016	-0.72	-0.57	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	
VMP-1-8 5	5/20/2021	0852	-1.32	-1.15	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-1-8 5	6/17/2021	1001	-0.29	-0.59	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-1-23.5	7/21/2020	0810	-0.09	0.00	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-1-23.5	8/20/2020	0941	0.00	0.00	0.0	0	0.4	19.5	0 0	0 0	0.0	0.0	
VMP-1-23.5	9/17/2020	1222	0.00	0.00	0.0	0	0.5	19.2	0 2	0 0	0.0	0.0	
VMP-1-23.5	10/27/2020	1152	0.06	0.10	0.0	0	0.5	19.6	0 0	0 0	0.0	0.0	
VMP-1-23.5	11/24/2020	1305	0.19	0.00	0.0	0	0.6	19.1	0.1	0 0	0.0	0.0	
VMP-1-23.5	12/17/2020	1019	-0.94	-1.03	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-1-23.5	1/20/2021	0902	-0.55	-0.47	0.0	0	0.1	20.7	0 0	2 3	2.3	0.0	
VMP-1-23.5	2/24/2021	1017	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-1-23.5	3/18/2021	1012	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water in tedlar. Sample not screened.
VMP-1-23.5	4/30/2021	1017	-0.41	-0.39	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-1-23.5	5/20/2021	0854	-1.44	-0.87	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-1-23.5	6/17/2021	1002	-0.66	-0.48	0.0	0	0.3	20.3	0.1	0 2	0.1	0.1	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-1-38.5	7/21/2020	0811	-0.64	0.00	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	
VMP-1-38 5-Dup	7/21/2020	0811	NM	NM	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-1-38.5	8/20/2020	0942	0.00	0.00	0.0	0	0.8	19.1	0 0	0 0	0.0	0.0	
VMP-1-38.5	9/17/2020	1223	0.00	0.00	0.0	0	0.9	18.9	0 0	0 0	0.0	0.0	
VMP-1-38 5-Dup	9/17/2020	1223	NM	NM	0.0	0	0.9	18.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-1-38.5	10/27/2020	1153	0.05	0.10	0.0	0	1.0	18.7	0 0	0 0	0.0	0.0	
VMP-1-38.5	11/24/2020	1306	0.00	0.00	0.0	0	1.2	18.1	0 8	1 6	0.0	1.6	
VMP-1-38.5	12/17/2020	1021	-4.39	-1.14	0.0	0	0.7	20.6	0 0	0 0	0.0	0.0	
VMP-1-38.5	1/20/2021	0903	-0.42	0.00	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-1-38.5	2/24/2021	1018	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water in tedlar. Sample not screened.
VMP-1-38.5	3/18/2021	1013	0.00	-0.45	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-1-38.5	4/30/2021	1018	-0.80	-0.65	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-1-38.5	5/20/2021	0856	-1.41	-1.36	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-1-38.5	6/17/2021	1003	-0.91	-0.83	0.0	0	0.4	20.2	0 0	0 0	0.0	0.0	
VMP-1-38 5-Dup	6/17/2021	1003	NM	NM	0.0	0	0.4	20.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-2-5	7/21/2020	0825	0.00	0.00	0.0	0	6.1	13.7	0 0	0 0	0.0	0.0	
VMP-2-5	8/20/2020	1050	0.00	0.00	0.0	0	8.4	11.0	0 0	0 0	0.0	0.0	
VMP-2-5	9/17/2020	1308	0.00	0.00	0.0	0	9.1	11.7	0 0	0 0	0.0	0.0	
VMP-2-5	10/27/2020	1124	-0.03	0.00	0.0	0	5.9	14.8	0 0	0 0	0.0	0.0	
VMP-2-5	11/24/2020	1254	-0.11	0.00	0.0	0	4.5	16.4	0 0	0 0	0.0	0.0	
VMP-2-5	12/17/2020	1052	-0.03	-0.04	0.0	0	2.5	19.7	0 0	0 0	0.0	0.0	
VMP-2-5	1/20/2021	1000	0.00	0.00	0.0	0	1.6	19.8	0 0	0 0	0.0	0.0	
VMP-2-5	2/24/2021	1100	0.00	0.00	0.0	0	1.0	20.4	0 0	0 0	0.0	0.0	
VMP-2-5	3/18/2021	1035	0.00	0.00	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-2-5	4/30/2021	1030	-0.53	0.00	0.0	0	1.2	19.8	0 0	0 0	0.0	0.0	
VMP-2-5	5/20/2021	0908	0.00	0.00	0.0	0	0.6	20.7	0 0	0 0	0.0	0.0	
VMP-2-5	6/17/2021	1020	-0.10	0.00	0.0	0	0.5	20.3	0 0	0 0	0.0	0.0	
VMP-2-8 5	7/21/2020	0826	0.00	0.00	0.0	0	3.8	16.2	0 0	0 0	0.0	0.0	
VMP-2-8 5	8/20/2020	1051	0.00	0.00	0.0	0	4.5	14.8	0 0	0 0	0.0	0.0	
VMP-2-8 5	9/17/2020	1309	0.00	0.00	0.0	0	5.3	14.4	0 0	0 0	0.0	0.0	
VMP-2-8 5	10/27/2020	1125	0.00	0.04	0.0	0	5.0	15.3	0 0	0 0	0.0	0.0	
VMP-2-8 5	11/24/2020	1255	0.00	0.00	0.0	0	4.4	16.0	0 0	0 0	0.0	0.0	
VMP-2-8 5	12/17/2020	1054	-0.44	-0.05	0.0	0	3.3	18.4	0 0	0 0	0.0	0.0	
VMP-2-8 5	1/20/2021	1001	0.04	0.08	0.0	0	2.7	19.0	0 0	0 0	0.0	0.0	
VMP-2-8 5	2/24/2021	1101	-0.22	-0.11	0.0	0	2.1	19.9	0 0	0 0	0.0	0.0	
VMP-2-8 5	3/18/2021	1036	-0.26	-0.29	0.0	0	1.5	19.9	0 0	0 0	0.0	0.0	
VMP-2-8 5	4/30/2021	1031	-0.10	-0.09	0.0	0	1.6	19.5	0 0	0 0	0.0	0.0	
VMP-2-8 5	5/20/2021	0910	-0.82	-0.82	0.0	0	1.3	20.5	0 0	0 0	0.0	0.0	
VMP-2-8.5-Dup	5/20/2021	0910	NM	NM	0.0	0	1.3	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-2-8 5	6/17/2021	1021	-0.71	-0.62	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-2-22	7/21/2020	0827	-0.14	0.00	0.0	0	3.6	16.7	0 0	3 9	0.0	3.9	Re-sampled to confirm initial sample.
VMP-2-22	7/21/2020	1210	0.00	NM	0.0	0	3.5	16.7	0 0	3 8	0.0	3.8	Re-sample.
VMP-2-22	8/20/2020	1052	0.00	0.00	0.0	0	4.2	16.0	0 0	2.1	2.1	0.0	
VMP-2-22	9/17/2020	1310	0.00	0.00	0.0	0	4.6	15.8	0.1	1 0	0.0	1.0	
VMP-2-22	10/27/2020	1126	0.09	0.12	0.0	0	4.9	15.8	0 0	0 0	0.0	0.0	
VMP-2-22	11/24/2020	1256	0.25	0.00	0.0	0	4.7	16.1	0 0	0 0	0.0	0.0	
VMP-2-22-Dup	11/24/2020	1256	NM	NM	0.0	0	4.5	16.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-2-22	12/17/2020	1056	-0.41	-0.17	0.0	0	3.3	18.2	0 0	0 0	0.0	0.0	
VMP-2-22	1/20/2021	1002	0.03	0.16	0.0	0	3.2	18.4	0 3	1 0	0.0	1.0	
VMP-2-22	2/24/2021	1102	-0.79	-0.81	0.0	0	2.2	19.8	0 0	0 0	0.0	0.0	
VMP-2-22	3/18/2021	1037	-1.16	-1.05	0.0	0	2.2	19.6	0 0	0 0	0.0	0.0	
VMP-2-22	4/30/2021	1032	-0.43	-0.43	0.0	0	1.8	19.3	0 0	0 0	0.0	0.0	
VMP-2-22-Dup	4/30/2021	1032	NM	NM	0.0	0	1.8	19.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-2-22	5/20/2021	0912	-3.48	-3.44	0.0	0	1.8	19.6	0 0	0 0	0.0	0.0	
VMP-2-22	6/17/2021	1022	-2.80	-2.66	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-2-42	7/21/2020	0828	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	8/20/2020	1053	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	9/17/2020	1311	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	10/27/2020	1127	5.08	0.48	OVR	OVR	8.7	1.1	152	500000	500000	0.0	F D flame-out occurred on THC and methane scrubber. 10:1 dilution probe was used.
VMP-2-42	11/24/2020	1257	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	12/17/2020	1058	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	1/20/2021	1003	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	2/24/2021	1103	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	3/18/2021	1038	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	4/30/2021	1033	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	5/20/2021	0912	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-2-42	6/17/2021	1023	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-5	7/21/2020	0945	-0.15	-0.15	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-3-5	7/31/2020	0901	-0.21	NM	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-3-5	8/19/2020	0854	-0.13	-0.11	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-5	9/17/2020	1156	-0.19	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-5	9/29/2020	1138	-0.94	NM	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-3-5	10/6/2020	1243	0.00	NM	0.0	0	1.0	19.8	0 0	2.1	2.1	0.0	
VMP-3-5	10/7/2020	1407	0.00	NM	0.0	0	0.2	19.6	0 0	0 0	0.0	0.0	
VMP-3-5	10/13/2020	1402	-0.12	NM	0.0	0	0.3	19.7	0.1	0 0	0.0	0.0	
VMP-3-5	10/20/2020	1330	0.00	NM	0.0	0	0.3	19.5	0 0	0 0	0.0	0.0	
VMP-3-5	10/27/2020	0920	0.00	0.00	0.0	0	0.2	19.8	0 0	0 0	0.0	0.0	
VMP-3-5	11/24/2020	1045	-0.11	-0.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-5	12/17/2020	1100	-0.25	-0.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-5	1/19/2021	1430	-0.15	-0.04	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-5	2/24/2021	1150	-0.04	-0.09	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-5	3/18/2021	1345	-13 34	-0.53	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-3-5	4/30/2021	1136	-4.82	-2.09	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-3-5	5/20/2021	1024	-0.20	-0.25	0.0	0	0.8	19.9	0 0	0 0	0.0	0.0	
VMP-3-5	6/17/2021	1145	0.00	0.00	0.0	0	1.6	19.6	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-3-10	7/21/2020	0946	-0.87	-0.55	0.0	0	0.5	20.2	0 0	0 0	0.0	0.0	
VMP-3-10	7/31/2020	0903	-1.55	NM	0.0	0	0.7	20.3	0 3	0 0	0.0	0.0	
VMP-3-10	8/19/2020	0855	-0.87	-0.86	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-10	9/17/2020	1157	-1.05	-1.05	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-10	9/29/2020	1136	0.23	NM	0.0	0	0.6	20.0	0 2	0 8	0.8	0.0	
VMP-3-10	10/6/2020	1240	0.00	NM	0.0	0	0.3	19.8	0 0	0 0	0.0	0.0	
VMP-3-10	10/7/2020	1408	0.00	NM	0.0	0	0.8	19.6	0 3	3.1	2.8	0.3	
VMP-3-10	10/13/2020	1406	0.00	NM	0.0	0	0.8	19.6	0.1	1 6	1.6	0.0	
VMP-3-10	10/20/2020	1333	0.12	NM	0.0	0	1.2	19.3	0 0	9.1	9.1	0.0	
VMP-3-10	10/27/2020	0921	-0.78	-0.16	0.0	0	1.2	19.2	0 0	4 2	4.2	0.0	
VMP-3-10	11/24/2020	1046	-0.55	-0.78	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-10	12/17/2020	1101	-1.13	-1.13	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-10	1/19/2021	1431	-0.62	-0.25	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-3-10	2/24/2021	1151	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-3-10	3/18/2021	1121	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-10	4/30/2021	1138	-0.41	-0.61	0.0	0	0.6	19.9	0 0	0 0	0.0	0.0	
VMP-3-10	5/20/2021	1026	-1.53	-1.48	0.0	0	0.8	19.8	0 0	0 0	0.0	0.0	
VMP-3-10	6/17/2021	1146	-0.35	0.00	0.0	0	1.5	19.6	0 0	0 0	0.0	0.0	
VMP-3-22	7/21/2020	0947	-2.31	-2.33	0.0	0	1.4	19.5	0 0	0 0	0.0	0.0	
VMP-3-22	7/31/2020	0905	-2.10	NM	0.0	0	1.9	19.3	0.1	0 0	0.0	0.0	
VMP-3-22	8/19/2020	0856	-2.13	-2.20	0.0	0	1.6	19.4	0 0	0 0	0.0	0.0	
VMP-3-22	9/17/2020	1158	-1.75	-1.77	0.0	0	1.5	19.8	0 0	0 0	0.0	0.0	
VMP-3-22	9/29/2020	1140	0.04	NM	0.0	0	1.6	19.8	0 0	7 2	7.2	0.0	
VMP-3-22	10/6/2020	1236	-0.10	NM	0.0	0	1.7	19.6	0.1	4 6	4.6	0.0	
VMP-3-22	10/7/2020	1409	0.00	NM	0.0	0	1.5	18.9	0 2	11.2	9.8	1.4	
VMP-3-22	10/13/2020	1404	0.13	NM	0.0	0	1.6	18.6	0.1	3.7	3.7	0.0	
VMP-3-22	10/20/2020	1326	0.20	NM	0.0	0	1.9	18.3	0 0	4 8	4.8	0.0	
VMP-3-22	10/27/2020	0922	-0.21	0.06	0.0	0	2.0	18.0	0 0	3 3	3.3	0.0	
VMP-3-22	11/24/2020	1047	-2.27	-2.28	0.0	0	0.9	20.3	0 0	0 0	0.0	0.0	
VMP-3-22	12/17/2020	1102	-2.43	-2.32	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-3-22	1/19/2021	1432	-1.09	-0.42	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-3-22	2/24/2021	1152	-3.37	-2.96	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-3-22	3/18/2021	1347	-4.42	-4.53	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-3-22	4/30/2021	1140	-2.99	-2.92	0.0	0	0.5	20.1	0 0	0 0	0.0	0.0	
VMP-3-22	5/20/2021	1028	-2.54	-2.52	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-3-22	6/17/2021	1147	-0.53	-0.45	0.0	0	0.7	19.4	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-3-31.5	7/21/2020	0948	-8.37	-8.30	0.1	2	6.5	14.0	7 8	352	352	0.0	
VMP-3-31.5	7/31/2020	0907	-8.73	NM	1.4	29	4.3	15.9	113	2583	1494	1089	
VMP-3-31.5	8/19/2020	0857	-6.67	-7.04	3.3	66	33.0	16.4	187	8179	5755	2424	
VMP-3-31.5	9/17/2020	1159	-6.47	-6.42	26 3	OVR	4.1	14.7	485	29770	17840	11930	
VMP-3-31.5	9/29/2020	1142	0.06	NM	6.5	OVR	10.3	2.1	328	12430	8270	4160	
VMP-3-31.5	10/6/2020	1230	0.00	NM	39 5	OVR	8.5	6.1	589	40370	26430	13940	
VMP-3-31.5	10/7/2020	1410	0.73	NM	45 9	OVR	10.2	1.1	537	44260	28660	15600	
VMP-3-31.5	10/13/2020	1406	0.53	NM	44.1	OVR	10.7	0.8	347	57110	39210	17900	
VMP-3-31.5	10/20/2020	1323	0.70	NM	73 2	OVR	10.8	1.4	469	74250	49190	25060	
VMP-3-31.5	10/27/2020	0923	-0.75	-0.15	85.1	OVR	11.6	0.2	407	88030	58850	29180	
VMP-3-31.5	11/24/2020	1048	-9.50	-9.35	0.0	0	5.3	15.1	0 0	0 0	0.0	0.0	Re-sampled to confirm initial sample.
VMP-3-31.5	11/24/2020	1220	-9.39	NM	0.0	0	5.3	15.2	0 8	11.0	5.0	6.0	Re-sample.
VMP-3-31.5	12/17/2020	1103	-9.81	-9.43	0.0	0	3.3	18.1	1 2	15.8	0.0	15 8	
VMP-3-31 5-Dup	12/17/2020	1103	NM	NM	0.0	0	3.2	18.2	1 2	16.0	0.0	16 0	Duplicate sample.
VMP-3-31.5	1/19/2021	1433	-4.21	-2.08	0.0	0	5.8	14.7	0 0	0 0	0.0	0.0	
VMP-3-31.5	2/24/2021	1153	-10 23	-10 26	0.0	0	5.8	16.3	0 2	174	174	0.0	Re-sampled to confirm initial results.
VMP-3-31.5	2/25/2021	1029	-10 21	NM	0.0	0	5.5	16.8	0.1	246	246	0.0	Re-sample.
VMP-3-31.5	3/18/2021	1123	-11 09	-10 34	0.9	18	4.9	16.7	52.7	4403	4015	388	Re-sampled to confirm initial results.
VMP-3-31.5	3/18/2021	1348	-1.60	-1.69	0.7	14	4.6	16.9	40.6	3527	3273	254	Re-sample.
VMP-3-31 5-Dup	3/18/2021	1123	NM	NM	0.8	16	4.7	16.9	52.7	4210	3753	457	Duplicate sample.
VMP-3-31.5	4/30/2021	1142	-9.91	-9.81	0.0	0	2.8	18.8	0 0	6.4	6.4	0.0	
VMP-3-31.5	5/20/2021	1030	-8.28	-8.20	0.0	0	3.3	17.6	0.1	0.4	0.4	0.0	
VMP-3-31.5	6/17/2021	1148	-2.29	-2.01	0.2	4	8.2	8.5	32.9	461	249	212	
VMP-3-39	7/21/2020	0949	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	7/31/2020	0908	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	8/19/2020	0858	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	9/17/2020	1200	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	9/29/2020	1144	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	10/6/2020	1225	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	10/7/2020	1411	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	10/13/2020	1408	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	10/20/2020	1321	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	10/27/2020	0924	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	11/24/2020	1049	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	12/17/2020	1104	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	1/19/2021	1434	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	2/24/2021	1154	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	3/18/2021	1124	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	4/30/2021	1144	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	5/20/2021	1032	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-3-39	6/17/2021	1149	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-4-5	7/21/2020	0846	-0.95	-0.87	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-4-5	8/19/2020	1122	-0.78	-0.74	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-4-5	9/17/2020	1011	-0.61	-0.64	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-4-5	9/29/2020	1304	0.02	NM	0.0	0	0.4	20.2	0 3	0.4	0.4	0.0	
VMP-4-5	10/6/2020	1518	0.00	NM	0.0	0	0.7	19.6	0.1	2 3	2.3	0.0	
VMP-4-5	10/13/2020	1308	0.00	NM	0.0	0	0.7	19.2	0 0	2 2	2.2	0.0	
VMP-4-5	10/27/2020	0910	0.00	0.00	0.0	0	1.0	18.8	0.1	1 8	1.8	0.0	
VMP-4-5	11/24/2020	0910	-0.17	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-5	12/17/2020	0858	-0.90	-0.54	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-5	1/20/2021	1216	-0.84	-0.57	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-5	2/24/2021	1410	-2.16	-1.41	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-5	3/18/2021	1040	-3.72	-3.22	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-5	4/30/2021	0935	-1.25	-1.16	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-4-5	5/20/2021	1121	-0.95	-1.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-4-5	6/17/2021	1229	0.00	0.00	0.0	0	1.0	20.1	0 0	0 0	0.0	0.0	
VMP-4-12	7/21/2020	0847	-2.03	-1.93	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-4-12	8/19/2020	1123	-1.75	-1.70	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-4-12	9/17/2020	1012	-1.60	-1.69	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-4-12	9/29/2020	1306	0.05	NM	0.0	0	0.3	20.4	0.1	1.7	1.7	0.0	
VMP-4-12	10/6/2020	1520	0.00	NM	0.0	0	0.4	20.0	0 0	3 6	3.6	0.0	
VMP-4-12	10/13/2020	1310	0.00	NM	0.0	0	0.5	19.2	0.1	5 3	5.3	0.0	
VMP-4-12	10/27/2020	0911	0.00	0.00	0.0	0	0.9	18.4	0.1	6 2	6.2	0.0	
VMP-4-12-Dup	10/27/2020	0911	NM	NM	0.0	0	1.0	18.3	0.1	6.1	6.1	0.0	Duplicate sample.
VMP-4-12	11/24/2020	0911	-2.02	-2.03	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-4-12	12/17/2020	0859	-2.21	-2.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-12	1/20/2021	1218	-1.59	-1.48	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-4-12	2/24/2021	1411	-2.57	-2.57	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-4-12	3/18/2021	1041	-3.72	-3.22	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-4-12-Dup	3/18/2021	1041	NM	NM	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-4-12	4/30/2021	0937	-2.12	-2.01	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-4-12	5/20/2021	1122	-1.80	-1.83	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-4-12	6/17/2021	1230	0.00	0.00	0.0	0	0.8	19.3	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-4-23.5	7/21/2020	0848	-3.06	-2.76	0.0	0	1.8	18.7	0.1	1.7	1.7	0.0	
VMP-4-23 5-Dup	7/21/2020	0848	NM	NM	0.0	0	1.8	18.8	0.1	0 0	0.0	0.0	Duplicate sample.
VMP-4-23.5	8/19/2020	1124	-2.78	-2.49	0.0	0	1.6	18.9	0 0	0 0	0.0	0.0	
VMP-4-23.5	9/17/2020	1013	-2.64	-2.42	0.0	0	1.9	17.9	0 0	0 0	0.0	0.0	
VMP-4-23.5	9/29/2020	1308	0.37	NM	0.0	0	2.7	16.3	0.1	0 0	0.0	0.0	
VMP-4-23.5	10/6/2020	1522	0.50	NM	0.0	0	3.0	16.1	0 0	0 0	0.0	0.0	
VMP-4-23.5	10/13/2020	1312	0.26	NM	0.0	0	3.3	13.8	0 0	0 0	0.0	0.0	
VMP-4-23.5	10/27/2020	0912	-0.36	0.00	0.0	0	4.3	11.6	0 0	0 0	0.0	0.0	
VMP-4-23.5	11/24/2020	0912	-1.68	-7.63	0.0	0	1.9	19.8	0 0	0 0	0.0	0.0	
VMP-4-23.5	12/17/2020	0900	-7.72	-6.97	0.0	0	1.7	19.9	0 0	0 0	0.0	0.0	
VMP-4-23.5	1/20/2021	1220	-4.66	-4.53	0.0	0	1.3	19.8	0 0	0 0	0.0	0.0	
VMP-4-23.5	2/24/2021	1412	-7.77	-7.78	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-4-23.5	3/18/2021	1042	-8.83	-9.12	0.0	0	1.4	19.8	0 0	0 0	0.0	0.0	
VMP-4-23.5	4/30/2021	0939	-7.93	-7.84	0.0	0	1.2	19.9	0 0	0 0	0.0	0.0	
VMP-4-23.5	5/20/2021	1123	-6.87	-6.87	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-4-23.5	6/17/2021	1231	-4.00	-3.92	0.0	0	1.4	19.0	0 0	0 0	0.0	0.0	
VMP-4-39	7/21/2020	0849	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	8/19/2020	1125	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	9/17/2020	1014	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	10/6/2020	1524	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	10/13/2020	1314	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	10/27/2020	0913	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	11/24/2020	0913	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	12/17/2020	0901	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	1/20/2021	1222	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	2/24/2021	1413	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	3/18/2021	1043	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	4/30/2021	0941	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	5/20/2021	1124	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-4-39	6/17/2021	1232	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-5	7/21/2020	0802	0.00	0.00	0.0	0	0.4	20.0	0 0	0 0	0.0	0.0	
VMP-5-5	8/19/2020	1228	0.00	0.00	0.0	0	1.1	20.1	0 0	0 0	0.0	0.0	
VMP-5-5	9/16/2020	1332	0.00	0.00	0.0	0	1.8	18.7	0 0	0 0	0.0	0.0	
VMP-5-5	10/27/2020	1000	0.00	0.00	0.0	0	2.1	18.7	0 0	0 0	0.0	0.0	
VMP-5-5	11/24/2020	0856	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-5-5	12/16/2020	1303	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-5-5	1/20/2021	1204	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-5-5	2/24/2021	1455	-0.06	-0.14	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-5-5	3/18/2021	0915	0.00	0.00	0.0	0	0.1	20.4	0 0	0 0	0.0	0.0	
VMP-5-5	4/29/2021	1336	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-5-5	5/20/2021	1052	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-5-5	6/17/2021	1145	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-5-12.5	7/21/2020	0803	0.00	0.00	0.0	0	0.8	19.8	0 0	0 0	0.0	0.0	
VMP-5-12.5	8/19/2020	1229	0.00	0.00	0.0	0	2.5	18.2	0 0	0 0	0.0	0.0	
VMP-5-12.5	9/16/2020	1333	0.00	0.00	0.0	0	2.9	17.8	0 0	0 0	0.0	0.0	
VMP-5-12.5	10/27/2020	1001	0.00	0.00	0.0	0	3.4	17.4	0 0	0 0	0.0	0.0	
VMP-5-12.5	11/24/2020	0857	0.00	-0.19	0.0	0	0.9	20.1	0 0	0 0	0.0	0.0	
VMP-5-12.5	12/16/2020	1304	0.00	-0.11	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-5-12.5	1/20/2021	1206	0.00	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-5-12.5	2/24/2021	1456	-0.32	-0.45	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-5-12.5	3/18/2021	0916	0.00	-0.40	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-5-12.5	4/29/2021	1338	0.00	0.00	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-5-12.5	5/20/2021	1053	-0.13	-0.25	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-5-12.5	6/17/2021	1146	0.00	0.00	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-5-31	7/21/2020	0804	-0.31	-0.26	0.0	0	1.2	19.4	0 2	7 6	7.6	0.0	
VMP-5-31-Dup	7/21/2020	0804	NM	NM	0.0	0	1.3	19.4	0 2	7.7	7.7	0.0	Duplicate sample.
VMP-5-31	8/19/2020	1230	-0.15	-0.15	0.0	0	1.4	19.3	0.1	23.9	23 9	0.0	
VMP-5-31	9/16/2020	1334	0.00	0.00	0.0	0	1.7	17.9	0 0	9 9	9.9	0.0	
VMP-5-31	10/27/2020	1002	0.00	0.00	0.0	0	2.3	17.2	0.1	22.8	22 8	0.0	
VMP-5-31	11/24/2020	0858	-0.68	-0.72	0.0	0	2.7	19.2	0 0	0 0	0.0	0.0	
VMP-5-31-Dup	11/24/2020	0858	NM	NM	0.0	0	2.7	19.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-5-31	12/16/2020	1305	-0.60	-0.68	0.0	0	1.8	19.5	0 0	0 8	0.8	0.0	
VMP-5-31-Dup	12/16/2020	1305	NM	NM	0.0	0	1.8	19.6	0 0	1 0	1.0	0.0	Duplicate sample.
VMP-5-31	1/20/2021	1208	-0.14	0.00	0.0	0	1.6	19.7	0 0	0 8	0.8	0.0	
VMP-5-31	2/24/2021	1457	-1.67	-1.63	0.0	0	1.4	19.6	0 0	0 0	0.0	0.0	
VMP-5-31	3/18/2021	0917	-1.57	-1.75	0.0	0	1.2	19.9	0 0	0 0	0.0	0.0	
VMP-5-31	4/29/2021	1340	-1.34	-1.34	0.0	0	1.1	19.7	0 0	2.7	2.7	0.0	
VMP-5-31	5/20/2021	1043	0.00	0.00	0.0	0	1.3	19.7	0 0	0 0	0.0	0.0	
VMP-5-31-Dup	5/20/2021	1043	NM	NM	0.0	0	1.3	19.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-5-31	6/17/2021	1147	-0.34	-0.35	0.0	0	1.4	19.4	0 0	0 0	0.0	0.0	
VMP-5-40	7/21/2020	0805	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	9/16/2020	1335	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	10/27/2020	1003	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	11/24/2020	0859	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	12/16/2020	1306	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	1/20/2021	1210	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	2/24/2021	1458	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	3/18/2021	0918	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	4/29/2021	1342	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	5/20/2021	1055	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-5-40	6/17/2021	1148	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-6-5	7/20/2020	1400	0.00	0.00	0.0	0	1.2	18.5	0 0	0 0	0.0	0.0	
VMP-6-5	8/19/2020	1340	0.00	0.00	0.0	0	2.6	16.5	0 0	0 0	0.0	0.0	
VMP-6-5	9/17/2020	1504	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-6-5	10/27/2020	1110	0.00	0.00	0.0	0	2.8	17.4	0 0	0 0	0.0	0.0	
VMP-6-5	11/23/2020	1412	0.00	0.00	0.0	0	1.7	19.2	0 0	0 0	0.0	0.0	
VMP-6-5	12/16/2020	1234	0.35	0.33	0.0	0	1.3	19.9	0 0	0 0	0.0	0.0	
VMP-6-5	1/20/2021	0931	0.00	0.17	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-6-5	2/24/2021	1114	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-6-5	3/17/2021	1415	-0.09	-0.08	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-6-5	4/29/2021	1241	0.00	0.00	0.0	0	0.5	19.7	0 0	0 0	0.0	0.0	
VMP-6-5	5/20/2021	0917	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-6-5	6/17/2021	1033	0.00	0.00	0.0	0	1.6	18.9	0 0	0 0	0.0	0.0	
VMP-6-10	7/20/2020	1402	0.00	0.00	0.0	0	1.2	19.0	0 0	0 0	0.0	0.0	
VMP-6-10	8/19/2020	1341	0.00	0.00	0.0	0	2.6	16.8	0 0	0 0	0.0	0.0	
VMP-6-10	9/17/2020	1505	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-6-10	10/27/2020	1111	0.00	0.00	0.0	0	3.6	16.5	0 0	0 0	0.0	0.0	
VMP-6-10	11/23/2020	1413	0.00	0.00	0.0	0	2.7	18.7	0 0	0 0	0.0	0.0	
VMP-6-10	12/16/2020	1235	0.41	0.30	0.0	0	2.1	19.4	0 0	0 0	0.0	0.0	
VMP-6-10	1/20/2021	0932	0.00	0.00	0.0	0	1.4	19.9	0 0	0 0	0.0	0.0	
VMP-6-10	2/24/2021	1116	-0.17	-0.11	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-6-10	3/17/2021	1416	-0.23	-0.23	0.0	0	1.2	19.8	0 0	0 0	0.0	0.0	
VMP-6-10	4/29/2021	1243	-0.18	-0.18	0.0	0	1.1	19.5	0 0	0 0	0.0	0.0	
VMP-6-10	5/20/2021	0918	0.00	0.00	0.0	0	1.3	19.5	0 0	0 0	0.0	0.0	
VMP-6-10	6/17/2021	1034	0.00	0.00	0.0	0	2.5	17.8	0 0	0 0	0.0	0.0	
VMP-6-31.5	7/20/2020	1402	0.10	0.00	0.0	0	2.0	18.5	0 0	40.9	40 9	0.0	Re-sampled to confirm initial sample.
VMP-6-31.5	7/21/2020	1105	0.00	NM	0.0	0	2.0	18.3	0 0	44.1	44.1	0.0	Re-sample.
VMP-6-31.5	8/19/2020	1342	0.10	0.10	0.0	0	2.9	17.1	0 3	12.2	12 2	0.0	
VMP-6-31.5	9/17/2020	1506	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-6-31.5	10/27/2020	1112	0.00	0.00	0.0	0	4.2	14.7	0 0	0 0	0.0	0.0	
VMP-6-31 5-Dup	10/27/2020	1112	NM	NM	0.0	0	4.3	14.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-6-31.5	11/23/2020	1414	0.00	0.00	0.0	0	4.0	15.8	0 0	0 0	0.0	0.0	
VMP-6-31.5	12/16/2020	1236	0.10	0.00	0.0	0	3.8	16.5	0 0	0 0	0.0	0.0	
VMP-6-31.5	1/20/2021	0933	0.00	0.00	0.0	0	3.5	17.7	0 0	0 0	0.0	0.0	
VMP-6-31.5	2/24/2021	1118	-0.38	-0.32	0.0	0	3.1	17.9	0 0	0 0	0.0	0.0	
VMP-6-31.5	3/17/2021	1417	-0.49	-0.47	0.0	0	3.1	18.2	0 0	0 0	0.0	0.0	
VMP-6-31.5	4/29/2021	1245	-0.38	-0.35	0.0	0	2.8	18.1	0 0	0 0	0.0	0.0	
VMP-6-31.5	5/20/2021	0919	-0.10	-0.11	0.0	0	2.8	18.2	0 0	0 0	0.0	0.0	
VMP-6-31.5	6/17/2021	1035	0.00	0.00	0.0	0	3.1	17.2	0 0	0 0	0.0	0.0	
VMP-6-31 5-Dup	6/17/2021	1035	NM	NM	0.0	0	3.0	17.3	0 0	0 0	0.0	0.0	Duplicate sample.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-6-39	7/20/2020	1403	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	8/19/2020	1343	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	9/17/2020	1507	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-6-39	10/27/2020	1113	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	11/23/2020	1415	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	12/16/2020	1237	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	1/20/2021	0934	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	2/24/2021	1120	-0.19	-0.32	0.0	0	3.8	17.0	0 0	0 0	0.0	0.0	
VMP-6-39	3/17/2021	1418	-0.50	-0.47	0.0	0	3.3	18.0	0 0	0 0	0.0	0.0	
VMP-6-39	4/29/2021	1247	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	5/20/2021	0920	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-6-39	6/17/2021	1036	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-5	7/20/2020	1350	-0.54	0.00	0.0	0	0.4	20.2	0 0	0 0	0.0	0.0	
VMP-7-5	8/20/2020	0813	-0.68	0.00	0.0	0	1.2	17.9	0 5	0 0	0.0	0.0	
VMP-7-5	9/16/2020	1310	-0.29	0.00	0.0	0	1.9	16.9	0 0	0 0	0.0	0.0	
VMP-7-5	10/27/2020	1129	0.00	0.00	0.0	0	1.8	19.1	0 3	0 0	0.0	0.0	
VMP-7-5	11/23/2020	1400	0.00	0.10	0.0	0	0.0	20.9	0 2	0 0	0.0	0.0	
VMP-7-5	12/16/2020	1219	-0.20	-0.41	0.0	0	0.6	20.4	0 2	0 0	0.0	0.0	
VMP-7-5	1/20/2021	0915	-0.35	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-7-5	2/24/2021	1045	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. VMP encased in ice.
VMP-7-5	3/17/2021	1400	0.30	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-7-5	4/29/2021	1220	-3.52	-0.12	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-7-5	5/20/2021	0846	-0.99	0.00	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-7-5	6/17/2021	1000	0.00	0.00	0.0	0	1.3	19.4	0 0	0 0	0.0	0.0	
VMP-7-13.5	7/20/2020	1351	-0.60	0.00	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-7-13.5	8/20/2020	0816	-0.61	0.00	0.0	0	1.0	18.5	0 2	0 0	0.0	0.0	
VMP-7-13.5	9/16/2020	1311	0.27	0.12	0.0	0	1.4	17.7	0 3	0 0	0.0	0.0	
VMP-7-13.5	10/27/2020	1130	0.00	0.00	0.0	0	2.2	18.4	0 0	0 0	0.0	0.0	
VMP-7-13.5	11/23/2020	1401	0.00	0.00	0.0	0	1.5	19.7	0 0	0 0	0.0	0.0	
VMP-7-13.5	12/16/2020	1220	-0.30	0.00	0.0	0	1.0	20.0	0.1	0 0	0.0	0.0	
VMP-7-13.5	1/20/2021	0916	-0.12	0.00	0.0	0	0.9	20.1	0 0	0 0	0.0	0.0	
VMP-7-13.5	2/24/2021	1046	-0.34	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-7-13.5	3/17/2021	1401	-0.13	-0.20	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-7-13.5	4/29/2021	1222	0.00	-0.26	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-7-13.5	5/20/2021	0847	-0.54	0.00	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-7-13 5-Dup	5/20/2021	0847	NM	NM	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-7-13.5	6/17/2021	1001	0.00	0.00	0.0	0	1.4	19.2	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-7-29.5	7/20/2020	1352	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-29.5	8/20/2020	0817	-1.39	0.87	0.0	0	1.6	18.7	0 3	0 0	0.0	0.0	
VMP-7-29 5-DUP	8/20/2020	0817	NM	NM	0.0	0	1.6	18.6	0 3	0 0	0.0	0.0	Duplicate sample.
VMP-7-29.5	9/16/2020	1312	0.10	0.15	0.0	0	1.6	18.0	0 2	0 0	0.0	0.0	
VMP-7-29 5-Dup	9/16/2020	1312	NM	NM	0.0	0	1.7	17.8	0 2	0 0	0.0	0.0	Duplicate sample.
VMP-7-29.5	10/27/2020	1131	0.00	0.00	0.0	0	2.4	17.3	0.1	0 0	0.0	0.0	
VMP-7-29.5	11/23/2020	1402	0.00	-0.24	0.0	0	2.5	18.1	0 0	0 0	0.0	0.0	
VMP-7-29.5	12/16/2020	1221	0.28	0.00	0.0	0	2.5	18.5	0.1	0 0	0.0	0.0	
VMP-7-29.5	1/20/2021	0917	0.00	0.00	0.0	0	2.2	19.3	0 0	0 0	0.0	0.0	
VMP-7-29 5-Dup	1/20/2021	0917	NM	NM	0.0	0	2.1	19.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-7-29.5	2/24/2021	1048	-0.39	-0.28	0.0	0	2.2	19.3	0 0	0 0	0.0	0.0	
VMP-7-29.5	3/17/2021	1402	-1.02	-1.06	0.0	0	1.8	19.6	0 0	0 0	0.0	0.0	
VMP-7-29.5	4/29/2021	1224	-1.19	-0.57	0.0	0	1.4	19.5	0 0	0 0	0.0	0.0	
VMP-7-29.5	5/20/2021	0848	-1.61	-1.37	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-7-29.5	6/17/2021	1002	-0.25	0.00	0.0	0	1.8	18.8	0 0	0 0	0.0	0.0	
VMP-7-29 5-Dup	6/17/2021	1002	NM	NM	0.0	0	1.8	18.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-7-38	7/20/2020	1353	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	8/20/2020	0818	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	9/16/2020	1313	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	10/27/2020	1132	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	11/23/2020	1403	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	12/16/2020	1222	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	1/20/2021	0918	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	2/24/2021	1049	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. VMP encased in ice.
VMP-7-38	3/17/2021	1403	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	4/29/2021	1226	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	5/20/2021	0849	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-7-38	6/17/2021	1003	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-5	7/20/2020	1125	0.00	0.00	0.0	0	2.3	17.1	0 2	0 0	0.0	0.0	
VMP-9-5	8/20/2020	0935	0.00	0.00	0.0	0	4.6	14.1	0 2	0 0	0.0	0.0	
VMP-9-5	9/16/2020	1125	0.00	0.00	0.0	0	4.2	16.1	0 0	0 0	0.0	0.0	
VMP-9-5	10/26/2020	1220	0.00	0.00	0.0	0	0.2	20.2	0 0	0 0	0.0	0.0	
VMP-9-5	11/23/2020	1233	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-9-5	12/16/2020	1104	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-9-5	1/20/2021	0810	-0.09	0.00	0.0	0	0.1	20.4	0 0	0 0	0.0	0.0	
VMP-9-5-Dup	1/20/2021	0810	NM	NM	0.0	0	0.1	20.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-9-5	2/24/2021	0942	-0.13	-0.10	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-9-5	3/17/2021	1226	-0.06	0.00	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-9-5	4/29/2021	1123	-0.11	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-9-5	5/19/2021	1315	-0.09	0.00	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-9-5	6/17/2021	0846	0.00	0.00	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-9-11.5	7/20/2020	1126	0.00	0.00	0.0	0	1.5	18.5	0.1	0 0	0.0	0.0	
VMP-9-11.5	8/20/2020	0936	0.00	0.00	0.0	0	2.4	17.3	0.1	0 0	0.0	0.0	
VMP-9-11.5	9/16/2020	1126	0.00	0.00	0.0	0	2.8	17.0	0 0	0 0	0.0	0.0	
VMP-9-11.5	10/26/2020	1221	0.00	0.00	0.0	0	0.9	19.7	0 0	0 0	0.0	0.0	
VMP-9-11.5	11/23/2020	1234	0.00	0.00	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-9-11.5	12/16/2020	1105	-0.12	0.00	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-9-11.5	1/20/2021	0811	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-9-11.5	2/24/2021	0944	-0.29	-0.25	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-9-11.5	3/17/2021	1227	-0.16	0.52	0.0	0	0.3	20.3	0 0	0 0	0.0	0.0	
VMP-9-11.5	4/29/2021	1125	-0.31	-0.27	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-9-11.5	5/19/2021	1316	-0.21	-0.15	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-9-11.5	6/17/2021	0847	-0.18	-0.29	0.0	0	1.5	19.6	0 0	0 0	0.0	0.0	
VMP-9-25.5	7/20/2020	1127	0.00	0.00	0.0	0	1.5	19.1	0 0	0 0	0.0	0.0	
VMP-9-25.5	8/20/2020	0937	-0.79	0.09	0.0	0	1.7	18.9	0 0	0 0	0.0	0.0	
VMP-9-25.5	9/16/2020	1127	0.00	0.00	0.0	0	1.6	18.8	0 0	0 0	0.0	0.0	
VMP-9-25.5	10/26/2020	1222	-0.28	0.00	0.0	0	1.9	18.6	0 0	0 0	0.0	0.0	
VMP-9-25.5	11/23/2020	1235	-0.12	0.00	0.0	0	1.9	19.4	0 0	0 0	0.0	0.0	
VMP-9-25.5	12/16/2020	1106	-0.20	-0.17	0.0	0	1.7	19.6	0 0	0 0	0.0	0.0	
VMP-9-25.5	1/20/2021	0812	0.00	0.00	0.0	0	1.5	20.0	0 0	0 0	0.0	0.0	
VMP-9-25.5	2/24/2021	0946	-0.56	-0.58	0.0	0	1.5	19.7	0 0	0 0	0.0	0.0	
VMP-9-25.5	3/17/2021	1228	-0.33	0.31	0.0	0	1.5	19.5	0 0	0 0	0.0	0.0	
VMP-9-25.5	4/29/2021	1127	-0.12	-0.91	0.0	0	1.3	19.6	0 0	0 0	0.0	0.0	
VMP-9-25.5	5/19/2021	1317	-0.44	-0.39	0.0	0	1.4	19.3	0 0	0 0	0.0	0.0	
VMP-9-25.5	6/17/2021	0848	0.41	-0.25	0.0	0	1.4	19.1	0 0	0 0	0.0	0.0	
VMP-9-25 5-Dup	6/17/2021	0848	NM	NM	0.0	0	1.5	19.1	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-9-38.5	7/20/2020	1128	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	8/20/2020	0938	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	9/16/2020	1128	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	10/26/2020	1223	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	11/23/2020	1236	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	12/16/2020	1107	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	1/20/2021	0813	-7.50	0.39	0.0	0	2.3	18.8	0 0	0 0	0.0	0.0	
VMP-9-38.5	2/24/2021	0948	-0.54	-0.57	0.0	0	2.0	19.5	0 5	0 0	0.0	0.0	
VMP-9-38.5	3/17/2021	1229	-0.31	0.00	0.0	0	2.1	19.0	0 0	0 0	0.0	0.0	
VMP-9-38.5	4/29/2021	1129	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	5/19/2021	1318	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-9-38.5	6/17/2021	0849	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-10-5	7/20/2020	0935	0.00	0.00	0.0	0	1.7	19.4	0.1	0 0	0.0	0.0	
VMP-10-5	8/20/2020	1210	0.00	0.00	0.0	0	2.3	18.8	0 0	0 0	0.0	0.0	
VMP-10-5	9/16/2020	0930	0.00	0.00	0.0	0	1.7	19.6	0.1	0 0	0.0	0.0	
VMP-10-5	10/26/2020	0918	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-10-5	11/23/2020	0847	-0.14	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-10-5	12/16/2020	0945	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-5	1/19/2021	1121	-0.09	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-5-Dup	1/19/2021	1121	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-10-5	2/23/2021	1020	-0.04	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-5	3/17/2021	0846	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-5	4/29/2021	0954	0.00	0.00	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-10-5	5/19/2021	1005	0.00	0.00	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-10-5	6/16/2021	0846	0.00	0.00	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-10-10	7/20/2020	0936	0.00	0.00	0.0	0	1.4	19.6	0.1	0 0	0.0	0.0	
VMP-10-10	8/20/2020	1211	0.00	0.00	0.0	0	1.5	18.9	0 0	0 0	0.0	0.0	
VMP-10-10	9/16/2020	0931	0.00	0.00	0.0	0	1.9	19.1	0 0	0 0	0.0	0.0	
VMP-10-10	10/26/2020	0919	0.00	-0.31	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-10-10	11/23/2020	0848	0.00	0.00	0.0	0	0.1	20.8	0.1	0 0	0.0	0.0	
VMP-10-10	12/16/2020	0946	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-10-10	1/19/2021	1123	-0.10	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-10	2/23/2021	1021	-0.05	-0.03	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-10	3/17/2021	0846	0.00	-0.05	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	
VMP-10-10	4/29/2021	0956	-0.10	0.00	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-10-10	5/19/2021	1006	0.00	0.00	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-10-10	6/16/2021	0848	0.00	0.00	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-10-20	7/20/2020	0937	0.00	0.00	0.0	0	1.3	19.6	0 0	0 0	0.0	0.0	
VMP-10-20-Dup	7/20/2020	0937	NM	NM	0.0	0	1.3	19.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-10-20	8/20/2020	1212	0.11	0.00	0.0	0	1.9	18.7	0 0	0 0	0.0	0.0	
VMP-10-20	9/16/2020	0932	0.00	0.00	0.0	0	1.9	18.8	0 0	0 0	0.0	0.0	
VMP-10-20	10/26/2020	0920	0.00	-0.12	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-10-20	11/23/2020	0849	-0.10	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-10-20	12/16/2020	0947	-0.10	-0.09	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-10-20	1/19/2021	1125	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-10-20	2/23/2021	1022	0.09	-0.07	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-10-20-Dup	2/23/2021	1022	NM	NM	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-10-20	3/17/2021	0847	0.34	-0.08	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-10-20	4/29/2021	0958	-0.15	-0.11	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-10-20	5/19/2021	1007	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-10-20-Dup	5/19/2021	1007	NM	NM	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-10-20	6/16/2021	0850	0.00	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-10-30	7/20/2020	0938	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	8/20/2020	1213	0.00	-0.68	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	9/16/2020	0933	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	10/26/2020	0921	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	11/23/2020	0850	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	12/16/2020	0948	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	1/19/2021	1127	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	2/23/2021	1023	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	3/17/2021	0848	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	4/29/2021	1000	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	5/19/2021	1008	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-10-30	6/16/2021	0852	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-5	7/20/2020	1100	0.58	0.00	0.0	0	3.7	15.5	0.7	0 0	0.0	0.0	
VMP-11-5	8/20/2020	1025	-0.69	-0.16	0.0	0	5.8	15.2	1 3	0 8	0.6	0.2	
VMP-11-5	9/16/2020	1108	0.29	0.00	0.0	0	4.1	17.2	0 0	0 0	0.0	0.0	
VMP-11-5	10/26/2020	1103	0.00	0.00	0.0	0	0.0	20.9	0 9	0.7	0.1	0.6	
VMP-11-5	11/23/2020	1130	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-5	12/16/2020	1050	-0.09	0.00	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-11-5	1/19/2021	1230	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-5	2/24/2021	0900	-0.42	-0.29	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-5	3/17/2021	1145	-0.34	-0.14	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-5	4/29/2021	1112	0.25	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-5	5/19/2021	1238	0.00	-0.13	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-5-Dup	5/19/2021	1238	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-11-5	6/16/2021	1054	0.00	0.00	0.0	0	0.0	20.9	0.4	0 8	0.0	0.8	
VMP-11-8	7/20/2020	1101	0.00	0.00	0.0	0	3.8	15.4	0 8	0 0	0.0	0.0	
VMP-11-8	8/20/2020	1026	0.00	0.00	0.0	0	5.8	15.7	0.7	0 0	0.0	0.0	
VMP-11-8	9/16/2020	1109	-0.27	0.00	0.0	0	3.8	17.7	0 0	0 0	0.0	0.0	
VMP-11-8	10/26/2020	1104	0.00	0.00	0.0	0	0.0	20.9	0 6	0 0	0.0	0.0	
VMP-11-8	11/23/2020	1131	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-8	12/16/2020	1051	-0.13	-0.12	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-11-8	1/19/2021	1232	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-8	2/24/2021	0902	-0.22	-0.33	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-8	3/17/2021	1146	-0.55	-0.17	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-11-8	4/29/2021	1114	-0.09	-0.15	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-11-8	5/19/2021	1239	0.00	0.00	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-11-8	6/16/2021	1056	0.00	0.00	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-11-29	7/20/2020	1102	0.61	0.00	0.0	0	2.3	17.8	0 8	0 0	0.0	0.0	
VMP-11-29	8/20/2020	1027	0.00	0.00	0.0	0	3.1	17.6	0 8	0 0	0.0	0.0	
VMP-11-29	9/16/2020	1110	-0.15	0.00	0.0	0	2.5	18.1	0 0	0 0	0.0	0.0	
VMP-11-29	10/26/2020	1105	-7.12	-4.46	0.0	0	0.2	20.6	0.7	0 0	0.0	0.0	
VMP-11-29	11/23/2020	1132	-6.99	-4.26	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-11-29-Dup	11/23/2020	1132	NM	NM	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-11-29	12/16/2020	1052	-5.23	-4.27	0.0	0	0.1	20.8	0.1	0 0	0.0	0.0	
VMP-11-29-Dup	12/16/2020	1052	NM	NM	0.0	0	0.1	20.8	0.1	0 0	0.0	0.0	Duplicate sample.
VMP-11-29	1/19/2021	1234	-3.41	-2.01	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	
VMP-11-29-Dup	1/19/2021	1234	NM	NM	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-11-29	2/24/2021	0904	-3.51	-3.35	0.0	0	0.1	20.8	0.1	0 0	0.0	0.0	
VMP-11-29	3/17/2021	1147	-3.80	-3.54	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-11-29	4/29/2021	1116	-5.84	-5.21	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-11-29	5/19/2021	1240	-4.10	-4.32	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-11-29	6/16/2021	1058	-3.95	-3.66	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-11-38	7/20/2020	1103	0.00	0.00	0.0	0	3.7	15.3	2.1	1 9	0.0	1.9	
VMP-11-38	8/20/2020	1028	0.00	-1.46	0.0	0	5.8	15.4	0 9	0 5	0.0	0.5	
VMP-11-38-Dup	8/20/2020	1028	NM	NM	0.0	0	5.5	15.6	0 9	0.7	0.0	0.7	Duplicate sample.
VMP-11-38	9/16/2020	1111	0.13	-1.48	0.0	0	3.6	17.8	1.4	1.1	0.5	0.6	
VMP-11-38-Dup	9/16/2020	1111	NM	NM	0.0	0	3.8	17.6	1.4	1.4	0.5	0.9	Duplicate sample.
VMP-11-38	10/26/2020	1106	-0.15	0.00	0.0	0	0.0	20.8	0.4	0 5	0.0	0.5	
VMP-11-38	11/23/2020	1133	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-38	12/16/2020	1053	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-38	1/19/2021	1236	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-38	2/24/2021	0905	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-38	3/17/2021	1148	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-38	4/29/2021	1118	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-11-38	5/19/2021	1241	-0.21	0.00	0.0	0	0.0	20.6	2.4	2.1	0.0	2.1	
VMP-11-38	6/16/2021	1100	0.00	0.00	0.0	0	0.0	20.9	1 2	2.7	0.0	2.7	
VMP-12-5	7/20/2020	0947	0.00	0.00	0.0	0	0.1	20.3	0 0	0 0	0.0	0.0	
VMP-12-5	8/19/2020	0902	-0.15	0.00	0.0	0	1.4	19.4	0 0	0 0	0.0	0.0	
VMP-12-5	9/16/2020	0850	0.00	0.00	0.0	0	1.8	13.1	0 0	0 0	0.0	0.0	
VMP-12-5-Dup	9/16/2020	0850	NM	NM	0.0	0	1.8	13.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-12-5	10/26/2020	0840	-0.99	-1.39	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	11/23/2020	0855	-1.18	-2.04	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	12/16/2020	0918	-0.94	-0.87	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	1/19/2021	0835	-0.66	-0.60	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	2/23/2021	0902	-0.51	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	3/17/2021	0845	-0.12	-0.42	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	4/29/2021	1135	-1.11	-1.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5	5/19/2021	0852	-0.71	-0.76	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-5-Dup	5/19/2021	0852	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-12-5	6/16/2021	0835	-0.34	-0.35	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-12-11.5	7/20/2020	0948	0.00	0.00	0.0	0	0.8	18.7	0 0	0 0	0.0	0.0	
VMP-12-11.5	8/19/2020	0903	-0.14	0.00	0.0	0	3.3	11.3	0 0	0 0	0.0	0.0	
VMP-12-11.5	9/16/2020	0851	0.00	0.00	0.0	0	7.6	3.5	0 0	11.0	11 0	0.0	
VMP-12-11.5	10/26/2020	0841	-1.09	-1.28	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-12-11.5	11/23/2020	0856	-1.23	-2.24	0.0	0	0.7	19.0	0 0	0 0	0.0	0.0	
VMP-12-11.5	12/16/2020	0920	-0.16	-1.03	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-11.5	1/19/2021	0836	-0.70	-0.81	0.0	0	0.1	20.7	0.1	0 0	0.0	0.0	
VMP-12-11.5	2/23/2021	0904	-0.93	-1.29	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-12-11.5	3/17/2021	0846	0.00	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-11.5	4/29/2021	1136	-1.16	-1.29	0.0	0	0.3	19.6	0 0	0 0	0.0	0.0	
VMP-12-11.5	5/19/2021	0854	-0.88	-0.83	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-12-11.5	6/16/2021	0836	-0.38	-0.49	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-12-25	7/20/2020	0949	0.00	0.00	0.0	0	8.1	5.5	0 0	0 0	0.0	0.0	
VMP-12-25	8/19/2020	0904	-0.16	0.00	10 0	OVR	11.2	2.2	281	27780	22810	4970	
VMP-12-25	9/16/2020	0852	0.00	0.00	13 3	OVR	11.4	1.2	248	47140	39080	8060	
VMP-12-25	10/26/2020	0842	-1.42	-1.56	0.1	2	6.0	11.0	5.1	93.0	11 0	82 0	
VMP-12-25	11/23/2020	0857	-1.43	-2.67	2.0	40	11.8	2.3	89.3	8180	5860	2320	Re-sampled to confirm initial sample.
VMP-12-25	11/24/2020	1105	-0.96	NM	16 0	OVR	12.7	1.2	214	39690	30460	9230	Re-sample.
VMP-12-25	12/16/2020	0922	-1.28	-1.25	5.3	OVR	13.0	0.9	72.9	27640	23470	4170	
VMP-12-25	1/19/2021	0837	-0.97	-1.10	21 2	OVR	13.6	0.5	157	74990	61010	13980	
VMP-12-25	2/23/2021	0906	-0.77	-1.56	0.7	15	12.0	1.9	51.2	2990	2230	760	
VMP-12-25	3/17/2021	0847	0.00	-0.33	31.1	OVR	9.1	17.2	418	24240	19210	5030	
VMP-12-25	4/29/2021	1137	-1.41	-1.53	42 2	OVR	12.5	1.6	379	62550	45360	17190	
VMP-12-25	5/19/2021	0856	-1.16	-1.12	2.6	53	12.2	2.0	159	5170	2870	2300	
VMP-12-25	6/16/2021	0837	-0.46	-0.73	0.0	1	9.4	6.0	7 6	92.0	39 0	53 0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-12-39	7/20/2020	0950	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	8/19/2020	0905	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	9/16/2020	0853	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	10/26/2020	0844	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	11/23/2020	0858	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	12/16/2020	0924	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	1/19/2021	0838	-5.49	-1.16	OVR	OVR	8.2	3.5	298	827000	678000	149000	F D measurement range exceeded with 10:1 dilution probe.
VMP-12-39-Dup	1/19/2021	0838	NM	NM	OVR	OVR	8.4	3.0	298	827000	675000	152000	Duplicate sample. F D measurement range exceeded with 10:1 dilution probe.
VMP-12-39	2/23/2021	0908	-1.13	-12.41	OVR	OVR	6.6	8.2	358	328000	179000	149000	
VMP-12-39	3/17/2021	0848	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	4/29/2021	1138	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	5/19/2021	0858	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-12-39	6/16/2021	0838	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-13-5	7/20/2020	0833	0.00	0.00	0.0	0	0.9	19.3	0 0	0 0	0.0	0.0	
VMP-13-5	8/20/2020	1200	0.00	0.00	0.0	0	1.1	17.3	0 0	0 0	0.0	0.0	
VMP-13-5	9/16/2020	0835	0.00	0.00	0.0	0	1.6	17.4	0 0	0 0	0.0	0.0	
VMP-13-5	10/26/2020	0833	-0.11	-0.09	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	
VMP-13-5	11/23/2020	0930	-0.09	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-5	12/16/2020	0848	-0.12	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-5	1/19/2021	0946	0.00	-0.14	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-5	2/23/2021	0925	-0.10	-0.11	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-5	3/17/2021	1010	-0.17	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-13-5	4/29/2021	0855	-0.13	-0.13	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-13-5	5/19/2021	0916	0.00	0.00	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-13-5	6/16/2021	0934	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-13-10.5	7/20/2020	0834	0.00	0.00	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	
VMP-13-10.5	8/20/2020	1201	0.00	0.00	0.0	0	0.5	19.1	0 0	0 0	0.0	0.0	
VMP-13-10.5	9/16/2020	0836	0.00	0.00	0.0	0	0.6	18.8	0 0	0 0	0.0	0.0	
VMP-13-10.5	10/26/2020	0834	-0.77	-0.72	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-13-10.5	11/23/2020	0931	-0.62	-0.56	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-10.5	12/16/2020	0849	-0.28	0.64	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-13-10.5	1/19/2021	0948	-0.44	-0.47	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-10.5	2/23/2021	0926	0.00	-0.74	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-10.5	3/17/2021	1011	-0.56	-0.48	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-10.5	4/29/2021	0857	-0.64	-0.66	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-10.5	5/19/2021	0917	-0.55	-0.58	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-10.5	6/16/2021	0936	0.00	-0.48	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-13-21.5	7/20/2020	0835	0.00	0.00	0.0	0	0.2	20.4	0 0	0 0	0.0	0.0	
VMP-13-21.5-Dup	7/20/2020	0835	NM	NM	0.0	0	0.2	20.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-13-21.5	8/20/2020	1202	0.00	0.00	0.0	0	0.2	19.5	0.1	0 8	0.8	0.0	
VMP-13-21.5	9/16/2020	0837	0.00	0.00	0.0	0	0.4	19.2	0 0	0 0	0.0	0.0	
VMP-13-21.5	10/26/2020	0835	-0.83	-0.93	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-13-21.5	11/23/2020	0932	-0.81	-0.12	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-13-21.5	12/16/2020	0850	-0.69	-0.83	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-13-21.5	1/19/2021	0950	-0.62	-0.59	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-13-21.5	2/23/2021	0927	0.00	-0.74	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-13-21.5	3/17/2021	1012	-0.72	-0.62	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-13-21.5	4/29/2021	0859	-0.82	-0.83	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-13-21.5	5/19/2021	0918	-0.72	-0.71	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-13-21.5	6/16/2021	0938	0.00	-0.61	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-13-29.5	7/20/2020	0836	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-13-29.5	8/20/2020	1203	0.00	0.00	0.0	0	0.7	18.4	0 0	0 0	0.0	0.0	
VMP-13-29.5	9/16/2020	0838	0.00	0.00	0.0	0	0.9	18.2	0 0	0 0	0.0	0.0	
VMP-13-29.5	10/26/2020	0838	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-13-29.5	11/23/2020	0933	-0.20	-0.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-29.5	12/16/2020	0851	-0.22	-0.22	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-13-29.5	1/19/2021	0952	-0.35	-0.22	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-29.5	2/23/2021	0928	-0.18	-0.18	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-29.5	3/17/2021	1013	-0.19	-0.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-13-29.5	4/29/2021	0900	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-13-29.5	5/19/2021	0919	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-13-29.5	6/16/2021	0940	0.00	-0.18	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-14-5	7/20/2020	0819	-0.14	0.00	0.0	0	2.2	16.7	0 8	0 0	0.0	0.0	
VMP-14-5	8/20/2020	1145	-0.20	0.00	0.0	0	2.3	17.2	0.1	0 0	0.0	0.0	
VMP-14-5	9/16/2020	0825	0.00	0.00	0.0	0	2.5	18.0	0 0	0 0	0.0	0.0	
VMP-14-5	10/26/2020	0815	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-14-5	11/23/2020	0943	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-14-5	12/16/2020	0838	0.00	0.00	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	
VMP-14-5	1/19/2021	0905	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-14-5	2/23/2021	0900	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-14-5	3/17/2021	1025	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-14-5	4/29/2021	0830	0.00	0.00	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-14-5	5/19/2021	0858	0.00	0.00	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-14-5	6/16/2021	0954	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-14-11.5	7/20/2020	0820	-0.19	0.00	0.0	0	1.7	17.9	0 5	0 0	0.0	0.0	
VMP-14-11.5	8/20/2020	1146	0.00	0.00	0.0	0	1.6	18.7	0 3	0 0	0.0	0.0	
VMP-14-11.5	9/16/2020	0826	0.00	0.00	0.0	0	1.6	19.5	0 0	0 0	0.0	0.0	
VMP-14-11.5	10/26/2020	0816	0.00	0.00	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-14-11.5	11/23/2020	0944	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-14-11.5	12/16/2020	0839	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-14-11.5	1/19/2021	0916	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-14-11.5	2/23/2021	0901	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-14-11.5-Dup	2/23/2021	0901	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-14-11.5	3/17/2021	1026	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-14-11.5	4/29/2021	0832	0.00	0.00	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-14-11.5	5/19/2021	0858	0.00	0.00	0.0	0	0.6	20.3	0 3	0.7	0.0	0.7	
VMP-14-11.5-Dup	5/19/2021	0858	NM	NM	0.0	0	0.6	20.3	0 3	0.7	0.0	0.7	Duplicate sample.
VMP-14-11.5	6/16/2021	0956	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-14-20	7/20/2020	0821	-0.98	0.00	0.0	0	8.0	9.7	1 3	2 0	0.0	2.0	
VMP-14-20	8/20/2020	1147	-0.91	0.10	0.0	0	11.8	2.0	1 6	13.0	11 0	2.0	
VMP-14-20	9/16/2020	0827	-0.44	0.00	0.1	3	13.6	0.7	1.1	1550	1470	80 0	Re-sampled to confirm initial sample.
VMP-14-20	9/17/2020	0914	-0.20	NM	0.1	3	14.1	0.5	1 2	1760	1660	100.0	Re-sample.
VMP-14-20	10/26/2020	0817	-0.52	-0.48	0.0	0	6.2	12.8	0 2	0 0	0.0	0.0	
VMP-14-20-Dup	10/26/2020	0817	NM	NM	0.0	0	6.3	12.7	0 2	0 0	0.0	0.0	Duplicate sample.
VMP-14-20	11/23/2020	0945	-0.91	-0.61	0.0	0	7.0	12.2	0 2	0 0	0.0	0.0	
VMP-14-20	12/16/2020	0840	-11.75	-0.94	0.0	0	6.9	12.3	0.1	0 0	0.0	0.0	
VMP-14-20	1/19/2021	0922	-1.50	-0.46	0.0	0	5.5	14.3	0.1	0 0	0.0	0.0	
VMP-14-20	2/23/2021	0902	-0.51	-0.58	0.0	0	8.0	10.6	0 5	0 0	0.0	0.0	
VMP-14-20	3/17/2021	1027	-0.36	-0.18	0.0	0	6.7	12.5	0 6	0 0	0.0	0.0	
VMP-14-20	4/29/2021	0934	0.00	-0.36	0.0	0	4.7	14.7	0.4	0 0	0.0	0.0	
VMP-14-20	5/19/2021	0900	0.15	-3.07	0.0	0	5.9	13.4	0 0	0 0	0.0	0.0	
VMP-14-20	6/16/2021	0958	-0.23	-0.43	0.0	0	5.5	13.8	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-14-29	7/20/2020	0822	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	8/20/2020	1148	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	9/16/2020	0828	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	10/26/2020	0818	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	11/23/2020	0946	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	12/16/2020	0941	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	1/19/2021	0928	-1.03	-0.46	0.0	0	4.1	16.5	0 0	3 5	3.5	0.0	
VMP-14-29	2/23/2021	0903	-0.48	-0.55	0.0	0	4.9	14.7	0.1	15.1	15.1	0.0	
VMP-14-29	3/17/2021	1028	-0.38	-0.17	0.0	0	4.4	15.6	0 0	0 0	0.0	0.0	
VMP-14-29-Dup	3/17/2021	1028	NM	NM	0.0	0	4.3	15.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-14-29	4/29/2021	0836	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	5/19/2021	0901	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-14-29	6/16/2021	1000	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-17-5	7/20/2020	1052	0.00	0.00	0.0	0	1.6	19.0	0 0	0 0	0.0	0.0	
VMP-17-5	8/20/2020	1020	0.00	0.00	0.0	0	2.6	17.9	0 0	0 0	0.0	0.0	
VMP-17-5	9/16/2020	1100	0.00	0.00	0.0	0	2.2	18.6	0 0	0 0	0.0	0.0	
VMP-17-5	10/26/2020	1053	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5-Dup	10/26/2020	1053	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-17-5	11/23/2020	1125	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5	12/16/2020	1046	-0.18	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5	1/19/2021	1222	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5	2/24/2021	0912	-0.13	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5	3/17/2021	1135	-0.14	-0.13	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5-Dup	3/17/2021	1135	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-17-5	4/29/2021	1105	-0.17	-0.12	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-17-5	5/19/2021	1230	0.00	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-17-5	6/16/2021	1046	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-18-8.5	7/20/2020	1047	0.00	0.00	0.0	0	4.1	15.7	1 3	5 5	0.0	5.5	Re-sampled to confirm initial sample.
VMP-18-8.5	7/21/2020	0800	0.00	NM	0.0	0	4.4	15.9	1 5	4 6	0.0	4.6	Re-sample.
VMP-18-8.5	8/20/2020	1015	0.00	0.00	0.0	0	4.1	14.8	0.1	0 0	0.0	0.0	
VMP-18-8.5	9/16/2020	1045	0.00	0.00	0.0	0	4.8	14.4	0 0	0 0	0.0	0.0	
VMP-18-8.5	10/26/2020	1147	-0.21	0.00	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-18-8.5	11/23/2020	1045	-0.31	-0.23	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-18-8 5-Dup	11/23/2020	1045	NM	NM	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-18-8.5	12/16/2020	1036	-0.36	-0.29	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-18-8.5	1/19/2021	1208	-0.15	-0.15	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-18-8.5	2/24/2021	0918	-0.41	-0.42	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-18-8.5	3/17/2021	1120	-0.52	-0.39	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-18-8 5-Dup	3/17/2021	1120	NM	NM	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-18-8.5	4/30/2021	1200	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Vehicle parked on well vault. Could not access.
VMP-18-8.5	5/19/2021	1219	0.00	-0.33	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-18-8.5	6/16/2021	1033	-0.27	-0.23	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-19-5	7/20/2020	1115	0.00	0.00	0.0	0	1.2	19.3	0.1	0 0	0.0	0.0	
VMP-19-5	8/20/2020	1010	0.00	0.00	0.0	0	1.8	18.2	0 0	0 0	0.0	0.0	
VMP-19-5	9/16/2020	1050	0.00	0.00	0.0	0	2.2	18.0	0 0	0 0	0.0	0.0	
VMP-19-5	10/26/2020	1156	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-19-5	11/23/2020	1058	-0.24	-0.22	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-19-5	12/16/2020	1040	-0.27	-0.25	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-19-5	1/19/2021	1214	-0.16	-0.14	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-19-5	2/24/2021	0924	-0.41	-0.35	0.0	0	0.0	20.9	0 0	0.4	0.4	0.0	
VMP-19-5	3/17/2021	1130	-0.39	0.34	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-19-5	4/29/2021	1056	-0.79	-0.36	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-19-5	5/19/2021	1225	-0.29	-0.30	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-19-5	6/16/2021	1038	-0.24	-0.22	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-29-10	7/20/2020	0925	-0.12	-0.14	0.0	0	1.0	19.9	0 2	0 0	0.0	0.0	
VMP-29-10	8/20/2020	1218	0.00	-0.68	0.0	0	1.1	19.0	0 0	0 0	0.0	0.0	
VMP-29-10	9/16/2020	0914	-0.57	0.09	0.0	0	1.4	18.7	0 0	0 0	0.0	0.0	
VMP-29-10	10/26/2020	0905	-0.68	-0.18	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-29-10	11/23/2020	0859	0.00	0.00	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-29-10	12/16/2020	0923	-0.33	-0.16	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-29-10	1/19/2021	1105	0.00	-0.19	0.0	0	0.0	20.9	2.1	3 9	0.0	3.9	
VMP-29-10	2/23/2021	0955	-0.22	-0.18	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-29-10	3/17/2021	0900	-0.11	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-29-10	4/29/2021	0930	0.00	-0.17	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-29-10	5/19/2021	0948	-0.12	-0.16	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-29-10	6/16/2021	0900	0.00	-0.09	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-29-18	7/20/2020	0926	0.00	0.00	0.0	0	1.1	19.7	1 3	1 9	0.0	1.9	
VMP-29-18	8/20/2020	1219	0.00	-0.19	0.0	0	1.2	19.0	3 3	5 6	0.0	5.6	
VMP-29-18	9/16/2020	0920	0.00	0.00	0.0	0	1.5	18.5	0 9	0 0	0.0	0.0	
VMP-29-18	10/26/2020	0906	-0.13	-0.21	0.0	0	0.4	20.6	1 6	0 9	0.0	0.9	
VMP-29-18	11/23/2020	0903	-0.15	0.00	0.0	0	0.2	20.6	0 2	0 0	0.0	0.0	
VMP-29-18	12/16/2020	0930	-0.20	-0.17	0.0	0	0.2	20.7	0.1	0 0	0.0	0.0	
VMP-29-18	1/19/2021	1107	-0.16	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-29-18	2/23/2021	0956	0.00	-0.11	0.0	0	0.2	20.6	0.1	0 0	0.0	0.0	
VMP-29-18	3/17/2021	0901	-0.12	-0.50	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-29-18	4/29/2021	0934	0.00	0.00	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-29-18-Dup	4/29/2021	0934	NM	NM	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-29-18	5/19/2021	0949	-0.15	-0.16	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-29-18	6/16/2021	0904	0.00	-0.11	0.0	0	0.3	20.6	0 5	0 2	0.0	0.2	SVE system off-line from 0754 to 0936 due to power outage.
VMP-29-26	7/20/2020	0927	0.00	0.00	0.0	0	1.3	19.4	0 3	1.1	0.2	0.9	
VMP-29-26	8/20/2020	1220	0.00	0.00	0.0	0	1.5	18.5	0 2	0 0	0.0	0.0	
VMP-29-26	9/16/2020	0928	0.00	0.00	0.0	0	1.7	18.1	0 0	0 0	0.0	0.0	
VMP-29-26	10/26/2020	0907	-0.12	-0.22	0.0	0	1.2	19.7	0 2	14.4	13.4	1.0	
VMP-29-26	11/23/2020	0907	-0.14	-0.10	0.0	0	1.0	19.8	0.1	0 0	0.0	0.0	
VMP-29-26	12/16/2020	0939	-0.20	-0.18	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	
VMP-29-26	1/19/2021	1109	-0.17	0.00	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	
VMP-29-26	2/23/2021	0957	-0.25	-0.19	0.0	0	0.9	19.5	0 0	0 0	0.0	0.0	
VMP-29-26	3/17/2021	0902	-0.10	-0.15	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	
VMP-29-26	4/29/2021	0938	-0.24	0.00	0.0	0	0.8	19.6	0 0	0 0	0.0	0.0	
VMP-29-26	5/19/2021	0951	-0.14	-0.13	0.0	0	0.5	20.0	0 0	0 0	0.0	0.0	
VMP-29-26	6/16/2021	0906	0.00	-0.12	0.0	0	0.7	19.7	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-29-40	7/20/2020	0928	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	8/20/2020	1221	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	9/16/2020	0929	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	10/26/2020	0908	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	11/23/2020	0908	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	12/16/2020	0940	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	1/19/2021	1111	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	2/23/2021	0958	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	3/17/2021	0902	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	4/29/2021	0940	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	5/19/2021	0951	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-29-40	6/16/2021	0908	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-30-10	7/20/2020	0901	0.00	0.00	0.0	0	0.1	20.7	0 8	0 3	0.0	0.3	
VMP-30-10	8/20/2020	1215	0.00	0.00	0.0	0	0.2	19.2	0 3	0 0	0.0	0.0	
VMP-30-10	9/16/2020	0854	0.00	0.00	0.0	0	0.4	19.1	0 0	0 0	0.0	0.0	
VMP-30-10	10/26/2020	0846	-0.24	-0.23	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	11/23/2020	0814	-0.18	-0.15	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-30-10	12/16/2020	0904	-0.23	-0.23	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	1/19/2021	1026	-0.24	0.18	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	2/23/2021	0938	-0.18	-0.21	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	3/17/2021	0925	-0.16	-0.19	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	4/29/2021	0910	-0.33	-0.23	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	5/19/2021	0930	-0.17	-0.20	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-10	6/16/2021	0922	0.00	-0.16	0.0	0	0.0	20.9	0 9	0 3	0.0	0.3	SVE system off-line from 0754 to 0936 due to power outage.
VMP-30-18	7/20/2020	0902	0.00	0.00	0.0	0	0.1	20.7	0 6	1 2	0.0	1.2	
VMP-30-18	8/20/2020	1216	0.00	0.00	0.0	0	0.2	19.4	0 0	0 0	0.0	0.0	
VMP-30-18	9/16/2020	0900	0.00	0.00	0.0	0	0.3	18.9	0 3	0 0	0.0	0.0	
VMP-30-18	10/26/2020	0847	-0.48	-0.45	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-30-18	11/23/2020	0914	-0.18	-0.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-18	12/16/2020	0907	-0.48	-0.45	0.0	0	0.1	20.9	0 0	0 0	0.0	0.0	
VMP-30-18	1/19/2021	1028	-0.35	-0.27	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-30-18	2/23/2021	0939	-0.45	-0.43	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-30-18	3/17/2021	0926	-0.35	-0.62	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-18	4/29/2021	0912	-0.71	-0.71	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-30-18	5/19/2021	0931	-0.63	-0.40	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-18	6/16/2021	0924	0.00	-0.34	0.0	0	0.0	20.9	2 6	6 9	0.0	6.9	SVE system off-line from 0754 to 0936 due to power outage.
VMP-30-26	7/20/2020	0903	0.00	0.00	0.0	0	0.2	20.4	1.1	6 3	5.3	1.0	
VMP-30-26	8/20/2020	1217	0.00	0.00	0.0	0	0.3	19.4	0 2	1 6	1.6	0.0	
VMP-30-26-Dup	8/20/2020	1217	NM	NM	0.0	0	0.3	19.3	0 2	1 6	1.6	0.0	Duplicate sample.
VMP-30-26	9/16/2020	0908	0.00	0.00	0.0	0	0.4	18.8	0 3	0 5	0.5	0.0	
VMP-30-26	10/26/2020	0848	-0.52	-0.52	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-30-26	11/23/2020	0922	-0.40	-0.37	0.0	0	0.1	20.8	0.1	0 0	0.0	0.0	
VMP-30-26	12/16/2020	0915	-0.50	-0.46	0.0	0	0.1	20.9	0.1	0 0	0.0	0.0	
VMP-30-26	1/19/2021	1030	-0.36	-0.28	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-30-26	2/23/2021	0940	-0.47	-0.44	0.0	0	0.6	19.7	0 0	0 0	0.0	0.0	
VMP-30-26	3/17/2021	0927	-0.38	0.14	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-30-26	4/29/2021	0914	-0.58	-0.45	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-30-26	5/19/2021	0932	-0.39	-0.42	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-30-26	6/16/2021	0926	0.00	-0.34	0.0	0	0.2	20.5	2 5	9 3	0.0	9.3	SVE system off-line from 0754 to 0936 due to power outage.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-30-40	7/20/2020	0904	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	8/20/2020	1218	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	9/16/2020	0909	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	10/26/2020	0850	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	11/23/2020	0923	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	12/16/2020	0920	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	1/19/2021	1032	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	2/23/2021	0941	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	3/17/2021	0928	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	4/29/2021	0918	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	5/19/2021	0933	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-30-40	6/16/2021	0928	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-32-5	7/21/2020	0930	-0.90	-0.19	0.0	0	2.5	18.1	0 0	0 0	0.0	0.0	
VMP-32-5	7/31/2020	0826	-0.31	NM	0.0	0	2.1	19.6	0 3	0 0	0.0	0.0	
VMP-32-5	8/19/2020	1001	-0.11	-0.16	0.0	0	1.7	19.4	0 0	0 0	0.0	0.0	
VMP-32-5	9/17/2020	0824	-0.15	-0.18	0.0	0	1.7	19.6	0 0	0 0	0.0	0.0	
VMP-32-5	9/29/2020	1210	0.03	NM	0.0	0	2.4	19.8	0 0	0 0	0.0	0.0	
VMP-32-5	10/6/2020	1404	0.00	NM	0.0	0	2.9	18.6	0 0	0 0	0.0	0.0	
VMP-32-5	10/13/2020	1453	-0.18	NM	0.0	0	2.7	17.7	0 2	0 0	0.0	0.0	
VMP-32-5	10/20/2020	1254	0.00	NM	0.0	0	2.9	18.0	0 0	0 0	0.0	0.0	
VMP-32-5	10/27/2020	0825	0.02	-0.14	0.0	0	2.8	18.0	0 0	0 0	0.0	0.0	
VMP-32-5	11/24/2020	1000	0.00	0.00	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-32-5	12/17/2020	0950	-0.17	-0.17	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-32-5	1/20/2021	1035	0.17	-0.05	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-32-5	2/25/2021	1100	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Vehicle parked on well vault. Could not access.
VMP-32-5	3/18/2021	1058	-1.32	-1.26	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-32-5	4/30/2021	1048	-0.25	-0.19	0.0	0	0.7	20.2	3 3	8 6	0.0	8.6	
VMP-32-5	4/30/2021	1335	-0.21	NM	0.0	0	0.6	20.3	3 3	7 8	0.0	7.8	
VMP-32-5	5/20/2021	1054	-0.19	-0.18	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	
VMP-32-5	6/17/2021	1330	0.00	0.00	0.0	0	1.6	18.8	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-32-10	7/21/2020	0931	-0.27	-0.29	0.0	0	2.4	18.2	0 0	0 0	0.0	0.0	
VMP-32-10	7/31/2020	0827	-0.42	NM	0.0	0	2.6	18.7	0 2	0 0	0.0	0.0	
VMP-32-10	8/19/2020	1002	-0.17	-0.20	0.0	0	0.1	19.0	0 0	0 0	0.0	0.0	
VMP-32-10	9/17/2020	0825	-0.20	-0.19	0.0	0	2.1	19.3	0 0	0 0	0.0	0.0	
VMP-32-10	9/29/2020	1212	0.03	NM	0.0	0	2.5	19.2	0 0	0 0	0.0	0.0	
VMP-32-10	10/6/2020	1406	0.00	NM	0.0	0	2.6	19.4	0 0	0 0	0.0	0.0	
VMP-32-10	10/13/2020	1457	0.00	NM	0.0	0	2.6	18.2	0.1	0 0	0.0	0.0	
VMP-32-10	10/20/2020	1252	0.00	NM	0.0	0	2.6	18.6	0 0	0 0	0.0	0.0	
VMP-32-10	10/27/2020	0826	-0.08	0.03	0.0	0	2.7	18.4	0 0	0 0	0.0	0.0	
VMP-32-10	11/24/2020	1001	-0.19	-0.12	0.0	0	1.7	19.8	0 0	0 0	0.0	0.0	
VMP-32-10	12/17/2020	0951	-0.25	-0.26	0.0	0	0.9	20.3	0 0	0 0	0.0	0.0	
VMP-32-10	1/20/2021	1036	-0.10	-0.10	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-32-10	2/25/2021	1101	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Vehicle parked on well vault. Could not access.
VMP-32-10	3/18/2021	1059	-1.55	-1.45	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-32-10	4/30/2021	1050	-0.34	-0.29	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-32-10	5/20/2021	1056	-0.28	-0.25	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-32-10	6/17/2021	1331	0.00	-0.10	0.0	0	1.4	18.8	0 0	0 0	0.0	0.0	
VMP-32-20	7/21/2020	0932	-0.21	-0.19	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-32-20	7/31/2020	0828	-0.35	NM	0.0	0	0.7	20.6	0 2	0 0	0.0	0.0	
VMP-32-20	8/19/2020	1003	-0.12	-0.17	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-32-20	9/17/2020	0826	-0.17	-0.14	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-32-20	9/29/2020	1214	0.01	NM	0.0	0	0.9	19.7	0 0	0 0	0.0	0.0	
VMP-32-20	10/6/2020	1408	0.00	NM	0.0	0	1.5	19.0	0 0	0 0	0.0	0.0	
VMP-32-20	10/13/2020	1459	0.00	NM	0.0	0	2.2	18.2	0.1	0 0	0.0	0.0	
VMP-32-20	10/20/2020	1250	0.00	NM	0.0	0	1.6	17.6	0 0	0 0	0.0	0.0	
VMP-32-20	10/27/2020	0827	0.00	0.00	0.0	0	1.4	18.0	0 0	0 0	0.0	0.0	
VMP-32-20	11/24/2020	1002	-0.11	-0.10	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-32-20	12/17/2020	0952	0.00	-0.14	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-32-20	1/20/2021	1037	-0.63	-0.11	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-32-20	2/25/2021	1102	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Vehicle parked on well vault. Could not access.
VMP-32-20	3/18/2021	1100	-0.95	-0.50	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-32-20	4/30/2021	1052	-0.21	-0.15	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-32-20	5/20/2021	1058	-0.17	-0.25	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-32-20	6/17/2021	1332	0.00	0.00	0.0	0	0.8	19.5	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-32-30	7/21/2020	0934	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-32-30	7/31/2020	0831	-0.35	NM	0.0	0	2.3	19.0	0.1	0 0	0.0	0.0	
VMP-32-30	8/19/2020	1004	-0.10	-0.13	0.0	0	1.6	19.4	0 0	0 0	0.0	0.0	
VMP-32-30	9/17/2020	0827	-0.13	-0.11	0.0	0	1.7	19.9	0 0	0 0	0.0	0.0	
VMP-32-30-Dup	9/17/2020	0827	NM	NM	0.0	0	1.7	19.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-32-30	9/29/2020	1216	-0.18	NM	0.0	0	1.9	19.7	0 0	0 0	0.0	0.0	
VMP-32-30	10/6/2020	1410	0.00	NM	0.0	0	2.3	18.5	0 0	0 0	0.0	0.0	
VMP-32-30	10/13/2020	1502	0.00	NM	0.0	0	2.4	17.4	0.1	0 0	0.0	0.0	
VMP-32-30	10/20/2020	1248	0.00	NM	0.0	0	2.4	18.0	0 0	0 0	0.0	0.0	
VMP-32-30	10/27/2020	0828	0.00	0.80	0.0	0	2.2	18.4	0 0	0 0	0.0	0.0	
VMP-32-30	11/24/2020	1003	0.00	0.00	0.0	0	1.9	19.5	0 0	0 0	0.0	0.0	
VMP-32-30	12/17/2020	0953	-0.16	-0.14	0.0	0	0.8	20.4	0 2	0 0	0.0	0.0	
VMP-32-30	1/20/2021	1038	-0.08	-0.07	0.0	0	0.7	20.4	0 0	0 0	0.0	0.0	
VMP-32-30-Dup	1/20/2021	1038	NM	NM	0.0	0	0.7	20.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-32-30	2/25/2021	1103	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Vehicle parked on well vault. Could not access.
VMP-32-30	3/18/2021	1101	-1.03	-1.07	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-32-30	4/30/2021	1054	-0.17	-0.13	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-32-30-Dup	4/30/2021	1054	NM	NM	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-32-30	5/20/2021	1100	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-32-30	6/17/2021	1333	-0.43	0.00	0.0	0	1.3	18.8	0 0	0 0	0.0	0.0	
VMP-33-10	7/20/2020	0843	0.00	0.00	0.0	0	0.7	19.8	0 0	0 0	0.0	0.0	
VMP-33-10	8/19/2020	1106	0.00	0.00	0.0	0	1.5	17.2	0 0	0 0	0.0	0.0	
VMP-33-10-Dup	8/19/2020	1106	NM	NM	0.0	0	1.4	17.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-33-10	9/16/2020	1030	0.00	0.00	0.0	0	1.8	15.9	0 0	0 0	0.0	0.0	
VMP-33-10	10/26/2020	1145	0.00	0.28	0.0	0	2.0	15.4	0 0	0 0	0.0	0.0	
VMP-33-10	11/23/2020	1140	-0.02	0.00	0.0	0	1.8	16.4	0 0	0 0	0.0	0.0	
VMP-33-10	12/16/2020	1134	0.00	0.00	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-33-10	1/19/2021	1050	-0.04	0.00	0.0	0	0.7	20.4	0 0	0 0	0.0	0.0	
VMP-33-10	2/23/2021	1216	0.56	0.00	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-33-10	3/17/2021	1205	-0.13	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-33-10-Dup	3/17/2021	1205	NM	NM	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-33-10	4/29/2021	0915	-0.13	-0.09	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-33-10	5/19/2021	1038	-0.20	-0.60	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-10	6/16/2021	1105	-0.34	-0.29	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-33-20	7/20/2020	0844	0.00	0.00	0.0	0	0.7	20.1	0 0	0 0	0.0	0.0	
VMP-33-20	8/19/2020	1107	0.00	0.00	0.0	0	1.3	18.6	0 0	0 0	0.0	0.0	
VMP-33-20	9/16/2020	1031	0.00	0.00	0.0	0	1.8	16.7	0 0	0 0	0.0	0.0	
VMP-33-20	10/26/2020	1146	0.00	0.43	0.0	0	2.0	15.9	0.1	0 0	0.0	0.0	
VMP-33-20	11/23/2020	1141	0.00	0.00	0.0	0	1.8	16.5	0 0	0 0	0.0	0.0	
VMP-33-20	12/16/2020	1136	-0.07	0.00	0.0	0	1.2	19.1	0 0	0 0	0.0	0.0	
VMP-33-20	1/19/2021	1051	-0.07	0.00	0.0	0	1.0	20.2	0 0	0 0	0.0	0.0	
VMP-33-20-Dup	1/19/2021	1051	NM	NM	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-33-20	2/23/2021	1218	0.00	0.00	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-33-20	3/17/2021	1206	-0.10	-0.09	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-33-20	4/29/2021	0916	-0.11	-0.19	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-33-20	5/19/2021	1040	-3.17	-3.23	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-33-20	6/16/2021	1106	-2.25	-2.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30	7/20/2020	0845	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30	8/19/2020	1108	0.00	0.00	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	
VMP-33-30	9/16/2020	1032	0.00	0.00	0.0	0	1.5	17.9	0 0	0 0	0.0	0.0	
VMP-33-30	10/26/2020	1147	0.00	0.00	0.0	0	2.1	15.7	0.1	0 0	0.0	0.0	
VMP-33-30	11/23/2020	1142	0.00	0.00	0.0	0	1.5	17.1	0 0	0 0	0.0	0.0	
VMP-33-30	12/16/2020	1138	0.00	0.00	0.0	0	0.5	20.3	0 0	0 0	0.0	0.0	
VMP-33-30	1/19/2021	1052	-0.02	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30	2/23/2021	1220	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30	3/17/2021	1207	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30	4/29/2021	0917	-0.09	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30	5/19/2021	1042	-0.62	-0.61	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-33-30-Dup	5/19/2021	1042	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-33-30	6/16/2021	1107	-0.46	-0.61	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-34-10	7/20/2020	0853	-1.38	-1.91	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-34-10	8/19/2020	1055	-0.23	-0.18	0.0	0	0.8	19.9	0 0	0 0	0.0	0.0	
VMP-34-10	9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-10	10/26/2020	1113	-0.12	0.03	0.0	0	2.9	16.8	0 0	0 0	0.0	0.0	
VMP-34-10	11/23/2020	1105	-0.46	-0.38	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-34-10	12/16/2020	1110	-0.32	-0.22	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-34-10	1/19/2021	1030	-0.34	-0.23	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-34-10	2/23/2021	1148	-0.80	-0.71	0.0	0	0.1	20.8	0 3	6 3	1.7	4.6	Re-sampled to confirm initial results.
VMP-34-10	2/25/2021	0937	-0.96	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-34-10	3/17/2021	1130	-1.40	-2.58	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-34-10	4/29/2021	0840	-0.24	-0.92	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-34-10	5/19/2021	1100	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-10	6/17/2021	1500	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-34-20	7/20/2020	0854	-0.45	-0.79	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-34-20	8/19/2020	1056	0.00	0.00	0.0	0	1.6	19.2	0 0	0 0	0.0	0.0	
VMP-34-20	9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-20	10/26/2020	1114	-0.36	0.35	0.0	0	3.2	16.1	0.1	0.7	0.7	0.0	
VMP-34-20	11/23/2020	1106	-0.93	-0.62	0.0	0	2.9	18.9	0 0	0 0	0.0	0.0	
VMP-34-20	12/16/2020	1112	-0.64	-0.44	0.0	0	1.8	19.9	0 0	0 0	0.0	0.0	
VMP-34-20	1/19/2021	1031	-0.70	-0.53	0.0	0	1.4	20.0	0 0	0 0	0.0	0.0	
VMP-34-20	2/23/2021	1150	-1.90	-1.74	0.0	0	0.8	20.3	0 0	0 9	0.9	0.0	Re-sampled to confirm initial results.
VMP-34-20	2/25/2021	0938	-2.17	NM	0.0	0	0.8	20.4	2.4	29.3	1.9	27.4	Re-sample.
VMP-34-20	3/17/2021	1131	-2.16	-1.85	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-34-20	4/29/2021	0841	-1.01	-1.46	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-34-20	5/19/2021	1102	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-20	6/17/2021	1501	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-30	7/20/2020	0855	-2.41	-2.45	0.0	0	2.9	18.1	0 5	7 9	7.9	0.0	
VMP-34-30-Dup	7/20/2020	0855	NM	NM	0.0	0	3.0	18.0	0 5	8 3	8.3	0.0	Duplicate sample.
VMP-34-30	8/19/2020	1057	-0.43	-0.28	0.0	0	3.2	17.6	0 2	4 9	4.9	0.0	
VMP-34-30	9/17/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-30	10/26/2020	1115	-0.42	0.00	0.0	0	3.9	15.2	0 9	3 3	3.3	0.0	
VMP-34-30	11/23/2020	1107	-0.58	-0.70	0.0	0	4.1	16.1	0 0	13.9	13 9	0.0	
VMP-34-30	12/16/2020	1114	-0.76	-0.53	0.0	0	4.1	16.7	0 0	0.7	0.7	0.0	
VMP-34-30	1/19/2021	1032	-0.80	-0.62	0.0	0	3.6	18.2	0 0	0 0	0.0	0.0	
VMP-34-30	2/23/2021	1152	-2.25	-2.04	0.0	0	3.8	17.2	0 2	30.7	30.7	0.0	Re-sampled to confirm initial results.
VMP-34-30	2/25/2021	0939	-2.68	NM	0.0	0	3.6	17.8	0 0	1 5	1.5	0.0	Re-sample.
VMP-34-30	3/17/2021	1132	-2.25	-2.12	0.0	0	3.9	17.3	0 0	6 9	6.9	0.0	
VMP-34-30	4/29/2021	0842	-1.73	-1.58	0.0	0	3.1	19.3	0 0	0 0	0.0	0.0	
VMP-34-30	5/19/2021	1102	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-34-30	6/17/2021	1502	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-35-10	7/20/2020	0910	-1.86	-1.76	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	8/19/2020	1037	-0.12	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	9/17/2020	0910	-0.91	-0.91	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	10/26/2020	1000	-0.18	-0.24	0.0	0	1.2	20.3	6 2	20.4	0.0	20.4	
VMP-35-10	11/23/2020	1025	-4.55	-2.31	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	12/16/2020	1056	-1.74	-1.68	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	1/19/2021	1020	-1.85	-1.69	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-35-10	2/23/2021	1130	-1.67	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	3/17/2021	1115	-1.93	-2.61	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	4/29/2021	1010	-2.41	-2.17	0.0	0	0.0	17.7	0 0	0 0	0.0	0.0	
VMP-35-10	5/19/2021	1006	-2.02	-1.96	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-10	6/16/2021	1050	0.00	-0.90	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-35-20	7/20/2020	0911	-0.97	-0.74	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	8/19/2020	1038	-0.58	-0.44	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	9/17/2020	0911	-0.39	-0.37	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20-Dup	9/17/2020	0911	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-35-20	10/26/2020	1001	-0.07	-0.07	0.0	0	0.4	20.6	7.7	27.2	0.2	27 0	
VMP-35-20	11/23/2020	1026	-2.04	-1.01	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	12/16/2020	1058	-0.73	-0.67	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	1/19/2021	1021	-0.97	-0.81	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	2/23/2021	1132	-23 24	-0.90	0.0	0	0.0	20.9	0.1	0 8	0.3	0.5	
VMP-35-20	3/17/2021	1116	0.15	-2.36	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	4/29/2021	1011	-0.18	-1.07	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	5/19/2021	1008	-0.76	-0.74	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20	6/16/2021	1051	-0.26	-0.29	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-20-Dup	6/16/2021	1051	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-35-30	7/20/2020	0912	-0.54	-0.51	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	8/19/2020	1039	-0.36	-0.28	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	9/17/2020	0912	-0.28	-0.28	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	10/26/2020	1002	-0.06	-0.06	0.0	0	0.2	20.8	5.1	18.8	1.5	17 3	
VMP-35-30-Dup	10/26/2020	1002	NM	NM	0.0	0	0.1	20.7	5.1	19.0	1.7	17 3	Duplicate sample.
VMP-35-30	11/23/2020	1027	-1.65	-0.83	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	12/16/2020	1100	-0.60	-0.59	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30-Dup	12/16/2020	1100	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-35-30	1/19/2021	1022	-0.82	-0.73	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	2/23/2021	1134	-0.49	-0.42	0.0	0	0.0	2.9	0.1	1 2	0.2	1.0	
VMP-35-30	3/17/2021	1117	-0.50	-2.61	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	4/29/2021	1012	-0.94	-0.77	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	5/19/2021	1010	-0.71	-0.70	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-35-30	6/16/2021	1052	-0.24	-0.28	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	7/20/2020	0931	-0.11	-0.08	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	8/19/2020	1000	-0.11	-0.09	0.0	0	0.0	20.9	0 0	1.1	1.1	0.0	
VMP-36-10	9/16/2020	0948	0.00	0.00	0.0	0	0.0	20.9	2 3	13.6	0.0	13 6	Re-sampled to confirm initial sample.
VMP-36-10	9/17/2020	0853	0.00	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-36-10	10/26/2020	0948	0.00	-0.02	0.0	0	0.2	20.7	0.1	0 8	0.8	0.0	
VMP-36-10	11/23/2020	0955	-0.25	-0.21	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	12/16/2020	1024	-0.13	-0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	1/19/2021	0945	-0.04	-0.05	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	2/23/2021	1032	-0.44	-0.50	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	3/17/2021	1100	0.00	1.02	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	4/29/2021	1025	-1.05	-1.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	5/19/2021	0952	0.00	-0.11	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-10	6/16/2021	1040	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-36-20	7/20/2020	0932	-0.39	-0.26	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	8/19/2020	1001	-0.19	-0.18	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	9/16/2020	0949	0.00	0.00	0.0	0	0.1	20.7	8.4	54.9	0.0	54 9	Re-sampled to confirm initial sample.
VMP-36-20	9/17/2020	0855	0.00	NM	0.0	0	0.1	20.7	0 2	0 0	0.0	0.0	Re-sample.
VMP-36-20	10/26/2020	0949	0.00	0.08	0.0	0	0.6	19.9	0 0	0 8	0.8	0.0	
VMP-36-20	11/23/2020	0956	-1.08	-0.54	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	12/16/2020	1026	-0.32	-0.30	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	1/19/2021	0946	-0.17	-0.20	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	2/23/2021	1034	-0.61	-0.61	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	3/17/2021	1101	-0.35	-1.01	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	4/29/2021	1026	-1.40	-1.36	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	5/19/2021	0954	-0.83	-0.75	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-20	6/16/2021	1041	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	7/20/2020	0933	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	8/19/2020	1002	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	9/16/2020	0930	0.00	0.00	0.0	0	0.0	20.9	0 2	0 9	0.0	0.9	Re-sampled to confirm initial sample.
VMP-36-30	9/17/2020	0855	0.00	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-36-30	10/26/2020	0950	0.00	0.00	0.0	0	0.0	20.9	0 2	0 0	0.0	0.0	
VMP-36-30	11/23/2020	0957	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30-Dup	11/23/2020	0957	NM	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-36-30	12/16/2020	1028	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	1/19/2021	0947	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	2/23/2021	1036	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	3/17/2021	1102	0.00	0.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	4/29/2021	1027	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-36-30	5/19/2021	0956	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-36-30	6/16/2021	1042	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-37-10	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-37-10	8/19/2020	0938	-0.11	-0.14	0.0	0	2.5	17.5	0 0	0 0	0.0	0.0	
VMP-37-10	9/16/2020	0934	0.00	0.00	0.0	0	12.8	3.8	0 8	0 0	0.0	0.0	
VMP-37-10	10/26/2020	0930	-0.07	-0.17	0.0	0	12.8	6.4	0.4	11.0	1.1	9.9	
VMP-37-10	11/23/2020	1215	-0.20	-0.30	0.0	0	6.3	11.3	0 0	0 0	0.0	0.0	
VMP-37-10	12/16/2020	1012	-0.31	-0.26	0.0	0	4.4	14.2	0 0	0 0	0.0	0.0	
VMP-37-10	1/19/2021	0935	-0.34	-0.26	0.0	0	11.6	3.2	0.1	0 0	0.0	0.0	
VMP-37-10	2/23/2021	1018	-0.47	-0.50	0.0	0	10.6	2.4	0.1	0 0	0.0	0.0	
VMP-37-10	3/17/2021	1025	-0.20	-0.16	0.0	0	0.6	18.4	0 0	0 0	0.0	0.0	
VMP-37-10	4/29/2021	1035	-0.72	-0.61	0.0	0	6.4	9.0	0 0	0 0	0.0	0.0	
VMP-37-10	5/19/2021	0940	-0.36	-0.36	0.0	0	1.1	19.3	0 0	0 0	0.0	0.0	
VMP-37-10	6/16/2021	1005	-0.13	0.00	0.0	0	1.9	17.7	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-37-20	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-37-20	8/19/2020	0939	-0.23	-0.26	0.0	0	3.8	16.3	0 2	9 9	9.9	0.0	
VMP-37-20	9/16/2020	0935	0.00	-0.12	0.0	0	12.0	3.4	1.7	17.0	12 0	5.0	
VMP-37-20	10/26/2020	0931	-0.10	-0.26	0.1	3	13.5	3.2	37.8	196	35 0	161	
VMP-37-20	11/23/2020	1216	-0.72	-0.70	0.0	0	8.3	9.7	7.1	41.0	8.0	33 0	
VMP-37-20	12/16/2020	1014	-0.59	-0.52	0.0	0	6.9	12.4	0.1	1.7	1.5	0.2	
VMP-37-20	1/19/2021	0936	-0.63	-0.58	0.0	0	11.3	5.6	1 9	13.0	10 0	3.0	
VMP-37-20	2/23/2021	1020	-0.49	-0.89	0.0	0	8.7	7.5	0.1	3 0	3.0	0.0	
VMP-37-20	3/17/2021	1026	-0.48	-0.47	0.0	0	4.0	15.0	0 0	0 0	0.0	0.0	
VMP-37-20	4/29/2021	1036	-1.26	-1.19	0.0	0	6.5	10.3	0.1	2 0	2.0	0.0	
VMP-37-20	5/19/2021	0942	-0.92	-0.78	0.0	0	4.0	15.7	0 0	0 0	0.0	0.0	
VMP-37-20	6/16/2021	1006	-0.10	0.00	0.0	0	5.3	12.8	0 2	0 0	0.0	0.0	
VMP-37-30	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-37-30	8/19/2020	0940	-0.56	0.00	0.0	0	2.9	15.6	0 0	2.1	2.1	0.0	
VMP-37-30	9/16/2020	0936	-0.26	-0.37	0.0	0	3.8	13.2	1.4	3 5	1.0	2.5	
VMP-37-30-Dup	9/16/2020	0936	NM	NM	0.0	0	3.8	13.2	1.4	3 6	1.1	2.5	Duplicate sample.
VMP-37-30	10/26/2020	0932	-0.26	-0.50	0.0	0	6.4	6.9	0 0	26.0	26 0	0.0	
VMP-37-30	11/23/2020	1217	-1.68	-1.71	0.0	0	5.5	10.2	0 0	0 0	0.0	0.0	
VMP-37-30	12/16/2020	1016	-1.39	-1.34	0.0	0	5.0	14.8	0 0	0 0	0.0	0.0	
VMP-37-30	1/19/2021	0937	-1.45	-1.46	0.0	0	4.6	15.7	0 0	1 6	1.6	0.0	
VMP-37-30	2/23/2021	1022	-2.01	-1.93	0.0	0	4.4	14.4	0 0	0 0	0.0	0.0	
VMP-37-30-Dup	2/23/2021	1022	NM	NM	0.0	0	4.5	14.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-37-30	3/17/2021	1027	-1.26	-1.25	0.0	0	3.3	17.4	0 0	0 0	0.0	0.0	
VMP-37-30-Dup	3/17/2021	1027	NM	NM	0.0	0	3.3	17.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-37-30	4/29/2021	1037	-2.47	-2.38	0.0	0	2.9	17.7	0 0	0 0	0.0	0.0	
VMP-37-30-Dup	4/29/2021	1037	NM	NM	0.0	0	2.9	17.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-37-30	5/19/2021	0944	-1.93	-1.83	0.0	0	2.5	17.5	0 0	0 0	0.0	0.0	
VMP-37-30	6/16/2021	1007	-0.74	0.00	0.0	0	2.8	17.3	0 0	0 0	0.0	0.0	
VMP-38-10	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-38-10	8/19/2020	0927	0.00	0.00	0.0	0	6.6	7.8	0 0	0 0	0.0	0.0	
VMP-38-10	9/16/2020	0925	0.00	0.00	0.0	0	8.1	6.9	0.1	0 0	0.0	0.0	
VMP-38-10	10/26/2020	0910	-0.07	-0.15	0.0	0	8.7	6.8	0 0	0 0	0.0	0.0	
VMP-38-10	11/23/2020	0940	-0.84	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. Water encountered during purge.
VMP-38-10	12/16/2020	1000	-3.87	-0.07	0.0	0	3.4	16.9	0 0	0 0	0.0	0.0	
VMP-38-10	1/19/2021	0920	-24.45	-0.16	0.0	0	2.4	17.9	0 0	0 0	0.0	0.0	
VMP-38-10	2/23/2021	1004	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-38-10	3/17/2021	1010	-28.74	0.00	0.0	0	1.0	19.0	0 0	0 0	0.0	0.0	
VMP-38-10	4/29/2021	1048	0.00	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-38-10	5/19/2021	0930	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-38-10	6/16/2021	0950	-1.13	0.00	0.0	0	2.8	17.8	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-38-20	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-38-20	8/19/2020	0928	-0.13	-0.11	0.0	0	1.5	17.2	0 0	0 0	0.0	0.0	
VMP-38-20	9/16/2020	0926	0.00	0.00	0.0	0	1.9	14.6	0 0	0 0	0.0	0.0	
VMP-38-20	10/26/2020	0911	0.00	0.00	0.0	0	3.2	11.4	0.1	0 0	0.0	0.0	
VMP-38-20	11/23/2020	0941	0.00	-0.03	0.0	0	3.5	12.8	0 0	0 0	0.0	0.0	
VMP-38-20	12/16/2020	1002	-0.19	-0.13	0.0	0	3.9	15.6	0 0	0 0	0.0	0.0	
VMP-38-20	1/19/2021	0921	-18 51	-0.19	0.0	0	3.5	17.3	0 0	0 0	0.0	0.0	
VMP-38-20	2/23/2021	1006	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-38-20	3/17/2021	1011	-28 52	0.14	0.0	0	2.7	18.8	0 0	0 0	0.0	0.0	
VMP-38-20	4/29/2021	1049	-1.45	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-38-20	5/19/2021	0932	-18.76	0.00	0.0	0	1.7	19.1	0 0	0 0	0.0	0.0	
VMP-38-20	6/16/2021	0951	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-38-27	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-38-27	8/19/2020	0929	-0.13	-0.12	0.0	0	1.0	17.9	0 0	0 0	0.0	0.0	
VMP-38-27	9/16/2020	0927	0.00	0.00	0.0	0	1.5	15.0	0 0	0.4	0.4	0.0	
VMP-38-27	10/26/2020	0912	-0.18	-0.14	0.0	0	3.2	11.6	0 0	0 0	0.0	0.0	
VMP-38-27-Dup	10/26/2020	0912	NM	NM	0.0	0	3.3	11.3	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-38-27	11/23/2020	0942	0.27	-0.03	0.0	0	3.6	12.9	0 0	0 0	0.0	0.0	
VMP-38-27	12/16/2020	1004	-0.42	-0.20	0.0	0	3.8	15.7	0 0	0 0	0.0	0.0	
VMP-38-27	1/19/2021	0922	-0.26	-0.18	0.0	0	3.6	17.2	0 0	0 0	0.0	0.0	
VMP-38-27	2/23/2021	1008	-0.25	-0.31	0.0	0	2.8	18.0	0 0	0 0	0.0	0.0	
VMP-38-27	3/17/2021	1012	-0.17	0.15	0.0	0	2.7	18.7	0 0	0 0	0.0	0.0	
VMP-38-27	4/29/2021	1050	-0.35	-0.38	0.0	0	1.6	19.4	0 0	0 0	0.0	0.0	
VMP-38-27	5/19/2021	0934	-0.47	-0.28	0.0	0	1.6	19.4	0 0	0 0	0.0	0.0	
VMP-38-27	6/16/2021	0952	0.00	0.00	0.0	0	1.8	18.8	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-38-27-Dup	6/16/2021	0952	NM	NM	0.0	0	1.8	18.8	0 0	0 0	0.0	0.0	Duplicate sample. SVE system off-line from 0754 to 0936 due to power outage.
VMP-39-10	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-39-10	7/29/2020	1412	0.00	NM	0.0	0	4.1	13.0	0.7	3 2	3.2	0.0	
VMP-39-10	8/19/2020	0914	0.00	0.00	0.0	0	2.8	16.8	0 0	14.0	14 0	0.0	Re-sampled to confirm initial sample.
VMP-39-10	8/20/2020	1022	0.00	NM	0.0	0	5.5	10.7	0 0	14.0	14 0	0.0	Re-sample.
VMP-39-10	9/16/2020	0910	0.00	0.00	0.0	0	8.5	6.4	0 0	0 0	0.0	0.0	
VMP-39-10	10/26/2020	0855	-0.16	-0.12	0.0	0	1.4	19.6	0 0	0 0	0.0	0.0	
VMP-39-10	11/23/2020	0930	-0.09	-0.21	0.0	0	1.8	19.2	0 0	0 0	0.0	0.0	
VMP-39-10	12/16/2020	0946	-0.10	-0.08	0.0	0	1.6	19.6	0 0	0 0	0.0	0.0	
VMP-39-10	1/19/2021	0910	0.12	0.00	0.0	0	1.0	19.7	0 0	0 0	0.0	0.0	
VMP-39-10	2/23/2021	0948	0.00	-0.09	0.0	0	0.6	20.3	0 0	3 0	3.0	0.0	
VMP-39-10	3/17/2021	0920	0.18	0.13	0.0	0	1.7	19.0	0 0	0 0	0.0	0.0	
VMP-39-10	4/29/2021	1105	0.00	-0.70	0.0	0	1.4	18.7	0 0	0 0	0.0	0.0	
VMP-39-10	5/19/2021	0920	-0.15	0.00	0.0	0	1.0	19.8	0 0	0 0	0.0	0.0	
VMP-39-10	6/16/2021	0935	0.00	0.00	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-39-20	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-39-20	7/29/2020	1413	0.00	NM	0.0	0	4.7	11.5	0 0	23.0	23 0	0.0	
VMP-39-20	8/19/2020	0915	0.00	0.00	0.0	0	0.4	20.4	0 0	3 8	3.8	0.0	Re-sampled to confirm initial sample.
VMP-39-20	8/20/2020	1026	0.00	NM	0.0	0	3.3	14.8	0 0	30.4	30.4	0.0	Re-sample.
VMP-39-20	9/16/2020	0911	0.00	0.00	0.0	0	6.8	9.9	0 0	21.0	19 0	2.0	
VMP-39-20	10/26/2020	0856	-0.06	-0.04	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-39-20	11/23/2020	0931	0.00	-0.07	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-39-20	12/16/2020	0948	-0.04	-0.03	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-39-20	1/19/2021	0911	0.03	0.00	0.0	0	0.1	20.8	0 0	1.4	1.4	0.0	
VMP-39-20	2/23/2021	0950	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-39-20	3/17/2021	0921	0.00	0.00	0.0	0	1.4	18.8	0 0	0 0	0.0	0.0	
VMP-39-20-Dup	3/17/2021	0921	NM	NM	0.0	0	1.4	18.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-39-20	4/29/2021	1106	-0.10	0.00	0.0	0	0.5	19.5	0 0	0 0	0.0	0.0	
VMP-39-20	5/19/2021	0922	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-39-20	6/16/2021	0936	0.00	0.00	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-39-30	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-39-30	7/29/2020	1414	0.00	NM	0.0	0	4.7	11.6	0 0	26.0	26 0	0.0	
VMP-39-30	8/19/2020	0916	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	Re-sampled to confirm initial sample.
VMP-39-30-Dup	8/19/2020	0916	NM	NM	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-39-30	8/20/2020	1029	0.00	NM	0.0	0	2.3	16.9	0 0	20.5	20 5	0.0	Re-sample.
VMP-39-30	9/16/2020	0912	0.00	0.00	0.0	0	6.0	11.5	0 0	17.0	17 0	0.0	
VMP-39-30	10/26/2020	0857	-0.06	-0.05	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-39-30	11/23/2020	0932	0.00	-0.08	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-39-30	12/16/2020	0950	-0.04	-0.05	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-39-30	1/19/2021	0912	0.05	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-39-30	2/23/2021	0952	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-39-30	3/17/2021	0922	0.00	0.00	0.0	0	1.3	18.9	0 0	0 0	0.0	0.0	
VMP-39-30	4/29/2021	1107	-0.10	0.00	0.0	0	0.4	20.0	0 0	0 0	0.0	0.0	
VMP-39-30	5/19/2021	0924	1.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-39-30	6/16/2021	0935	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-40-10	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-40-10	8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Port damaged during refinery construction activities.
VMP-40-10	9/16/2020	0700	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to pending re-installation.
VMP-40-10	10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to pending re-installation.
VMP-40-10	11/23/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Abandoned and replaced with VMP-65.
VMP-40-20	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-40-20	8/19/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Port damaged during refinery construction activities.
VMP-40-20	9/16/2020	0701	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to pending re-installation.
VMP-40-20	10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to pending re-installation.
VMP-40-20	11/23/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Abandoned and replaced with VMP-65.
VMP-40-30	7/21/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-40-30	8/19/2020	1231	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Port damaged during refinery construction activities.
VMP-40-30	9/16/2020	0702	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to pending re-installation.
VMP-40-30	10/27/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to pending re-installation.
VMP-40-30	11/23/2020	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Abandoned and replaced with VMP-65.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-41-10	7/20/2020	0945	0.00	0.00	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	
VMP-41-10	8/20/2020	1202	0.00	0.00	0.0	0	1.3	18.7	0 0	0 0	0.0	0.0	
VMP-41-10	9/16/2020	0943	0.00	0.00	0.0	0	2.0	18.1	0 0	0 0	0.0	0.0	
VMP-41-10	10/26/2020	0938	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-41-10	11/23/2020	0838	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-41-10	12/16/2020	0952	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-41-10	1/19/2021	1134	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-41-10	2/23/2021	1035	-0.09	-0.04	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-41-10	3/17/2021	0833	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-41-10	4/29/2021	1005	0.00	0.00	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-41-10	5/19/2021	1021	0.00	0.00	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-41-10	6/16/2021	0836	0.00	0.00	0.0	0	0.8	20.4	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-41-20	7/20/2020	0946	0.00	0.00	0.0	0	1.1	19.5	0.1	0 0	0.0	0.0	
VMP-41-20	8/20/2020	1203	0.00	0.00	0.0	0	1.3	18.6	0 0	0 0	0.0	0.0	
VMP-41-20	9/16/2020	0943	0.00	0.00	0.0	0	1.9	18.0	0 0	0 0	0.0	0.0	
VMP-41-20	10/26/2020	0939	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-41-20	11/23/2020	0839	0.00	0.00	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-41-20	12/16/2020	0953	0.00	0.00	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-41-20	1/19/2021	1136	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-41-20	2/23/2021	1036	-0.11	-0.07	0.0	0	0.4	20.0	0 0	0 0	0.0	0.0	
VMP-41-20	3/17/2021	0834	0.00	0.00	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-41-20	4/29/2021	1007	-0.09	0.00	0.0	0	0.4	20.2	0 0	0 0	0.0	0.0	
VMP-41-20	5/19/2021	1022	0.00	0.00	0.0	0	0.6	19.8	0 0	0 0	0.0	0.0	
VMP-41-20	6/16/2021	0838	0.00	0.00	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-41-26	7/20/2020	0947	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-41-26	8/20/2020	1204	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-41-26	9/16/2020	0944	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-41-26	10/26/2020	0938	0.00	0.00	0.0	0	0.4	20.7	0 0	0 0	0.0	0.0	
VMP-41-26	11/23/2020	0840	0.00	0.00	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-41-26	12/16/2020	0954	0.00	0.00	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-41-26	1/19/2021	1138	0.00	0.00	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-41-26	2/23/2021	1037	-0.11	-0.07	0.0	0	0.8	19.4	0 0	0 0	0.0	0.0	
VMP-41-26	3/17/2021	0835	0.06	0.00	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	
VMP-41-26	4/29/2021	1009	-0.10	0.00	0.0	0	0.6	19.8	0 0	0 0	0.0	0.0	
VMP-41-26	5/19/2021	1023	0.00	0.00	0.0	0	0.5	19.7	0 0	0 0	0.0	0.0	
VMP-41-26	6/16/2021	0840	0.00	0.00	0.0	0	0.8	20.0	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-42-10	7/21/2020	0905	0.00	0.00	0.0	0	1.9	19.6	0 0	0 0	0.0	0.0	
VMP-42-10	8/19/2020	0838	0.00	0.00	0.0	0	2.3	18.4	0 0	0 0	0.0	0.0	
VMP-42-10	9/17/2020	1252	0.00	0.00	0.0	0	2.6	18.7	0 0	0 0	0.0	0.0	
VMP-42-10	10/27/2020	1048	0.16	0.00	0.0	0	2.9	18.2	0 0	0 0	0.0	0.0	
VMP-42-10	11/24/2020	1230	0.00	0.00	0.0	0	2.3	19.5	0 0	0 0	0.0	0.0	
VMP-42-10	12/17/2020	1132	-0.03	-0.07	0.0	0	1.1	20.2	0 0	0 0	0.0	0.0	
VMP-42-10	1/19/2021	1420	-0.04	-0.05	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-42-10	2/24/2021	1045	-0.18	-0.20	0.0	0	0.3	20.8	0 0	0 0	0.0	0.0	
VMP-42-10	3/18/2021	1050	-0.46	-0.43	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-42-10	4/30/2021	1105	0.00	-0.10	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-42-10	5/20/2021	1006	-0.13	-0.21	0.0	0	0.9	20.2	0 0	0 0	0.0	0.0	
VMP-42-10	6/17/2021	1045	0.00	-0.09	0.0	0	1.1	19.8	0 0	0 0	0.0	0.0	
VMP-42-20	7/21/2020	0906	-0.16	-0.14	0.0	0	3.0	18.0	0 0	0 0	0.0	0.0	
VMP-42-20-Dup	7/21/2020	0906	NM	NM	0.0	0	2.9	18.1	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-42-20	8/19/2020	0839	-0.21	-0.12	0.0	0	3.1	17.7	0 0	0 0	0.0	0.0	
VMP-42-20	9/17/2020	1253	-0.13	0.00	0.0	0	3.5	17.4	0 0	0 0	0.0	0.0	
VMP-42-20	10/27/2020	1049	0.14	-0.04	0.0	0	3.6	17.6	0 0	0 0	0.0	0.0	
VMP-42-20	11/24/2020	1231	0.00	0.00	0.0	0	3.9	17.7	0 0	0 0	0.0	0.0	
VMP-42-20	12/17/2020	1134	-0.16	-0.19	0.0	0	3.0	19.2	0 0	0 0	0.0	0.0	
VMP-42-20	1/19/2021	1421	-0.15	-0.17	0.0	0	2.0	19.8	0 0	0 0	0.0	0.0	
VMP-42-20	2/24/2021	1046	-0.32	-0.66	0.0	0	1.5	20.2	0 0	0 0	0.0	0.0	
VMP-42-20	3/18/2021	1051	-1.03	-1.03	0.0	0	0.9	20.2	0 0	0 0	0.0	0.0	
VMP-42-20	4/30/2021	1106	-0.28	-0.34	0.0	0	0.7	19.9	0 0	0 0	0.0	0.0	
VMP-42-20	5/20/2021	1008	-0.53	-0.55	0.0	0	1.0	19.4	0 0	0 0	0.0	0.0	
VMP-42-20	6/17/2021	1046	-0.24	-0.28	0.0	0	1.8	19.1	0 0	0 0	0.0	0.0	
VMP-42-30	7/21/2020	0907	-0.27	-0.27	0.0	0	2.3	18.3	0 0	0 0	0.0	0.0	
VMP-42-30	8/19/2020	0840	-0.36	-0.24	0.0	0	2.8	17.9	0 0	0 0	0.0	0.0	
VMP-42-30	9/17/2020	1254	-0.15	-0.10	0.0	0	3.1	17.4	0 2	0 9	0.9	0.0	
VMP-42-30	10/27/2020	1050	0.21	-0.08	0.0	0	3.6	17.1	0 0	4 9	4.9	0.0	
VMP-42-30-Dup	10/27/2020	1050	NM	NM	0.0	0	3.7	17.1	0 0	5 5	5.5	0.0	Duplicate sample.
VMP-42-30	11/24/2020	1232	0.00	0.00	0.0	0	4.1	17.0	0 0	0 0	0.0	0.0	
VMP-42-30-Dup	11/24/2020	1232	NM	NM	0.0	0	4.1	16.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-42-30	12/17/2020	1136	-0.32	-0.33	0.0	0	4.1	18.3	0 0	0 0	0.0	0.0	
VMP-42-30	1/19/2021	1422	-0.38	-0.41	0.0	0	3.3	19.0	0 0	0 0	0.0	0.0	
VMP-42-30	2/24/2021	1047	-1.85	-1.82	0.0	0	2.2	19.9	0.1	0 0	0.0	0.0	
VMP-42-30-Dup	2/24/2021	1047	NM	NM	0.0	0	2.2	19.9	0.1	0 0	0.0	0.0	Duplicate sample.
VMP-42-30	3/18/2021	1052	-2.04	-2.17	0.0	0	1.0	20.2	0 0	0 0	0.0	0.0	
VMP-42-30	4/30/2021	1107	-0.64	-0.71	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-42-30	5/20/2021	1010	-0.88	-0.94	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	
VMP-42-30-Dup	5/20/2021	1010	NM	NM	0.0	0	1.0	19.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-42-30	6/17/2021	1047	-0.94	-0.34	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-43-10	7/21/2020	0958	-4.44	-4.38	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-43-10	7/31/2020	0854	-4.67	NM	0.0	0	0.1	20.8	0.1	0 0	0.0	0.0	
VMP-43-10	8/19/2020	1028	-4.10	-4.01	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-43-10	9/17/2020	0845	-3.52	-3.45	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	9/29/2020	1240	0.04	NM	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-43-10	10/6/2020	1440	0.19	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	10/7/2020	1425	0.16	NM	0.0	0	0.3	19.8	0 0	0 0	0.0	0.0	
VMP-43-10	10/13/2020	1443	0.26	NM	0.0	0	0.4	19.0	0.1	0 0	0.0	0.0	
VMP-43-10	10/20/2020	1311	0.20	NM	0.0	0	0.7	18.7	0 0	0 0	0.0	0.0	
VMP-43-10	10/27/2020	0857	-0.23	-0.04	0.0	0	0.8	18.2	0 0	0 0	0.0	0.0	
VMP-43-10	11/24/2020	1032	-4.99	-4.99	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-43-10	12/17/2020	1010	-4.73	-4.76	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	1/20/2021	1303	-3.14	-3.12	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	2/24/2021	1320	-5.81	-5.90	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	3/18/2021	1130	-7.76	-8.10	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	4/30/2021	1012	-5.35	-5.64	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	5/20/2021	1122	-4.60	-3.90	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-10	6/17/2021	1351	-2.15	-1.40	0.0	0	0.8	19.7	0 0	0 0	0.0	0.0	
VMP-43-20	7/21/2020	0959	-6.48	-6.43	0.0	0	0.4	20.0	0 0	0 0	0.0	0.0	
VMP-43-20	7/31/2020	0856	-7.05	NM	0.0	0	0.8	19.9	0 2	9 9	9.0	0.9	
VMP-43-20	8/19/2020	1029	-6.89	-6.52	0.0	0	0.9	19.9	0.1	17.4	17.4	0.0	
VMP-43-20	9/17/2020	0846	-5.91	-6.01	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-43-20	9/29/2020	1242	-0.66	NM	0.0	0	1.9	19.6	0 0	0 0	0.0	0.0	
VMP-43-20	10/6/2020	1442	-0.87	NM	0.0	0	1.3	18.3	0 0	0 0	0.0	0.0	
VMP-43-20	10/7/2020	1427	-0.65	NM	0.0	0	1.4	17.8	0 2	0 0	0.0	0.0	
VMP-43-20	10/13/2020	1441	0.00	NM	0.0	0	1.7	15.8	0.1	0 0	0.0	0.0	
VMP-43-20	10/20/2020	1308	0.24	NM	0.0	0	2.3	14.8	0 0	0 0	0.0	0.0	
VMP-43-20	10/27/2020	0858	-0.72	-0.07	0.0	0	2.7	14.0	0 0	0 0	0.0	0.0	
VMP-43-20	11/24/2020	1033	-7.63	-7.46	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-20	12/17/2020	1011	-7.38	-7.40	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-20	1/20/2021	1305	-4.95	-4.94	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-20	2/24/2021	1321	-7.46	-8.14	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-20	3/18/2021	1131	-9.13	-8.40	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-43-20	4/30/2021	1014	-8.18	-8.34	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-43-20	5/20/2021	1124	-7.47	-7.45	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-43-20	6/17/2021	1352	-2.28	-2.29	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-43-30	7/21/2020	1000	-8.35	-8.28	0.0	0	1.1	19.2	0 0	0 0	0.0	0.0	
VMP-43-30	7/31/2020	0858	-9.00	NM	11 6	OVR	7.2	7.6	532	20840	15110	5730	
VMP-43-30	8/19/2020	1030	-8.71	-8.66	1.7	34	10.2	5.3	293	2350	531	1819	
VMP-43-30	9/17/2020	0847	-8.57	-8.60	0.0	0	9.0	9.4	0 3	0 0	0.0	0.0	
VMP-43-30	9/29/2020	1244	-0.21	NM	0.0	0	12.4	1.4	0 2	31.0	31 0	0.0	
VMP-43-30	10/6/2020	1444	0.32	NM	0.0	0	11.3	5.2	0 0	0 0	0.0	0.0	
VMP-43-30	10/7/2020	1427	0.25	NM	0.0	0	12.1	2.4	0 9	42.0	42 0	0.0	
VMP-43-30	10/13/2020	1440	0.43	NM	0.0	0	12.1	1.8	0 0	0 0	0.0	0.0	
VMP-43-30	10/20/2020	1313	0.25	NM	0.0	0	12.3	1.8	0 0	0 0	0.0	0.0	
VMP-43-30	10/27/2020	0859	-0.61	0.00	0.0	0	12.3	1.9	0.1	0 0	0.0	0.0	
VMP-43-30-Dup	10/27/2020	0859	NM	NM	0.0	0	12.7	1.3	0.1	0 0	0.0	0.0	Duplicate sample.
VMP-43-30	11/24/2020	1034	-9.50	-9.38	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-43-30-Dup	11/24/2020	1034	NM	NM	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-43-30	12/17/2020	1012	-9.22	-9.22	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-43-30-Dup	12/17/2020	1012	NM	NM	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-43-30	1/20/2021	1307	-6.23	-6.20	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-43-30	2/24/2021	1322	-9.41	-9.14	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-43-30	3/18/2021	1132	-10.19	-10 28	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-43-30	4/30/2021	1016	-9.75	-9.87	0.0	0	0.5	20.3	0 0	0 0	0.0	0.0	
VMP-43-30	5/20/2021	1126	-9.04	-9.07	0.0	0	0.9	19.5	0 0	0 0	0.0	0.0	
VMP-43-30	6/17/2021	1353	-2.26	-2.25	0.0	0	0.6	19.3	0 0	0 0	0.0	0.0	
VMP-44-10	7/21/2020	0834	0.00	0.00	0.0	0	3.5	14.6	0.1	2 0	2.0	0.0	
VMP-44-10	8/19/2020	1215	-0.30	0.00	0.0	0	3.6	16.0	0 0	0 0	0.0	0.0	
VMP-44-10	9/16/2020	1410	0.00	0.00	0.0	0	6.1	9.8	0 0	0 0	0.0	0.0	
VMP-44-10	10/27/2020	0948	0.00	0.00	0.0	0	8.9	5.1	0 0	0 0	0.0	0.0	
VMP-44-10	11/24/2020	0915	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	12/17/2020	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	1/20/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	2/24/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	3/18/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	4/30/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	5/20/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-10	6/17/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-44-20	7/21/2020	0835	-4.80	0.00	0.0	0	3.6	14.5	0.1	1.7	1.7	0.0	
VMP-44-20	8/19/2020	1216	-2.35	0.00	0.0	0	2.8	17.2	0 0	0 0	0.0	0.0	
VMP-44-20	9/16/2020	1411	0.00	0.00	0.0	0	5.5	10.7	0 0	0 0	0.0	0.0	
VMP-44-20	10/27/2020	0949	0.00	0.00	0.0	0	7.4	8.0	0 0	0 0	0.0	0.0	
VMP-44-20-Dup	10/27/2020	0949	NM	NM	0.0	0	7.5	7.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-44-20	11/24/2020	0915	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	12/17/2020	0816	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	1/20/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	2/24/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	3/18/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	4/30/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	5/20/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-20	6/17/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	7/21/2020	0836	0.00	0.00	0.0	0	0.1	20.5	0 0	0 0	0.0	0.0	
VMP-44-30	8/19/2020	1217	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-44-30	9/16/2020	1412	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-44-30	10/27/2020	0950	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-44-30	11/24/2020	0915	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	12/17/2020	0817	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	1/20/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	2/24/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	3/18/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	4/30/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	5/20/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-44-30	6/17/2021	0815	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled due to VMP integrity.
VMP-45-10	7/20/2020	1426	0.00	0.00	0.0	0	0.5	20.2	0 0	0 0	0.0	0.0	
VMP-45-10	8/19/2020	1328	0.00	0.00	0.0	0	1.2	19.0	0 0	0 0	0.0	0.0	
VMP-45-10	9/16/2020	1321	0.00	0.00	0.0	0	1.7	17.9	0 0	0 0	0.0	0.0	
VMP-45-10	10/27/2020	1100	0.00	0.00	0.0	0	2.4	17.3	0 0	0 0	0.0	0.0	
VMP-45-10	11/24/2020	0835	0.00	0.00	0.0	0	0.9	20.4	0 0	0 0	0.0	0.0	
VMP-45-10	12/16/2020	1254	0.12	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-45-10	1/20/2021	1134	0.00	0.00	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-45-10	2/24/2021	1144	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-45-10	3/18/2021	0902	-0.17	-0.24	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-45-10	4/29/2021	1304	0.00	0.00	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-45-10	5/20/2021	0929	0.00	0.00	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-45-10	6/17/2021	1131	-0.12	0.00	0.0	0	0.8	20.1	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-45-20	7/20/2020	1427	-0.12	0.00	0.0	0	0.7	19.9	0 0	0 0	0.0	0.0	
VMP-45-20	8/19/2020	1329	0.00	0.00	0.0	0	1.4	18.8	0 0	0 0	0.0	0.0	
VMP-45-20	9/16/2020	1322	0.00	0.00	0.0	0	1.8	18.0	0 0	0 0	0.0	0.0	
VMP-45-20	10/27/2020	1101	0.00	0.00	0.0	0	2.2	17.9	0 0	0 0	0.0	0.0	
VMP-45-20	11/24/2020	0836	0.00	0.00	0.0	0	1.1	20.2	0 0	0 0	0.0	0.0	
VMP-45-20	12/16/2020	1255	0.15	0.00	0.0	0	0.6	20.6	0 0	0 0	0.0	0.0	
VMP-45-20	1/20/2021	1136	0.00	0.00	0.0	0	0.8	20.1	0 0	0 0	0.0	0.0	
VMP-45-20	2/24/2021	1146	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-45-20	3/18/2021	0903	-0.14	-0.19	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-45-20	4/29/2021	1306	0.00	0.00	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-45-20	5/20/2021	0930	0.00	0.00	0.0	0	0.5	20.3	0 0	0 0	0.0	0.0	
VMP-45-20	6/17/2021	1132	-0.14	0.00	0.0	0	1.0	19.9	0 0	0 0	0.0	0.0	
VMP-45-30	7/20/2020	1428	0.00	0.00	0.0	0	0.4	20.2	0 0	0 0	0.0	0.0	
VMP-45-30	8/19/2020	1330	0.00	0.10	0.0	0	0.8	19.8	0 0	0 0	0.0	0.0	
VMP-45-30	9/16/2020	1323	0.00	0.00	0.0	0	1.3	18.6	0 0	0 0	0.0	0.0	
VMP-45-30	10/27/2020	1102	0.00	0.00	0.0	0	1.7	18.2	0 0	0 0	0.0	0.0	
VMP-45-30	11/24/2020	0837	0.00	0.00	0.0	0	1.0	20.2	0 0	0 0	0.0	0.0	
VMP-45-30-Dup	11/24/2020	0837	NM	NM	0.0	0	1.1	20.1	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-45-30	12/16/2020	1254	0.12	0.00	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-45-30	1/20/2021	1138	0.00	0.00	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-45-30	2/24/2021	1148	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-45-30	3/18/2021	0904	-0.14	-0.17	0.0	0	0.2	20.4	0 0	0 0	0.0	0.0	
VMP-45-30-Dup	3/18/2021	0904	NM	NM	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-45-30	4/29/2021	1308	0.14	0.00	0.0	0	0.3	20.2	0 0	0 0	0.0	0.0	
VMP-45-30-Dup	4/29/2021	1308	NM	NM	0.0	0	0.3	20.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-45-30	5/20/2021	0931	0.00	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-45-30	6/17/2021	1133	-0.49	0.00	0.0	0	0.5	20.3	0 0	0 0	0.0	0.0	
VMP-45-30-Dup	6/17/2021	1133	NM	NM	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-46-10	7/21/2020	1200	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-10	8/19/2020	1046	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-46-10	9/16/2020	1015	0.00	0.00	0.0	0	0.2	20.7	3.7	29.5	0.0	29 5	Re-sampled to confirm initial sample.
VMP-46-10	9/17/2020	0925	0.00	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-46-10	10/26/2020	1128	0.00	0.48	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-46-10	11/23/2020	1120	-0.06	-0.04	0.0	0	1.5	19.2	0 0	0 0	0.0	0.0	
VMP-46-10	12/16/2020	1126	-0.07	-0.03	0.0	0	0.1	20.6	0.1	0 0	0.0	0.0	
VMP-46-10	1/19/2021	1040	-0.04	-0.03	0.0	0	0.2	19.9	0 0	0 0	0.0	0.0	
VMP-46-10	2/23/2021	1202	-0.11	-0.13	0.1	2	0.3	19.1	13.8	135	10.7	124	Re-sampled to confirm initial results.
VMP-46-10	2/25/2021	0954	-0.30	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-46-10	3/17/2021	1155	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-46-10	4/29/2021	0850	-0.45	-0.58	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-46-10	5/19/2021	1105	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-10	6/17/2021	1505	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-46-20	7/21/2020	1201	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-20	8/19/2020	1047	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-46-20	9/16/2020	1016	0.00	0.00	0.0	0	0.7	20.0	3 3	20.5	0.0	20 5	Re-sampled to confirm initial sample.
VMP-46-20	9/17/2020	0926	0.00	NM	0.0	0	0.3	20.5	0 2	0 0	0.0	0.0	Re-sample.
VMP-46-20	10/26/2020	1129	0.00	0.73	0.0	0	1.5	18.9	0.1	0 0	0.0	0.0	
VMP-46-20	11/23/2020	1121	-0.63	-0.04	0.0	0	2.1	19.1	0 0	0 0	0.0	0.0	
VMP-46-20	12/16/2020	1128	-0.25	-0.03	0.0	0	0.6	20.3	0.1	0 0	0.0	0.0	
VMP-46-20	1/19/2021	1041	-0.05	-0.03	0.0	0	0.4	20.0	0 0	0 0	0.0	0.0	
VMP-46-20	2/23/2021	1204	-0.16	-0.15	0.0	1	0.4	20.0	7 3	68.4	4.4	64 0	Re-sampled to confirm initial results.
VMP-46-20	2/25/2021	0955	-0.31	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-46-20	3/17/2021	1156	-0.58	-0.63	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-46-20	4/29/2021	0851	0.00	0.16	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-46-20	5/19/2021	1106	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-20	6/17/2021	1506	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-30	7/21/2020	1202	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-30	8/19/2020	1048	0.00	0.00	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-46-30	9/16/2020	1017	0.00	0.00	0.0	0	0.4	20.5	3 6	17.9	0.0	17 9	Re-sampled to confirm initial sample.
VMP-46-30	9/17/2020	0927	0.00	NM	0.0	0	0.2	20.6	0.1	0 0	0.0	0.0	Re-sample.
VMP-46-30	10/26/2020	1130	0.00	0.85	0.0	0	0.9	19.9	0 0	0 0	0.0	0.0	
VMP-46-30	11/23/2020	1122	-0.30	-0.02	0.0	0	1.2	19.8	0 0	0 0	0.0	0.0	
VMP-46-30	12/16/2020	1130	-0.09	-0.02	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-46-30	1/19/2021	1042	-0.05	-0.01	0.0	0	0.3	20.2	0 0	0 0	0.0	0.0	
VMP-46-30	2/23/2021	1206	0.00	-0.14	0.0	0	0.2	20.6	4 6	37.4	1.5	35 9	Re-sampled to confirm initial results.
VMP-46-30	2/25/2021	0956	-0.21	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-46-30	3/17/2021	1157	-0.54	-0.37	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-46-30	4/29/2021	0852	-0.23	-0.16	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-46-30	5/19/2021	1107	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-46-30	6/17/2021	1508	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-47-5	7/20/2020	1342	0.00	0.00	0.0	0	2.1	18.0	0 2	0 0	0.0	0.0	
VMP-47-5	8/20/2020	0907	0.00	0.00	0.0	0	4.1	16.1	0 0	0 0	0.0	0.0	
VMP-47-5	9/17/2020	1035	0.00	0.00	0.0	0	3.6	17.2	0 0	0 0	0.0	0.0	
VMP-47-5	10/27/2020	1520	0.00	0.00	0.0	0	2.7	18.2	0 0	0 0	0.0	0.0	
VMP-47-5	11/24/2020	1330	0.00	0.00	0.0	0	2.5	17.9	0 0	0 0	0.0	0.0	
VMP-47-5	12/17/2020	0944	-0.07	-0.05	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-47-5	1/20/2021	0840	0.00	0.00	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-47-5	2/24/2021	0935	-0.04	-0.03	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-47-5	3/18/2021	0905	-0.13	0.00	0.0	0	0.3	20.3	0 0	0 0	0.0	0.0	
VMP-47-5	4/30/2021	0920	-0.11	0.00	0.0	0	0.4	20.7	0 0	0 0	0.0	0.0	
VMP-47-5	5/19/2021	1348	0.00	0.00	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-47-5	6/17/2021	0915	-0.11	-0.10	0.0	0	1.2	19.9	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-47-10	7/20/2020	1343	0.00	0.00	0.0	0	1.4	18.7	0 0	0 0	0.0	0.0	
VMP-47-10	8/20/2020	0908	0.00	0.00	0.0	0	3.0	16.7	0 0	0 0	0.0	0.0	
VMP-47-10	9/17/2020	1036	0.00	0.00	0.0	0	3.3	17.0	0 0	0 0	0.0	0.0	
VMP-47-10	10/27/2020	1251	0.00	0.00	0.0	0	2.9	17.9	0 0	0 0	0.0	0.0	
VMP-47-10	11/24/2020	1331	-0.16	-0.17	0.0	0	2.6	17.1	0 0	0 0	0.0	0.0	
VMP-47-10	12/17/2020	0946	-0.34	-0.51	0.0	0	0.9	20.4	0 0	0 0	0.0	0.0	
VMP-47-10	1/20/2021	0841	0.00	-0.09	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-47-10	2/24/2021	0936	-0.16	-0.22	0.0	0	0.6	20.5	0 0	0 0	0.0	0.0	
VMP-47-10	3/18/2021	0906	-0.33	-0.31	0.0	0	0.9	20.2	0 0	0 0	0.0	0.0	
VMP-47-10	4/30/2021	0921	-0.26	-0.24	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-47-10	5/19/2021	1350	0.00	-0.33	0.0	0	1.0	19.9	0 0	0 0	0.0	0.0	
VMP-47-10	6/17/2021	0916	-0.25	-0.21	0.0	0	1.5	19.8	0 0	0 0	0.0	0.0	
VMP-47-20	7/20/2020	1344	0.00	0.00	0.0	0	1.4	19.1	0.1	0 0	0.0	0.0	
VMP-47-20	8/20/2020	0909	0.00	0.00	0.0	0	1.8	18.3	0 0	0 0	0.0	0.0	
VMP-47-20	9/17/2020	1037	0.00	0.00	0.0	0	2.5	17.4	0 0	0 0	0.0	0.0	
VMP-47-20	10/27/2020	1252	0.18	0.08	0.0	0	2.4	17.2	0 0	0 0	0.0	0.0	
VMP-47-20	11/24/2020	1332	0.51	0.46	0.0	0	2.7	14.5	0 0	0 0	0.0	0.0	
VMP-47-20	12/17/2020	0948	-2.51	-2.50	0.0	0	0.6	20.5	0 0	0 0	0.0	0.0	
VMP-47-20	1/20/2021	0842	-0.05	-1.38	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-47-20	2/24/2021	0937	-2.60	-2.61	0.0	0	0.3	20.8	0 0	0 0	0.0	0.0	
VMP-47-20	3/18/2021	0907	-2.67	-2.80	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-47-20	4/30/2021	0922	-2.33	-2.25	0.0	0	0.7	20.4	0 0	0 0	0.0	0.0	
VMP-47-20-Dup	4/30/2021	0922	NM	NM	0.0	0	0.7	20.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-47-20	5/19/2021	1352	-1.48	-1.54	0.0	0	0.7	20.1	0 0	0 0	0.0	0.0	
VMP-47-20	6/17/2021	0917	-1.83	-1.72	0.0	0	1.2	19.9	0 0	0 0	0.0	0.0	
VMP-47-20-Dup	6/17/2021	0917	NM	NM	0.0	0	1.2	19.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-47-30	7/20/2020	1345	0.00	0.00	0.0	0	1.6	18.8	0 2	0 0	0.0	0.0	
VMP-47-30	8/20/2020	0910	0.00	0.00	0.0	0	1.7	18.4	0 0	0 0	0.0	0.0	
VMP-47-30-Dup	8/20/2020	0910	NM	NM	0.0	0	1.7	18.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-47-30	9/17/2020	1038	-0.11	-0.14	0.0	0	2.0	16.9	0 0	0 0	0.0	0.0	
VMP-47-30	10/27/2020	1253	0.26	0.13	0.0	0	2.6	14.1	0 0	0 0	0.0	0.0	
VMP-47-30	11/24/2020	1333	0.68	0.41	0.0	0	3.3	11.2	0 0	0 0	0.0	0.0	
VMP-47-30	12/17/2020	0950	-2.82	-2.71	0.0	0	1.3	19.2	0 0	0 0	0.0	0.0	
VMP-47-30	1/20/2021	0843	-0.06	-1.50	0.0	0	1.5	19.7	0 0	0 0	0.0	0.0	
VMP-47-30	2/24/2021	0938	-2.52	-3.01	0.0	0	1.5	19.9	0 0	0 0	0.0	0.0	
VMP-47-30	3/18/2021	0908	-2.66	-3.19	0.0	0	1.2	19.9	0 0	0 0	0.0	0.0	
VMP-47-30	4/30/2021	0923	-2.50	-2.50	0.0	0	0.9	20.2	0 0	0 0	0.0	0.0	
VMP-47-30	5/19/2021	1354	-1.64	-1.76	0.0	0	0.8	20.0	0 0	0 0	0.0	0.0	
VMP-47-30	6/17/2021	0918	-1.98	-1.86	0.0	0	0.9	19.6	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-48-5	7/21/2020	0839	0.00	0.00	0.0	0	6.7	11.9	0 0	0 0	0.0	0.0	
VMP-48-5	8/20/2020	1102	0.00	0.00	0.0	0	7.1	12.0	0 0	0 0	0.0	0.0	
VMP-48-5	9/17/2020	1255	0.00	0.00	0.0	0	6.2	15.6	0 0	0 0	0.0	0.0	
VMP-48-5	10/27/2020	1103	0.00	0.00	0.0	0	3.1	17.5	0 0	0 0	0.0	0.0	
VMP-48-5	11/24/2020	1243	0.00	0.00	0.0	0	2.9	16.5	0 0	0 0	0.0	0.0	
VMP-48-5	12/17/2020	1114	-0.03	0.00	0.0	0	1.4	19.7	0 0	0 0	0.0	0.0	
VMP-48-5	1/20/2021	0950	0.00	0.00	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-48-5	2/24/2021	1115	0.00	0.00	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-48-5	3/18/2021	1041	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. Area flooded.
VMP-48-5	4/30/2021	1050	0.00	0.00	0.0	0	2.0	18.0	0 0	0 0	0.0	0.0	
VMP-48-5	5/20/2021	0936	0.00	0.00	0.0	0	2.7	17.7	0 0	0 0	0.0	0.0	
VMP-48-5	6/17/2021	1030	-0.18	0.00	0.0	0	3.8	18.1	0 0	0 0	0.0	0.0	
VMP-48-10	7/21/2020	0840	0.00	0.00	0.0	0	4.3	16.2	0 0	0 0	0.0	0.0	
VMP-48-10	8/20/2020	1103	0.00	0.00	0.0	0	4.4	15.2	0 0	0 0	0.0	0.0	
VMP-48-10	9/17/2020	1256	0.00	0.00	0.0	0	4.6	15.2	0 2	0 0	0.0	0.0	
VMP-48-10	10/27/2020	1104	0.00	0.00	0.0	0	4.8	15.4	0 0	0 0	0.0	0.0	
VMP-48-10	11/24/2020	1244	0.00	0.00	0.0	0	4.7	15.7	0 0	0 0	0.0	0.0	
VMP-48-10	12/17/2020	1116	-0.05	0.00	0.0	0	4.1	17.4	0 0	0 0	0.0	0.0	
VMP-48-10	1/20/2021	0951	0.44	0.00	0.0	0	4.7	17.0	0 0	0 0	0.0	0.0	
VMP-48-10	2/24/2021	1116	-4.76	0.00	0.0	0	5.5	19.2	0 0	0 0	0.0	0.0	
VMP-48-10	3/18/2021	1042	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. Area flooded.
VMP-48-10	4/30/2021	1051	0.00	0.00	0.0	0	1.6	19.2	0 0	0 0	0.0	0.0	
VMP-48-10	5/20/2021	0938	-0.11	-0.09	0.0	0	2.0	18.9	0 0	0 0	0.0	0.0	
VMP-48-10	6/17/2021	1031	-0.16	-0.14	0.0	0	2.9	18.6	0 0	0 0	0.0	0.0	
VMP-48-20	7/21/2020	0841	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-48-20	8/20/2020	1104	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-48-20	9/17/2020	1257	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-48-20	10/27/2020	1105	-0.36	0.29	0.0	0	5.1	14.9	0 0	0 0	0.0	0.0	
VMP-48-20	11/24/2020	1245	0.00	0.37	0.0	0	5.5	14.6	0 0	0 0	0.0	0.0	
VMP-48-20	12/17/2020	1118	-0.04	0.00	0.0	0	5.2	15.8	0 0	0 0	0.0	0.0	
VMP-48-20	1/20/2021	1055	-0.03	0.00	0.0	0	4.3	17.4	0 0	0 0	0.0	0.0	
VMP-48-20	2/24/2021	1117	0.30	-0.05	0.0	0	3.9	17.9	0 0	0 0	0.0	0.0	
VMP-48-20	3/18/2021	1043	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. Area flooded.
VMP-48-20	4/30/2021	1052	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-48-20	5/20/2021	0939	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-48-20	6/17/2021	1032	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-48-30	7/21/2020	0842	0.00	0.00	0.0	0	4.2	17.5	0 0	0 0	0.0	0.0	
VMP-48-30	8/20/2020	1105	0.00	0.00	0.0	0	5.6	16.0	0 0	0 0	0.0	0.0	
VMP-48-30	9/17/2020	1258	0.00	0.00	0.0	0	5.8	15.8	0 0	0 0	0.0	0.0	
VMP-48-30	10/27/2020	1106	0.13	0.12	0.0	0	6.1	15.5	0 0	0 0	0.0	0.0	
VMP-48-30	11/24/2020	1246	0.30	0.36	0.0	0	5.8	15.5	0 0	0 0	0.0	0.0	
VMP-48-30	12/17/2020	1120	-0.42	-0.17	0.0	0	6.2	15.2	0 0	0 0	0.0	0.0	
VMP-48-30	1/20/2021	0953	-0.24	0.00	0.0	0	6.5	14.9	0 0	0 0	0.0	0.0	
VMP-48-30	2/24/2021	1118	-1.00	-0.53	0.0	0	6.6	15.1	0 0	0 0	0.0	0.0	
VMP-48-30	3/18/2021	1044	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Not sampled. Area flooded.
VMP-48-30	4/30/2021	1053	-0.28	0.00	0.0	0	6.1	16.2	0 0	0 0	0.0	0.0	
VMP-48-30	5/20/2021	0940	-1.92	-1.91	0.0	0	5.7	16.8	0 0	0 0	0.0	0.0	
VMP-48-30	6/17/2021	1033	-1.46	-1.38	0.0	0	3.9	17.5	0 0	0 0	0.0	0.0	
VMP-49-5	7/21/2020	0930	-2.48	-2.45	0.0	0	1.2	20.0	0 0	0 0	0.0	0.0	
VMP-49-5	7/31/2020	0912	-2.80	NM	0.0	0	0.7	20.3	0.1	0 0	0.0	0.0	
VMP-49-5	8/19/2020	0910	-2.55	-2.51	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-49-5	9/17/2020	1137	-2.13	-2.15	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-49-5	9/29/2020	1150	0.03	NM	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-49-5	10/6/2020	1342	0.08	NM	0.0	0	2.2	18.3	0.1	37.2	34.1	3.1	
VMP-49-5	10/8/2020	1156	0.00	NM	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-49-5	10/13/2020	1344	0.10	NM	0.0	0	0.4	20.0	0.1	0 0	0.0	0.0	
VMP-49-5	10/20/2020	1343	0.00	NM	0.0	0	0.8	15.1	0 3	41.2	41 2	0.0	
VMP-49-5	10/27/2020	0935	0.00	0.04	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	Re-sampled to confirm initial sample.
VMP-49-5	10/27/2020	1145	0.00	NM	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	Re-sample.
VMP-49-5	11/24/2020	1103	-2.06	-2.14	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-5	12/17/2020	1113	-2.12	-2.08	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-49-5	1/20/2021	1025	-1.31	-1.35	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-49-5	2/24/2021	1212	-2.37	-2.34	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-49-5	3/18/2021	1135	-3.48	-3.42	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-5	4/30/2021	1118	-2.86	-2.80	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-49-5-Dup	4/30/2021	1118	NM	NM	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-49-5	5/20/2021	1038	-2.47	-2.31	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-49-5	6/17/2021	1200	-0.23	-0.26	0.0	0	1.2	19.6	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-49-10	7/21/2020	0931	-1.63	-1.61	0.0	0	2.5	18.9	0 0	0 0	0.0	0.0	
VMP-49-10	7/31/2020	0914	-1.90	NM	0.0	0	2.0	19.3	0.1	0 0	0.0	0.0	
VMP-49-10	8/19/2020	0911	-1.61	-1.61	0.0	0	1.8	19.5	0 0	0 0	0.0	0.0	
VMP-49-10	9/17/2020	1138	-1.25	-1.26	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-49-10	9/29/2020	1152	0.02	NM	0.0	0	0.5	20.6	0 0	0 0	0.0	0.0	
VMP-49-10	10/6/2020	1344	0.06	NM	0.0	0	0.8	20.3	0 0	0 0	0.0	0.0	
VMP-49-10	10/8/2020	1158	0.00	NM	0.0	0	0.7	19.9	0 0	0 0	0.0	0.0	
VMP-49-10	10/13/2020	1336	0.00	NM	0.0	0	0.8	19.7	0 0	0 0	0.0	0.0	
VMP-49-10	10/20/2020	1337	0.00	NM	0.0	0	1.0	19.9	0 0	0 0	0.0	0.0	
VMP-49-10	10/27/2020	0936	0.00	0.07	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	
VMP-49-10	11/24/2020	1104	-1.32	-1.42	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-10	12/17/2020	1114	-1.47	-1.43	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-49-10	1/20/2021	1026	-0.92	-0.92	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-10	2/24/2021	1213	-1.78	-1.76	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-49-10-Dup	2/24/2021	1213	NM	NM	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-49-10	3/18/2021	1136	-3.07	-5.64	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-49-10	4/30/2021	1120	-0.97	-2.00	0.0	0	0.7	19.9	0 0	0 0	0.0	0.0	
VMP-49-10	5/20/2021	1040	-1.71	-1.76	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-49-10	6/17/2021	1207	-0.17	-0.17	0.0	0	2.5	18.4	0 0	0 0	0.0	0.0	
VMP-49-10-Dup	6/17/2021	1207	NM	NM	0.0	0	2.4	18.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-49-20	7/21/2020	0932	-0.12	-0.10	0.0	0	2.5	18.8	0 0	0 0	0.0	0.0	
VMP-49-20	7/31/2020	0916	-0.21	NM	0.0	0	2.0	19.3	0 2	0 0	0.0	0.0	
VMP-49-20	8/19/2020	0912	0.00	-0.12	0.0	0	1.5	19.8	0 0	0 0	0.0	0.0	
VMP-49-20-Dup	8/19/2020	0912	NM	NM	0.0	0	1.5	19.8	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-49-20	9/17/2020	1139	0.00	-0.13	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-49-20	9/29/2020	1154	0.00	NM	0.0	0	1.6	18.6	0 0	0 0	0.0	0.0	
VMP-49-20	10/6/2020	1346	0.00	NM	0.0	0	1.5	19.4	0 0	0 0	0.0	0.0	
VMP-49-20	10/8/2020	1200	0.00	NM	0.0	0	1.8	17.6	0 0	0 0	0.0	0.0	
VMP-49-20	10/13/2020	1338	0.00	NM	0.0	0	2.0	17.8	0.1	0 0	0.0	0.0	
VMP-49-20	10/20/2020	1335	0.00	NM	0.0	0	1.9	18.4	0 0	0 0	0.0	0.0	
VMP-49-20	10/27/2020	0937	0.00	0.29	0.0	0	1.9	17.8	0 0	0 0	0.0	0.0	
VMP-49-20	11/24/2020	1105	0.00	-0.13	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-20	12/17/2020	1115	-0.18	-0.13	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-49-20	1/20/2021	1027	-0.10	-0.09	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-20	2/24/2021	1214	-0.14	-0.11	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-49-20	3/18/2021	1137	-0.16	-0.22	0.0	0	0.3	19.6	0 0	0 0	0.0	0.0	
VMP-49-20	4/30/2021	1122	-0.16	-0.15	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-49-20	5/20/2021	1042	-0.09	-0.16	0.0	0	0.6	20.1	0 0	0 0	0.0	0.0	
VMP-49-20	6/17/2021	1202	0.00	0.00	0.0	0	2.2	18.8	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-49-30	7/21/2020	0933	-11 25	-11 23	0.0	0	5.3	12.7	0 0	0 0	0.0	0.0	
VMP-49-30	7/31/2020	0918	-11.17	NM	0.0	0	8.4	12.9	0 2	0 0	0.0	0.0	
VMP-49-30	8/19/2020	0913	-12 04	-11 85	0.0	0	6.9	13.5	0 0	0 0	0.0	0.0	
VMP-49-30	9/17/2020	1140	-11 65	-11 58	0.0	0	6.6	13.5	0 0	0 0	0.0	0.0	
VMP-49-30	9/29/2020	1156	0.07	NM	0.0	0	4.6	15.3	0 3	0 0	0.0	0.0	
VMP-49-30	10/6/2020	1348	0.22	NM	13 6	OVR	8.6	5.1	231	20370	14860	5510	
VMP-49-30	10/8/2020	1202	0.00	NM	0.0	0	4.9	12.7	0 2	68.3	68 3	0.0	
VMP-49-30	10/13/2020	1340	0.32	NM	3.9	79	6.4	7.0	42.6	18040	15810	2230	
VMP-49-30	10/20/2020	1333	0.42	NM	OVR	OVR	8.4	3.7	532	102000	64660	37340	
VMP-49-30	10/27/2020	0938	-0.25	0.18	2.0	41	6.7	9.1	56.1	8530	6320	2210	Re-sampled to confirm initial sample.
VMP-49-30	10/27/2020	1146	0.00	NM	5.1	OVR	6.8	8.1	82.8	19430	14950	4480	Re-sample.
VMP-49-30	11/24/2020	1106	-11 59	-11 63	0.0	0	13.0	3.9	0 0	0 0	0.0	0.0	Re-sampled to confirm initial sample.
VMP-49-30	11/24/2020	1230	-11 64	NM	0.0	0	13.1	4.3	0.1	0 0	0.0	0.0	Re-sample.
VMP-49-30	12/17/2020	1116	-10 89	-10 83	0.0	0	8.7	11.6	0 0	0 0	0.0	0.0	
VMP-49-30	1/20/2021	1028	-7.82	-7.35	0.0	0	7.0	12.0	0 0	0 0	0.0	0.0	
VMP-49-30	2/24/2021	1215	-9.47	-10.16	0.0	0	7.1	14.6	0 0	0 0	0.0	0.0	
VMP-49-30	3/18/2021	1138	-9.18	-11 00	0.0	0	7.7	14.8	0 0	0 0	0.0	0.0	
VMP-49-30	4/30/2021	1124	-11 22	-10.74	0.0	0	6.4	15.5	0 0	0 0	0.0	0.0	
VMP-49-30	5/20/2021	1044	-10 50	-10.44	0.0	0	6.2	15.0	0 0	0 0	0.0	0.0	
VMP-49-30	6/17/2021	1203	-0.79	-0.79	0.0	0	1.3	19.4	0 0	0 0	0.0	0.0	
VMP-50-5	7/21/2020	0903	0.00	0.00	0.0	0	3.0	16.7	0 0	0 0	0.0	0.0	
VMP-50-5	8/19/2020	1136	0.00	0.00	0.0	0	1.4	19.5	0 0	0 0	0.0	0.0	
VMP-50-5	9/17/2020	1025	0.00	0.00	0.0	0	1.4	19.6	0 0	0 0	0.0	0.0	
VMP-50-5	9/29/2020	1315	0.00	NM	0.0	0	2.0	18.2	0 0	0 0	0.0	0.0	
VMP-50-5	10/6/2020	1457	0.00	NM	0.0	0	2.2	18.4	0 0	0 0	0.0	0.0	
VMP-50-5	10/13/2020	1324	0.00	NM	0.0	0	2.8	15.5	0 0	0 0	0.0	0.0	
VMP-50-5	10/27/2020	0927	0.00	0.00	0.0	0	2.9	16.0	0 0	0 0	0.0	0.0	
VMP-50-5	11/24/2020	0933	0.00	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-50-5	12/17/2020	0908	0.00	0.00	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-50-5	1/20/2021	1226	-0.09	0.00	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-50-5	2/24/2021	1400	-0.09	-0.11	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-50-5	3/18/2021	1027	-0.32	-0.25	0.0	0	0.2	20.6	0 0	0 8	0.8	0.0	
VMP-50-5	4/29/2021	1404	0.00	0.00	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-50-5	5/20/2021	1114	0.00	-0.13	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-50-5	6/17/2021	1249	0.00	0.00	0.0	0	2.7	14.3	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-50-10	7/21/2020	0904	-0.17	-0.18	0.0	0	2.5	17.2	0 0	0 0	0.0	0.0	
VMP-50-10	8/19/2020	1137	-0.21	-0.20	0.0	0	2.1	18.9	0 0	0 0	0.0	0.0	
VMP-50-10	9/17/2020	1026	-0.15	-0.21	0.0	0	2.0	19.0	0 0	0 0	0.0	0.0	
VMP-50-10	9/29/2020	1317	0.01	NM	0.0	0	2.4	18.8	0 0	0 0	0.0	0.0	
VMP-50-10	10/6/2020	1459	0.00	NM	0.0	0	2.6	19.1	0 0	0 0	0.0	0.0	
VMP-50-10	10/13/2020	1326	0.00	NM	0.0	0	2.4	17.7	0.1	0 0	0.0	0.0	
VMP-50-10	10/27/2020	0928	0.00	0.00	0.0	0	2.8	16.7	0 0	0 0	0.0	0.0	
VMP-50-10	11/24/2020	0934	-0.28	-0.19	0.0	0	1.0	20.2	0 0	0 0	0.0	0.0	
VMP-50-10	12/17/2020	0909	-0.29	-0.29	0.0	0	0.8	20.3	0 0	0 0	0.0	0.0	
VMP-50-10	1/20/2021	1228	-0.22	-0.14	0.0	0	0.8	19.7	0 0	0 0	0.0	0.0	
VMP-50-10	2/24/2021	1401	-0.36	-0.37	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-50-10	3/18/2021	1028	-0.82	-0.85	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-50-10	4/29/2021	1406	-0.24	-0.25	0.0	0	0.6	20.0	0 0	0 0	0.0	0.0	
VMP-50-10	5/20/2021	1115	-0.22	-0.27	0.0	0	0.8	20.0	0 0	0 0	0.0	0.0	
VMP-50-10	6/17/2021	1250	0.10	0.00	0.0	0	1.3	18.1	0 0	0 0	0.0	0.0	
VMP-50-20	7/21/2020	0905	-1.16	-1.15	0.0	0	2.2	17.6	0 0	0 0	0.0	0.0	
VMP-50-20	8/19/2020	1138	-1.01	-0.98	0.0	0	2.1	18.8	0 0	0 0	0.0	0.0	
VMP-50-20	9/17/2020	1027	-0.92	-0.93	0.0	0	2.1	19.0	0 0	0 0	0.0	0.0	
VMP-50-20	9/29/2020	1319	-0.23	NM	0.0	0	3.3	17.9	0 0	0 0	0.0	0.0	
VMP-50-20	10/6/2020	1501	0.05	NM	0.0	0	3.6	18.2	0 0	0 0	0.0	0.0	
VMP-50-20	10/13/2020	1328	0.00	NM	0.0	0	3.3	17.7	0 0	0 0	0.0	0.0	
VMP-50-20	10/27/2020	0929	0.00	0.00	0.0	0	3.5	17.6	0 0	0 0	0.0	0.0	
VMP-50-20	11/24/2020	0935	-1.24	-1.08	0.0	0	1.7	20.0	0 0	0 0	0.0	0.0	
VMP-50-20	12/17/2020	0910	-1.40	-1.31	0.0	0	1.3	20.1	0 0	0 0	0.0	0.0	
VMP-50-20	1/20/2021	1230	-0.95	0.00	0.0	0	0.9	19.6	0 0	0 0	0.0	0.0	
VMP-50-20	2/24/2021	1402	-1.50	-1.50	0.0	0	1.1	20.1	0 0	0 0	0.0	0.0	
VMP-50-20	3/18/2021	1029	-2.13	-1.89	0.0	0	0.9	20.2	0 0	0 0	0.0	0.0	
VMP-50-20	4/29/2021	1408	-1.27	-1.20	0.0	0	1.0	19.9	0 0	0 0	0.0	0.0	
VMP-50-20	5/20/2021	1116	-1.02	-1.08	0.0	0	1.0	19.9	0 0	0 0	0.0	0.0	
VMP-50-20	6/17/2021	1251	0.10	0.00	0.0	0	1.5	19.0	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-50-30	7/21/2020	0906	-3.01	-2.97	0.0	0	1.6	18.9	0.7	9.7	4.8	4.9	
VMP-50-30	8/19/2020	1139	-2.90	-2.76	0.0	0	2.2	18.2	0 3	57.4	57.4	0.0	
VMP-50-30	9/17/2020	1028	-2.84	-2.66	0.0	0	2.6	18.1	0 8	198	198	0.0	
VMP-50-30-Dup	9/17/2020	1028	NM	NM	0.0	0	2.5	18.2	0 8	183	183	0.0	Duplicate sample.
VMP-50-30	9/29/2020	1321	0.30	NM	0.0	0	3.1	17.5	4.1	244	208	36 0	
VMP-50-30	10/6/2020	1503	0.20	NM	0.0	0	3.2	17.6	3 5	132	116	16 0	
VMP-50-30	10/13/2020	1330	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-50-30	10/27/2020	0930	-0.28	0.00	0.0	0	4.0	14.4	1 6	40.3	33 8	6.5	
VMP-50-30	11/24/2020	0936	-5.54	-5.47	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Ambient air inadvertently introduced to sample.
VMP-50-30	11/24/2020	1235	-5.30	NM	0.0	0	2.9	18.8	8 3	46.6	0.9	45.7	Re-sample.
VMP-50-30	12/17/2020	0911	-5.34	-5.25	0.0	0	1.8	19.8	4 2	31.5	0.7	30 8	
VMP-50-30-Dup	12/17/2020	0911	NM	NM	0.0	0	1.8	19.8	4 2	37.9	0.8	37.1	Duplicate sample.
VMP-50-30	1/20/2021	1232	-3.31	-3.21	0.0	1	2.0	18.6	9 5	63.2	2.2	61 0	
VMP-50-30	2/24/2021	1403	-5.83	-6.03	0.0	1	1.9	19.5	7 3	51.8	0.9	50 9	
VMP-50-30	3/18/2021	1030	-6.84	-6.36	0.0	0	1.4	19.7	6 5	44.7	0.6	44.1	
VMP-50-30	4/29/2021	1410	-6.18	-6.28	0.0	0	1.3	19.6	7.1	38.4	1.3	37.1	
VMP-50-30-Dup	4/29/2021	1410	NM	NM	0.0	0	1.3	19.6	7.1	37.2	1.2	36 0	Duplicate sample.
VMP-50-30	5/20/2021	1117	-5.27	-5.27	0.0	0	1.2	19.7	5 6	20.7	0.3	20.4	
VMP-50-30	6/17/2021	1252	-2.27	-2.32	0.0	0	1.2	19.3	2 8	15.9	2.6	13 3	
VMP-51-5	7/21/2020	0818	0.00	0.00	0.0	0	1.6	18.6	0 0	0 0	0.0	0.0	
VMP-51-5	8/19/2020	1242	0.00	0.00	0.0	0	2.4	19.0	0 0	0 0	0.0	0.0	
VMP-51-5	9/16/2020	1340	0.00	0.00	0.0	0	4.0	17.4	0 2	0 0	0.0	0.0	
VMP-51-5	10/27/2020	1010	0.00	0.00	0.0	0	3.4	17.6	0 0	0 0	0.0	0.0	
VMP-51-5	11/24/2020	0847	0.00	0.00	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-51-5	12/16/2020	1314	0.00	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-51-5	1/20/2021	1150	0.00	0.00	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-51-5	2/24/2021	1440	-0.09	-0.10	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-51-5	3/18/2021	0930	-0.15	0.00	0.0	0	0.4	19.7	0 0	0 0	0.0	0.0	
VMP-51-5	4/29/2021	1320	0.00	0.00	0.0	0	0.5	19.1	0 0	0 0	0.0	0.0	
VMP-51-5	5/20/2021	1041	0.00	0.00	0.0	0	0.6	20.3	0 0	0 0	0.0	0.0	
VMP-51-5	6/17/2021	1159	0.00	0.00	0.0	0	1.5	19.8	0 0	0 0	0.0	0.0	
VMP-51-10	7/21/2020	0819	0.00	0.00	0.0	0	2.4	18.2	0 0	0 0	0.0	0.0	
VMP-51-10	8/19/2020	1243	0.00	0.00	0.0	0	3.3	16.7	0 0	0 0	0.0	0.0	
VMP-51-10	9/16/2020	1341	0.00	0.00	0.0	0	3.8	17.4	0 0	0 0	0.0	0.0	
VMP-51-10	10/27/2020	1011	0.00	0.00	0.0	0	3.5	17.6	0 0	0 0	0.0	0.0	
VMP-51-10	11/24/2020	0848	0.00	0.00	0.0	0	1.6	20.3	0 0	0 0	0.0	0.0	
VMP-51-10	12/16/2020	1315	-0.19	0.00	0.0	0	0.9	20.4	0 0	0 0	0.0	0.0	
VMP-51-10	1/20/2021	1152	0.00	0.00	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-51-10	2/24/2021	1441	-0.19	-0.18	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-51-10	3/18/2021	0931	-0.26	-0.36	0.0	0	0.5	20.0	0 0	0 0	0.0	0.0	
VMP-51-10	4/29/2021	1322	-0.15	-0.13	0.0	0	0.9	19.4	0 0	0 0	0.0	0.0	
VMP-51-10	5/20/2021	1042	0.00	0.00	0.0	0	1.2	19.7	0 0	0 0	0.0	0.0	
VMP-51-10	6/17/2021	1159	-0.26	0.00	0.0	0	2.0	19.3	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-51-20	7/21/2020	0820	-0.13	0.00	0.0	0	2.1	18.7	0 0	0 0	0.0	0.0	
VMP-51-20	8/19/2020	1244	0.00	0.00	0.0	0	2.3	18.4	0 0	0 0	0.0	0.0	
VMP-51-20	9/16/2020	1342	0.00	0.00	0.0	0	2.6	17.8	0.1	0 0	0.0	0.0	
VMP-51-20	10/27/2020	1012	0.00	0.00	0.0	0	3.1	17.7	0 0	0 0	0.0	0.0	
VMP-51-20	11/24/2020	0849	0.00	0.00	0.0	0	2.7	19.2	0 0	0 0	0.0	0.0	
VMP-51-20	12/16/2020	1316	-0.25	-0.11	0.0	0	1.9	19.6	0 0	0 0	0.0	0.0	
VMP-51-20	1/20/2021	1154	0.11	0.10	0.0	0	1.6	19.7	0 0	0 0	0.0	0.0	
VMP-51-20	2/24/2021	1442	-0.50	-0.49	0.0	0	1.3	19.9	0 0	0 0	0.0	0.0	
VMP-51-20	3/18/2021	0932	-0.59	-0.15	0.0	0	1.1	20.0	0 0	0 0	0.0	0.0	
VMP-51-20	4/29/2021	1324	-0.40	-0.34	0.0	0	1.0	19.8	0 0	0 0	0.0	0.0	
VMP-51-20	5/20/2021	1043	0.00	0.00	0.0	0	1.2	19.7	0 0	0 0	0.0	0.0	
VMP-51-20	6/17/2021	1159	0.00	0.00	0.0	0	1.5	19.2	0 0	0 0	0.0	0.0	
VMP-51-30	7/21/2020	0821	-0.13	0.00	0.0	0	2.0	18.8	0 0	0 0	0.0	0.0	
VMP-51-30	8/19/2020	1245	0.00	0.00	0.0	0	2.2	18.7	0 0	0 0	0.0	0.0	
VMP-51-30	9/16/2020	1343	0.00	0.00	0.0	0	2.4	17.9	0 0	0 0	0.0	0.0	
VMP-51-30	10/27/2020	1013	0.00	0.00	0.0	0	2.8	17.9	0 0	0 0	0.0	0.0	
VMP-51-30	11/24/2020	0850	0.00	0.00	0.0	0	2.8	18.3	0 0	0 0	0.0	0.0	
VMP-51-30	12/16/2020	1317	-0.17	-0.10	0.0	0	2.6	18.7	0 0	0 0	0.0	0.0	
VMP-51-30	1/20/2021	1156	0.12	0.09	0.0	0	2.6	19.1	0 0	0 0	0.0	0.0	
VMP-51-30	2/24/2021	1443	-0.53	-0.47	0.0	0	2.1	19.5	0 0	0 0	0.0	0.0	
VMP-51-30	3/18/2021	0933	-0.62	-0.42	0.0	0	2.1	19.5	0 0	0 0	0.0	0.0	
VMP-51-30	4/29/2021	1326	-0.43	-0.34	0.0	0	1.8	19.5	0 0	0 0	0.0	0.0	
VMP-51-30	5/20/2021	1044	0.00	0.00	0.0	0	1.8	19.4	0 0	0 0	0.0	0.0	
VMP-51-30	6/17/2021	1201	0.00	0.00	0.0	0	1.7	19.1	0 0	0 0	0.0	0.0	
VMP-52-5	7/20/2020	1414	0.00	0.00	0.0	0	3.4	16.1	0 0	0 0	0.0	0.0	
VMP-52-5	8/19/2020	1354	0.00	0.00	0.0	0	4.1	16.8	0 0	0 0	0.0	0.0	
VMP-52-5	9/17/2020	1500	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-52-5	10/27/2020	1118	0.00	0.00	0.0	0	1.5	19.8	0 0	0 0	0.0	0.0	
VMP-52-5	11/23/2020	1420	0.00	0.00	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-52-5	12/16/2020	1243	0.00	0.00	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-52-5	1/20/2021	0945	0.00	0.00	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-52-5	2/24/2021	1128	0.00	0.00	0.0	0	0.5	20.1	0 0	0 0	0.0	0.0	
VMP-52-5	3/18/2021	0845	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-52-5	4/29/2021	1331	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-52-5	5/20/2021	0905	-2.58	0.00	0.0	0	2.2	18.0	0 0	0 0	0.0	0.0	
VMP-52-5	6/17/2021	1015	0.00	0.00	0.0	0	3.3	17.5	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-52-10	7/20/2020	1415	0.00	0.00	0.0	0	3.0	15.9	0 0	0 0	0.0	0.0	
VMP-52-10	8/19/2020	1355	0.00	0.00	0.0	0	4.2	14.2	0 0	0 0	0.0	0.0	
VMP-52-10	9/17/2020	1501	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-52-10	10/27/2020	1119	0.00	0.00	0.0	0	3.8	15.4	0 0	0 0	0.0	0.0	
VMP-52-10	11/23/2020	1421	0.00	0.00	0.0	0	3.3	16.6	0 0	0 0	0.0	0.0	
VMP-52-10	12/16/2020	1244	0.00	0.00	0.0	0	4.0	17.1	0 0	0 0	0.0	0.0	
VMP-52-10	1/20/2021	0946	-0.35	-0.29	0.0	0	3.9	17.9	0 0	0 0	0.0	0.0	
VMP-52-10	2/24/2021	1130	0.00	0.00	0.0	0	2.2	18.0	0 0	0 0	0.0	0.0	
VMP-52-10	3/18/2021	0846	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-52-10	4/29/2021	1236	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-52-10	5/20/2021	0906	0.30	0.26	0.0	0	2.7	17.2	0 0	0 0	0.0	0.0	
VMP-52-10	6/17/2021	1016	0.00	0.00	0.0	0	3.8	16.6	0 0	0 0	0.0	0.0	
VMP-52-20	7/20/2020	1416	0.10	0.00	0.0	0	2.0	19.1	0 0	0 0	0.0	0.0	
VMP-52-20	8/19/2020	1356	0.00	0.00	0.0	0	2.3	18.9	0 0	0 0	0.0	0.0	
VMP-52-20	9/17/2020	1502	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-52-20	10/27/2020	1120	0.00	0.00	0.0	0	2.7	18.1	0 0	0 0	0.0	0.0	
VMP-52-20	11/23/2020	1422	0.12	0.00	0.0	0	2.8	17.8	0 0	0 0	0.0	0.0	
VMP-52-20	12/16/2020	1245	0.00	0.00	0.0	0	2.9	17.6	0 0	0 0	0.0	0.0	
VMP-52-20	1/20/2021	0947	0.00	0.13	0.0	0	3.2	17.0	0 0	0 0	0.0	0.0	
VMP-52-20	2/24/2021	1132	0.00	-0.12	0.0	0	3.4	17.1	0 0	0 0	0.0	0.0	
VMP-52-20	3/18/2021	0847	-0.32	-0.41	0.0	0	3.3	17.2	0 0	0 0	0.0	0.0	
VMP-52-20	4/29/2021	1235	-0.26	-0.22	0.0	0	3.3	17.4	0 0	0 0	0.0	0.0	
VMP-52-20	5/20/2021	0907	0.00	0.00	0.0	0	3.4	17.5	0 0	0 0	0.0	0.0	
VMP-52-20	6/17/2021	1017	0.13	0.00	0.0	0	3.3	17.4	0 0	0 0	0.0	0.0	
VMP-52-30	7/20/2020	1417	0.10	0.00	0.0	0	2.0	19.0	0 0	0 0	0.0	0.0	
VMP-52-30	8/19/2020	1357	0.10	0.10	0.0	0	2.2	18.9	0 0	0 0	0.0	0.0	
VMP-52-30	9/17/2020	1503	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Inaccessible due to construction activities.
VMP-52-30	10/27/2020	1121	0.00	0.00	0.0	0	2.5	18.2	0 0	0 0	0.0	0.0	
VMP-52-30	11/23/2020	1423	0.14	0.00	0.0	0	2.7	18.0	0 0	0 0	0.0	0.0	
VMP-52-30	12/16/2020	1246	0.00	0.00	0.0	0	2.8	17.6	0 0	0 0	0.0	0.0	
VMP-52-30	1/20/2021	0948	0.00	0.12	0.0	0	3.2	17.4	0 0	0 0	0.0	0.0	
VMP-52-30-Dup	1/20/2021	0948	NM	NM	0.0	0	3.1	17.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-52-30	2/24/2021	1134	-0.23	-0.13	0.0	0	3.4	17.1	0 0	0 0	0.0	0.0	
VMP-52-30	3/18/2021	0848	-0.18	-0.41	0.0	0	3.5	16.9	0 0	0 0	0.0	0.0	
VMP-52-30	4/29/2021	1237	-0.26	-0.22	0.0	0	3.3	17.4	0 0	0 0	0.0	0.0	
VMP-52-30	5/20/2021	0908	0.00	0.00	0.0	0	3.3	17.6	0 0	0 0	0.0	0.0	
VMP-52-30	6/17/2021	1018	0.00	0.00	0.0	0	3.3	17.4	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-53-5	7/20/2020	1202	0.00	0.00	0.0	0	2.5	17.8	0 0	0 0	0.0	0.0	
VMP-53-5	8/20/2020	0913	0.00	0.00	0.0	0	3.7	16.4	0 0	0 0	0.0	0.0	
VMP-53-5	9/16/2020	1140	0.00	0.00	0.0	0	3.7	16.8	0 0	0 0	0.0	0.0	
VMP-53-5	10/26/2020	1230	0.00	0.00	0.0	0	1.0	20.1	0 0	0 0	0.0	0.0	
VMP-53-5	11/23/2020	1245	0.00	0.00	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-53-5	12/16/2020	1115	0.00	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-53-5	1/20/2021	0827	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-53-5	2/24/2021	1002	0.00	0.00	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-53-5	3/17/2021	1255	0.00	0.00	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-53-5	4/29/2021	1134	0.00	0.00	0.0	0	0.7	20.1	0 0	0 0	0.0	0.0	
VMP-53-5	5/19/2021	1327	0.00	0.00	0.0	0	0.9	19.7	0 0	0 0	0.0	0.0	
VMP-53-5	6/17/2021	0906	0.00	0.00	0.0	0	1.8	19.4	0 0	0 0	0.0	0.0	
VMP-53-10	7/20/2020	1203	0.00	0.00	0.0	0	2.0	18.2	0 2	0 0	0.0	0.0	
VMP-53-10	8/20/2020	0914	0.00	0.00	0.0	0	2.2	18.0	0 0	0 0	0.0	0.0	
VMP-53-10	9/16/2020	1141	0.00	0.00	0.0	0	3.2	17.0	0 0	0 0	0.0	0.0	
VMP-53-10	10/26/2020	1231	0.00	0.00	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-53-10	11/23/2020	1246	0.00	0.00	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-53-10	12/16/2020	1116	0.43	0.00	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-53-10	1/20/2021	0828	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-53-10	2/24/2021	1004	0.00	0.00	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-53-10	3/17/2021	1256	0.00	0.00	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-53-10	4/29/2021	1136	0.00	-0.44	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-53-10	5/19/2021	1328	0.00	0.00	0.0	0	0.6	20.2	0 0	0 0	0.0	0.0	
VMP-53-10	6/17/2021	0907	0.00	0.00	0.0	0	1.2	19.6	0 0	0 0	0.0	0.0	
VMP-53-20	7/20/2020	1204	0.00	0.00	0.0	0	1.8	18.5	0 3	0 0	0.0	0.0	
VMP-53-20	8/20/2020	0915	0.10	0.00	0.0	0	3.7	16.4	0 2	0 0	0.0	0.0	
VMP-53-20	9/16/2020	1142	0.00	0.00	0.0	0	2.2	17.9	0 0	0 0	0.0	0.0	
VMP-53-20	10/26/2020	1232	-0.14	0.00	0.0	0	1.4	19.8	0 0	0 0	0.0	0.0	
VMP-53-20	11/23/2020	1247	0.00	0.00	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-53-20	12/16/2020	1117	-0.16	-0.10	0.0	0	0.6	20.6	0 0	0 0	0.0	0.0	
VMP-53-20	1/20/2021	0829	0.00	0.00	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-53-20	2/24/2021	1006	-0.35	-0.36	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-53-20	3/17/2021	1257	-0.07	0.00	0.0	0	0.3	20.4	0 0	0 0	0.0	0.0	
VMP-53-20	4/29/2021	1138	-0.40	0.00	0.0	0	0.5	20.2	0 0	0 0	0.0	0.0	
VMP-53-20	5/19/2021	1329	-0.32	-0.31	0.0	0	0.8	19.9	0 0	0 0	0.0	0.0	
VMP-53-20	6/17/2021	0908	0.00	0.00	0.0	0	1.3	19.5	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-53-30	7/20/2020	1205	0.00	0.00	0.0	0	2.1	18.2	0 2	0 0	0.0	0.0	
VMP-53-30-Dup	7/20/2020	1205	NM	NM	0.0	0	2.1	18.2	0 2	0 0	0.0	0.0	Duplicate sample.
VMP-53-30	8/20/2020	0916	0.10	0.00	0.0	0	2.1	18.2	0 3	0 0	0.0	0.0	
VMP-53-30	9/16/2020	1143	0.00	0.00	0.0	0	1.9	18.5	0 0	0 0	0.0	0.0	
VMP-53-30-Dup	9/16/2020	1143	NM	NM	0.0	0	2.2	18.0	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-53-30	10/26/2020	1233	-0.11	0.00	0.0	0	2.5	18.3	0 0	0 0	0.0	0.0	
VMP-53-30	11/23/2020	1248	0.00	-0.11	0.0	0	2.2	18.9	0 0	0 0	0.0	0.0	
VMP-53-30-Dup	11/23/2020	1248	NM	NM	0.0	0	2.2	18.9	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-53-30	12/16/2020	1118	-0.20	-0.11	0.0	0	2.1	19.3	0 0	0 0	0.0	0.0	
VMP-53-30-Dup	12/16/2020	1118	NM	NM	0.0	0	2.1	19.3	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-53-30	1/20/2021	0830	0.00	0.00	0.0	0	2.1	19.6	0 0	0 0	0.0	0.0	
VMP-53-30	2/24/2021	1008	-0.37	-0.40	0.0	0	1.8	19.6	0 0	0 0	0.0	0.0	
VMP-53-30	3/17/2021	1258	-0.07	0.00	0.0	0	1.8	19.5	0 0	0 0	0.0	0.0	
VMP-53-30	4/29/2021	1140	-0.43	-0.48	0.0	0	1.9	19.1	0 0	2.4	2.4	0.0	
VMP-53-30	5/19/2021	1330	-0.34	-0.33	0.0	0	2.0	18.8	0 0	0 0	0.0	0.0	
VMP-53-30	6/17/2021	0909	0.00	0.00	0.0	0	2.3	18.5	0 0	0 0	0.0	0.0	
VMP-54-5	7/20/2020	1333	0.00	0.00	0.0	0	3.9	16.6	0 0	0 0	0.0	0.0	
VMP-54-5	8/20/2020	0833	0.00	0.00	0.0	0	4.7	14.4	0.1	0 0	0.0	0.0	
VMP-54-5	9/16/2020	1208	0.00	0.00	0.0	0	4.7	15.4	0 0	0 0	0.0	0.0	
VMP-54-5	10/26/2020	1253	0.00	0.00	0.0	0	3.7	16.6	0 0	0 0	0.0	0.0	
VMP-54-5	11/23/2020	1305	0.00	0.00	0.0	0	3.2	17.7	0 0	0 0	0.0	0.0	
VMP-54-5	12/16/2020	1150	0.00	0.00	0.0	0	2.6	18.1	0 0	0 0	0.0	0.0	
VMP-54-5	1/20/2021	0845	0.00	0.00	0.0	0	2.2	18.9	0 0	0 0	0.0	0.0	
VMP-54-5	2/24/2021	1016	0.00	0.00	0.0	0	1.7	19.3	0 0	0 0	0.0	0.0	
VMP-54-5	3/17/2021	1310	0.05	0.00	0.0	0	2.3	18.5	0 0	0 0	0.0	0.0	
VMP-54-5	4/29/2021	1147	0.00	0.00	0.0	0	2.8	17.9	0 0	0 0	0.0	0.0	
VMP-54-5	5/19/2021	1346	0.00	0.00	0.0	0	3.2	17.5	0 0	0 0	0.0	0.0	
VMP-54-5	6/17/2021	0929	0.00	0.00	0.0	0	4.5	16.6	0 0	0 0	0.0	0.0	
VMP-54-10	7/20/2020	1334	0.00	0.00	0.0	0	2.9	17.3	0 0	0 0	0.0	0.0	
VMP-54-10	8/20/2020	0834	0.00	0.00	0.0	0	3.4	15.8	0 0	0 0	0.0	0.0	
VMP-54-10	9/16/2020	1209	0.00	0.00	0.0	0	3.8	15.5	0 0	0 0	0.0	0.0	
VMP-54-10	10/26/2020	1254	0.00	0.00	0.0	0	3.7	16.2	0 0	0 0	0.0	0.0	
VMP-54-10	11/23/2020	1306	0.00	0.00	0.0	0	3.4	17.0	0 0	0 0	0.0	0.0	
VMP-54-10	12/16/2020	1151	0.00	0.00	0.0	0	3.0	17.4	0 0	0 0	0.0	0.0	
VMP-54-10	1/20/2021	0846	0.00	0.00	0.0	0	2.7	18.2	0 0	0 0	0.0	0.0	
VMP-54-10	2/24/2021	1018	0.00	0.00	0.0	0	1.8	19.3	0 0	0 0	0.0	0.0	
VMP-54-10	3/17/2021	1311	0.00	0.66	0.0	0	2.3	18.2	0 0	0 0	0.0	0.0	
VMP-54-10	4/29/2021	1149	0.00	0.00	0.0	0	2.3	18.2	0 0	0 0	0.0	0.0	
VMP-54-10	5/19/2021	1347	0.00	0.00	0.0	0	2.5	17.8	0 0	0 0	0.0	0.0	
VMP-54-10	6/17/2021	0930	0.00	0.00	0.0	0	3.0	17.4	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-54-20	7/20/2020	1335	0.10	0.00	0.0	0	2.6	16.9	0 0	0 0	0.0	0.0	
VMP-54-20	8/20/2020	0835	0.00	0.00	0.0	0	2.8	16.0	0 0	0 0	0.0	0.0	
VMP-54-20	9/16/2020	1210	0.00	0.00	0.0	0	3.1	15.4	0 0	0 0	0.0	0.0	
VMP-54-20	10/26/2020	1255	0.00	0.00	0.0	0	3.7	15.3	0 0	0 0	0.0	0.0	
VMP-54-20	11/23/2020	1307	-10 85	0.69	0.0	0	3.7	15.7	0 0	0 0	0.0	0.0	
VMP-54-20	12/16/2020	1152	0.00	0.30	0.0	0	3.5	16.1	0 0	0 0	0.0	0.0	
VMP-54-20	1/20/2021	0847	0.00	0.00	0.0	0	3.4	16.8	0 0	0 0	0.0	0.0	
VMP-54-20	2/24/2021	1020	0.00	0.00	0.0	0	3.1	17.0	0 0	0 0	0.0	0.0	
VMP-54-20	3/17/2021	1312	0.00	0.19	0.0	0	3.0	17.0	0 0	0 0	0.0	0.0	
VMP-54-20	4/29/2021	1151	0.00	0.00	0.0	0	2.5	17.5	0 0	0 0	0.0	0.0	
VMP-54-20	5/19/2021	1348	0.00	0.00	0.0	0	2.5	17.2	0 0	0 0	0.0	0.0	
VMP-54-20	6/17/2021	0931	0.00	0.00	0.0	0	2.7	17.0	0 0	0 0	0.0	0.0	
VMP-54-30	7/20/2020	1336	0.00	0.00	0.0	0	4.1	16.3	0 0	0 0	0.0	0.0	
VMP-54-30	8/20/2020	0836	0.00	0.00	0.0	0	4.2	15.3	0 0	0 0	0.0	0.0	
VMP-54-30	9/16/2020	1211	0.00	0.00	0.0	0	4.9	15.3	0 0	0 0	0.0	0.0	
VMP-54-30	10/26/2020	1256	0.00	0.00	0.0	0	2.9	17.3	0 0	0 0	0.0	0.0	
VMP-54-30	11/23/2020	1308	0.00	0.00	0.0	0	2.5	17.8	0 0	0 0	0.0	0.0	
VMP-54-30	12/16/2020	1153	0.00	0.00	0.0	0	1.4	19.1	0 0	0 0	0.0	0.0	
VMP-54-30	1/20/2021	0848	0.00	0.00	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-54-30	2/24/2021	1022	0.00	0.00	0.0	0	0.8	20.4	0 0	0 0	0.0	0.0	
VMP-54-30-Dup	2/24/2021	1022	NM	NM	0.0	0	0.9	20.3	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-54-30	3/17/2021	1313	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Water encountered during purge.
VMP-54-30	4/29/2021	1153	-0.35	-0.16	0.0	0	2.1	18.0	0 0	0 0	0.0	0.0	
VMP-54-30	5/19/2021	1349	0.00	0.00	0.0	0	2.6	17.1	0 0	0 0	0.0	0.0	
VMP-54-30	6/17/2021	0932	0.00	0.00	0.0	0	5.0	16.5	0 0	0 0	0.0	0.0	
VMP-55-5	7/20/2020	1038	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	8/20/2020	1148	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	9/16/2020	0948	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	10/26/2020	1033	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	11/23/2020	1005	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	12/16/2020	1025	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	1/19/2021	1204	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	2/23/2021	1045	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	3/17/2021	1110	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	4/29/2021	0821	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	5/19/2021	1203	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-5	6/16/2021	0824	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-55-10	7/20/2020	1039	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	8/20/2020	1149	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	9/16/2020	0949	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	10/26/2020	1034	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	11/23/2020	1006	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	12/16/2020	1026	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	1/19/2021	1202	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	2/23/2021	1046	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	3/17/2021	1111	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	4/29/2021	0823	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	5/19/2021	1204	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-10	6/16/2021	0826	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-20	7/20/2020	1040	-0.10	0.00	0.0	0	22.5	1.1	1.4	90.0	70 0	20 0	
VMP-55-20	8/20/2020	1150	0.26	0.00	0.0	0	21.5	1.8	1 6	161	161	0.0	
VMP-55-20-Dup	8/20/2020	1150	NM	NM	0.0	0	22.3	1.2	1 6	158	158	0.0	Duplicate sample.
VMP-55-20	9/16/2020	0950	0.34	0.00	0.0	0	17.5	5.0	0.1	9 0	9.0	0.0	
VMP-55-20	10/26/2020	1035	-1.21	-0.77	0.2	5	21.2	1.9	4 0	1990	1830	160	
VMP-55-20	11/23/2020	1007	-0.59	-0.54	7.9	OVR	18.9	0.3	107	64710	58270	6440	Re-sampled to confirm initial sample.
VMP-55-20	11/24/2020	1205	1.30	NM	5.0	OVR	18.5	0.7	113	39250	34810	4440	Re-sample.
VMP-55-20	12/16/2020	1028	-0.13	0.12	5.1	OVR	18.5	0.8	74.8	43580	38730	4850	
VMP-55-20	1/19/2021	1200	-0.67	-0.35	4.0	80	19.1	1.0	83.4	35310	32840	2470	
VMP-55-20	2/23/2021	1047	-0.69	-0.59	6.0	OVR	17.3	1.2	142	42160	37270	4890	
VMP-55-20	3/17/2021	1112	0.83	-0.25	5.4	OVR	17.8	2.0	139	38470	33750	4720	
VMP-55-20	4/29/2021	0825	-0.23	-0.15	11.7	OVR	18.7	0.7	165	65170	56430	8740	
VMP-55-20	5/19/2021	1205	-0.33	0.00	16 3	OVR	18.8	0.3	302	67110	58110	9000	
VMP-55-20	6/16/2021	0828	-0.67	-0.47	15 2	OVR	18.5	0.6	135	74820	65270	9550	SVE system off-line from 0754 to 0936 due to power outage.
VMP-55-30	7/20/2020	1041	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	8/20/2020	1151	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	9/16/2020	0951	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	10/26/2020	1036	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	11/23/2020	1008	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	12/16/2020	1029	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	1/19/2021	1158	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	2/23/2021	1048	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	3/17/2021	1113	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	4/29/2021	0827	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	5/19/2021	1206	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-55-30	6/16/2021	0830	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-56-10	7/21/2020	0945	-3.98	-3.90	0.0	0	1.1	19.4	0 0	0 0	0.0	0.0	
VMP-56-10	7/31/2020	0837	-3.48	NM	0.0	0	0.6	20.3	0 3	0 0	0.0	0.0	
VMP-56-10	8/19/2020	1017	-3.48	-3.48	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-56-10	9/17/2020	0839	-2.96	-2.95	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-56-10	9/29/2020	1310	-0.03	NM	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-56-10	10/6/2020	1425	0.00	NM	0.0	0	0.6	20.1	0 0	11.8	11.7	0.1	
VMP-56-10	10/7/2020	1420	0.00	NM	0.0	0	0.6	19.5	0.1	10.2	9.7	0.5	
VMP-56-10	10/13/2020	1426	-0.23	NM	0.0	0	0.7	19.1	0.1	8 5	8.5	0.0	
VMP-56-10	10/20/2020	1256	-0.11	NM	0.0	0	1.1	18.8	0 0	6 2	6.2	0.0	
VMP-56-10	10/27/2020	0840	0.00	0.00	0.0	0	1.3	18.4	0.1	0 0	0.0	0.0	
VMP-56-10	11/24/2020	1021	-3.45	-3.73	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-56-10	12/17/2020	1003	-3.86	-3.90	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-56-10	1/20/2021	1316	-2.48	-2.39	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-56-10	2/24/2021	1340	-4.80	-5.07	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-56-10	3/18/2021	1115	-7.22	-6.56	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-56-10	4/30/2021	1024	-4.40	-4.44	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-56-10	5/20/2021	1112	-3.73	-3.85	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-56-10	6/17/2021	1230	-0.76	-0.77	0.0	0	0.8	20.1	0 0	0 0	0.0	0.0	
VMP-56-25	7/21/2020	0946	-7.81	-7.73	0.0	0	1.1	20.1	0.4	0 0	0.0	0.0	
VMP-56-25	7/31/2020	0840	-8.74	NM	0.0	0	0.6	20.2	0 2	16.1	16.1	0.0	
VMP-56-25	8/19/2020	1018	-7.90	-7.93	0.0	0	0.6	20.1	0.4	3 6	3.6	0.0	
VMP-56-25	9/17/2020	0840	-8.03	-7.43	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-56-25	9/29/2020	1312	0.02	NM	0.0	0	0.6	19.8	0.1	18.0	17 2	0.8	
VMP-56-25	10/6/2020	1427	0.00	NM	0.0	0	0.9	18.7	0 2	41.8	38 6	3.2	
VMP-56-25	10/7/2020	1421	0.23	NM	0.0	0	0.9	18.6	0 9	38.7	33.1	5.6	
VMP-56-25	10/13/2020	1430	0.34	NM	0.0	0	1.3	17.0	0 3	30.2	29.7	0.5	
VMP-56-25	10/20/2020	1302	0.48	NM	0.0	0	1.7	16.4	0 3	15.6	14 2	1.4	
VMP-56-25	10/27/2020	0841	-0.14	-0.03	0.0	0	2.2	15.6	0 6	8.4	7.9	0.5	
VMP-56-25	11/24/2020	1022	-8.30	-8.14	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-56-25	12/17/2020	1004	-8.09	-8.11	0.0	0	0.0	20.9	0.1	0 0	0.0	0.0	
VMP-56-25	1/20/2021	1318	-5.37	-5.30	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-56-25	2/24/2021	1341	-8.43	-8.54	0.0	0	0.0	20.9	0 2	1.1	0.0	1.1	
VMP-56-25-Dup	2/24/2021	1341	NM	NM	0.0	0	0.0	20.9	0 2	1 0	0.0	1.0	Duplicate sample.
VMP-56-25	3/18/2021	1116	-10.14	-9.22	0.0	0	0.1	20.8	0 3	2 8	0.0	2.8	
VMP-56-25	4/30/2021	1026	-8.96	-9.04	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-56-25	5/20/2021	1114	-8.24	-8.21	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-56-25	6/17/2021	1231	-1.68	-1.70	0.0	0	1.0	19.5	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-56-38.5	7/21/2020	0948	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	7/31/2020	0842	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	8/19/2020	1019	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	9/17/2020	0841	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	10/6/2020	1429	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	10/7/2020	1422	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	10/13/2020	1431	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	10/13/2020	1432	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	10/20/2020	1304	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	10/27/2020	0842	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	11/24/2020	1023	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	12/17/2020	1005	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	1/20/2021	1320	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	2/24/2021	1342	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	3/18/2021	1117	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	4/30/2021	1028	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	5/20/2021	1115	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-56-38.5	6/17/2021	1232	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-57-5A	7/20/2020	1226	0.00	0.00	0.0	0	1.8	17.8	0 0	0 0	0.0	0.0	
VMP-57-5A	8/19/2020	1423	0.00	0.00	0.0	0	2.8	15.2	0 5	0 0	0.0	0.0	
VMP-57-5A	9/16/2020	1300	0.00	0.00	0.0	0	3.8	13.3	0 0	0 0	0.0	0.0	
VMP-57-5A	10/26/2020	1353	0.00	-0.06	0.0	0	3.7	13.6	0 0	0 0	0.0	0.0	
VMP-57-5A	11/24/2020	1245	-0.08	0.22	0.0	0	3.2	15.3	0 0	0 0	0.0	0.0	
VMP-57-5A	12/16/2020	1416	-0.11	-0.12	0.0	0	1.1	20.4	0 0	0 0	0.0	0.0	
VMP-57-5A	1/19/2021	1345	-0.13	-0.12	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-57-5A	2/23/2021	1458	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-57-5A	3/17/2021	1435	0.13	0.00	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-57-5A	4/29/2021	1400	0.40	-0.14	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-57-5A	5/19/2021	1238	0.00	0.00	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-57-5A	6/16/2021	1350	0.00	-0.10	0.0	0	1.5	18.9	0 0	0 0	0.0	0.0	
VMP-57-10	7/20/2020	1227	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-57-10	8/19/2020	1424	0.16	0.00	0.0	0	1.7	18.1	0 0	0 0	0.0	0.0	
VMP-57-10	9/16/2020	1301	0.21	0.11	0.0	0	2.3	16.8	0 0	0 0	0.0	0.0	
VMP-57-10	10/26/2020	1353	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-57-10	11/24/2020	1246	0.38	0.02	0.0	0	2.7	16.0	0 0	0 0	0.0	0.0	
VMP-57-10	12/16/2020	1418	-0.25	-0.68	0.0	0	1.0	20.5	0 0	0 0	0.0	0.0	
VMP-57-10	1/19/2021	1346	-0.36	-0.35	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-57-10	2/23/2021	1459	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-57-10	3/17/2021	1436	0.00	-0.15	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-57-10	4/29/2021	1401	-0.87	-1.02	0.0	0	0.8	20.2	0 0	0 0	0.0	0.0	
VMP-57-10	5/19/2021	1240	-0.23	0.00	0.0	0	0.8	20.1	0 0	0 0	0.0	0.0	
VMP-57-10-Dup	5/19/2021	1240	NM	NM	0.0	0	0.7	20.1	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-57-10	6/16/2021	1351	0.00	0.00	0.0	0	0.6	19.8	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-57-20	7/20/2020	1228	-0.49	0.00	0.0	0	1.5	18.0	0 0	0 0	0.0	0.0	
VMP-57-20	8/19/2020	1425	0.00	0.00	0.0	0	2.3	17.2	0 0	0 0	0.0	0.0	
VMP-57-20	9/16/2020	1302	0.00	-0.36	0.0	0	2.7	15.4	0 2	0 0	0.0	0.0	
VMP-57-20	10/26/2020	1354	-0.93	-0.35	0.3	6	3.6	12.6	0 0	2820	2670	250	
VMP-57-20	11/24/2020	1247	-0.03	0.17	0.0	0	2.5	16.5	0 0	0 0	0.0	0.0	
VMP-57-20	12/16/2020	1420	-3.04	-0.26	0.0	0	1.2	20.4	0 0	0 0	0.0	0.0	
VMP-57-20	1/19/2021	1347	-3.20	-0.20	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-57-20-Dup	1/19/2021	1347	NM	NM	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-57-20	2/23/2021	1500	-0.90	-0.50	0.2	4	0.3	20.3	0 2	1486	1486	0.0	Attempted to re-sample to confirm initial results.
VMP-57-20	2/25/2021	1029	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged when attempting to re-sample.
VMP-57-20	3/17/2021	1437	-0.94	0.18	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-57-20	4/29/2021	1402	-0.33	-0.40	0.0	0	0.7	20.1	0 0	0 0	0.0	0.0	
VMP-57-20	5/19/2021	1242	-0.55	-0.11	0.0	0	0.9	19.8	0 0	0 0	0.0	0.0	
VMP-57-20	6/16/2021	1352	0.00	-0.12	0.0	0	1.7	18.5	0 0	0 0	0.0	0.0	
VMP-57-20-Dup	6/16/2021	1352	NM	NM	0.0	0	1.7	18.5	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-58-5	7/20/2020	1214	-0.28	0.00	0.0	0	0.0	20.9	0 5	1 3	0.0	1.3	
VMP-58-5	8/19/2020	1406	0.00	0.00	0.0	0	1.6	16.3	0 3	0 0	0.0	0.0	
VMP-58-5	9/16/2020	1225	0.09	0.00	0.0	0	2.2	13.7	0 2	0 0	0.0	0.0	
VMP-58-5	10/26/2020	1335	0.03	-0.09	0.0	0	2.7	14.8	0 0	0 0	0.0	0.0	
VMP-58-5	11/23/2020	1415	0.17	0.17	0.0	0	2.7	13.9	0 0	0 0	0.0	0.0	
VMP-58-5	12/16/2020	1402	-0.79	-0.64	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-58-5	1/19/2021	1330	-1.15	-0.53	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-58-5	2/23/2021	1432	0.00	-0.17	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-58-5	3/17/2021	1420	-0.62	-0.65	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-58-5	4/29/2021	1347	-1.11	-1.31	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-58-5	5/20/2021	0814	-0.40	-0.92	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-58-5	6/16/2021	1335	-0.36	-0.51	0.0	0	0.3	20.2	0 0	0 0	0.0	0.0	
VMP-58-10	7/20/2020	1215	0.00	0.00	0.0	0	0.2	19.5	0.4	0 0	0.0	0.0	
VMP-58-10	8/19/2020	1407	0.00	0.00	0.0	0	1.3	17.0	0 3	0 0	0.0	0.0	
VMP-58-10	9/16/2020	1226	0.00	0.00	0.0	0	2.0	14.6	0 3	0 0	0.0	0.0	
VMP-58-10	10/26/2020	1336	0.04	-0.12	0.0	0	2.7	13.3	0 0	0 0	0.0	0.0	
VMP-58-10	11/23/2020	1416	0.21	0.00	0.0	0	3.2	12.5	0 0	0 0	0.0	0.0	
VMP-58-10	12/16/2020	1404	-1.03	-0.79	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-58-10	1/19/2021	1331	-0.67	-0.66	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-58-10	2/23/2021	1434	0.00	-0.44	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-58-10	3/17/2021	1421	-0.40	-0.77	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-58-10	4/29/2021	1348	-2.39	-1.52	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-58-10	5/20/2021	0816	-1.52	-1.08	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-58-10	6/16/2021	1336	-0.46	-0.63	0.0	0	0.2	20.3	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-58-20	7/20/2020	1216	0.00	0.00	0.0	0	1.6	17.3	0 8	0 0	0.0	0.0	
VMP-58-20	8/19/2020	1408	0.00	0.00	0.0	0	3.0	15.2	0 3	0 0	0.0	0.0	
VMP-58-20	9/16/2020	1227	-0.09	0.21	0.0	0	3.2	13.7	0 6	0 0	0.0	0.0	
VMP-58-20	10/26/2020	1337	-0.20	-0.13	0.0	0	3.6	12.4	0 3	0 0	0.0	0.0	
VMP-58-20	11/23/2020	1417	0.27	0.37	0.0	0	4.0	11.5	0.1	0 0	0.0	0.0	
VMP-58-20	12/16/2020	1406	-1.23	-1.07	0.0	0	1.4	20.0	0 0	0 0	0.0	0.0	
VMP-58-20	1/19/2021	1332	-1.65	-0.90	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-58-20	2/23/2021	1436	0.00	-1.25	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-58-20-Dup	2/23/2021	1436	NM	NM	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-58-20	3/17/2021	1422	-0.62	-0.99	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-58-20	4/29/2021	1349	-1.72	-1.86	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-58-20	5/20/2021	0818	-1.36	-1.33	0.0	0	0.3	20.6	0 0	0 0	0.0	0.0	
VMP-58-20	6/16/2021	1337	-0.66	-0.82	0.0	0	0.4	20.4	0 0	0 0	0.0	0.0	
VMP-58-30	7/20/2020	1217	0.00	0.00	0.0	0	12.4	2.4	6.7	110	0.0	110	
VMP-58-30	8/19/2020	1409	-0.15	0.00	0.0	0	10.1	6.1	1.4	1 0	0.0	1.0	
VMP-58-30	9/16/2020	1228	0.00	0.00	0.0	0	9.5	5.8	0 5	6 0	6.0	0.0	
VMP-58-30-Dup	9/16/2020	1228	NM	NM	0.0	0	9.6	5.8	0 5	6 0	6.0	0.0	Duplicate sample.
VMP-58-30	10/26/2020	1337	0.05	0.63	0.0	0	9.5	4.6	0 0	0 0	0.0	0.0	
VMP-58-30	11/23/2020	1418	0.10	0.21	0.0	0	9.5	4.1	0.1	17.0	17 0	0.0	
VMP-58-30	12/16/2020	1408	-1.03	-1.23	0.0	0	2.9	18.4	0.1	0 0	0.0	0.0	
VMP-58-30	1/19/2021	1333	-1.62	-0.94	0.0	0	2.5	18.8	0 0	0 0	0.0	0.0	
VMP-58-30	2/23/2021	1438	1.43	-1.47	0.0	0	1.4	19.9	0 0	0 0	0.0	0.0	
VMP-58-30	3/17/2021	1423	-0.81	-1.18	0.0	0	1.0	20.1	0 0	0 0	0.0	0.0	
VMP-58-30	4/29/2021	1350	-2.20	-2.08	0.0	0	0.7	19.8	0 0	0 0	0.0	0.0	
VMP-58-30	5/20/2021	0820	-1.61	-1.53	0.0	0	1.0	19.8	0 0	0 0	0.0	0.0	
VMP-58-30	6/16/2021	1338	-0.89	-1.06	0.0	0	1.5	18.9	0 0	0 0	0.0	0.0	
VMP-59-5	7/20/2020	1133	-0.18	0.00	0.0	0	0.4	19.5	0 3	0 0	0.0	0.0	
VMP-59-5	8/19/2020	1352	0.00	0.00	0.0	0	1.4	18.2	0 2	123	123	0.0	Re-sampled to confirm initial sample.
VMP-59-5	8/20/2020	1436	0.10	NM	0.2	4	1.5	17.2	2 6	1013	971	42 0	Re-sample.
VMP-59-5	9/16/2020	1205	0.00	0.00	0.0	0	1.8	17.0	0.1	5 8	5.8	0.0	Re-sampled to confirm initial sample.
VMP-59-5	9/17/2020	0900	0.00	NM	0.0	0	2.1	16.7	0 3	177	177	0.0	Re-sample.
VMP-59-5	10/26/2020	1320	0.00	0.33	0.0	0	2.2	15.6	0 8	44.7	37 9	6.8	
VMP-59-5	11/23/2020	1400	0.05	0.09	0.0	0	2.1	15.9	0.1	1.1	1.1	0.0	
VMP-59-5	11/30/2020	1015	-0.58	NM	0.0	0	2.5	15.5	0 9	2 6	0.1	2.5	
VMP-59-5	12/3/2020	1150	-0.93	NM	0.0	0	1.1	20.6	1.1	3.4	0.0	3.4	
VMP-59-5	12/8/2020	1330	-0.82	NM	0.0	0	0.1	20.7	0.1	0 0	0.0	0.0	
VMP-59-5	12/16/2020	1348	-0.81	-0.97	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-5	1/19/2021	1316	-1.32	-0.40	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-5	2/23/2021	1416	-0.82	-0.89	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-5	3/17/2021	1405	-0.86	-0.96	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-59-5	4/29/2021	1330	-1.27	-1.26	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-5	5/19/2021	1222	-0.69	-0.60	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-5	6/16/2021	1325	-0.54	-0.63	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-59-10	7/20/2020	1134	0.00	0.00	0.0	0	0.2	20.2	0 2	0 0	0.0	0.0	
VMP-59-10	8/19/2020	1353	0.00	0.00	0.0	0	0.9	18.8	0 3	8.4	8.4	0.0	
VMP-59-10	9/16/2020	1206	0.00	0.00	0.0	0	1.2	17.3	0 3	18.2	18 2	0.0	Re-sampled to confirm initial sample.
VMP-59-10	9/17/2020	0901	-1.60	NM	0.0	0	1.4	17.3	0 3	21.1	18 8	2.3	Re-sample.
VMP-59-10	10/26/2020	1321	0.00	-0.06	0.0	0	1.8	15.6	0 3	23.1	21 2	1.9	
VMP-59-10	11/23/2020	1401	-0.18	-0.15	0.0	0	1.9	15.0	0 0	2.1	2.1	0.0	
VMP-59-10-Dup	11/23/2020	1401	NM	NM	0.0	0	1.9	15.2	0 0	2 8	2.8	0.0	Duplicate sample.
VMP-59-10	11/30/2020	1016	-0.59	NM	0.0	0	2.1	15.1	0 9	7 0	3.0	4.0	
VMP-59-10	12/3/2020	1151	-1.12	NM	0.0	0	0.6	20.8	0 9	4 3	0.0	4.3	
VMP-59-10	12/8/2020	1331	-1.07	NM	0.0	0	0.1	20.7	0 2	0 0	0.0	0.0	
VMP-59-10	12/16/2020	1350	-1.06	-1.08	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-10	1/19/2021	1316	-1.36	-0.44	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-59-10	2/23/2021	1418	-0.45	-1.01	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-10	3/17/2021	1406	-1.08	-1.06	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-59-10	4/29/2021	1331	-1.39	-1.38	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-10	5/19/2021	1224	-0.68	-0.50	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-10	6/16/2021	1326	-0.61	-0.72	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-59-20	7/20/2020	1135	0.00	0.00	0.0	0	0.4	19.7	0 2	0 0	0.0	0.0	
VMP-59-20	8/19/2020	1354	0.00	0.00	0.0	0	0.3	19.0	0.4	14.7	14.7	0.0	
VMP-59-20	9/16/2020	1207	-30 33	0.35	0.0	0	0.4	16.0	0 2	127	127	0.0	Re-sampled to confirm initial sample.
VMP-59-20	9/17/2020	0902	-0.14	NM	0.0	0	0.6	15.7	0 3	115	115	0.0	Re-sample.
VMP-59-20	10/26/2020	1322	0.00	0.34	0.0	0	1.6	10.8	0.1	8 0	8.0	0.0	
VMP-59-20	11/23/2020	1402	0.26	0.24	0.0	0	3.0	7.1	0 0	9 0	9.0	0.0	
VMP-59-20	11/30/2020	1017	-0.13	NM	0.0	0	3.1	10.1	0 6	21.0	0.0	21 0	
VMP-59-20	12/3/2020	1152	-5.29	NM	0.0	0	1.8	19.1	1 2	4.1	0.0	4.1	
VMP-59-20	12/8/2020	1332	-4.81	NM	0.0	0	0.7	20.6	0 2	0 0	0.0	0.0	
VMP-59-20	12/16/2020	1352	-4.53	-4.47	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-59-20	1/19/2021	1317	-14.46	-1.10	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-59-20	2/23/2021	1420	-4.58	-4.82	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-59-20	3/17/2021	1407	-29.45	-4.56	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-59-20	4/29/2021	1332	-5.15	-5.09	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-59-20-Dup	4/29/2021	1332	NM	NM	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-59-20	5/19/2021	1226	-3.43	-3.28	0.0	0	0.1	20.6	0 0	0 0	0.0	0.0	
VMP-59-20	6/16/2021	1327	-3.10	-3.43	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-59-30	7/20/2020	1136	0.00	0.00	0.0	0	1.0	18.2	0 3	0 0	0.0	0.0	
VMP-59-30	8/19/2020	1355	0.41	0.00	31 9	OVR	6.7	3.9	237	44610	31640	12970	
VMP-59-30	9/16/2020	1208	0.00	0.00	OVR	OVR	5.2	6.8	247	116000	84160	31840	Re-sampled to confirm initial sample.
VMP-59-30	9/17/2020	0902	-0.14	NM	23 8	OVR	4.8	8.2	234	37280	26180	11100	Re-sample.
VMP-59-30	10/26/2020	1323	0.00	0.23	19 0	OVR	3.4	12.8	184	35450	25620	9830	
VMP-59-30-Dup	10/26/2020	1323	NM	NM	17 5	OVR	3.3	13.2	184	34160	24590	9570	Duplicate sample.
VMP-59-30	11/23/2020	1403	-0.03	0.10	45 5	OVR	3.6	13.1	258	60880	43520	17360	
VMP-59-30	11/30/2020	1018	-0.29	NM	23 2	OVR	3.7	12.8	275	35070	24920	10150	
VMP-59-30	12/3/2020	1153	-1.05	NM	0.0	0	1.3	20.5	1 6	9 2	0.0	9.2	
VMP-59-30	12/8/2020	1333	-1.28	NM	0.0	0	0.3	20.6	0 2	0 0	0.0	0.0	
VMP-59-30	12/16/2020	1354	-0.66	-2.16	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-59-30	1/19/2021	1318	-1.10	-0.15	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-30	2/23/2021	1422	-0.86	-1.13	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-59-30	3/17/2021	1408	-0.81	-1.16	0.0	0	0.0	20.8	0 0	0 0	0.0	0.0	
VMP-59-30	4/29/2021	1333	-1.27	-1.44	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-59-30	5/19/2021	1228	-0.81	-0.74	0.0	0	0.1	20.7	0 0	0 0	0.0	0.0	
VMP-59-30	6/16/2021	1328	-0.65	-0.72	0.0	0	0.2	20.4	0 0	0 0	0.0	0.0	
VMP-60-5	7/20/2020	0831	-0.25	0.00	0.0	0	1.2	16.2	0 0	0 0	0.0	0.0	
VMP-60-5	8/19/2020	1117	0.00	0.00	0.0	0	2.2	7.8	0 0	17.0	13 0	4.0	
VMP-60-5	9/16/2020	1047	0.00	0.00	0.0	0	2.4	12.8	0.1	10.0	10 0	0.0	
VMP-60-5	10/26/2020	1055	0.00	0.03	0.0	0	2.7	8.9	0 0	6 0	6.0	0.0	
VMP-60-5	11/23/2020	1200	0.35	-0.29	9.2	OVR	5.8	6.0	172	25320	19390	5930	Re-sampled to confirm initial sample.
VMP-60-5	11/24/2020	1130	-0.29	NM	22 8	OVR	3.6	13.0	238	49740	37170	12570	Re-sample.
VMP-60-5	11/30/2020	0937	-0.40	NM	35 9	OVR	7.0	1.6	495	40650	28610	12040	
VMP-60-5	12/3/2020	1052	-0.52	NM	0.0	0	2.7	18.5	5.1	31.2	0.0	31 2	
VMP-60-5	12/8/2020	1250	-0.44	NM	0.0	0	1.5	20.4	2 2	10.1	0.0	10.1	
VMP-60-5	12/16/2020	1146	-0.26	-0.20	0.0	0	0.9	20.6	1.7	7 6	0.0	7.6	
VMP-60-5	1/19/2021	1105	-0.45	-0.71	0.0	0	0.4	20.6	0 6	3.7	0.0	3.7	
VMP-60-5	2/23/2021	1230	-0.51	-0.47	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-60-5	3/17/2021	1220	-0.71	-0.55	0.0	0	0.3	20.7	0 0	0 0	0.0	0.0	
VMP-60-5	4/29/2021	0925	-0.96	-0.90	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-60-5	5/19/2021	1050	-0.53	-0.54	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-60-5	6/16/2021	1115	-0.26	-0.36	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-60-10	7/20/2020	0832	-0.21	0.00	0.0	0	1.0	16.9	0 0	0 0	0.0	0.0	
VMP-60-10	8/19/2020	1118	0.00	0.00	0.0	0	2.2	8.4	0 2	34.0	26 0	8.0	
VMP-60-10	9/16/2020	1048	0.00	0.00	0.0	0	2.7	9.5	0 0	12.0	12 0	0.0	
VMP-60-10	10/26/2020	1056	0.00	0.47	0.0	0	2.6	9.0	0 0	5 0	5.0	0.0	
VMP-60-10	11/23/2020	1201	0.05	-0.31	42 9	OVR	5.8	2.9	315	71780	49940	21840	Re-sampled to confirm initial sample.
VMP-60-10	11/24/2020	1131	0.13	NM	OVR	OVR	6.5	6.2	363	345000	221000	124000	Re-sample.
VMP-60-10	11/30/2020	0938	-0.85	NM	30 9	OVR	5.9	4.1	512	34440	20320	14120	
VMP-60-10	12/3/2020	1053	-0.48	NM	0.0	0	2.6	19.2	15.8	98.6	0.0	98 6	
VMP-60-10	12/8/2020	1251	-0.38	NM	0.0	0	1.4	20.4	7 2	38.1	0.0	38.1	
VMP-60-10	12/16/2020	1148	-0.31	-0.17	0.0	0	0.8	20.5	3 8	17.4	0.0	17.4	
VMP-60-10	1/19/2021	1106	-0.40	-0.64	0.0	0	0.3	20.7	2.4	11.0	0.0	11 0	
VMP-60-10	2/23/2021	1232	-0.51	-0.44	0.0	0	0.2	20.7	0.7	1 2	0.0	1.2	
VMP-60-10	3/17/2021	1221	-0.59	-0.50	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-60-10	4/29/2021	0926	-0.08	-0.16	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-60-10-Dup	4/29/2021	0926	NM	NM	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-60-10	5/19/2021	1052	-0.44	-0.44	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-60-10	6/16/2021	1116	-0.28	-0.30	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-60-20	7/20/2020	0833	0.00	0.00	0.0	0	0.9	17.3	0.1	0 0	0.0	0.0	
VMP-60-20	8/19/2020	1118	0.00	0.00	0.0	0	1.5	12.3	0.1	4 2	4.2	0.0	
VMP-60-20	9/16/2020	1049	0.00	0.00	0.0	0	2.2	12.0	0.1	12.0	12 0	0.0	
VMP-60-20	10/26/2020	1057	-0.02	0.59	0.0	0	2.4	10.9	0 0	3 0	3.0	0.0	
VMP-60-20	11/23/2020	1202	0.04	0.08	6.2	OVR	4.8	6.3	126	21180	16950	4230	Re-sampled to confirm initial sample.
VMP-60-20	11/24/2020	1132	-0.22	NM	OVR	OVR	4.4	11.0	343	137000	104000	33000	Re-sample.
VMP-60-20	11/30/2020	0939	-0.05	NM	5.1	OVR	4.9	7.0	261	11310	6950	4360	
VMP-60-20	12/3/2020	1054	-0.96	NM	0.0	0	2.6	18.1	2 9	16.5	0.0	16 5	
VMP-60-20	12/8/2020	1252	-0.76	NM	0.0	0	1.7	20.1	2 2	14.8	0.0	14 8	
VMP-60-20	12/16/2020	1150	-0.43	-0.35	0.0	0	1.2	20.4	1 2	5 6	0.0	5.6	
VMP-60-20	1/19/2021	1107	-0.72	-1.29	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-60-20	2/23/2021	1234	-0.95	-0.85	0.0	0	0.2	20.7	0 3	0.4	0.0	0.4	
VMP-60-20	3/17/2021	1222	-1.10	-0.98	0.0	0	0.3	20.5	0 0	0 0	0.0	0.0	
VMP-60-20	4/29/2021	0927	-1.43	-1.25	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-60-20	5/19/2021	1054	-0.87	-0.85	0.0	0	0.5	20.4	0 0	0 0	0.0	0.0	
VMP-60-20	6/16/2021	1117	-0.65	-0.67	0.0	0	0.8	20.0	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-60-33.5	7/20/2020	0834	0.00	0.00	0.0	0	1.2	16.1	0 2	0 0	0.0	0.0	
VMP-60-33.5	8/19/2020	1120	0.00	0.00	0.0	0	2.2	7.9	0 3	86.0	7.5	78 5	
VMP-60-33.5	9/16/2020	1050	0.00	0.00	0.0	0	2.5	11.2	0.7	41.0	34 0	7.0	
VMP-60-33.5	10/26/2020	1058	-0.02	0.59	0.0	0	2.6	9.5	1.1	34.0	29 0	5.0	
VMP-60-33.5	11/23/2020	1203	0.04	0.09	59 9	OVR	5.9	4.8	324	94860	66850	28010	Re-sampled to confirm initial sample.
VMP-60-33.5	11/24/2020	1133	0.14	NM	OVR	OVR	5.5	8.8	396	244000	165000	79000	Re-sample.
VMP-60-33.5	11/30/2020	0940	-0.03	NM	29 2	OVR	6.8	1.0	495	33500	24020	9480	
VMP-60-33.5	12/3/2020	1055	-0.57	NM	0.0	0	2.8	18.7	3 9	20.9	0.0	20 9	
VMP-60-33.5	12/8/2020	1253	-0.40	NM	0.0	0	1.4	20.5	3 6	15.3	0.0	15 3	
VMP-60-33.5	12/16/2020	1152	-0.25	-0.23	0.0	0	0.8	20.5	0.7	3 9	0.0	3.9	
VMP-60-33.5	1/19/2021	1108	-0.40	-0.69	0.0	0	0.4	20.6	0 8	4.1	0.0	4.1	
VMP-60-33.5	2/23/2021	1236	-0.56	-0.49	0.0	0	0.2	20.7	0.4	0.7	0.0	0.7	
VMP-60-33.5	3/17/2021	1223	-0.67	-0.55	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-60-33.5	4/29/2021	0928	-0.78	-0.79	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-60-33.5	5/19/2021	1055	-0.46	-0.49	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-60-33.5	6/16/2021	1118	-0.27	-0.32	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-61-5	7/20/2020	1233	0.00	0.00	0.0	0	2.1	17.3	0 0	0 0	0.0	0.0	
VMP-61-5-Dup	7/20/2020	1233	NM	NM	0.0	0	2.0	17.4	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-61-5	8/19/2020	1442	0.00	0.00	0.0	0	2.7	15.3	0 3	0 0	0.0	0.0	
VMP-61-5	9/16/2020	1316	0.00	0.00	0.0	0	3.4	12.4	0.1	0 0	0.0	0.0	
VMP-61-5	10/27/2020	1330	0.00	0.10	0.0	0	3.4	13.8	0 0	0 0	0.0	0.0	
VMP-61-5	11/24/2020	1300	0.09	0.32	0.0	0	3.1	15.7	0 0	0 0	0.0	0.0	
VMP-61-5	12/16/2020	1426	0.31	-0.08	0.0	0	3.0	19.0	0 0	0 0	0.0	0.0	
VMP-61-5	1/19/2021	1355	-0.35	-0.08	0.0	0	2.0	19.7	0 0	0 0	0.0	0.0	
VMP-61-5	2/23/2021	1506	0.00	0.00	0.0	0	1.4	19.7	0.1	0 0	0.0	0.0	
VMP-61-5	3/17/2021	1455	0.31	0.00	0.0	0	1.7	19.8	0 0	0 0	0.0	0.0	
VMP-61-5	4/29/2021	1410	-0.13	-0.40	0.0	0	1.6	19.4	0 0	0 0	0.0	0.0	
VMP-61-5	5/20/2021	0826	0.00	-0.20	0.0	0	1.8	19.5	0 0	0 0	0.0	0.0	
VMP-61-5	6/16/2021	1405	0.00	0.00	0.0	0	2.4	18.1	0 0	0 0	0.0	0.0	
VMP-61-10	7/20/2020	1234	-0.51	0.00	0.0	0	0.9	19.4	0 0	0 0	0.0	0.0	
VMP-61-10	8/19/2020	1443	-0.13	0.00	0.0	0	1.1	18.7	0.4	0 0	0.0	0.0	
VMP-61-10	9/16/2020	1317	-0.38	0.12	0.0	0	1.4	17.7	0 2	0 0	0.0	0.0	
VMP-61-10	10/27/2020	1331	0.20	0.16	0.0	0	1.9	17.2	0.1	0 0	0.0	0.0	
VMP-61-10	11/24/2020	1301	0.31	0.47	0.0	0	1.9	16.7	0 0	0 0	0.0	0.0	
VMP-61-10	12/16/2020	1428	-0.16	-0.19	0.0	0	2.0	17.9	0 0	0 0	0.0	0.0	
VMP-61-10	1/19/2021	1356	-0.45	-0.24	0.0	0	1.6	18.5	0 0	0 0	0.0	0.0	
VMP-61-10	2/23/2021	1508	0.27	-0.22	0.0	0	1.2	19.0	0.1	0 0	0.0	0.0	
VMP-61-10	3/17/2021	1456	0.19	0.00	0.0	0	1.1	19.4	0 0	0 0	0.0	0.0	
VMP-61-10	4/29/2021	1411	-0.36	-0.54	0.0	0	1.2	19.5	0 0	0 0	0.0	0.0	
VMP-61-10	5/20/2021	0828	-0.37	-0.34	0.0	0	1.3	19.9	0 0	0 0	0.0	0.0	
VMP-61-10	6/16/2021	1406	0.00	0.00	0.0	0	1.5	18.9	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-61-20	7/20/2020	1235	-0.18	0.00	0.0	0	1.5	18.4	0.1	0 0	0.0	0.0	
VMP-61-20	8/19/2020	1444	-0.18	0.00	0.0	0	2.8	15.3	0 5	0 0	0.0	0.0	
VMP-61-20	9/16/2020	1318	0.00	0.00	0.0	0	3.6	12.1	0.1	0 0	0.0	0.0	
VMP-61-20	10/27/2020	1332	0.00	0.10	0.0	0	3.4	14.1	0.1	0 0	0.0	0.0	
VMP-61-20	11/24/2020	1302	0.00	0.31	0.0	0	3.2	15.6	0 0	0 0	0.0	0.0	
VMP-61-20	12/16/2020	1430	-0.23	-0.09	0.0	0	2.9	19.1	0 0	0 0	0.0	0.0	
VMP-61-20-Dup	12/16/2020	1430	NM	NM	0.0	0	3.0	19.1	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-61-20	1/19/2021	1357	-0.47	0.40	0.0	0	2.0	19.8	0 0	0 0	0.0	0.0	
VMP-61-20	2/23/2021	1510	0.00	-0.14	0.0	0	1.4	19.7	0 0	0 0	0.0	0.0	
VMP-61-20-Dup	2/23/2021	1510	NM	NM	0.0	0	1.4	19.7	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-61-20	3/17/2021	1457	0.44	-0.60	0.0	0	1.5	20.1	0 0	0 0	0.0	0.0	
VMP-61-20	4/29/2021	1412	0.00	-0.41	0.0	0	1.5	19.6	0 0	0 0	0.0	0.0	
VMP-61-20	5/20/2021	0830	-0.50	-0.26	0.0	0	1.7	19.7	0 0	0 0	0.0	0.0	
VMP-61-20	6/16/2021	1407	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	7/20/2020	1236	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	8/19/2020	1445	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	9/16/2020	1319	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	10/27/2020	1333	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	11/24/2020	1303	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	12/16/2020	1432	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	1/19/2021	1358	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	2/23/2021	1512	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	3/17/2021	1458	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-61-30	4/29/2021	1413	0.77	-0.13	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sampled to confirm initial results.
VMP-61-30	4/30/2021	0835	-0.30	NM	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	Re-sample.
VMP-61-30	5/20/2021	0832	0.00	0.00	0.0	0	0.0	20.9	0 0	0 0	0.0	0.0	
VMP-61-30	6/16/2021	1408	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-62-5	7/20/2020	1352	0.00	0.00	0.0	0	6.2	12.4	0 2	0 0	0.0	0.0	
VMP-62-5	8/20/2020	0925	0.00	0.00	0.0	0	9.3	10.9	0 2	0 0	0.0	0.0	
VMP-62-5	9/17/2020	1016	0.00	0.00	0.0	0	8.7	13.0	0 0	0 0	0.0	0.0	
VMP-62-5	10/27/2020	1232	0.00	0.00	0.0	0	4.9	16.6	0 0	0 0	0.0	0.0	
VMP-62-5	11/24/2020	1340	0.00	-0.17	0.0	0	4.3	16.6	0 0	0 0	0.0	0.0	
VMP-62-5	12/17/2020	1000	-0.02	-0.03	0.0	0	2.2	19.6	0 0	0 0	0.0	0.0	
VMP-62-5	1/20/2021	0825	0.00	0.00	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-62-5	2/24/2021	0910	-0.11	-0.07	0.0	0	0.8	20.3	0 0	0 0	0.0	0.0	
VMP-62-5	3/18/2021	0920	0.00	0.00	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	
VMP-62-5	4/30/2021	0940	-0.27	0.00	0.0	0	1.9	18.6	0 0	0 0	0.0	0.0	
VMP-62-5	5/19/2021	1402	0.00	0.00	0.0	0	2.0	18.6	0 0	0 0	0.0	0.0	
VMP-62-5	6/17/2021	0930	0.00	0.00	0.0	0	4.2	16.8	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-62-10	7/20/2020	1353	0.00	0.00	0.0	0	4.4	15.1	0 5	0 0	0.0	0.0	
VMP-62-10-Dup	7/20/2020	1353	NM	NM	0.0	0	4.2	15.4	0 5	0 0	0.0	0.0	Duplicate sample.
VMP-62-10	8/20/2020	0926	0.00	0.00	0.0	0	5.9	13.1	0 2	0 0	0.0	0.0	
VMP-62-10	9/17/2020	1017	0.00	0.00	0.0	0	6.3	13.9	0 0	0 0	0.0	0.0	
VMP-62-10	10/27/2020	1233	0.00	0.00	0.0	0	5.6	15.8	0 0	0 0	0.0	0.0	
VMP-62-10	11/24/2020	1341	0.00	0.00	0.0	0	4.4	16.6	0 0	0 0	0.0	0.0	
VMP-62-10	12/17/2020	1002	-0.40	-0.26	0.0	0	2.9	19.0	0 0	0 0	0.0	0.0	
VMP-62-10	1/20/2021	0826	-0.26	-0.13	0.0	0	1.9	19.5	0 0	0 0	0.0	0.0	
VMP-62-10	2/24/2021	0911	-0.11	-0.07	0.0	0	1.4	20.0	0 0	0 0	0.0	0.0	
VMP-62-10	3/18/2021	0921	-0.12	-0.11	0.0	0	1.4	19.5	0 0	0 0	0.0	0.0	
VMP-62-10	4/30/2021	0941	-0.13	-0.10	0.0	0	1.9	19.0	0 0	0 0	0.0	0.0	
VMP-62-10	5/19/2021	1404	0.00	0.00	0.0	0	2.4	18.2	0 0	0 0	0.0	0.0	
VMP-62-10	6/17/2021	0931	-0.14	-0.13	0.0	0	3.3	17.6	0 0	0 0	0.0	0.0	
VMP-62-20	7/20/2020	1354	0.28	0.00	0.0	0	2.4	17.9	0.4	0 0	0.0	0.0	
VMP-62-20	8/20/2020	0927	0.00	0.00	0.0	0	1.9	18.4	0 5	0 0	0.0	0.0	
VMP-62-20	9/17/2020	1018	-0.78	0.00	0.0	0	3.6	16.6	0 0	0 0	0.0	0.0	
VMP-62-20	10/27/2020	1234	-0.13	0.02	0.0	0	3.5	17.1	0 0	0 0	0.0	0.0	
VMP-62-20	11/24/2020	1342	0.22	0.30	0.0	0	2.9	17.2	0 2	0 0	0.0	0.0	
VMP-62-20	12/17/2020	1004	-6.07	-1.11	0.0	0	3.0	18.5	0 0	0 0	0.0	0.0	
VMP-62-20	1/20/2021	0827	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Port would not yield purge.
VMP-62-20	2/24/2021	0912	-1.24	-1.25	0.0	0	1.5	19.9	0.1	0 0	0.0	0.0	
VMP-62-20-Dup	2/24/2021	0912	NM	NM	0.0	0	1.5	19.9	0.1	0 0	0.0	0.0	Duplicate sample.
VMP-62-20	3/18/2021	0922	-1.07	-1.42	0.0	0	1.3	19.6	0 0	0 0	0.0	0.0	
VMP-62-20	4/30/2021	0942	-1.77	-1.06	0.0	0	1.7	19.2	0 0	0 0	0.0	0.0	
VMP-62-20	5/20/2021	0832	-1.52	-1.00	0.0	0	2.4	18.5	0 0	0 0	0.0	0.0	
VMP-62-20	6/17/2021	0932	-0.88	-0.75	0.0	0	3.1	17.7	0 0	0 0	0.0	0.0	
VMP-62-30	7/20/2020	1355	0.49	0.00	0.0	0	1.8	18.4	0 3	0 0	0.0	0.0	
VMP-62-30	8/20/2020	0928	0.00	0.00	0.0	0	2.7	17.2	0.4	0 0	0.0	0.0	
VMP-62-30	9/17/2020	1019	-0.11	-0.11	0.0	0	2.2	18.2	0 3	0 0	0.0	0.0	
VMP-62-30	10/27/2020	1235	0.13	0.15	0.0	0	2.4	18.2	0 0	0 0	0.0	0.0	
VMP-62-30	11/24/2020	1343	0.80	0.60	0.0	0	2.4	17.9	0 0	0 0	0.0	0.0	
VMP-62-30	12/17/2020	1006	-1.71	-1.75	0.0	0	2.3	19.1	0 0	0 0	0.0	0.0	
VMP-62-30	1/20/2021	0828	-0.29	-0.95	0.0	0	1.7	19.2	0 0	3.1	3.1	0.0	
VMP-62-30-Dup	1/20/2021	0828	NM	NM	0.0	0	1.8	19.1	0 0	2.7	2.7	0.0	Duplicate sample.
VMP-62-30	2/24/2021	0913	-2.35	-2.11	0.0	0	1.5	19.9	0 0	0 0	0.0	0.0	
VMP-62-30	3/18/2021	0923	-1.96	-2.32	0.0	0	1.1	19.7	0 0	0 0	0.0	0.0	
VMP-62-30	4/30/2021	0943	-1.79	-1.66	0.0	0	1.2	19.7	0 0	0 0	0.0	0.0	
VMP-62-30	5/19/2021	1406	-0.61	-1.08	0.0	0	1.4	18.8	0 0	0 0	0.0	0.0	
VMP-62-30	6/17/2021	0933	-1.85	-1.18	0.0	0	1.5	18.7	0 0	0 0	0.0	0.0	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-63-5	7/20/2020	1331	0.00	0.00	0.0	0	0.6	18.0	0 0	0 0	0.0	0.0	
VMP-63-5	8/20/2020	0859	0.00	0.00	0.0	0	2.2	16.6	0 3	0 0	0.0	0.0	
VMP-63-5	9/16/2020	1400	0.00	0.00	0.0	0	3.0	16.6	0 0	0 0	0.0	0.0	
VMP-63-5	10/27/2020	1305	0.03	0.00	0.0	0	2.8	18.1	0 0	0 0	0.0	0.0	
VMP-63-5	11/24/2020	1325	0.04	0.00	0.0	0	2.7	17.8	0 0	0 0	0.0	0.0	
VMP-63-5	12/17/2020	0924	-0.11	-0.14	0.0	0	0.4	20.7	0 0	0 0	0.0	0.0	
VMP-63-5	1/20/2021	0810	0.00	-0.02	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-63-5	2/24/2021	0838	-0.22	-0.34	0.0	0	0.1	20.8	0 0	0 0	0.0	0.0	
VMP-63-5	3/18/2021	0840	-2.45	-0.34	0.0	0	0.2	20.4	0 0	0 0	0.0	0.0	
VMP-63-5	4/30/2021	0905	-0.27	-0.20	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-63-5	5/19/2021	1336	0.00	-0.16	0.0	0	0.4	20.5	0 0	0 0	0.0	0.0	
VMP-63-5	6/17/2021	0900	-0.18	-0.15	0.0	0	0.9	19.8	0 0	0 0	0.0	0.0	
VMP-63-10	7/20/2020	1332	0.00	0.00	0.0	0	0.8	19.6	0 0	0 0	0.0	0.0	
VMP-63-10	8/20/2020	0855	0.00	0.00	0.0	0	1.6	18.2	0 3	0 0	0.0	0.0	
VMP-63-10	9/16/2020	1401	0.00	0.00	0.0	0	2.5	17.1	0 3	0 0	0.0	0.0	
VMP-63-10	10/27/2020	1306	0.07	0.03	0.0	0	3.1	17.3	0 0	0 0	0.0	0.0	
VMP-63-10	11/24/2020	1326	0.29	0.14	0.0	0	2.8	17.5	0 0	0 0	0.0	0.0	
VMP-63-10	12/17/2020	0926	-0.92	-0.08	0.0	0	0.5	20.6	0 0	0 0	0.0	0.0	
VMP-63-10	1/20/2021	0811	-0.33	-0.07	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-63-10	2/24/2021	0839	-0.11	-0.28	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-63-10	3/18/2021	0941	-0.63	-0.81	0.0	0	0.2	20.5	0 0	0 0	0.0	0.0	
VMP-63-10	4/30/2021	0921	-0.26	-0.24	0.0	0	0.5	20.6	0 0	0 0	0.0	0.0	
VMP-63-10	5/19/2021	1338	-0.09	-0.13	0.0	0	0.6	20.4	0 0	0 0	0.0	0.0	
VMP-63-10	6/17/2021	0901	-0.28	-0.36	0.0	0	1.1	19.9	0 0	0 0	0.0	0.0	
VMP-63-20	7/20/2020	1333	0.00	0.00	0.0	0	0.8	19.8	0 0	0 0	0.0	0.0	
VMP-63-20	8/20/2020	0856	0.00	0.00	0.0	0	0.9	19.5	0.4	0 0	0.0	0.0	
VMP-63-20	9/16/2020	1402	0.15	0.16	0.0	0	1.1	19.2	0 0	0 0	0.0	0.0	
VMP-63-20	10/27/2020	1307	0.23	0.08	0.0	0	1.4	18.8	0 0	0 0	0.0	0.0	
VMP-63-20	11/24/2020	1327	0.44	0.44	0.0	0	1.5	18.0	0 0	0 0	0.0	0.0	
VMP-63-20	12/17/2020	0928	-0.79	-0.77	0.0	0	0.6	20.7	0 0	0 0	0.0	0.0	
VMP-63-20	1/20/2021	0812	-0.22	-0.18	0.0	0	0.9	20.4	0 0	0 0	0.0	0.0	
VMP-63-20	2/24/2021	0840	-1.09	-1.09	0.0	0	0.6	20.5	0 0	0 0	0.0	0.0	
VMP-63-20	3/18/2021	0842	-1.16	-1.30	0.0	0	0.4	20.3	0 0	0 0	0.0	0.0	
VMP-63-20	4/30/2021	0907	-0.95	-0.90	0.0	0	0.5	20.5	0 0	0 0	0.0	0.0	
VMP-63-20	5/19/2021	1340	-0.42	-0.43	0.0	0	0.7	20.3	0 0	0 0	0.0	0.0	
VMP-63-20	6/17/2021	0902	-0.58	-0.58	0.0	0	1.0	19.6	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-63-30	7/20/2020	1334	0.00	0.00	0.0	0	1.1	19.6	0 0	0 0	0.0	0.0	
VMP-63-30	8/20/2020	0857	0.00	0.00	0.0	0	1.1	19.5	0.4	0 0	0.0	0.0	
VMP-63-30	9/16/2020	1403	0.19	0.19	0.0	0	0.9	19.3	0 0	0 0	0.0	0.0	
VMP-63-30	10/27/2020	1308	0.25	0.08	0.0	0	1.3	18.9	0 0	0 0	0.0	0.0	
VMP-63-30	11/24/2020	1328	0.29	0.48	0.0	0	1.4	18.0	0 0	0 0	0.0	0.0	
VMP-63-30	12/17/2020	0930	-1.03	-0.91	0.0	0	1.7	19.2	0 0	0 0	0.0	0.0	
VMP-63-30	1/20/2021	0813	-0.23	-0.24	0.0	0	1.6	20.0	0 0	0 0	0.0	0.0	
VMP-63-30	2/24/2021	0841	-0.77	-1.24	0.0	0	1.3	20.1	0 0	0 0	0.0	0.0	
VMP-63-30	3/18/2021	0843	-1.18	-1.47	0.0	0	0.9	20.0	0 0	0 0	0.0	0.0	
VMP-63-30	4/30/2021	0908	-1.44	-1.00	0.0	0	0.9	20.1	0 0	0 0	0.0	0.0	
VMP-63-30	5/19/2021	1342	-0.50	-0.52	0.0	0	1.0	19.9	0 0	0 0	0.0	0.0	
VMP-63-30	6/17/2021	0903	-0.68	-0.68	0.0	0	1.1	19.5	0 0	0 0	0.0	0.0	
VMP-64-5	7/20/2020	1250	0.00	0.00	0.0	0	0.8	16.5	0 0	0 0	0.0	0.0	
VMP-64-5	8/20/2020	0839	0.00	0.00	0.0	0	1.1	16.4	0 3	0 0	0.0	0.0	
VMP-64-5	9/16/2020	1342	0.00	0.00	0.0	0	2.1	17.6	0 0	0 0	0.0	0.0	
VMP-64-5	10/27/2020	1320	0.00	0.00	0.0	0	1.3	18.8	0 0	0 0	0.0	0.0	
VMP-64-5	11/24/2020	1315	-0.20	-0.12	0.0	0	1.3	17.9	0 0	0 0	0.0	0.0	
VMP-64-5	12/17/2020	0910	-0.02	-0.02	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	
VMP-64-5-Dup	12/17/2020	0910	NM	NM	0.0	0	0.4	20.6	0 0	0 0	0.0	0.0	Duplicate sample.
VMP-64-5	1/19/2021	1410	0.00	0.00	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-64-5	2/24/2021	0815	-0.02	0.00	0.0	0	0.2	20.8	0 0	0 0	0.0	0.0	
VMP-64-5	3/18/2021	0825	0.00	0.00	0.0	0	0.1	20.4	0 0	0 0	0.0	0.0	
VMP-64-5	4/30/2021	0850	-0.20	0.00	0.0	0	0.2	20.6	0 0	0 0	0.0	0.0	
VMP-64-5	5/19/2021	1324	0.00	0.00	0.0	0	0.2	20.7	0 0	0 0	0.0	0.0	
VMP-64-5	6/17/2021	0845	0.00	0.00	0.0	0	0.7	20.2	0 0	0 0	0.0	0.0	
VMP-64-10	7/20/2020	1251	0.00	0.00	0.0	0	3.2	16.5	0 0	0 0	0.0	0.0	
VMP-64-10	8/20/2020	0840	0.00	0.00	0.0	0	3.0	16.0	0.4	0 0	0.0	0.0	
VMP-64-10	9/16/2020	1343	0.00	0.00	0.0	0	3.7	15.1	0 0	0 0	0.0	0.0	
VMP-64-10	10/27/2020	1321	0.09	0.30	0.0	0	4.0	15.6	0 0	0 0	0.0	0.0	
VMP-64-10	11/24/2020	1316	0.14	0.18	0.0	0	3.6	16.1	0 0	0 0	0.0	0.0	
VMP-64-10	12/17/2020	0912	-0.58	-0.12	0.0	0	3.1	18.1	0 0	0 0	0.0	0.0	
VMP-64-10	1/19/2021	1411	0.28	-0.08	0.0	0	2.6	18.7	0 0	0 0	0.0	0.0	
VMP-64-10	2/24/2021	0816	-0.14	-0.22	0.0	0	2.3	19.4	0 0	0 0	0.0	0.0	
VMP-64-10	3/18/2021	0826	-0.33	-0.31	0.0	0	1.9	19.3	0 0	0 0	0.0	0.0	
VMP-64-10	4/30/2021	0851	0.00	-0.14	0.0	0	1.9	19.3	0 0	0 0	0.0	0.0	
VMP-64-10	5/19/2021	1326	0.00	0.00	0.0	0	2.0	18.9	0 0	0 0	0.0	0.0	
VMP-64-10	6/17/2021	0846	-0.18	-0.11	0.0	0	2.2	18.2	0 0	0 0	0.0	0.0	

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-64-20	7/20/2020	1252	0.14	0.00	0.0	0	1.7	18.0	0 0	0 0	0.0	0.0	
VMP-64-20	8/20/2020	0841	0.00	0.00	0.0	0	2.3	17.6	0 3	0 0	0.0	0.0	
VMP-64-20	9/16/2020	1402	0.12	0.09	0.0	0	2.4	17.3	0 0	0 0	0.0	0.0	
VMP-64-20	10/27/2020	1322	0.19	0.09	0.0	0	2.8	17.0	0 0	0 0	0.0	0.0	
VMP-64-20	11/24/2020	1317	0.22	0.37	0.0	0	2.9	16.7	0 0	0 0	0.0	0.0	
VMP-64-20	12/17/2020	0914	-0.43	-0.20	0.0	0	3.6	16.5	0 0	0 0	0.0	0.0	
VMP-64-20	1/19/2021	1412	-0.14	-0.17	0.0	0	3.4	17.0	0 0	0 0	0.0	0.0	
VMP-64-20	2/24/2021	0817	-0.17	-0.43	0.0	0	3.3	18.1	0 0	0 0	0.0	0.0	
VMP-64-20	3/18/2021	0827	-0.42	-0.53	0.0	0	2.9	18.1	0 0	0 0	0.0	0.0	
VMP-64-20	4/30/2021	0852	-0.23	-0.23	0.0	0	2.6	18.5	0 0	0 0	0.0	0.0	
VMP-64-20	5/19/2021	1328	0.00	0.00	0.0	0	2.5	18.5	0 0	0 0	0.0	0.0	
VMP-64-20	6/17/2021	0847	-0.27	-0.14	0.0	0	2.4	18.0	0 0	0 0	0.0	0.0	
VMP-64-28	7/20/2020	1253	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	8/20/2020	0842	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	9/16/2020	1403	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	10/27/2020	1323	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	11/24/2020	1318	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	12/17/2020	0916	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	1/19/2021	1413	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	2/24/2021	0818	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	3/18/2021	0828	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	4/30/2021	0853	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	5/19/2021	1330	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-64-28	6/17/2021	0948	NM	NM	NM	NM	NM	NM	NM	NM	NM	NM	Screen submerged.
VMP-65-10	11/23/2020	0910	-0.63	-0.36	0.0	0	1.7	17.6	0 0	0 0	0.0	0.0	Re-sampled to confirm initial sample.
VMP-65-10	11/24/2020	1115	0.00	NM	0.0	0	3.0	15.1	0 0	0 0	0.0	0.0	Re-sample.
VMP-65-10	12/16/2020	0935	-0.07	-0.64	0.0	0	3.2	16.0	0.1	0 0	0.0	0.0	
VMP-65-10	1/19/2021	0900	-0.39	0.00	0.0	0	3.6	14.9	0.1	0 0	0.0	0.0	
VMP-65-10	2/23/2021	0938	-0.63	-0.63	0.0	0	4.3	14.1	0 0	0 0	0.0	0.0	
VMP-65-10	3/17/2021	0905	-0.12	-0.13	0.0	0	3.0	15.9	0 0	0 0	0.0	0.0	
VMP-65-10	4/29/2021	1120	-0.72	-0.86	0.0	0	3.5	15.1	0 0	0 0	0.0	0.0	
VMP-65-10	5/19/2021	0908	-0.72	-0.61	0.0	0	2.6	17.1	0 0	0 0	0.0	0.0	
VMP-65-10	6/16/2021	0920	0.00	-0.33	0.0	0	2.6	17.0	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.
VMP-65-20	11/23/2020	0911	-0.04	-0.77	0.0	0	8.5	6.6	1 3	2 0	1.0	1.0	Re-sampled to confirm initial sample.
VMP-65-20-Dup	11/23/2020	0911	NM	NM	0.0	0	8.3	6.9	1 3	2 0	1.0	1.0	Duplicate sample.
VMP-65-20	11/24/2020	1116	0.77	NM	0.0	0	9.5	5.9	2 3	5 0	2.0	3.0	Re-sample.
VMP-65-20	12/16/2020	0934	-0.62	-0.68	0.0	0	10.1	6.8	1 9	2 0	1.0	1.0	
VMP-65-20-Dup	12/16/2020	0934	NM	NM	0.0	0	9.8	7.3	1 9	2 0	1.0	1.0	Duplicate sample.
VMP-65-20	1/19/2021	0901	-0.25	-0.52	0.0	0	9.7	7.3	0 5	2 0	1.0	1.0	
VMP-65-20	2/23/2021	0940	-0.68	-0.63	0.0	0	10.0	5.6	0 0	0 0	0.0	0.0	
VMP-65-20	3/17/2021	0907	0.16	-0.33	0.0	0	7.9	9.1	0.1	0 0	0.0	0.0	
VMP-65-20	4/29/2021	1121	-0.72	-0.91	0.0	0	8.9	7.4	0 3	0 0	0.0	0.0	
VMP-65-20	5/19/2021	0910	-0.82	-0.71	0.0	0	7.3	10.5	0 0	0 0	0.0	0.0	
VMP-65-20	6/16/2021	0921	0.00	-0.24	0.0	0	5.3	13.8	0 0	0 0	0.0	0.0	SVE system off-line from 0754 to 0936 due to power outage.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 9
SVE SYSTEM MONTHLY MONITORING - VMP SAMPLING DATA

Sample ID	Date	Initial Reading Time (24-Hour)	Vacuum/Pressure		Fixed Gases				Soil Vapor Concentrations				Comments
			Initial Reading (Inches of H_2O)	Stabilized Reading (Inches of H_2O)	CH_4 (%)	LEL (%)	CO_2 (%)	O_2 (%)	PID (ppmv)	THC (ppmv)	CH_4 (ppmv)	PHC (ppmv)	
VMP-65-30	11/23/2020	0912	-0.04	-0.77	2.6	53	13.5	0.9	323	8090	5370	2720	Re-sampled to confirm initial sample.
VMP-65-30	11/24/2020	1117	0.25	NM	3.9	79	13.8	0.4	394	11020	7230	3790	Re-sample.
VMP-65-30	12/16/2020	0936	-1.64	-0.64	2.3	46	13.7	0.7	238	8050	5440	2610	
VMP-65-30	1/19/2021	0902	-0.28	-0.52	0.3	7	20.7	2.7	50.1	2240	1810	430	
VMP-65-30	2/23/2021	0942	-0.52	-0.67	0.6	12	13.8	0.5	67.4	3220	2610	610	
VMP-65-30	3/17/2021	0907	0.15	-0.11	0.3	6	13.5	1.6	40.2	1390	1090	300	
VMP-65-30	4/29/2021	1122	-0.94	-0.95	0.5	11	13.6	1.8	77.1	1810	1160	650	
VMP-65-30	5/19/2021	0912	-0.76	-0.61	0.0	0	14.0	1.5	0 8	29.0	23 0	6.0	
VMP-65-30	6/16/2021	0922	0.00	-0.26	0.0	0	13.9	1.8	0 5	64.0	53 0	11 0	SVE system off-line from 0754 to 0936 due to power outage.

Notes:

1) NM = Not Measured; NA = Not Applicable; NE = Not Encountered; PID = Photo Ionization Detector; THC = Total Hydrocarbon Concentration; PHC = Petroleum Hydrocarbon Concentration; OVR = Over-range; ppmv = Parts Per Million By Volume; btoc = Below Top of Casing; bgs = Below Ground Surface.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Acetone			Benzene			Butane			2-Butanone			Carbon disulfide		
			Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	5.5	U		16			890			6.8	U		7.2	U	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	3.6	U		8.3			430			4.5	U		4.8	U	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	5.6	U		13			1200			7	U		7.3	U	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	6	U		15			1800			7.4	U		7.8	U	
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	28	J		22			1400			46	U		5	J	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	6	U		30			1300			7.4	U		7.8	U	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	6	U		30			740			7.4	U		7.8	U	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	4.4	U		23			350			5.4	U		5.7	U	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	5	U		29			340			6.2	U		6.6	U	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	2.1	U		15			130			2.6	U		2.7	U	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	5.6	U		26			850			7	U		7.3	U	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	5.6	U		40			1300			7	U		7.3	U	
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.11	U		0.86			9.1			0.14	U		0.15	U	
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	2.8	U		31			830			3.4	U		3.6	U	
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.06	J		0.11			22			0.14	U		0.15	U	
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	18	J		3.2			380			9.8	U		6.2	J	
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	1.9	U		3.8			290			2.4	U		2.5	U	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	1.2	U		14			490			1.5	U		1.6	U	
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	23	J		14			480			14	U		2.2	J	
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	6	U		22			730			7.4	U		7.8	U	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	5.8	U		19			600			7.2	U		7.6	U	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	4.4	U		22			510			5.5	U		5.8	U	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	5	U		21			580			6.2	U		6.6	U	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	2.1	U		17			450			2.6	U		2.8	U	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	6.5			0.1			5.2			1.2			0.18	U	
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	5.4			0.14			3.5			1.1			0.18	U	
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	4.2			0.0084	J		0.063	U		0.83			0.082	U	
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	7	E	J	0.023			1.9			1.4			0.07	U	
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	3.3			0.016			1.1			0.57			0.044	U	
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	3.9			0.05	J		3.4			0.79			0.23	U	
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.53	J		0.3			12			0.27	U		0.28	U	
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.3	J		0.19			7.4			0.031	J		0.21	U	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.65			0.17			5.2			0.12	J		0.17	U	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	1.5			0.14			4.2			0.23			0.17	U	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	7.6			0.18			4.7			0.91			0.18	U	
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	3.2			0.11			2.8			0.36			0.085	U	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	3.9			0.12			1.9			0.7			0.11	U	
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.094	J		0.095			1.9			0.027	J		0.099	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Chloroethane			Cyclohexane			1,1-Dichloroethene			Dichloromethane (Methylene chloride)			Ethanol		
			Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	6.1	U		21			2.3	U		8	U		4.4	U	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	4	U		1.3	U		1.5	U		5.3	U		2.9	U	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	6.2	U		22			2.3	U		8.2	U		4.4	U	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	6.6	U		23			2.5	U		8.8	U		4.7	U	UJ
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	42	U		22			16	U		5.2	J		24	J	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	6.6	U		36			2.5	U		8.8	U		4.7	U	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	6.6	U		2.2	U		2.5	U		8.8	U		4.7	U	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	0.84	J		25			1.8	U		6.4	U		3.5	U	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	5.6	U		34			2.1	U		7.4	U		4	U	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	2.3	U		15			0.86	U		3	U		1.6	U	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	6.2	U		65			2.3	U		8.2	U		4.4	U	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	6.2	U		86			2.3	U		8.2	U		4.4	U	
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.12	U		0.83			0.046	U		0.16	U		0.088	U	
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	3.1	U		60			1.2	U		4	U		2.2	U	
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.12	U		0.041	U		0.047	U		0.16	U		0.09	U	
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	8.8	U		17			3.3	U		9.4	J		65		
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	2.1	U		19			0.79	U		2.8	U		1.5	U	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	1.3	U		24			0.21	J		1.8	U		0.95	U	UJ
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	12	U		21			4.7	U		5	J		22		
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	6.6	U		37			2.5	U		8.8	U		4.7	U	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	6.4	U		2.1	U		2.4	U		8.5	U		4.6	U	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	4.9	U		35			1.8	U		6.5	U		3.5	U	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	5.6	U		42			2.1	U		7.4	U		4	U	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	2.3	U		27			0.88	U		3.1	U		1.7	U	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.15	U		0.22			0.057	U		0.5	U		0.15		
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.15	U		0.23			0.056	U		0.49	U		0.14		
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.07	U		0.023	U		0.026	U		0.23	U		0.07		
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.06	U		0.097			0.022	U		0.2	U		0.12		
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.037	U		0.056			0.014	U		0.12	U		0.045		
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.19	U		0.06	J		0.072	U		0.63	U		0.14		J
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.24	U		0.18			0.091	U		0.8	U		0.17	U	J
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.18	U		0.18			0.067	U		0.58	U		0.32	U	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.15	U		0.15			0.056	U		0.49	U		0.26	U	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.14	U		0.16			0.054	U		0.48	U		0.13	J	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.15	U		0.23			0.056	U		0.2	U		0.25		
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.072	U		0.16			0.027	U		0.24	U		0.13	U	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.096	U		0.14			0.036	U		0.31	U		0.074	J	J
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.084	U		0.084			0.032	U		0.28	U		0.15	U	UJ

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Ethylbenzene			4-Ethyltoluene			Heptane			Hexane			2-Hexanone (Methyl N-Butyl Ketone)		
			Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	3.7			1	J		20			150			9.5	U	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	0.32	J		1.9	U		9.9			120			6.2	U	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	1.8	J		2.9	U		17			180			9.7	U	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	2.2	J		3.1	U		18			190			10	U	
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	17	U		19	U		24			240			65	U	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	2.9			1.1	J		39			360			10	U	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	3			0.6	J		35			290			10	U	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	2.9			0.62	J		27			210			7.5	U	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	5.4			1.6	J		39			310			8.7	U	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	1.6			0.32	J		17			130			3.6	U	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	8.6			1.5	J		50			340			9.7	U	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	15			3.4			76			510			9.7	U	
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.93			0.38			1.1			3.9			0.19	U	
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	15			3.2			54			340			4.8	U	
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.12			0.055	J		0.21			1			0.19	U	
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	0.94	J		4.1	U		5.4			46			14	U	
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	0.87	U		0.98	U		6.2			53			3.3	U	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	2.3			0.48	J		18			140			2.1	U	
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	2.2	J		5.8	U		20			140			19	U	
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	5.4			1.6	J		32			240			10	U	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	3.9			0.5	J		27			190			10	U	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	3.1			0.46	J		28			190			7.7	U	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	2.8			0.49	J		30			220			8.7	U	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	1.4			0.31	J		21			150			3.6	U	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.02	J		0.071	U		0.24			1.6			0.19	J	
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.053	J		0.024	J		0.32			1.4			0.18	J	
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.029	U		0.032	U		0.027	U		0.055			0.14		
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.024	U		0.028	U		0.062			0.31			0.15		
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.015	U		0.017	U		0.033			0.22			0.078		
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.079	U		0.089	U		0.11			0.97			0.067	J	
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.024	J		0.11	U		0.16			1.4			0.38	U	
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.024	J		0.083	U		0.17			1.4			0.28	U	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.023	J		0.016	J		0.18			1.3			0.017	J	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.031	J		0.017	J		0.2			1.4			0.023	J	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.028	J		0.014	J		0.27			1.6			0.075	J	
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.018	J		0.011	J		0.21			1.2			0.0074	J	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.024	J		0.044	U		0.16			0.96			0.074	J	
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.014	J		0.039	U		0.1			0.59			0.13	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Isopentane			Isopropylbenzene (Cumene)			2-Propanol			n-Propylbenzene			Styrene		
			Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	1700			2.3	J		5.7	U		3.1			2.5	U	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	1200			1.9	U		3.8	U		1.9	U		1.6	U	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	2200			2.9	U		5.8	U		2.9	U		2.5	U	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	2300			3.1	U		6.2	U		3.1	U		2.7	U	
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	2300			19	U		23	J		19	U		17	U	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	2900			0.51	J		6.2	U		0.61	J		2.7	U	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	1900			0.39	J		6.2	U		3.1	U		2.7	U	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	1200			0.3	J		4.5	U		0.4	J		2	U	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	1400			0.98	J		5.2	U		1.8	J		2.2	U	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	560			0.19	J		2.1	U		0.28	J		0.93	U	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	1500			1.6	J		5.8	U		1.9	J		2.5	U	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	2300			3.2			5.8	U		3.8			2.5	U	
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	16			0.3			0.12	U		0.45			0.05	U	
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	1600			3.1			2.9	U		3.6			1.2	U	
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	39			0.039	J		0.12	U		0.067			0.051	U	
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	610			4.1	U		28			4.1	U		0.71	J	
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	470			0.35	J		2	U		0.98	U		0.85	U	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	740			0.58	J		1.2	U		0.52	J		0.54	U	
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	630			5.8	U		19			5.8	U		5	U	
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	1200			1.2	J		6.2	U		1.3	J		2.7	U	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	920			0.75	J		6	U		3	U		2.6	U	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	870			0.67	J		4.6	U		0.75	J		2	U	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	1100			0.72	J		5.2	U		0.78	J		2.2	U	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	760			0.47	J		2.2	U		0.54	J		0.94	U	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	8.2			0.01	J		0.063	J		0.016	J		0.062	U	
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	5.3			0.016	J		0.14	U		0.035	J		0.06	U	
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.19			0.032	U		0.065	U		0.032	U		0.028	U	
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	1.9			0.028	U		0.046	J		0.0035	J		0.024	U	
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	2			0.017	U		0.02	J		0.017	U		0.015	U	
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	9			0.089	U		0.06	J		0.089	U		0.077	U	
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	18			0.11	U		0.22	U		0.015	J		0.098	U	
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	12			0.083	U		0.16	U		0.016	J		0.072	U	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	9.6			0.0066	J		0.028	J		0.015	J		0.06	U	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	8.1			0.013	J		0.13	U		0.023	J		0.058	U	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	8.6			0.01	J		0.16			0.07	U		0.06	U	
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	5.2			0.0078	J		0.057	J		0.01	J		0.029	U	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	4.6			0.044	U		0.065	J		0.015	J		0.038	U	
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	3.8			0.039	U		0.02	J		0.011	J		0.034	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Tetrachloroethene			Toluene			1,1,1-Trichloroethane (Methyl chloroform)			Trichloroethene			1,2,4-Trimethylbenzene		
			Result	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	3.9	U		5.4			3.2	U		3.1	U		1	J	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	2.6	U		9.1			2.1	U		2	U		1.9	U	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	4	U		32			0.98	J		2	J		2.9	U	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	4.3	U		30			3.4	U		3.4	U		0.36	J	
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	27	U		42			22	U		21	U		19	U	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	4.3	U		54			3.4	U		3.4	U		0.79	J	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	0.96	J		52			3.4	U		3.4	U		3.1	U	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	3.1	U		46			2.5	U		2.5	U		0.32	J	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	3.6	U		52			1.3	J		2.8	U		1.4	J	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	1.5	U		18	CN	J	1.2	U		1.2	U		0.16	J	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	4	U		1.2	J		3.2	U		3.2	U		1.5	J	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	4	U		1.5	J		3.2	U		3.2	U		3.8		
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.08	U		0.1			0.064	U		0.063	U		0.57		
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	2	U		0.95	J		1.6	U		1.6	U		4		
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.081	U		0.012	J		0.065	U		0.064	U		0.094		
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	5.6	U		25			4.5	U		2.4	J		4.1	U	
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	1.4	U		0.75	U		1.1	U		1.1	U		0.15	J	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	0.85	U		0.38	J		0.69	U		0.68	U		0.56	J	
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	8	U		4.1	J		6.4	U		6.3	U		5.8	U	
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	4.3	U		2.3	J		3.4	U		1.7	J		1.6	J	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	4.1	U		3			3.3	U		3.3	U		0.6	J	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	3.2	U		2			2.6	U		2.5	U		0.73	J	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	3.6	U		0.82	J		2.9	U		2.8	U		0.64	J	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	1.5	U		0.81	J	J	1.2	U		1.2	U		0.43	J	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.098	U		0.017	J		0.079	U		0.078	U		0.02	J	
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.096	U		0.0068	J		0.077	U		0.076	U		0.054	J	
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.045	U		0.025	U		0.036	U		0.035	U		0.032	U	
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.038	U		0.012	J		0.031	U		0.03	U		0.028	U	
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.024	U		0.0051	J		0.019	U		0.019	U		0.017	U	
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.12	U		0.045	J		0.099	U		0.098	U		0.089	U	
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.16	U		0.29			0.12	U		0.12	U		0.11	U	
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.11	U		0.12			0.092	U		0.09	U		0.027	J	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.095	U		0.17			0.076	U		0.075	U		0.021	J	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.093	U		0.058			0.075	U		0.074	U		0.035	J	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.096	U		0.079			0.077	U		0.076	U		0.02	J	
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.046	U		0.045			0.037	U		0.036	U		0.013	J	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.061	U		0.14			0.049	U		0.049	U		0.017	J	
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.054	U		0.1			0.043	U		0.043	U		0.01	J	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			m,p-Xylenes			o-Xylenes			TPH (C2-C10)		
			Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals	Result (mg/m^3)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	0.6	J		350			5.8			0.85	J		10000		
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	1.9	U		100			0.94	J		0.41	J		8200		
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	2.9	U		180			3.3			0.9	J		15000		
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	3.1	U		180			4			1.1	J		20000		
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	19	U		200			4.8	J		17	U		17000		
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	0.53	J		290			7.4			1.9	J		16000		
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	3.1	U		220			6.8			1.5	J		14000		
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	0.27	J		180			6.4			1.7	J		8900		
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	0.87	J		270			13			3.8			9600		
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	0.14	J		120			3.2	CN	J	0.8	J		5800		
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	0.78	J		820			12			1.1	J		14000		
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	1.8	J		1200			20			1.8	J				
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.18			13			1.4			0.14					
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	1.6			890			23			1.7					
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.033	J		4.2			0.19			0.021	J				
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	4.1	U		250			1.6	J		0.67	J		5500		
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	0.98	U		320			0.54	J		0.18	J		5300		
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	0.25	J		330			4.1			0.3	J		9000		
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	5.8	U		280			2.4	J		5.1	U		7600		
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	1	J		470			6.7			1	J		11000		
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	0.32	J		400			3.8			2.6	U		9800		
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	0.39	J		380			4.5			0.41	J		8500		
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	0.36	J		420			3.5			2.3	U		8000		
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	0.21	J		300			1.7	CN	J	0.96	U		8700		
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.071	U		3.6			0.029	J		0.063	U		100		
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.019	J		3.6			0.098			0.062	U				
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.032	U		0.059			0.0061	J		0.029	U				
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.028	U		1.6			0.024	U		0.024	U		51		
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.017	U		1.5			0.015	U		0.015	U		39		
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.089	U		0.85			0.0053	J		0.079	U		71		
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.11	U		1.5			0.051	J		0.099	U		130		
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.083	U		2.4			0.047	J		0.011	J		110		
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.069	U		1.9			0.053	J		0.016	J		77		
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.067	U		2.2			0.038	J		0.007	J		81		
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.0097	J		2.3			0.039	J		0.062	U		120		
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.033	U		1.7			0.029	J		0.03	U		75		
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.0091	J		1.4			0.051			0.014	J		55		
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.0056	J		0.99			0.031	J		0.01	J		36		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Butane			Isopentane			C6+			Carbon Dioxide			Ethane		
			Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	0.036			0.046			0.057			4.5			0.00017	J	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	0.023			0.042			0.04			2.2			0.0001	J	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	0.066			0.08			0.069			2.4			0.00013	J	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	0.12			0.1			0.094			2.3			0.00013	J	
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	0.079			0.095			0.095			2.3			0.0024	U	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	0.057			0.086			0.1			2.5			0.0025	U	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	0.041			0.071			0.097			2.4			0.0025	U	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	0.019			0.045			0.074			2.1			0.0018	U	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	0.015			0.038			0.069			2			0.0021	U	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	0.0086			0.024			0.049			1.9			0.0022	U	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	0.033			0.041			0.094			3.8			0.00021	J	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	0.049			0.061			0.14			5			0.00028	J	
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.00032	J		0.0004	J		0.0036	J		1.3			0.0024	U	
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	0.034			0.042			0.099			4.1			0.00022	J	
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.00075	J		0.00086	J		0.00048	J		1.9			0.0024	U	
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	0.015			0.018			0.035			2.7			0.0023	U	
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	0.015			0.016			0.031			2.8			0.000061	J	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	0.031			0.032			0.079			3.4			0.00019	J	
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	0.025			0.026			0.067			3.1			0.00014	J	
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	0.033			0.036			0.088			3.4			0.0002	J	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	0.031			0.0014	J		0.087			3.2			0.00016	J	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	0.027			0.031			0.068			3			0.00018	J	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	0.026			0.031			0.08			2.7			0.00016	J	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	0.027			0.032			0.067			3.5			0.00014	J	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.00019	J		0.00024	J		0.00068	J		1.4			0.0029	U	
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.00014	J		0.00017	J		0.00047	J		1			0.0028	U	
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.0026	U		0.0026	U		0.000092	J		0.61			0.0026	U	
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.000062	J		0.000082	J		0.00015	J		0.74			0.0028	U	
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.000071	J		0.000081	J		0.0002	J		0.72			0.0028	U	
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.00017	J		0.00031	J		0.00076	J		0.93			0.0027	U	
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.00045	J		0.00056	J		0.0004	J		1			0.0027	U	
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.00047	J		0.00043	J		0.0005	J		1.3			0.0025	U	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.00027	J		0.00031	J		0.013	J		1.2			0.0028	U	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.0002	J		0.00026	J		0.00045	J		1.3			0.0027	U	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.00022	J		0.00029	J		0.00094	J		1.4			0.0028	U	
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.00015	J		0.00021	J		0.00054	J		1.2			0.002	U	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.00011	J		0.00016	J		0.0004	J		0.95			0.0023	U	
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.000082	J		0.00014	J		0.00021	J		0.81			0.0024	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Isobutane			Methane			Neopentane			Nitrogen			Oxygen		
			Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	0.0071			1.4			0.00021	J		79			15		
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	0.0035			0.43			0.00028	J		78			19		
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	0.011			0.83			0.00057	J		78			18		
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	0.016			0.94			0.00045	J		78			18		
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	0.0087			0.73			0.00071	J		78			19		
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	0.006			0.96			0.00051	J		78			18		
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	0.0041			0.88			0.00022	J		78			18		
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	0.0017	J		0.66			0.00012	J		79			18		
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	0.0013	J		0.82			0.00014	J		79			18		
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	0.0007	J		0.51			0.0022	U		78			19		
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	0.0034			1.3			0.00018	J		79			16		
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	0.0052			2			0.00023	J		79			14		
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.0024	U		0.0091			0.0024	U		80			19		
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	0.0035			1.4			0.0023	U		78			16		
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.00013	J		0.012			0.0024	U		79			19		
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	0.0016	J		0.43			0.0023	U		79			18		
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	0.0015	J		0.38			0.00007	J		79			18		
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	0.0031			1.2			0.00014	J		78			17		
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	0.0024			0.96			0.0024	U		78			18		
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	0.0032			1.2			0.0025	U		77			18		
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	0.003			1.2			0.00015	J		77			18		
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	0.0026			1			0.00013	J		79			17		
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	0.0026			1			0.0021	U		79			17		
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	0.0027			1.1			0.00014	J		78			17		
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.0029	U		0.008			0.0029	U		80			18		
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.0028	U		0.0053			0.0028	U		80			19		
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.0026	U		0.00026	U		0.0026	U		79			20		
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.0028	U		0.0017			0.0028	U		79			20		
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.0028	U		0.0019			0.0028	U		79			20		
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.0027	U		0.0031			0.0027	U		79			20		
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.000081	J		0.0058			0.0027	U		79			20		
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.000071	J		0.0074			0.0025	U		79			20		
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.0028	U		0.0049			0.0028	U		79			20		
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.0027	U		0.0059			0.0027	U		79			20		
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.0028	U		0.0071			0.0028	U		78			20		
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.002	U		0.0055			0.002	U		80			19		
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.0023	U		0.0046			0.0023	U		80			19		
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.0024	U		0.004			0.0024	U		79			20		

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 10
SVE SYSTEM HEADER AND EXHAUST ANALYTICAL DATA

Location	Sample ID	Sample Date	Pentane			Propane		
			Result (%)	Lab Quals	AECOM Quals	Result (%)	Lab Quals	AECOM Quals
SVE Public Works Header	PW-Header-SVE-070820	7/8/2020	0.025			0.00084	J	
SVE Public Works Header	PW-Header-SVE-100120	10/1/2020	0.019			0.00085	J	
SVE Public Works Header	PW-Header-SVE-110320	11/3/2020	0.043			0.00097	J	
SVE Public Works Header	PW-Header-SVE-120120	12/1/2020	0.057			0.0013	J	
SVE Public Works Header	PW-Header-SVE-010521	1/5/2021	0.054			0.00039	J	
SVE Public Works Header	PW-Header-SVE-020421	2/4/2021	0.051			0.00026	J	
SVE Public Works Header	PW-Header-SVE-030421	3/4/2021	0.044			0.00018	J	
SVE Public Works Header	PW-Header-SVE-040121	4/1/2021	0.028			0.0018	U	
SVE Public Works Header	PW-Header-SVE-050321	5/3/2021	0.025			0.0021	U	
SVE Public Works Header	PW-Header-SVE-060121	6/1/2021	0.016			0.0022	U	
SVE Refinery Header	WFL-Header-SVE-070820	7/8/2020	0.018			0.00021	J	
SVE Refinery Header	PurpleLine-Header-SVE-070820	7/8/2020	0.027			0.00031	J	
SVE Refinery Header	BlueLine-Header-SVE-070820	7/8/2020	0.00015	J		0.0024	U	
SVE Refinery Header	PurpleLine-Header-SVE-071520	7/15/2020	0.018			0.00023	J	
SVE Refinery Header	BlueLine-Header-SVE-072120	7/21/2020	0.00022	J		0.0024	U	
SVE Refinery Header	WFL-Header-SVE-080620	8/6/2020	0.0066			0.0001	J	
SVE Refinery Header	WFL-Header-SVE-090220	9/2/2020	0.0061			0.0001	J	
SVE Refinery Header	WFL-Header-SVE-120120	12/1/2020	0.014			0.0002	J	
SVE Refinery Header	WFL-Header-SVE-010521	1/5/2021	0.012			0.00013	J	
SVE Refinery Header	WFL-Header-SVE-020421	2/4/2021	0.017			0.00019	J	
SVE Refinery Header	WFL-Header-SVE-030421	3/4/2021	0.016			0.00016	J	
SVE Refinery Header	WFL-Header-SVE-040121	4/1/2021	0.015			0.00014	J	
SVE Refinery Header	WFL-Header-SVE-050321	5/3/2021	0.015			0.00016	J	
SVE Refinery Header	WFL-Header-SVE-060121	6/1/2021	0.015			0.00017	J	
SVE RTO Exhaust	Exh-SVE-070820	7/8/2020	0.0001	J		0.0029	U	
SVE RTO Exhaust	Exh-SVE-071520	7/15/2020	0.0028	U		0.0028	U	
SVE RTO Exhaust	Exh-SVE-072120	7/21/2020	0.0026	U		0.0026	U	
SVE RTO Exhaust	Exh-SVE-080620	8/6/2020	0.0028	U		0.0028	U	
SVE RTO Exhaust	Exh-SVE-090220	9/2/2020	0.0028	U		0.0028	U	
SVE RTO Exhaust	Exh-SVE-100120	10/1/2020	0.00015	J		0.0027	U	
SVE RTO Exhaust	Exh-SVE-110320	11/3/2020	0.00029	J		0.0027	U	
SVE RTO Exhaust	Exh-SVE-120120	12/1/2020	0.00023	J		0.0025	U	
SVE RTO Exhaust	Exh-SVE-010521	1/5/2021	0.00018	J		0.0028	U	
SVE RTO Exhaust	Exh-SVE-020421	2/4/2021	0.00015	J		0.0027	U	
SVE RTO Exhaust	Exh-SVE-030421	3/4/2021	0.00016	J		0.0028	U	
SVE RTO Exhaust	Exh-SVE-040121	4/1/2021	0.00012	J		0.002	U	
SVE RTO Exhaust	Exh-SVE-050321	5/3/2021	0.00009	J		0.0023	U	
SVE RTO Exhaust	Exh-SVE-060121	6/1/2021	0.00008	J		0.0024	U	

Notes:
Analytes shown were detected in at least 1 sample during the current quarter or previous 3 quarters.
Blank cells in Result column indicate that analyte was not on target analyte list.

Lab Qualifiers
J = Estimated value; results between the MDL and RL
U = Compound analyzed for but not detected above the RL
E = Exceeds instrument calibration range
ND, UJ = Non-detected compound associated with low bias in the continuing calibration verification (CCV)
J0 = Estimated value due to bias in the CCV
CN = Indicates potential high bias due to use of Tedlar© bag for off-line dilution

AECOM Qualifiers
J = Estimated detection
UJ = Estimated non-detect
U = Non-detect due to blank contamination

Figures

The following MVS descriptions and assumptions apply to **Figures 9** through **12**:

Plan View Model Output – The data input for the plan view model was not limited by depth and was modeled in three dimensions (3D). The bottom surface of the resulting model was limited to the potentiometric groundwater surface elevation. The two dimensional (2D) appearance of the figures created from the 3D model was achieved by displaying an aerial view of horizontal slices through the model. The horizontal slices were taken parallel to the ground surface that was created from GPS survey data, rather than at single elevation plane. The result of this is a surface that accurately represents soil vapor concentrations at discreet depths measured from ground surface.


Inward Kriging / Boundary Cut-off – This method of Kriging limits the horizontal extent of data modeling to the extent of the data on the x/y plane in a convex hull. The model is bounded by the VMPs.

Vertical Cut-off – The bottom surface of this model is based on the current quarter's groundwater gauging data collected in Roxana. The groundwater gauging data was used to model a 2D surface that represents the interface between the top surface of groundwater and the bottom surface of soil vapor.

Duplicate Samples – In locations and depths where duplication samples were collected, the higher concentration was used.

Detection Limits – In cases where the lab reported a non-detect, half the value of the lab detection limit was used in the model. This conservative method is based on the assumption that the soil is likely not free of benzene, but the quantity contained is lower than detectable at the analyzed dilution. Data are posted where non-detect.

File: C:\USERS\MADALINA.TAMAS\AECOM DIRECTORY\GDS GIS SERVICES - DCS AMERICAS\SHELL\ILLINOIS\USF00666-900 S CENTRAL AVE-ROXANA-IL\ROXANA 4Q20 SV-SVE RPT\WORKSPACE\03.04.2021\FIGURE 1 INVESTIGATION AREA LOCATION MAP.DWG Last edited: Mar. 4, 21 @ 5:06 PM by: WCC-ST.LOUIS

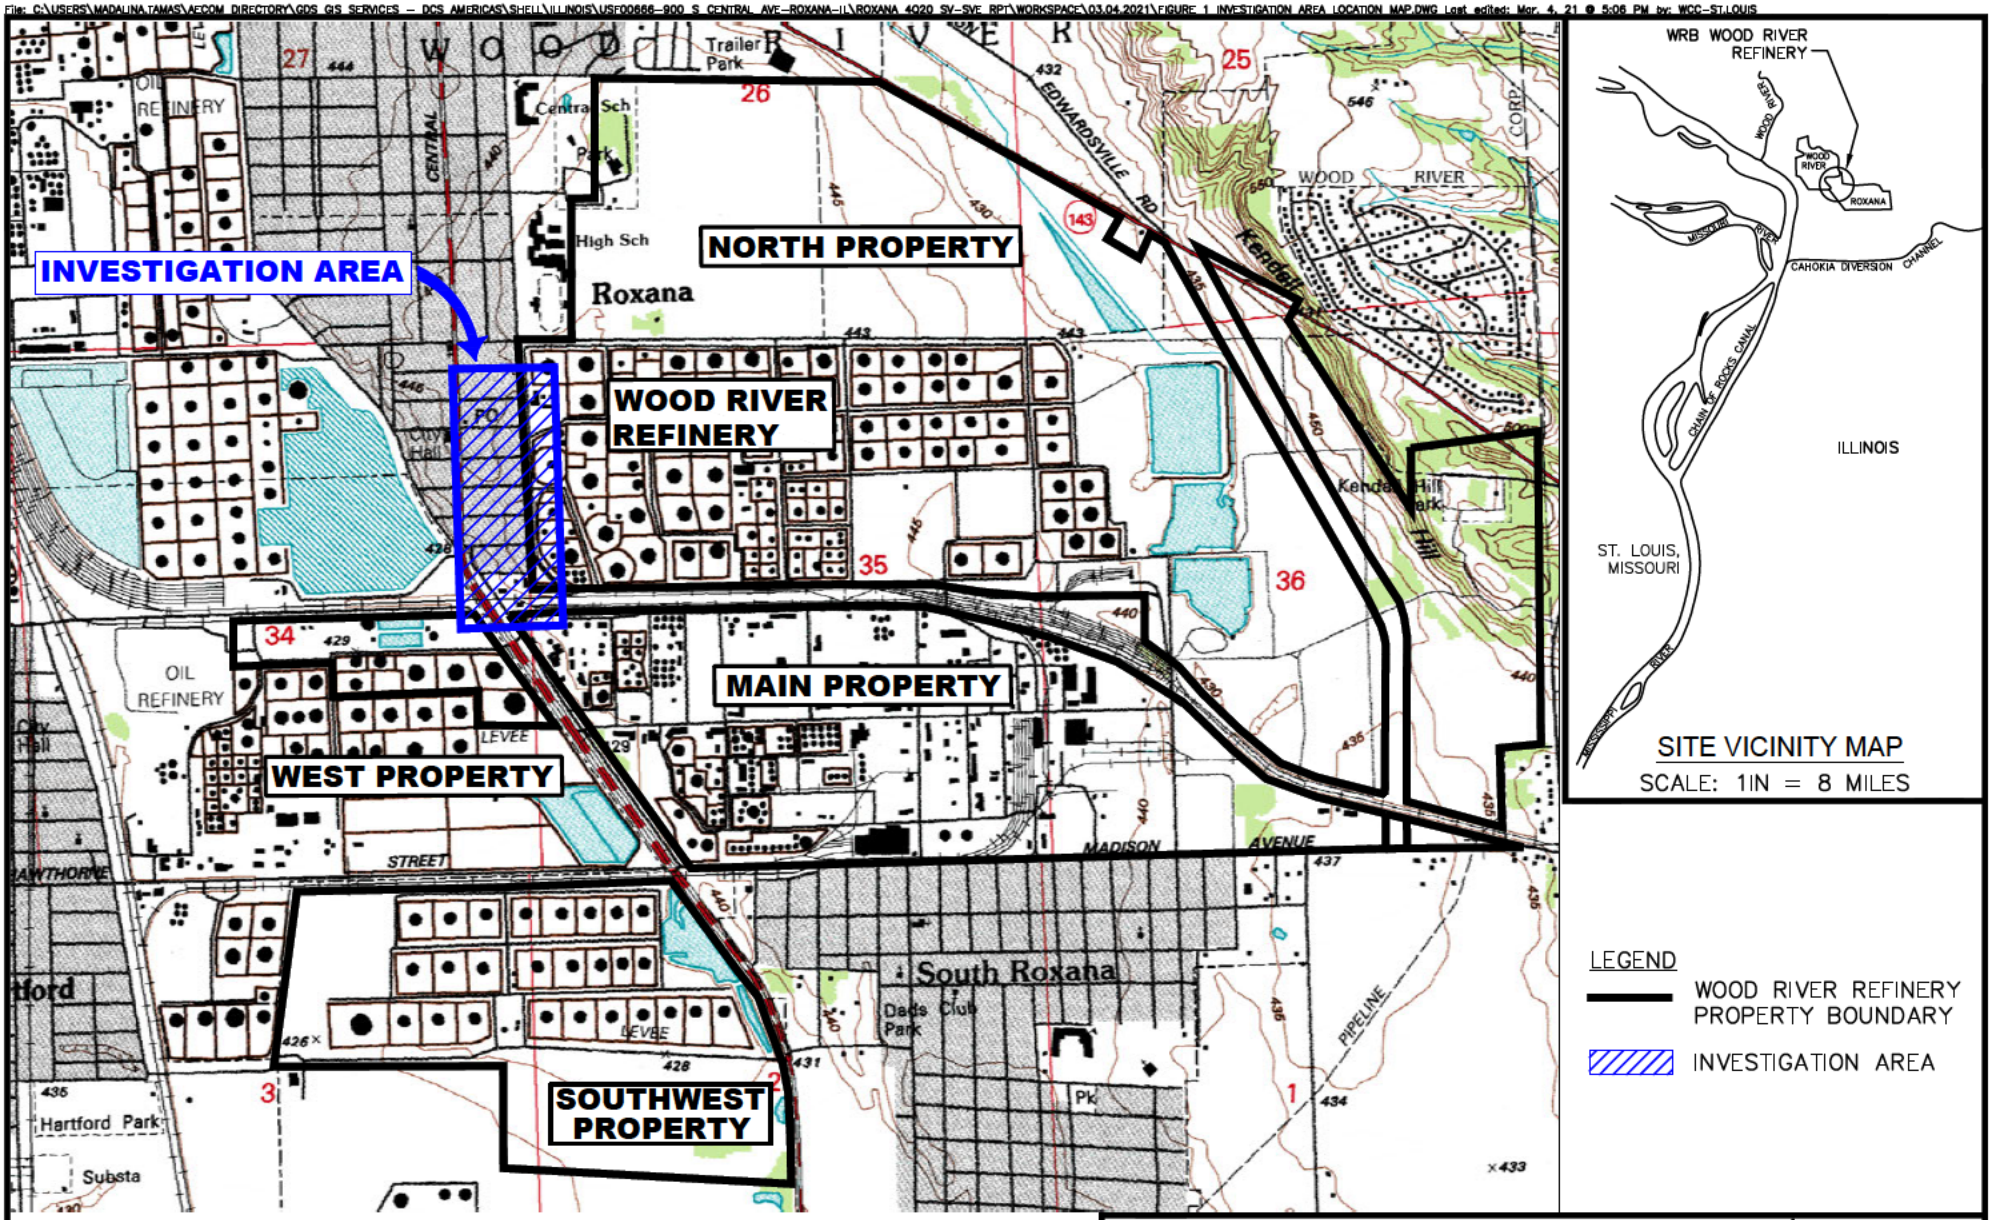

SOURCE:
ELECTRONIC USGS DIGITAL RASTER GRAPHIC 7.5 MINUTE TOPOGRAPHIC MAP OF WOOD RIVER, IL-MO REVISED 1994.

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY: gds April 2021
DSGN. BY: djd
CHKD. BY: smf

Investigation Area Location Map

FIG. NO. 1

File: C:\USERS\MADALINA.TAMAS\AECOM DIRECTORY\GDS GIS SERVICES - DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S_CENTRAL_AVE-ROXANA-IL\ROXANA 4Q20 SV-SVE RPT\WORKSPACE\03.04.2021\FIGURE 2 VAPOR MONITORING SAMPLING POINT LOCATIONS.DWG Last edited:

LEGEND


- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)

TYDEMAN AVE
FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
RAND AVENUE
HIGHWAY 111 (S. CENTRAL AVE)
CHAFFER AVE
1ST STREET
2ND STREET
VILLAGE OF ROXANA
BP
NORTH PROPERTY
WOOD RIVER REFINERY
PUBLIC WORKS YARD
1986 APPROXIMATE BENZENE RELEASE SITE

VMP-64, VMP-63, VMP-47, VMP-62, VMP-1, VMP-2, VMP-20, VMP-48, VMP-21, VMP-49, VMP-3, VMP-56, VMP-32, VMP-43, VMP-22, VMP-50, VMP-4, VMP-44, VMP-23, VMP-51, VMP-5, VMP-45, VMP-52, VMP-6, VMP-42, VMP-7, VMP-24, VMP-8, VMP-9, VMP-54, VMP-53, VMP-18, VMP-19, VMP-41, VMP-10, VMP-17, VMP-11, VMP-29, VMP-30, VMP-13, VMP-55, VMP-14, VMP-25, VMP-15, VMP-16

VMP-61, VMP-57, VMP-58, VMP-59, VMP-60, VMP-33, VMP-46, VMP-34, VMP-35, VMP-27, VMP-26, VMP-28, VMP-36, VMP-37, VMP-38, VMP-39, VMP-65, VMP-12

A-28, A-33, A-27, A-34, A-30, A-22, F-76, F-77, F-78, F-73, F-74, F-75

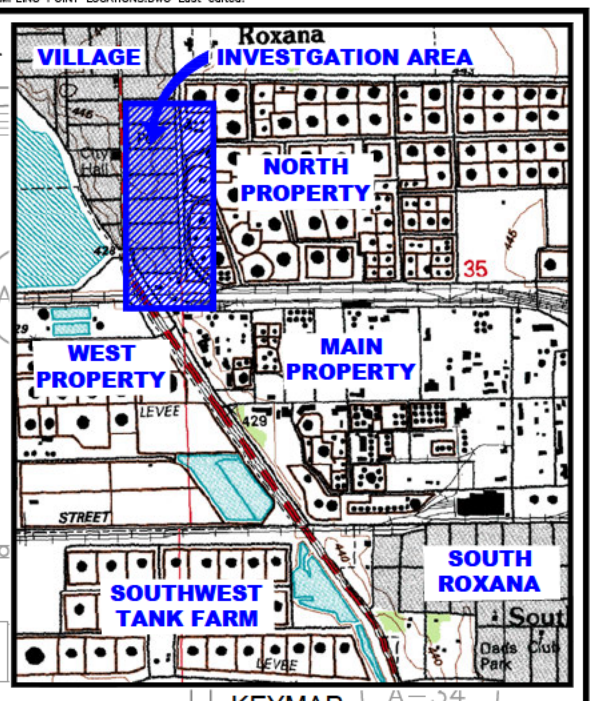

KEYMAP
1" = 2,500'


0 200
SCALE FEET
N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US SOIL VAPOR MONITORING PROGRAM ROXANA, ILLINOIS		PROJECT NO. 60648474
	AECOM	
DRN. BY: gds April 2021 DSGN. BY: djd CHKD. BY: smf	Vapor Monitoring Point Sampling Locations	FIG. NO. 2

NOTES:
1. CONTOUR LINES PRIMARILY GENERATED BY SURFER VERSION 14 MODELING OF GROUNDWATER ELEVATIONS. SOME INTERPRETATION WAS DONE UTILIZING PROFESSIONAL JUDGMENT AND CONTOUR LINES WERE MODIFIED BY HAND.

2. ELEVATIONS ARE RELATIVE TO NAVD 88.

3. COMPREHENSIVE GROUNDWATER ELEVATIONS WERE MEASURED APRIL 5–7, 2021. GROUNDWATER ELEVATION AT MW–26 WAS MEASURED ON APRIL 9, 2021 DURING THE QUARTERLY GROUNDWATER SAMPLING EVENT DUE TO INABILITY TO ACCESS DURING THE GAUGING EVENT.

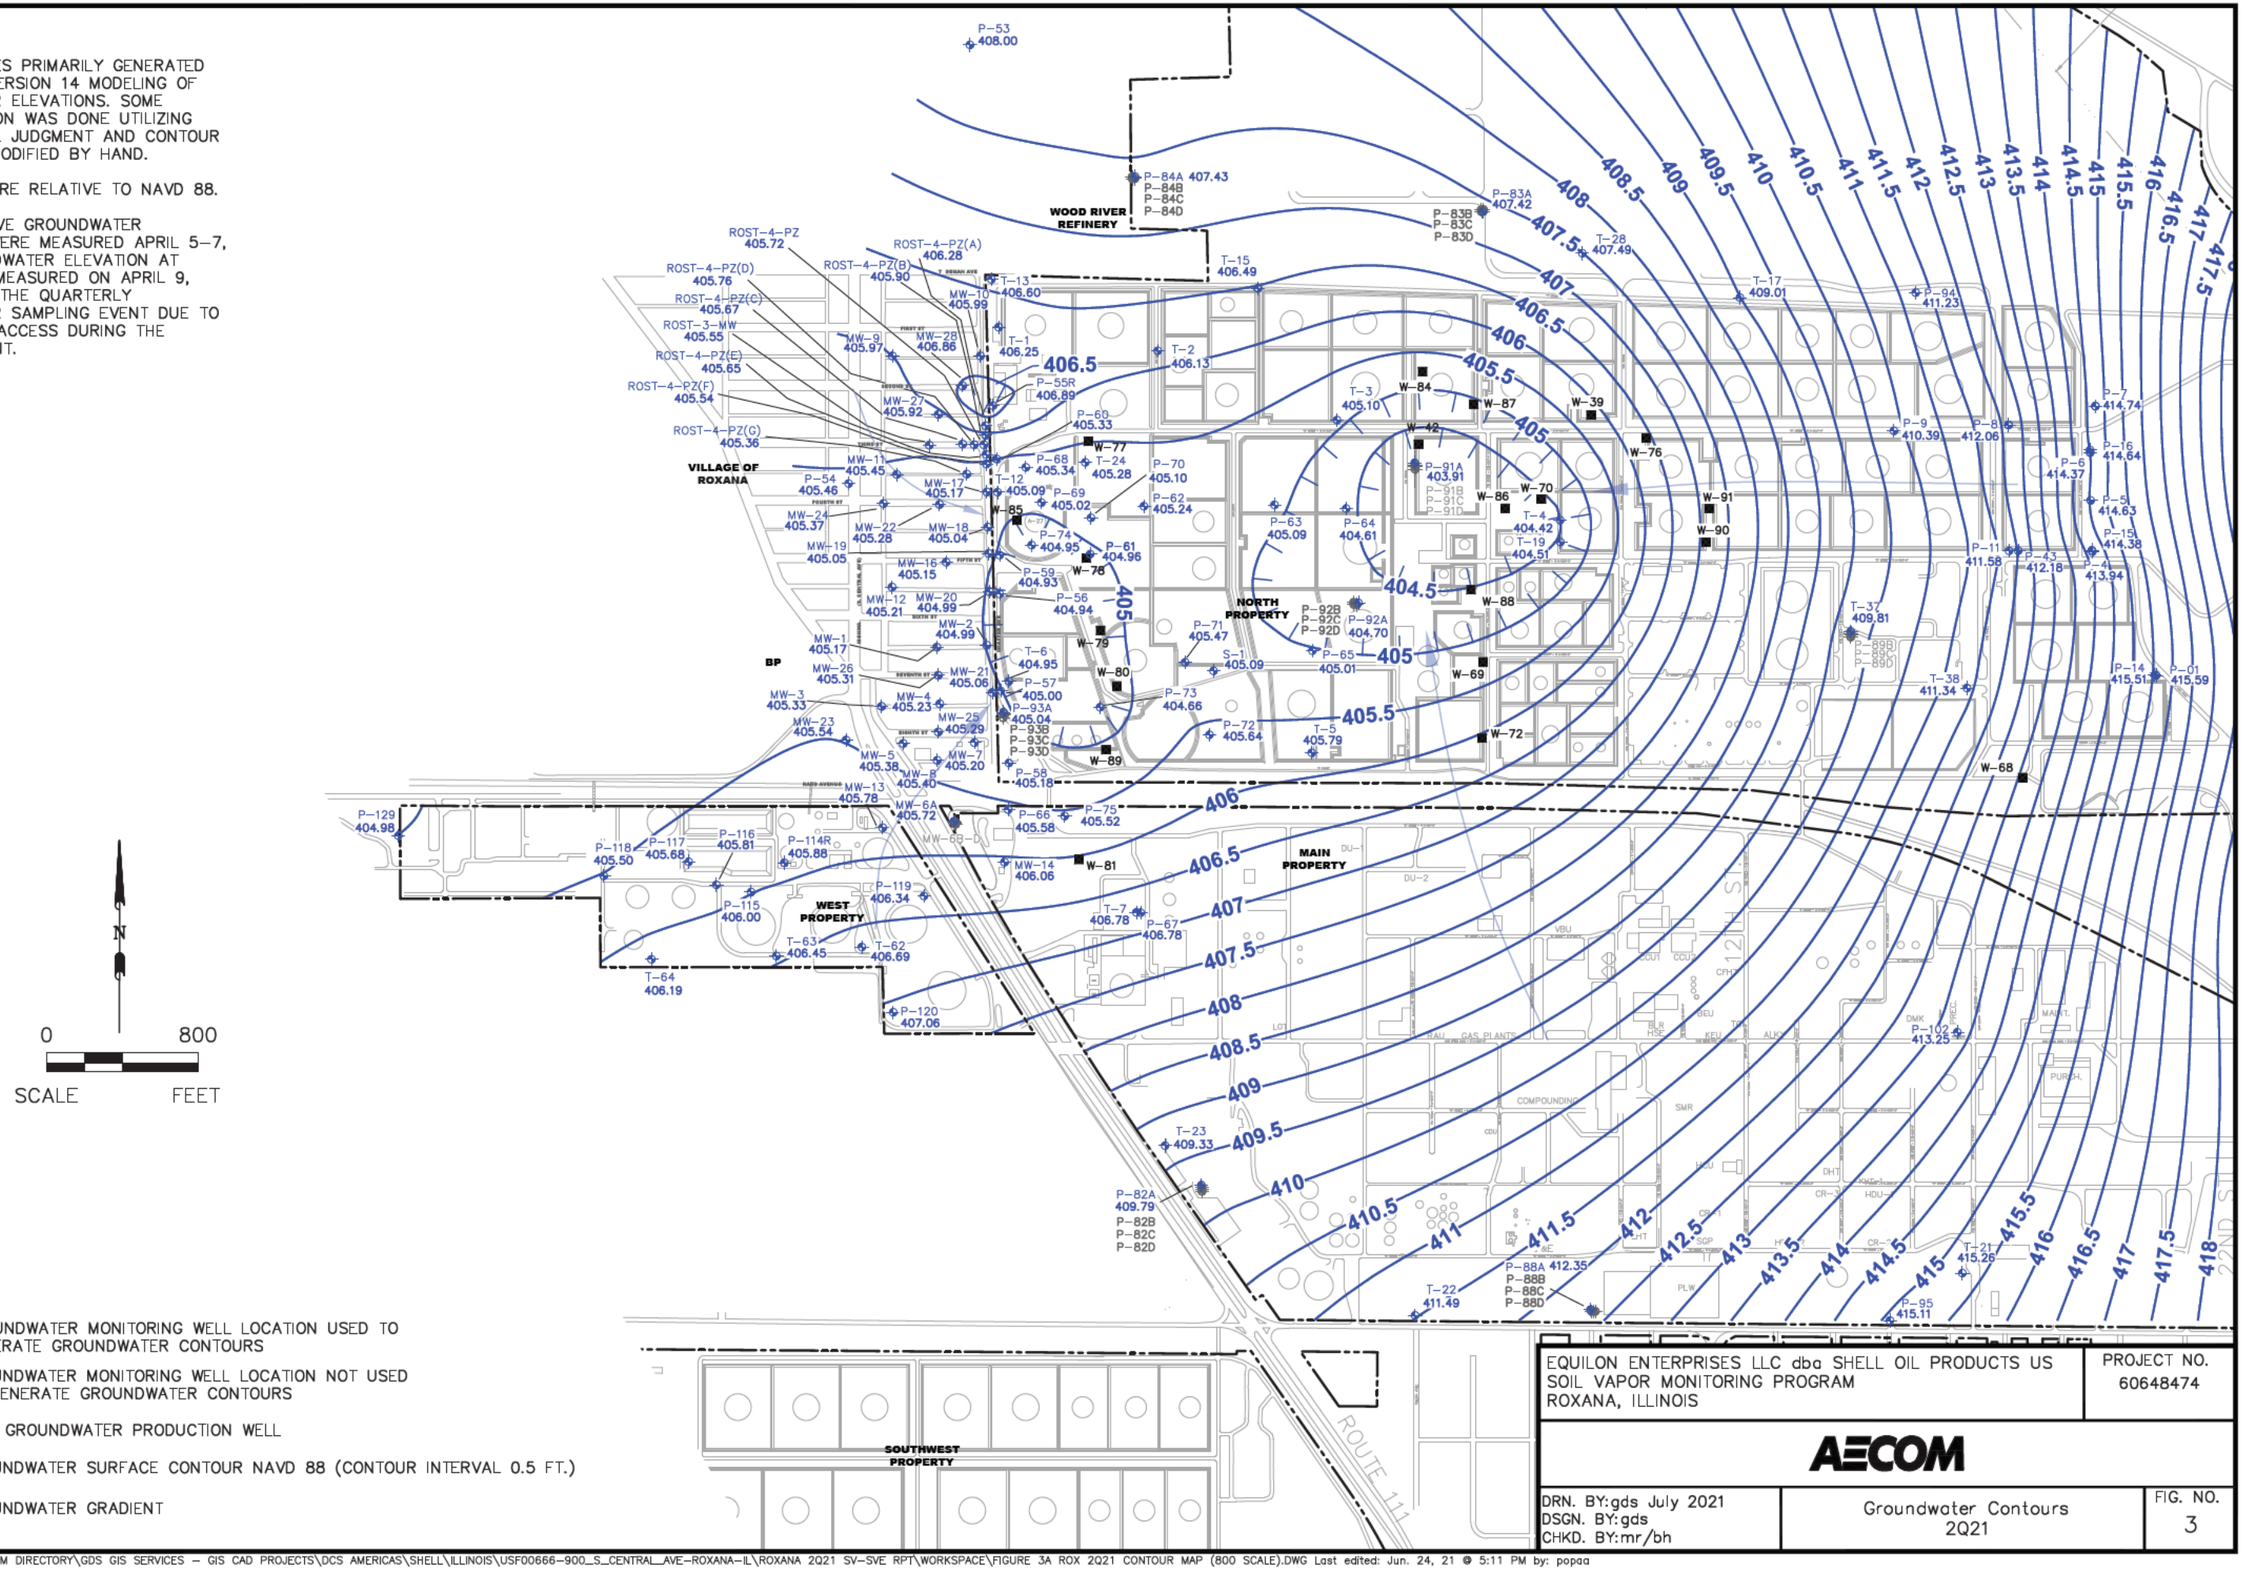

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY:gds July 2021
DSGN. BY:gds
CHKD. BY:mr/bh

Groundwater Contours 2Q21

FIG. NO. 3

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666–900_S_CENTRAL_AVE–ROXANA–IL\ROXANA 2Q21 SV–SVE RPT\WORKSPACE\FIGURE 3A ROX 2Q21 CONTOUR MAP (800 SCALE).DWG Last edited: Jun. 24, 21 @ 5:11 PM by: popaa

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666–900_S_CENTRAL_AVE–ROXANA–IL\ROXANA 2021 SV–SVE RPT\WORKSPACE\FIGURE 4 – 2021 VAPOR PORT SCREEN COMPARISON TO GROUNDWATER ELEVATIONS.DWG Last edited: Jun. 24, 21 @ 8:08 PM by: popaa

LEGEND

- GROUNDWATER MONITORING WELL LOCATION USED TO GENERATE GROUNDWATER CONTOURS
- GROUNDWATER MONITORING WELL LOCATION NOT USED TO GENERATE GROUNDWATER CONTOURS
- VAPOR MONITORING POINT (VMP) LOCATION (ELEVATION OF TOP OF THE DEEPEST VAPOR MONITORING POINT SCREEN)
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- WRR GROUNDWATER PRODUCTION WELL
- –407– GROUNDWATER SURFACE CONTOUR (CONTOUR INTERVAL 0.5 FT)
- GROUNDWATER GRADIENT

NOTES:

1. COMPREHENSIVE GROUNDWATER ELEVATIONS WERE MEASURED APRIL 5–7, 2021. GROUNDWATER ELEVATION AT MW–26 WAS MEASURED ON APRIL 9, 2021
2. CONTOUR LINES PRIMARILY GENERATED BY SURFER VERSION 14 MODELING OF GROUNDWATER ELEVATIONS. SOME INTERPRETATION WAS DONE UTILIZING PROFESSIONAL JUDGMENT AND CONTOUR LINES WERE MODIFIED BY HAND.
3. ELEVATIONS ARE RELATIVE TO NAVD 88.

* INDICATES THAT THE LNAPL AND/OR WATER LEVEL IS ABOVE THE TOP OF THE GROUNDWATER MONITORING WELL SCREEN OR THE DEEPEST VAPOR MONITORING POINT SCREEN.

TYDEMAN AVE
FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
HIGHWAY 111 (S. CENTRAL AVE)
CHAFFER AVE
RAND AVENUE
VILLAGE OF ROXANA
BP
PUBLIC WORKS YARD
1988 APPROXIMATE BENZENE RELEASE SITE
NORTH PROPERTY
WOOD RIVER REFINERY
MAIN PROPERTY
WEST PROPERTY

407
406.5
406
405.5
405
407.5

T–13 406.60; VMP-64* 414.12; VMP-61; VMP-57; VMP-63 413.37; T–1 406.25; VMP-47 415.07; MW-10 405.99; VMP-58; MW-9 405.97; VMP-59; VMP-62 416 20; ROST-4-PZ(A) 406.28; MW-28 406.86; VMP-60; ROST-4-PZ(B) 405 90; VMP-48 413.72; VMP-1 401.56; P-55R 406.89; MW-27 405.92; VMP-33; ROST-4-PZ(D) 405.76; VMP-20* 404.17; VMP-2* 401.56; ROST-4-PZ(C) 405.67; VMP-46; ROST-4-PZ 405.72; ROST-3-MW 405.55; VMP-42 412.32; P-60 405.33; ROST-4-PZ(E) 405.65; VMP-34; P-68 405.34; VMP-21 409.43; VMP-49 412.35; P-54 405.46; MW-11 405.45; ROST-4-PZ(F) 405.54; ROST-4-PZ(G); VMP-3* 403.22; VMP-35; VMP-56* 403.87; VMP-32 412.03; MW-17 405.17; T-12 405.09; MW-24 405.37; MW-22 405.28; VMP-43 411.54; VMP-26; VMP-27; MW-18 405.04; VMP-22 407.15; VMP-28; VMP-50 413.83; VMP-4* 404.09; VMP-36; MW-19 405.05; P-59 404.93; VMP-44 413.35; MW-16 405.15; MW-12 405.21; VMP-37; VMP-5* 404.59; VMP-23* 404.14; VMP-51 414.27; MW-20 404.99; P-56 404.94; VMP-45 413.82; MW-2 404.99; VMP-38; VMP-6* 405.18; MW-1 405.17; VMP-52 413.73; VMP-7* 405.68; VMP-24 407.53; VMP-39; T-6 404.95; MW-26 405.31; MW-21 405.06; VMP-9* 405.73; P-57 405.00; VMP-54 403.65; MW-4 405.23; VMP-65; MW-3 405.33; VMP-8 406.15; VMP-53 413.55; P-93A 405.04; P-93B; P-93C; P-93D; VMP-18 433.80; VMP-19 438.05; MW-25 405.29; MW-5 405.38; VMP-41 407.47; MW-23 405.54; VMP-10* 404.72; VMP-11* 405.46; VMP-17 438 84; VMP-12* 405.46; VMP-29* 394.66; MW-8 405.40; VMP-13 406.03; MW-7 405 20; VMP-30* 395.54; P-58 405.18; VMP-55* 400.55; VMP-14* 405 94; VMP-25 400.77; VMP-16 405.95; VMP-15* 404.46; P-66 405.58; MW-6A 405.72; MW-13 405.78; MW-6B; MW-6C; MW-6D; MW-14 406.06; P-75 405.52; P-114R 405.88; P-117 405.68; P-116 405.81; P-115 406.00; P-119 406.34; P-67 406.78; T-7 406.78; T–64 406.19; T–63 406.45; T–62 406.69; A–147

A–32; A–31; A–58; A–57; A–34; A–28; A–33; A–37; A–27; A–35; A–16; A–30; A–22; A–29; F–50; F–76; F–77; F–78; F–73; F–74; F–75

T–2 406.13; T–24 405.28; P-62 405.24; P-70 405.10; P-74 404.95; P-61 404.96; P-69 405.02; P-71 405.47; S–1 405.09; P-72 405.64; P-73 404.66

W–77; W–85; W–78; W–79; W–80; W–89; W–81

0 300 SCALE FEET N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY: gds July 2021
DSGN. BY: gds
CHKD. BY: mr/bh

2Q21 Vapor Port Screen Comparison to Groundwater Elevation

FIG. NO. 4

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S_CENTRAL_AVE-ROXANA-IL\ROXANA 2Q21 SV-SVE RPT\WORKSPACE\FIGURE 5 SUMMARY OF BENZENE SOIL VAPOR ANALYTICAL RESULTS (VILLAGE).DWG Last edited: Jun. 29, 21 @ 9:28 AM by: popaa

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-47	5 ft	<0.0039	<0.0039	<0.004	<0.0033
	10 ft	<0.0038 / <0.0038	<0.0037	<0.0039	<0.0032
	20 ft	<0.0038	<0.0042	<0.0039 / <0.0038	<0.0032
	30 ft	<0.0039	<0.0037 / <0.0036	<0.0041	<0.0032 / **0.00042 J**

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-62	5 ft	<0.0039	<0.0039	<0.0037	<0.0032
	10 ft	<0.0036	<0.0039	<0.004	<0.0032
	20 ft	<0.0037	<0.004	Not Sampled[1]	<0.0032
	30 ft	<0.0038	<0.0039	<0.0034	<0.0032

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-64	5 ft	**0.00091 J**	<0.0037	<0.004	<0.0035
	10 ft	<0.004	<0.004	<0.0036	<0.0034
	20 ft	<0.004 / <0.004	<0.0037	<0.0038	<0.0037
	28 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-63	5 ft	<0.004	**0.00089 J**	<0.0039	**0.00064 J**
	10 ft	<0.0043	<0.0037	**0.18**	**0.00058 J**
	20 ft	<0.0039	<0.004	**0.045**	**0.00065 J**
	30 ft	<0.0039 / <0.0037	**0.00062 J / 0.005 J**	<0.004	<0.0035

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-1	5 ft	<0.0038	<0.0042	<0.0036	**0.00056 J**
	8.5 ft	<0.004	<0.004	<0.0038	<0.0035
	23.5 ft	<0.0042	<0.0041	<0.0041 / <0.0042	Not Sampled[1]
	38.5 ft	<0.004	<0.0036	<0.0037	<0.0035

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-48	5 ft	<0.0036	<0.0037	**0.00081 J**	<0.0034
	10 ft	<0.0042 / <0.0039	<0.0042	<0.0039	<0.0035
	20 ft	Not Sampled[1]	<0.004	<0.0039 / <0.004	Not Sampled[1]
	30 ft	<0.004	<0.004	<0.0039	<0.0033

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-20	5 ft	<0.0039	**0.00094 J**	<0.0037	<0.0032
	10 ft	<0.004	<0.0037	<0.0038	<0.003
	25 ft	<0.0038	<0.0036	<0.0039	<0.0031 / <0.003
	39.5 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21 (Initial Sample)	2Q21 (Re-sample[4])
VMP-49	5 ft	<0.004 / <0.0043	<0.0041	<0.0038	<0.0037	
	10 ft	**0.00037 J**	<0.0042	<0.0036	<0.0035	
	20 ft	**0.00044 J**	<0.004	<0.0037	<0.0037	**0.001 J**
	30 ft	**0.00037 J**	<0.32	**0.001 J**	<0.0035	

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-42	10 ft	<0.004	<0.0039	**0.025**	<0.0032
	20 ft	<0.0039	<0.0039	<0.0042	<0.0036
	30 ft	<0.0039	<0.004 / <0.0039	<0.004	<0.0036

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-32	5 ft	<0.0042	<0.0042	**0.00034 J**	<0.0032
	10 ft	**0.0012 J**	<0.0038	<0.004	<0.0034 / <0.0032
	20 ft	<0.004	<0.0041	**0.0006 J / 0.0006 J**	Not Sampled[1]
	30 ft	<0.0042	<0.0041 / <0.0045	**0.00041 J**	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-3	5 ft	<0.0042	<0.0039	<0.0043	<0.0032
	10 ft	<0.004	<0.0043	Not Sampled[1]	<0.0032
	22 ft	<0.0042	<0.0043	<0.004	<0.0032 / **0.0012 J**
	31.5 ft	**0.0089 J**	<4	<0.0041	**0.0011 J**
	39 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21 (Initial Sample)	2Q21 (Re-sample[4])
VMP-21	5 ft	**0.00038 J**	<0.0039	<0.0041	<0.0035	
	10 ft	<0.0037	<0.004	<0.0042 / <0.0041	<0.0034	**0.0031 J**
	25 ft	<0.0042	<0.0041	**0.0912 J**	<0.0036 / <0.0034	
	33 ft	<0.0042	**0.00042 J**	<0.0039	<0.0037	

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-56	10 ft	**0.0016 J / 0.0021 J**	<0.0039	<0.0042	<0.0038
	25 ft	<0.004	**0.00094 J / 0.0023 J**	<0.004 J / **0.00084 J**	<0.0037 / <0.0034
	38.5 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21 (Initial Sample)	2Q21 (Re-sample[4])
VMP-22	5 ft	<0.0042	<0.0039	<0.0043	<0.0037	
	10 ft	**0.0022 J**	<0.004	**0.00054 J**	<0.0036	
	18 ft	<0.0044	**0.00063 J**	**0.00043 J**	<0.0036	
	38 ft	Not Sampled[1]	<0.004	**0.00042 J**	<0.035	<0.0038

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-43	10 ft	<0.0042	<0.0042	<0.0039	**0.0014 J**
	20 ft	<0.0044	<0.004	<0.0039	<0.0032
	30 ft	<0.0042	<0.0039	<0.0039	**0.00094 J**

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-23	5 ft	**0.033**	<0.004	<0.0042	<0.0034
	10 ft	<0.0043	<0.0039 / <0.0039	<0.0041	Not Sampled[1]
	25 ft	**0.0016 J**	<0.0039	<0.004	<0.0031
	40 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-50	5 ft	<0.0041	<0.0036	<0.004	<0.0034
	10 ft	<0.0037	<0.0039	<0.004	<0.0034
	20 ft	<0.0039	<0.0039 / <0.0042	<0.0042 / <0.004	<0.0032 / <0.0032
	30 ft	<0.04	<0.0079	<0.08	<0.064

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-4	5 ft	<0.0039 / <0.0041	**0.0012 J**	<0.0036	**0.00055 J**
	12 ft	**0.0046**	<0.0039	<0.0036	**0.002** J
	23.5 ft	<0.0041	<0.0038 / <0.0039	<0.0038	**0.00071 J**
	39 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-52	5 ft	<0.0037 / <0.004	<0.0041	<0.0039 / <0.0036	**0.0011 J**
	10 ft	Not Sampled[1]	<0.0039	<0.0038	<0.0032
	20 ft	<0.0043	<0.0038	<0.0038	<0.0034
	30 ft	<0.0043	<0.0039	<0.0037	**0.00052 J**

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21 (Initial Sample)	2Q21 (Re-sample[4])
VMP-53	5 ft	**0.00067 J**	<0.0041	**0.0011 J**	<0.0032	
	10 ft	<0.0043	<0.0037	<0.0039	<0.003 / <0.0032	**0.0029 J**
	20 ft	**0.00083 J**	<0.004	**0.0018 J**	<0.0035	
	30 ft	<0.0039	<0.0038	<0.0038	<0.0032	

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-44	10 ft	<0.0038	Not Sampled[2]	Not Sampled[2]	Not Sampled[2]
	20 ft	<0.004	Not Sampled[2]	Not Sampled[2]	Not Sampled[2]
	30 ft	Not Sampled[1]	Not Sampled[2]	Not Sampled[2]	Not Sampled[2]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-24	5 ft	<0.004	**0.0005 J**	**0.00036 J**	<0.0031
	10 ft	<0.0039	**0.00035 J**	<0.0039	<0.0028 / <0.0029
	22 ft	**0.00037 J**	<0.0038	**0.00038 J**	<0.0032
	34 ft	<0.0042	**0.0038 J / 0.00033 J**	**0.00038 J**	<0.0032

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-51	5 ft	<0.0038	<0.0041	<0.004	<0.0034
	10 ft	**0.00098 J**	<0.0041	<0.0041	<0.0035
	20 ft	<0.0042	<0.0042	<0.0038	**0.00048 J**
	30 ft	<0.0039	<0.0043	<0.0042	**0.00075 J**

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-8	5 ft	<0.0039	<0.004	<0.0039	<0.0029
	9.5 ft	<0.0041 / <0.0038	<0.0041	**0.0011 J**	<0.0032
	23.5 ft	<0.0038	<0.0039	**0.001 J**	<0.003
	35.5 ft	**0.00084 J**	<0.004 / <0.0039	<0.004	<0.0032

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-45	10 ft	<0.0043	<0.0042	<0.0039	<0.0035
	20 ft	<0.0044	**0.0011 J**	<0.0039	**0.00054 J**
	30 ft	<0.0047	<0.0038	<0.0039	**0.00058 J** / <0.0032

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-54	5 ft	**0.00036 J**	<0.0039	**0.00072 J**	<0.0031
	10 ft	<0.0043	<0.004	<0.0037 / <0.0038	<0.0031
	20 ft	<0.0042	<0.0041	<0.0038	<0.0032
	30 ft	**0.0015 J**	<0.0038	<0.0038	**0.00093 J** / <0.003

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-6	5 ft	<0.0042	**0.0004 J**	<0.0039	**0.00053 J**
	10 ft	<0.0042	<0.0039	Not Sampled[1]	<0.0034
	31.5 ft	**0.0013 J**	**0.0009 J**	<0.004 / **0.001 J**	<0.0034
	39 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-7	5 ft	<0.0039	<0.0038	<0.004	<0.0035
	13.5 ft	<0.0041	<0.0042	**0.00099 J**	**0.00093 J**
	29.5 ft	<0.0041	<0.0039	<0.0039	**0.00049 J**
	38 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-9	5 ft	<0.0042 / <0.0041	<0.0038	**0.00051 J**	<0.0034
	11.5 ft	<0.0042	<0.004	<0.0042	**0.00067 J**
	25.5 ft	<0.0041	<0.0039 / **0.0004 J**	<0.004	<0.0033
	38.5 ft	Not Sampled[1]	Not Sampled[1]	<0.0042 / **0.002 J**	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-18	8.5 ft	Not Sampled[3]	<0.0036	<0.0041	Not Sampled[3]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-19	5 ft	<0.0038	<0.0042	<0.0039	<0.0031

TYDEMAN AVE
CHAFFER AVE
GHWAY 111 (S. CENTRAL AVE)
FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
VILLAGE OF ROXANA
NORTH PROPERTY
WOOD RIVER REFINERY
BP
PUBLIC WORKS YARD
1ST STREET
RAND AVENUE
1986 APPROXIMATE BENZENE RELEASE SITE
WEST PROPERTY

VMP-64, VMP-61, VMP-57, VMP-63, VMP-58, VMP-62, VMP-47, VMP-59, VMP-60, VMP-1, VMP-33, VMP-20, VMP-2, VMP-48, VMP-46, VMP-42, VMP-34, VMP-3, VMP-49, VMP-21, VMP-35, VMP-56, VMP-32, VMP-43, VMP-26, VMP-27, VMP-50, VMP-22, VMP-4, VMP-28, VMP-36, VMP-44, VMP-37, VMP-51, VMP-5, VMP-23, VMP-45, VMP-6, VMP-38, VMP-52, VMP-24, VMP-7, VMP-39, VMP-9, VMP-54, VMP-8, VMP-53, VMP-65, VMP-18, VMP-19, VMP-41, VMP-10, VMP-11, VMP-17, VMP-12, VMP-29, VMP-30, VMP-13, VMP-55, VMP-14, VMP-25, VMP-15, VMP-16

NOTES:

1. Not Sampled[1] = VMP SCREEN SUBMERGED BELOW WATER TABLE OR A TEMPORARY WATER CONDITION. NO SAMPLE COLLECTED.
2. Not Sampled[2] = NOT SAMPLED DUE TO PORT INTEGRITY
3. Not Sampled[3] = UNABLE TO ACCESS DUE TO VEHICLE PARKED ON WELL VAULT.
4. RESAMPLED[4] = VMP RESAMPLED DUE TO ANOMALOUS RESULTS IN THE INITAL SAMPLE.
5. J = RESULT IS ESTIMATED
   < = NOT DETECTED AT INDICATED REPORTING LIMIT.
   DETECTED RESULTS AND ESTIMATED RESULTS ARE BOLD.
6. MULTIPLE RESULTS (e.g., 440/410) INDICATE DUPLICATE SAMPLES.

LEGEND

- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- BENZENE CONCENTRATION > SCREENING CRITERION (0.37mg/m³), FOR RESIDENTIAL.

0 200
SCALE FEET
N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US SOIL VAPOR MONITORING PROGRAM ROXANA, ILLINOIS		PROJECT NO. 60648474
AECOM		
DRN. BY: gds July 2021 DSGN. BY: djd CHKD. BY: smf	2Q21 Summary of Benzene Soil Vapor Analytical Results – Village of Roxana	FIG. NO. 5

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666–900_S_CENTRAL_AVE–ROXANA–IL\ROXANA 2Q21 SV–SVE RPT\WORKSPACE\FIGURE 6 2Q21 SUMMARY OF BENZENE SOIL VAPOR ANALYTICAL RESULTS.DWG Last edited: Jun. 24, 21 @ 6:13 PM by: popaa

LEGEND

- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- BENZENE CONCENTRATION > SCREENING CRITERION (2.8 mg/m³), FOR INDUSTRIAL/COMMERCIAL.

NOTES:

1. NOT SAMPLED[1] = VMP SCREEN SUBMERGED BELOW WATER TABLE OR A TEMPORARY WATER CONDITION. NO SAMPLE COLLECTED.
2. NOT SAMPLED[2] = NOT SAMPLED DUE TO PORT INTEGRITY.
3. MULTIPLE RESULTS (e.g., 440/410) INDICATE DUPLICATE SAMPLES.
4. J = RESULT IS ESTIMATED
   < = NOT DETECTED AT INDICATED REPORTING LIMIT.
   DETECTED RESULTS AND ESTIMATED RESULTS ARE BOLD.

VMP-34 A–28 VMP-3 VMP-21 VMP-49 VMP-35 VMP-56 VMP-32 VMP-43 VMP-27 VMP-26 A–27 VMP-22 VMP-50 VMP-4 VMP-28 VMP-36 NORTH PROPERTY

FOURTH ST

FIFTH ST

VMP-44 CHAFFER AVE

HIGHWAY 111 (S. CENTRAL AVE)

VMP-37 1ST STREET VMP-51 VMP-5

VMP-45

SIXTH ST

WOOD RIVER REFINERY

VILLAGE OF ROXANA VMP-38 VMP-6 VMP-52

SEVENTH ST VMP-7 VMP-39

VMP-54 VMP-9 VMP-8 VMP-53 VMP-65

VMP-18 VMP-19

EIGHTH ST

VMP-41 VMP-10 VMP-17 VMP-12 VMP-29 VMP-11 VMP-13

VMP-55 PUBLIC WORKS YARD

1986 APPROXIMATE BENZENE RELEASE SITE

RAND AVENUE VMP-25 VMP-30 VMP-14

VMP-15 VMP-16

MAIN PROPERTY

WEST PROPERTY

A–147

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-11	5 ft	Not Sampled[1]	**0.0004 J**	<0.0038	<0.0032
	8 ft	<0.004 / <0.0039	<0.0039	<0.0037	<0.0032
	29 ft	<0.004	<0.0039	<0.0037	<0.0032
	38 ft	<0.0039	<0.0039	Not Sampled[1]	Not Sampled[1]

BP

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-10	5 ft	<0.004	<0.004	<0.0039	<0.0034
	10 ft	<0.0041	**0.0009 J**	<0.0038	<0.0034
	20 ft	<0.004	**0.00041 J**	<0.0039	<0.0036
	30 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-41	10 ft	<0.0043 / <0.0044	<0.0042	<0.0037	<0.0034
	20 ft	<0.0042	<0.0038	**0.00047 J**	<0.003
	26 ft	Not Sampled[1]	<0.0038	<0.0038	<0.0034

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-29	10 ft	<0.0039	**0.00048 J**	**0.00055 J**	**0.01**
	18 ft	**0.007**	**0.00088 J**	**0.00086 J**	**0.0043**
	26 ft	**0.016**	**0.00075 J**	**0.00028 J**	**0.00088 J / 0.0012 J**
	40 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-30	10 ft	<0.0038	**0.00086 J**	**0.00046 J** / <0.0035	**0.002 J**
	18 ft	**0.007 J**	**0.0022 J**	**0.0012 J**	**0.0028 J**
	26 ft	**0.0012 J**	**0.004**	**0.0016 J**	**0.035 / 0.034**
	40 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-17	5 ft	<0.0043	<0.0042	<0.0034	<0.0032

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-25	5 ft	<0.0041 / <0.0041	**0.0026 J / 0.0027 J**	<0.0038 / <0.0039	Not Sampled[1]
	9.5 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]
	21 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]
	31 ft	Not Sampled[2]	Not Sampled[2]	Not Sampled[2]	Not Sampled[2]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-55	5 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]
	10 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]
	20 ft	**0.0015 J**	**0.1 J**	<0.036	<1.6
	30 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-13	5 ft	<0.0042	**0.00033 J**	<0.004	<0.0032
	10.5 ft	<0.0041	**0.00034 J**	<0.0034	**0.00059 J**
	21.5 ft	**0.0012 J**	**0.0005 J / 0.00041 J**	<0.0036	<0.0031
	29.5 ft	<0.0042	Not Sampled[1]	<0.0038	**0.00081 J**

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-15	5 ft	<0.0045	<0.0042	<0.0033	<0.0032
	21.5 ft	<0.043 / <0.042	**0.0016 J**	<0.0043	<0.016
	25.5 ft	Not Sampled[1]	**0.01 J**	**0.00055 J**	<0.061
	29 ft	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-14	5 ft	<0.004	<0.0038	<0.0038	<0.0032
	11.5 ft	<0.004 / <0.0045	<0.004	<0.0039	<0.0031
	20 ft	**0.0014 J**	**0.0011 J**	**0.00086 J**	**0.00058 J / 0.00045 J**
	29 ft	Not Sampled[1]	Not Sampled[1]	<0.004	Not Sampled[1]

0 200 SCALE FEET N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS


PROJECT NO. 60648474

AECOM

DRN. BY: gds July 2021
DSGN. BY: djd
CHKD. BY: smf

2Q21 Summary of Benzene Soil Vapor Analytical Results– Roxana Public Works Yard Area

FIG. NO. 6

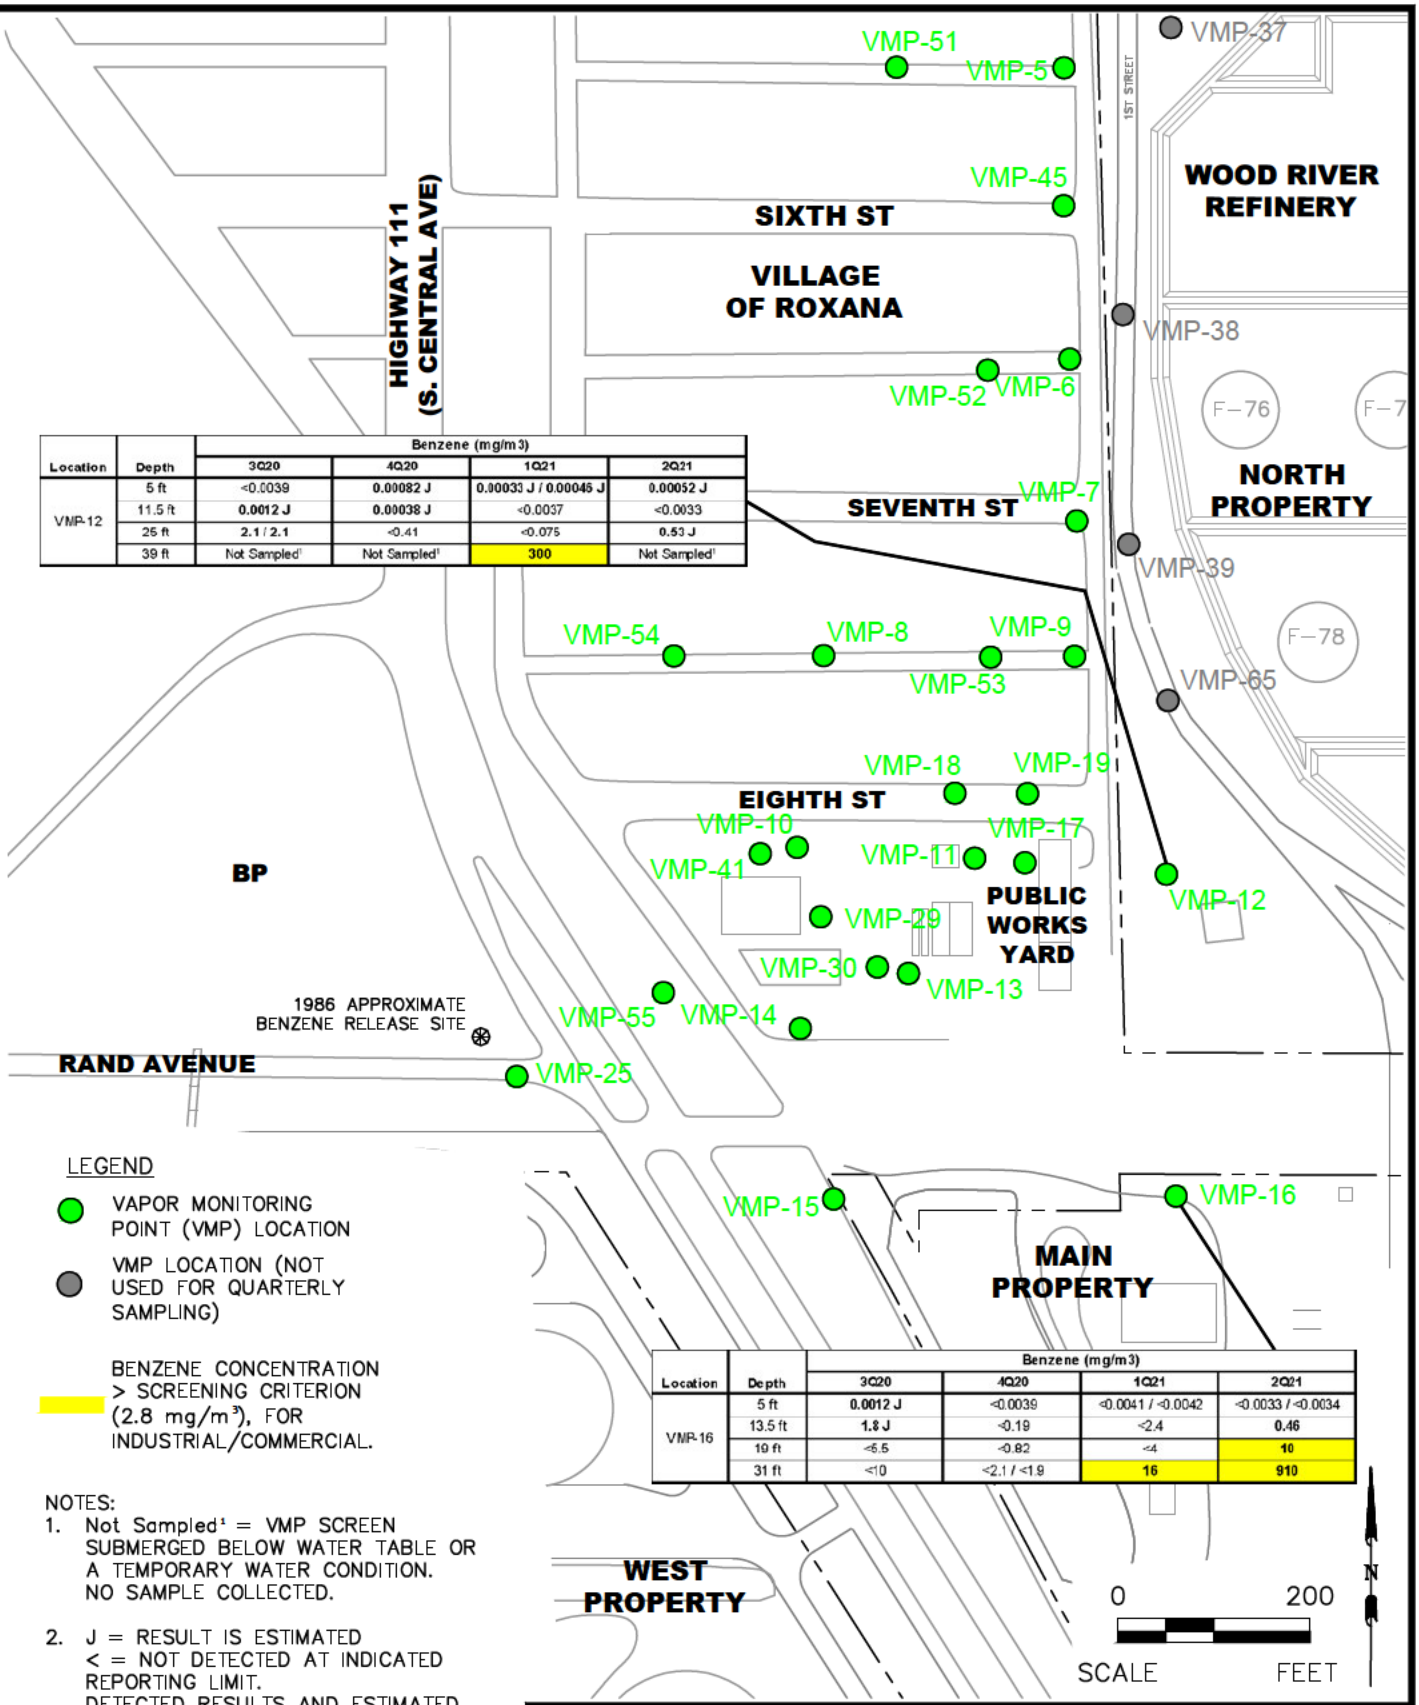

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-12	5 ft	<0.0039	0.00082 J	0.00033 J / 0.00045 J	0.00052 J
	11.5 ft	0.0012 J	0.00038 J	<0.0037	<0.0033
	25 ft	2.1 / 2.1	<0.41	<0.075	0.53 J
	39 ft	Not Sampled[1]	Not Sampled[1]	300	Not Sampled[1]

Location	Depth	Benzene (mg/m3) 3Q20	4Q20	1Q21	2Q21
VMP-16	5 ft	0.0012 J	<0.0039	<0.0041 / <0.0042	<0.0033 / <0.0034
	13.5 ft	1.8 J	<0.19	<2.4	0.46
	19 ft	<5.5	<0.82	<4	10
	31 ft	<10	<2.1 / <1.9	16	910

LEGEND

- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- BENZENE CONCENTRATION > SCREENING CRITERION (2.8 mg/m³), FOR INDUSTRIAL/COMMERCIAL.

NOTES:

1. Not Sampled[1] = VMP SCREEN SUBMERGED BELOW WATER TABLE OR A TEMPORARY WATER CONDITION. NO SAMPLE COLLECTED.
2. J = RESULT IS ESTIMATED
   < = NOT DETECTED AT INDICATED REPORTING LIMIT.
   DETECTED RESULTS AND ESTIMATED RESULTS ARE BOLD.
3. MULTIPLE RESULTS (e.g., 440/410) INDICATE DUPLICATE SAMPLES.

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474


AECOM


DRN. BY: gds July 2021
DSGN. BY: djd
CHKD. BY: smf

2Q21 Summary of Benzene Soil Vapor Analytical Results – WRR

FIG. NO. 7

File: C:\USERS\ROPAX\AECOM DIRECTORY\GDS GIS SERVICES - GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S_CENTRAL_AVE-ROXANA-IL\ROXANA 2021 SV-SVE RPT\WORKSPACE\FIGURE 7 2021 SUMMARY OF BENZENE SOIL VAPOR ANALYTICAL RESULTS.DWG Last edited: Jun. 29, 21 @ 9:35 AM by: ropax

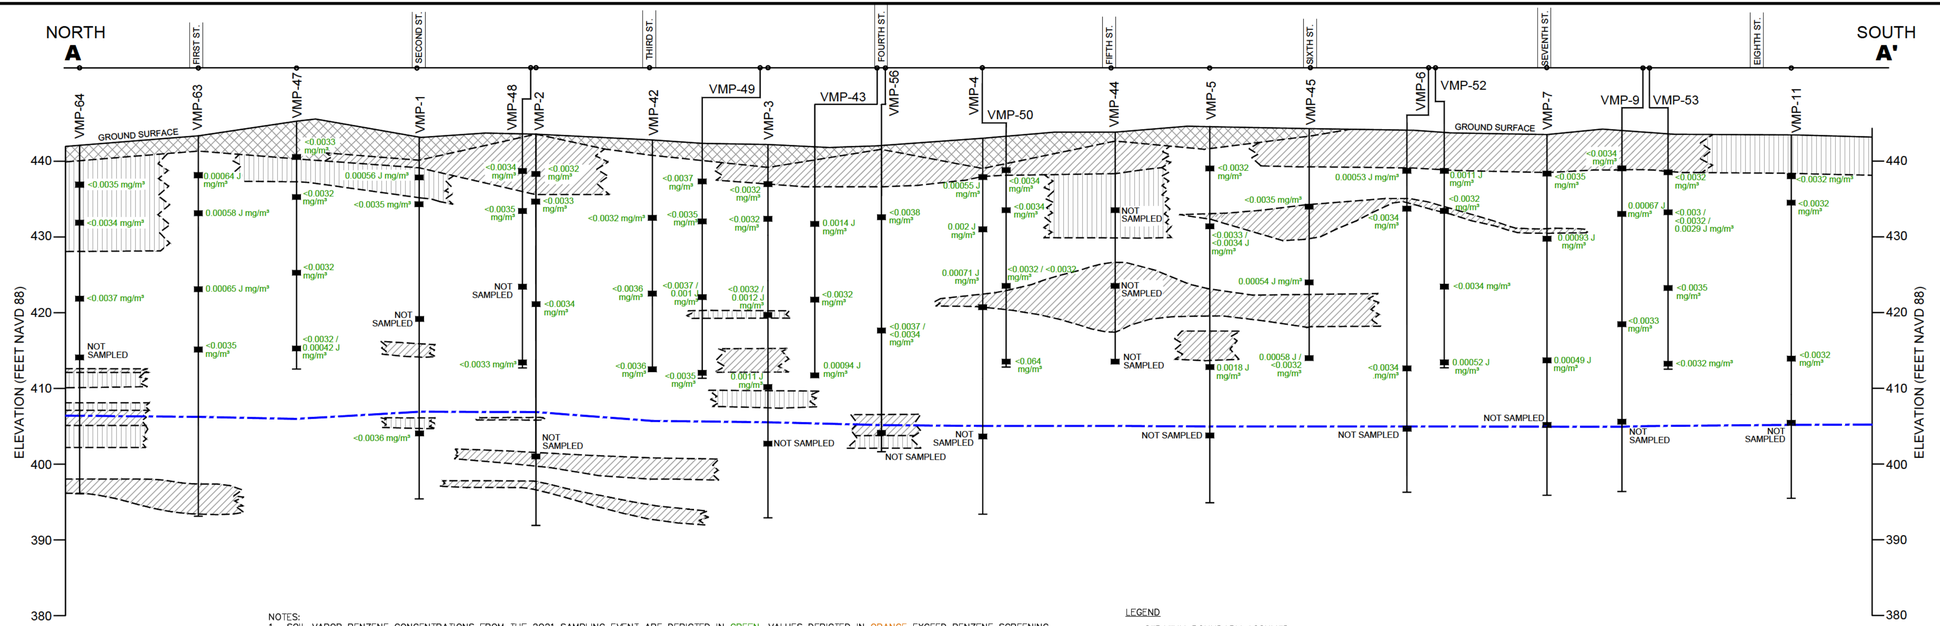

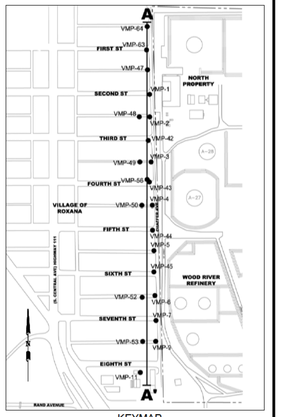

KEYMAP
NOT TO SCALE

NOTES:
1. SOIL VAPOR BENZENE CONCENTRATIONS FROM THE 2021 SAMPLING EVENT ARE DEPICTED IN GREEN. VALUES DEPICTED IN ORANGE EXCEED BENZENE SCREENING CRITERION (0.37 mg/m³ FOR VMP 1–9, 32, AND 42–45, 47–50, 52, 53, 56, 63, AND 64 [RESIDENTIAL] AND 2.8 mg/m³ FOR VMP–11 [COMMERCIAL/INDUSTRIAL]).
2. GROUNDWATER ELEVATIONS SHOWN ON THIS CROSS–SECTION ARE BASED ON GROUNDWATER GAUGING DATA COLLECTED APRIL 5–7, 2021.
3. THIS GEOLOGIC CROSS–SECTION IS PRIMARILY BASED ON THE INTERPRETATION OF CPT DATA AND BORING LOGS DEVELOPED DURING OTHER DRILLING TECHNIQUES (E.G. AUGER AND GEOPROBE) COLLECTED BY AECOM SINCE 2006. LITHOLOGY WAS PROJECTED BETWEEN SUBSURFACE INVESTIGATION POINTS.
4. CROSS–SECTION TRACE LINE SHOWS DISTANCE AND DIRECTION EACH POINT WAS PROJECTED TO CONSTRUCT THIS CROSS–SECTION.
5. VMPs OFFSET FROM CROSS–SECTIONAL LINE (VMP–43, VMP–48, VMP–49, VMP–50, VMP–52, AND VMP–53) ARE INCLUDED TO DISPLAY BENZENE CONCENTRATION DATA ONLY.

LEGEND
- STRATUM BOUNDARY ASSUMED
- FILL PROJECTED BETWEEN POINTS (INCLUDES CINDERS, GRAVEL, CLAY, AND/OR SILTY CLAY)
- CLAY PROJECTED BETWEEN POINTS (INCLUDES SILTY CLAY AND SANDY CLAY)
- SILT PROJECTED BETWEEN POINTS (INCLUDES SANDY SILT AND CLAYEY SILT)
- SAND PROJECTED BETWEEN POINTS (INCLUDES SILTY SAND AND CLAYEY SAND)
- POTENTIOMETRIC SURFACE – ESTIMATED

0 10
VERTICAL SCALE FEET
0 100
APPROXIMATE HORIZONTAL SCALE FEET

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY: gds July 2021
DSGN. BY: cjc
CHKD. BY: smf

2021 Cross–Section with Benzene Soil Vapor Analytical Results – Chaffer Avenue

FIG. NO. 8

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES - GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S CENTRAL AVE-ROXANA-IL\ROXANA 2021 SV-SVE RPT\WORKSPACE\FIGURE 9 2021 BENZENE SOIL VAPOR DISTRIBUTION-5FT BGS.DWG Last edited: Mar. 24, 21 @ 4:40 PM by: popaa

LEGEND

- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- EXTENT OF MVS MODEL DATA SET
- MODELED SOIL VAPOR CONCENTRATION BENZENE (mg/m^3)

NOTES:

1. IMAGES GENERATED UTILIZING CTECH MINING VISUALIZATION SYSTEM MODELING SOFTWARE. CONCENTRATIONS BETWEEN KNOWN DATA POINTS (E.G. VMP WELLS) ARE INTERPOLATIONS AND EXTRAPOLATIONS OF THE MEASURED DATA.
2. THE LOWEST CONCENTRATION CONTOUR REPRESENTS THE SCREENING CRITERION FOR RESIDENTIAL PROPERTIES (0.37 mg/m^3).
3. DATA SHOWN REPRESENT A HORIZONTAL SLICE OF A 3D MODEL.
4. NON-DETECT VALUES ARE MODELED AT 1/2 THE REPORTING LIMIT.
5. NO CONTOURS DEPICTED BECAUSE MODELED RESULTS WERE BELOW THE SCREENING CRITERION FOR RESIDENTIAL PROPERTIES.

VMP-64 VMP-61 VMP-63 VMP-57 VMP-47 VMP-58 VMP-62 VMP-59 VMP-1 VMP-60 VMP-33 VMP-2 VMP-20 VMP-48 VMP-46 VMP-42 VMP-34 VMP-3 VMP-21 VMP-49 VMP-35 VMP-32 VMP-56 VMP-43 VMP-26 VMP-27 VMP-22 VMP-50 VMP-4 VMP-28 VMP-36 VMP-44 VMP-37 VMP-23 VMP-51 VMP-5 VMP-45 VMP-38 VMP-6 VMP-52 VMP-39 VMP-24 VMP-7 VMP-9 VMP-8 VMP-54 VMP-53 VMP-65 VMP-18 VMP-19 VMP-10 VMP-11 VMP-41 VMP-17 VMP-12 VMP-29 VMP-30 VMP-55 VMP-13 VMP-14 VMP-25 VMP-15 VMP-16

FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
HIGHWAY 111 (S. CENTRAL AVE)
CHAFFER AVE
1ST STREET
RAND AVENUE
1986 APPROXIMATE BENZENE RELEASE SITE
BP
NORTH PROPERTY
WOOD RIVER REFINERY
VILLAGE OF ROXANA
PUBLIC WORKS YARD
WEST PROPERTY
MAIN PROPERTY
A-32
A-28
A-27
A-22
F-76
F-77
F-78
F-73
F-74

0 200
SCALE FEET
N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY: gds July 2021
DSGN. BY: djd/jd
CHKD. BY: smf

2Q21 Benzene Soil Vapor Distribution – 5 ft bgs

FIG. NO. 9


File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S_CENTRAL_AVE-ROXANA-IL\ROXANA 2021 SV-SVE RPT\WORKSPACE\FIGURE 10 2021 BENZENE SOIL VAPOR DISTRIBUTIO 10FT BGS.DWG Last edited: Jun. 24, 21 @ 7:14 PM by: popaa

LEGEND

- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- EXTENT OF MVS MODEL DATA SET
- MODELED SOIL VAPOR CONCENTRATION BENZENE (mg/m³)

NOTES:

1. IMAGES GENERATED UTILIZING CTECH MINING VISUALIZATION SYSTEM MODELING SOFTWARE. CONCENTRATIONS BETWEEN KNOWN DATA POINTS (E.G. VMP WELLS) ARE INTERPOLATIONS AND EXTRAPOLATIONS OF THE MEASURED DATA.
2. THE LOWEST CONCENTRATION CONTOUR REPRESENTS THE SCREENING CRITERION FOR RESIDENTIAL PROPERTIES (0.37 mg/m³).
3. DATA SHOWN REPRESENT A HORIZONTAL SLICE OF A 3D MODEL.
4. NON-DETECT VALUES ARE MODELED AT 1/2 THE REPORTING LIMIT.
5. NO CONTOURS DEPICTED BECAUSE MODELED RESULTS WERE BELOW THE SCREENING CRITERION FOR RESIDENTIAL PROPERTIES.

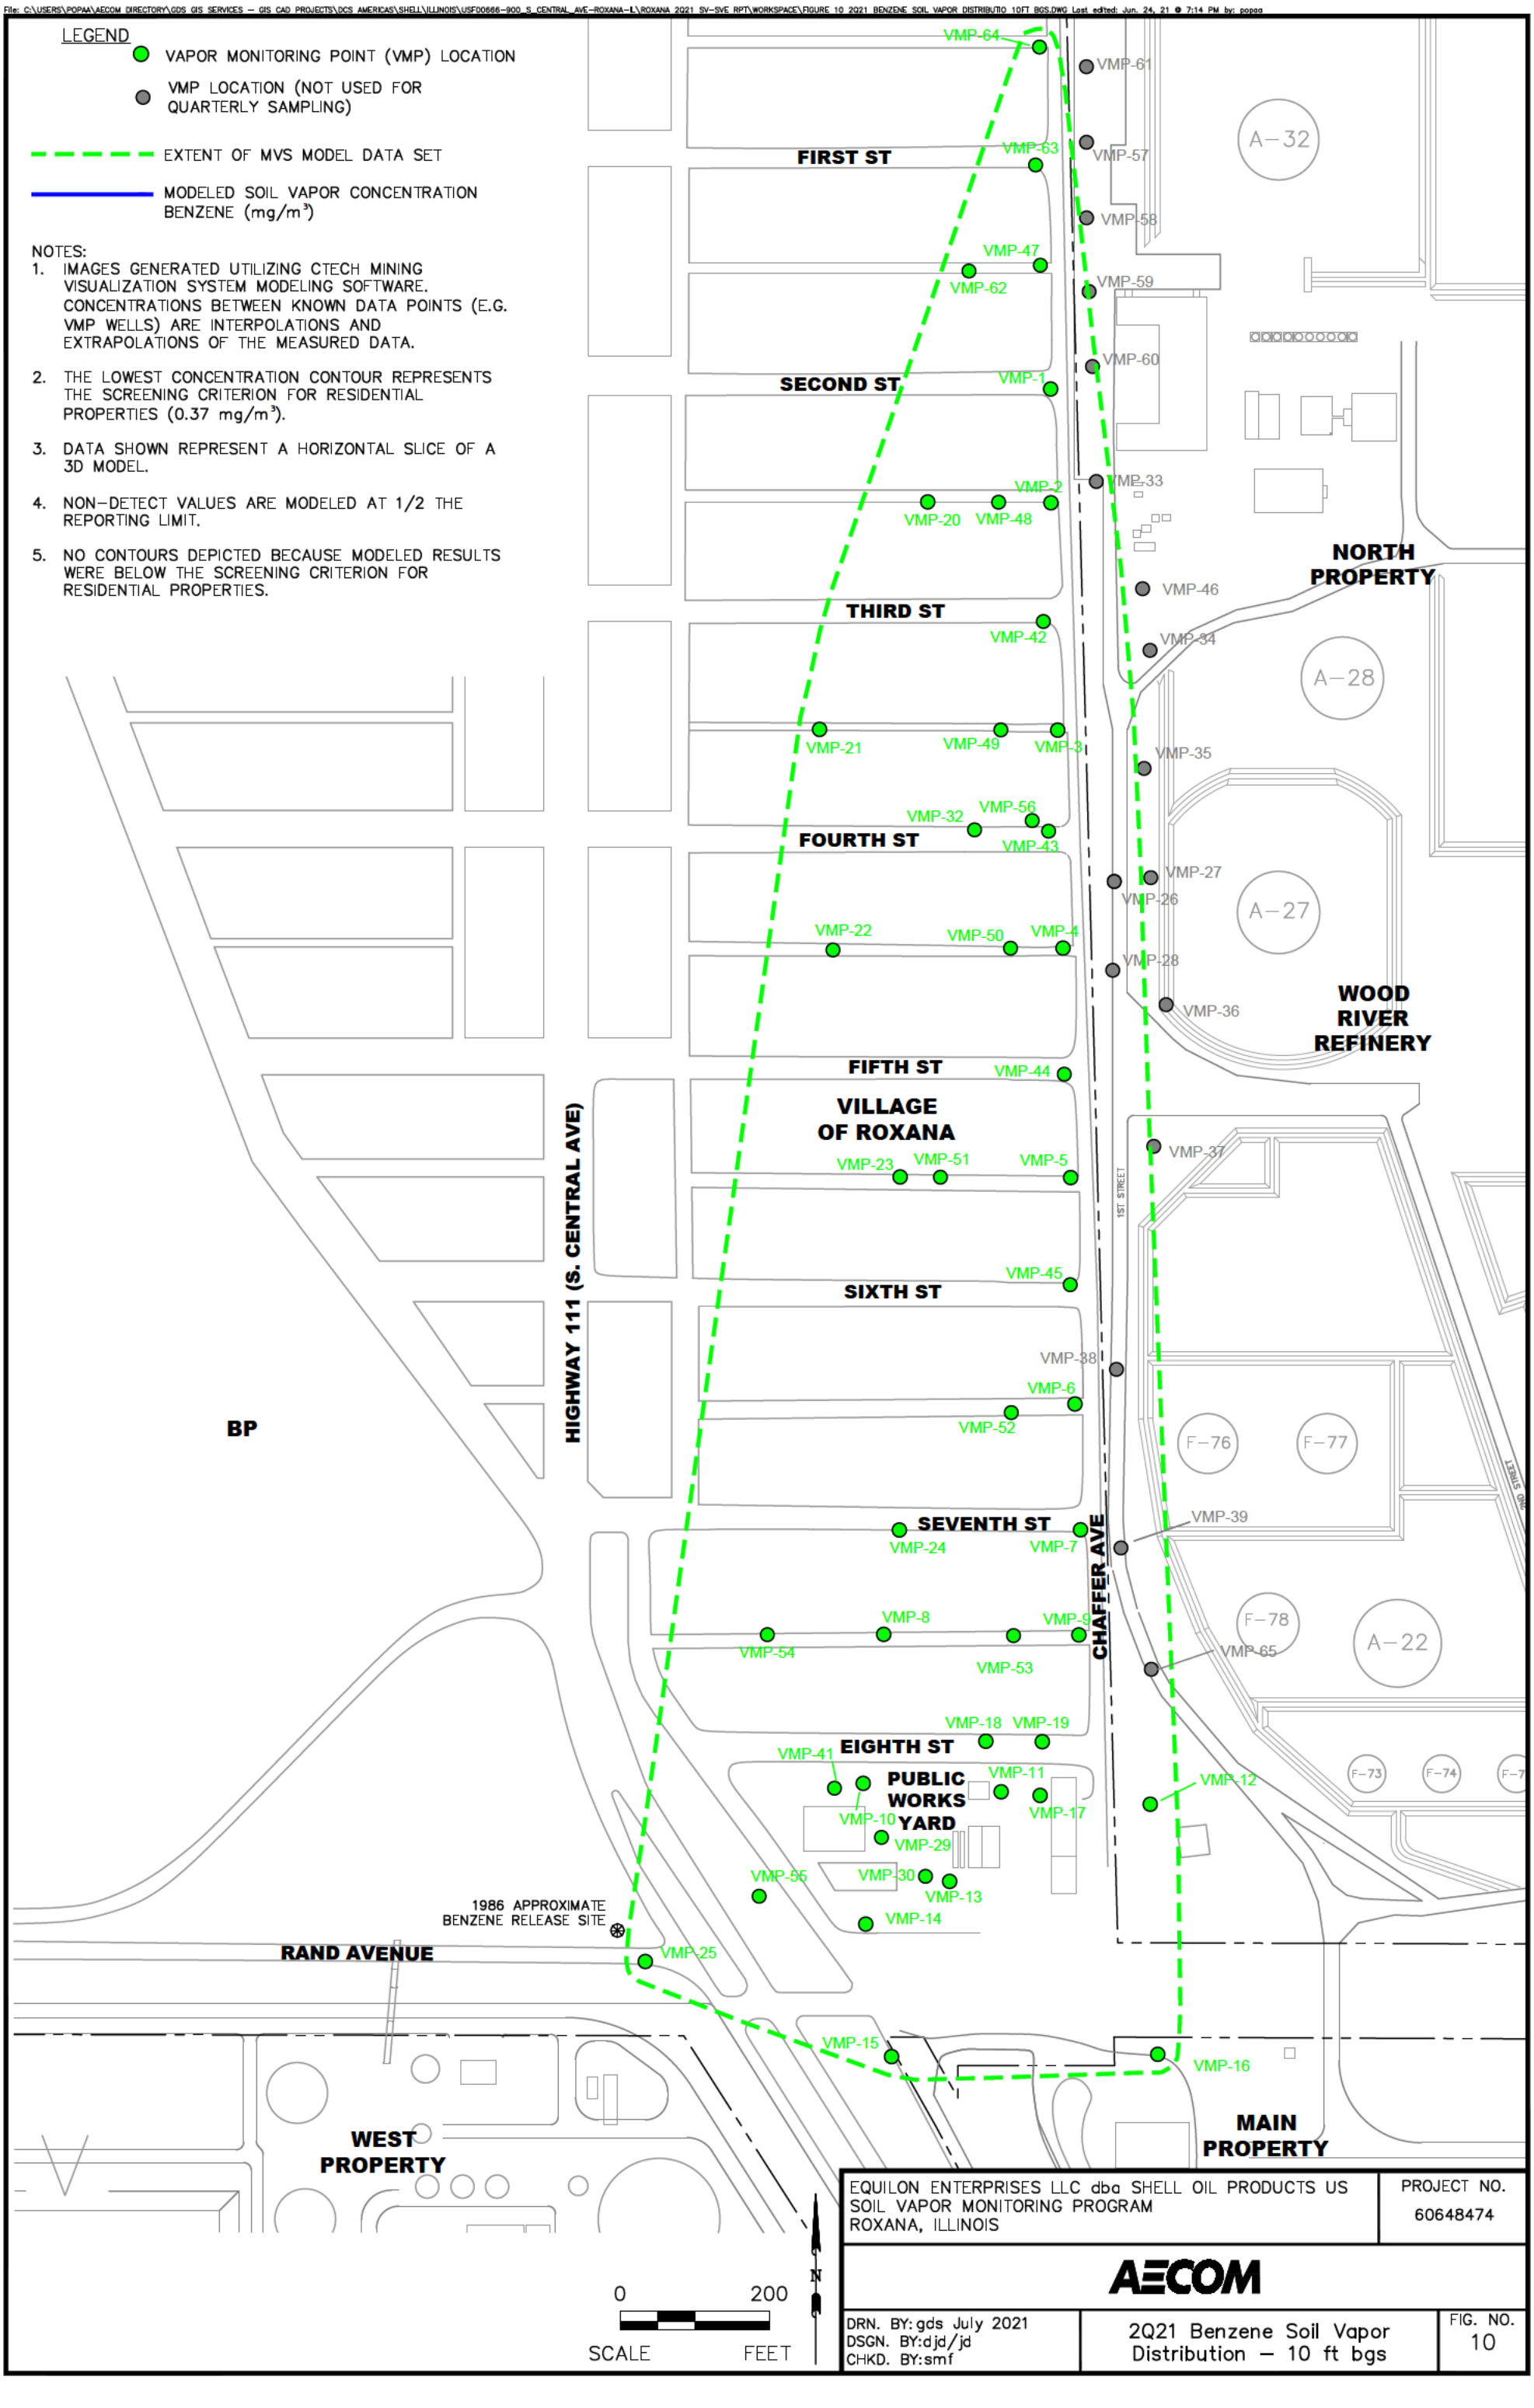

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US SOIL VAPOR MONITORING PROGRAM ROXANA, ILLINOIS	PROJECT NO. 60648474
AECOM	
DRN. BY: gds July 2021 DSGN. BY: djd/jd CHKD. BY: smf	2Q21 Benzene Soil Vapor Distribution – 10 ft bgs FIG. NO. 10

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES - GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILUNOIS\USFD0666-900_S CENTRAL AVE-ROXANA-IL\ROXANA 2021 SV-SVE RPT\WORKSPACE\FIGURE 11 SUMMARY OF SOIL VAPOR BENZENE 25FT BGS-ROBUH1LT52301.DWG Last edited: Jun. 29, 21 @ 9:38 AM by: popaa

LEGEND

- VAPOR MONITORING POINT (VMP) LOCATION
- VMP LOCATION (NOT USED FOR QUARTERLY SAMPLING)
- EXTENT OF MVS MODEL DATA SET
- MODELED SOIL VAPOR CONCENTRATION BENZENE (mg/m^3)

NOTES:

1. IMAGES GENERATED UTILIZING CTECH MINING VISUALIZATION SYSTEM MODELING SOFTWARE. CONCENTRATIONS BETWEEN KNOWN DATA POINTS (E.G. VMP WELLS) ARE INTERPOLATIONS AND EXTRAPOLATIONS OF THE MEASURED DATA.
2. THE LOWEST CONCENTRATION CONTOUR REPRESENTS THE SCREENING CRITERION FOR RESIDENTIAL PROPERTIES (0.37 mg/m^3).
3. DATA SHOWN REPRESENT A HORIZONTAL SLICE OF A 3D MODEL.
4. NON-DETECT VALUES ARE MODELED AT 1/2 THE REPORTING LIMIT.

FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
HIGHWAY 111 (S. CENTRAL AVE)
CHAFFER AVE
1ST STREET
2ND STREET
VILLAGE OF ROXANA
PUBLIC WORKS YARD
RAND AVENUE
1986 APPROXIMATE BENZENE RELEASE SITE
BP
NORTH PROPERTY
WOOD RIVER REFINERY
MAIN PROPERTY
WEST PROPERTY

VMP-64 VMP-61 VMP-63 VMP-57 VMP-58 VMP-47 VMP-62 VMP-59 VMP-60 VMP-1 VMP-20 VMP-2 VMP-48 VMP-33 VMP-46 VMP-42 VMP-34 VMP-3 VMP-21 VMP-49 VMP-35 VMP-32 VMP-56 VMP-43 VMP-27 VMP-26 VMP-22 VMP-50 VMP-4 VMP-28 VMP-36 VMP-44 VMP-37 VMP-23 VMP-51 VMP-5 VMP-45 VMP-38 VMP-6 VMP-52 VMP-24 VMP-7 VMP-39 VMP-54 VMP-8 VMP-9 VMP-53 VMP-65 VMP-18 VMP-19 VMP-41 VMP-10 VMP-11 VMP-17 VMP-29 VMP-55 VMP-30 VMP-13 VMP-14 VMP-25 VMP-12 VMP-15 VMP-16

0.37
1
10

A-32 A-28 A-27 A-22 F-76 F-77 F-78 F-73 F-74 F-75

0 200
SCALE FEET
N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US SOIL VAPOR MONITORING PROGRAM ROXANA, ILLINOIS		PROJECT NO. 60648474
AECOM		
DRN. BY: gds July 2021 DSGN. BY: djd/jd CHKD. BY: smf	2Q21 Benzene Soil Vapor Distribution – 25 ft bgs	FIG. NO. 11


File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S_CENTRAL_AVE-ROXANA-IL\ROXANA 2Q21 SV-SVE RPT\WORKSPACE\FIGURE 12 DISSOLVED PHASE BENZENE CONCENTRATIONS IN GROUNDWATER.DWG Last edited: Jun. 24, 21 @ 7:33 PM by: popaa

LEGEND

- GROUNDWATER MONITORING WELL SAMPLING LOCATION
- GROUNDWATER MONITORING WELL LOCATION NOT SAMPLED
- GROUNDWATER MONITORING WELL, LNAPL THICKNESS IN FEET
- GROUNDWATER PIEZOMETER LOCATION NOT SAMPLED
- GROUNDWATER PIEZOMETER, LNAPL THICKNESS IN FEET
- LNAPL THICKNESS (FEET)
- * INDICATES THAT THE LNAPL AND/OR WATER LEVEL IS ABOVE THE TOP OF WELL SCREEN
- EXTENT OF MVS MODEL DATA SET
- 50.0 GROUNDWATER CONCENTRATION BENZENE (mg/L)

NOTES:

1. IMAGES GENERATED UTILIZING CTECH MINING VISUALIZATION SYSTEM MODELING SOFTWARE. CONCENTRATIONS BETWEEN KNOWN DATA POINTS (E.G. GROUNDWATER MONITORING WELLS) ARE INTERPOLATIONS AND EXTRAPOLATIONS OF THE MEASURED DATA. SOME INTERPRETATION WAS COMPLETED UTILIZING PROFESSIONAL JUDGEMENT AND CONTOUR LINES WERE MODIFIED BY HAND.
2. ALL RESULTS SHOWN IN mg/L.
3. ANALYTICAL REPORTING LIMITS ARE SHOWN FOR SAMPLES WITH NON-DETECT RESULTS (e.g., <0.001 mg/L).
4. NON-DETECT VALUES ARE MODELED AT HALF THE REPORTING LIMIT.
5. MULTIPLE RESULTS (e.g. 640 / 530) INDICATE DUPLICATE SAMPLES OR CONFIRMATION SAMPLES.
6. CONTOUR LINES IN AREA OF P-55R ADJUSTED BASED ON AVAILABLE 2Q21 AND HISTORICAL ANALYTICAL DATA FROM WELLS IN THE AREA.
7. J = THE RESULT IS ESTIMATED.
8. AT WELL CLUSTER LOCATIONS, THE HIGHEST VALUE WAS USED FOR CONTOURING PURPOSES.

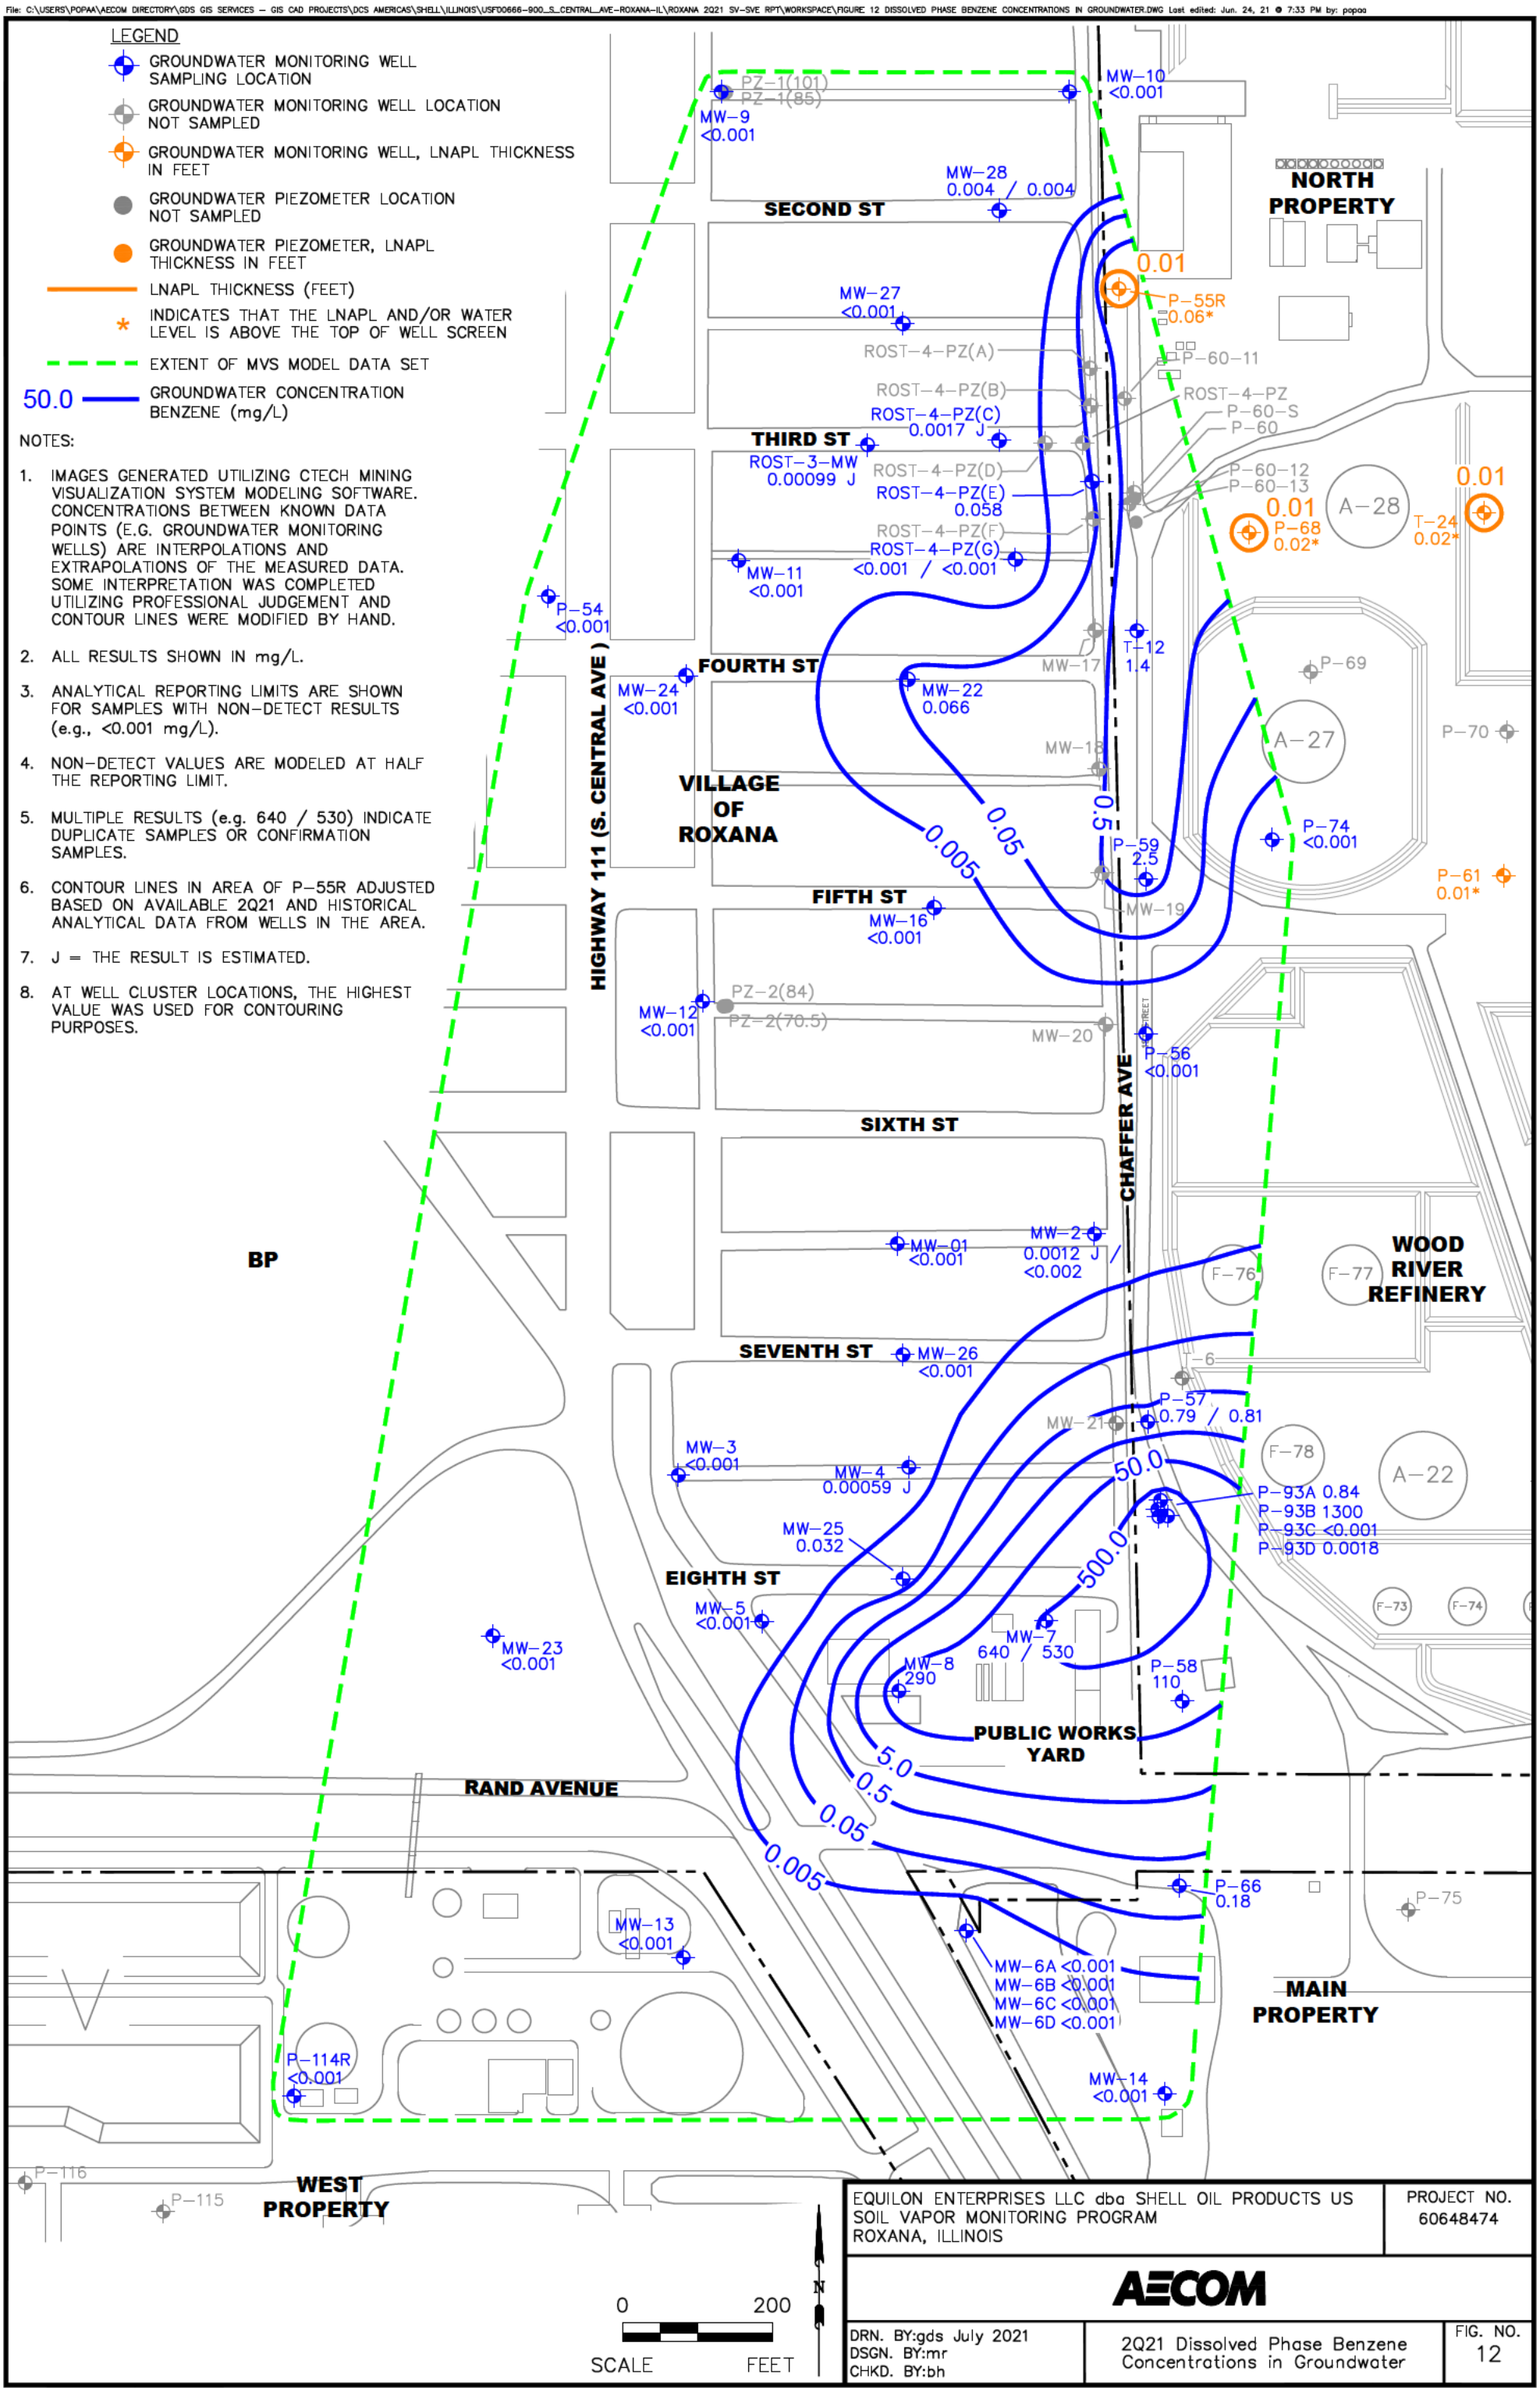

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY:gds July 2021
DSGN. BY:mr
CHKD. BY:bh

2Q21 Dissolved Phase Benzene Concentrations in Groundwater

FIG. NO. 12

File: C:\USERS\POPAA\AECOM DIRECTORY\GDS GIS SERVICES – GIS CAD PROJECTS\DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_5_CENTRAL_AVE-ROXANA-IL\ROXANA 2021 SV-SVE RPT\WORKSPACE\FIGURE 13 THICKNESS OF LNAPL(2021).DWG Last edRed: Jun. 24, 21 @ 7:38 PM by: popaa

LEGEND

- GROUNDWATER MONITORING WELL LOCATION GAUGED, LNAPL THICKNESS IN FEET
- GROUNDWATER MONITORING WELL LOCATION (NO LNAPL OBSERVED UNLESS OTHERWISE NOTED)
- GROUNDWATER PIEZOMETER LOCATION (NO LNAPL OBSERVED UNLESS OTHERWISE NOTED)
- OIL RECOVERY WELL
- WATER PRODUCTION WELL
- LNAPL THICKNESS (FEET)
- * INDICATES THAT THE LNAPL AND/OR WATER LEVEL IS ABOVE THE TOP OF WELL SCREEN

NOTE:
1. THIS MAP DEPICTS THE ESTIMATED EXTENT AND THICKNESS OF LNAPL BENEATH THE WEST FENCELINE AREA. REFER TO TABLE 1 FOR GROUNDWATER GAUGING INFORMATION.
2. LNAPL THICKNESS WAS MEASURED DURING THE COMPREHENSIVE GROUNDWATER MONITORING GAUGING EVENT ON APRIL 5–7, 2021.

P–84A
P–84B
P–84C
P–84D

TYDEMAN AVE
FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
HIGHWAY 111 (S. CENTRAL AVE)
CHAFFER AVE
RAND AVENUE
1986 APPROXIMATE BENZENE RELEASE SITE
VILLAGE OF ROXANA
PUBLIC WORKS YARD
NORTH PROPERTY
MAIN PROPERTY
WEST PROPERTY
WOOD RIVER REFINERY
BP


MW–9, MW–10, MW–28, MW–27, MW–11, MW–17, MW–24, MW–22, MW–18, MW–19, MW–16, MW–12, MW–20, MW–2, MW–1, MW–26, MW–21, MW–3, MW–4, MW–25, MW–23, MW–5, MW–8, MW–7, MW–13, MW–6, MW–14
ROST–4–PZ(A), ROST–4–PZ(B), ROST–4–PZ(D), ROST–4–PZ(C), ROST–3–MW, ROST–4–PZ, ROST–4–PZ(E), ROST–4–PZ(F), ROST–4–PZ(G)
T–13, T–1, T–2, T–12, T–24, T–6, T–7
P–54, P–60, P–68, P–69, P–70, P–74, P–59, P–56, P–57, P–73, P–93A, P–93B, P–93C, P–93D, P–72, P–58, P–66, P–75, P–71, P–62, P–61, P–67, P–117, P–114R, P–116, P–115, P–119
P–55R 0.06*
0.01
0.01
0.02*
0.01*
0.01*
0.01
W–85
R–77 W–77
R–78 W–78
R–79 W–79
R–80 W–80
R–81 W–81
R–89 W–89
S–1 0.01
A–28
A–33
A–27

0 300
SCALE FEET
N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US SOIL VAPOR MONITORING PROGRAM ROXANA, ILLINOIS	PROJECT NO. 60648474
AECOM	
DRN. BY:gds July 2021 DSGN. BY:mr CHKD. BY:bh	2Q21 Thickness of LNAPL – West Fenceline
	FIG. NO. 13

File: C:\USERS\MADALINA.TAMAS\AECOM DIRECTORY\GDS GIS SERVICES – DCS AMERICAS\SHELL\ILLINOIS\USF00666–900_S_CENTRAL_AVE–ROXANA–IL\ROXANA 4Q20 SV–SVE RPT\WORKSPACE\03.04.2021\FIGURE 14 SVE SYSTEM LAYOUT.DWG Last edited: Mar. 4, 21 @ 5:13

W By: madalina.tamas

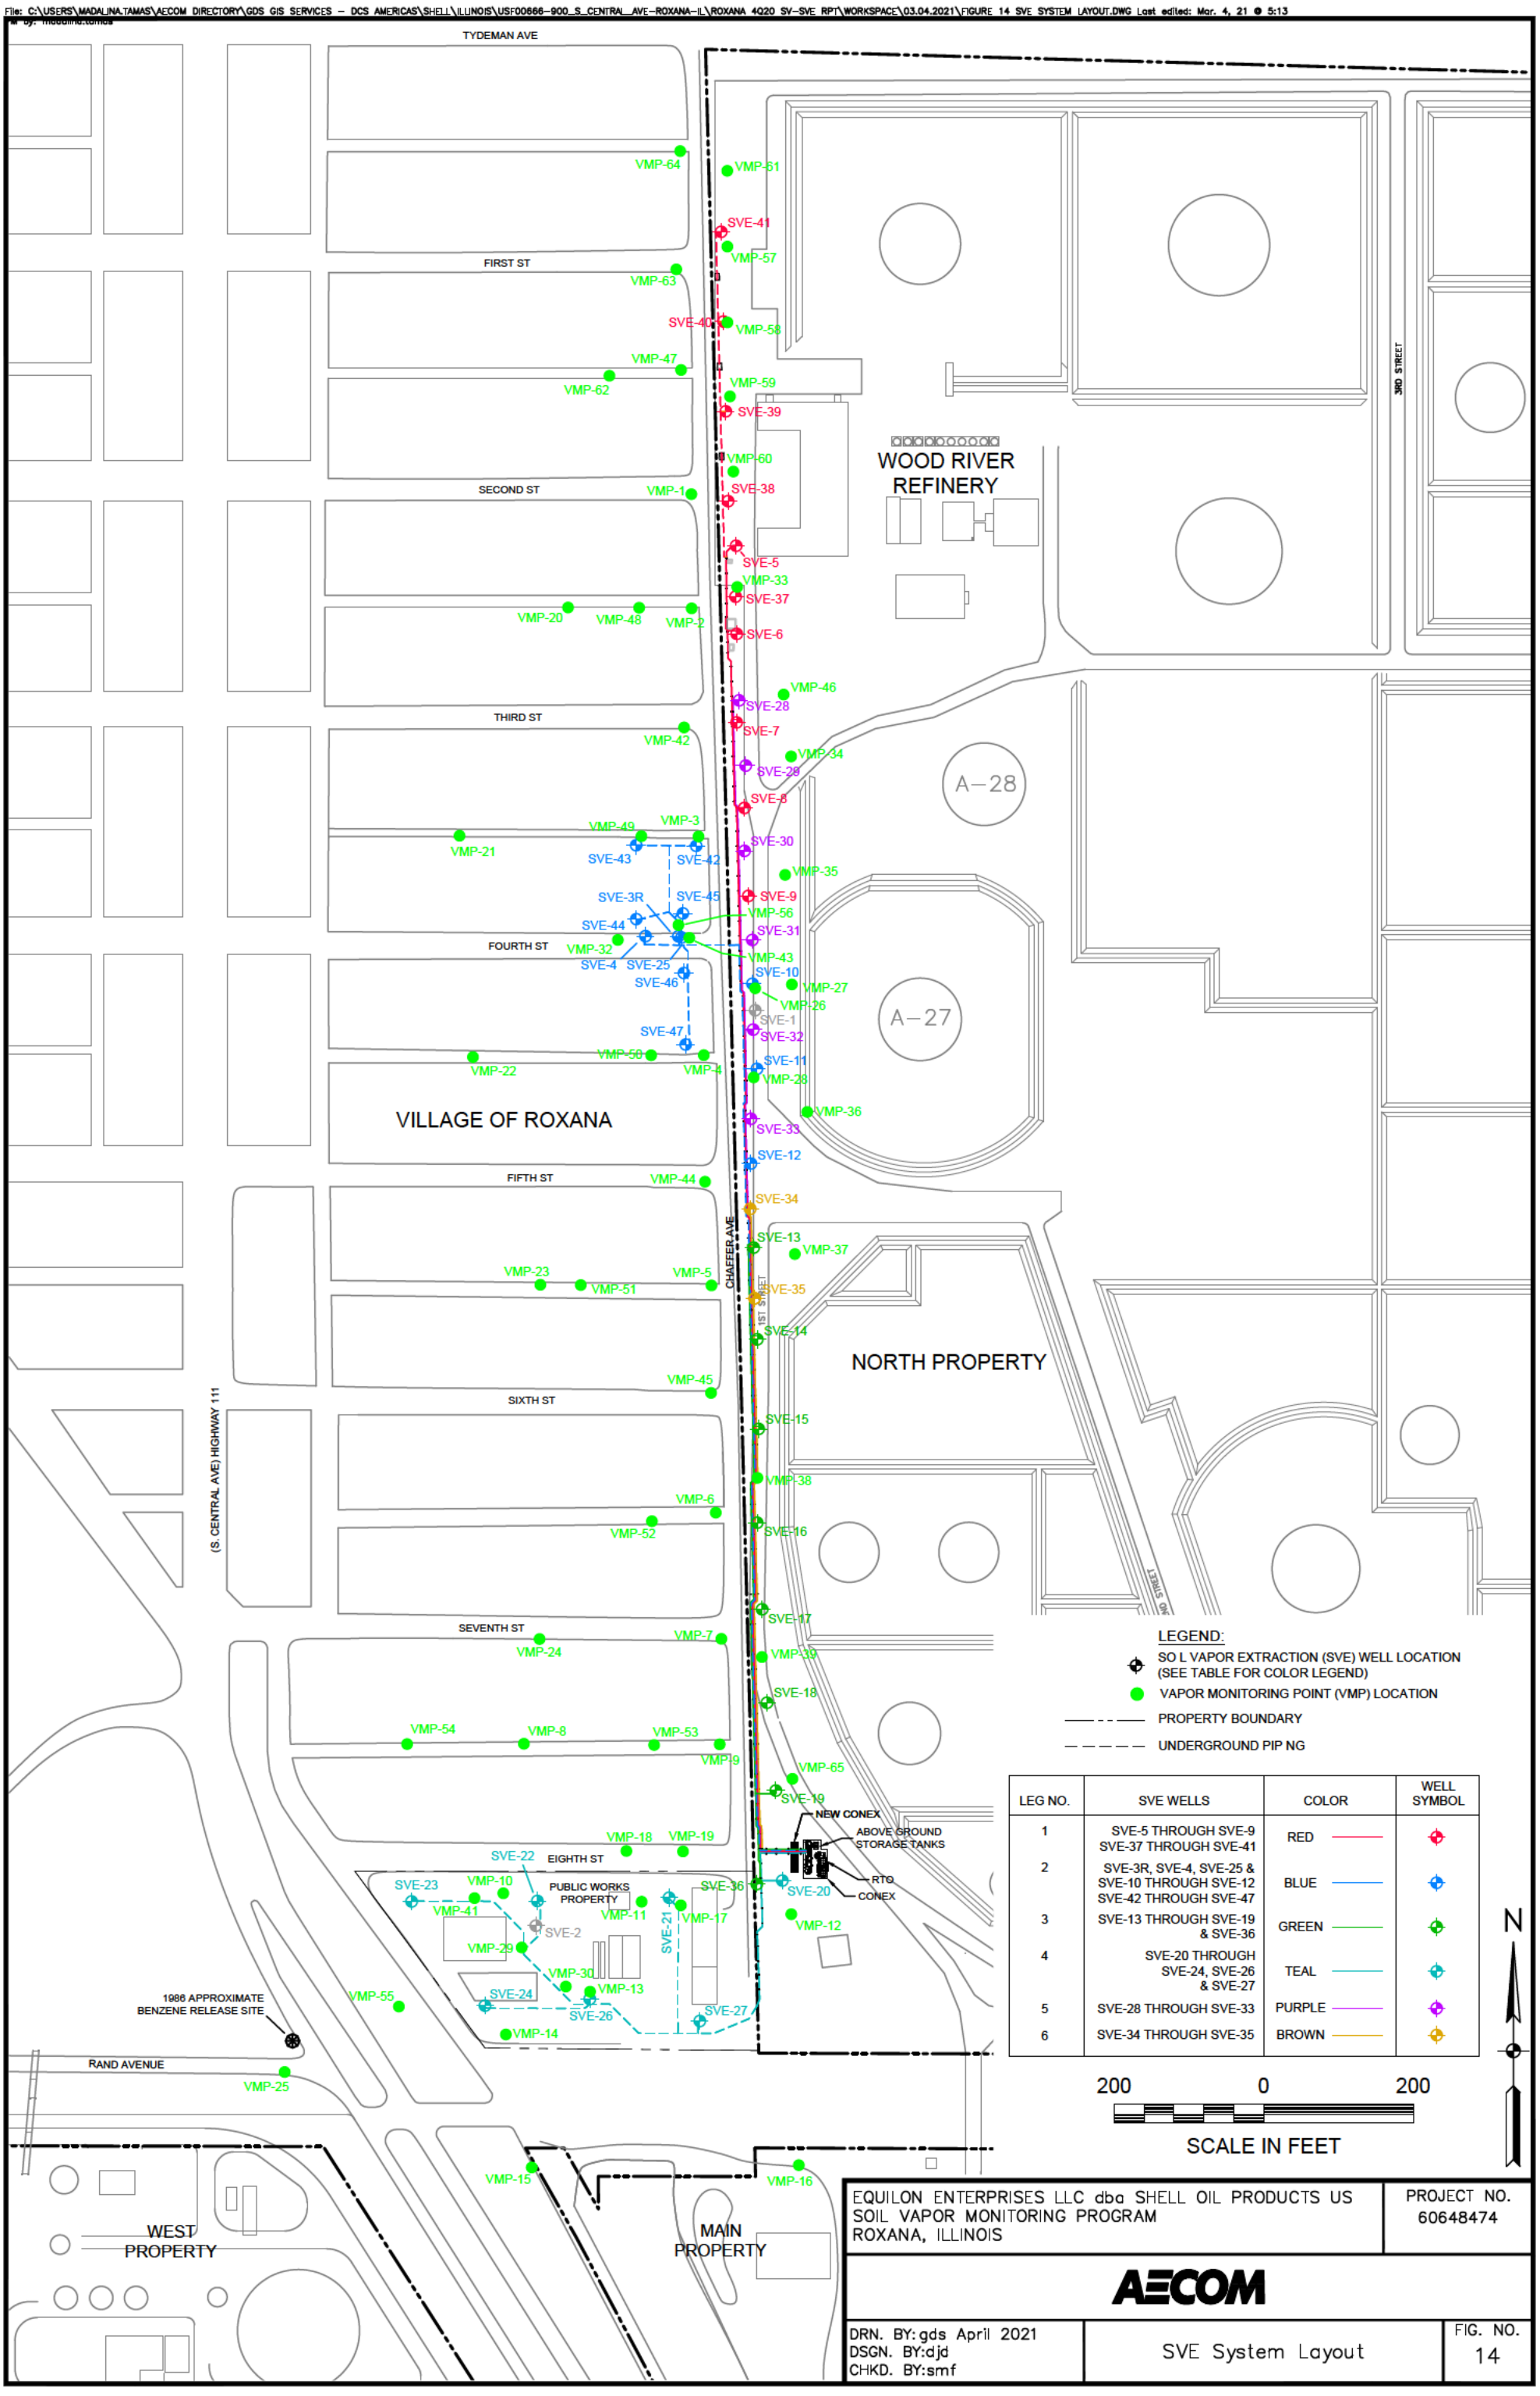

LEGEND:

- SO L VAPOR EXTRACTION (SVE) WELL LOCATION (SEE TABLE FOR COLOR LEGEND)
- VAPOR MONITORING POINT (VMP) LOCATION
- PROPERTY BOUNDARY
- UNDERGROUND PIP NG

LEG NO.	SVE WELLS	COLOR	WELL SYMBOL
1	SVE-5 THROUGH SVE-9 SVE-37 THROUGH SVE-41	RED	
2	SVE-3R, SVE-4, SVE-25 & SVE-10 THROUGH SVE-12 SVE-42 THROUGH SVE-47	BLUE	
3	SVE-13 THROUGH SVE-19 & SVE-36	GREEN	
4	SVE-20 THROUGH SVE-24, SVE-26 & SVE-27	TEAL	
5	SVE-28 THROUGH SVE-33	PURPLE	
6	SVE-34 THROUGH SVE-35	BROWN	

200 0 200

SCALE IN FEET

N

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
SOIL VAPOR MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474

AECOM

DRN. BY: gds April 2021
DSGN. BY: djd
CHKD. BY: smf

SVE System Layout

FIG. NO. 14

Appendix A
Site Background and Regulatory History

APPENDIX A
SITE BACKGROUND AND REGULATORY HISTORY

Soil Vapor Sampling

SOPUS has been investigating and delineating soil vapor in the Investigation Area through the installation, development, and sampling of vapor monitoring ports (VMPs). Vapor monitoring locations (VMP-1 through VMP-16) were installed based on a work plan submitted to the Illinois Environmental Protection Agency (IEPA) on behalf of SOPUS on January 21, 2009. IEPA approved the work plan with conditions on May 12, 2009 (IEPA, 2009). The results of the vapor investigation and delineation efforts were presented in the Dissolved Phase Groundwater Investigation and P-60 Free Phase Product Delineation Report, dated February 18, 2010 (URS, 2010a). Based on recommendations contained in that report, an additional four vapor monitoring ports were installed, developed, and sampled at one existing (VMP-3) and three new vapor monitoring locations (VMP-17 through VMP-19) in the Spring/Summer 2010, with results presented in the Addendum to February 2010 Report – Supplemental Investigation Activities, dated September 20, 2010 (URS, 2010b).

IEPA provided comments to the February 18, 2010 report in a letter to SOPUS dated August 5, 2010 (IEPA, 2010). In particular, Comment Number 3 required quarterly soil vapor sampling and reporting, and Comment Number 2 described the need to further delineate the extent of soil vapors beneath the area. Six VMPs (VMP-20 through VMP-25) were installed and added to the quarterly sampling program beginning with 1st Quarter 2011 (1Q11).

IEPA provided further comments in a March 16, 2011 letter (IEPA, 2011) to SOPUS approving the Soil Vapor Extraction (SVE) Pilot Test Work Plan. In particular, Comment Number 2 of the March 16, 2011 letter required that quarterly soil vapor sampling continue at the 25 VMP locations, and Comment Number 9 requested an updated report, including a discussion of the geology, extent of groundwater impact, and distribution of impacted soil vapor. These items/comments were included in the 1Q11 Soil Vapor Report (URS, 2011a) and have been updated for this report.

As a result of a meeting between SOPUS and the IEPA on February 8, 2012, the quarterly soil vapor sampling program was expanded to include six additional soil VMPs (VMP-31, VMP-32, and VMP-42 through VMP-45). VMP-31 and VMP-32 were installed in 2nd Quarter 2011 (2Q11) to monitor soil vapor during operation of the Internal Combustion Engines (ICE) located near 4th Street and Chaffer Avenue. VMP-42 through VMP-45 were installed during the 3rd Quarter 2011 (3Q11) and 4th Quarter 2011 (4Q11) in conjunction with the SVE System installation to monitor soil vapor concentrations. Monitoring of these VMPs commenced with the 2nd Quarter 2012 (2Q12) sampling event.

Based on a September 13, 2012 letter from the IEPA (IEPA, 2012), VMP-29, VMP-30, and VMP-41, located within the Roxana Public Works Yard, were added to the quarterly sampling program during 3rd Quarter 2012 (3Q12). Additional VMPs (VMP-47 through VMP-55) were installed during the 4th Quarter 2012 (4Q12) in the Village. Monitoring of these VMPs commenced in the 1st Quarter 2013 (1Q13) sampling event.

In 2012, the IEPA additionally requested development of a quarterly report documenting the results of monitoring and remedial efforts associated with operating the SVE system. These results have been added to the subject report.

VMP-62 through VMP-64 were installed during the 4th Quarter 2013 (4Q13) in the Village. Monitoring of these VMPs commenced in the 4Q13 sampling event; however, the results were not obtained in time for inclusion in the 4Q13 report, so those data were included in the 1st Quarter 2014 (1Q14) report.

Based on email correspondence with the IEPA (J. Moore, personal communication to B. Billman, August 2, 2013), the subject reports no longer include copies of the laboratory analytical reports (previously included in appendices). The laboratory reports will continue to be retained in the project files.

The IEPA issued a draft letter on December 26, 2013, finalized on April 9, 2014 (IEPA, 2014), approving certain modifications requested by URS to the subject reports, including the modifications below:

- Tabular data included from the previous year (current quarter and the previous three quarters).
- Charts showing the analytical concentrations of benzene and methane over time.
- Reduction of VMP canister sampling duration from approximately 30 minutes to approximately 5 minutes.

These changes were initiated with the 1Q14 sampling event and have been updated in subsequent reports.

The IEPA issued a letter on May 28, 2015 (IEPA, 2015), approving the corrective action modification requests of two submittals related to the SVE system.

AECOM, on behalf of SOPUS, submitted "TACO Tier 3 Demonstration Report Part 1: Site Characterization Summary" and "Part 2: Tier 3 Proposal" to the IEPA on April 6, 2017 (AECOM, 2017a; AECOM, 2017b). This submittal was followed by two supplemental documents submitted on July 14, 2017 (AECOM, 2017c), and November 22, 2017 (AECOM, 2017d), respectively. These submittals provided a site characterization summary and a Tier 3 demonstration requesting to shut down the SVE System and initiate a period of rebound monitoring.

During a meeting with IEPA on November 5, 2019, the IEPA requested information regarding the operation of the SVE system, including a description of procedures for opening and closing SVE wells, an overview of SVE system monitoring programs, and a figure depicting operating SVE wells. On November 20, 2019 AECOM provided the requested information via email, including a figure depicting the SVE wells operating as of November 13, 2019.

On October 1, 2020, the IEPA issued a response letter to the 2017 TACO Tier 3 submittals, in which the submittals were neither approved nor denied (IEPA, 2020). Condition 1 of the letter stated that the SVE system must be maintained in areas of concern until groundwater concentrations at monitoring wells within the Village have been reduced to levels consistent with applicable standards. Additional conditions within the letter provided guidance for recalculation of Tier 3 remedial objectives and provided comments on the screening of analytical results.

SVE System

As presented in the June 2011 Conceptual/Final Design Report (URS, 2011b), the May 2012 SVE System Construction Completion Report (URS, 2012), and the February 2013 SVE System Construction Completion Report Addendum (URS, 2013), URS designed and constructed a SVE system along the WFL and within the Roxana Public Works Yard.

The SVE system consists of 45 SVE wells, 30 of which are located along the WFL, nine are located in the Village along East 4th Street west of Chaffer Avenue, and six are located in the Roxana Public Works Yard. The SVE wells are connected via 4-inch piping to vapor/liquid separators (VLS) and a rotary lobe positive displacement blower housed within a customized intermodal freight container ("conex"). Piping from the SVE wells feeds into the conex, where vapor moves through the VLS, before traveling through the blower and a baffle connected to a Regenerative Thermal Oxidizer (RTO). A system fan located on the RTO side of the baffle pushes the vapor into the RTO and adds fresh air to dilute the vapor stream as necessary.


During 3Q13, URS designed an extension to the northernmost extent of the WFL portion of the SVE system. Five additional SVE wells (SVE wells 37 through 41) and six additional VMPs (VMPs 56 through 61) were installed in August 2013 for extension of the red header line, which was completed in October 2013. All newly installed SVE wells were open and on-line by November 2013. Details associated with this system extension were documented in the SVE System Construction Completion Report Addendum No. 2, dated January 2014 (URS, 2014). During 3Q14 and 4Q14, AECOM designed and constructed an extension to the WFL portion of the SVE system on Shell-owned properties adjacent to 4th Street and Chaffer Avenue in Roxana, IL. Six additional SVE wells (SVE wells 42 through 47) were brought on-line in November 2014.

The IEPA issued a letter on May 28, 2015 (IEPA, 2015) approving the corrective action modification requests of August 16, 2013, which included activities to study potential enhancement of the existing SVE system near the corner of 4th Street and Chaffer Avenue. The IEPA 2015 letter also approved the March 4, 2015 SVE System Construction Completion Report Addendum No. 3 (URS, 2015).

Appendix B
Benzene and Methane Charts


VMP-1

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

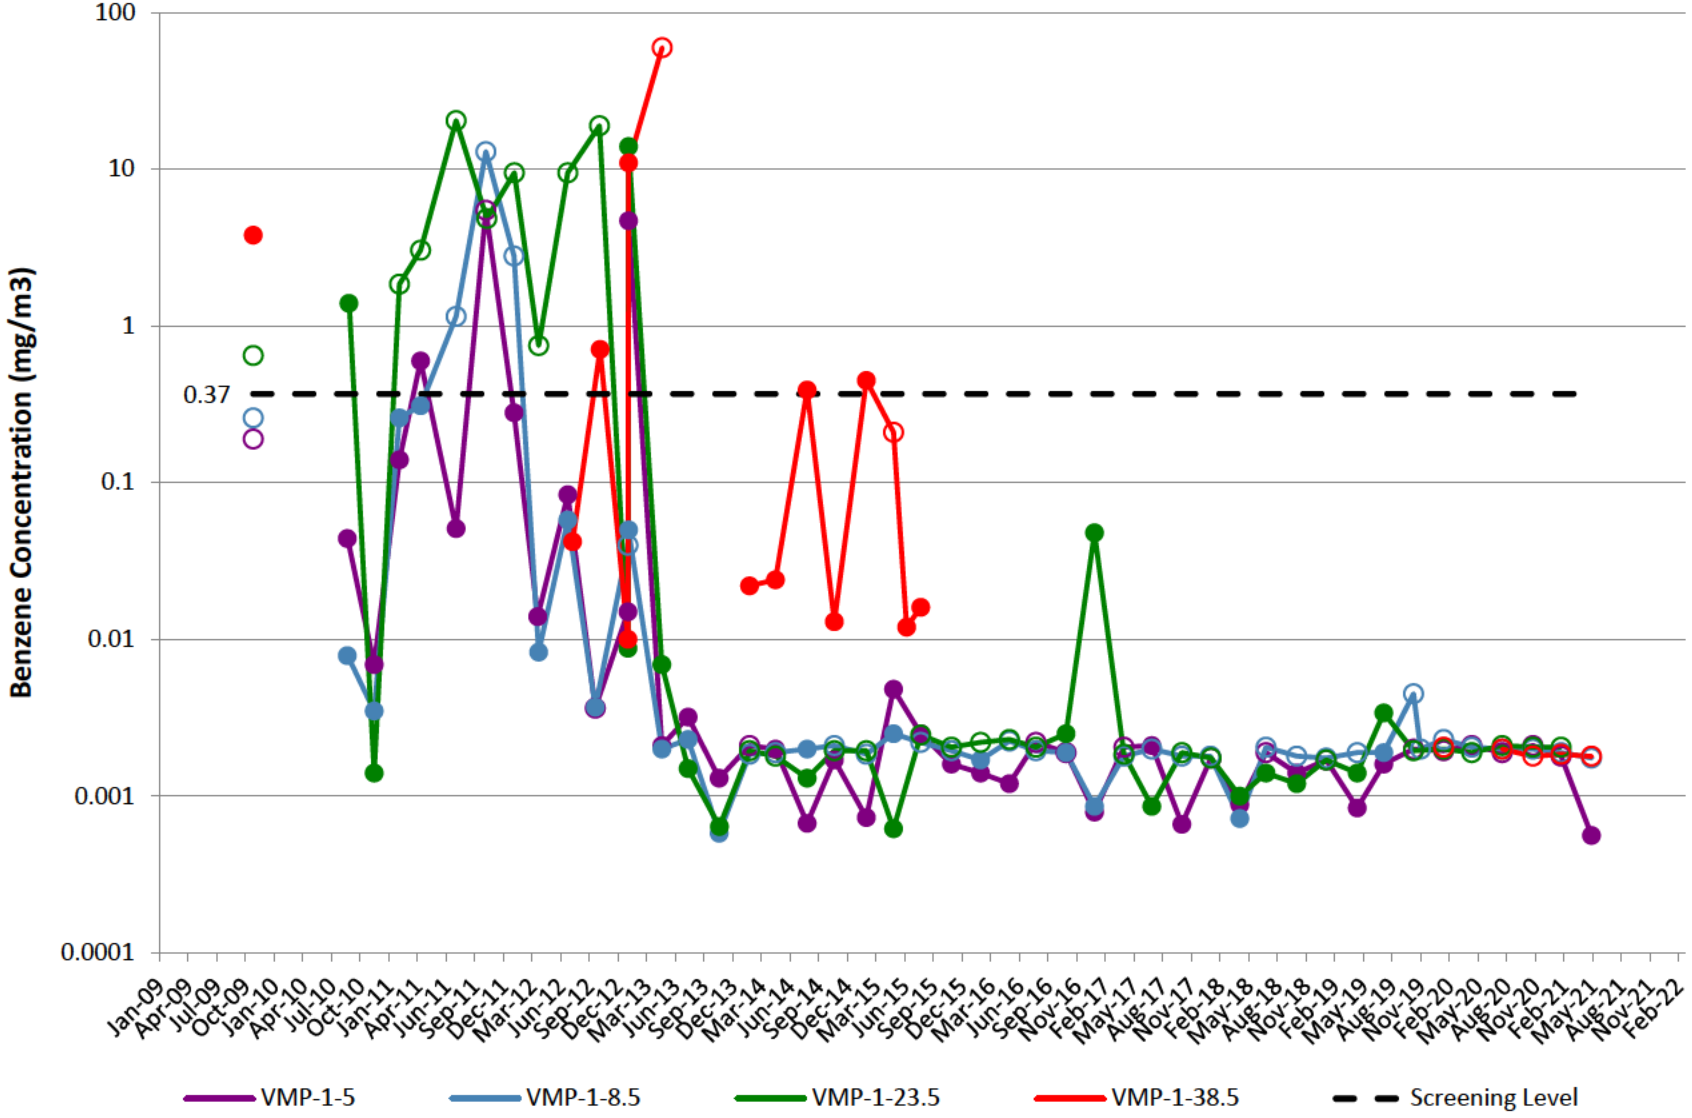


VMP-2

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

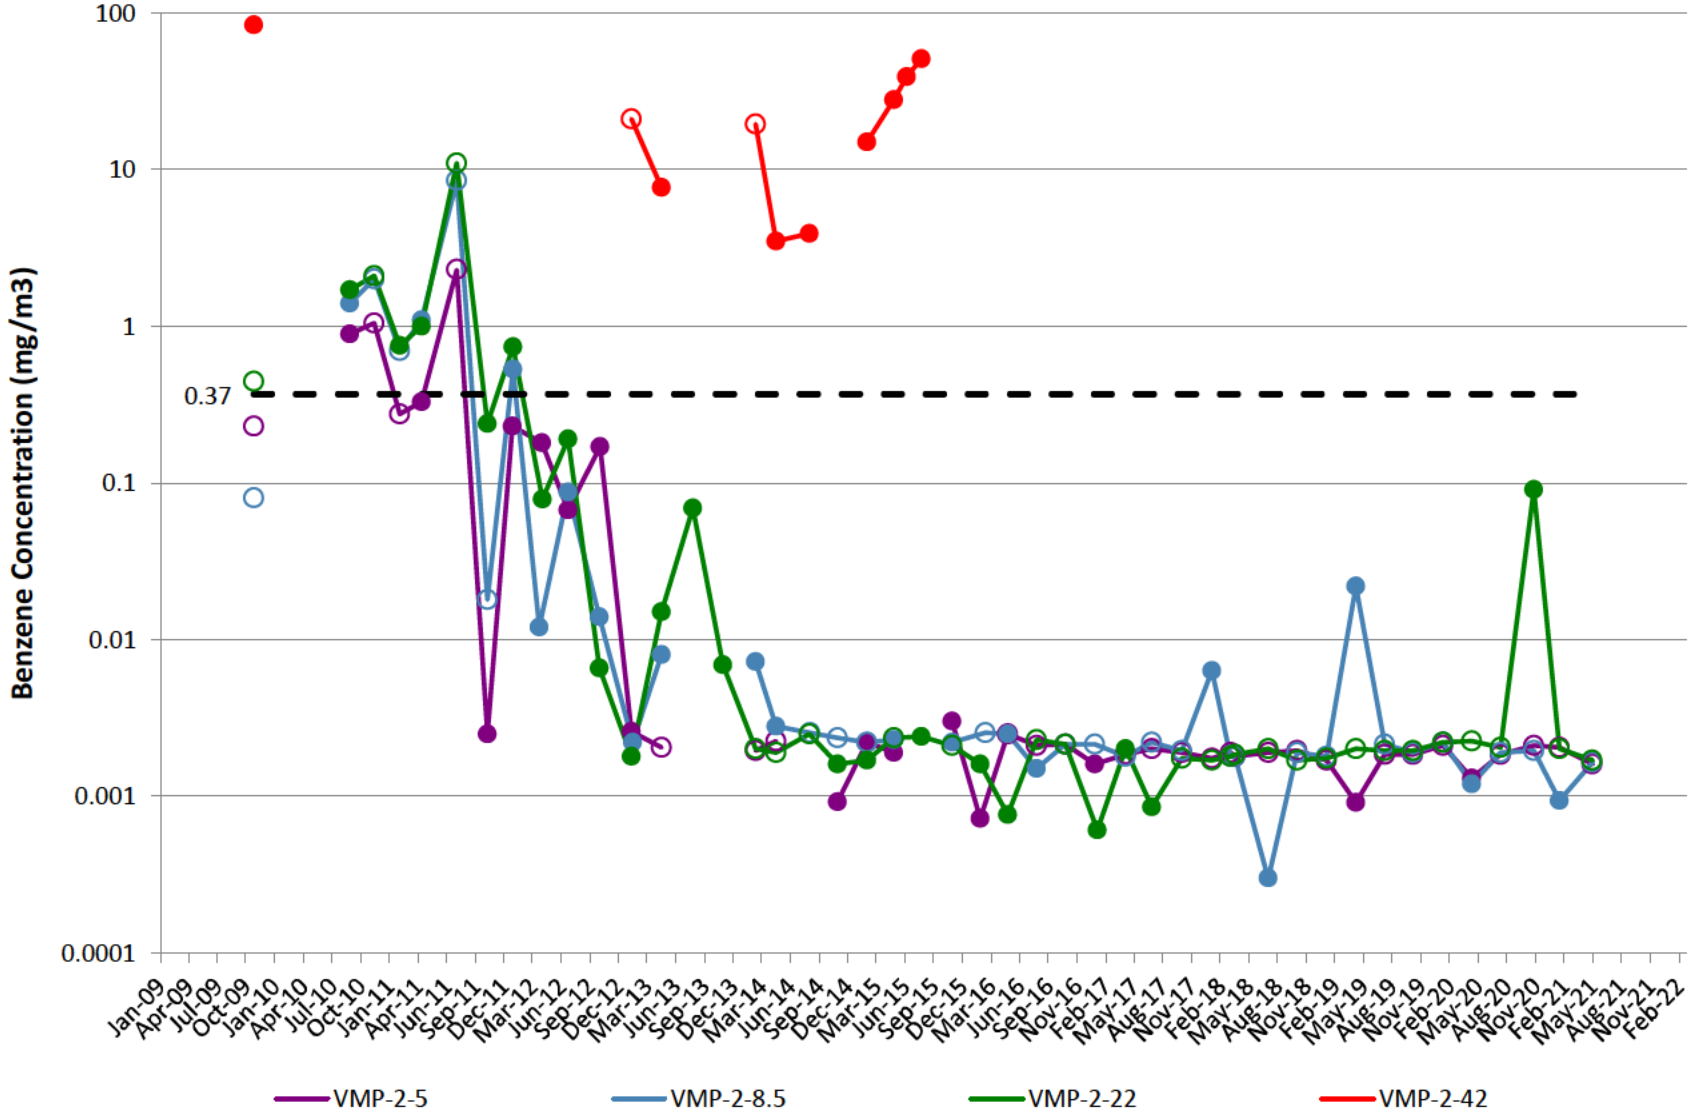


VMP-3

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

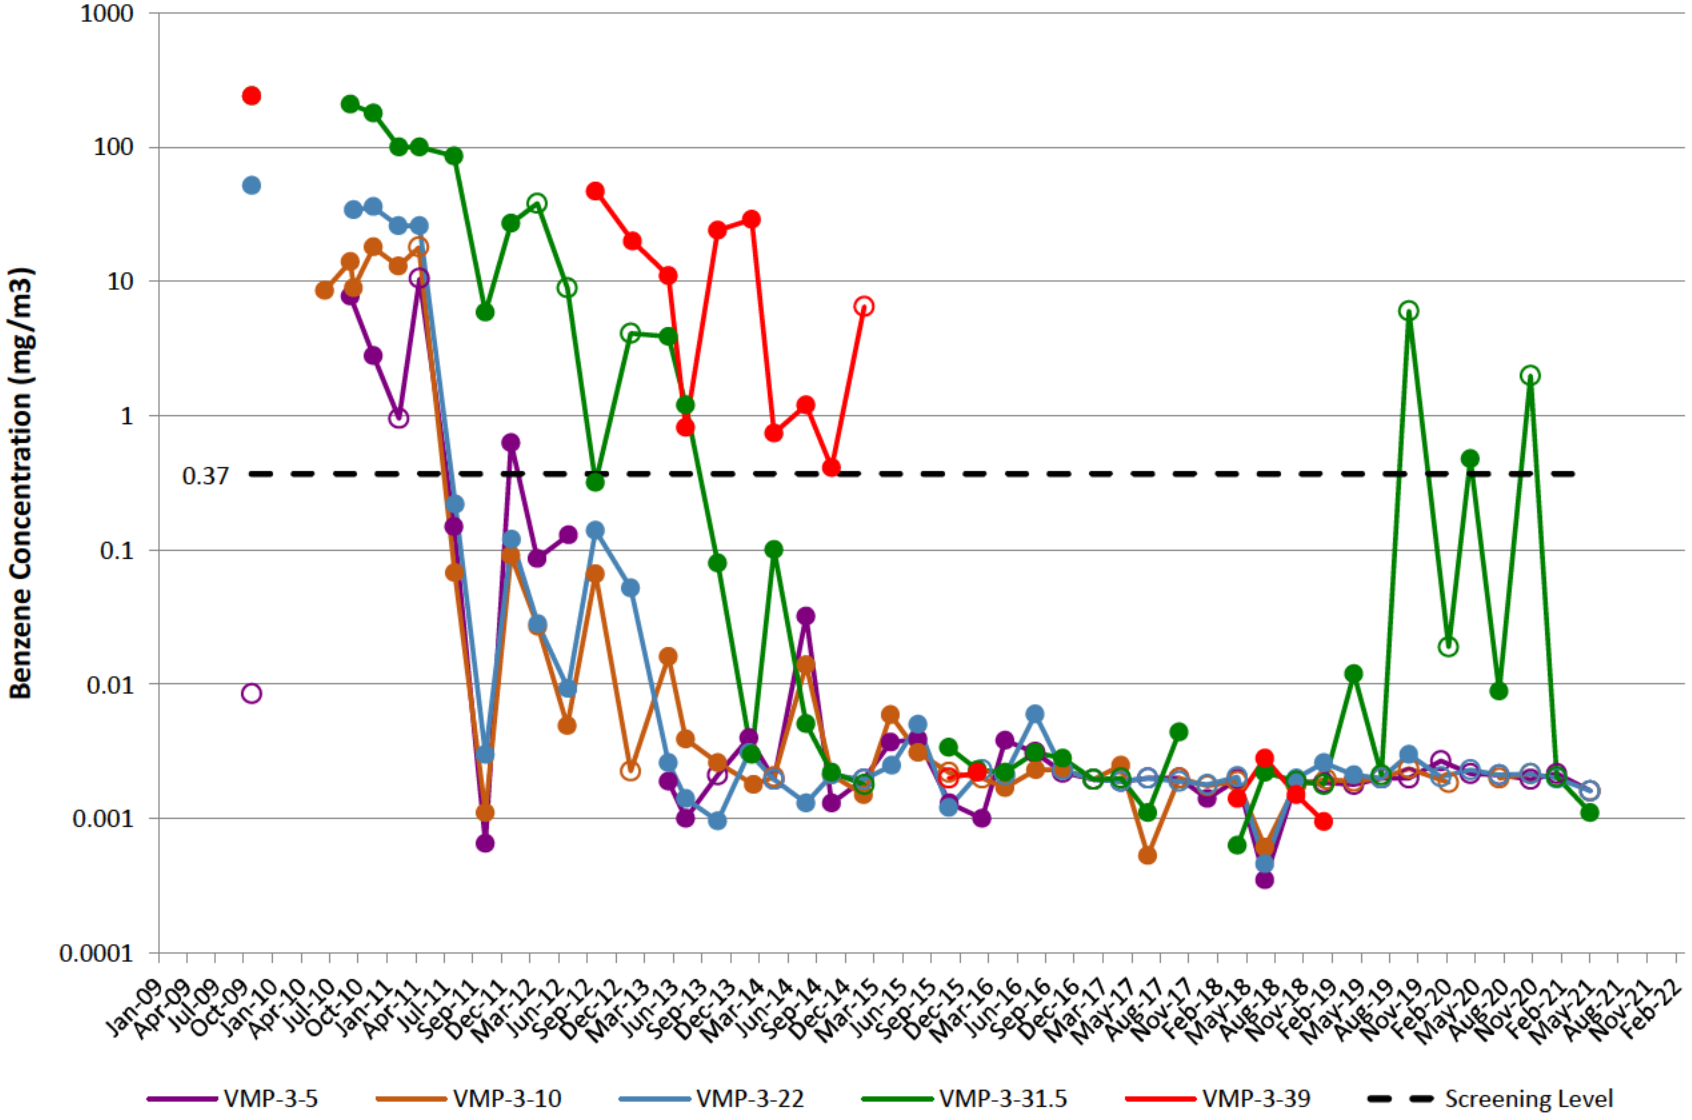


VMP-4

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

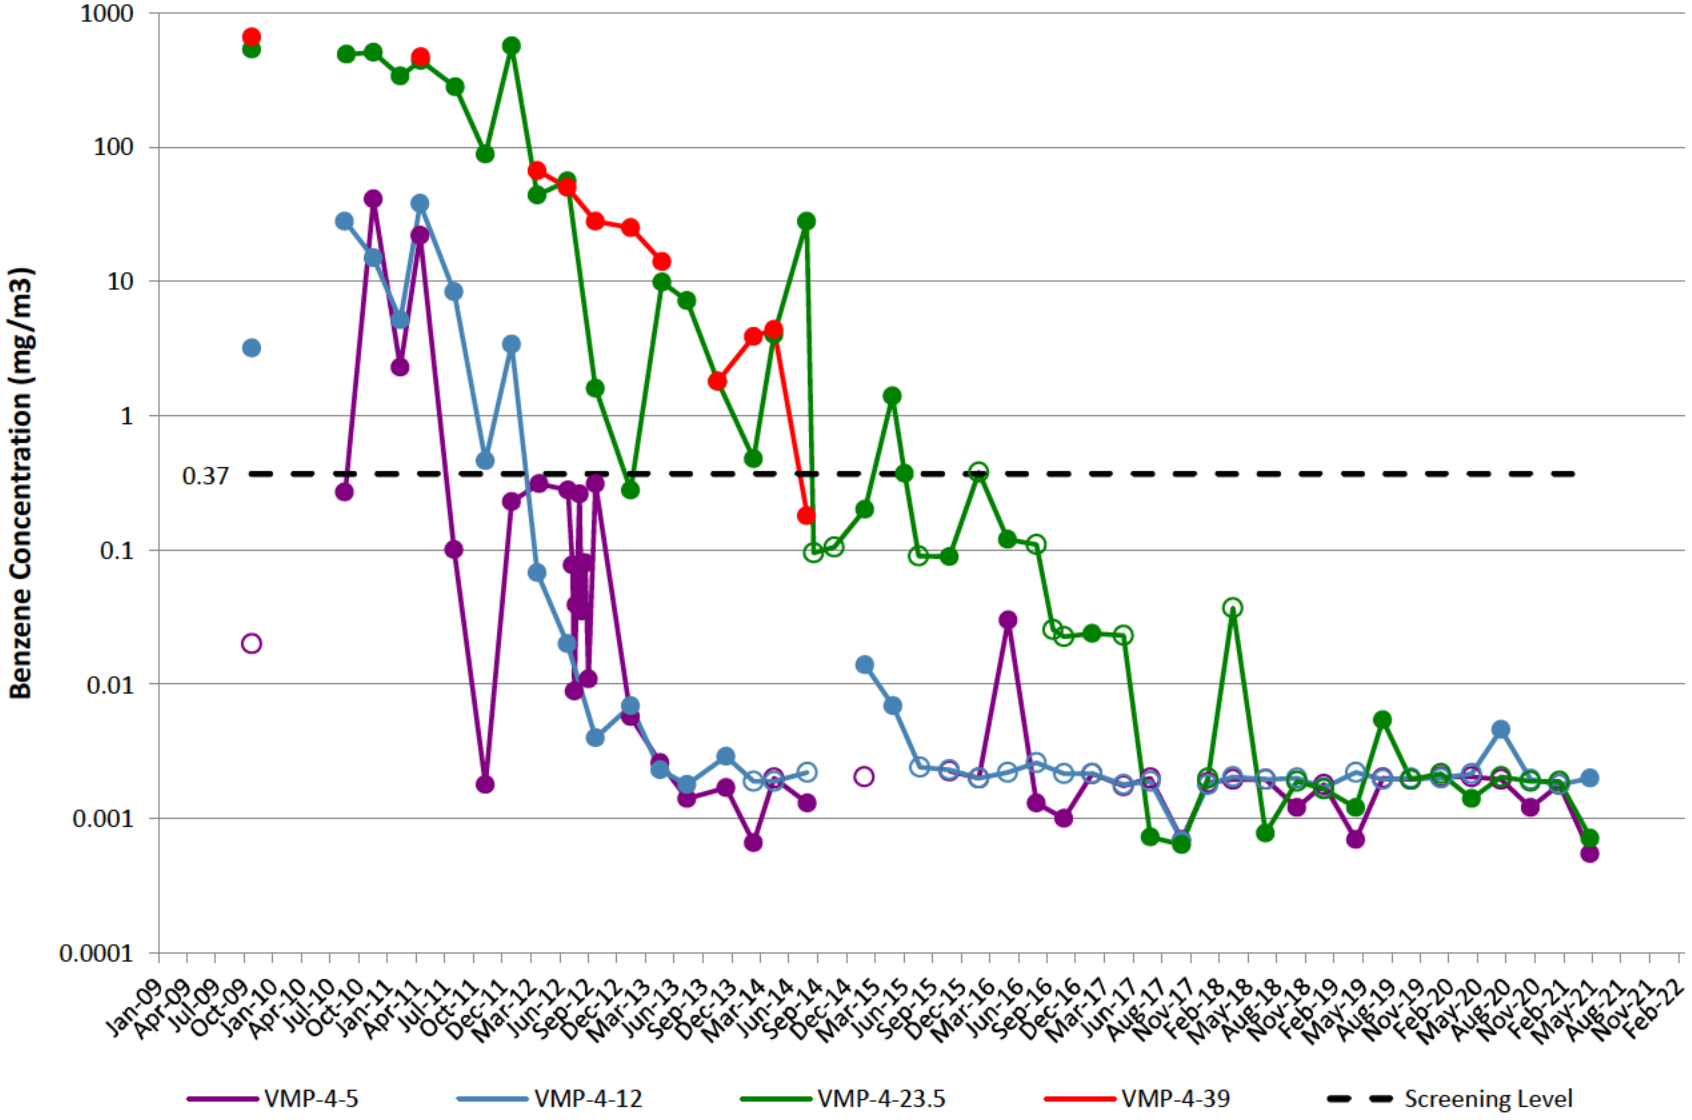


VMP-5

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

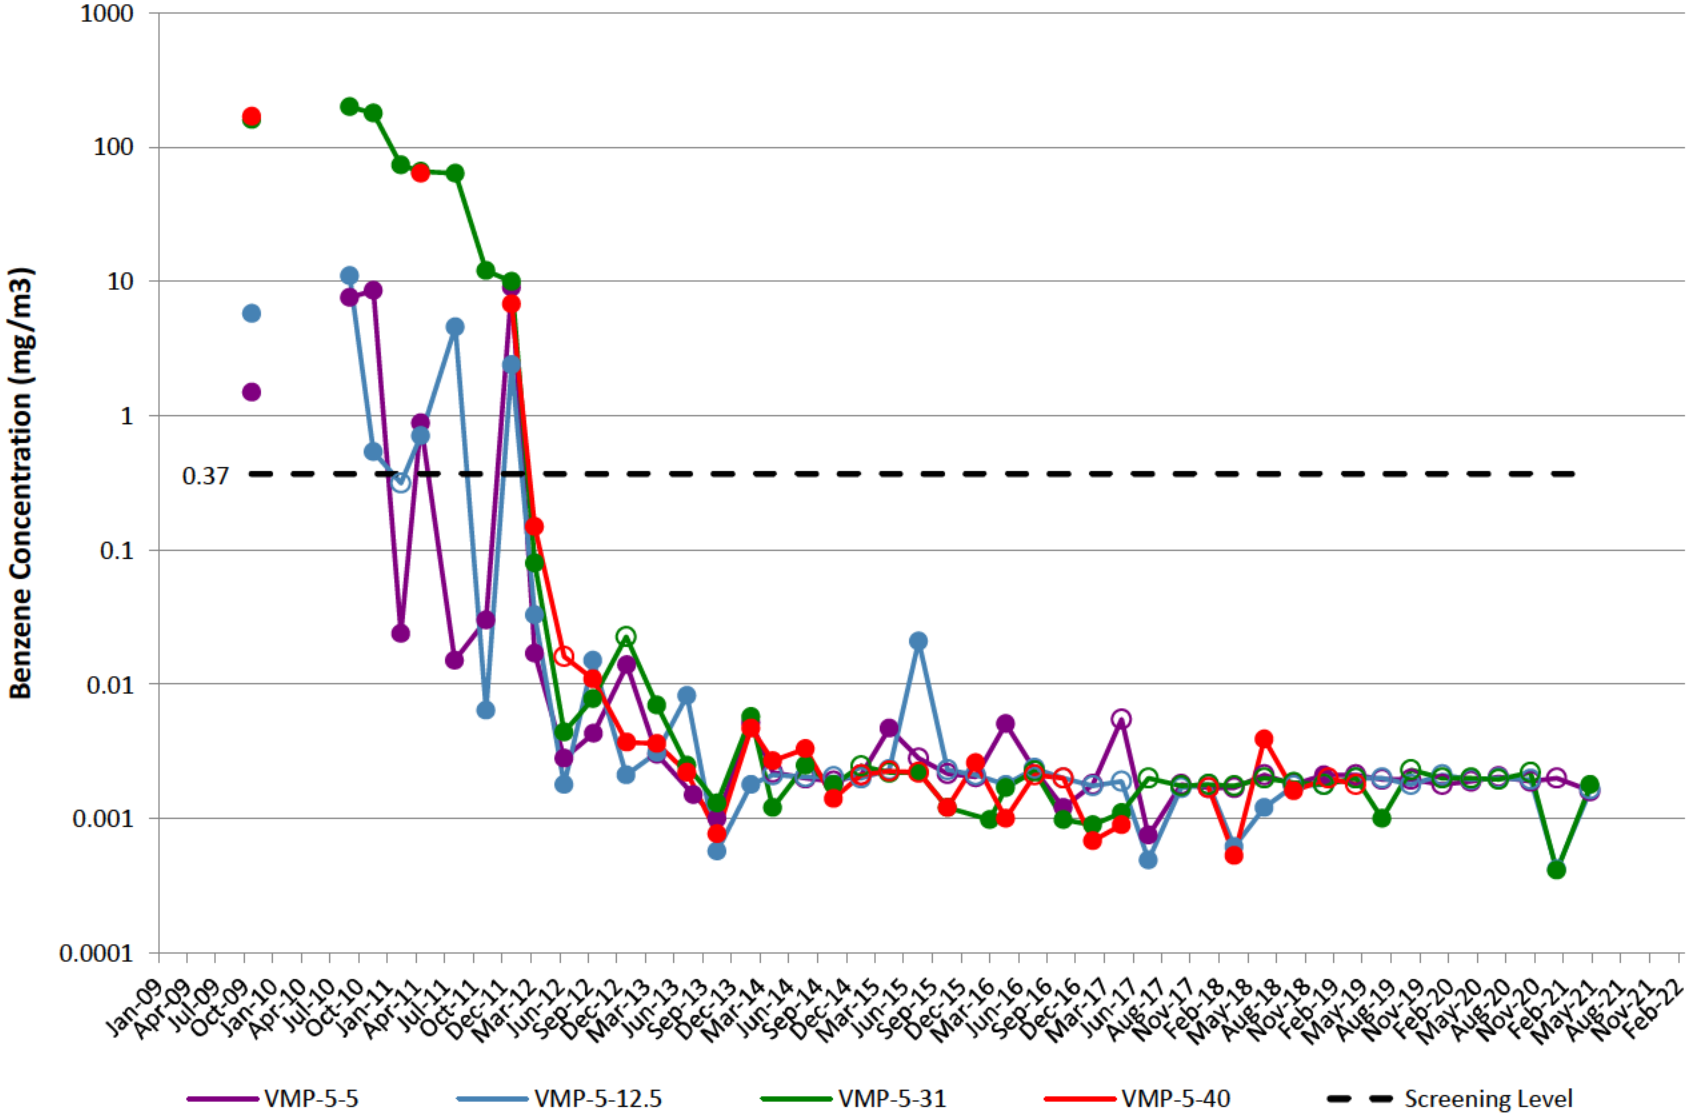


VMP-6

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

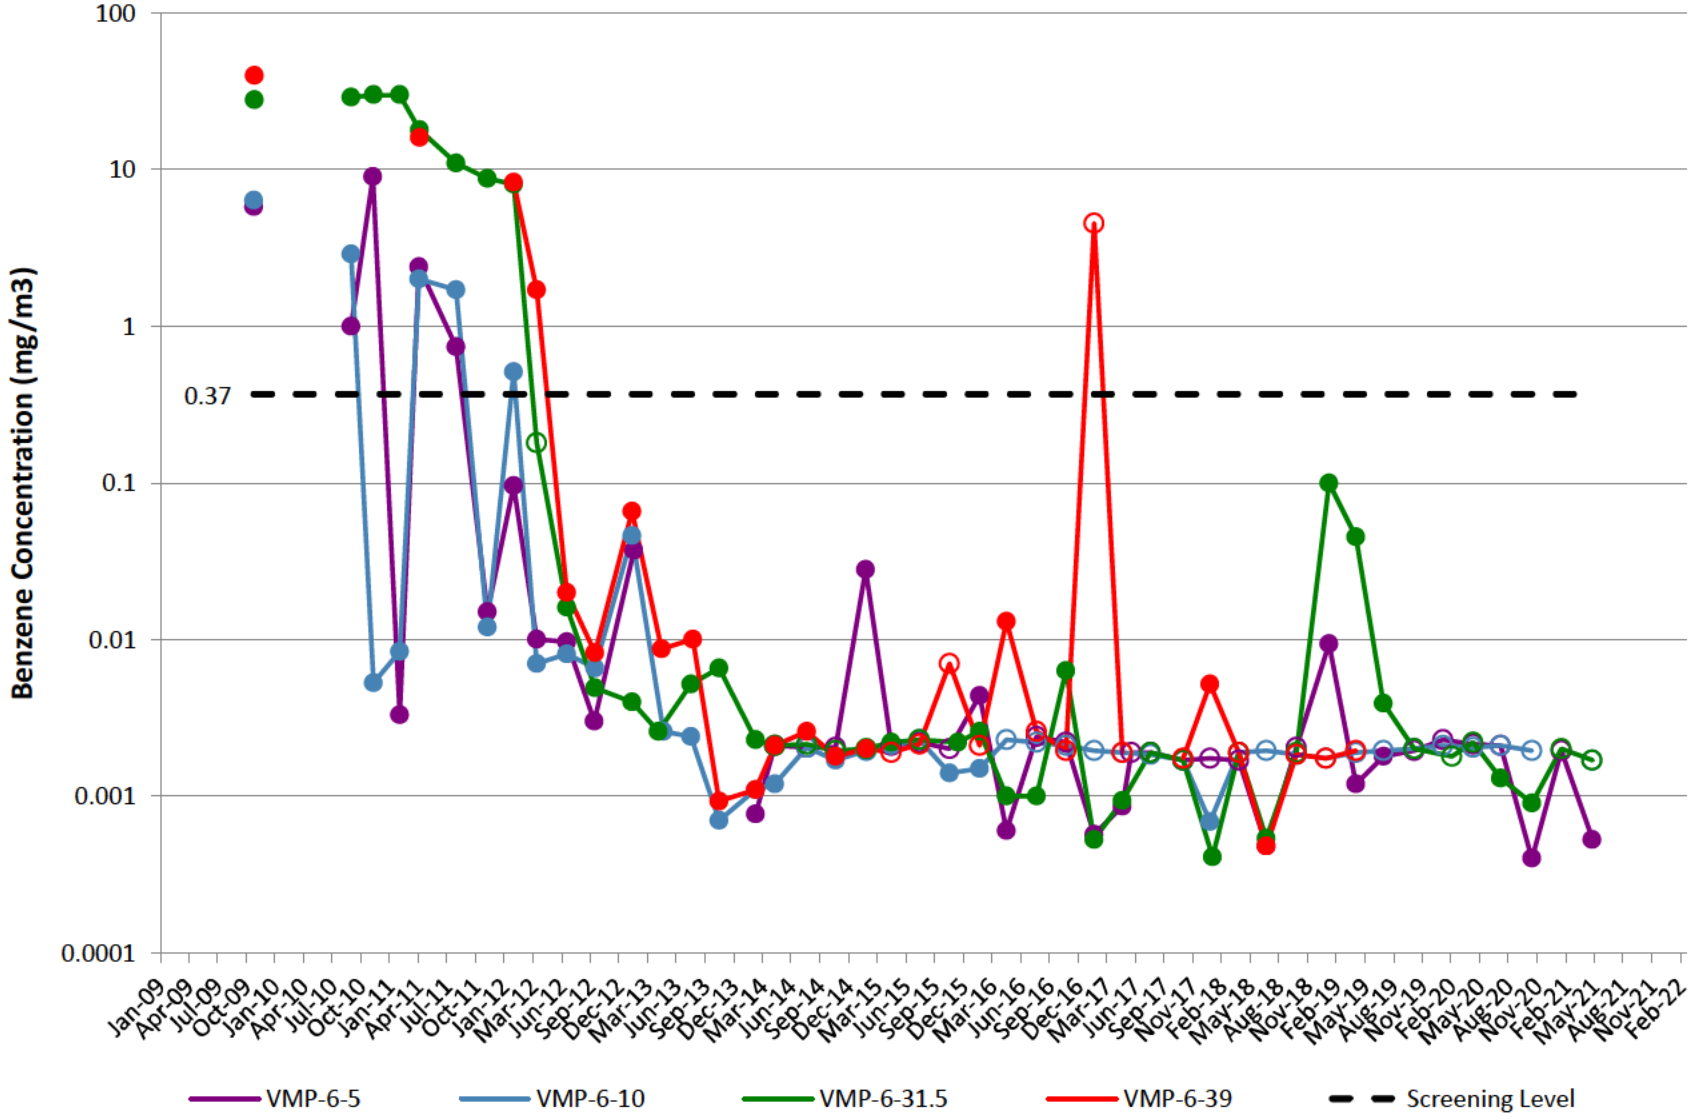


VMP-7

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

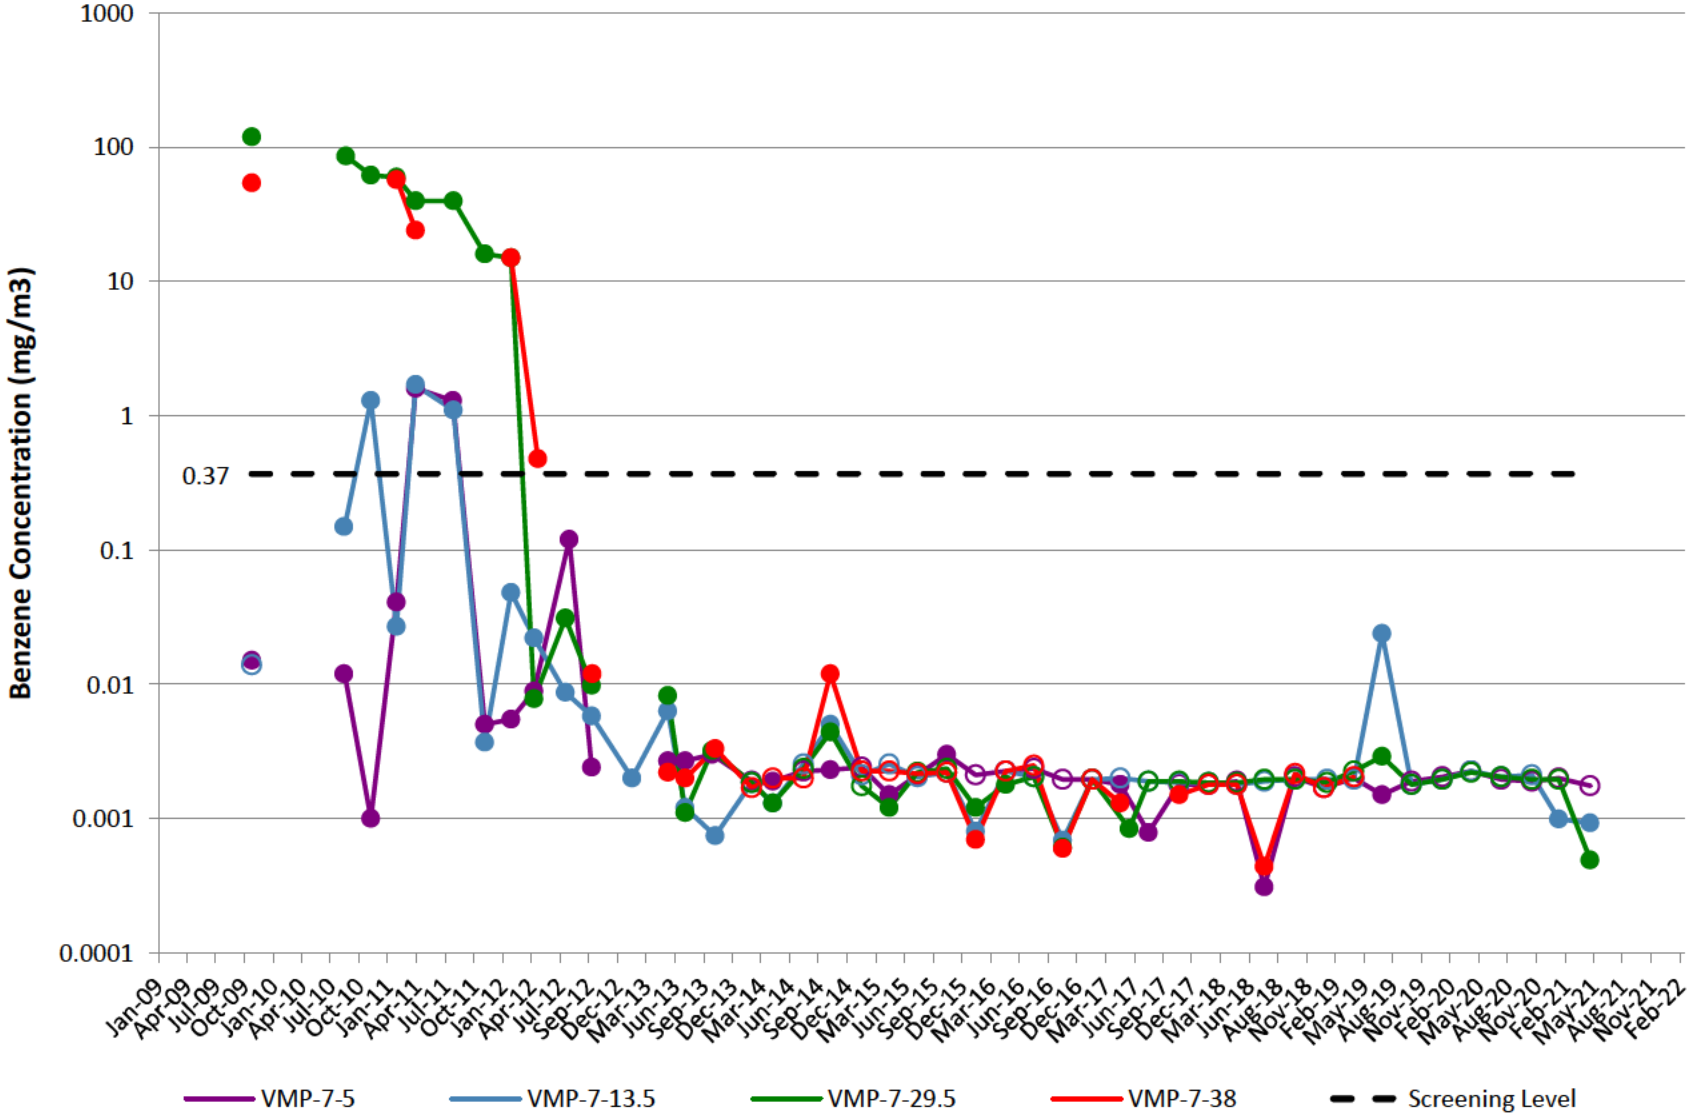


VMP-8

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

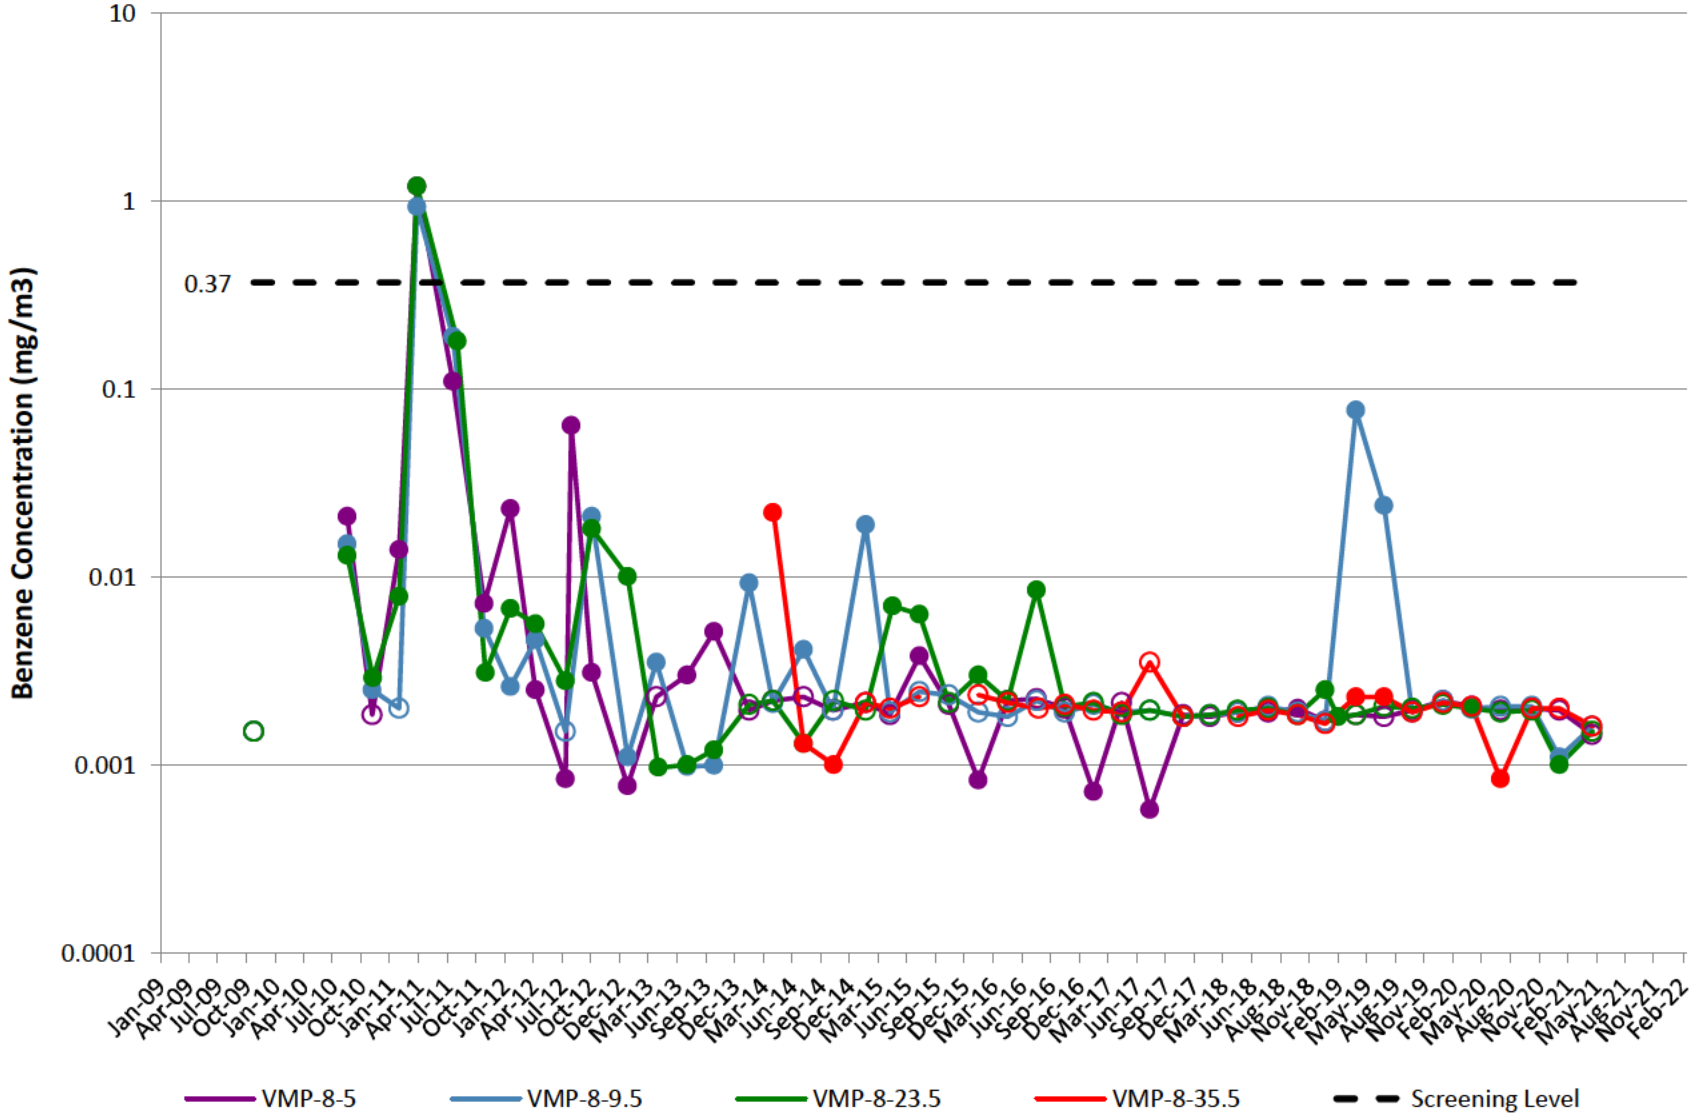


VMP-9

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

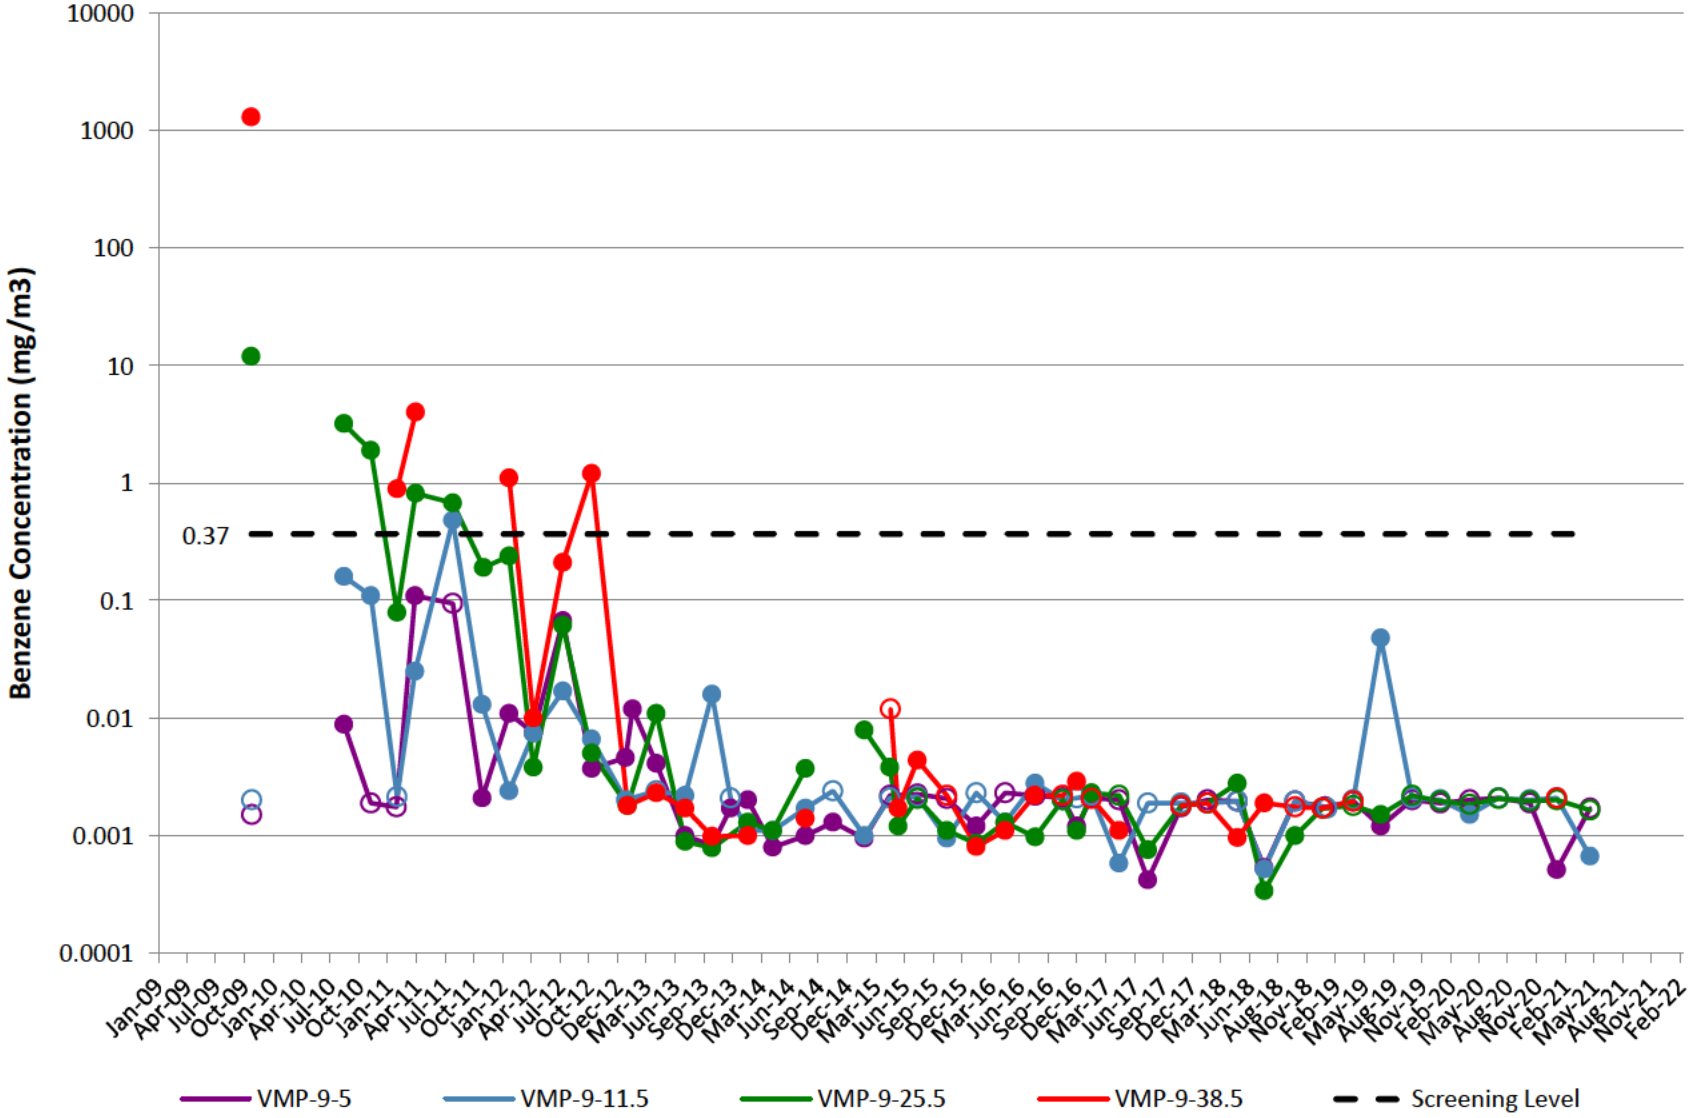


VMP-10

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

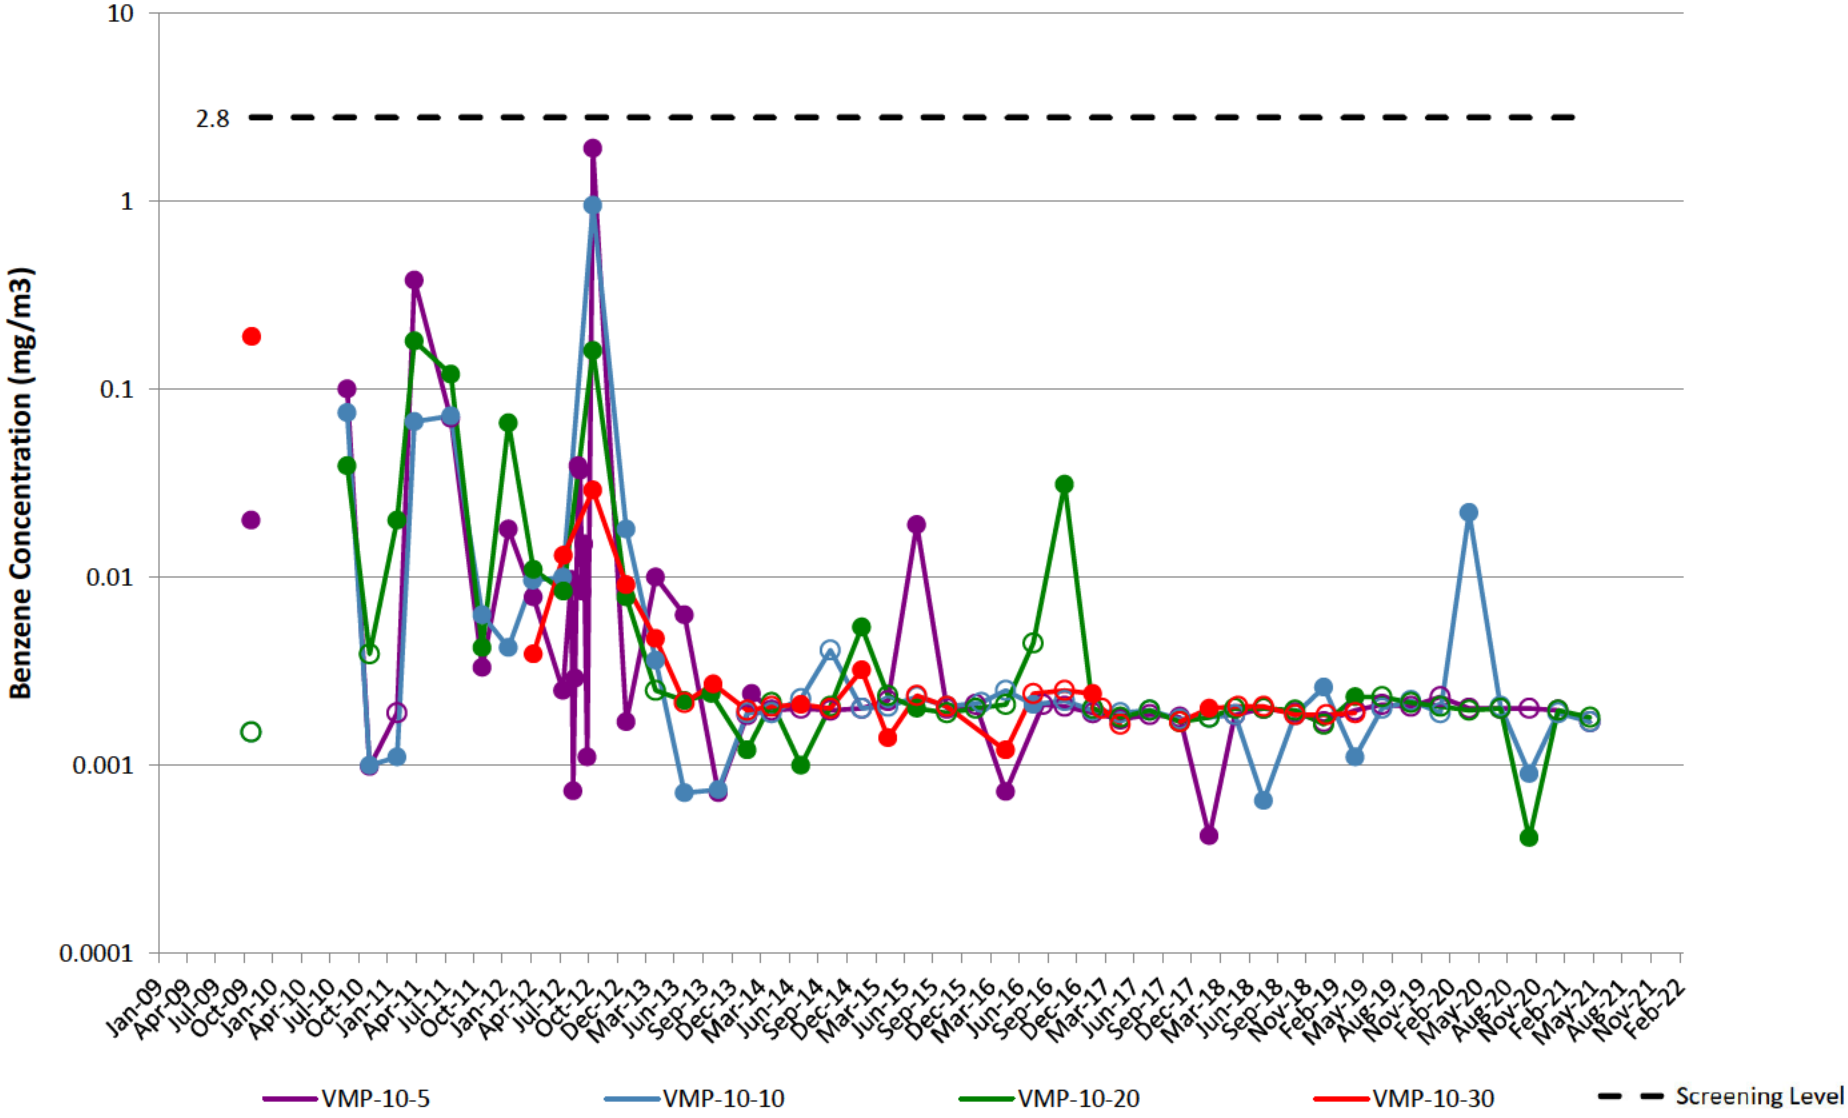


VMP-11

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

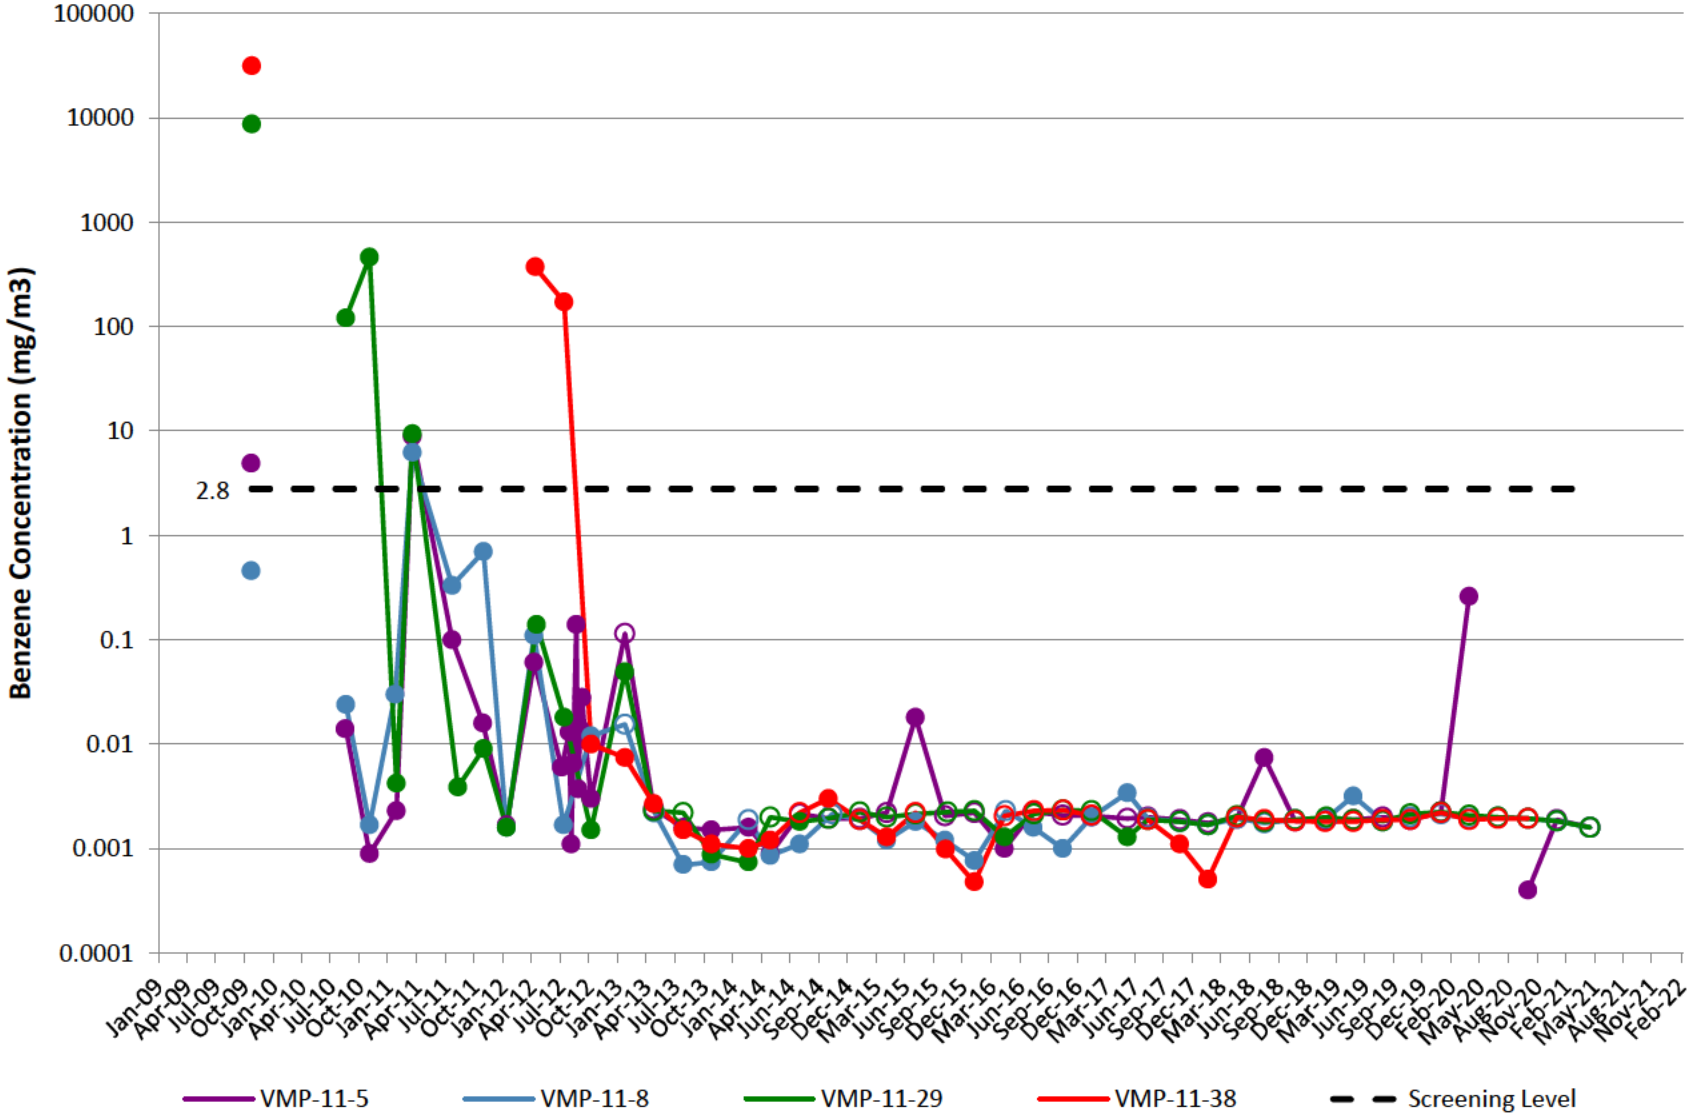


VMP-12

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

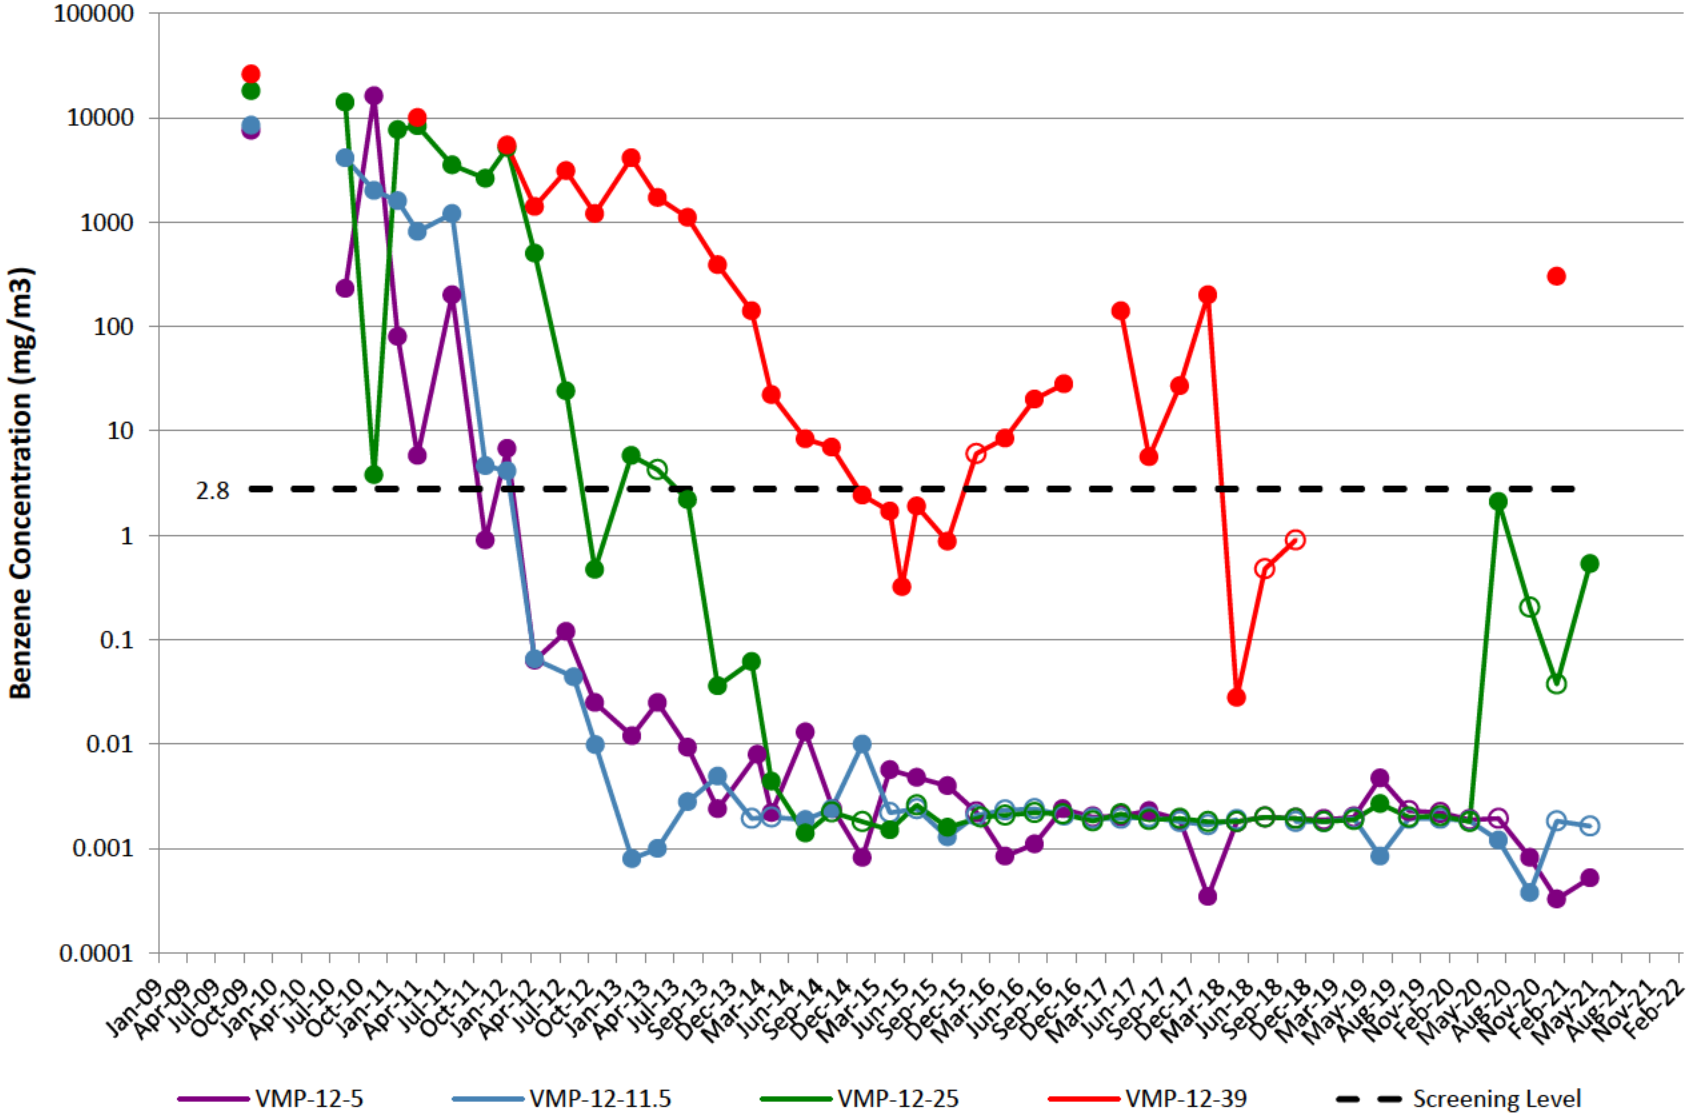


VMP-13

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

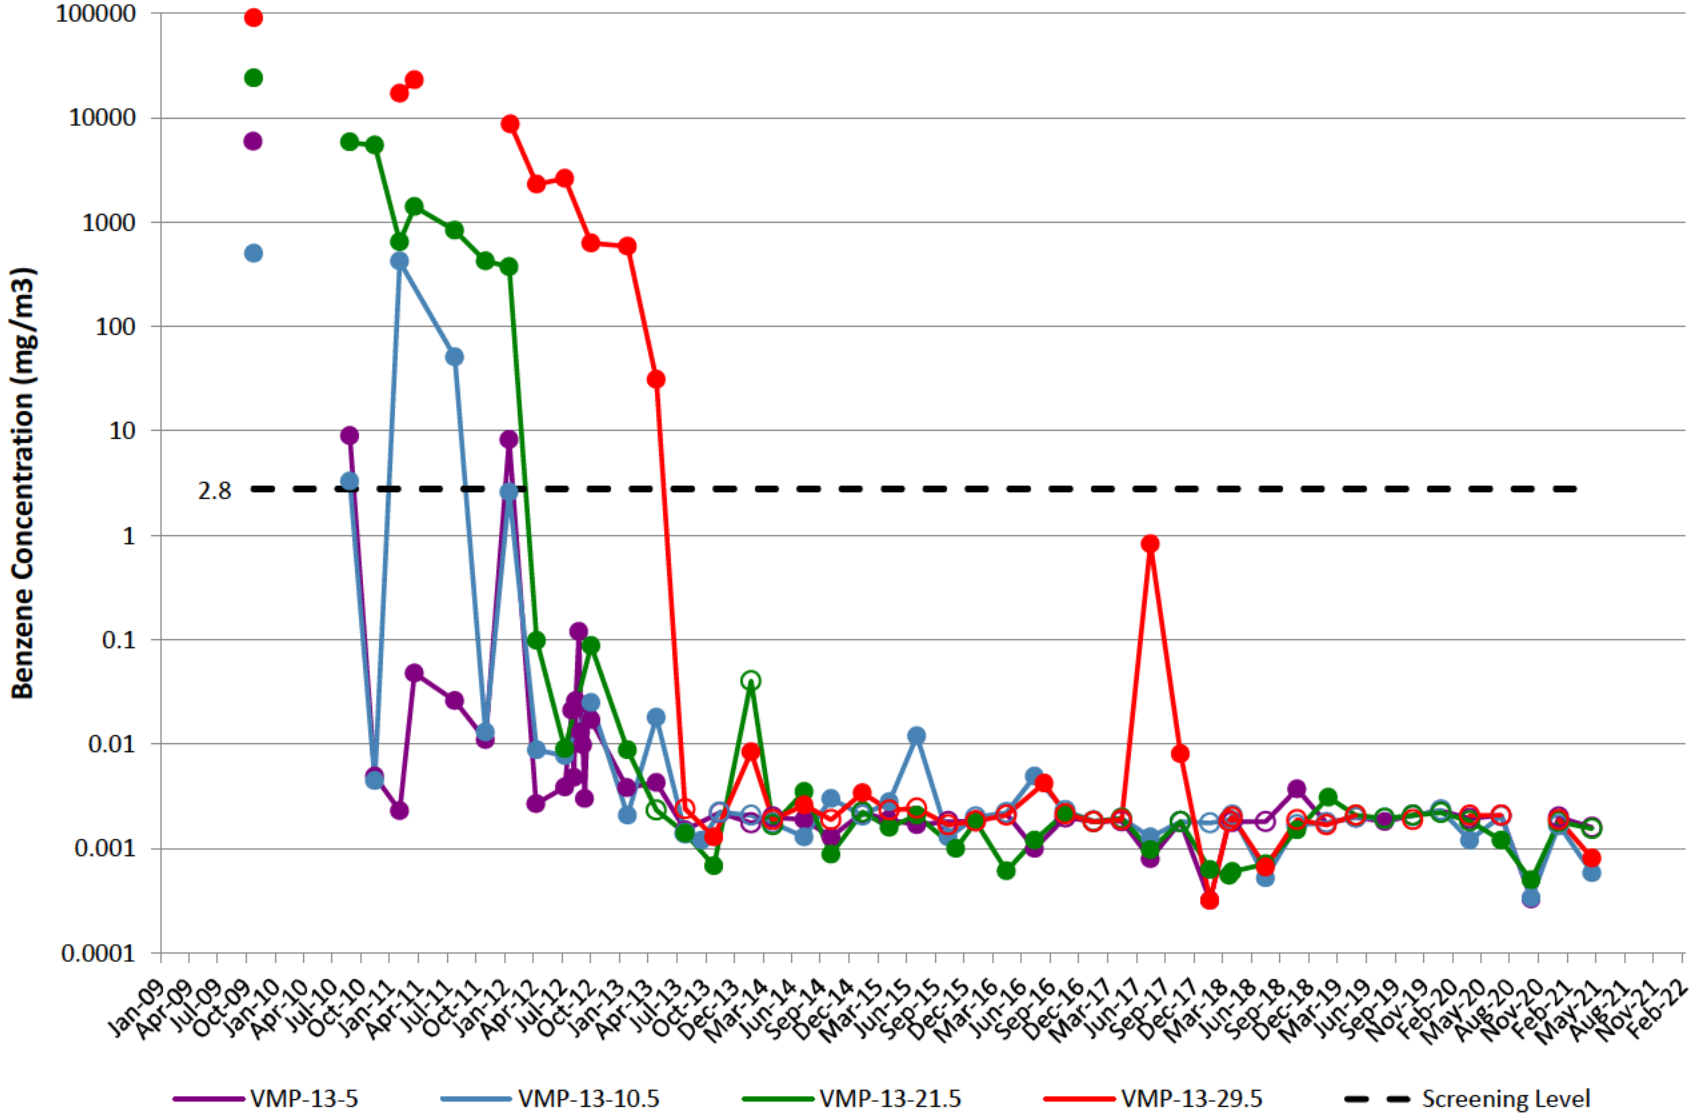


VMP-14

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

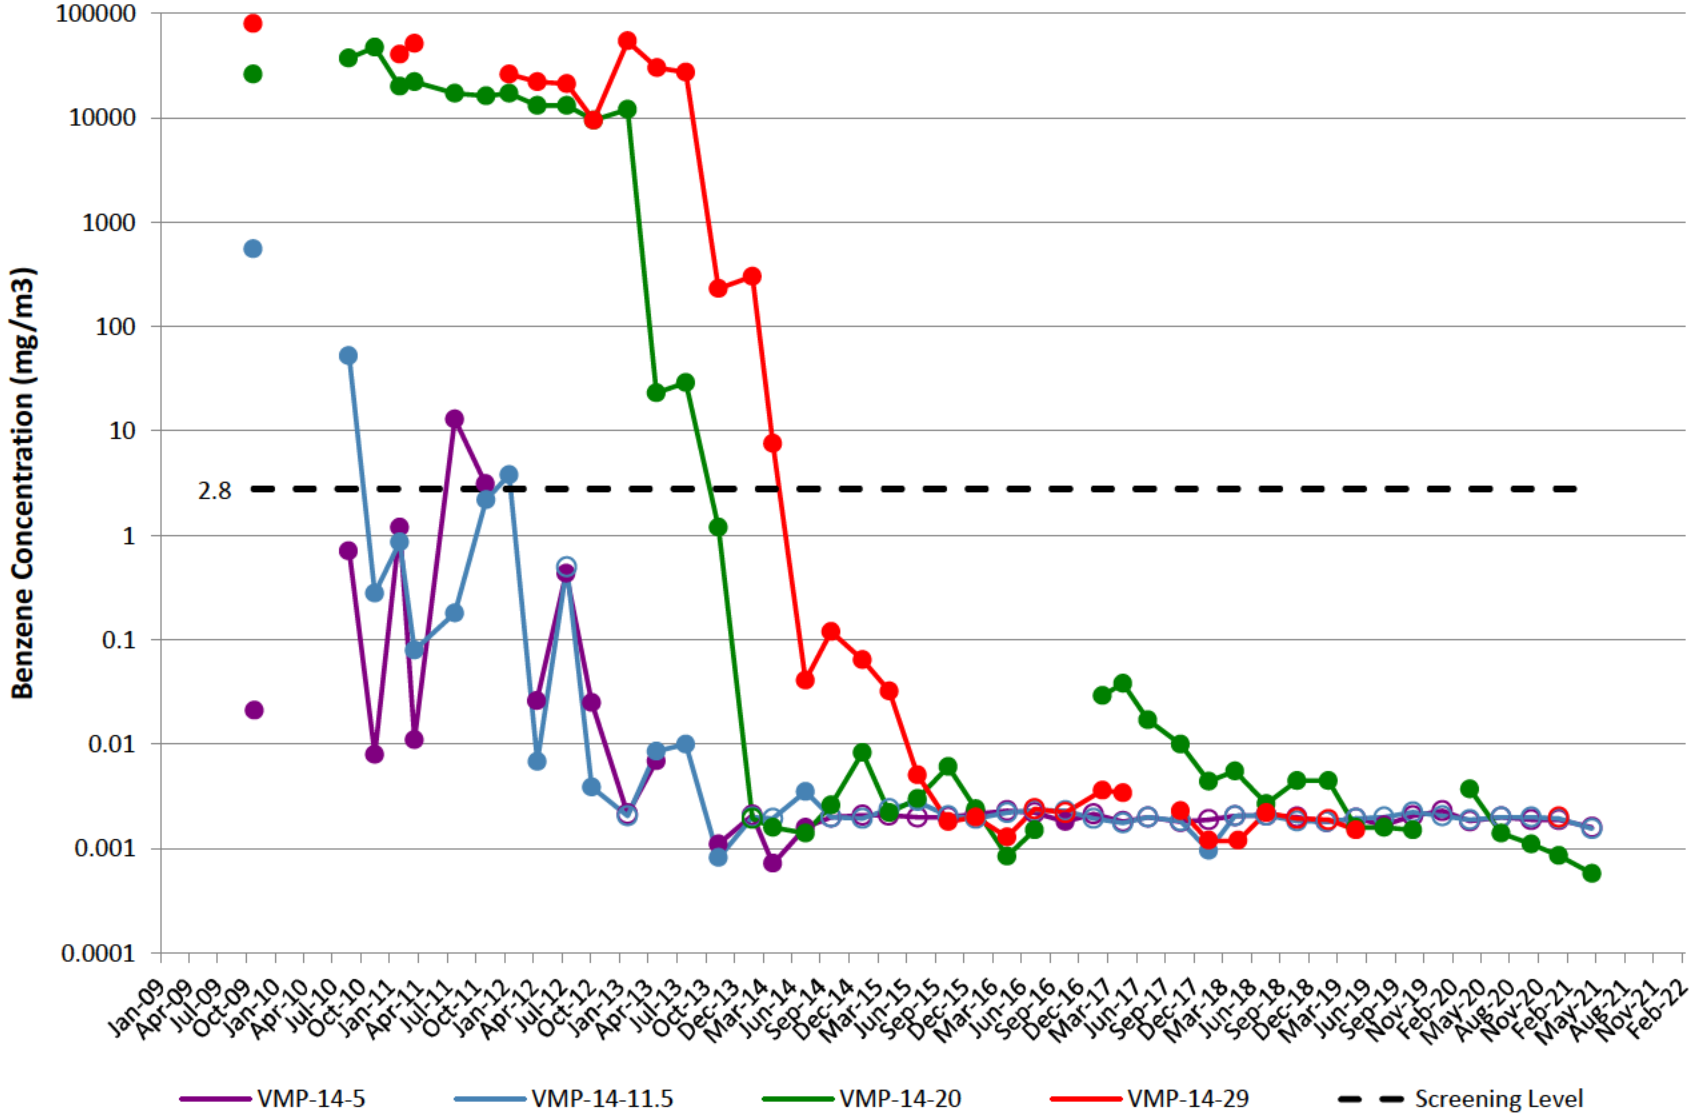


VMP-15

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

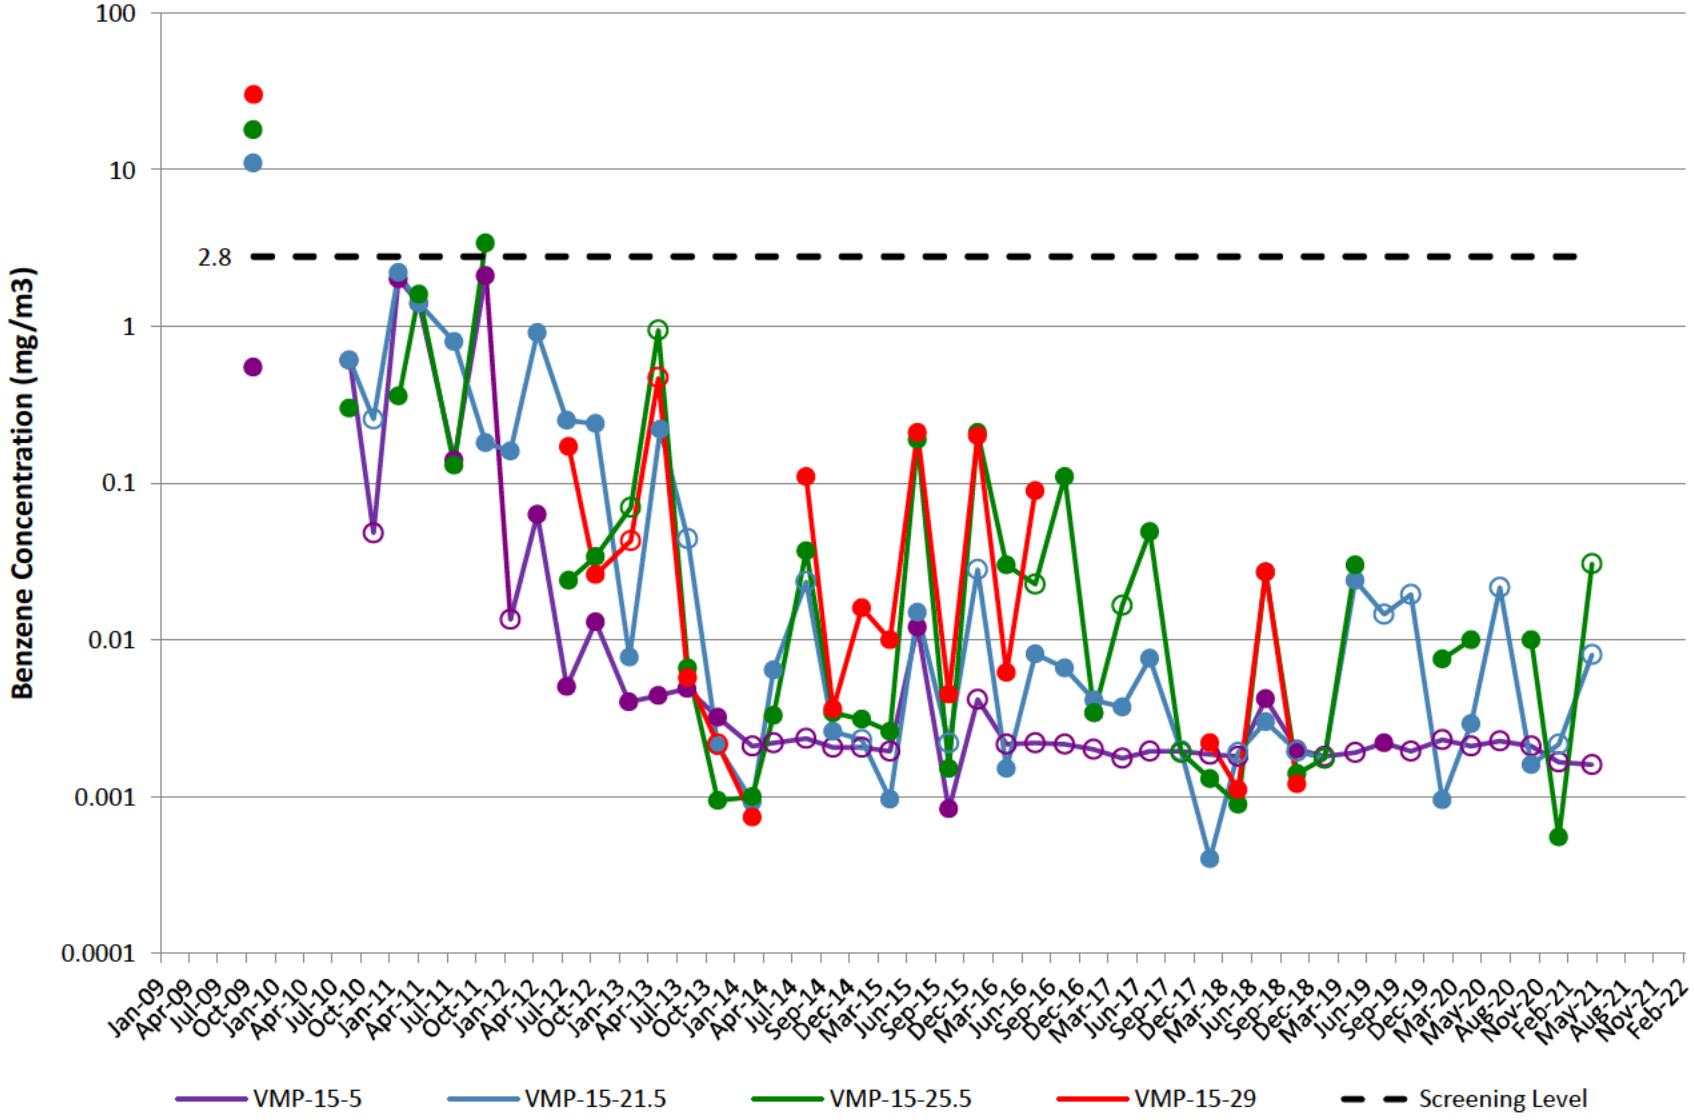


VMP-16

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

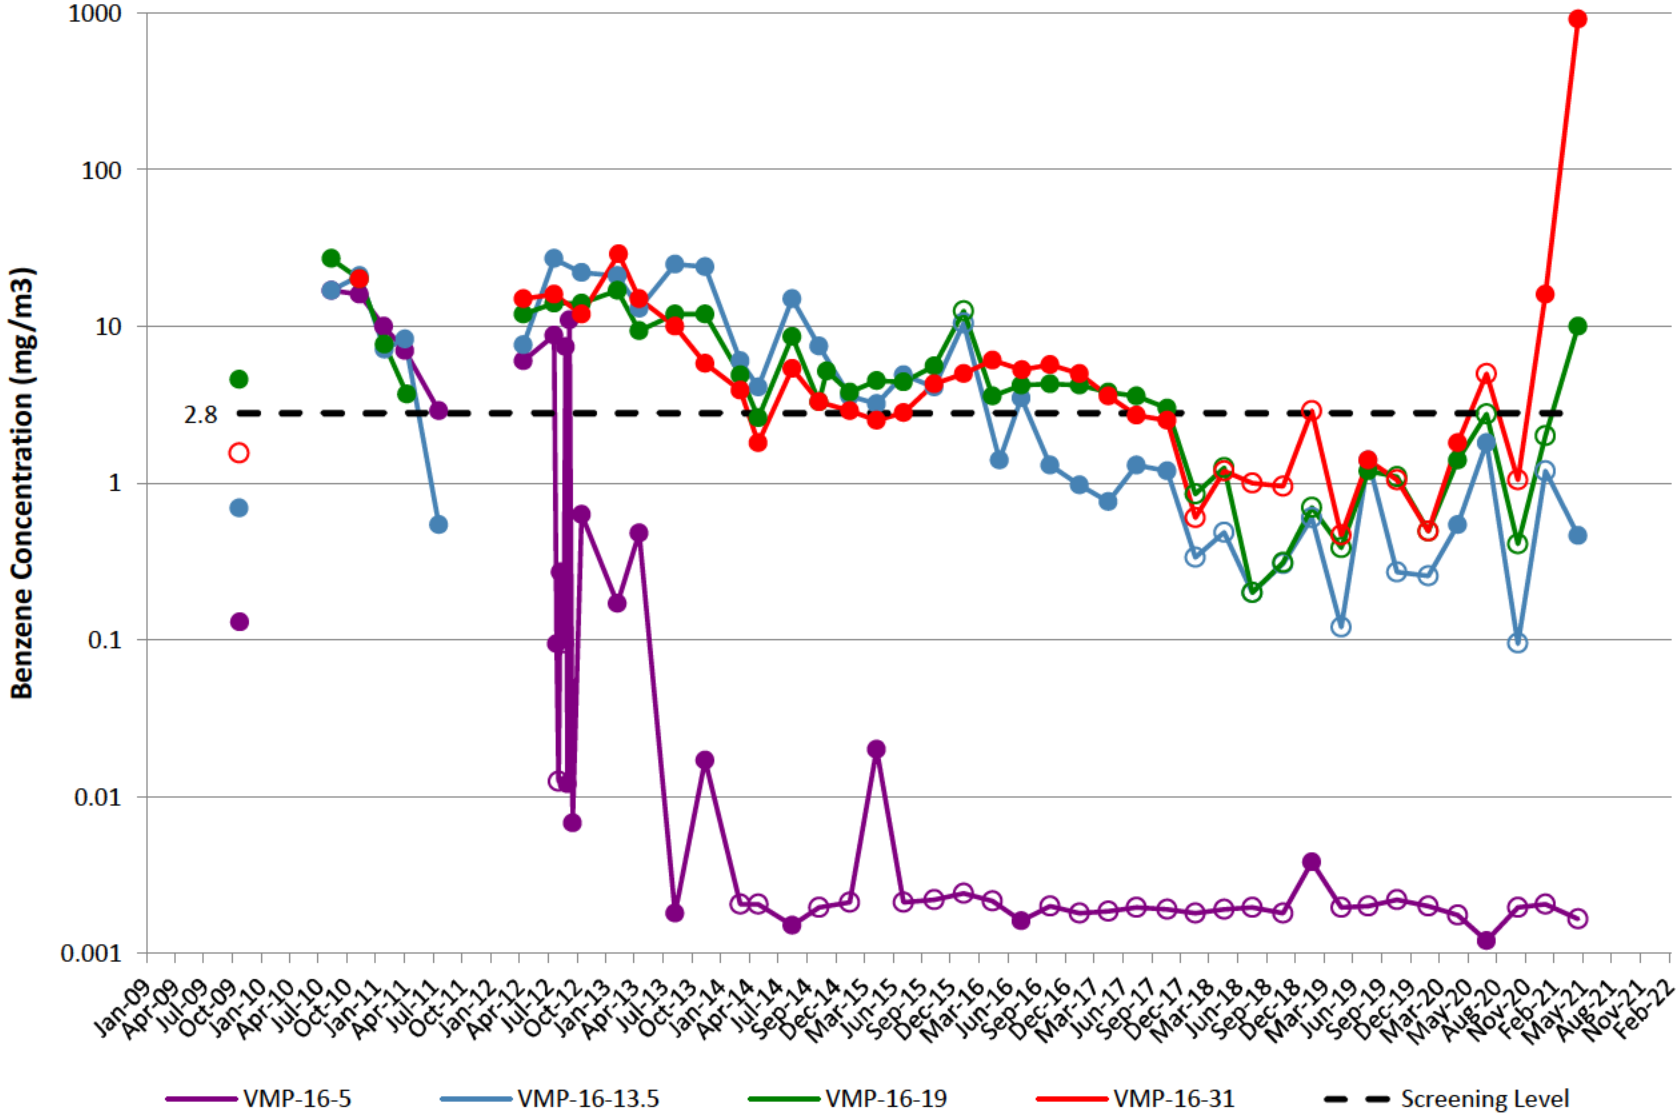


VMP-17

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

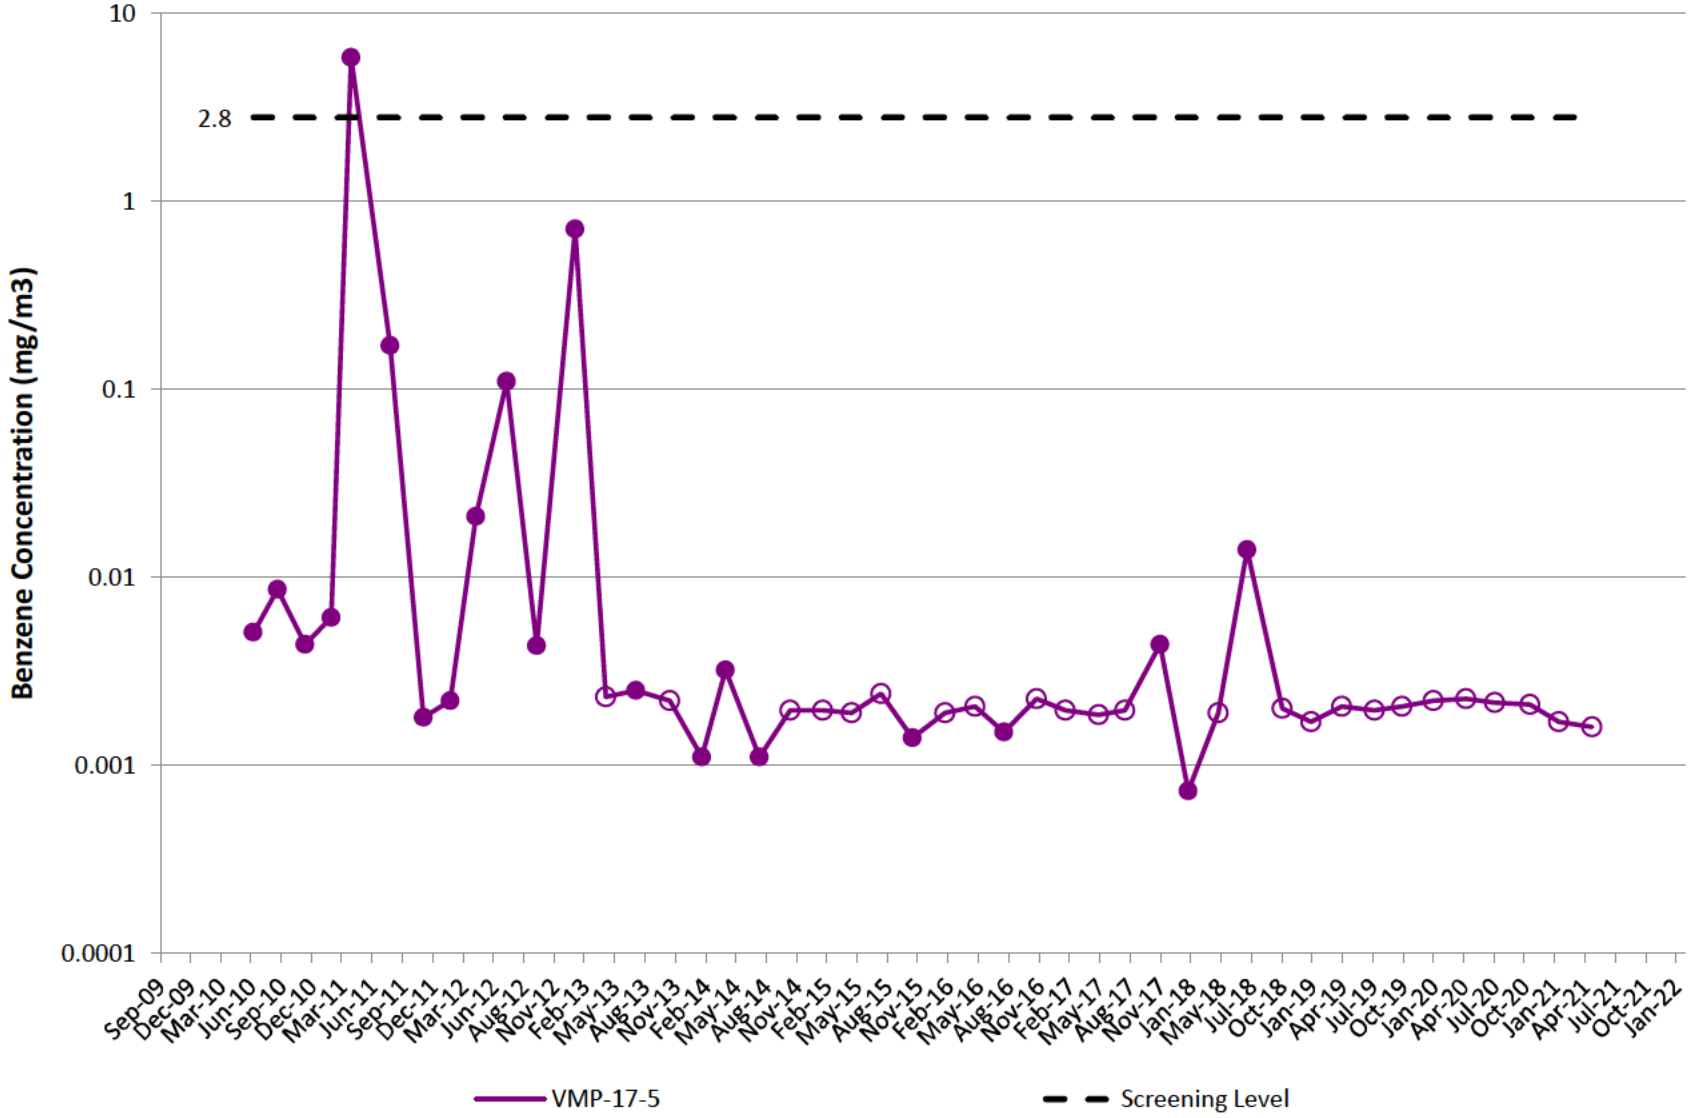


VMP-18

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

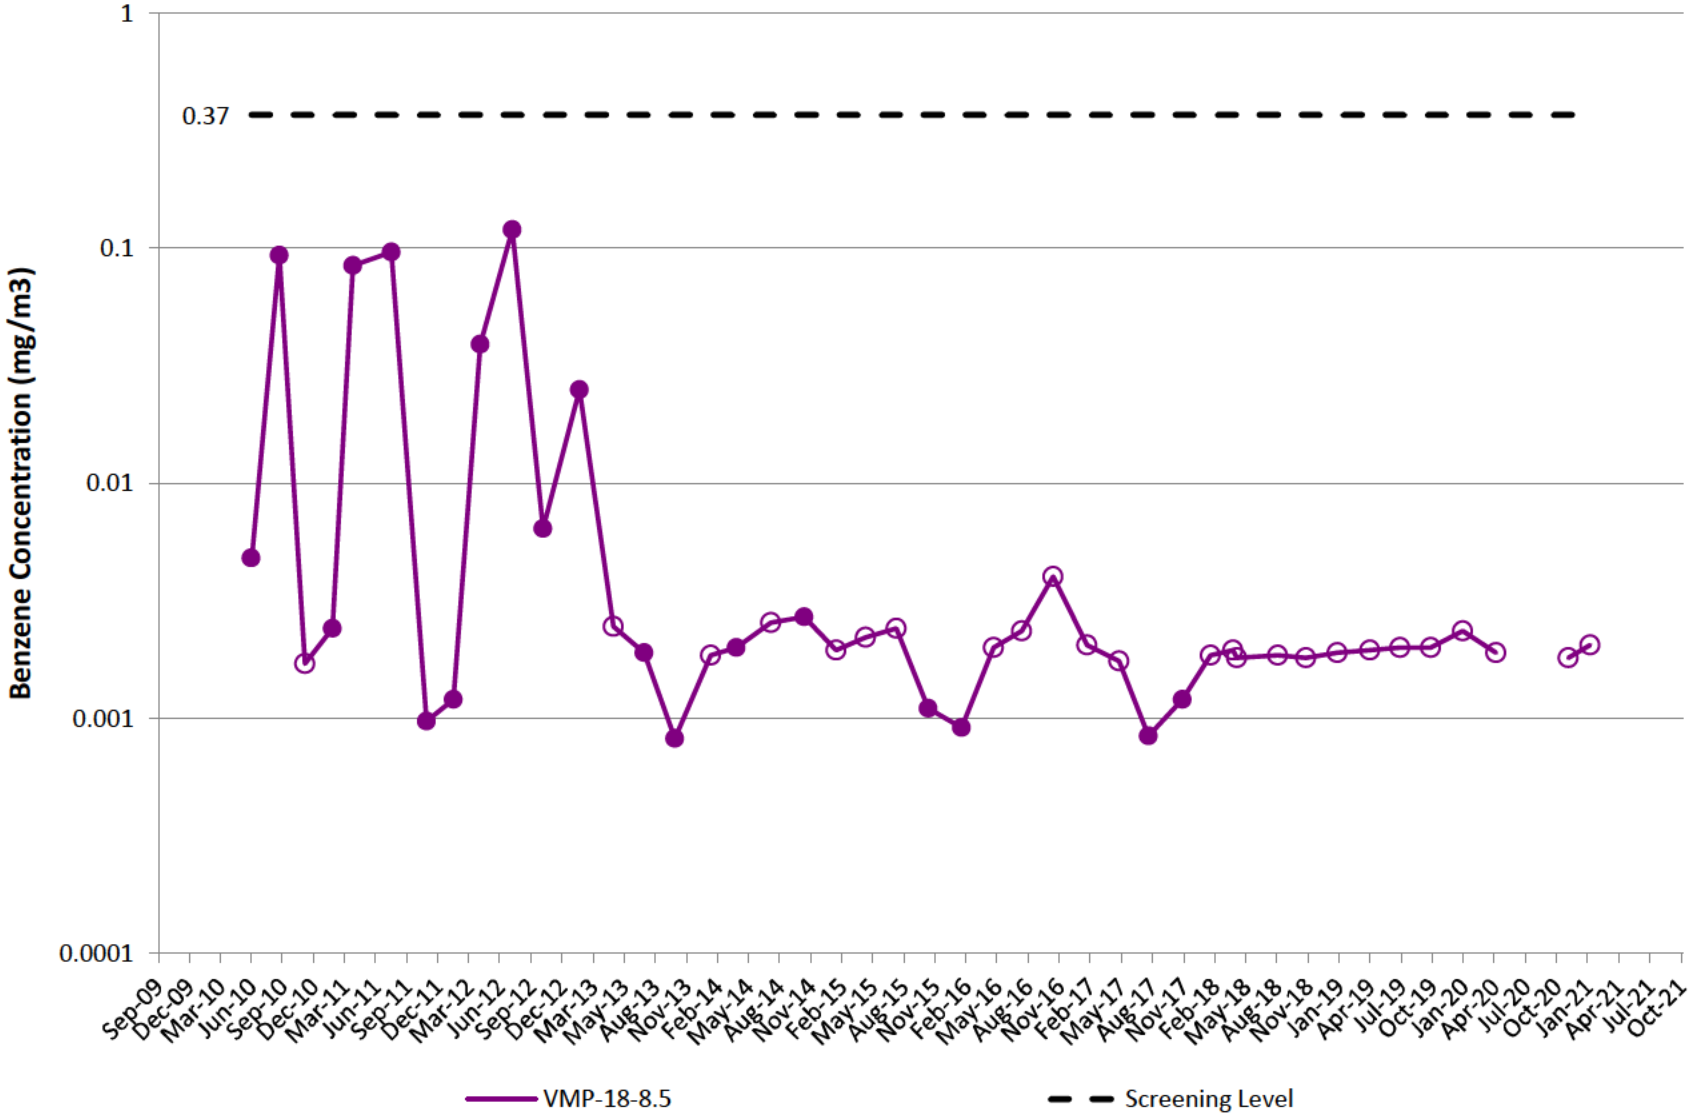


VMP-19

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

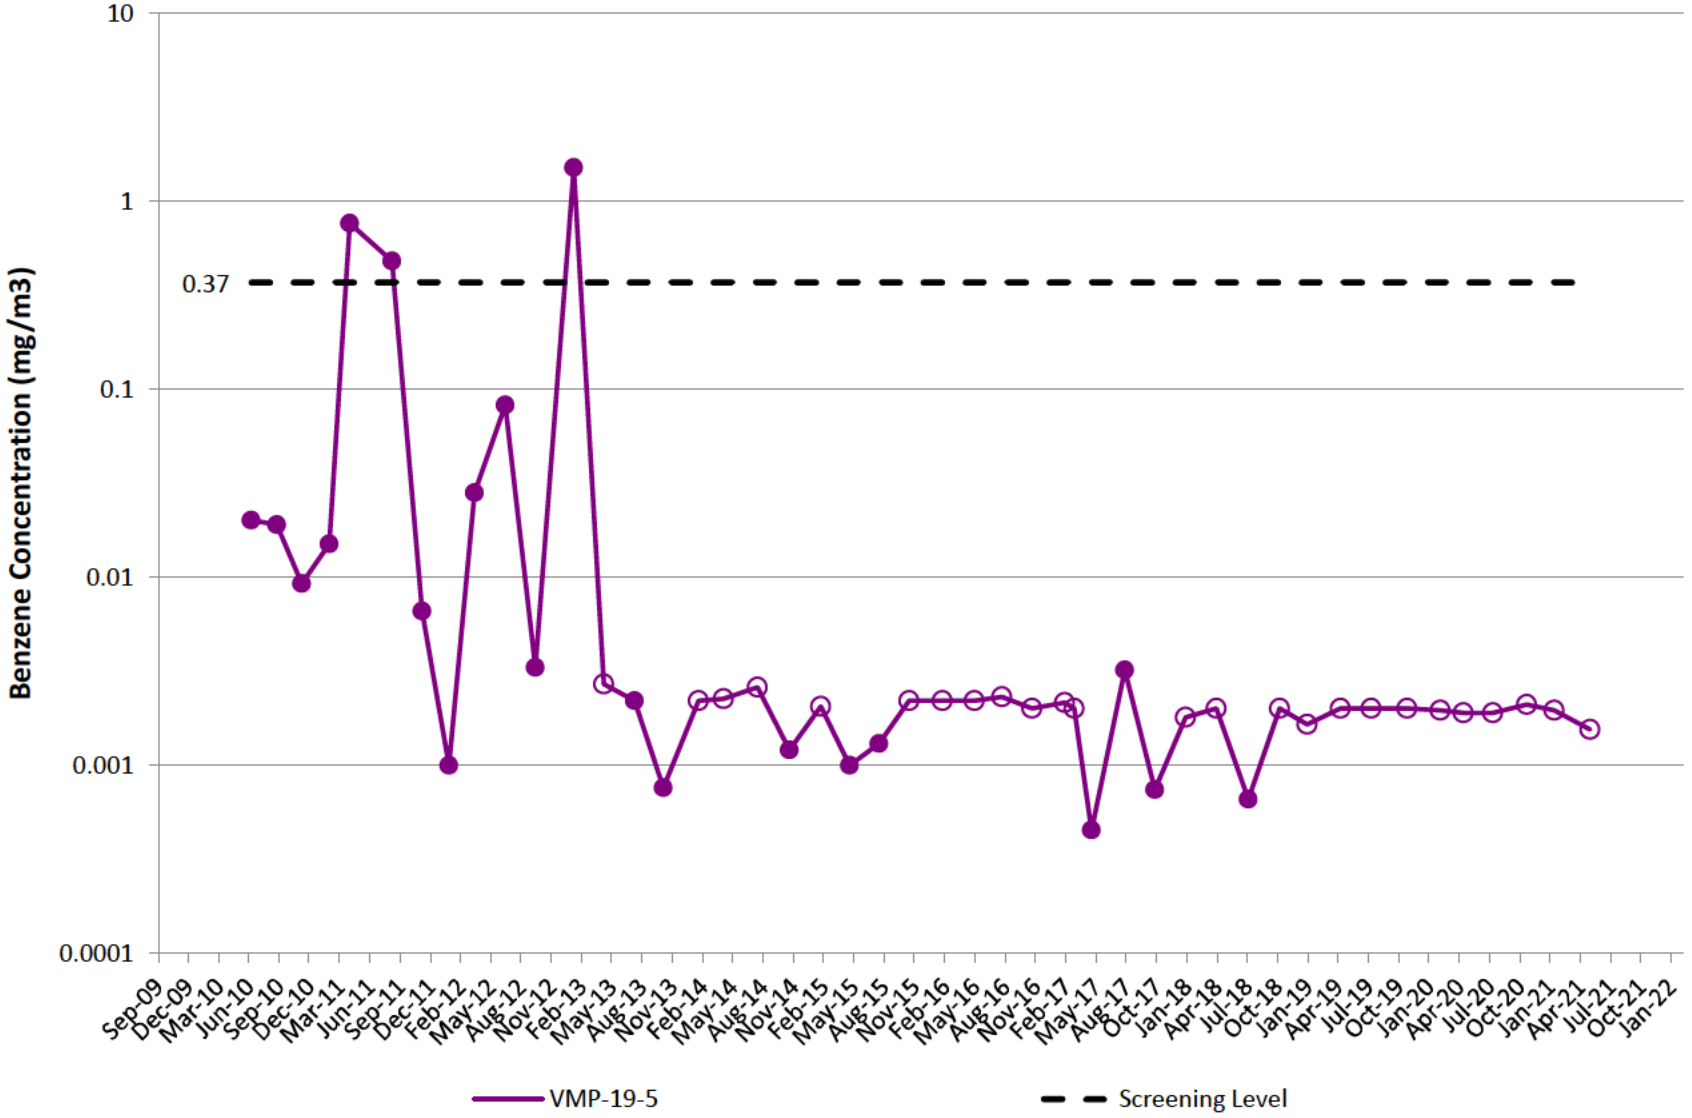


VMP-20

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

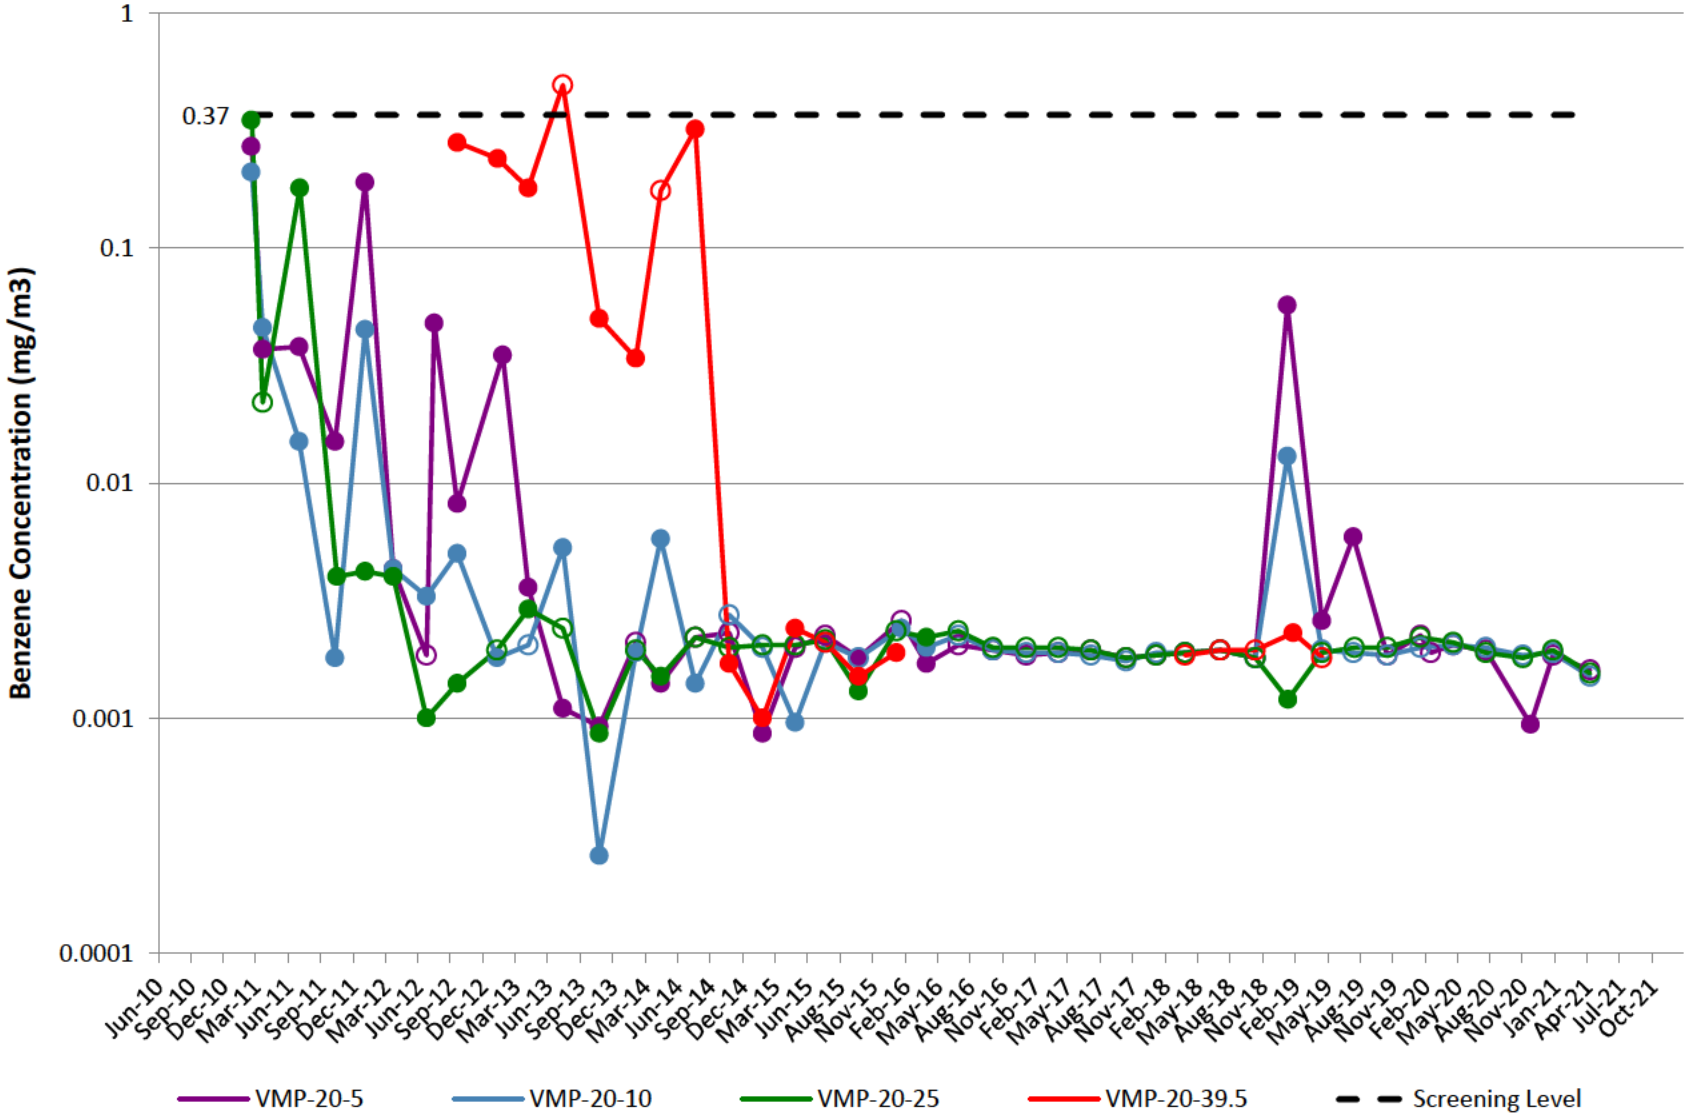


VMP-21

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

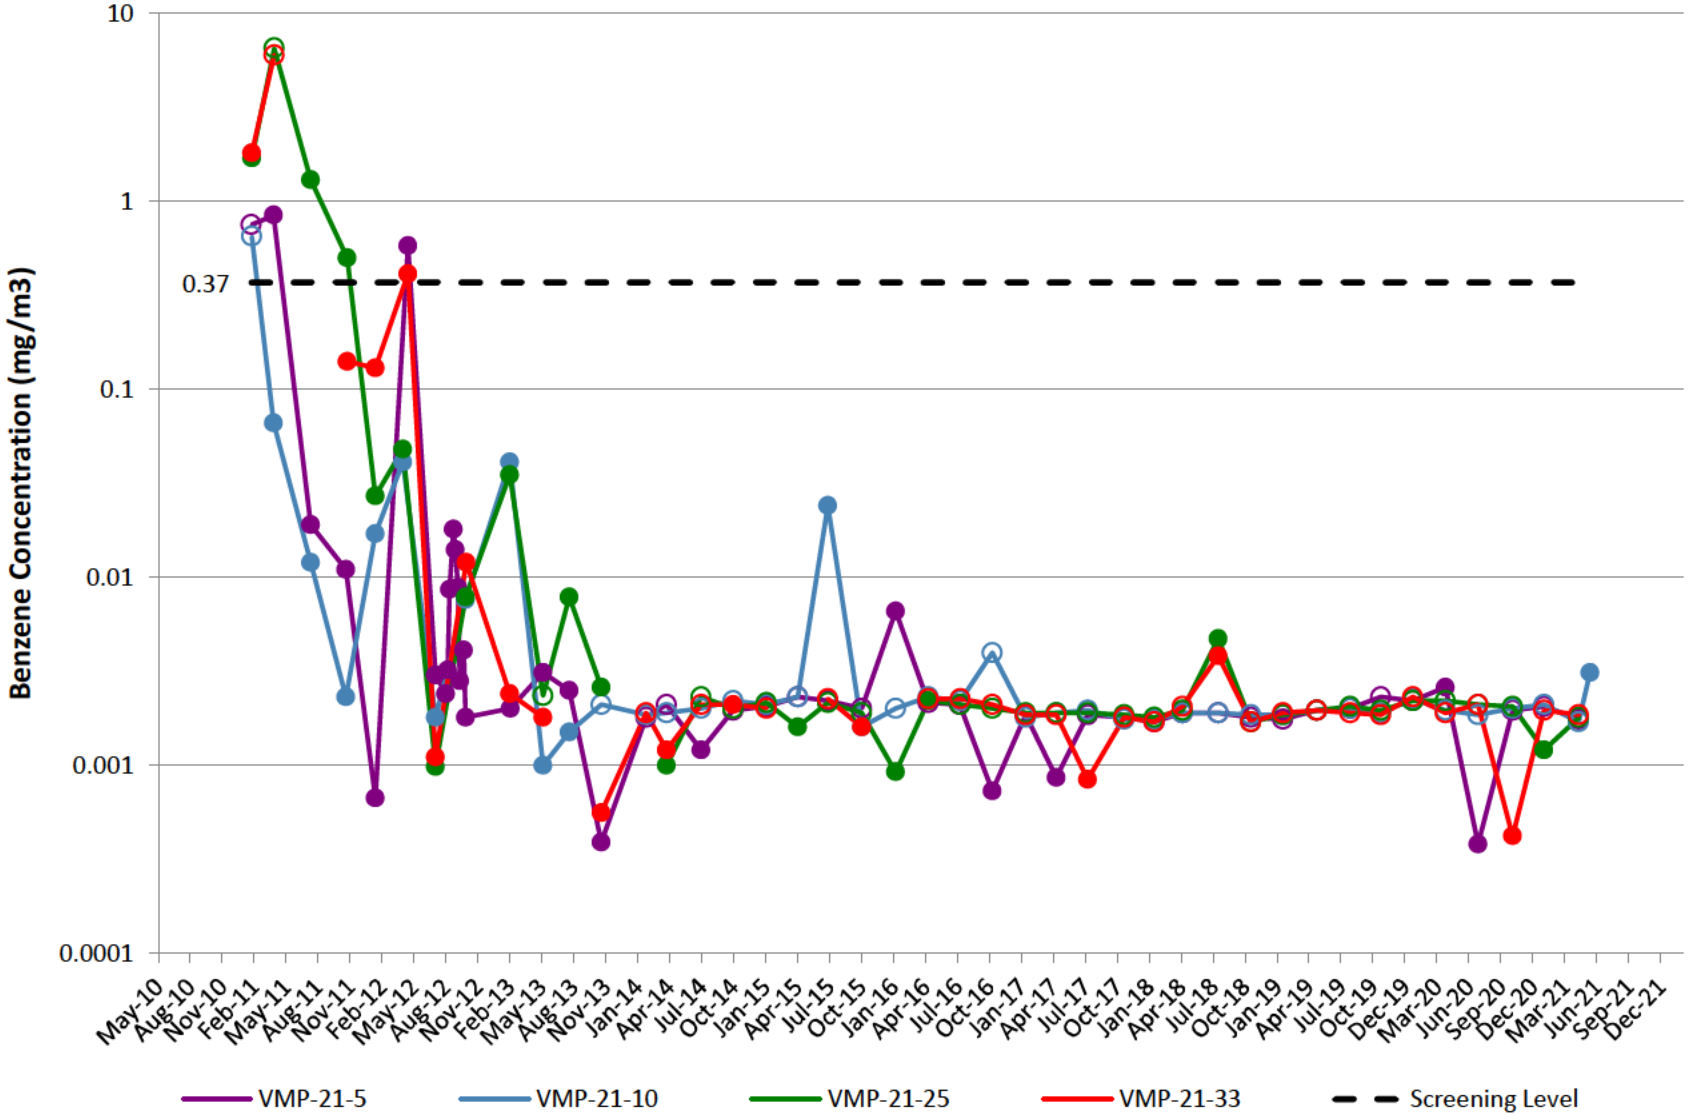


VMP-22

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

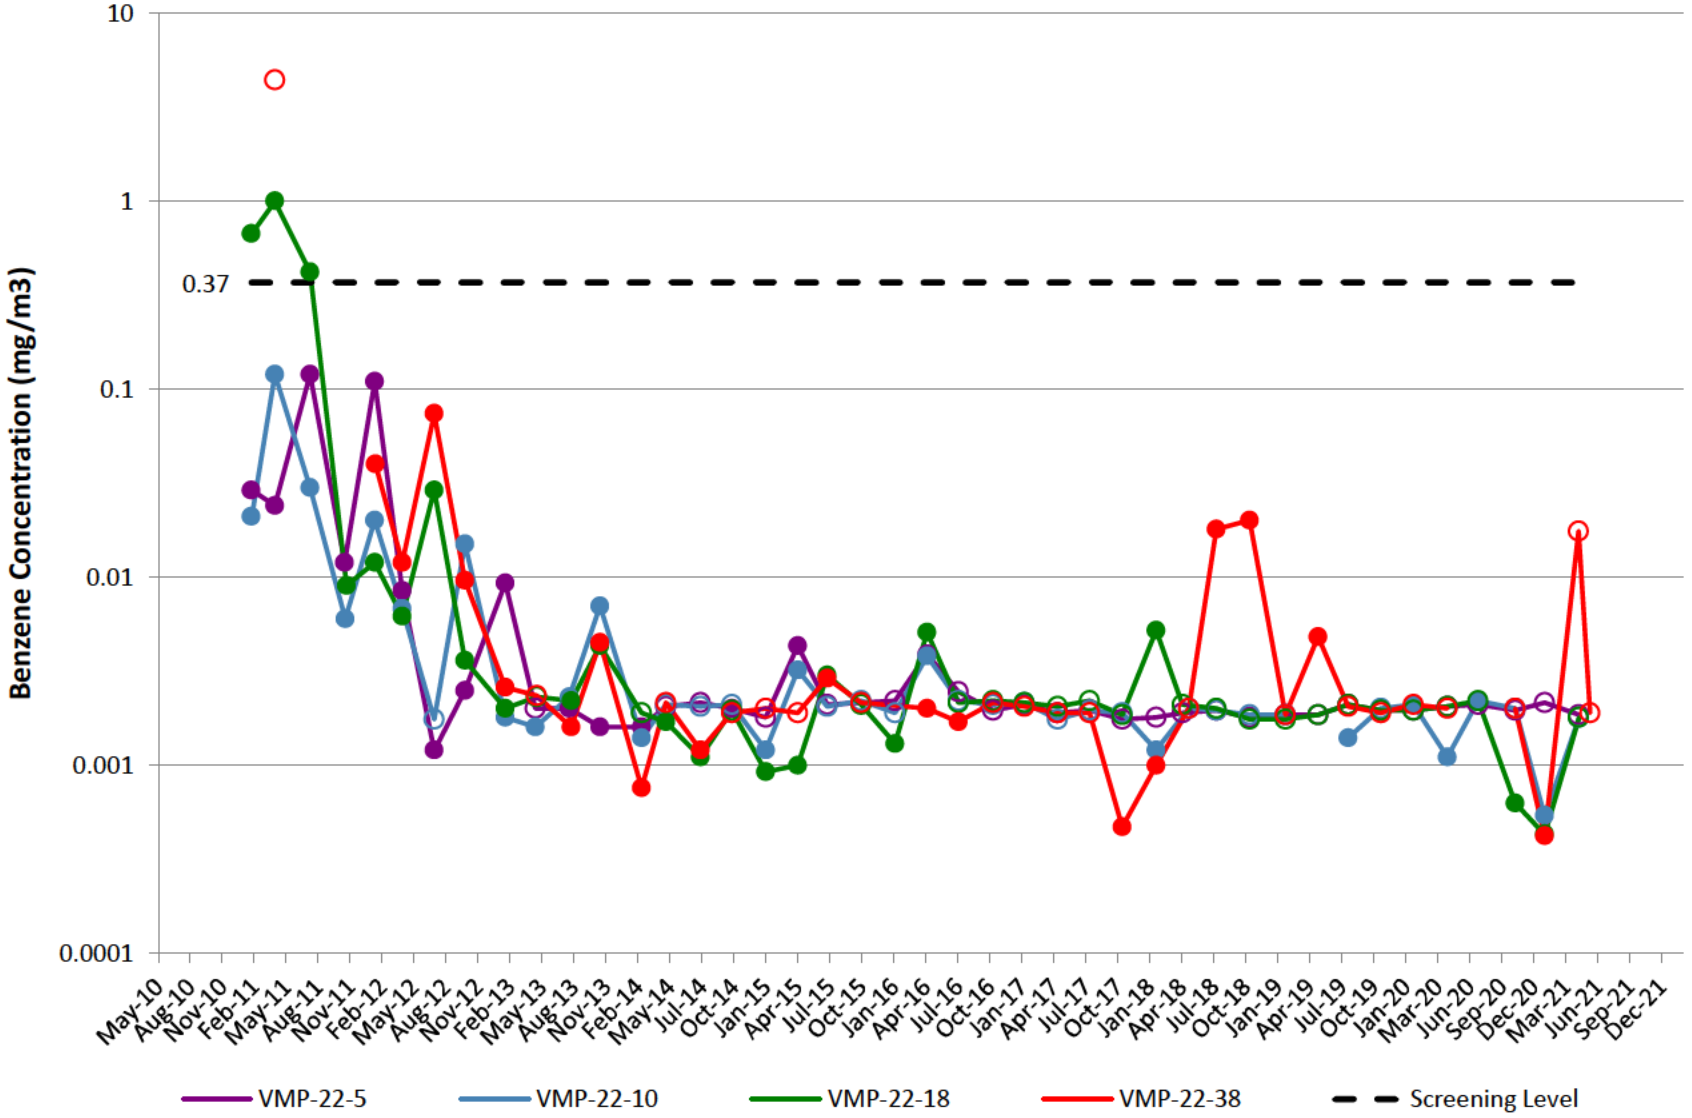


VMP-23

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

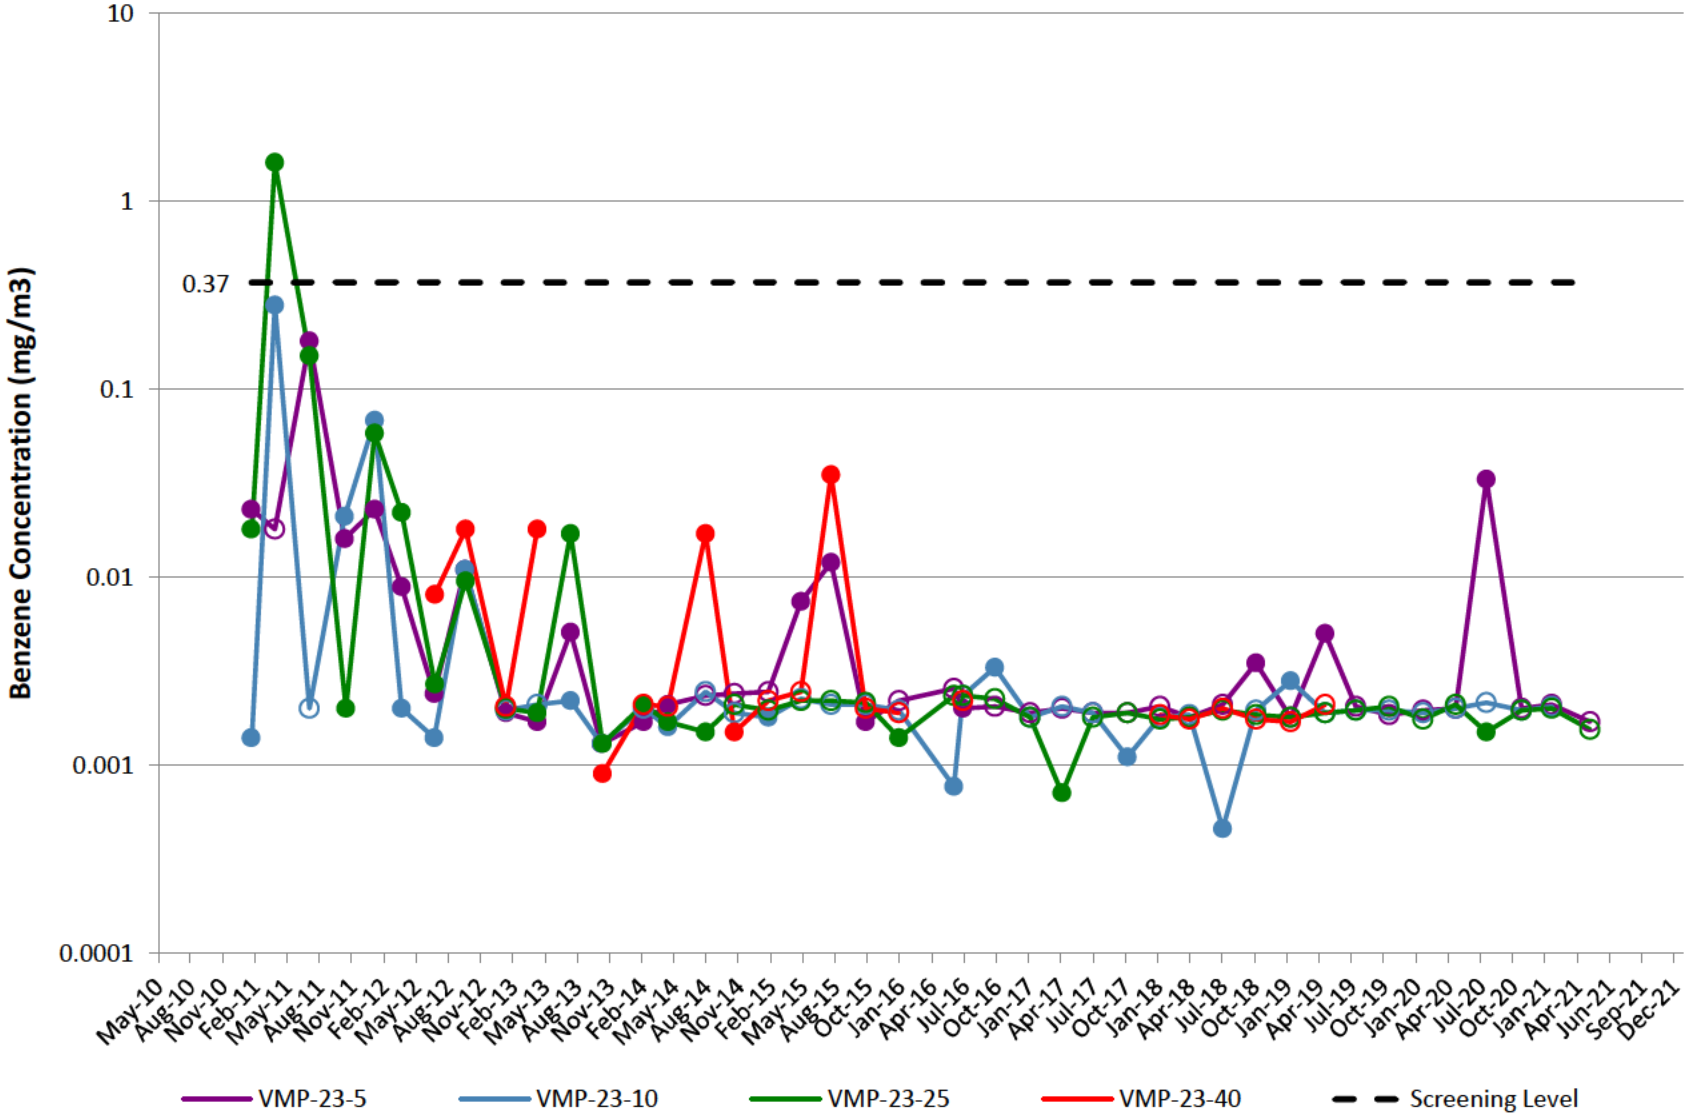


VMP-24

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

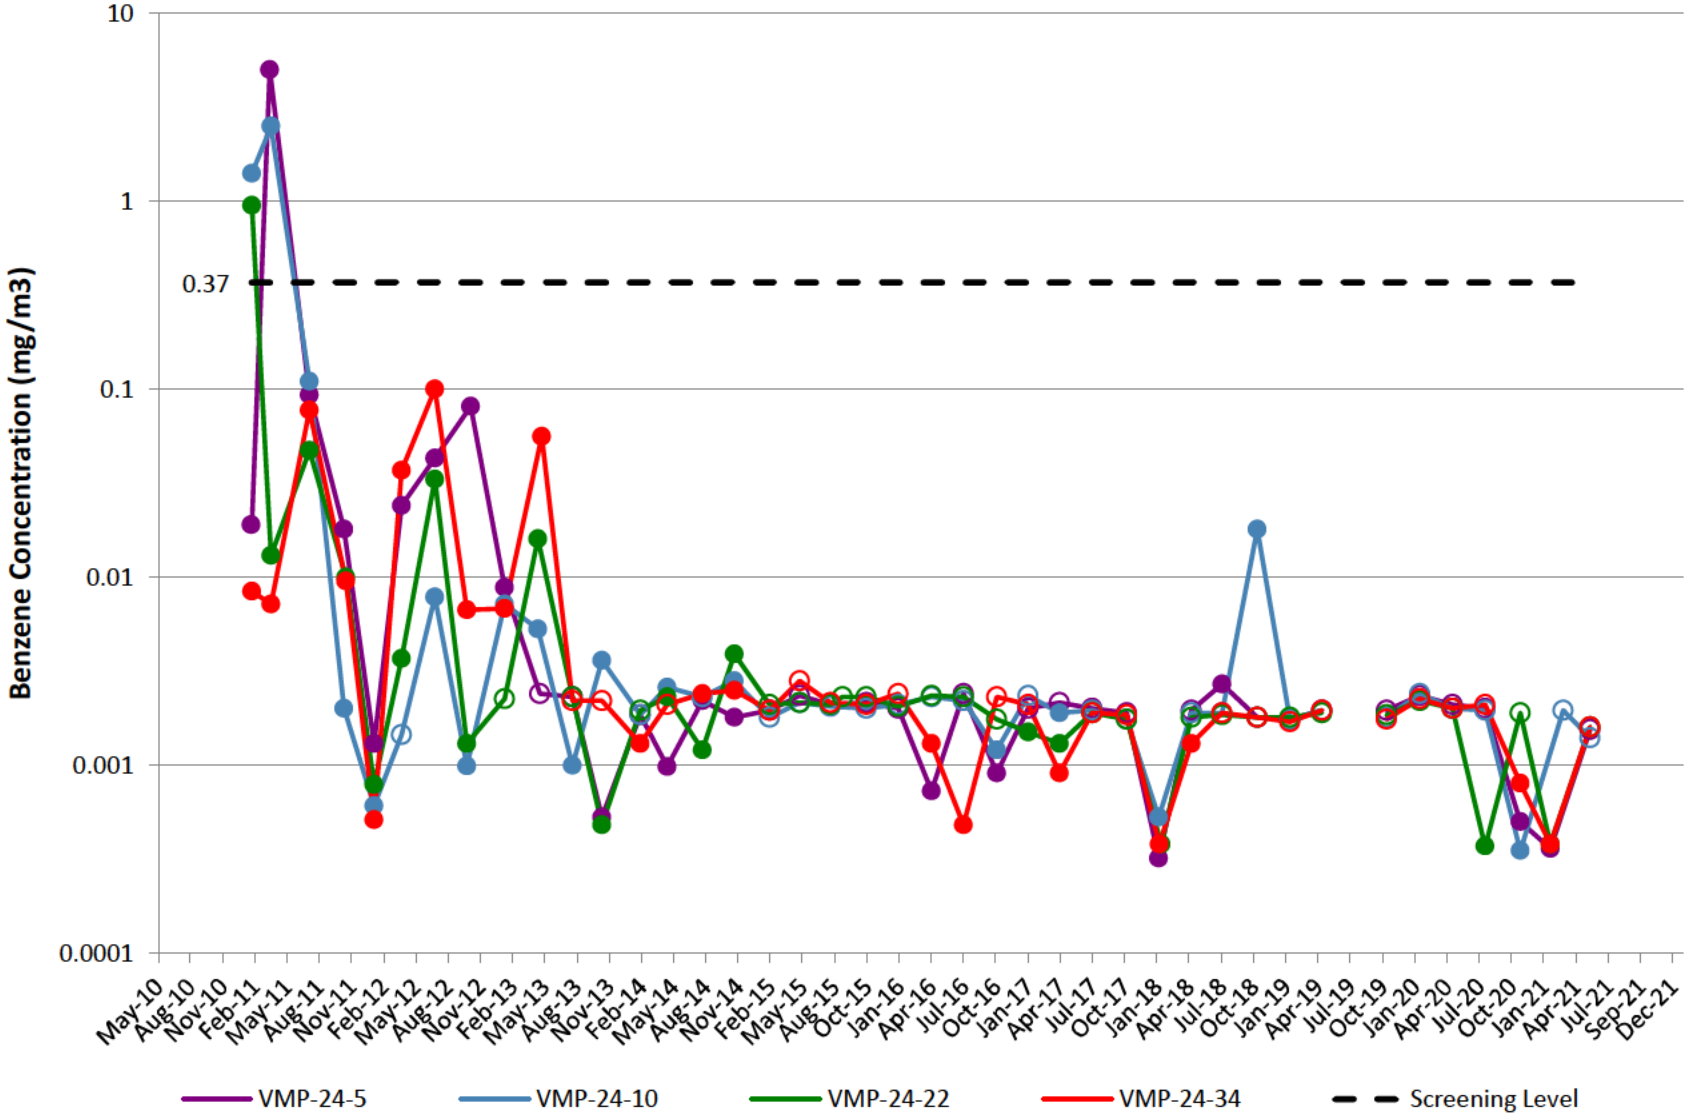


VMP-25

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. Effective 2Q18, samples will no longer be collected at VMP-25-31 due to port integrity.

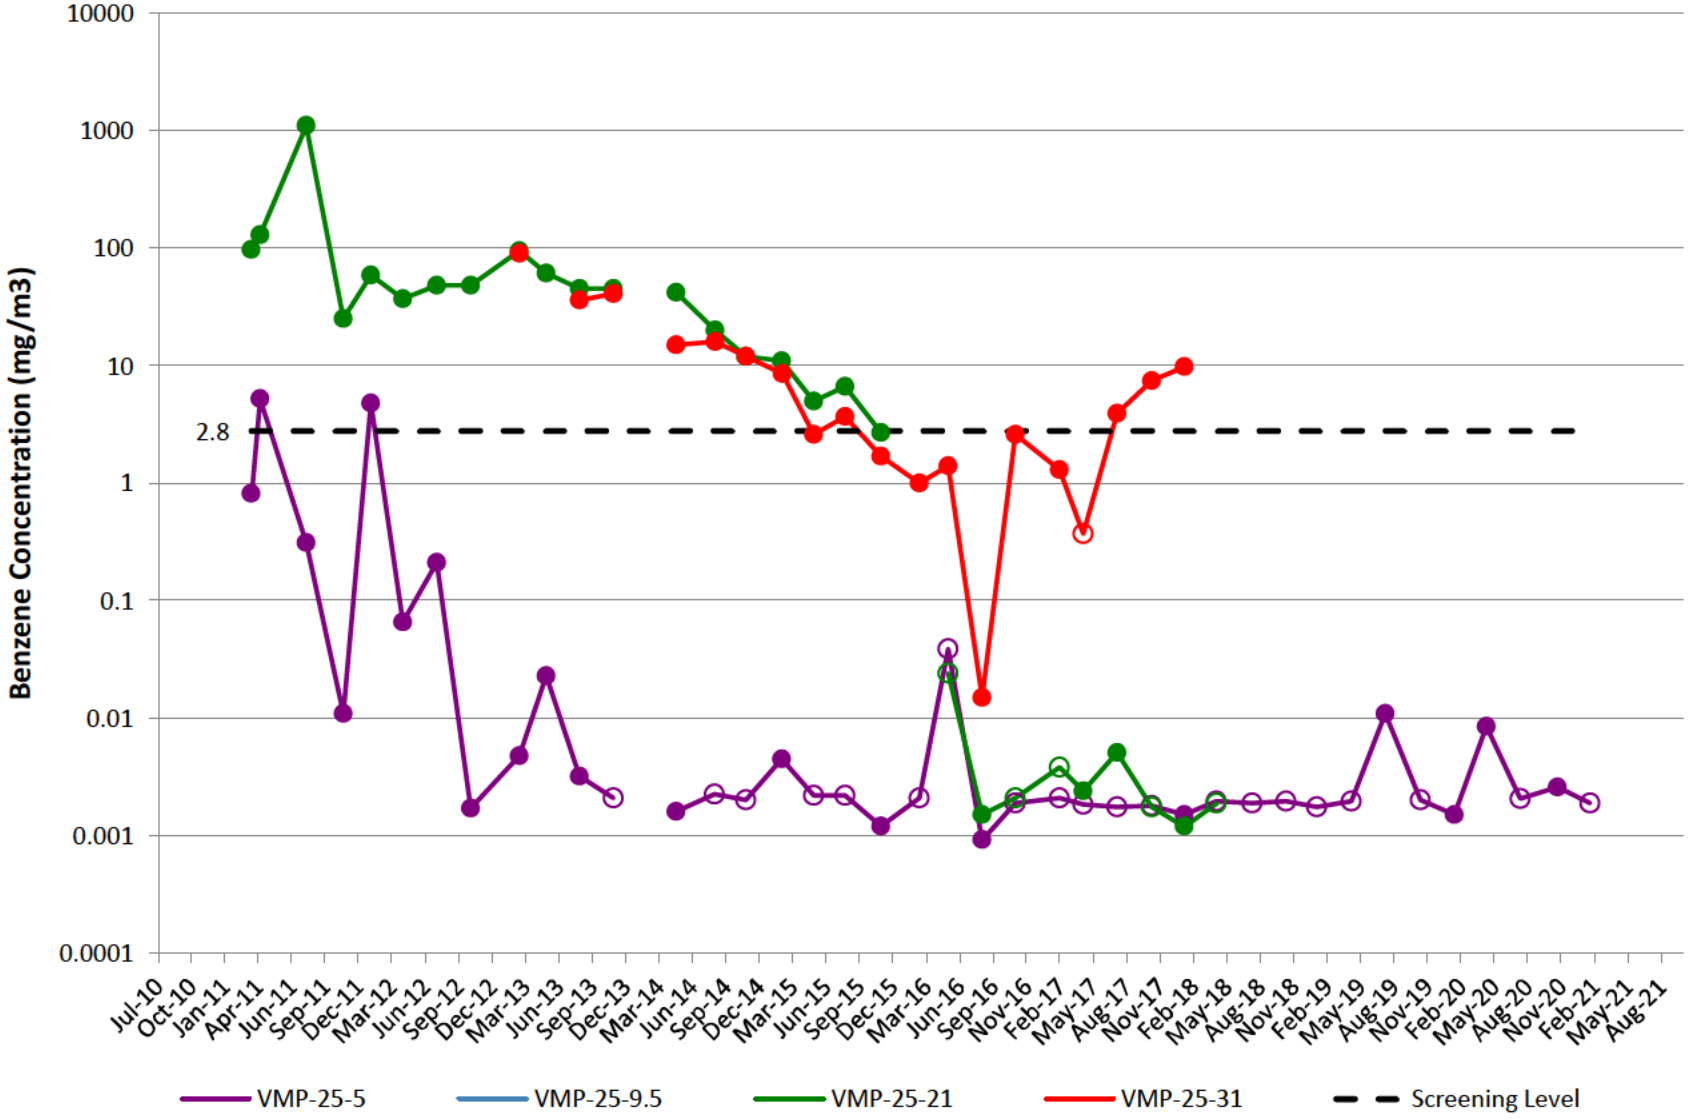


VMP-29

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

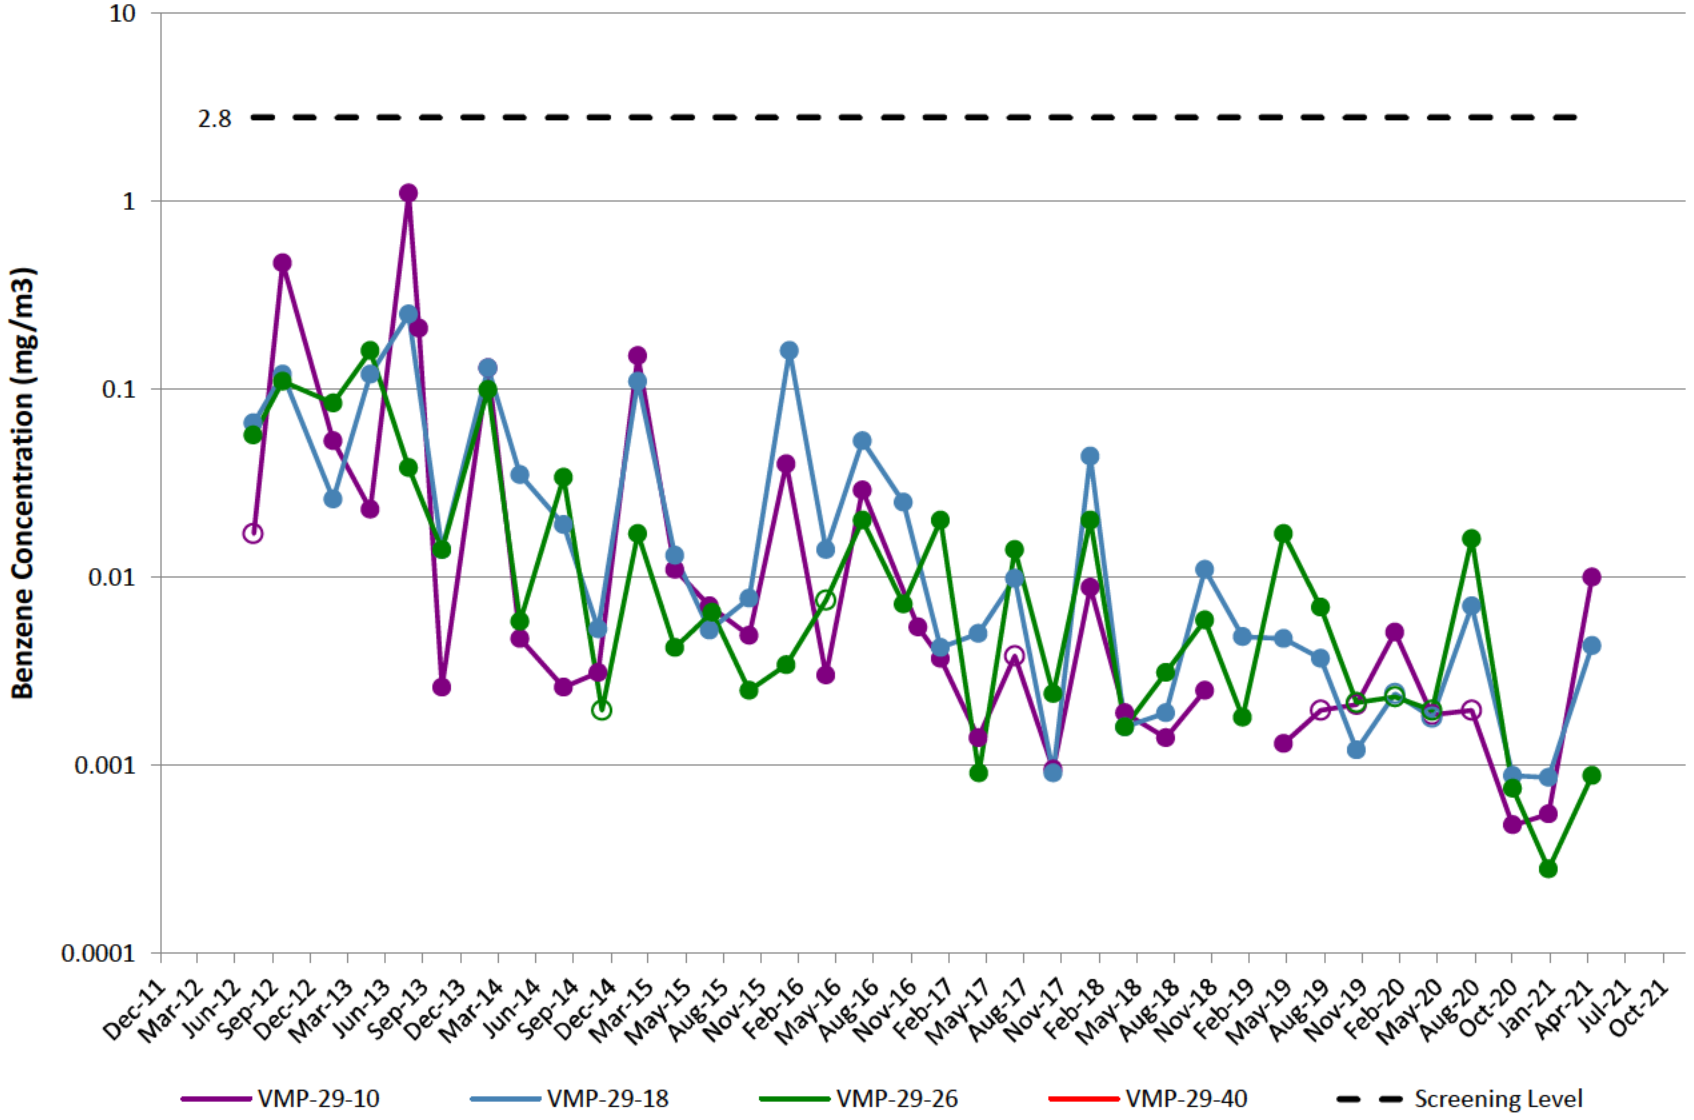


VMP-30

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

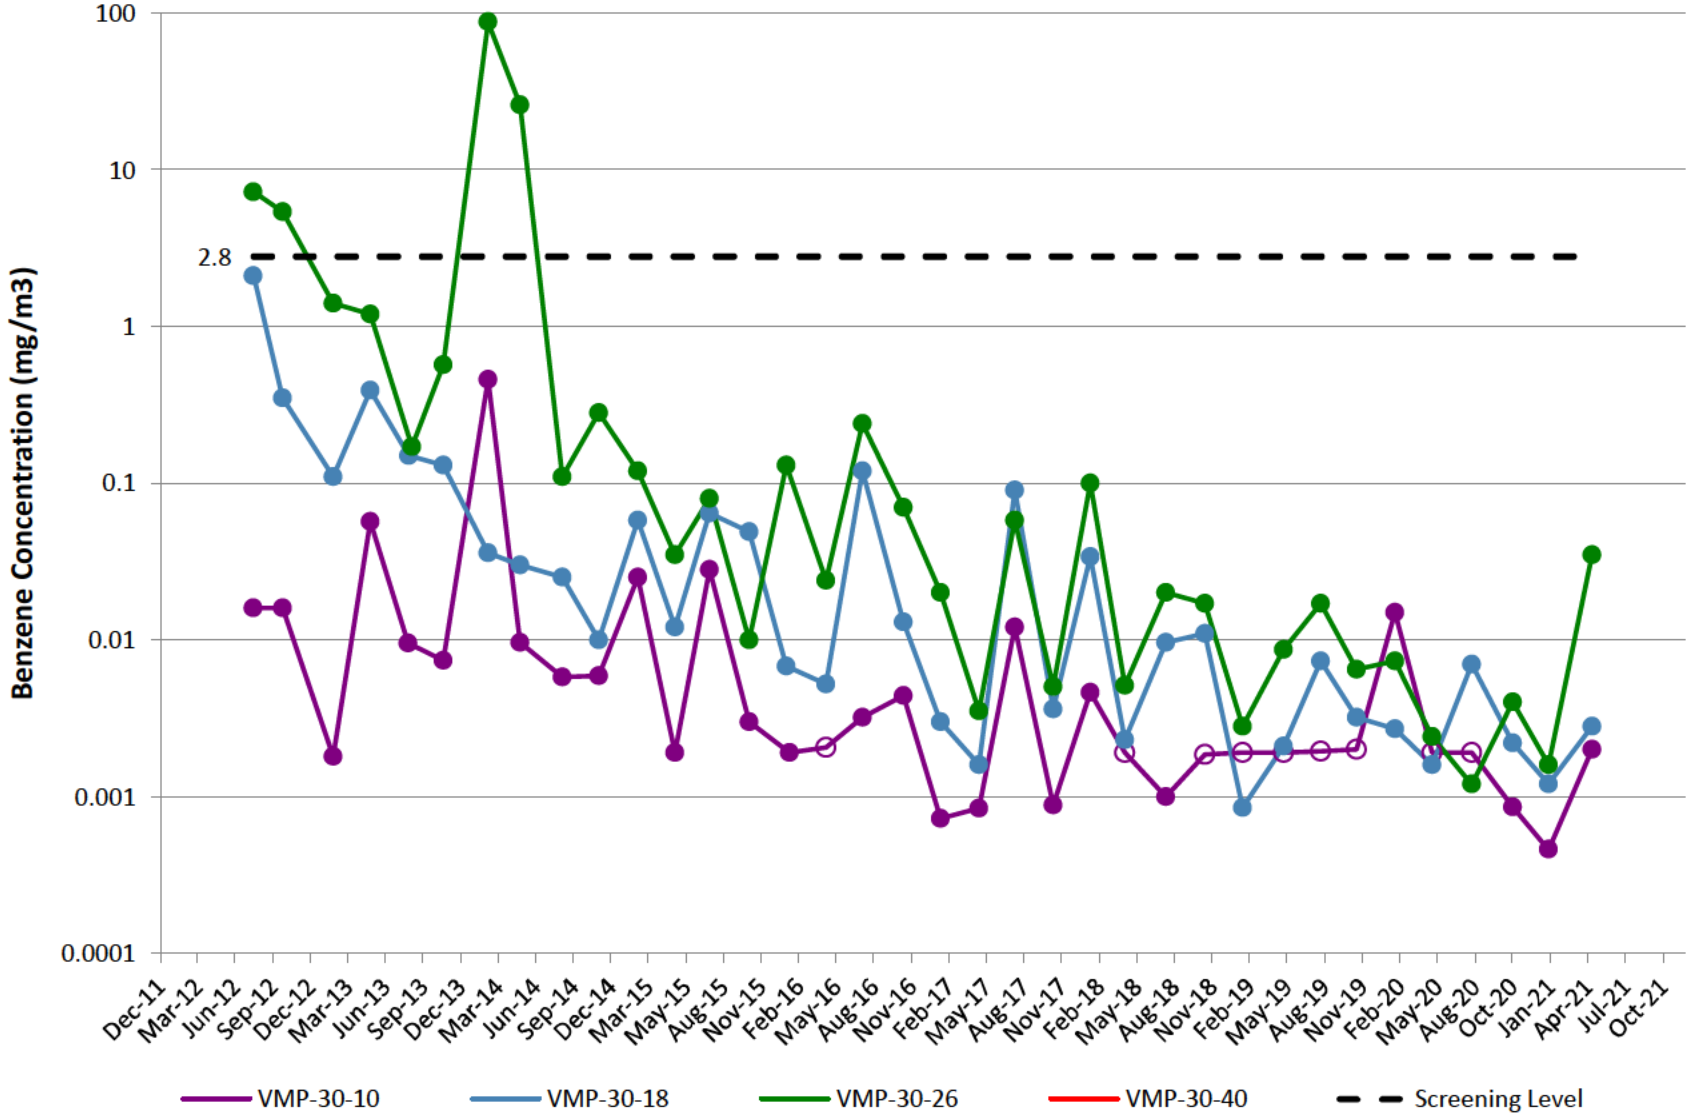


VMP-31

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. VMP-31 was abandoned in 2Q14 after persistent helium issues and replaced by VMP-56.

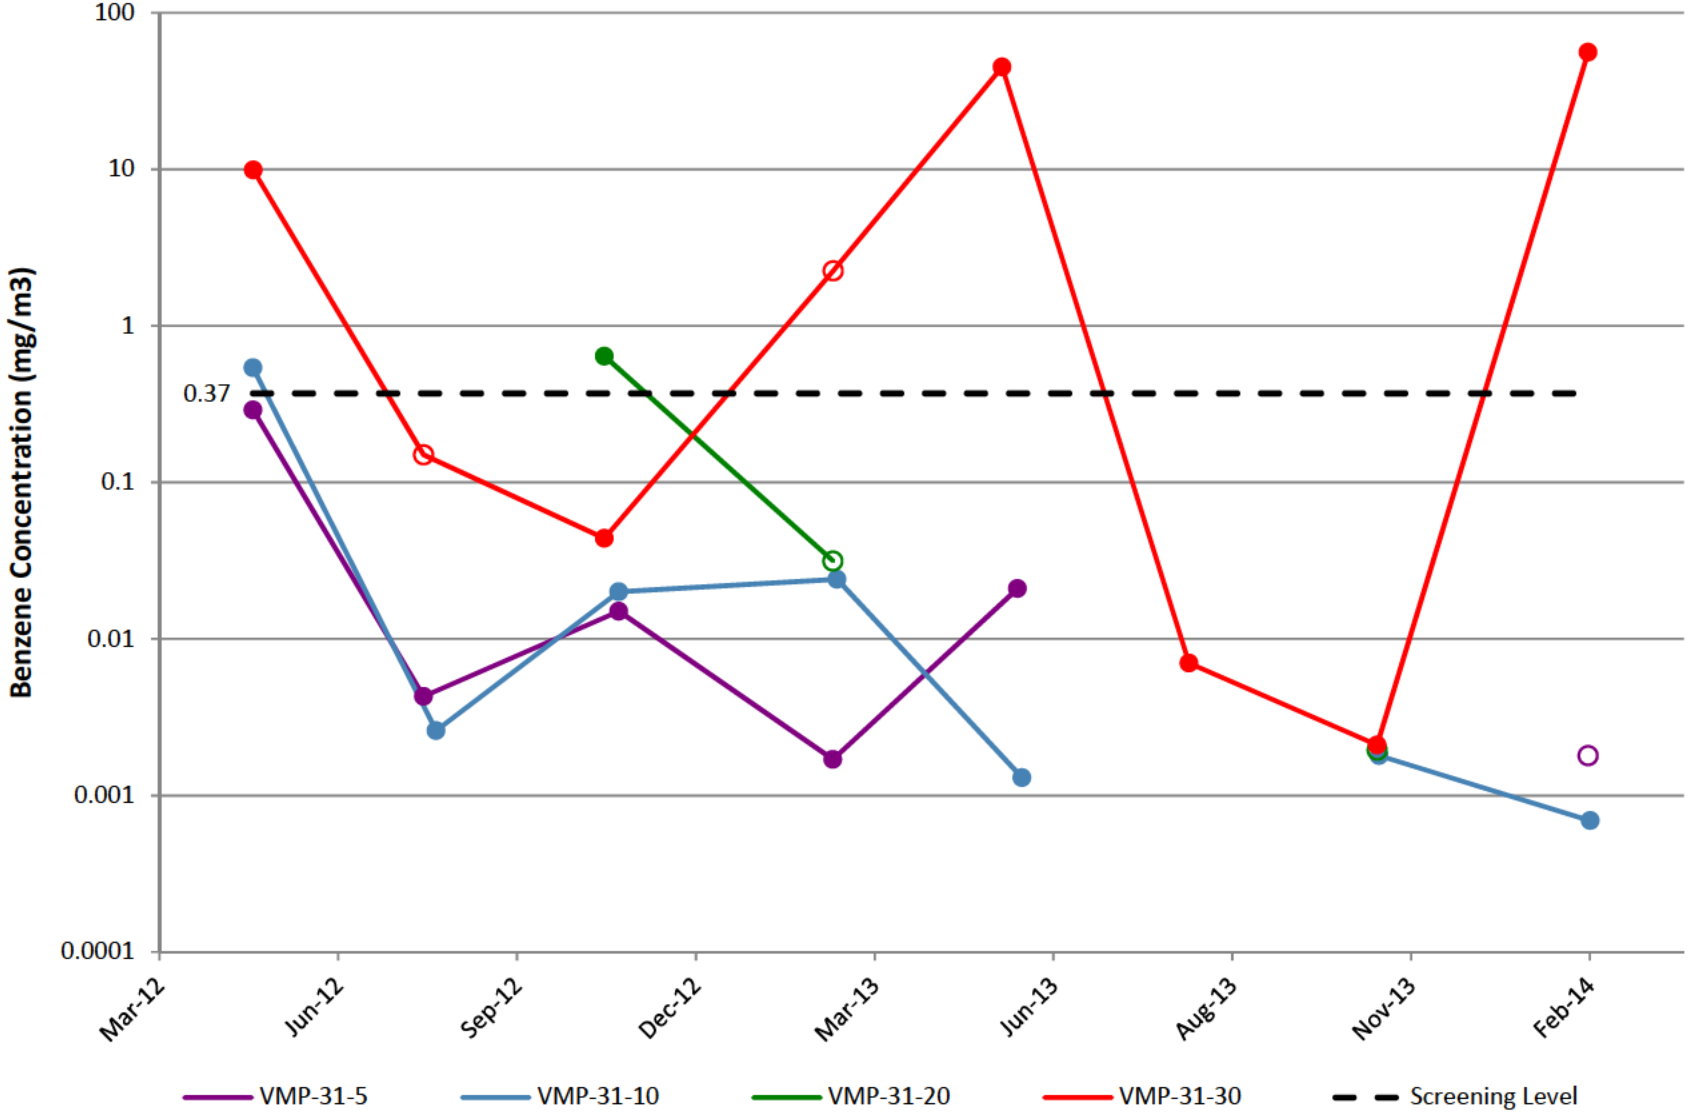


VMP-32

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

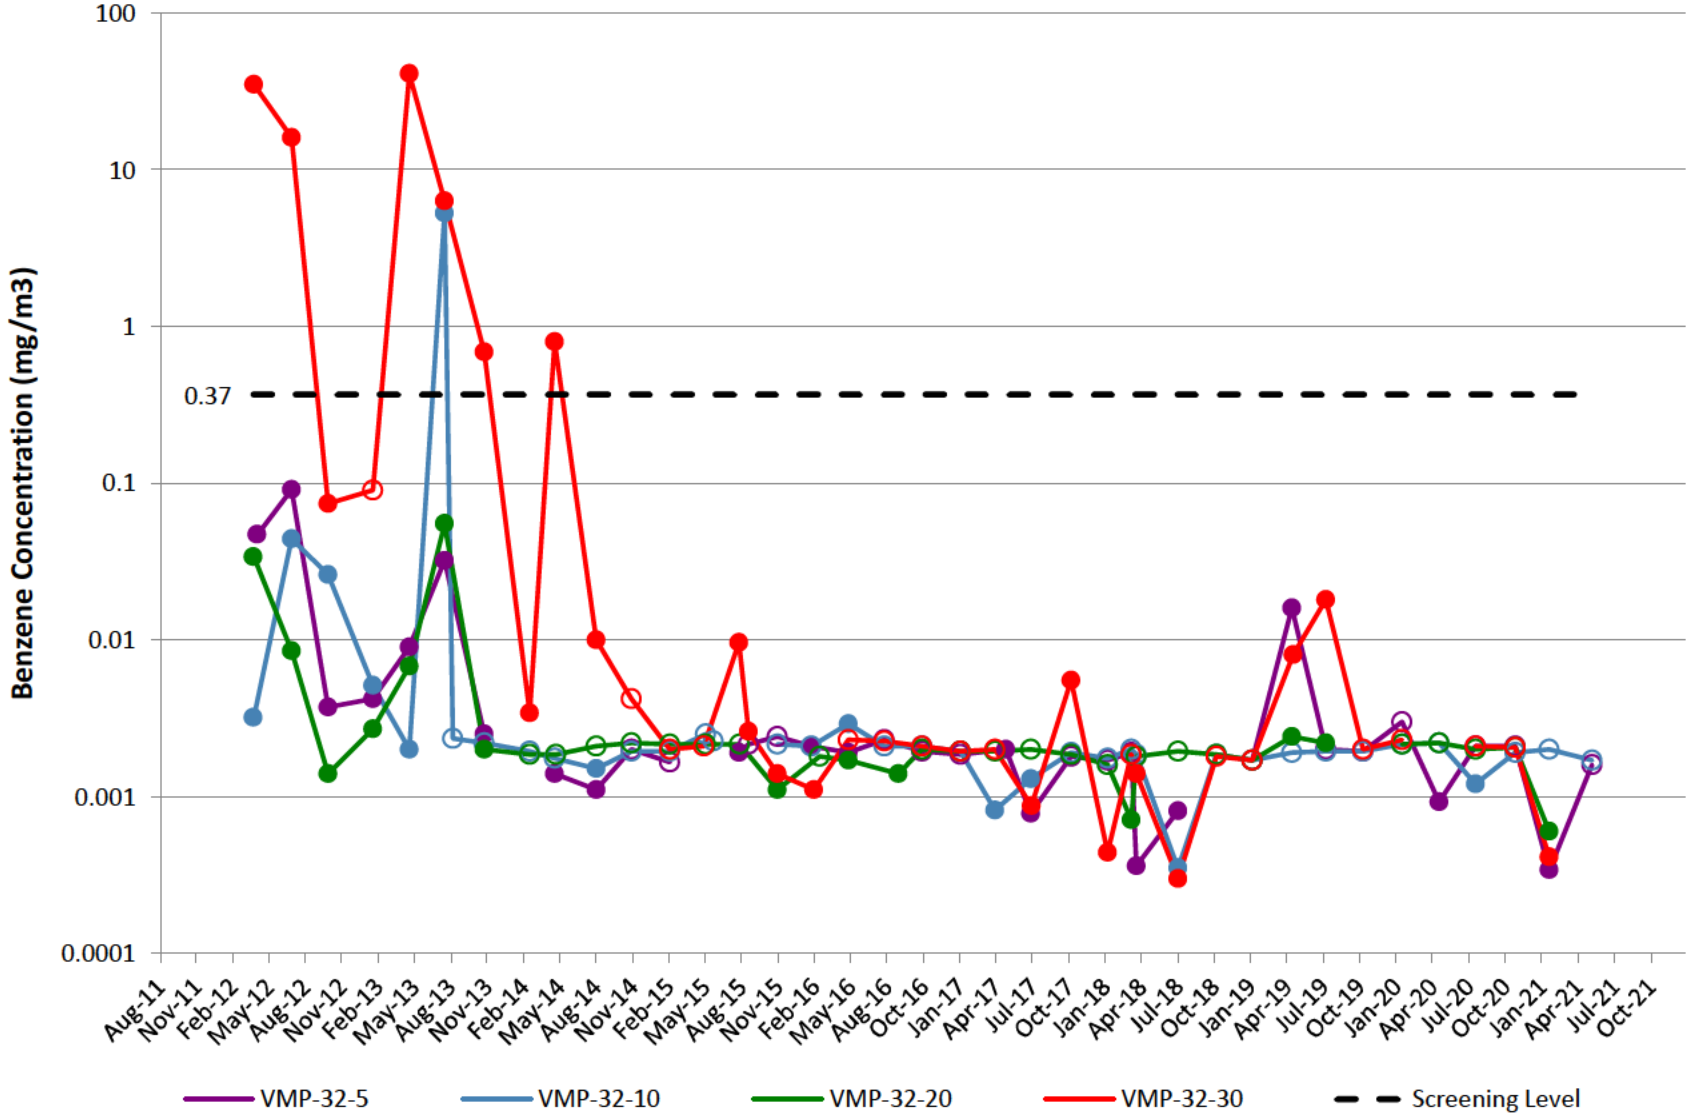


VMP-41

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

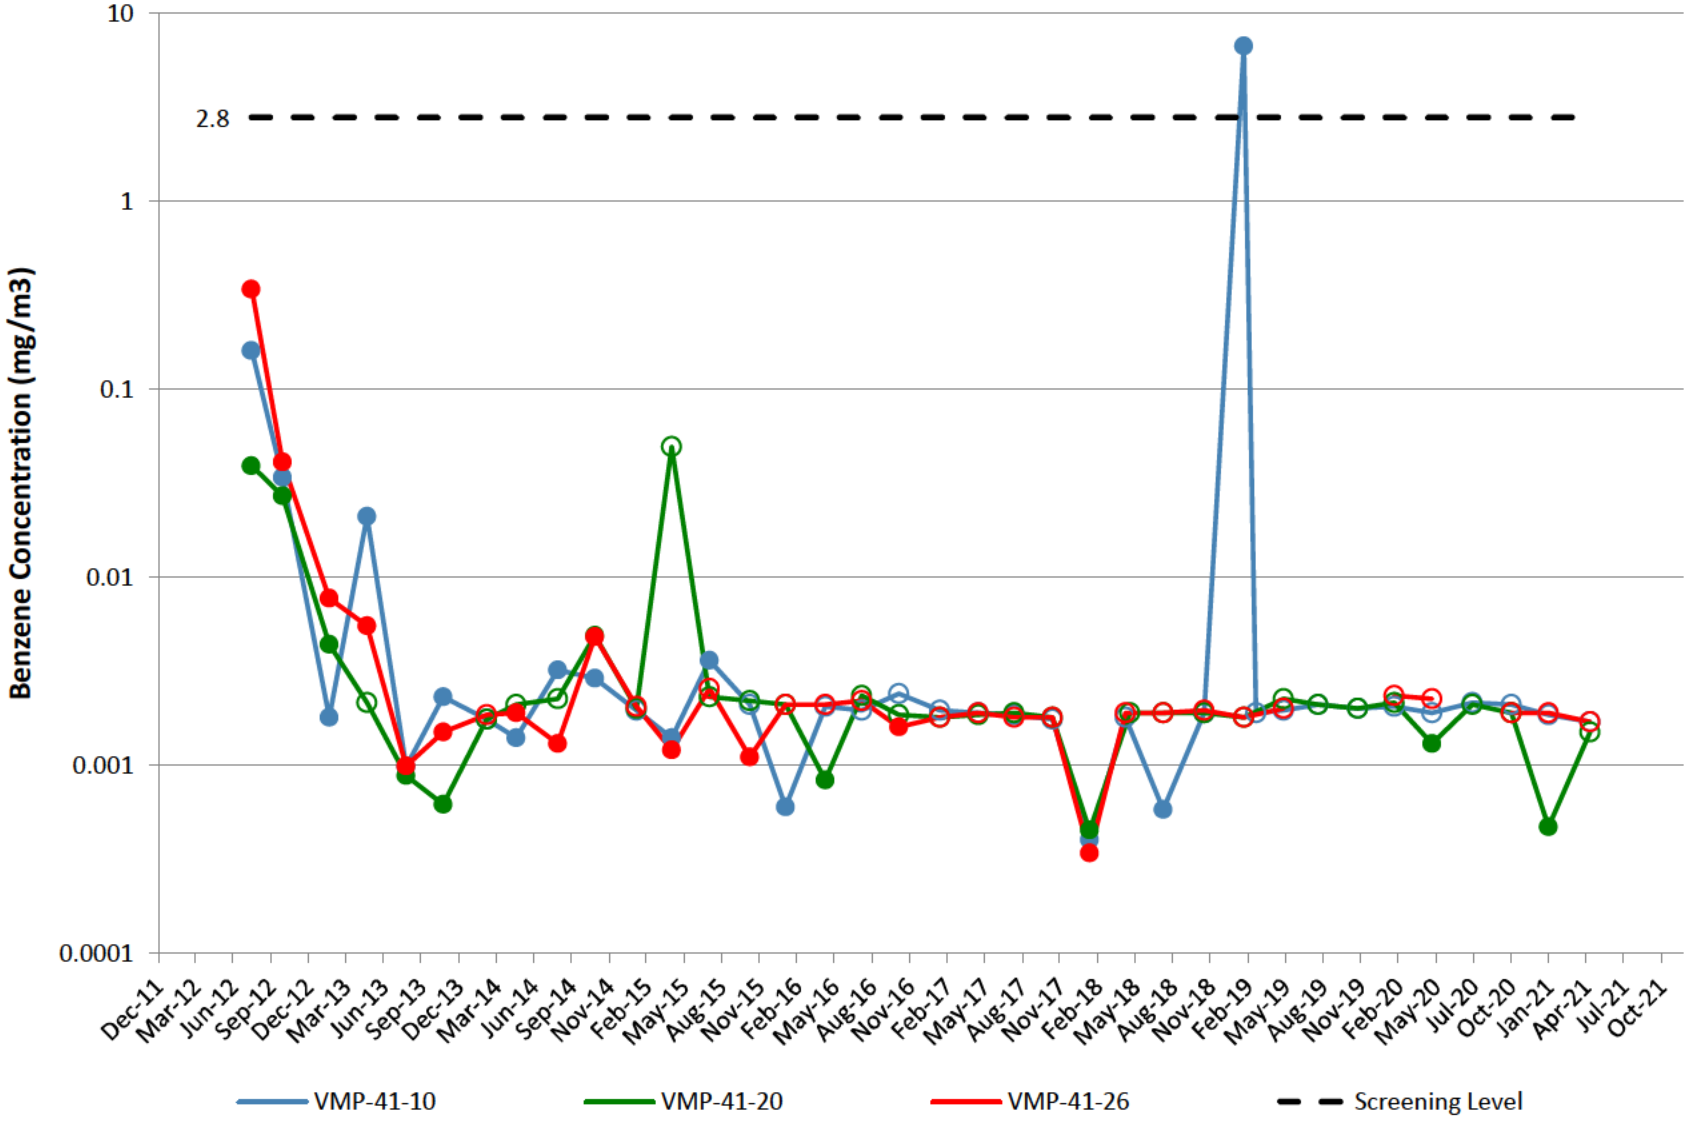


VMP-42

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

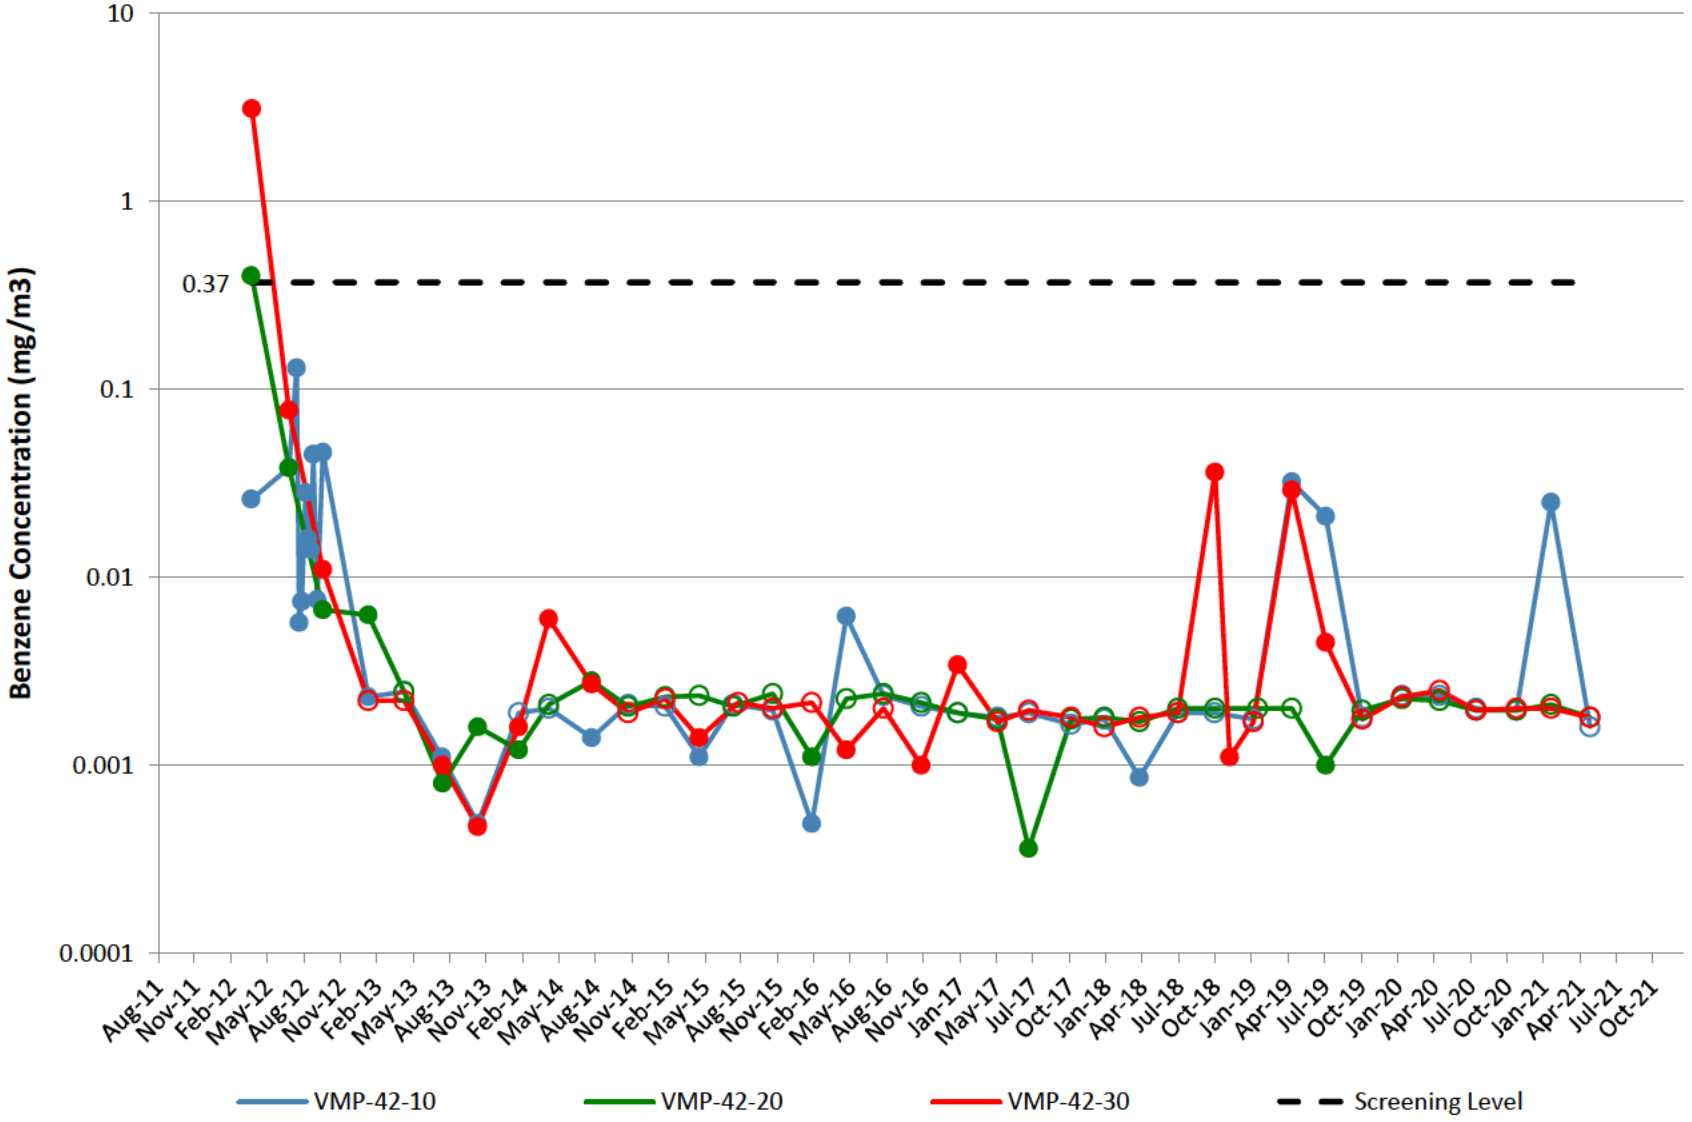


VMP-43

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

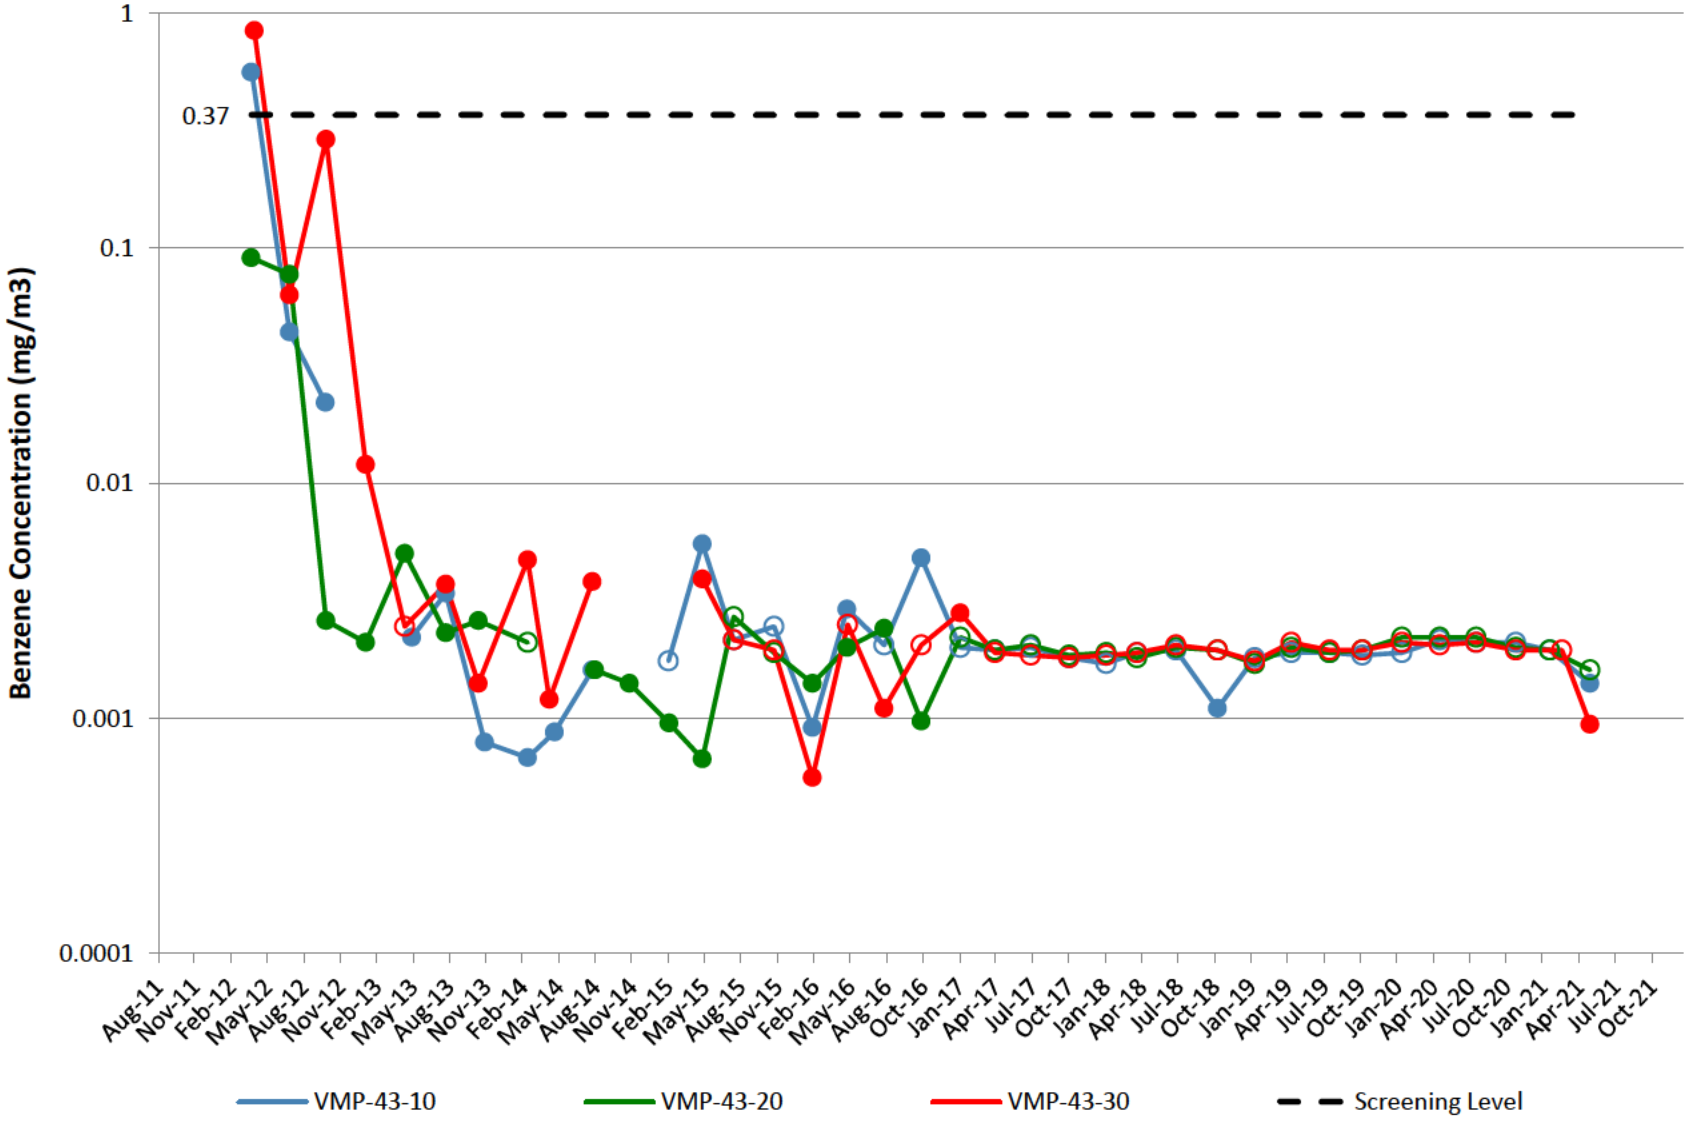


VMP-44

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. **Effective 4Q20, samples will no longer be collected at VMP-44 due to port integrity.**

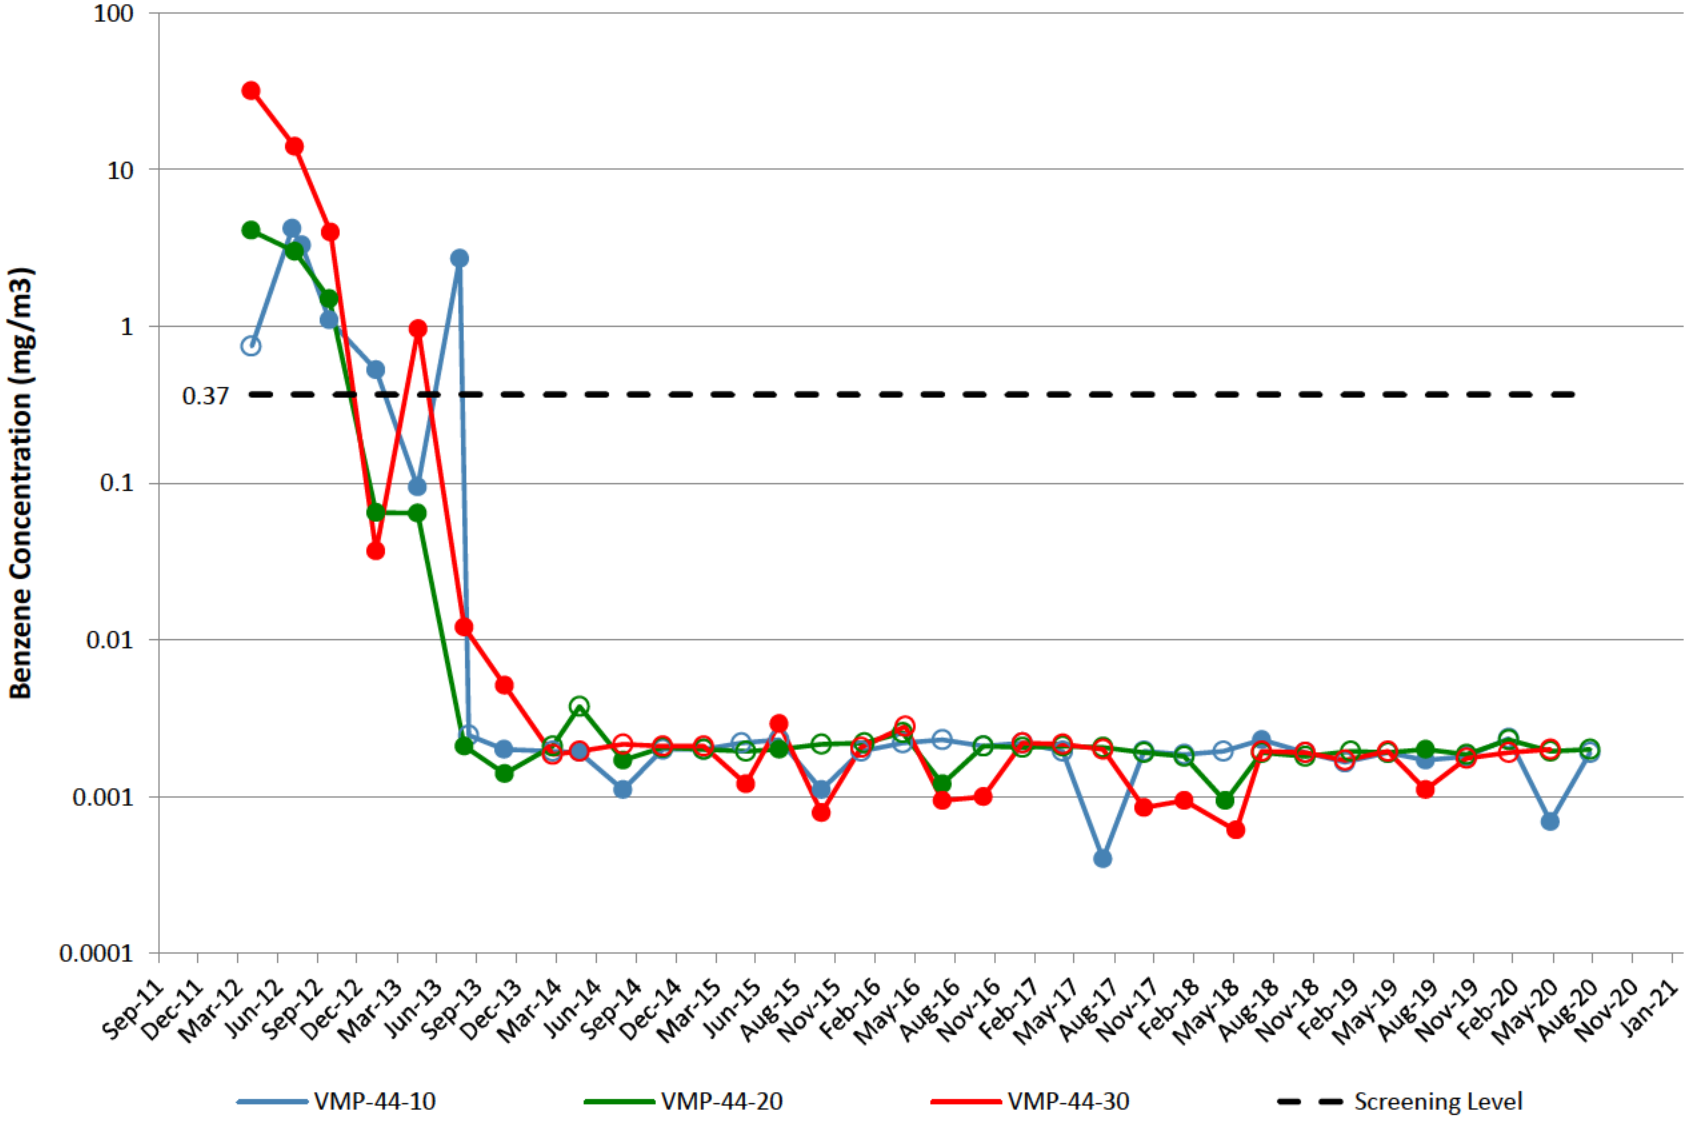


VMP-45

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

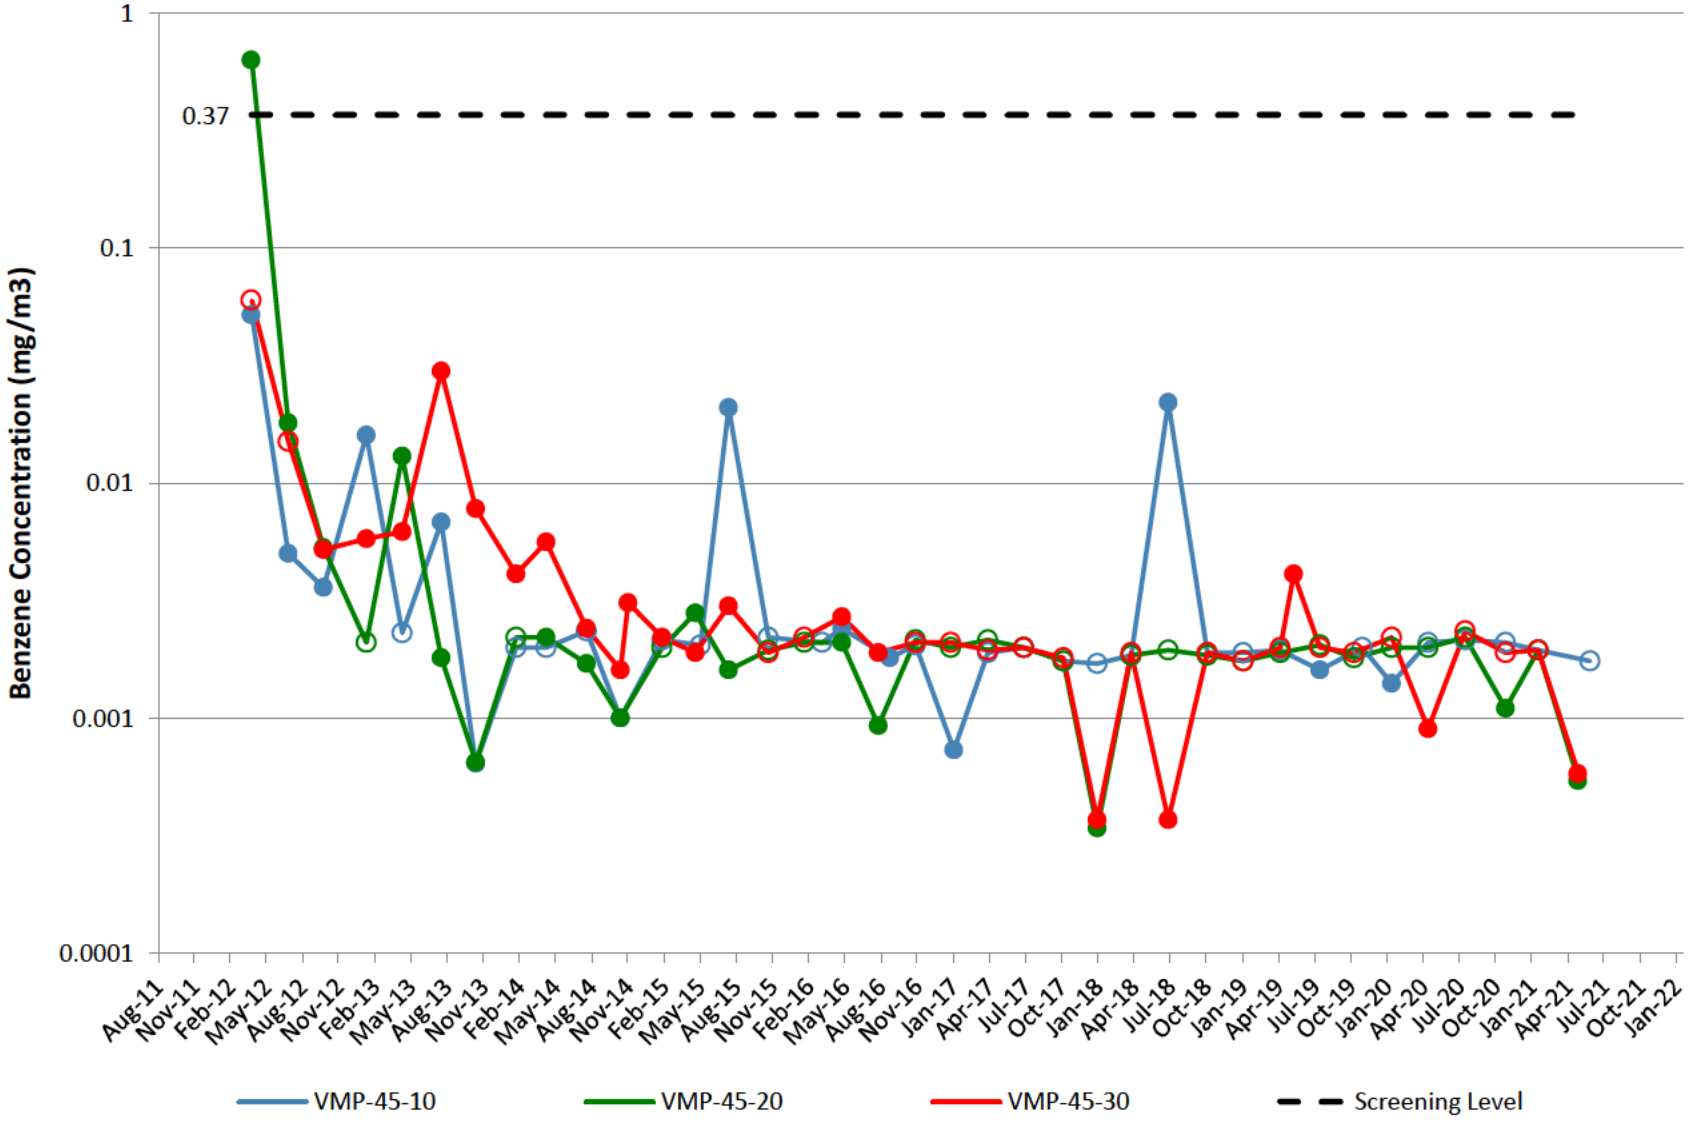


VMP-47

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

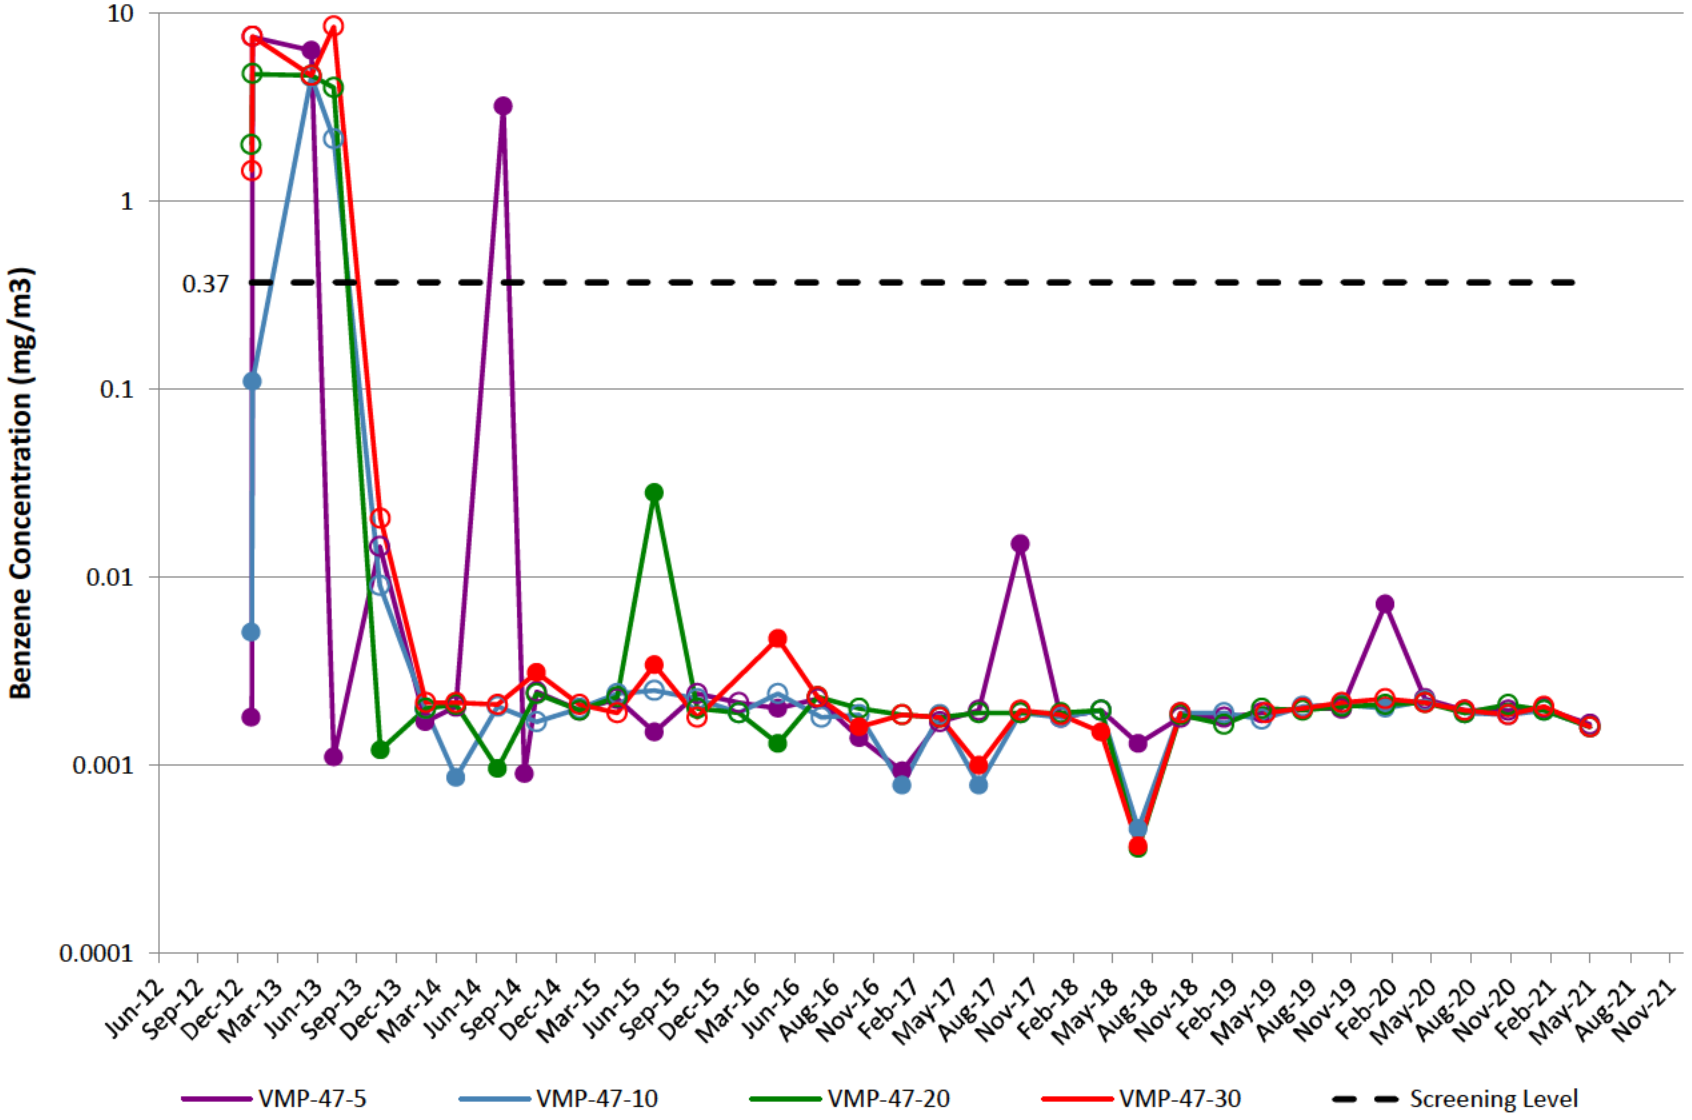


VMP-48

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

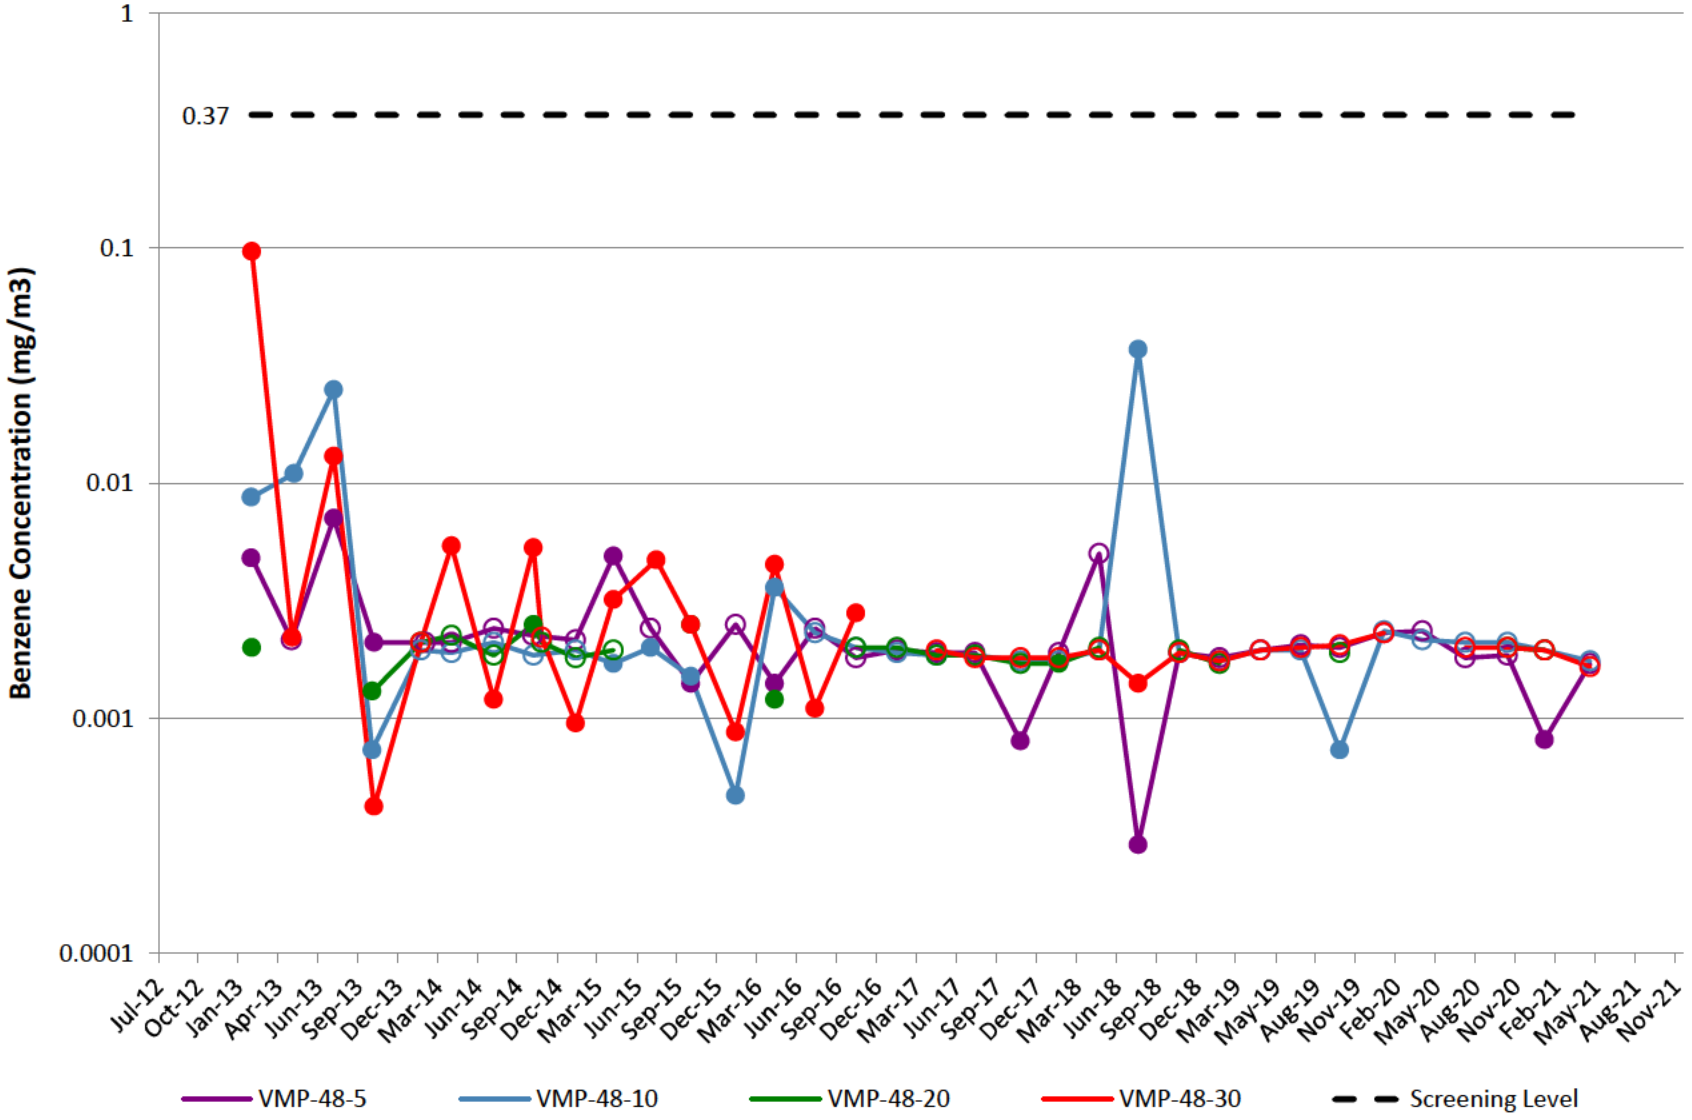


VMP-49

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

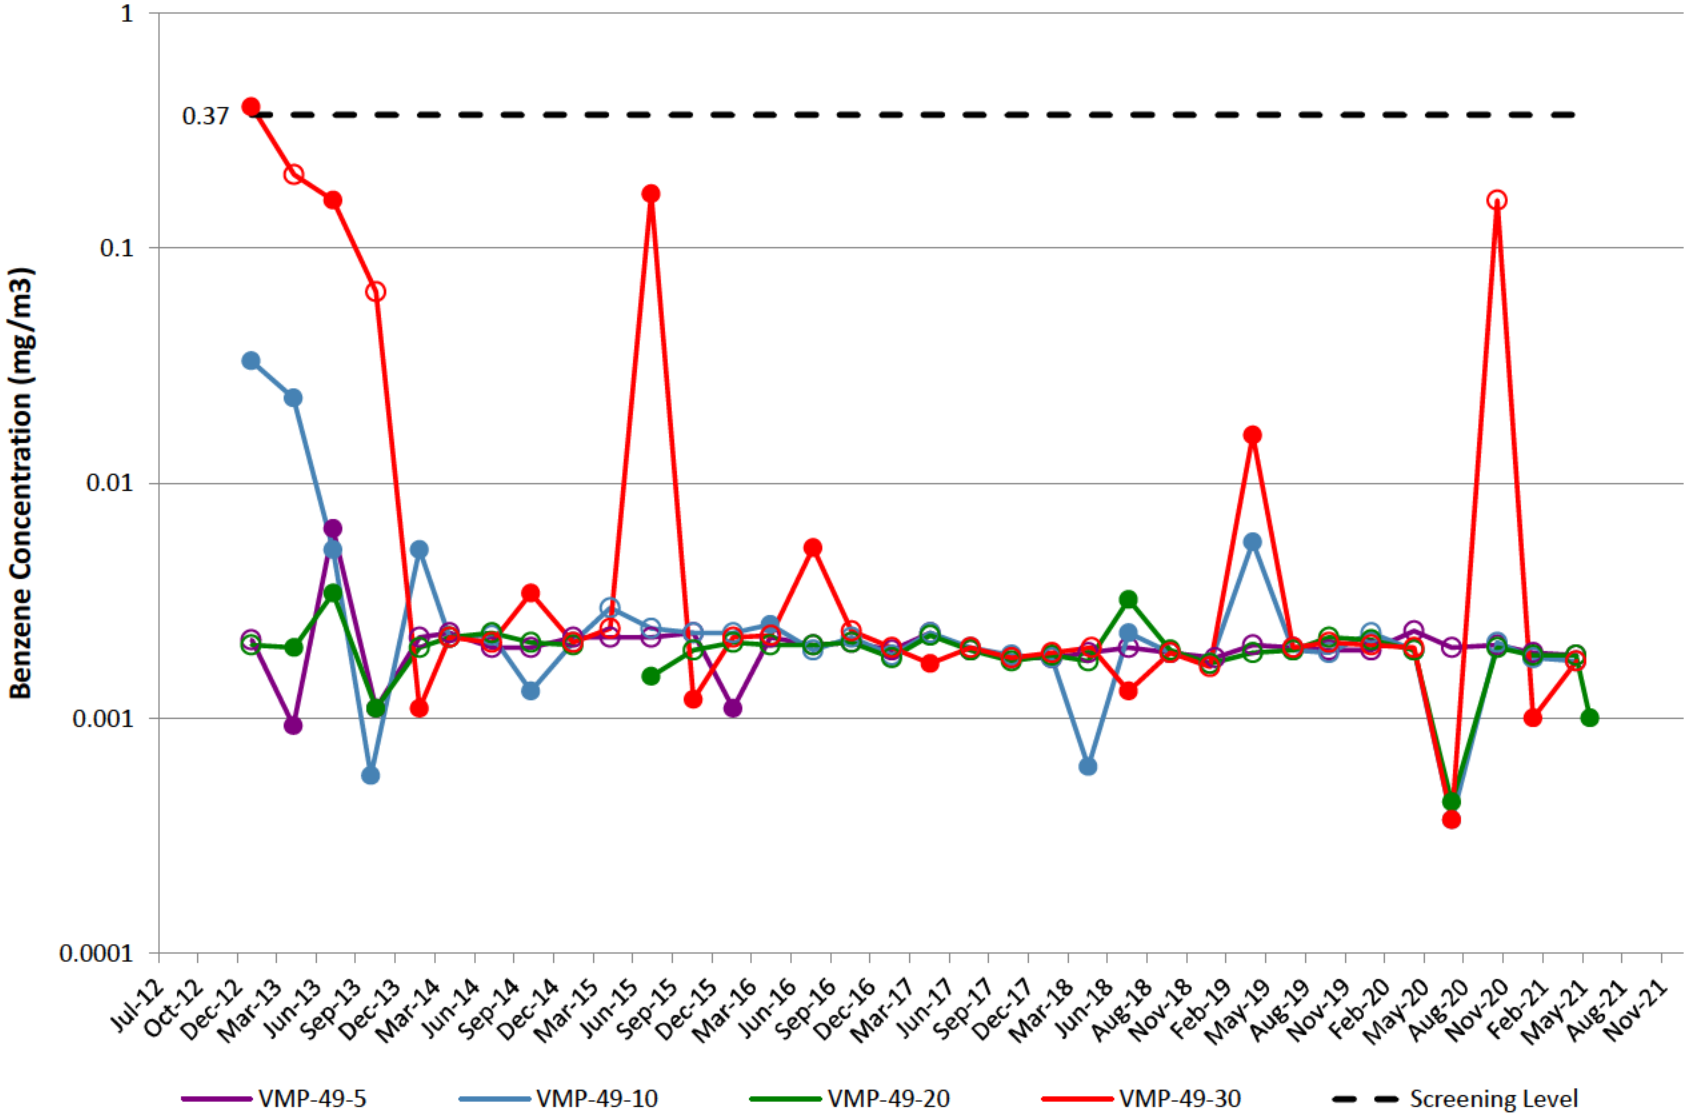


VMP-50

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. Natural gas utility line leak near VMP-50 was discovered by Ameren Illinois on May 1, 2018 and repaired on May 31,

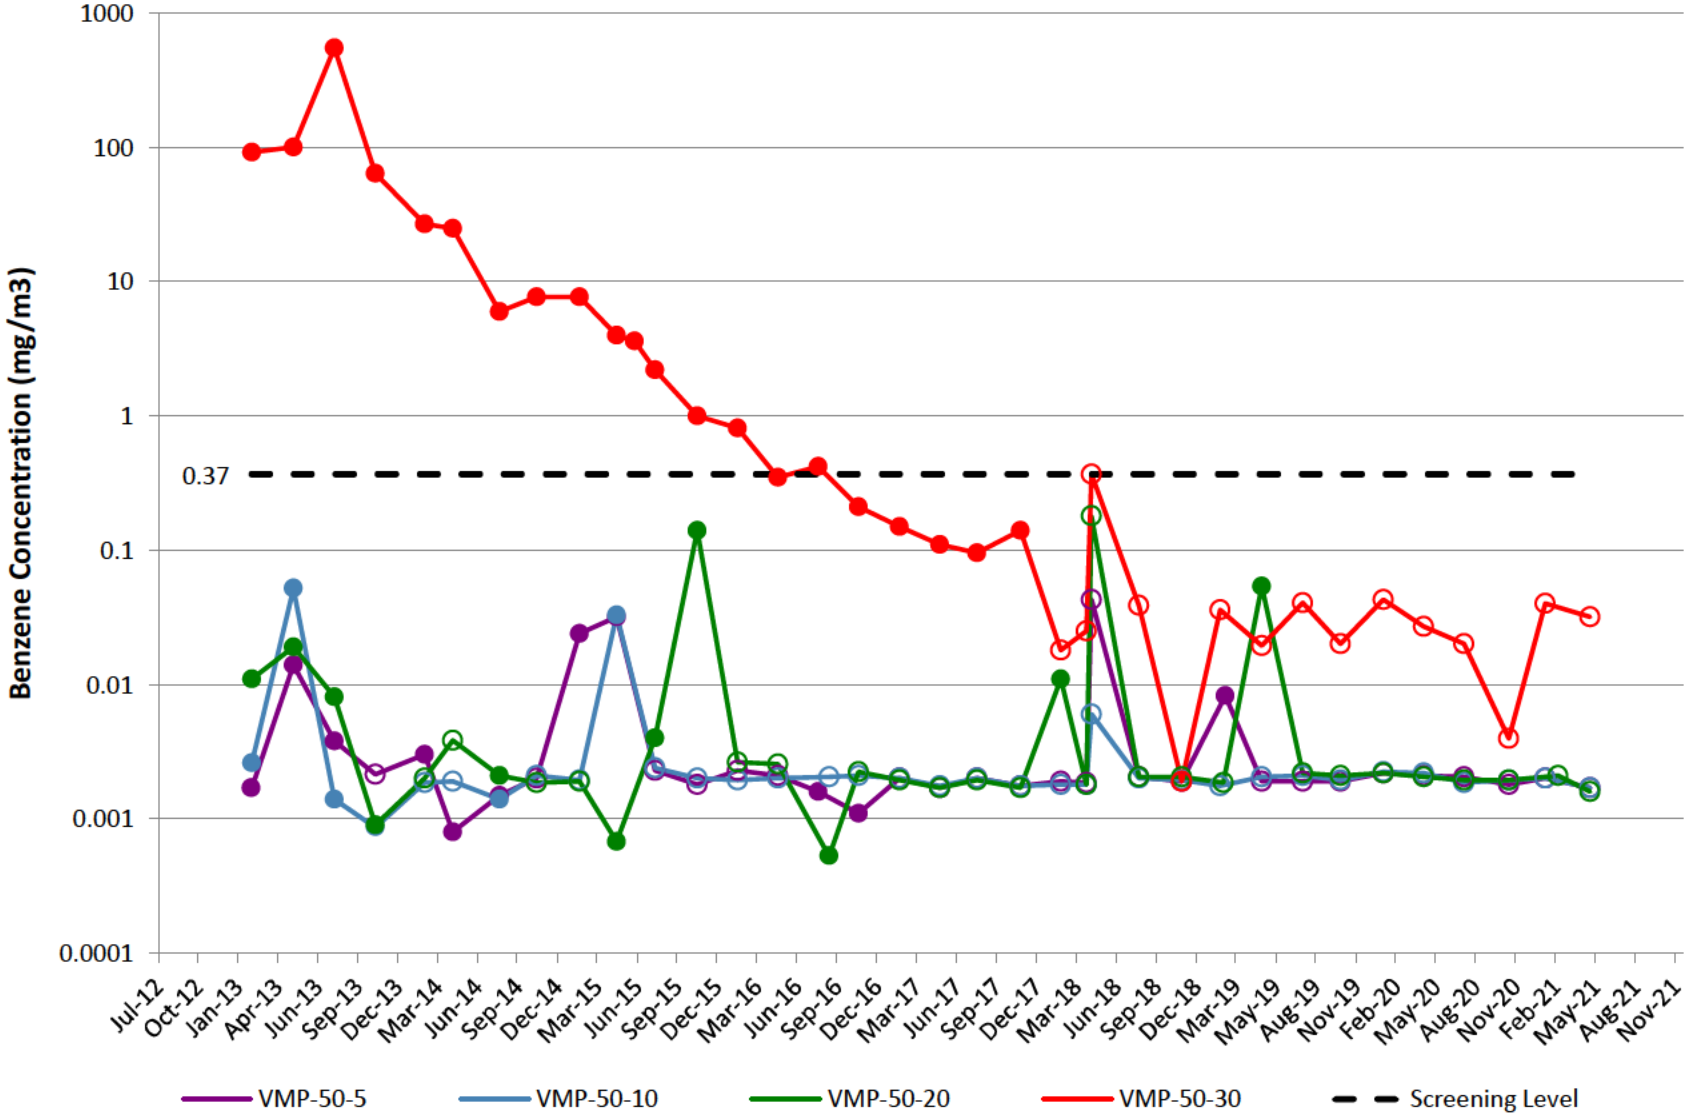


VMP-51

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

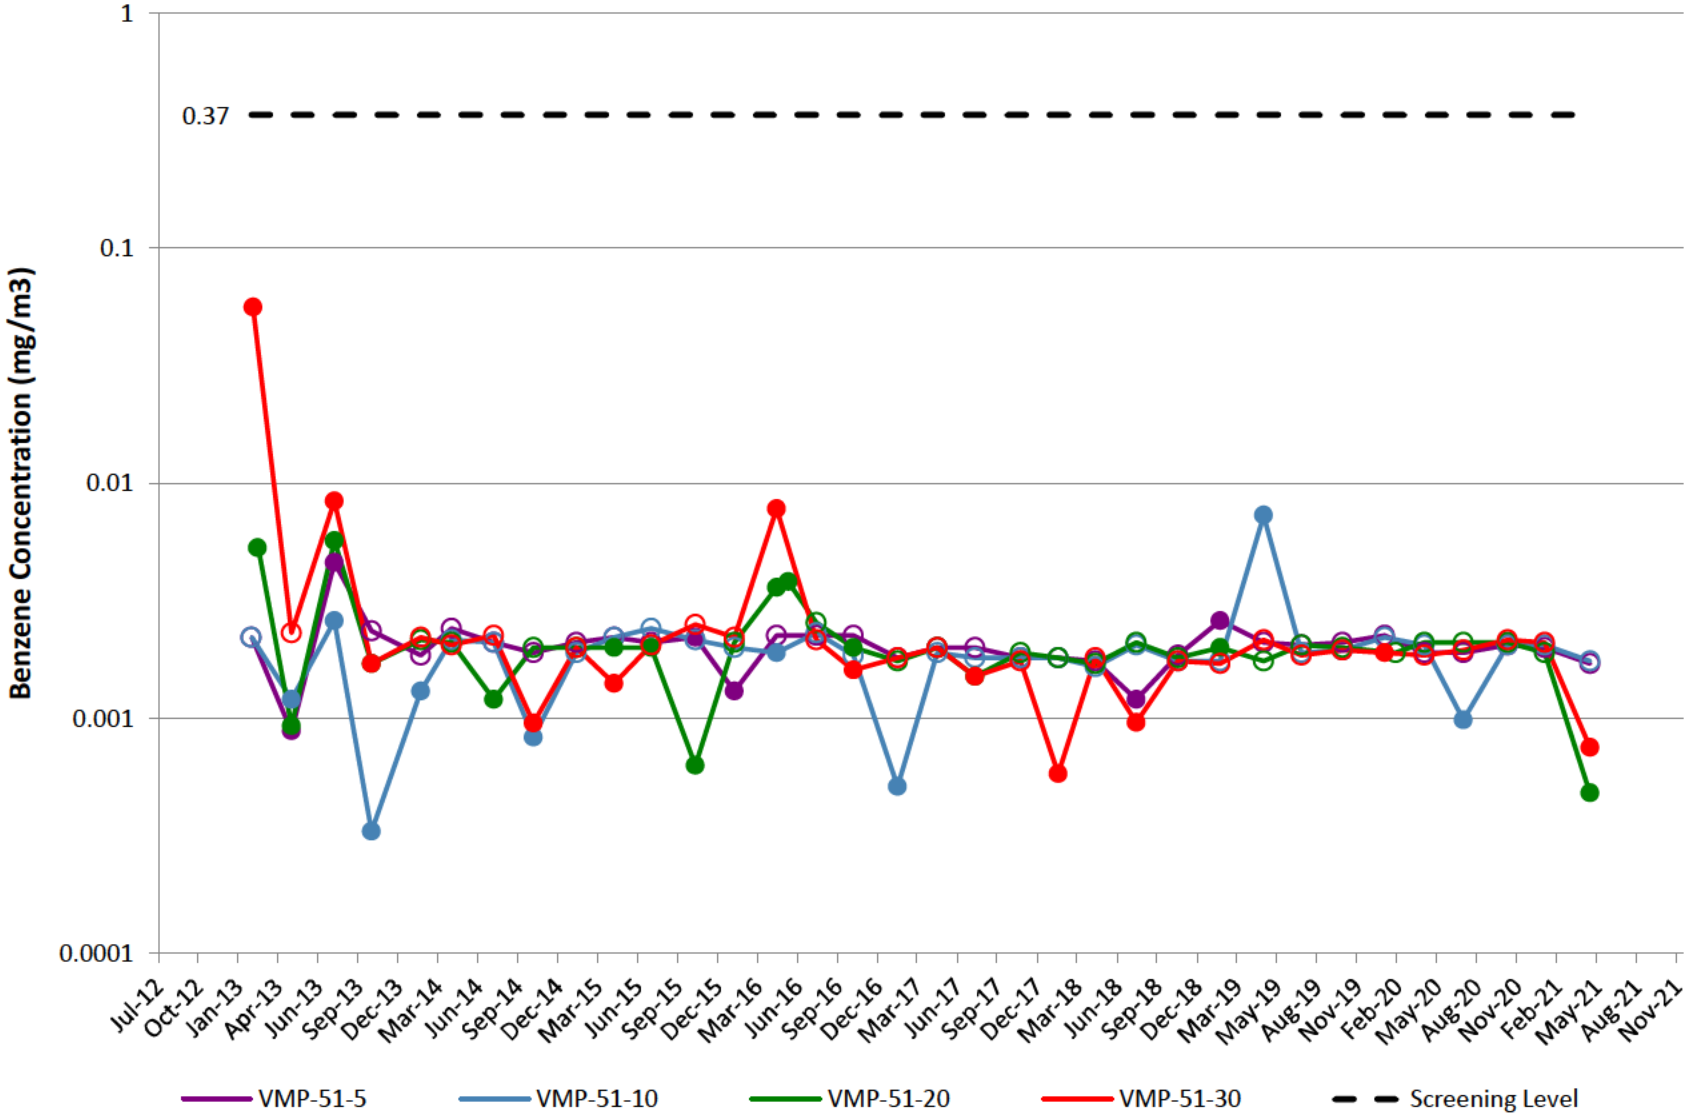


VMP-52

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

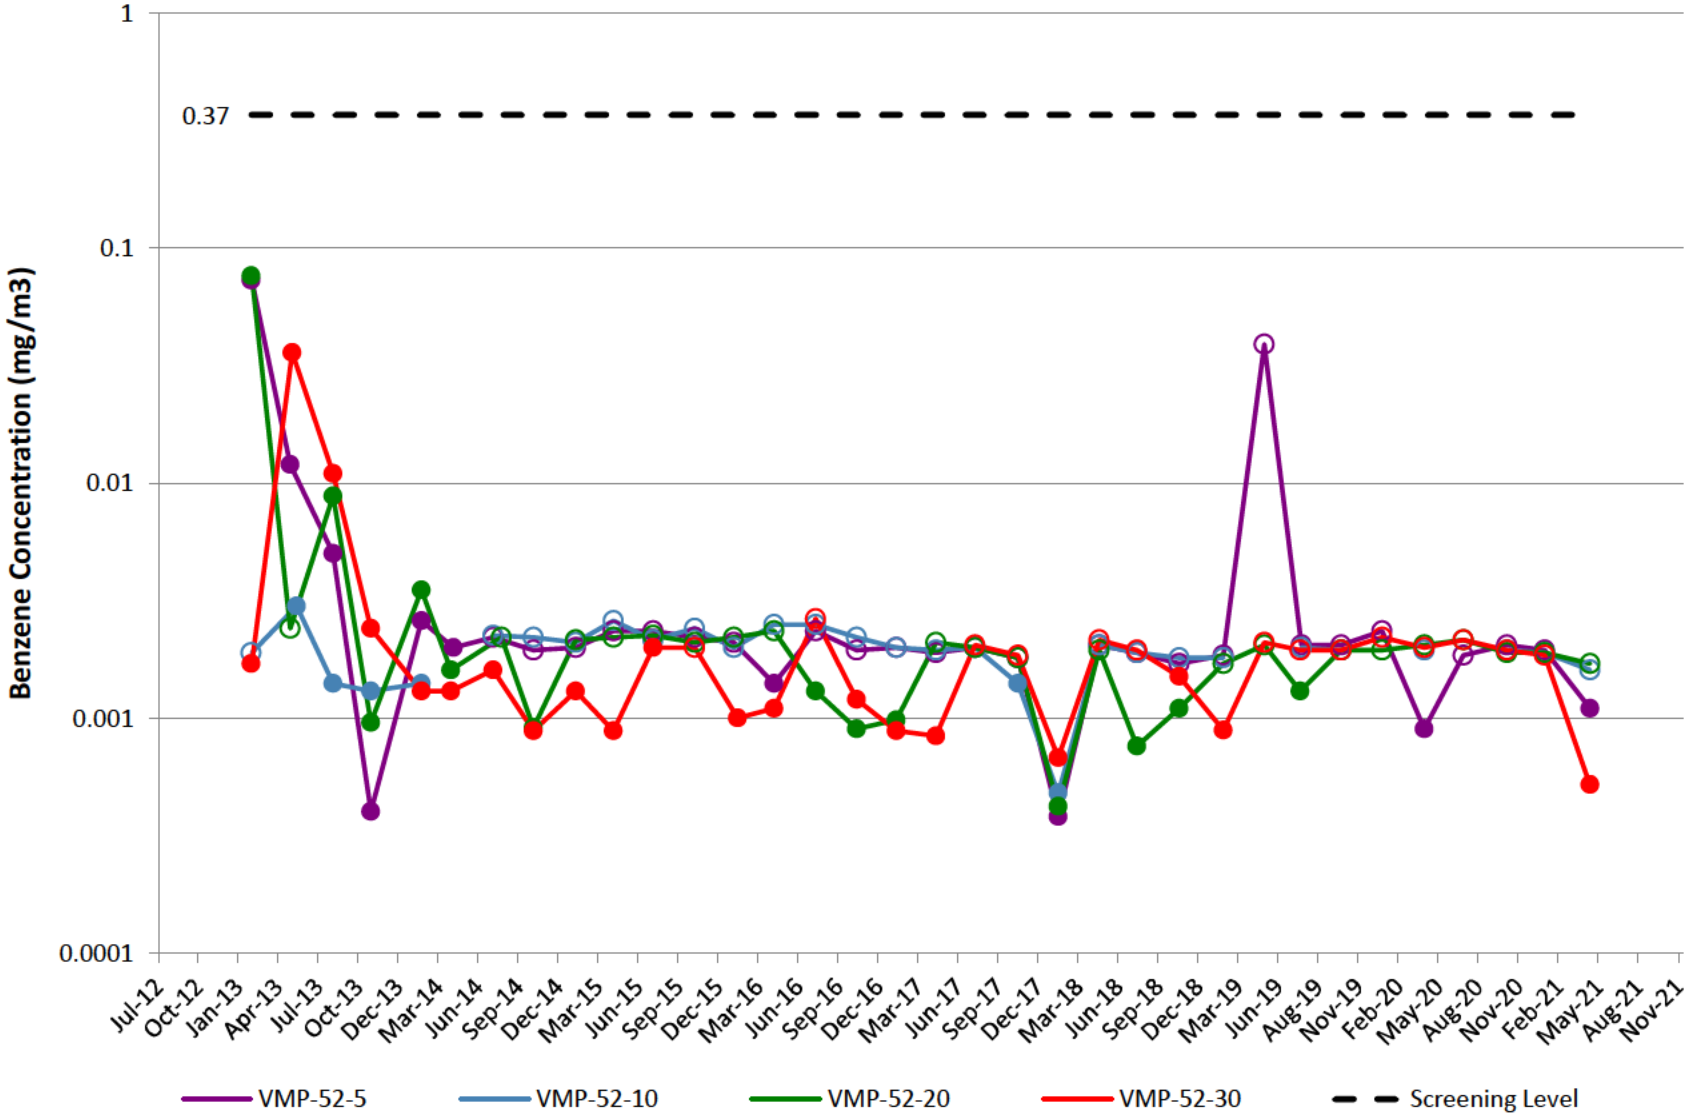


VMP-53

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

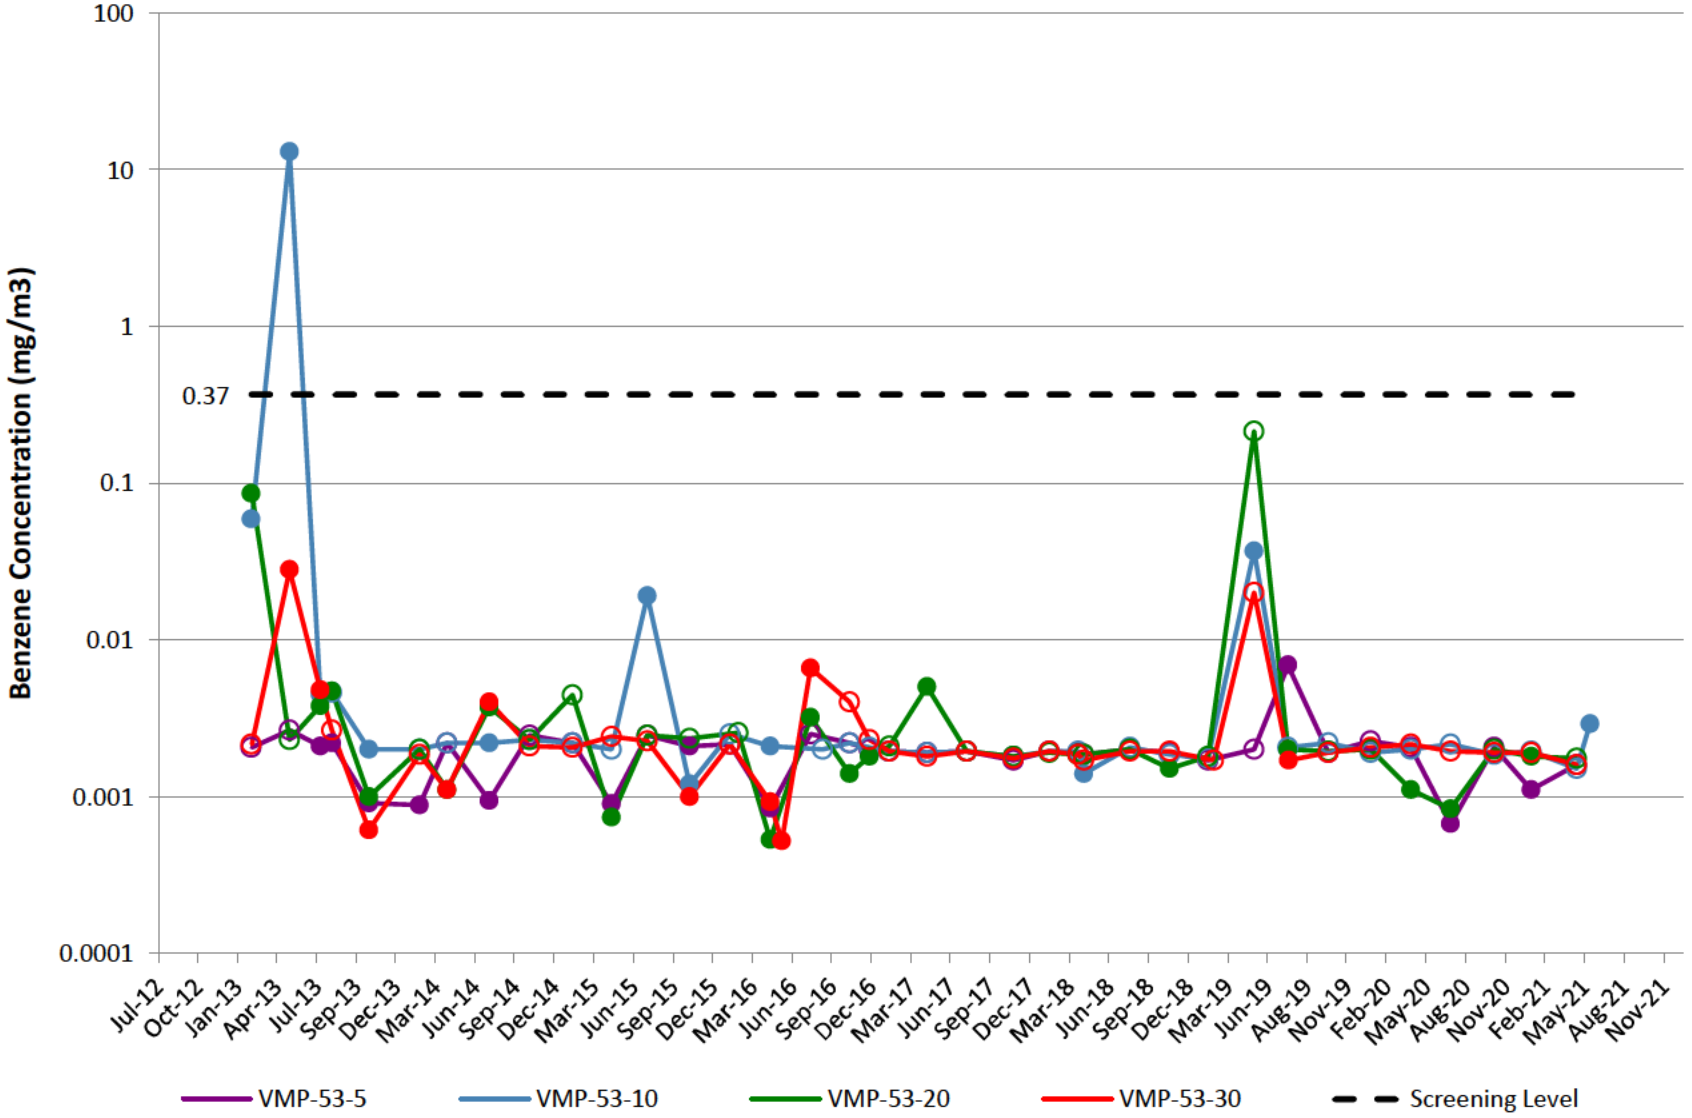


VMP-54

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

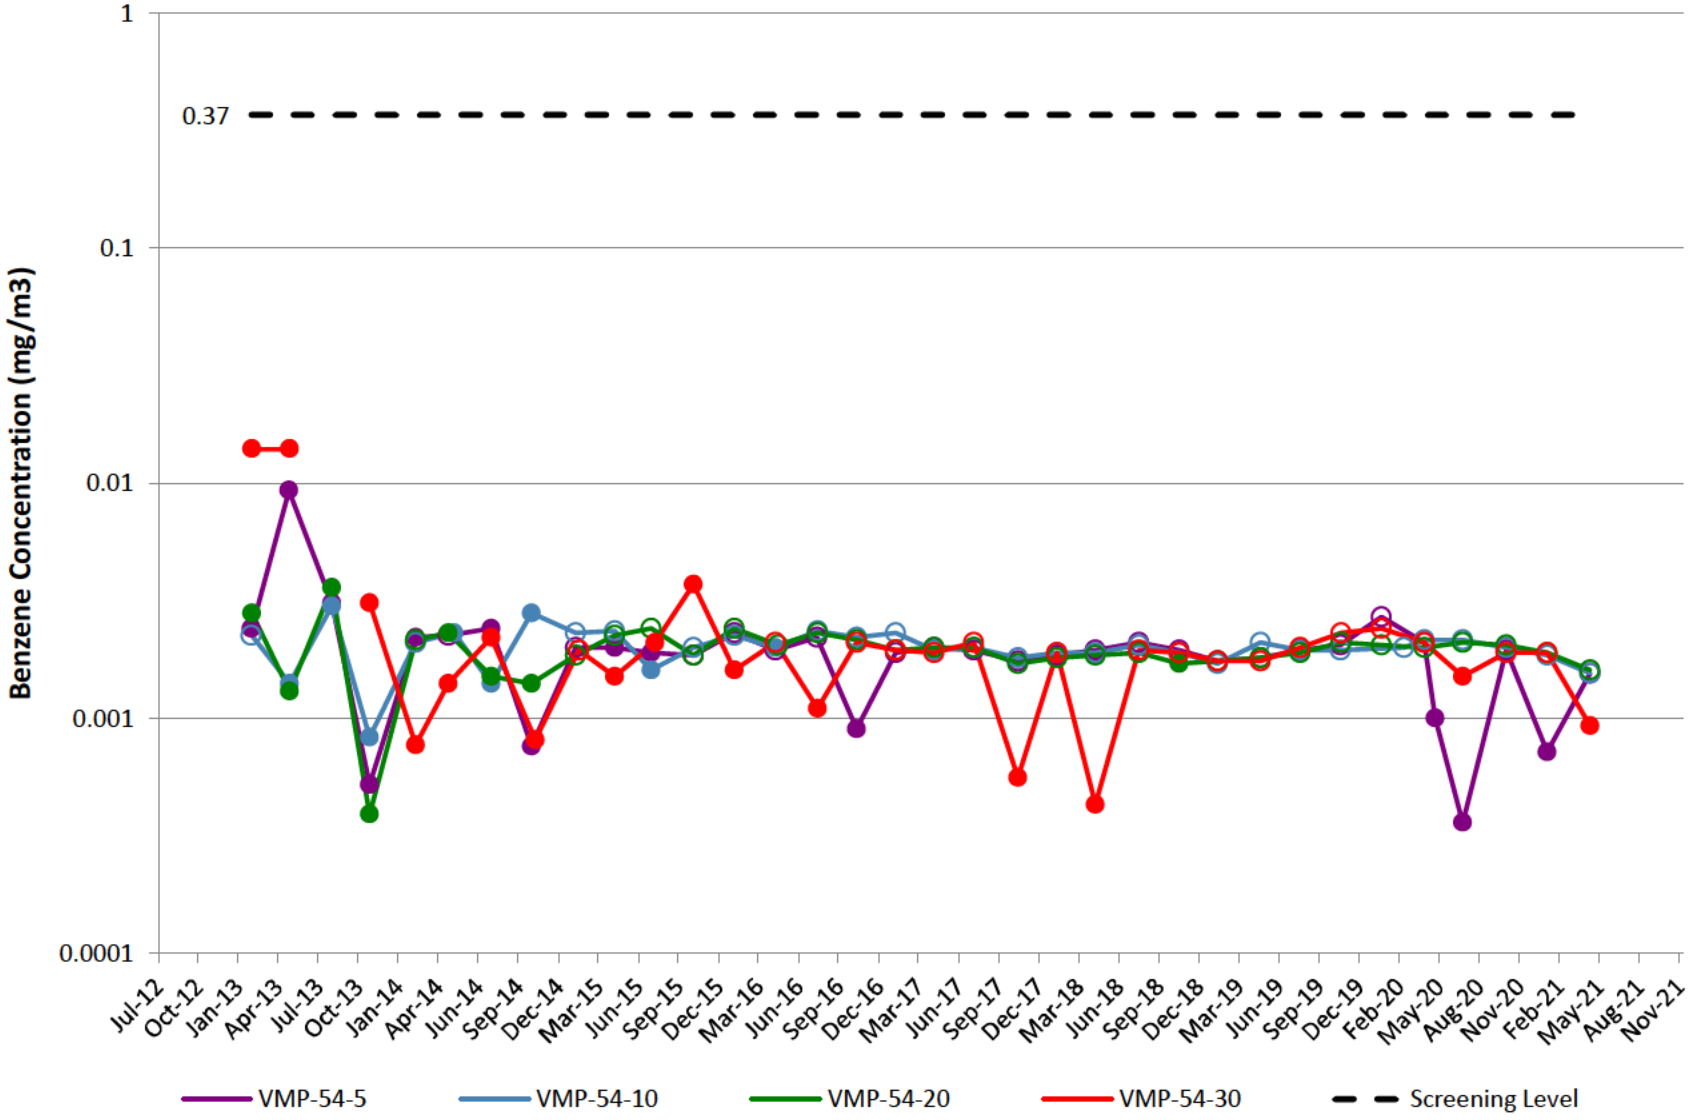


VMP-55

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

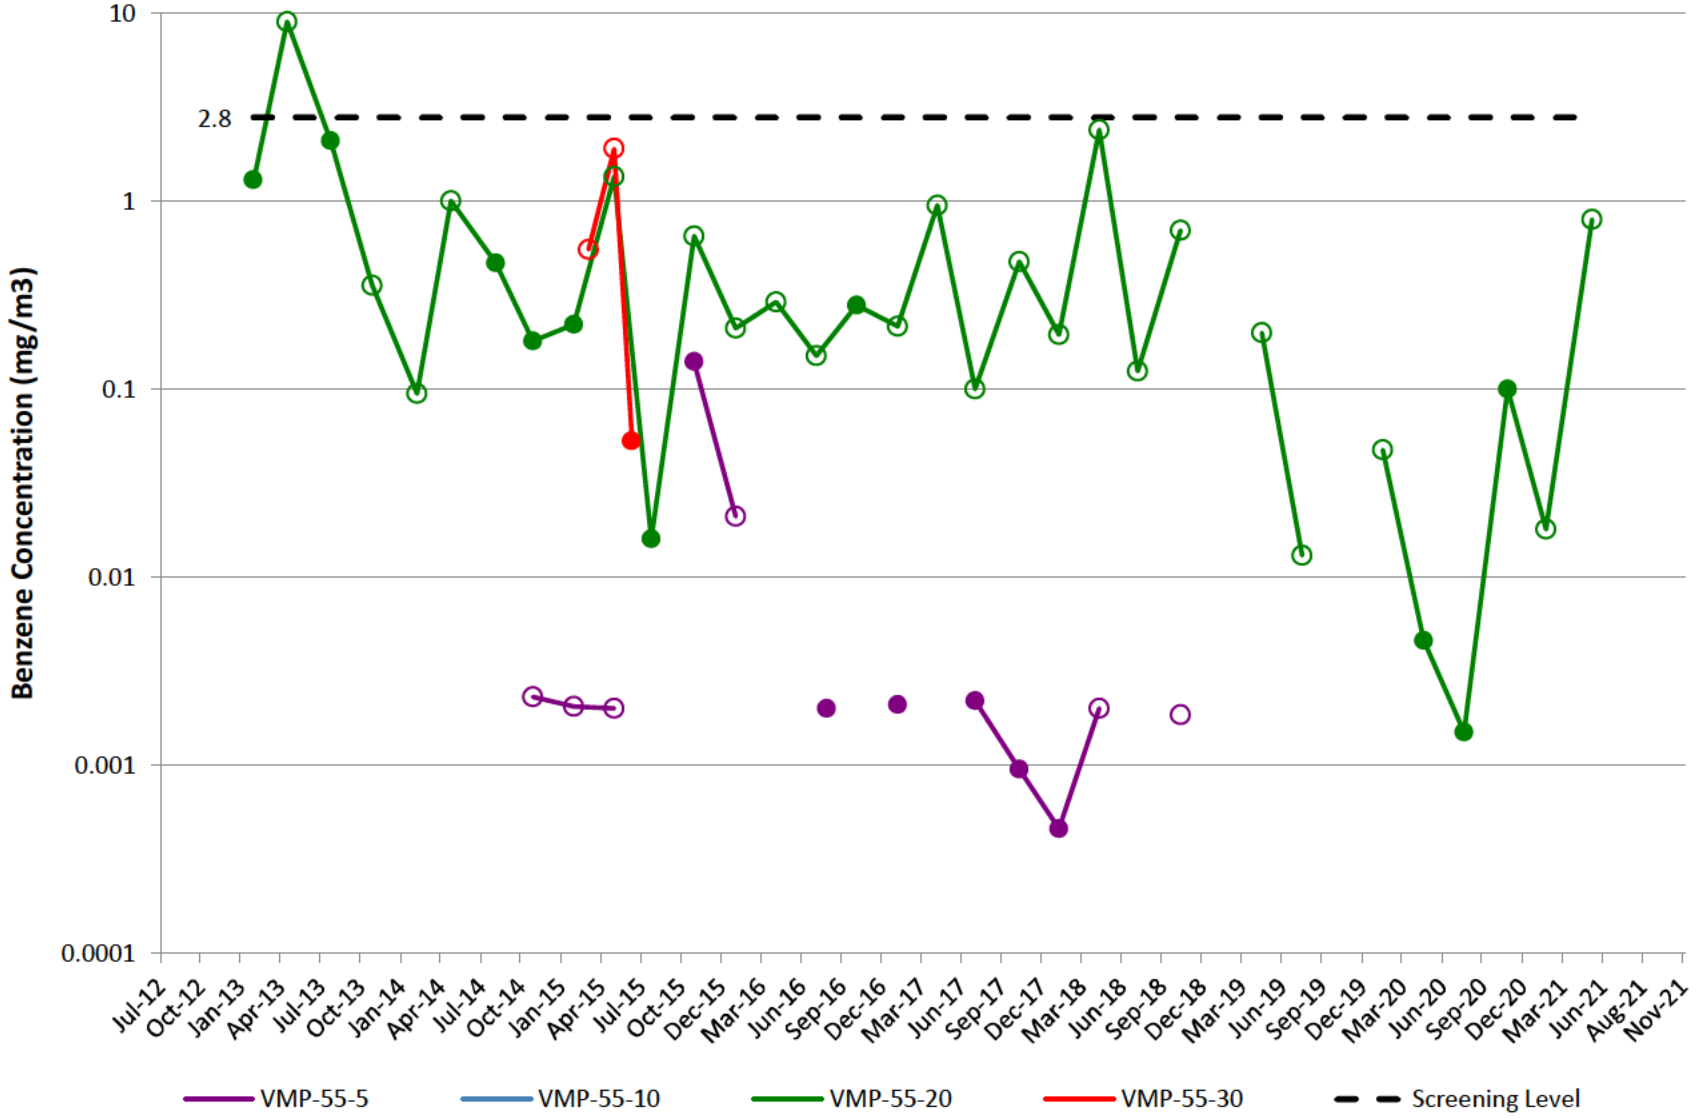


VMP-56

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

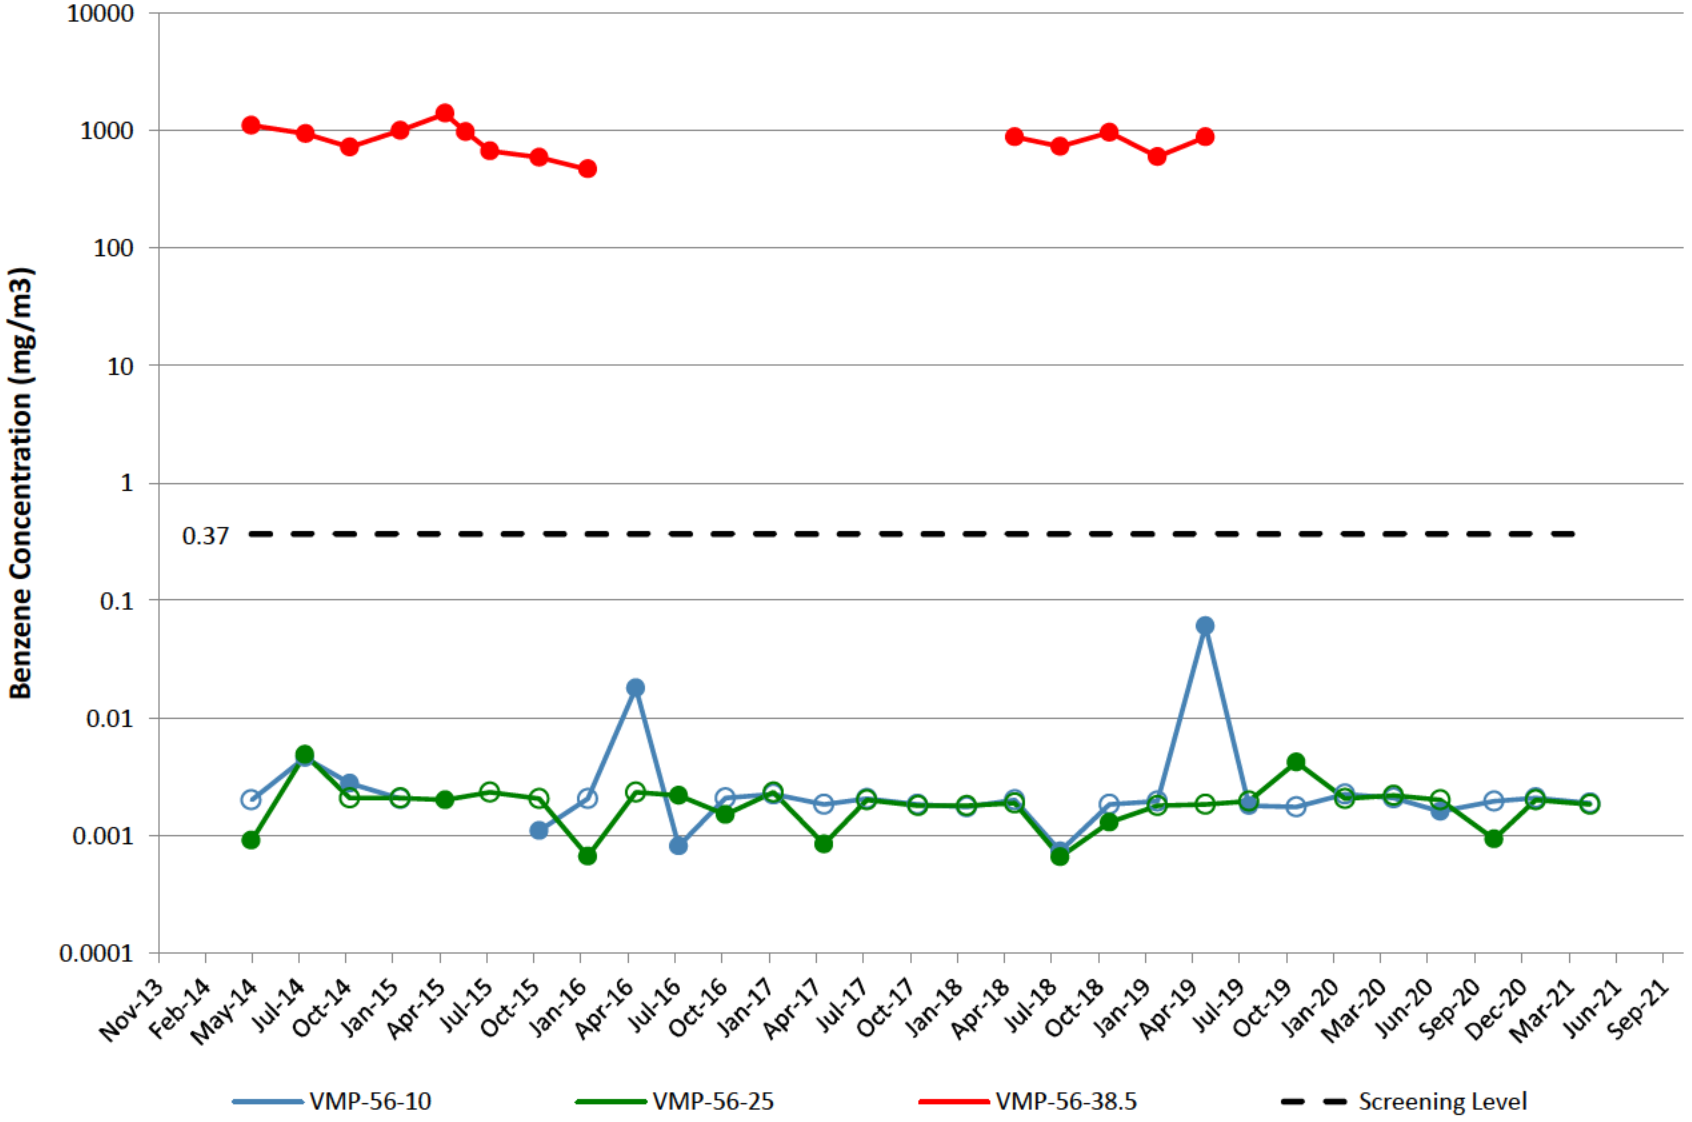


VMP-62

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

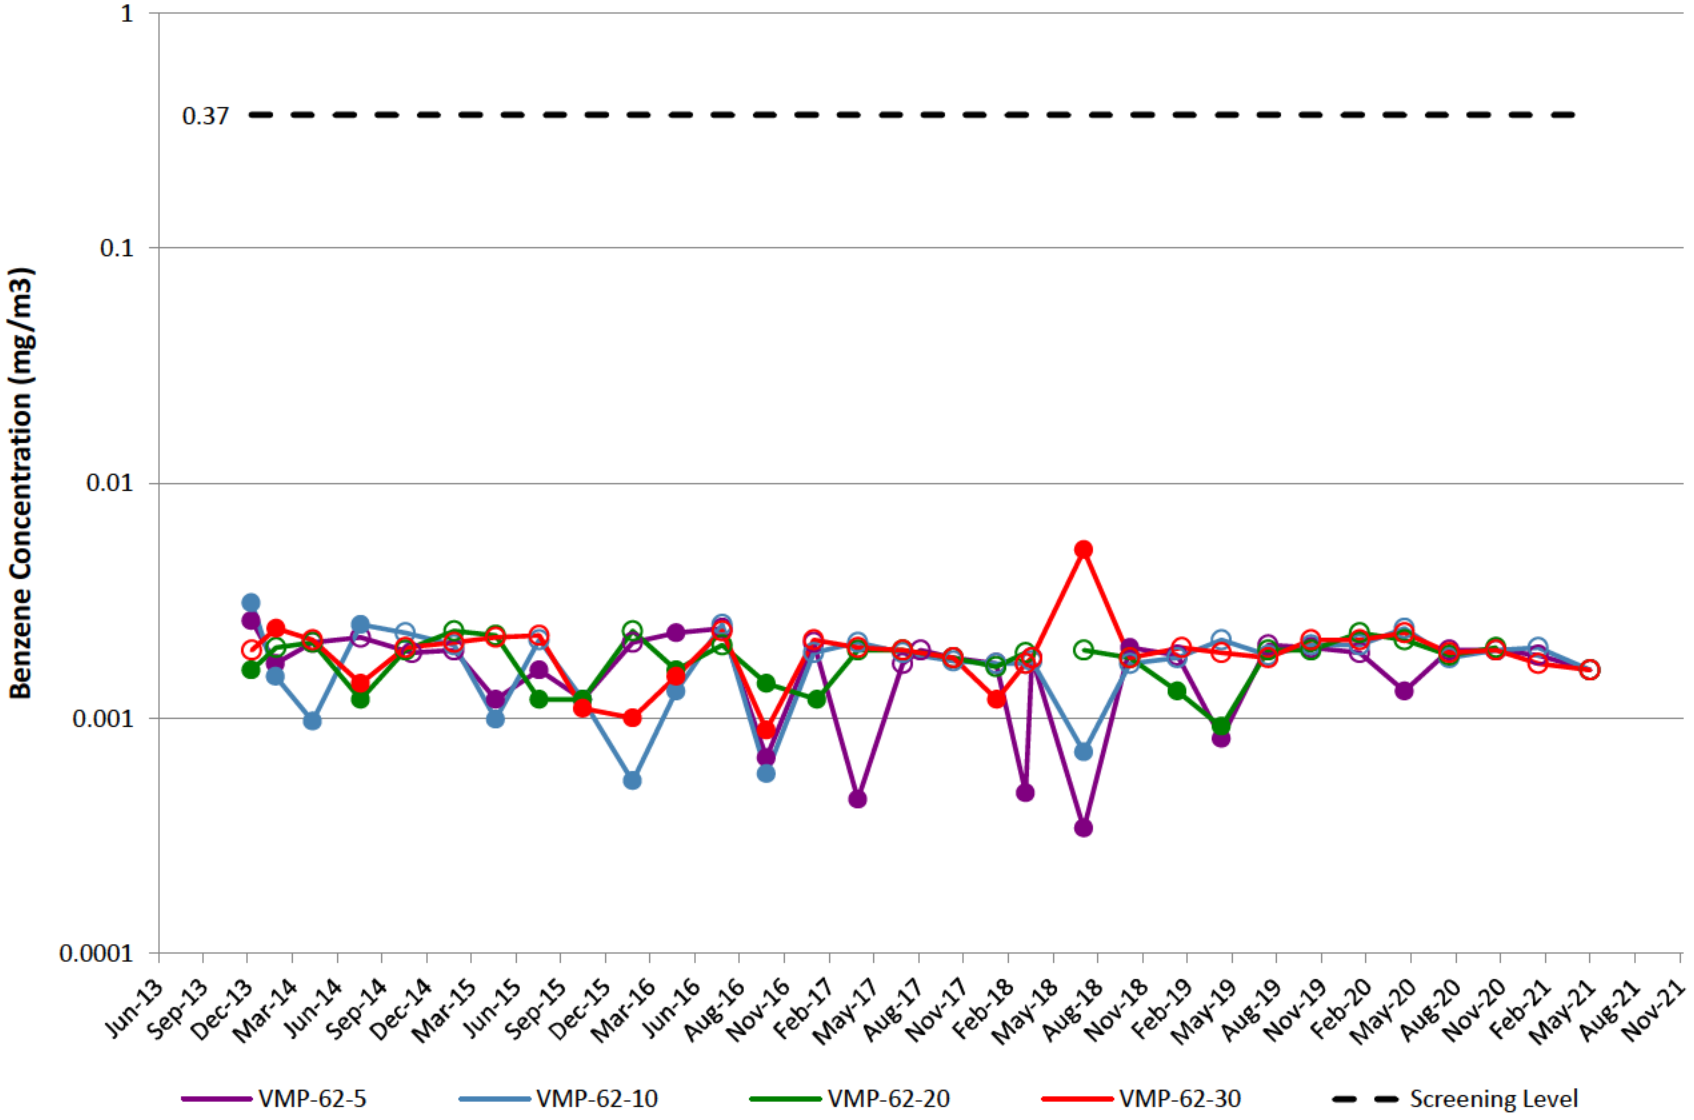


VMP-63

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

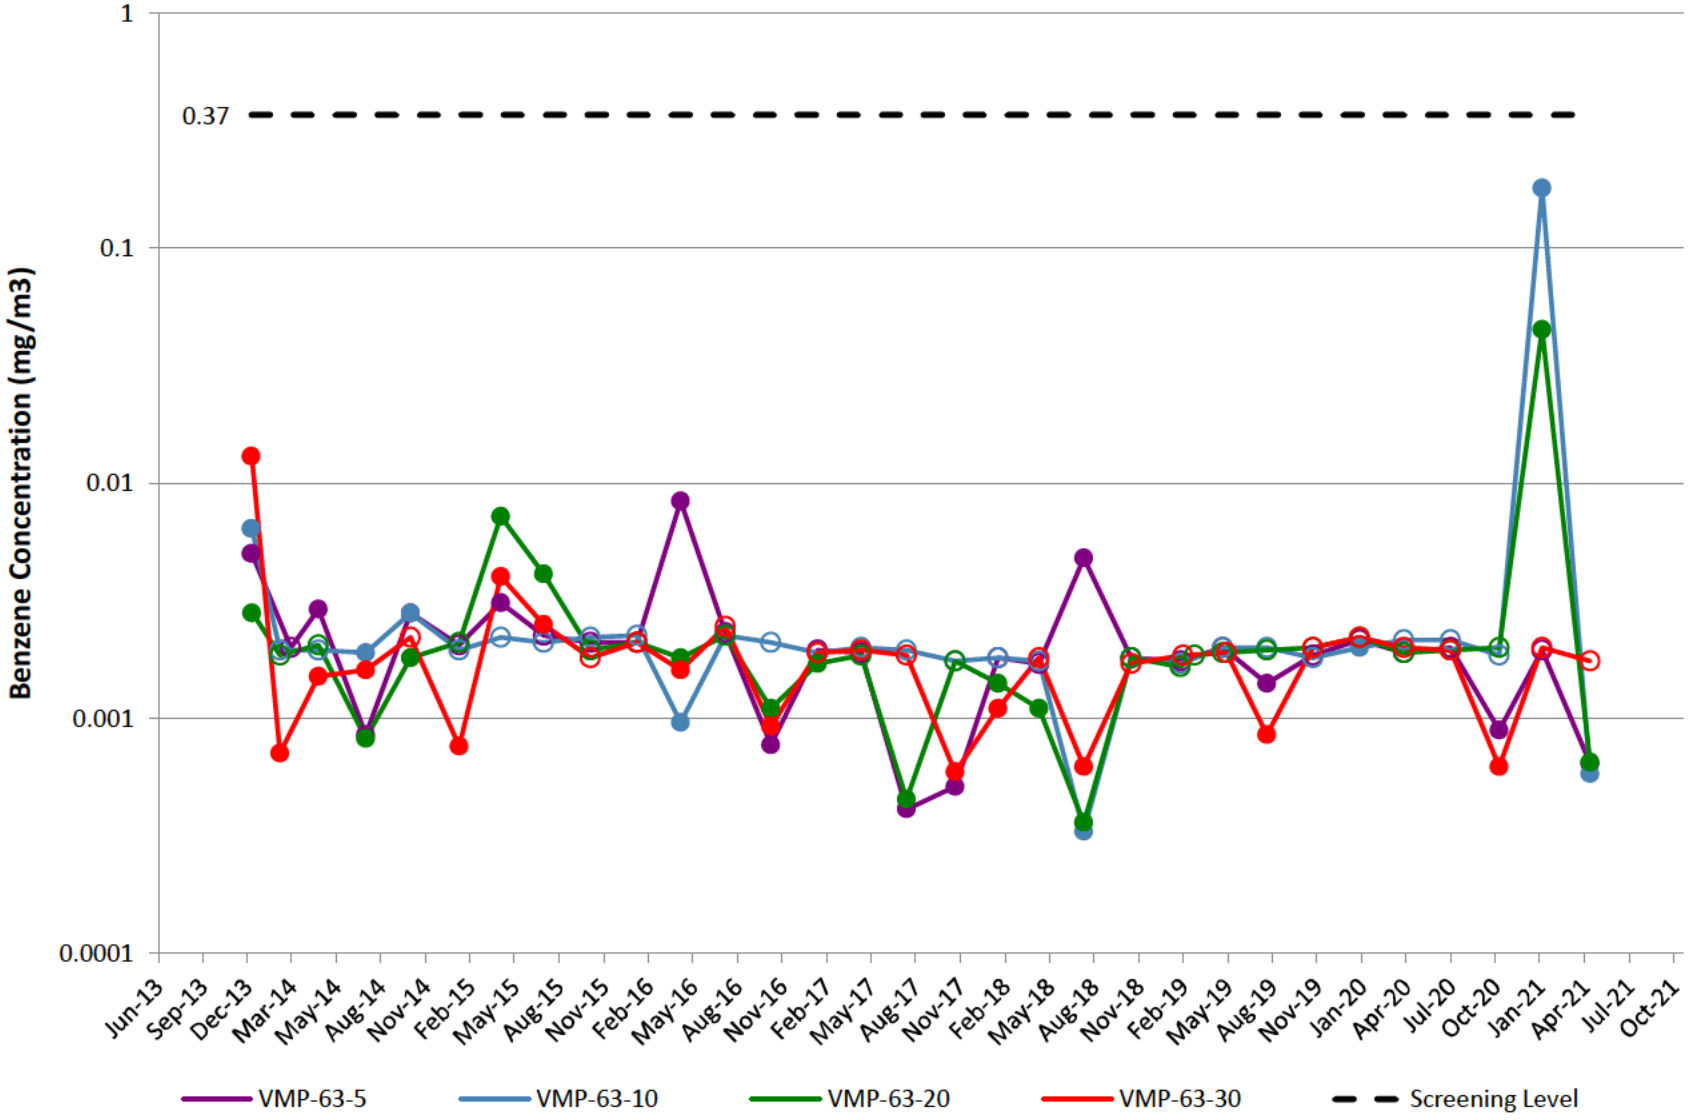


VMP-64

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

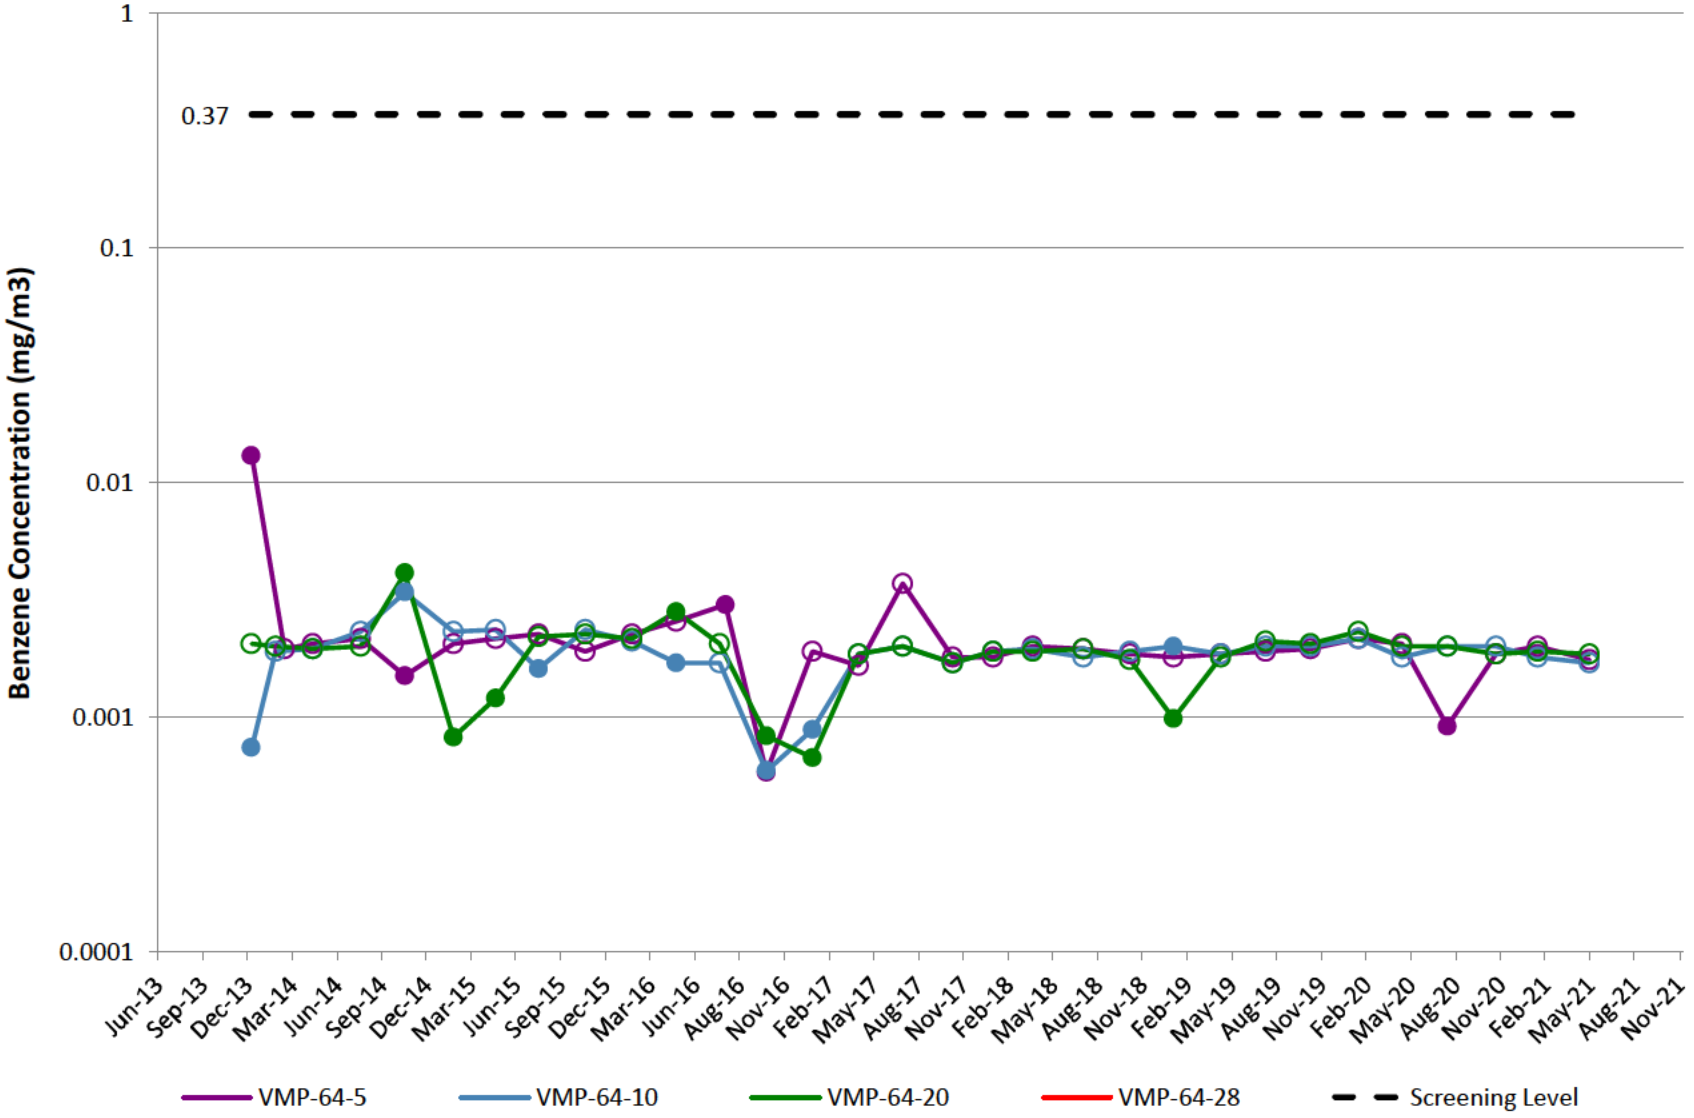


VMP-1

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

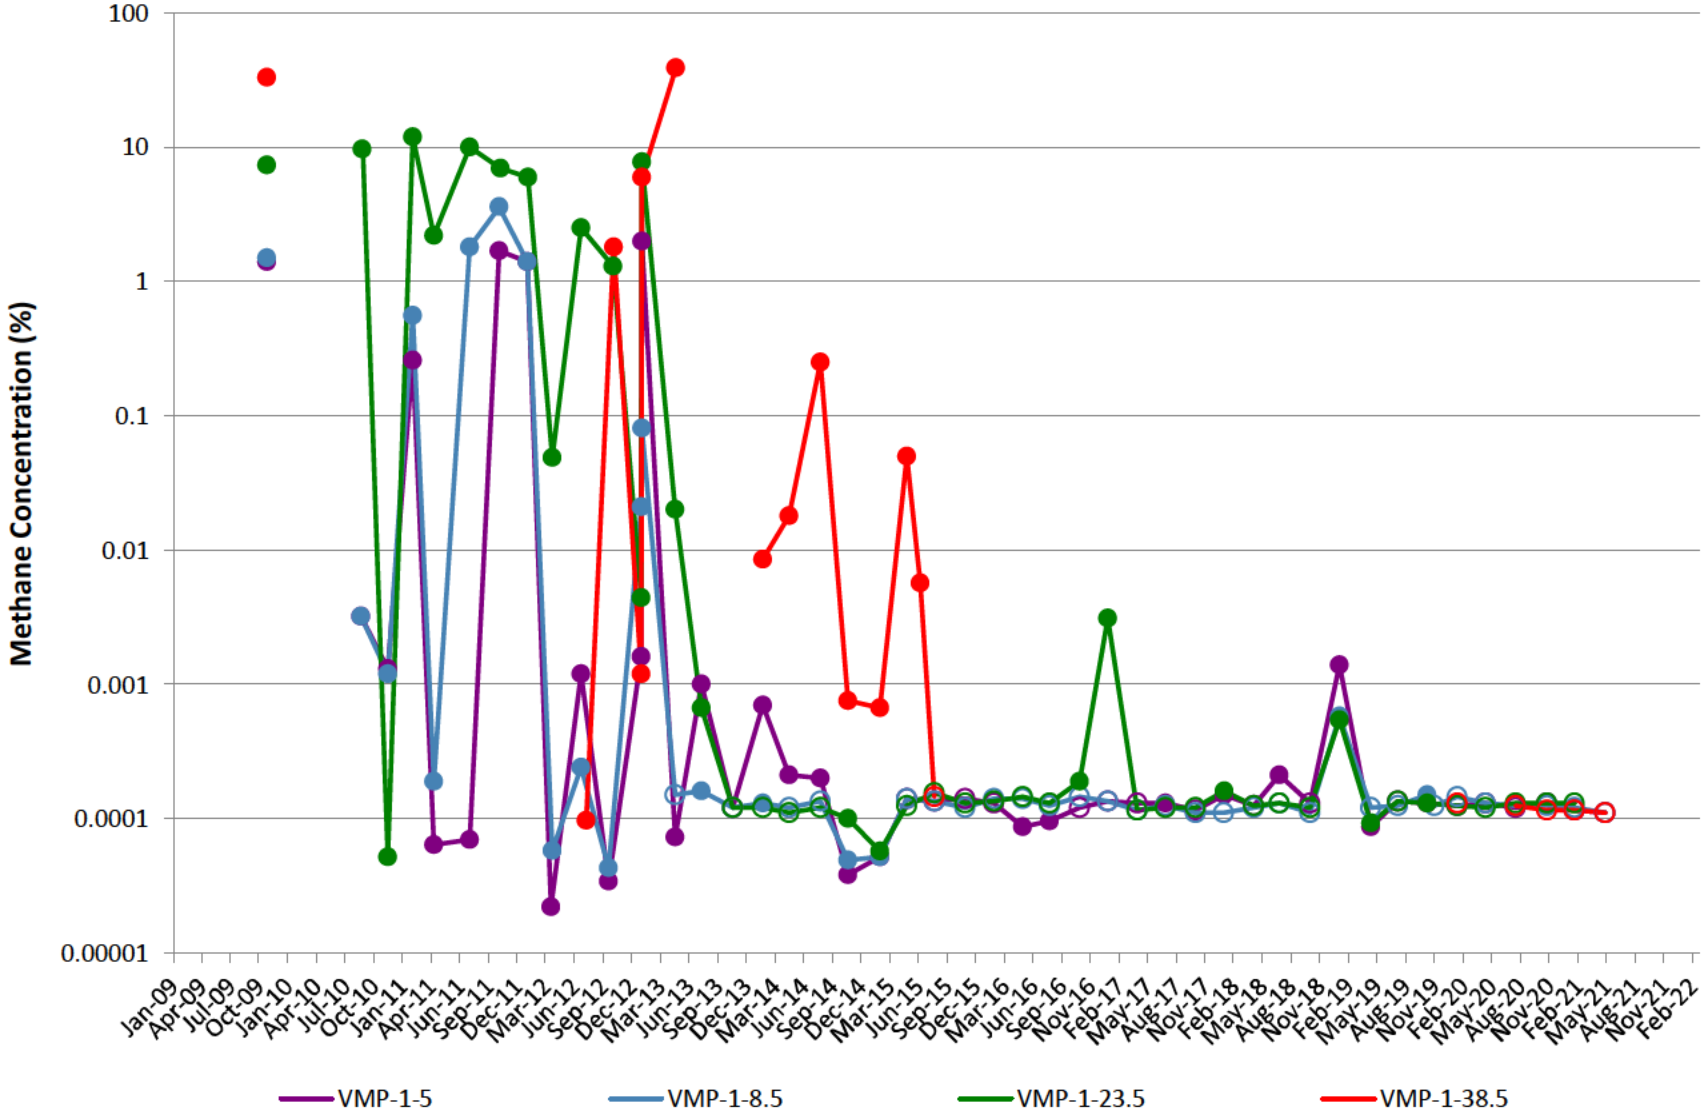


VMP-2

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

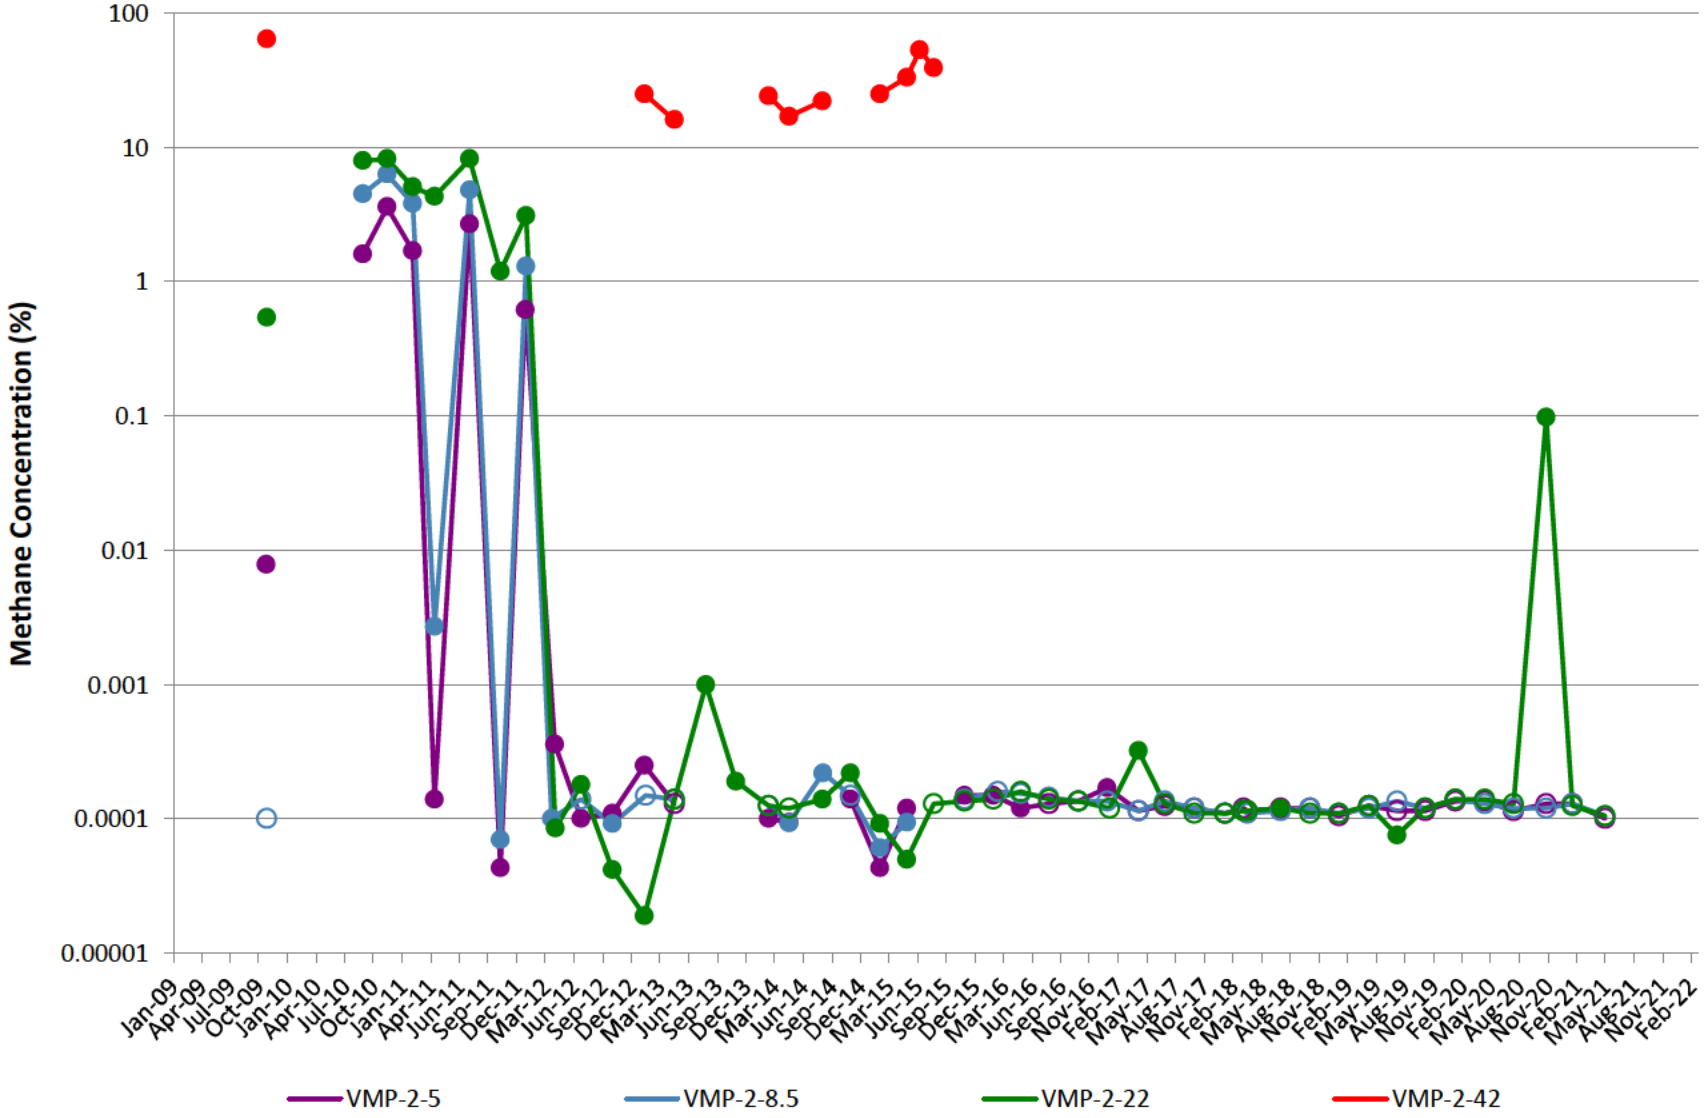


VMP-3

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

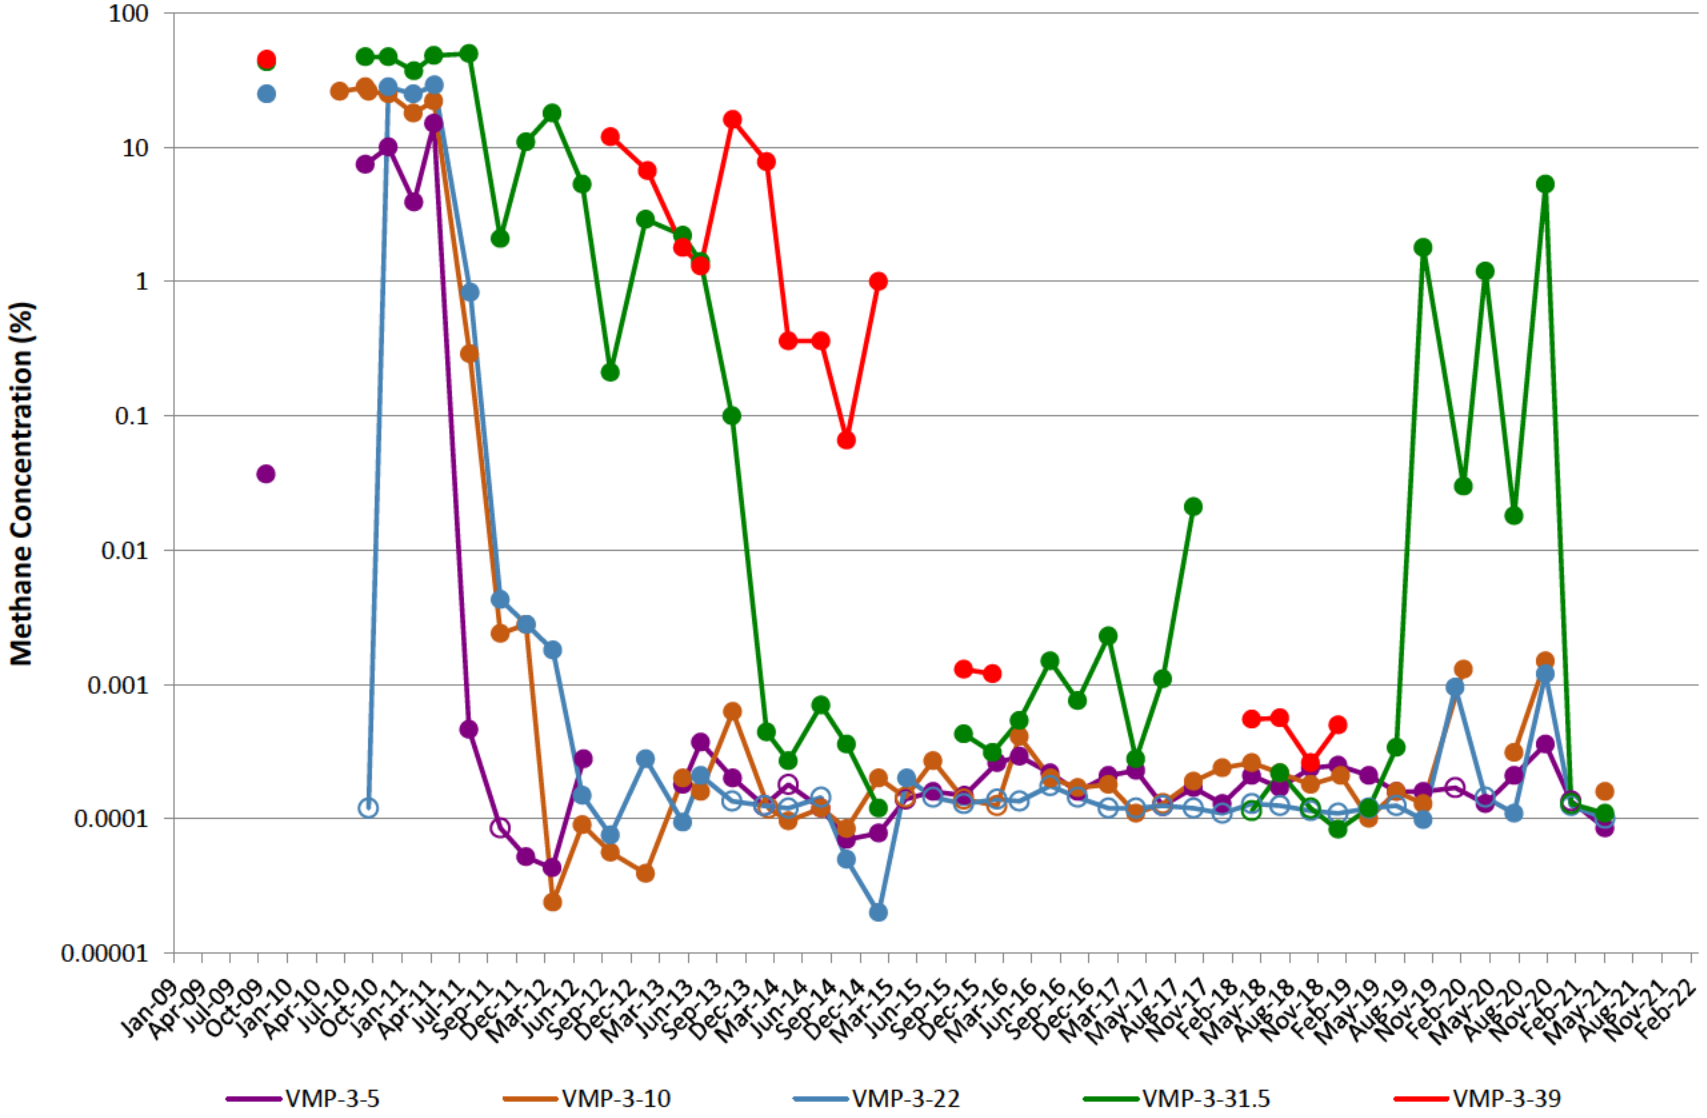


VMP-4

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

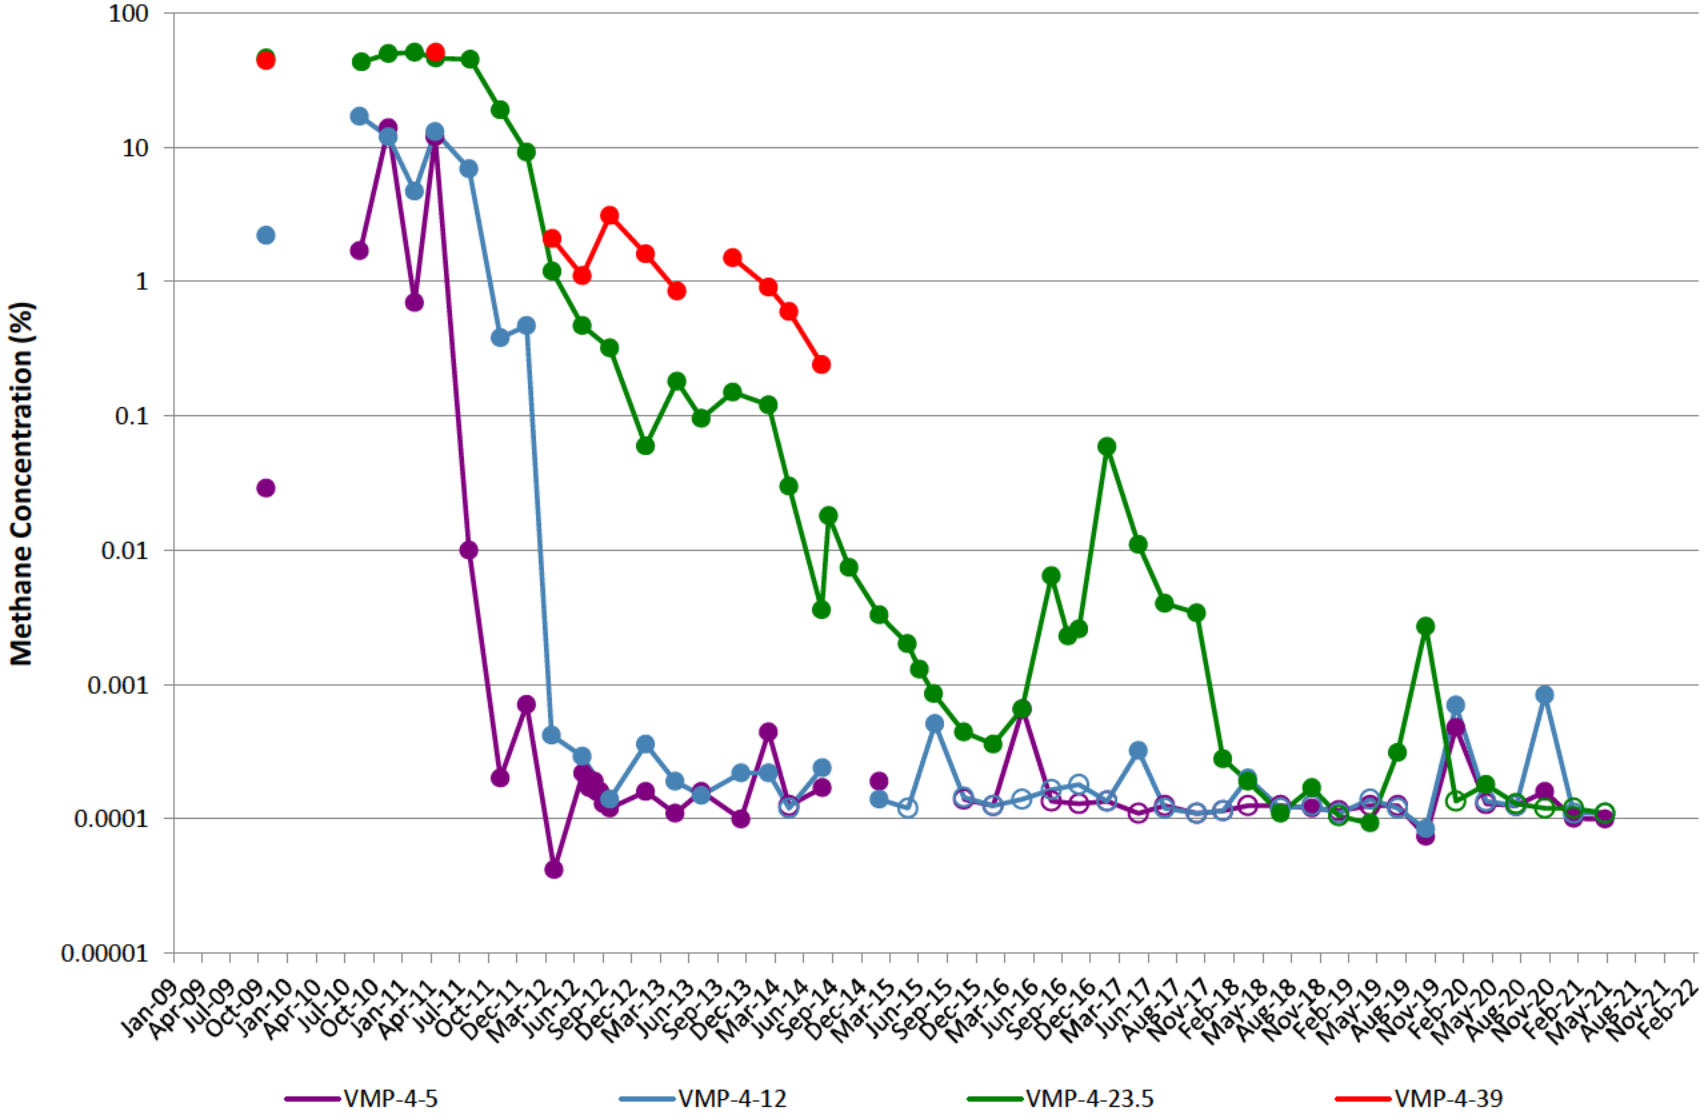


VMP-5

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

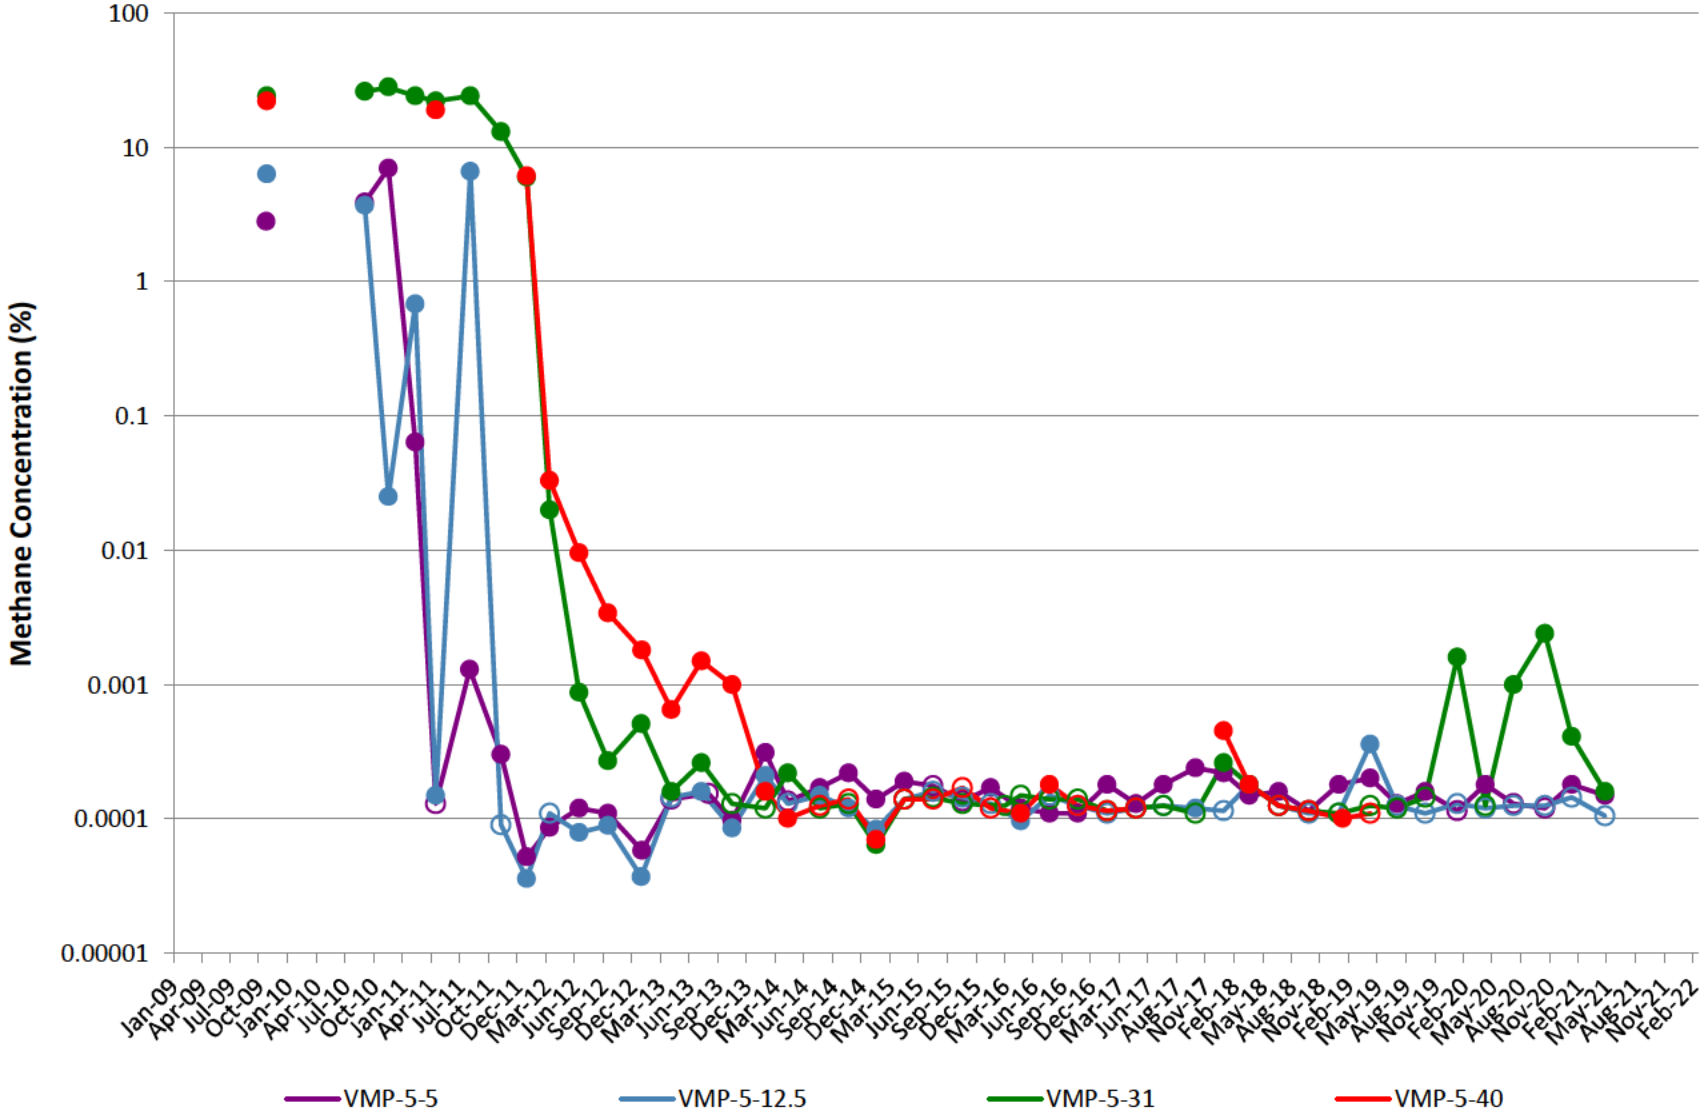


VMP-6

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

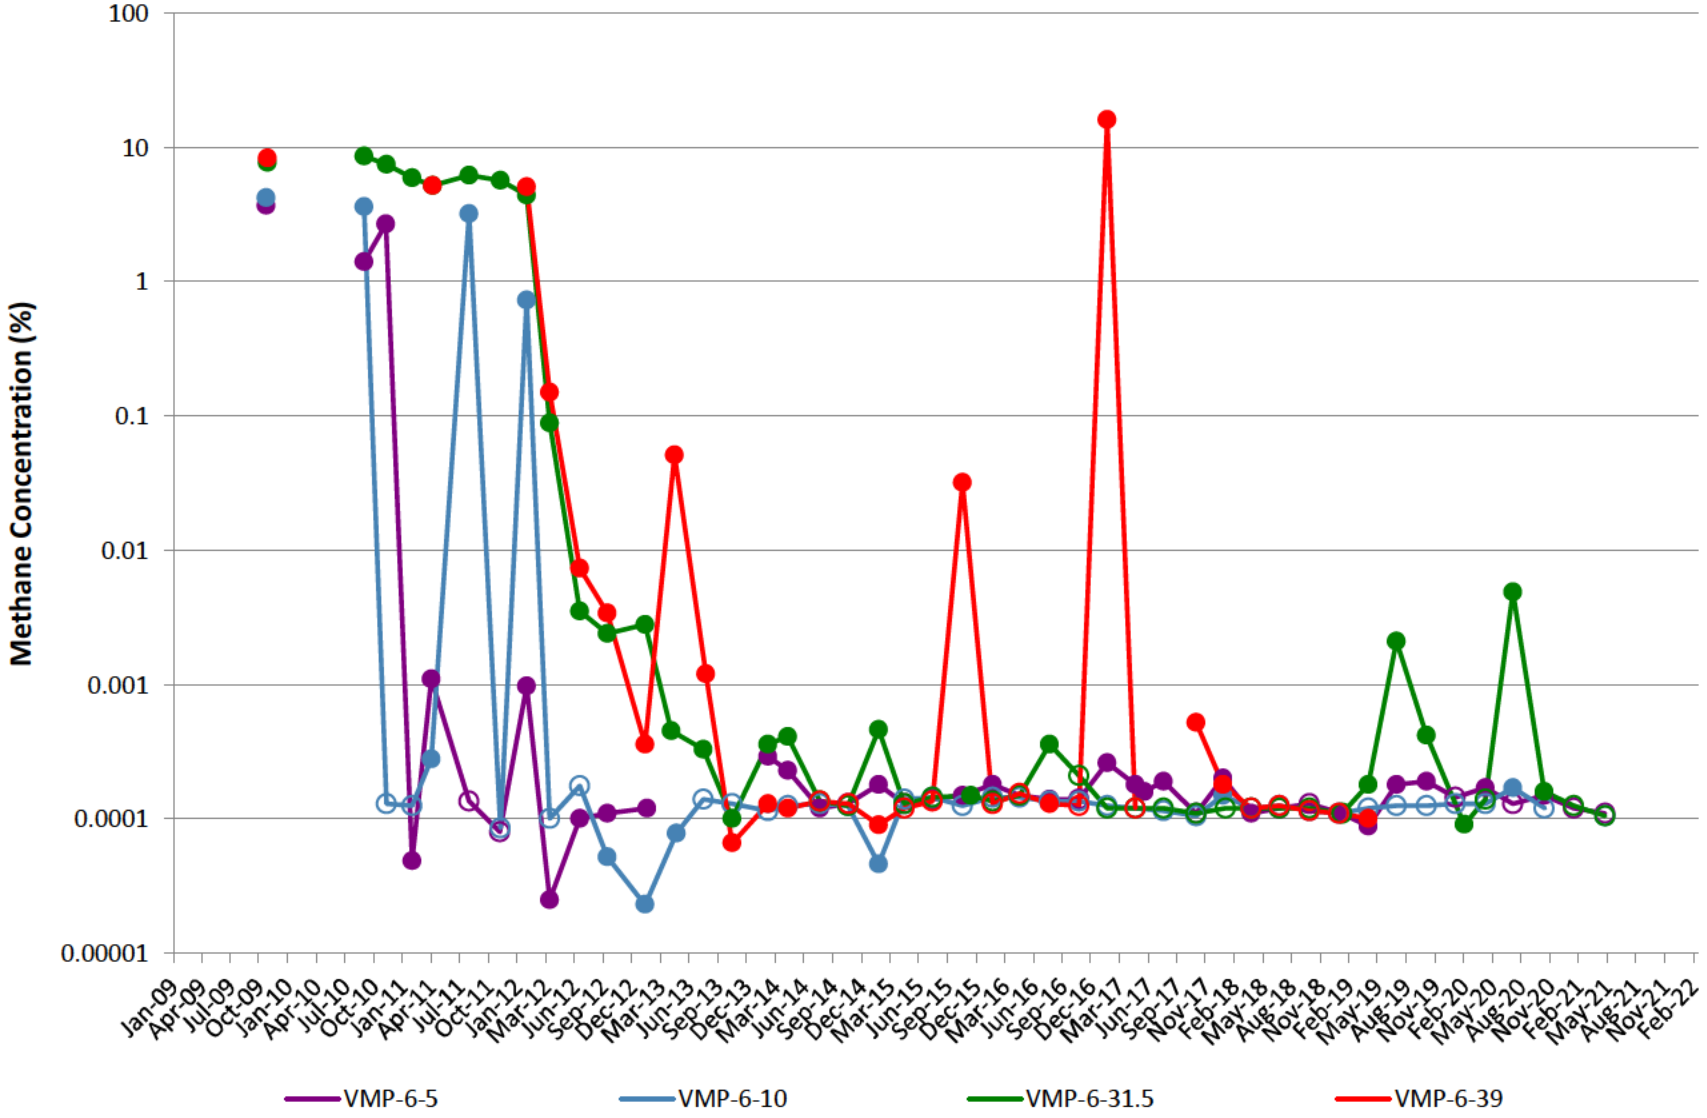


VMP-7

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

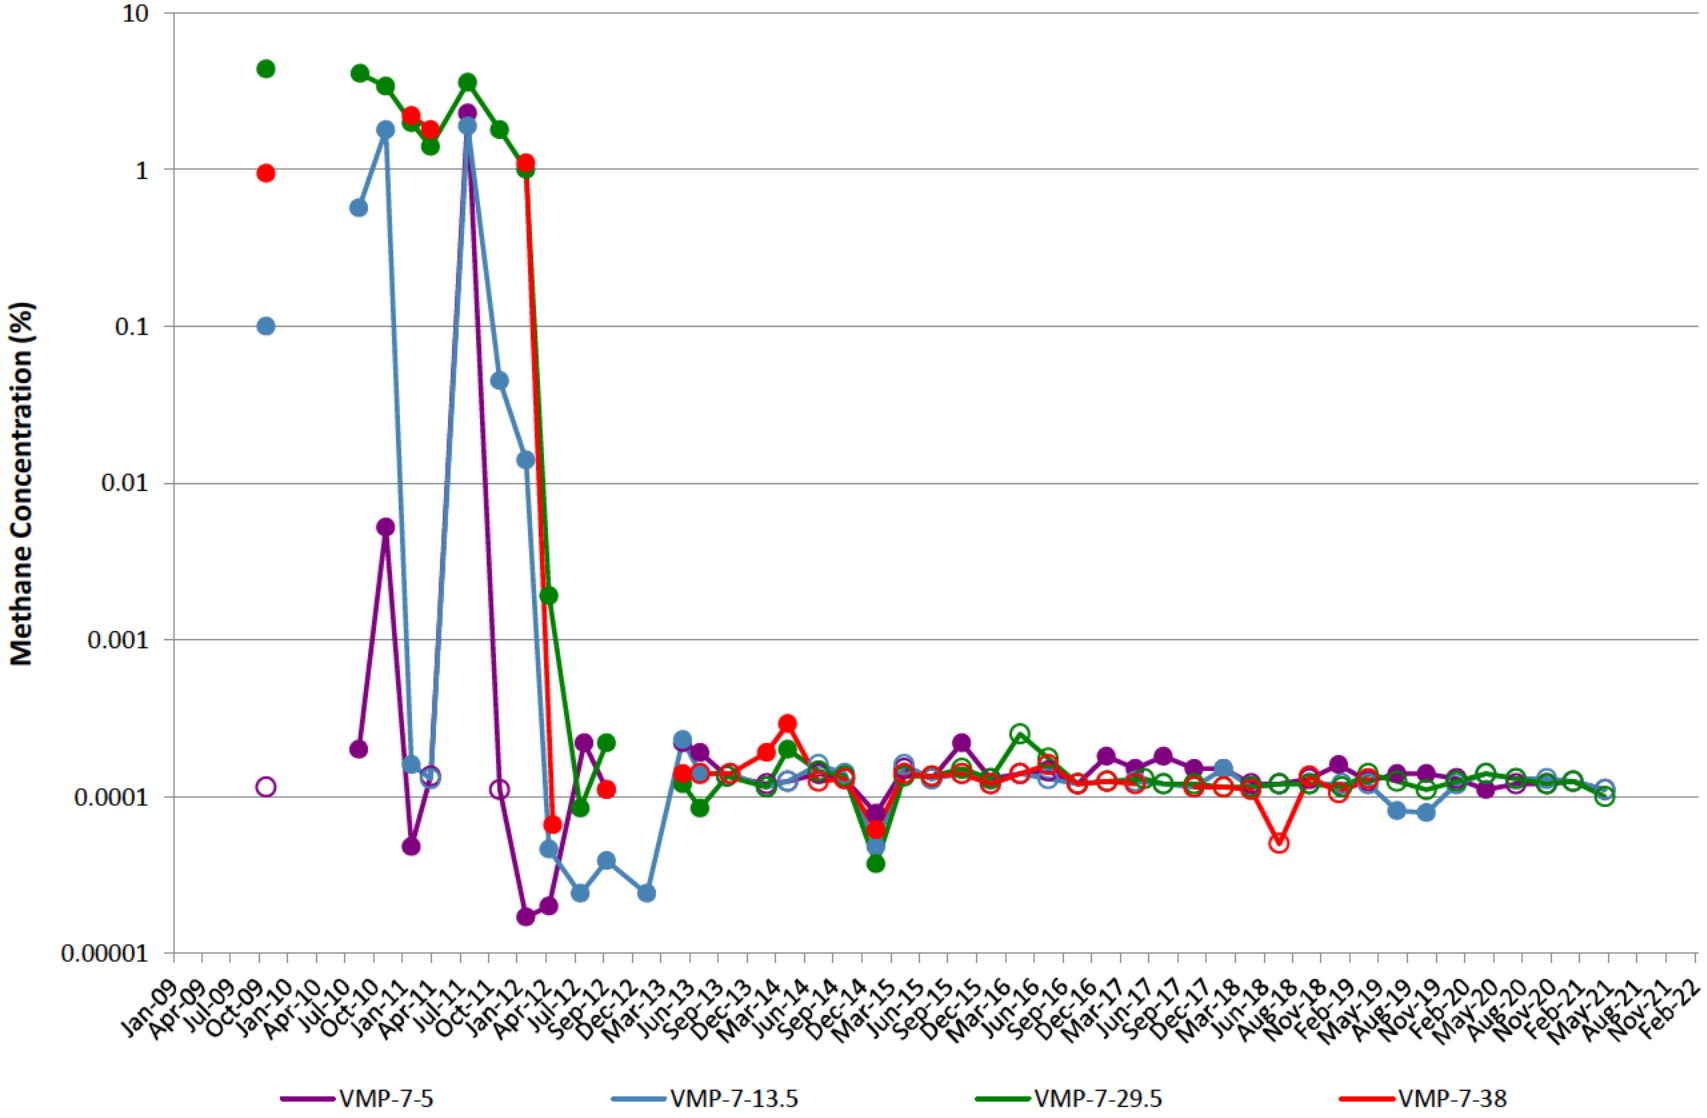


VMP-8

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

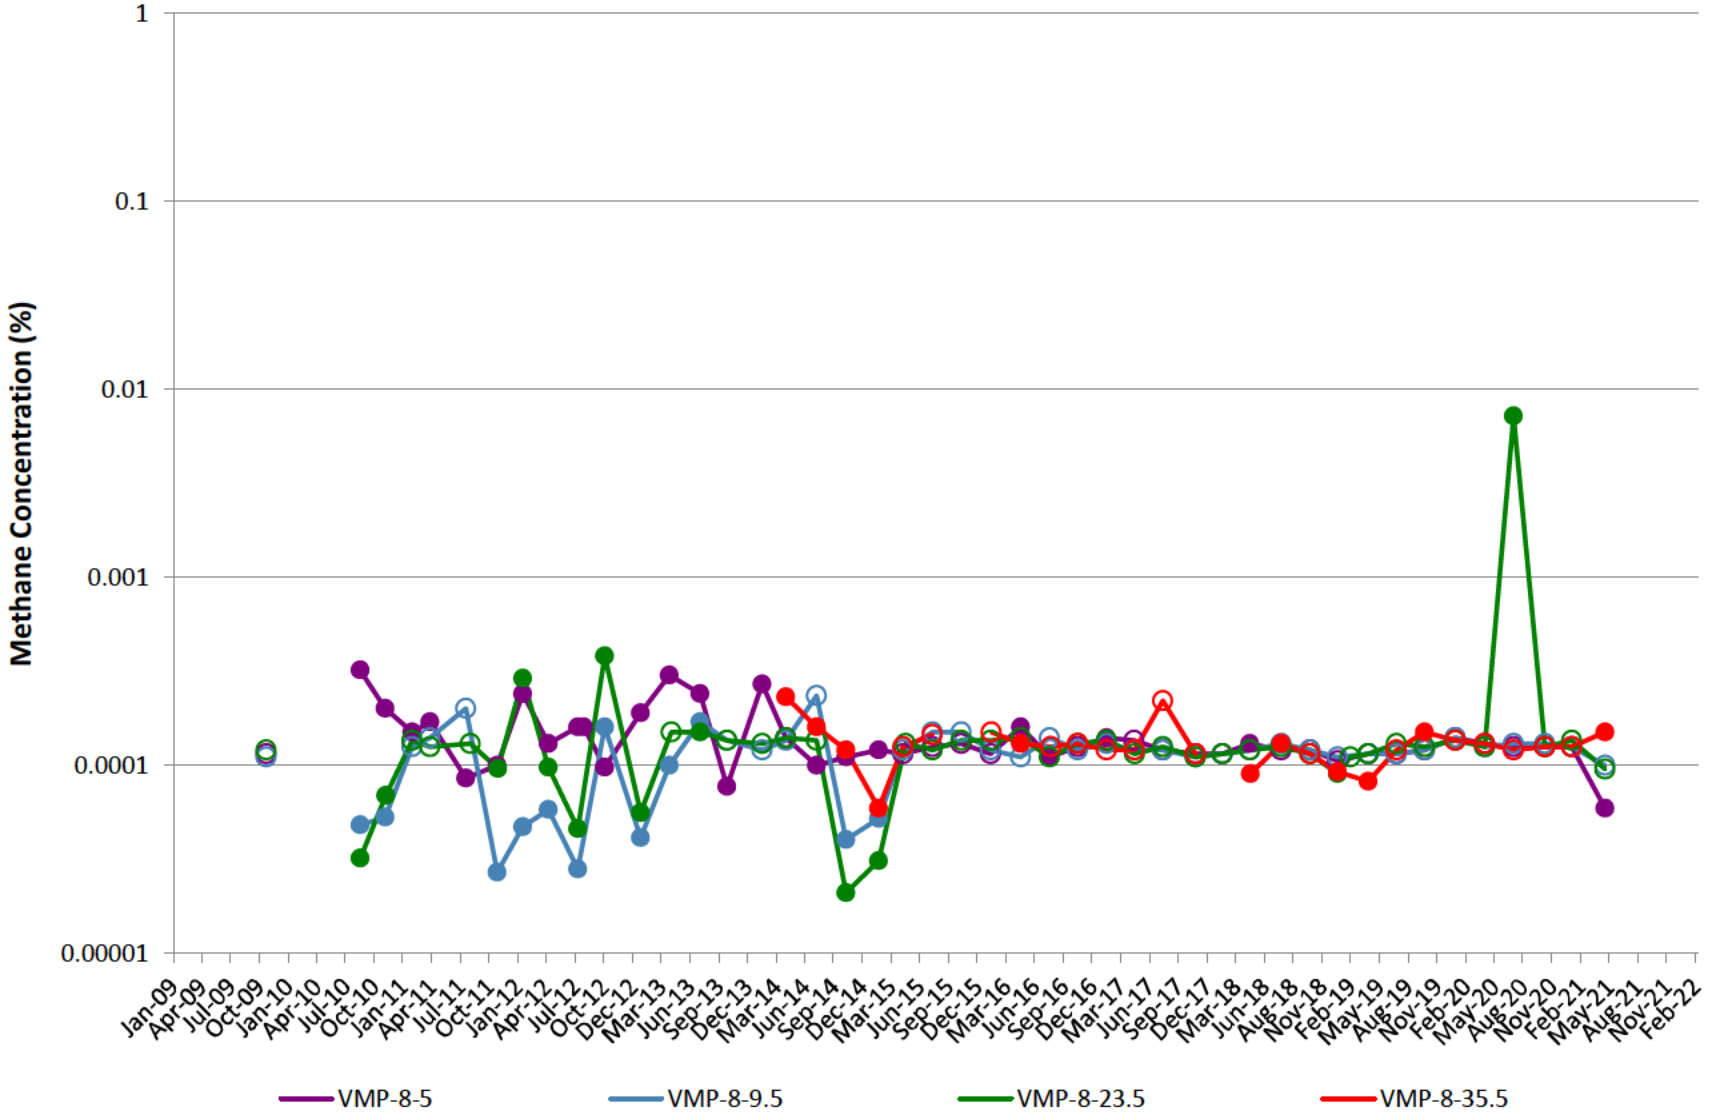


VMP-9

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

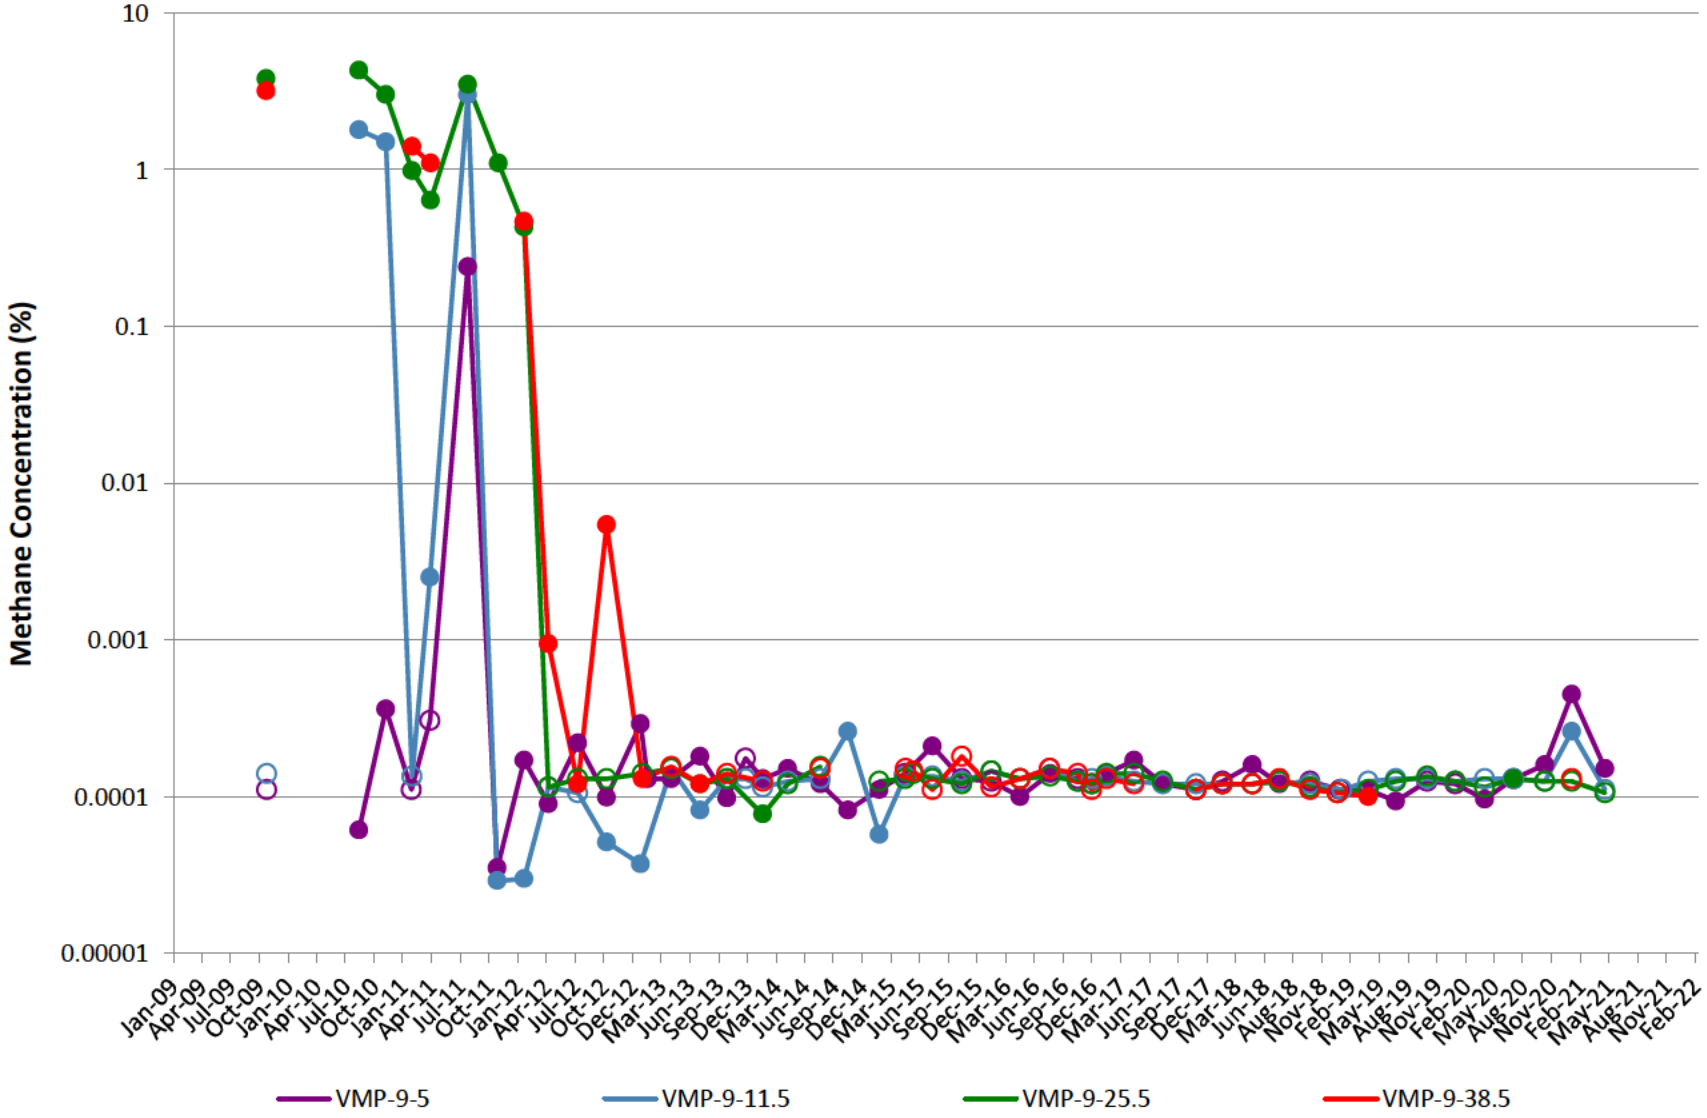


VMP-10

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

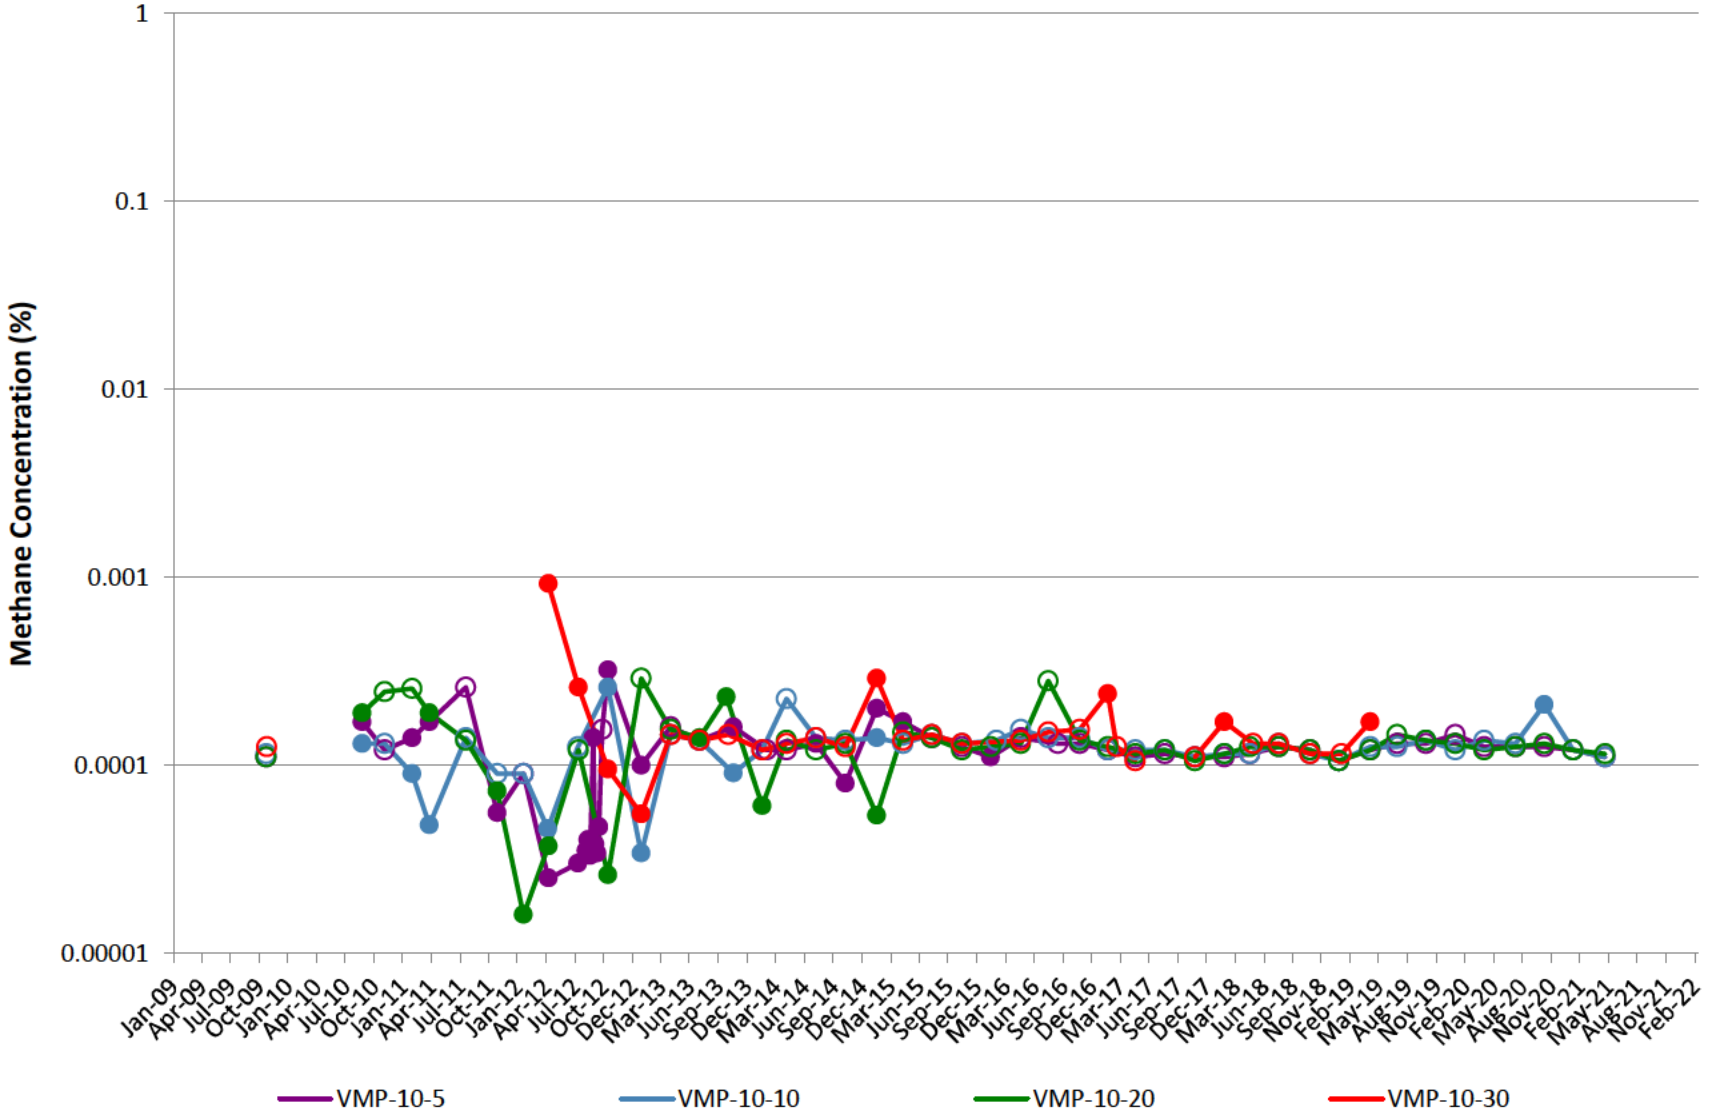


VMP-11

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

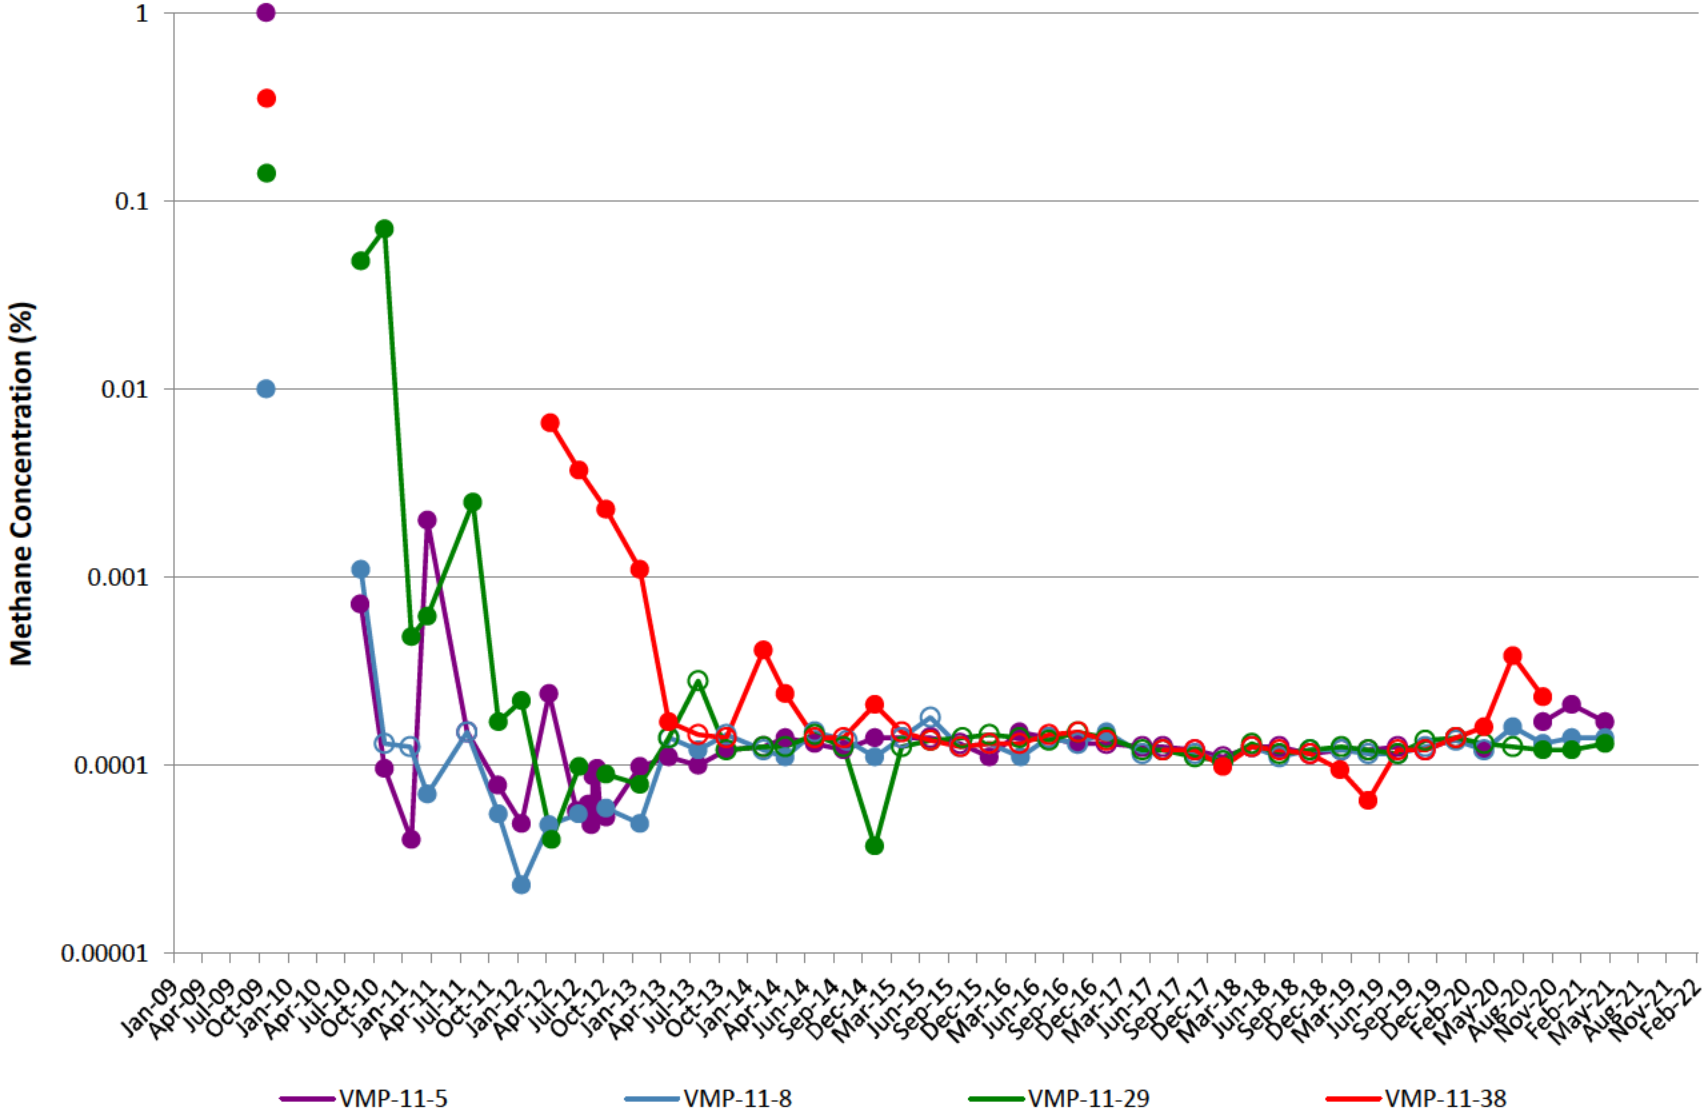


VMP-12

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

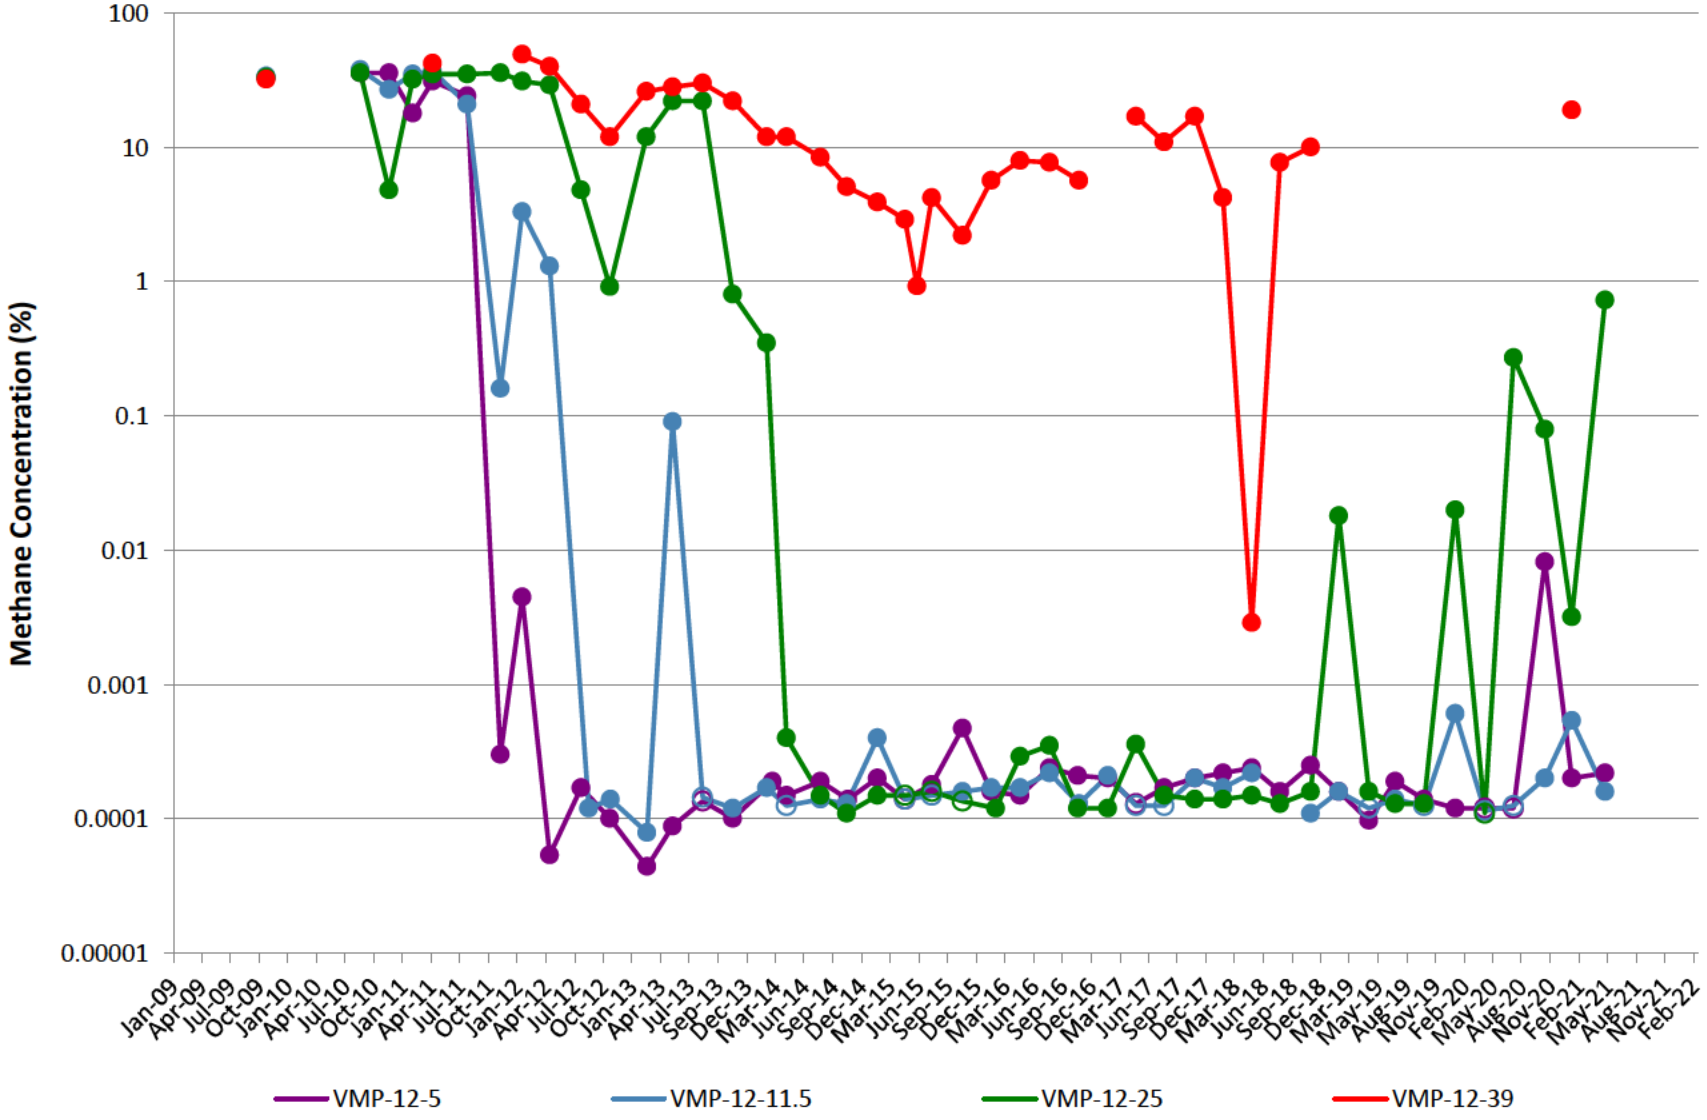


VMP-13

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

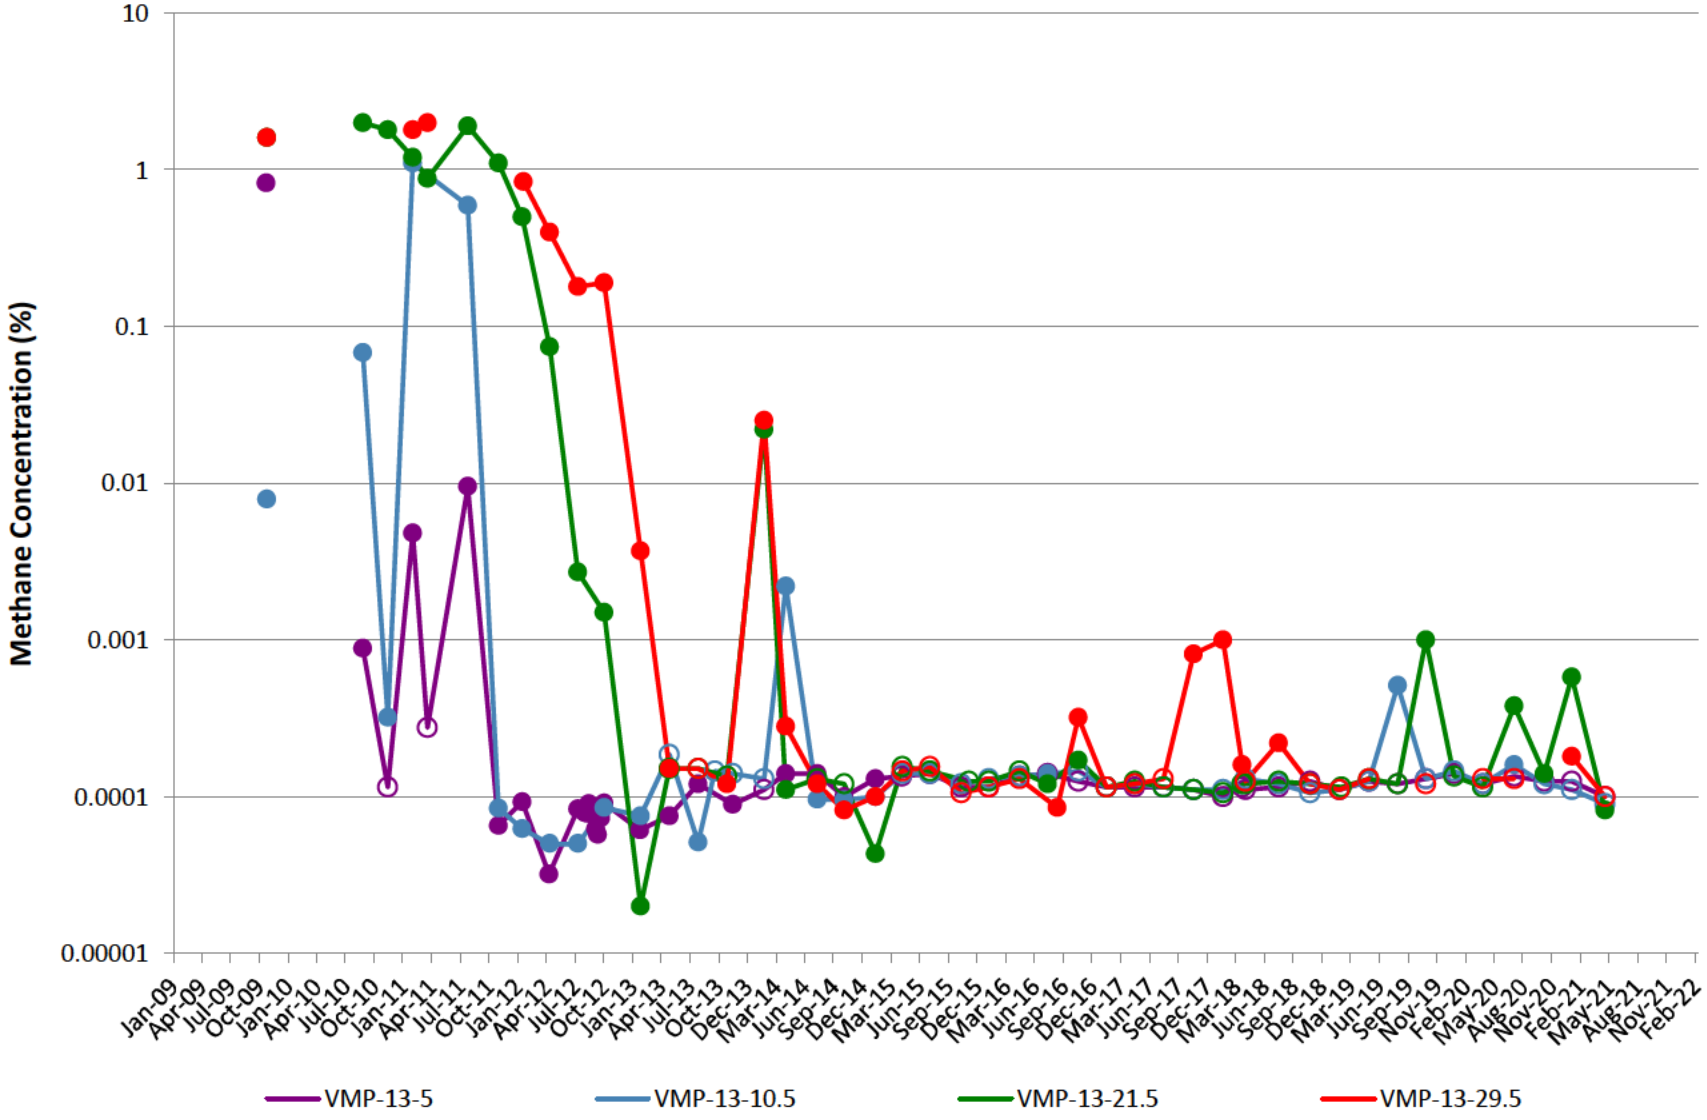


VMP-14

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

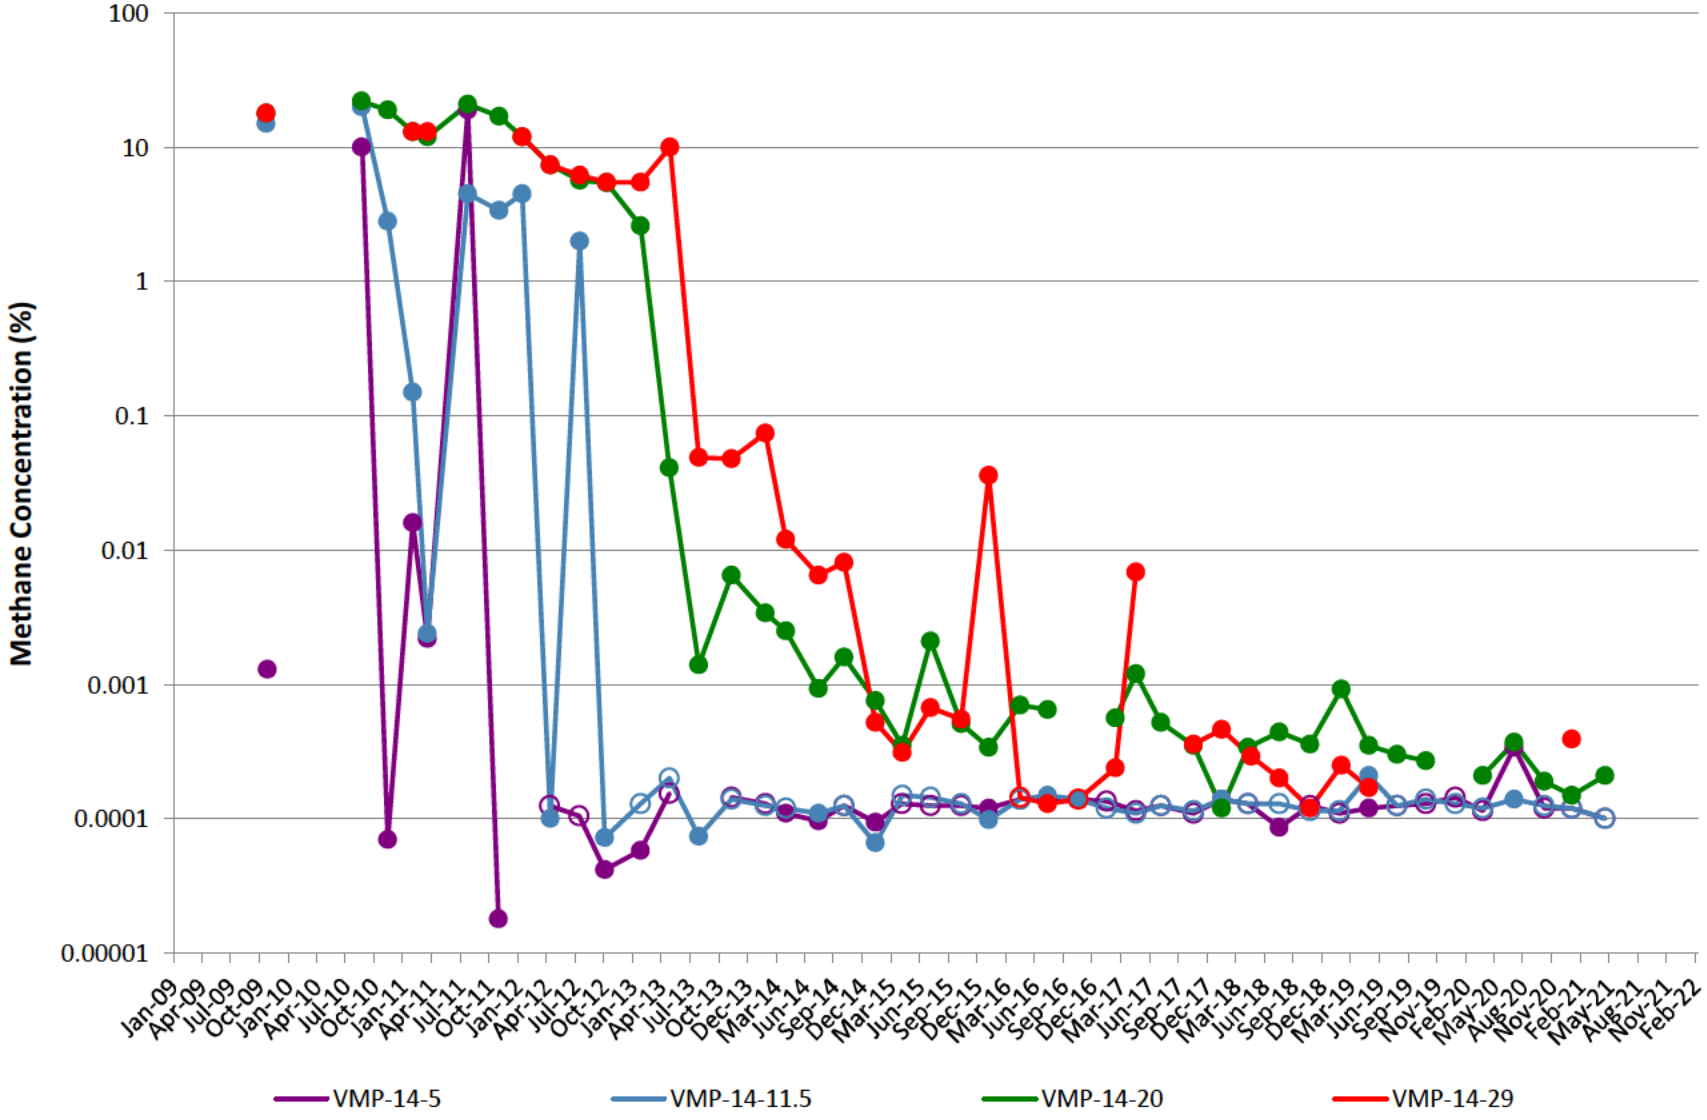


VMP-15

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

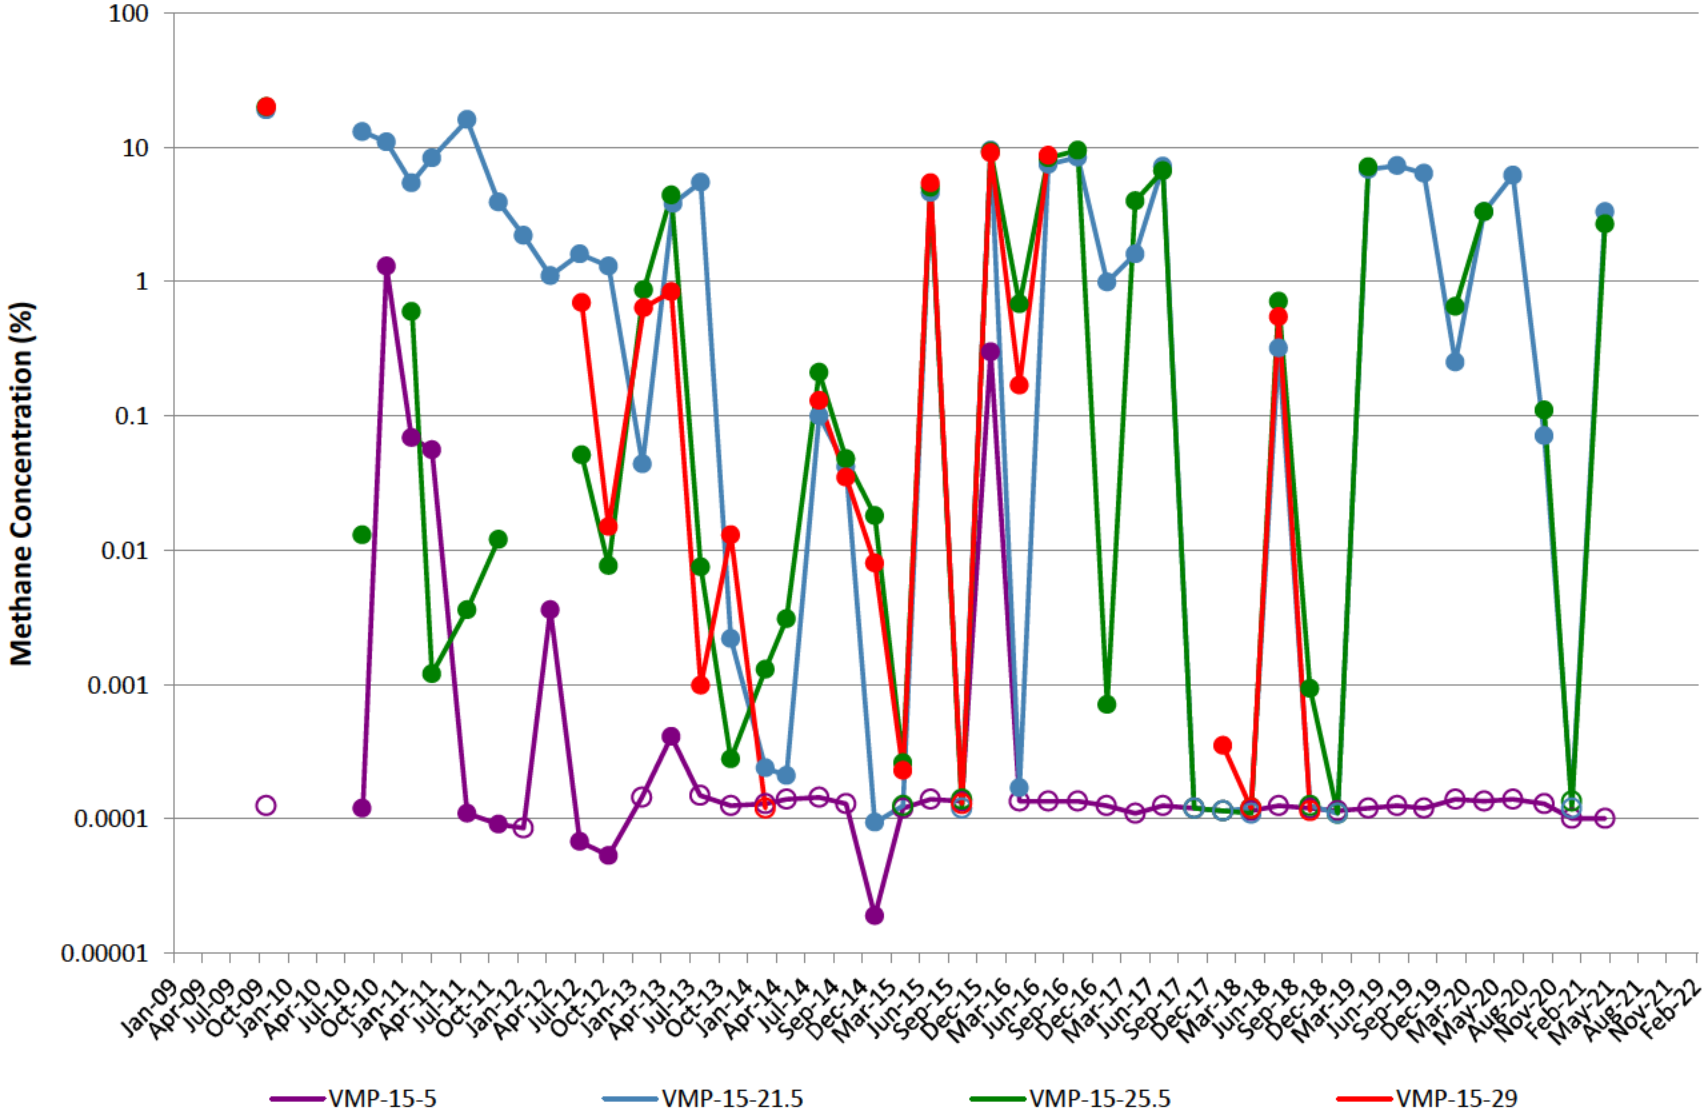


VMP-16

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

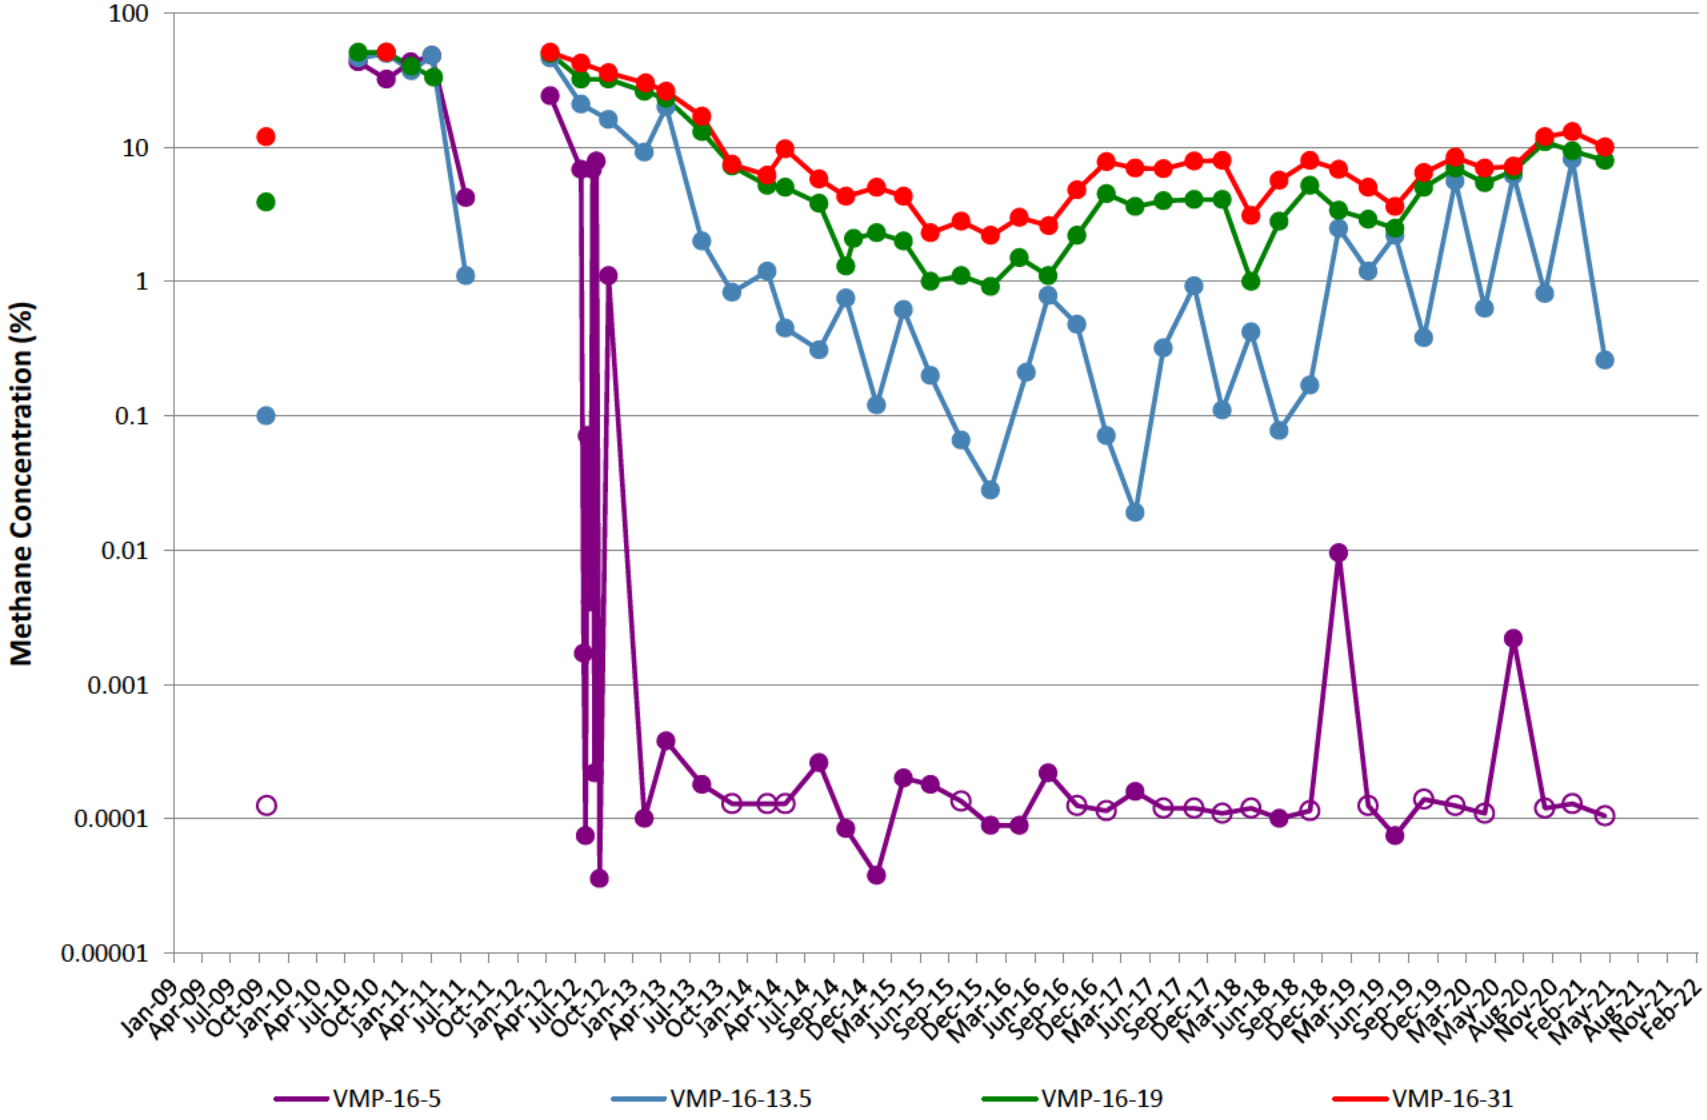


VMP-17

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

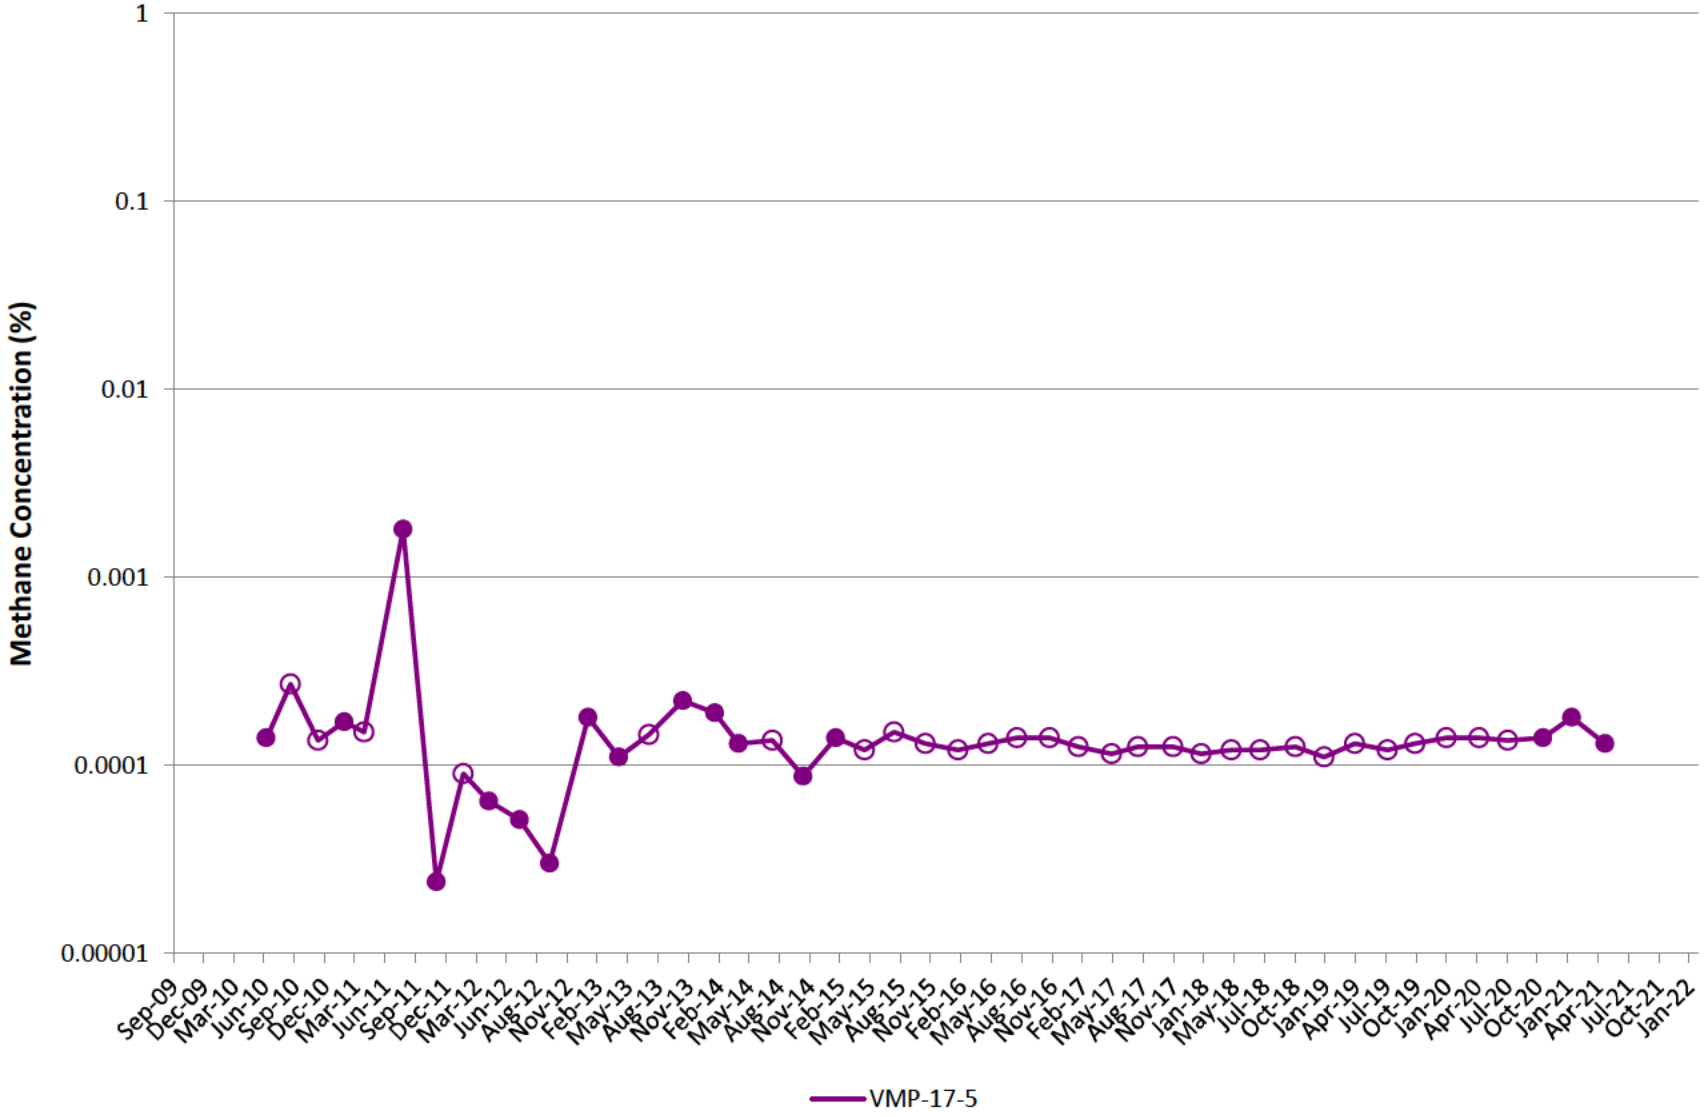


VMP-18

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

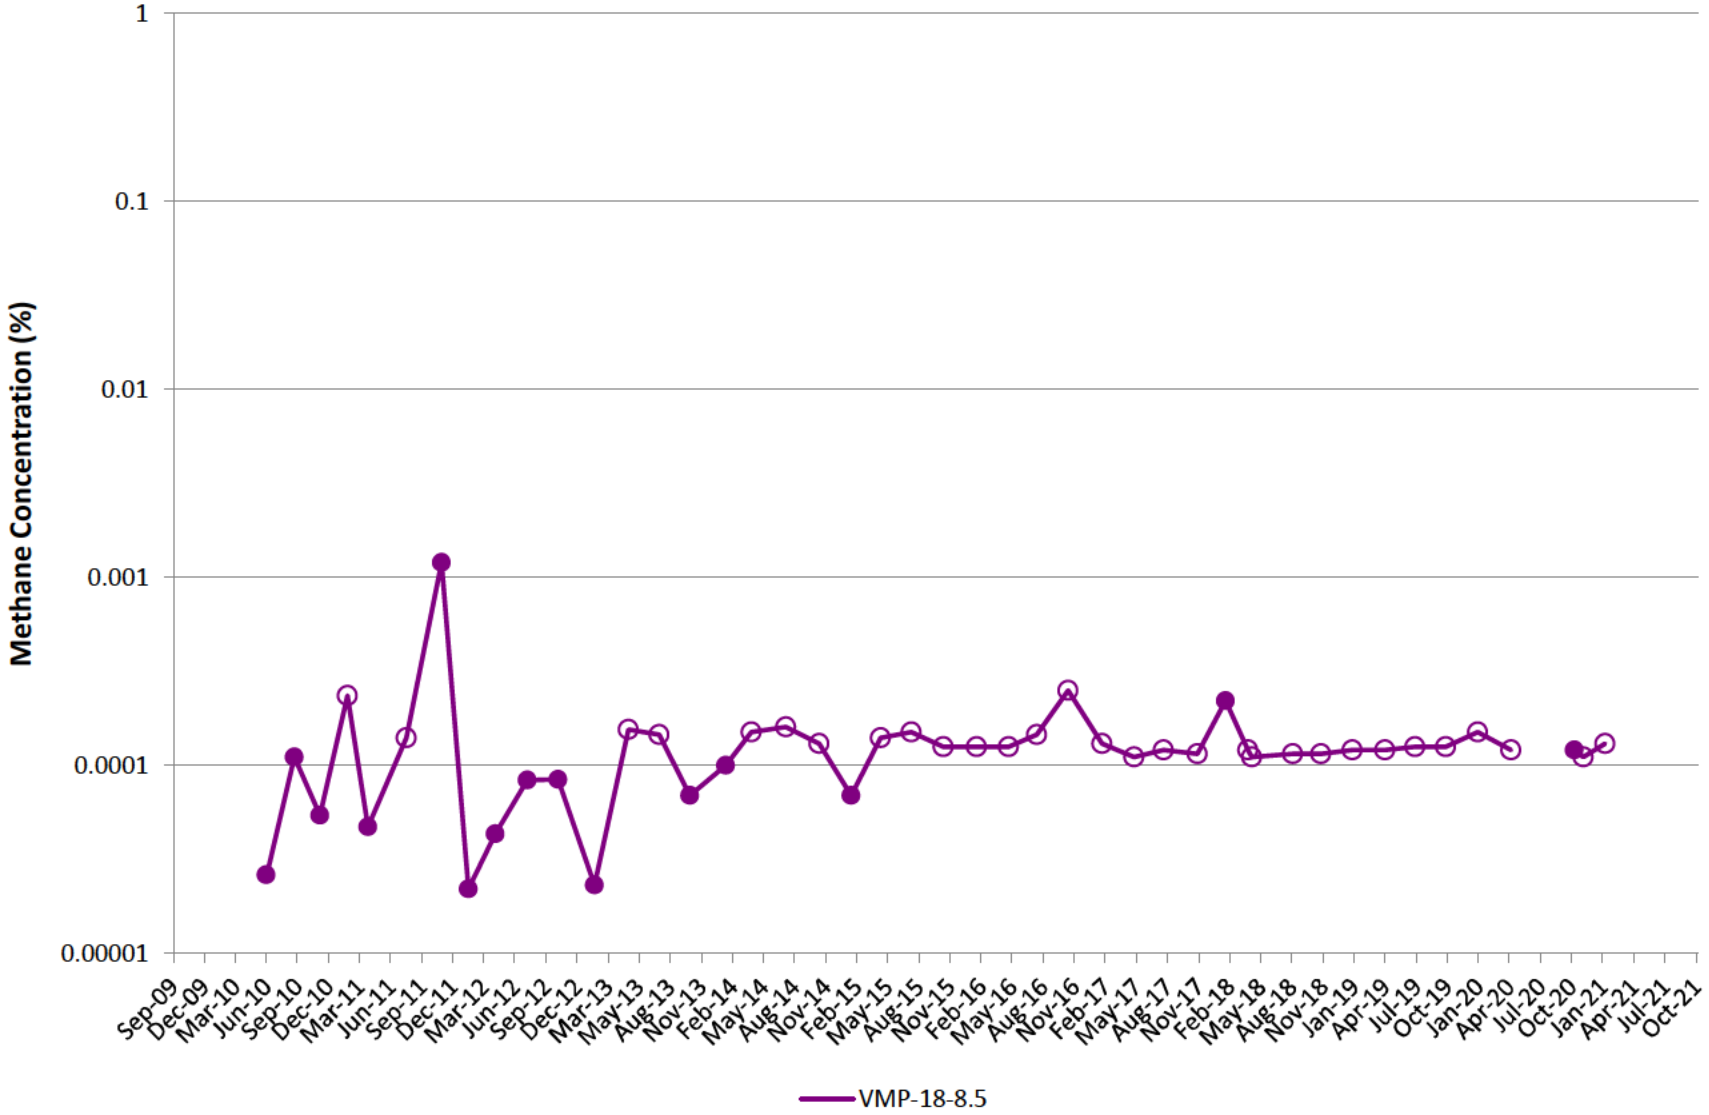


VMP-19

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

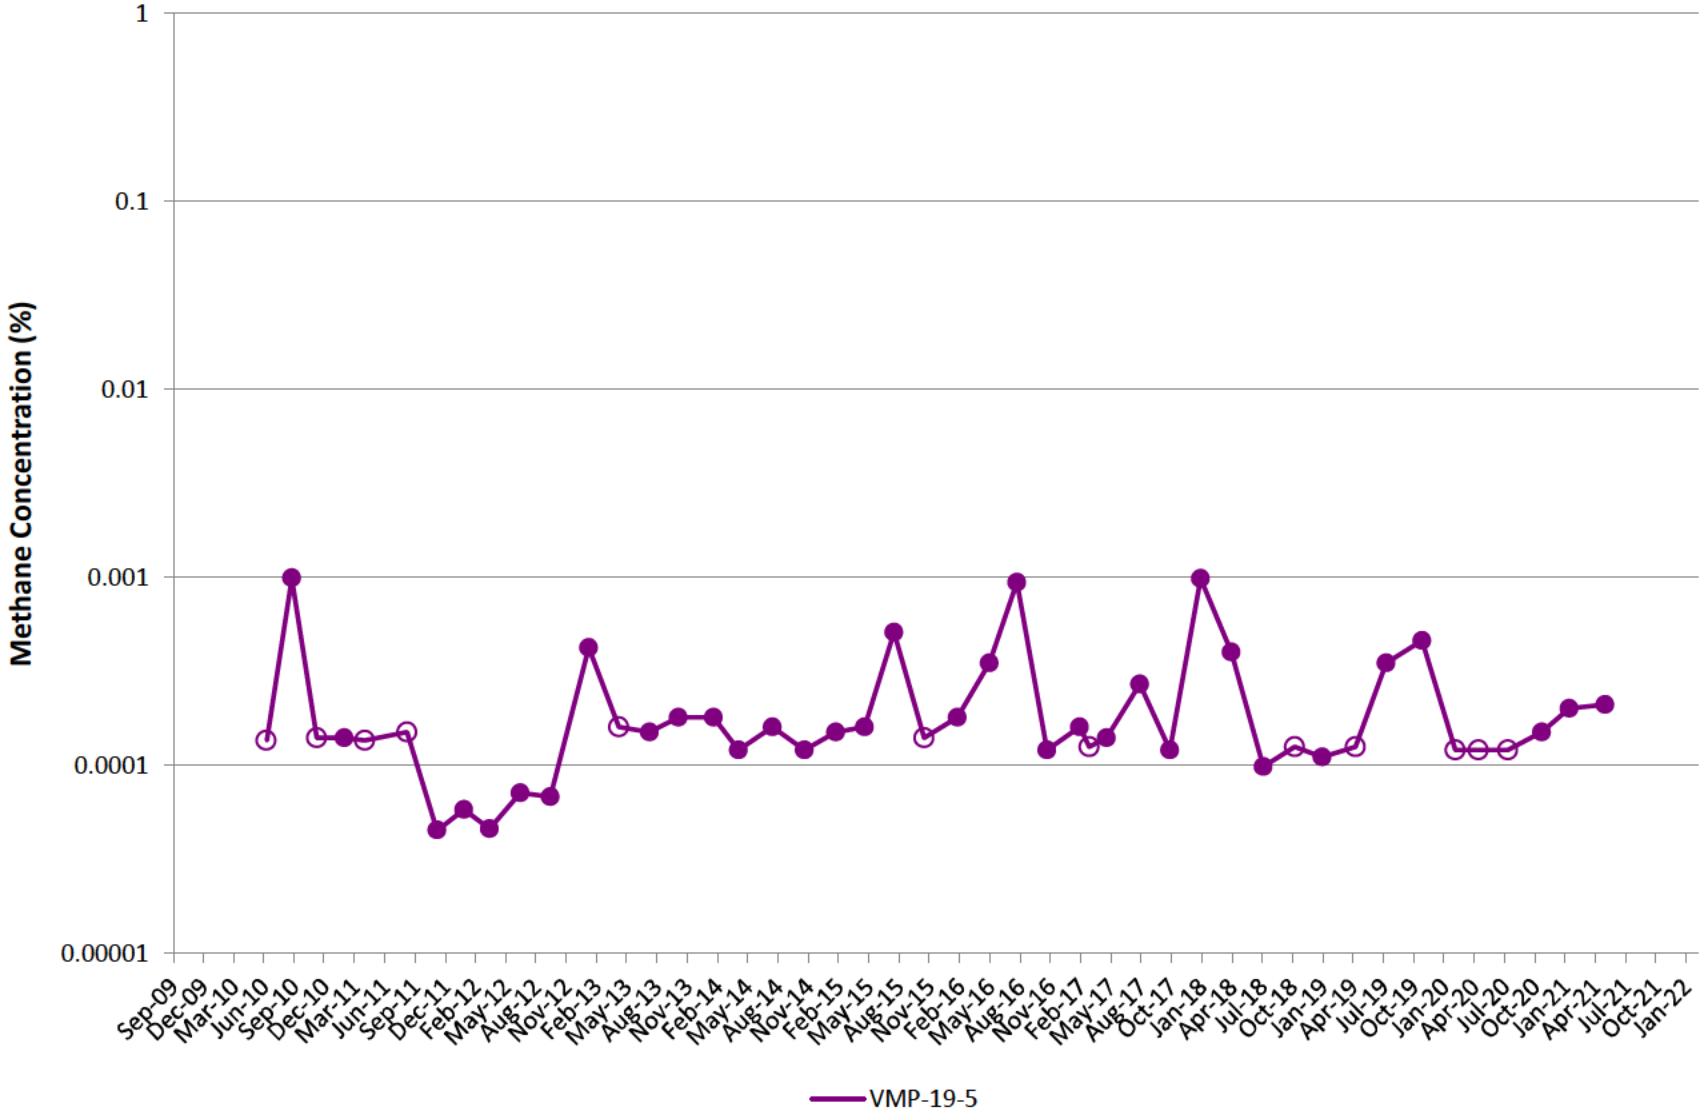


VMP-20

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

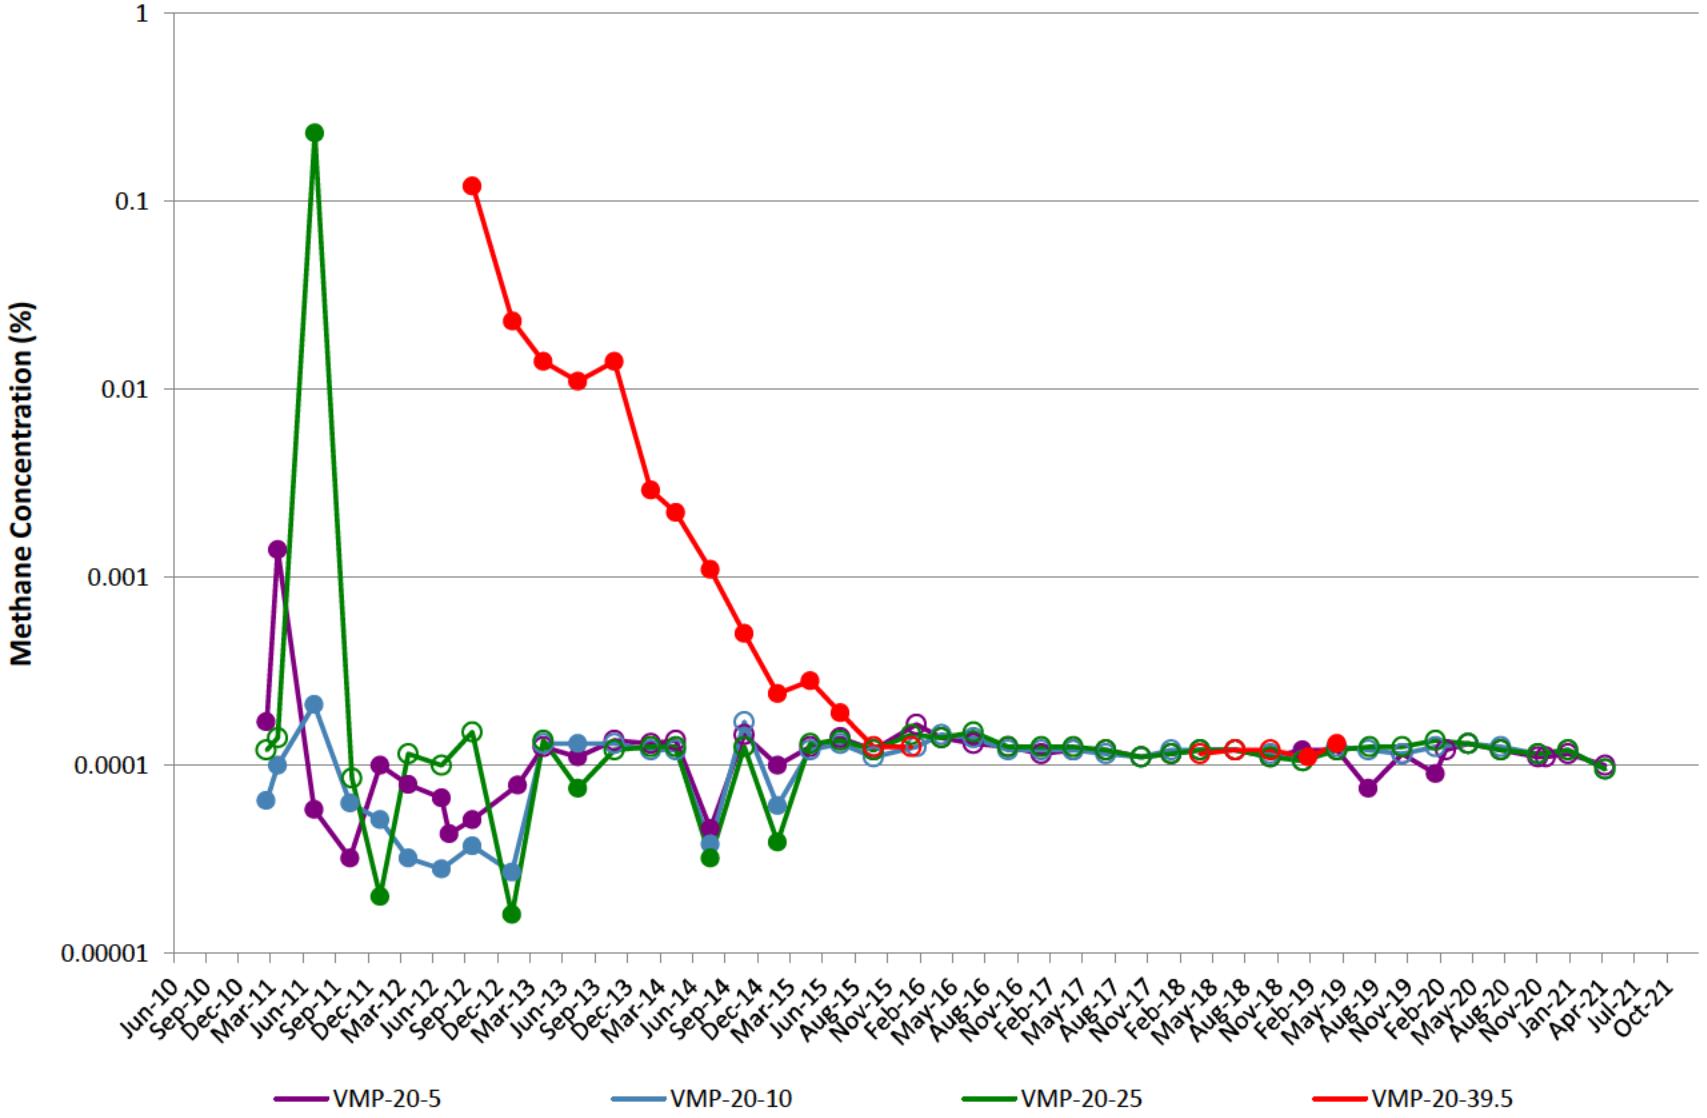


VMP-21

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

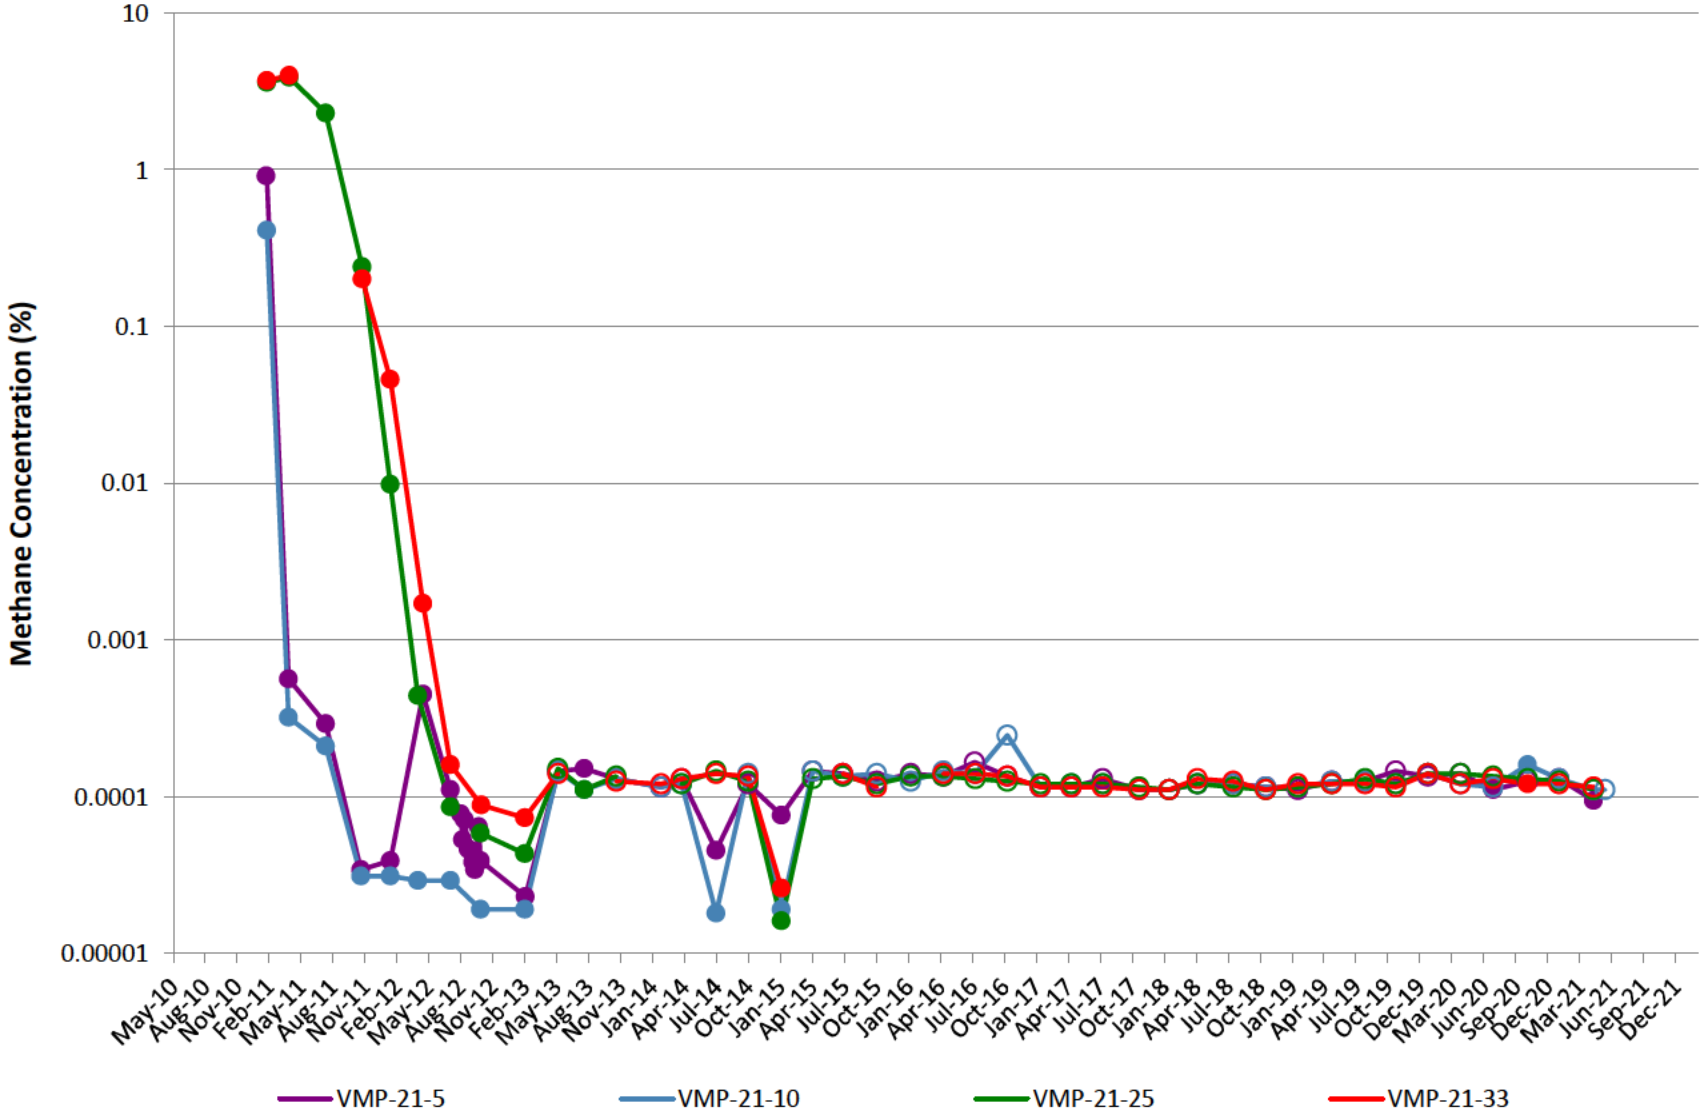


VMP-22

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

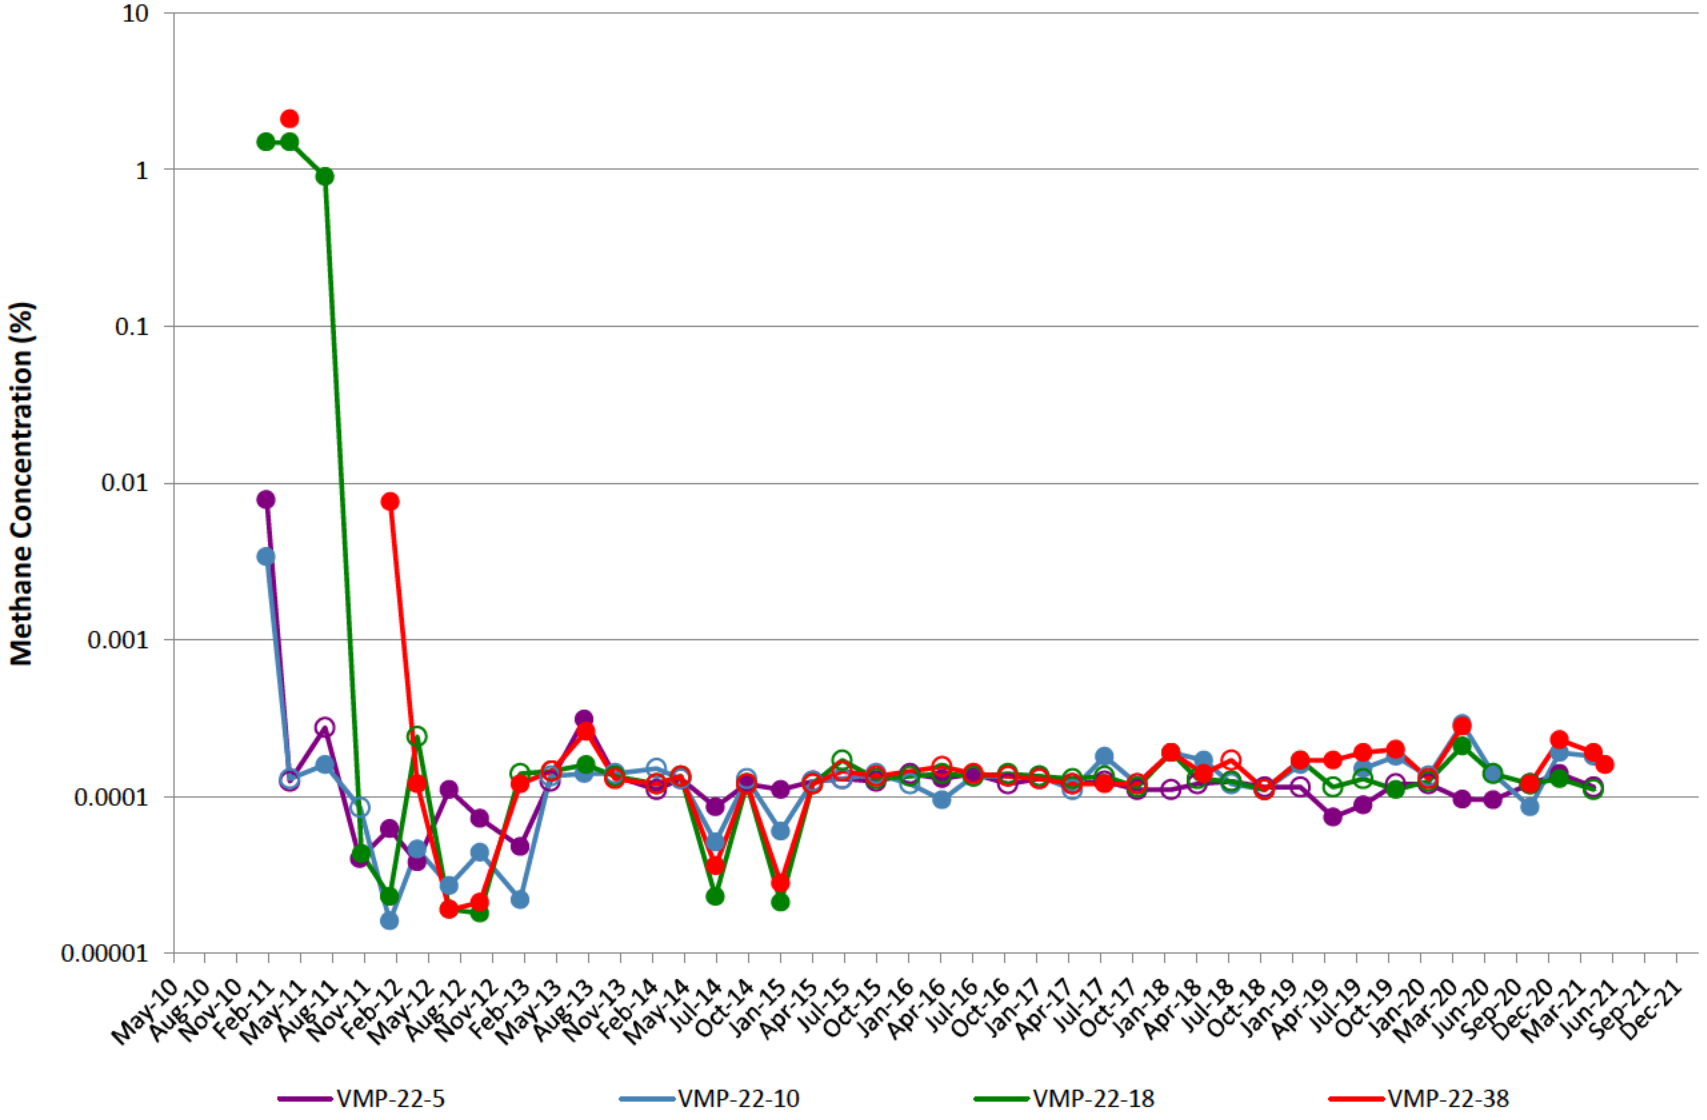


VMP-23

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

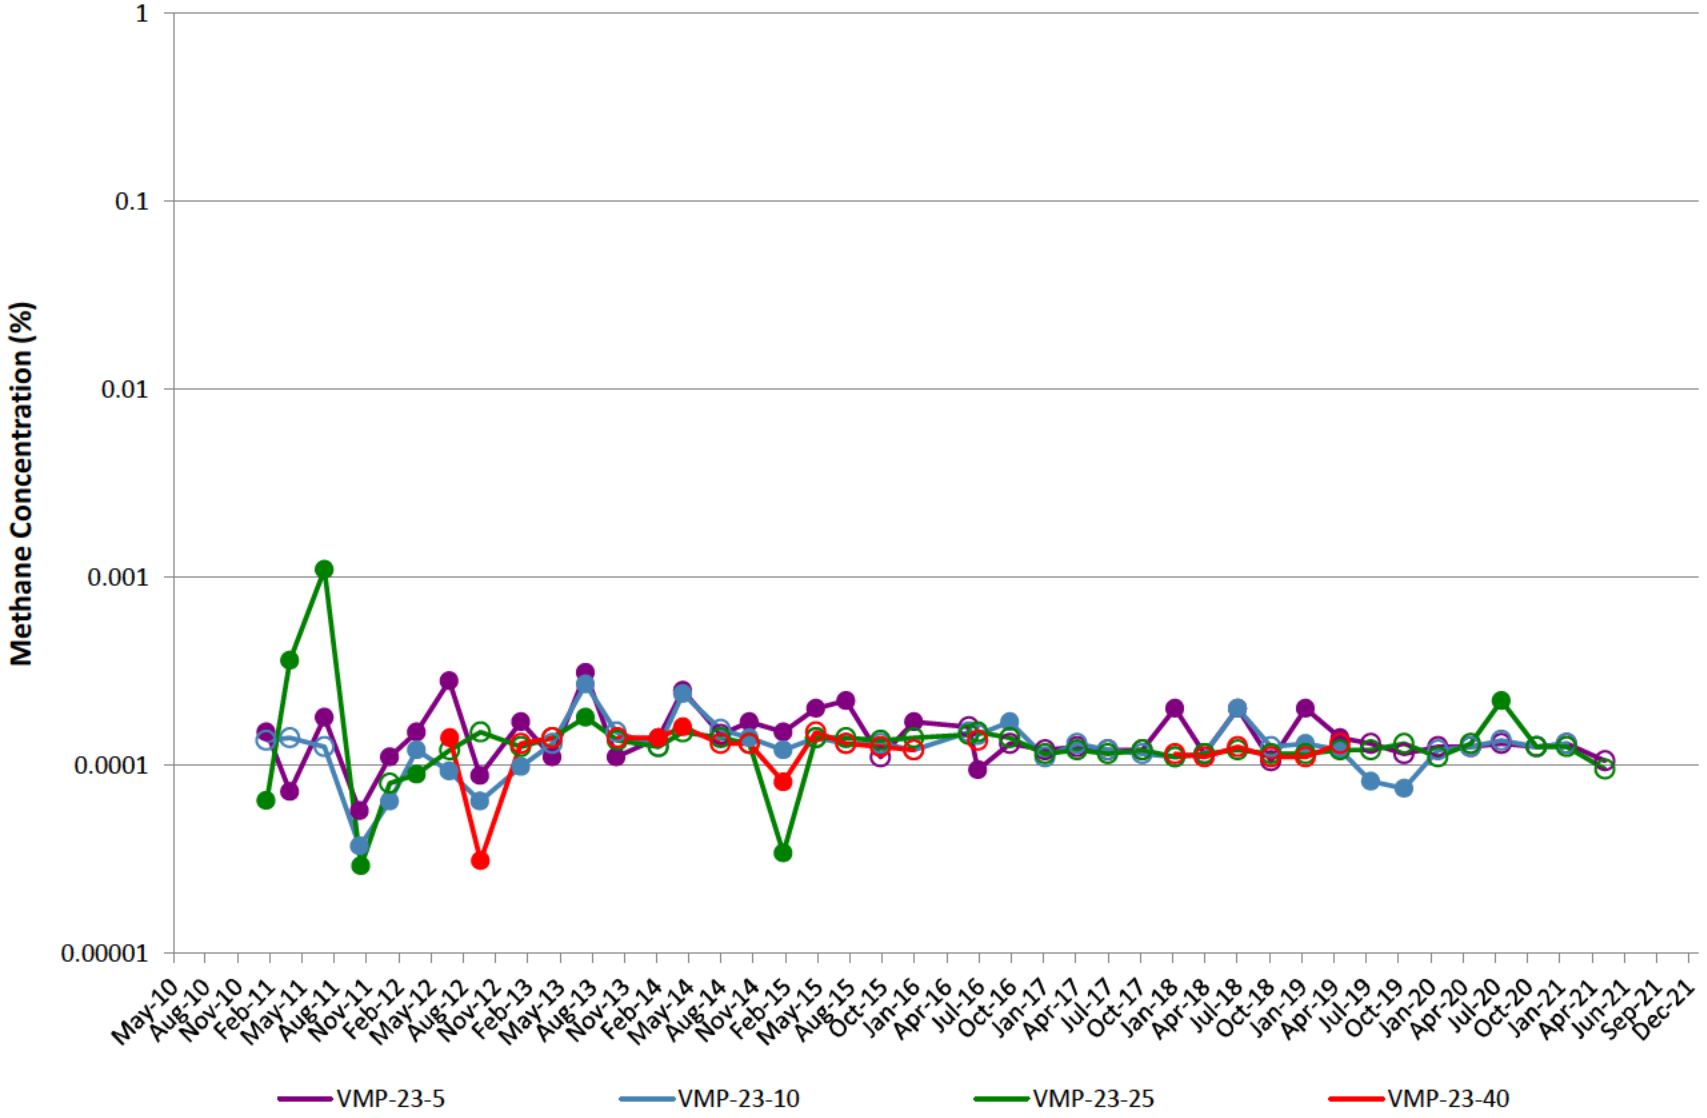


VMP-24

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

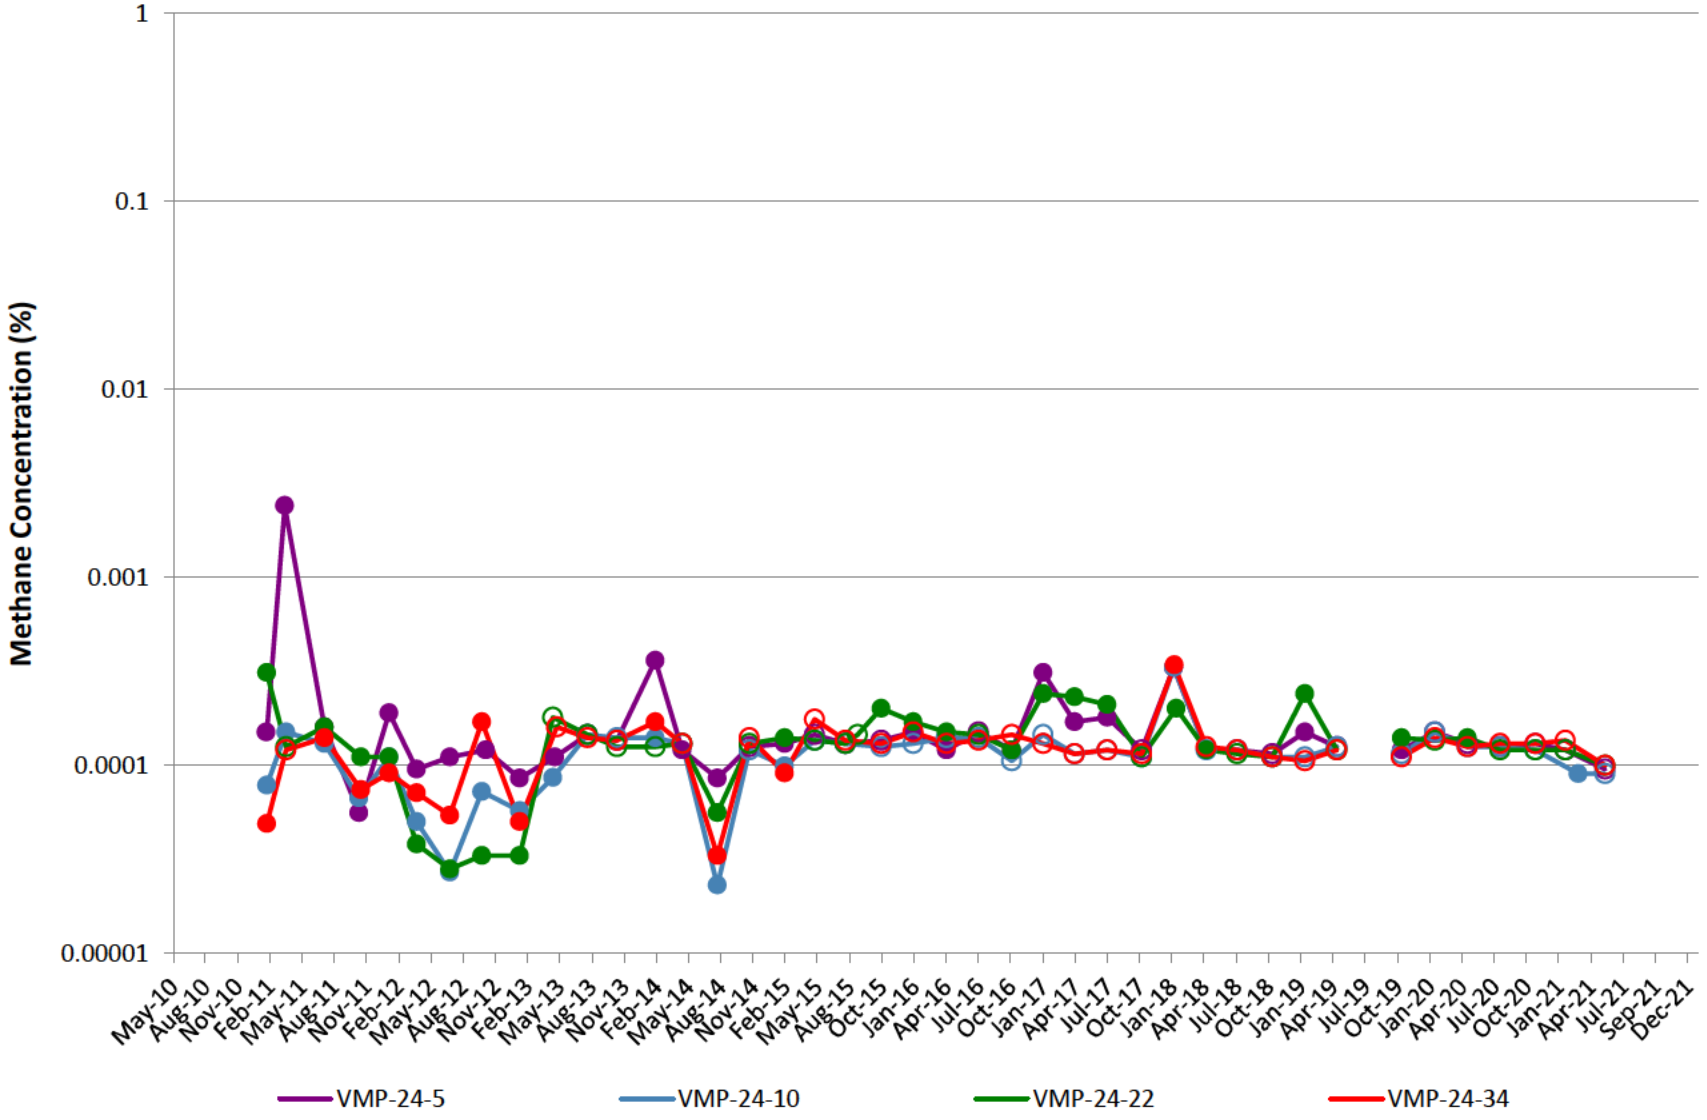


VMP-25

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. Effective 2Q18, samples will no longer be collected at VMP-25-31 due to port integrity.

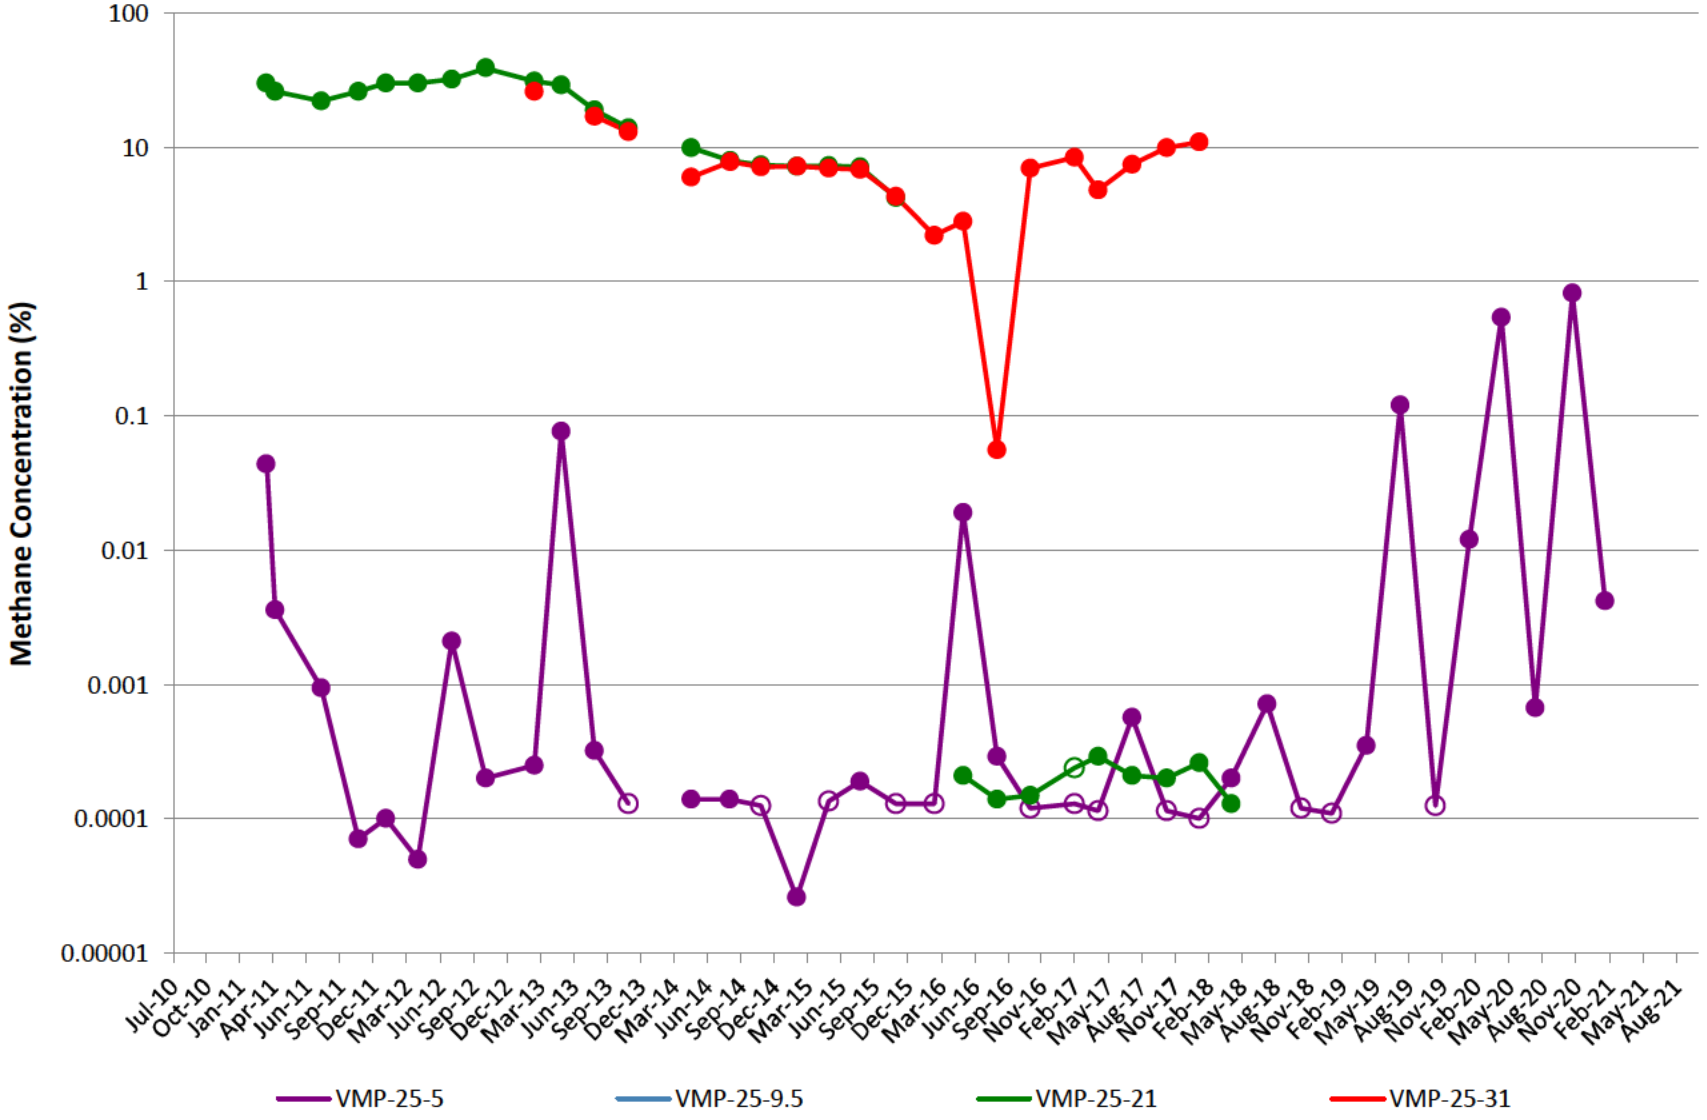


VMP-29

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

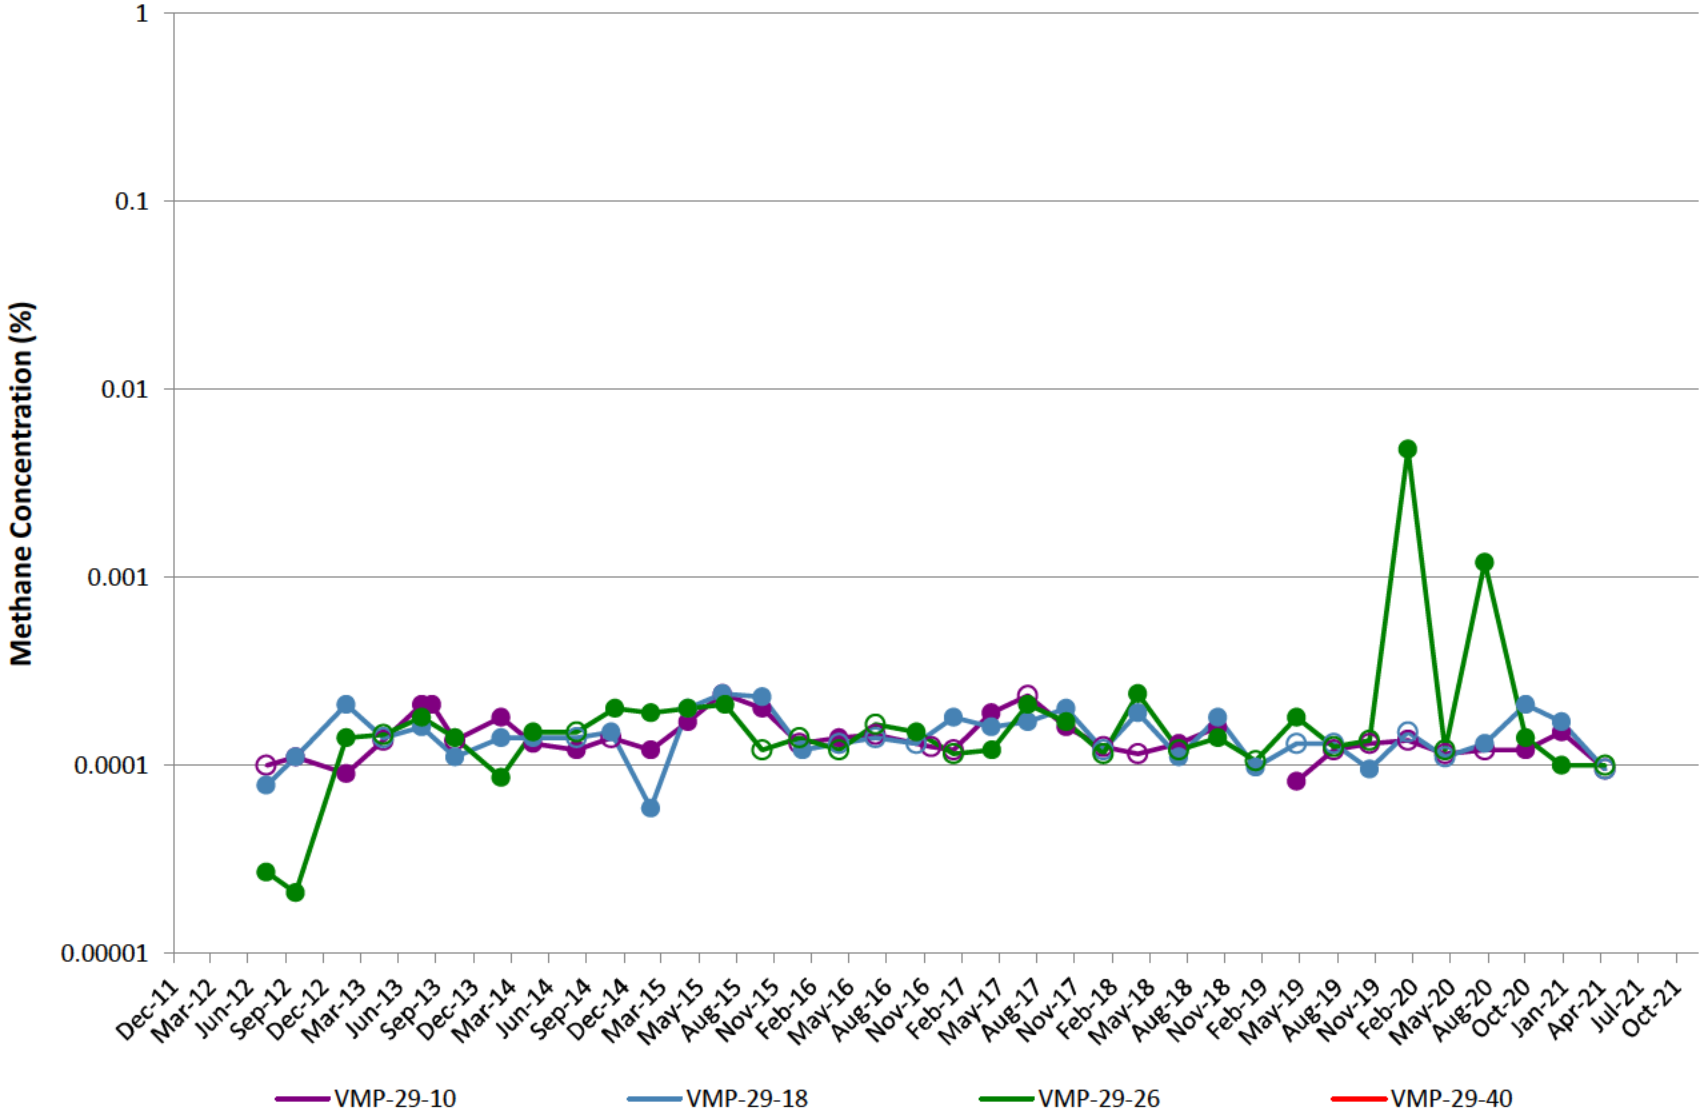


VMP-30

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

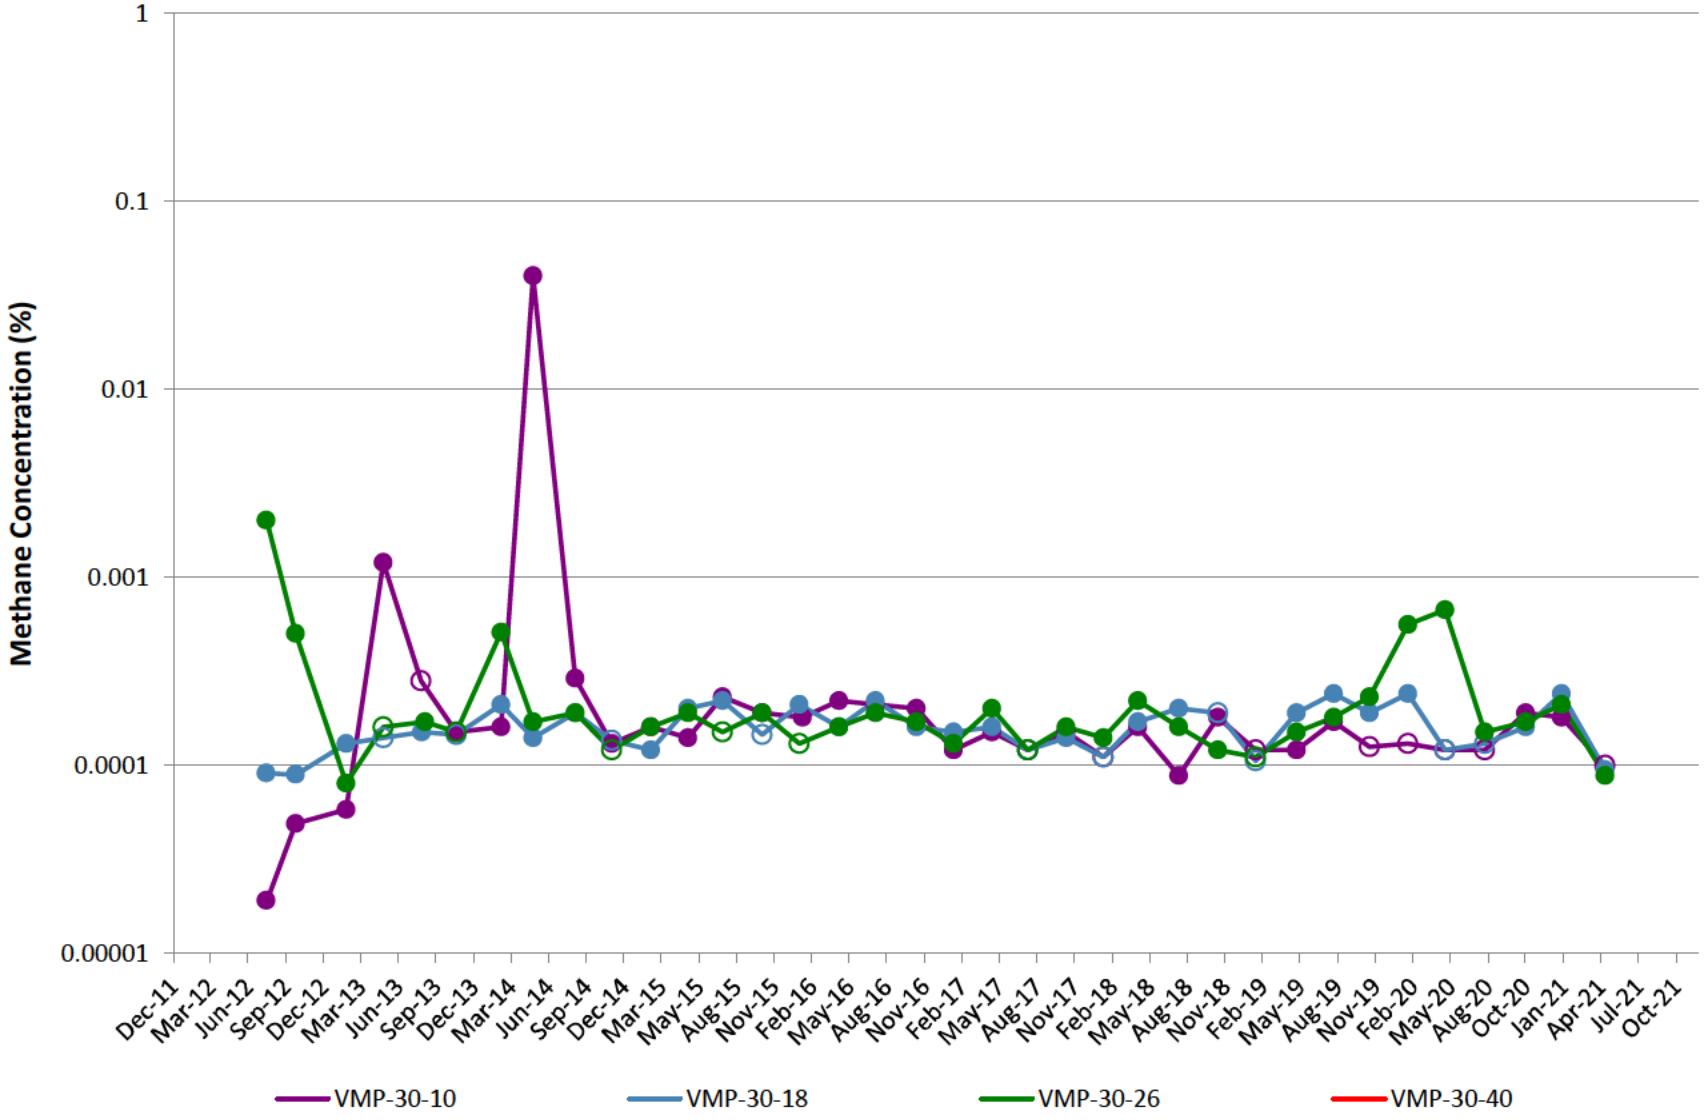


VMP-31

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. VMP-31 was abandoned in 2Q14 after persistent helium issues and replaced by VMP-56.

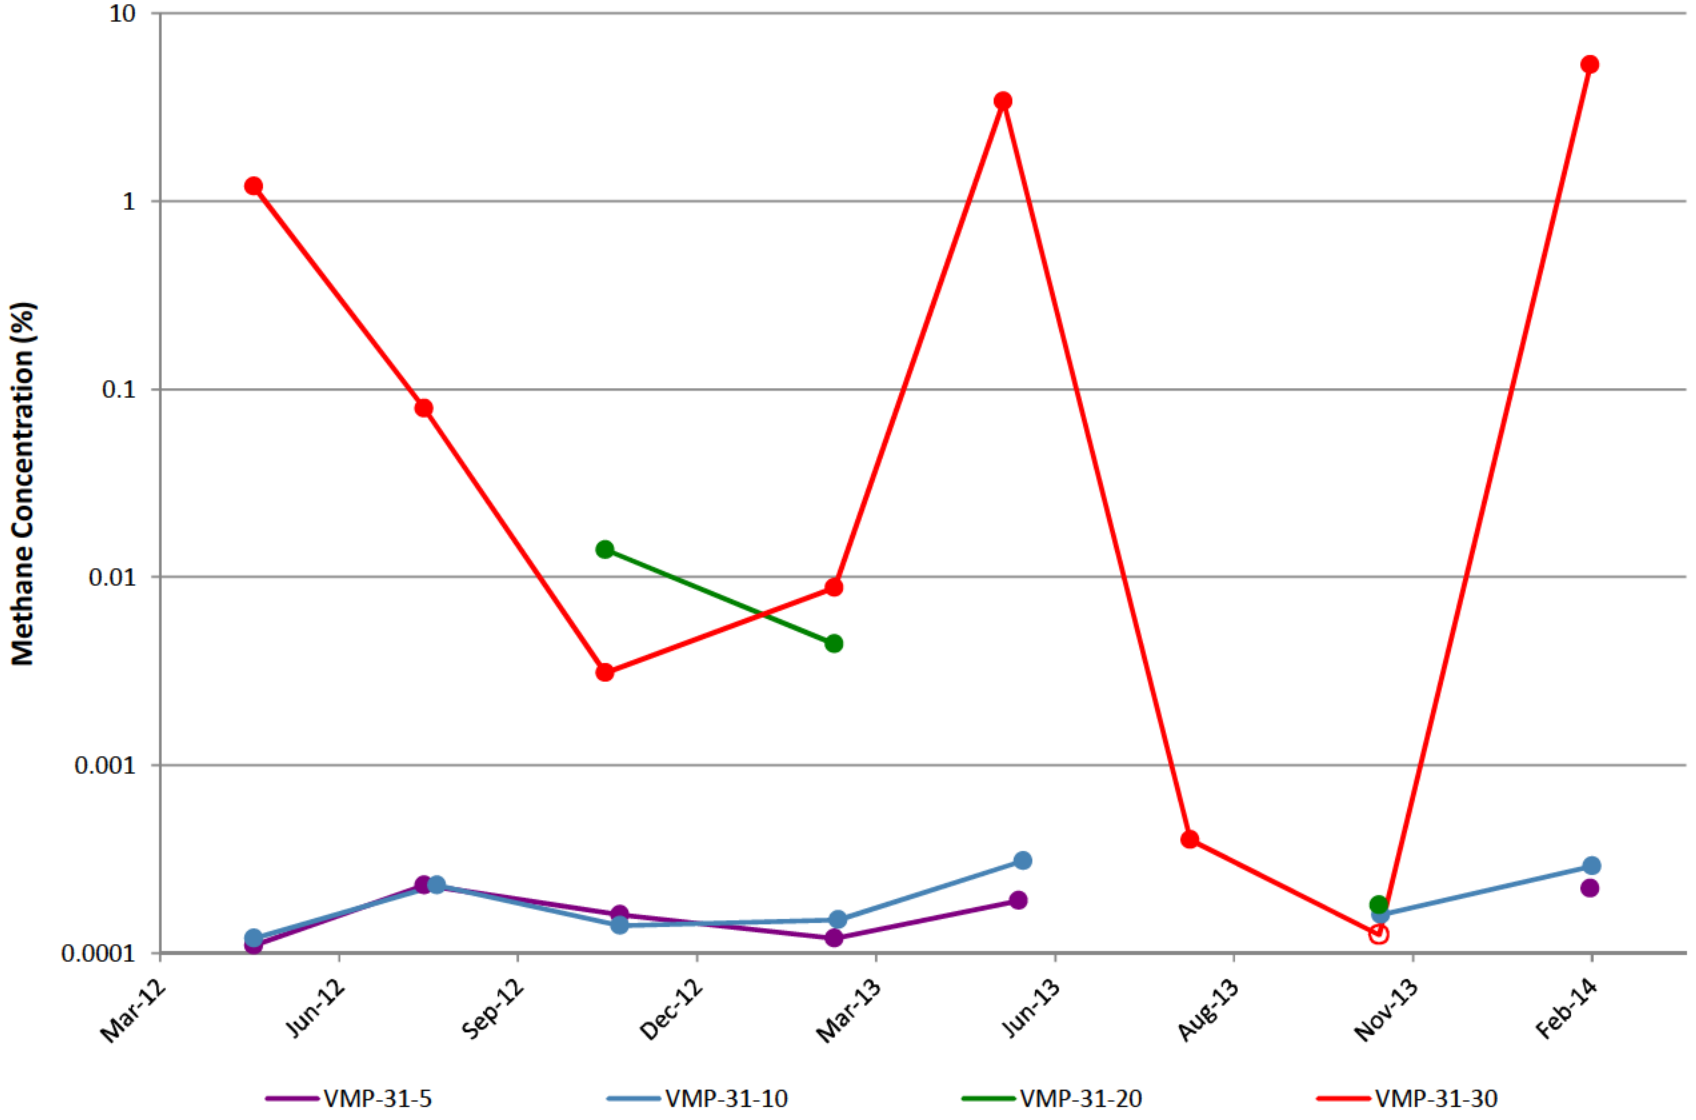


VMP-32

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

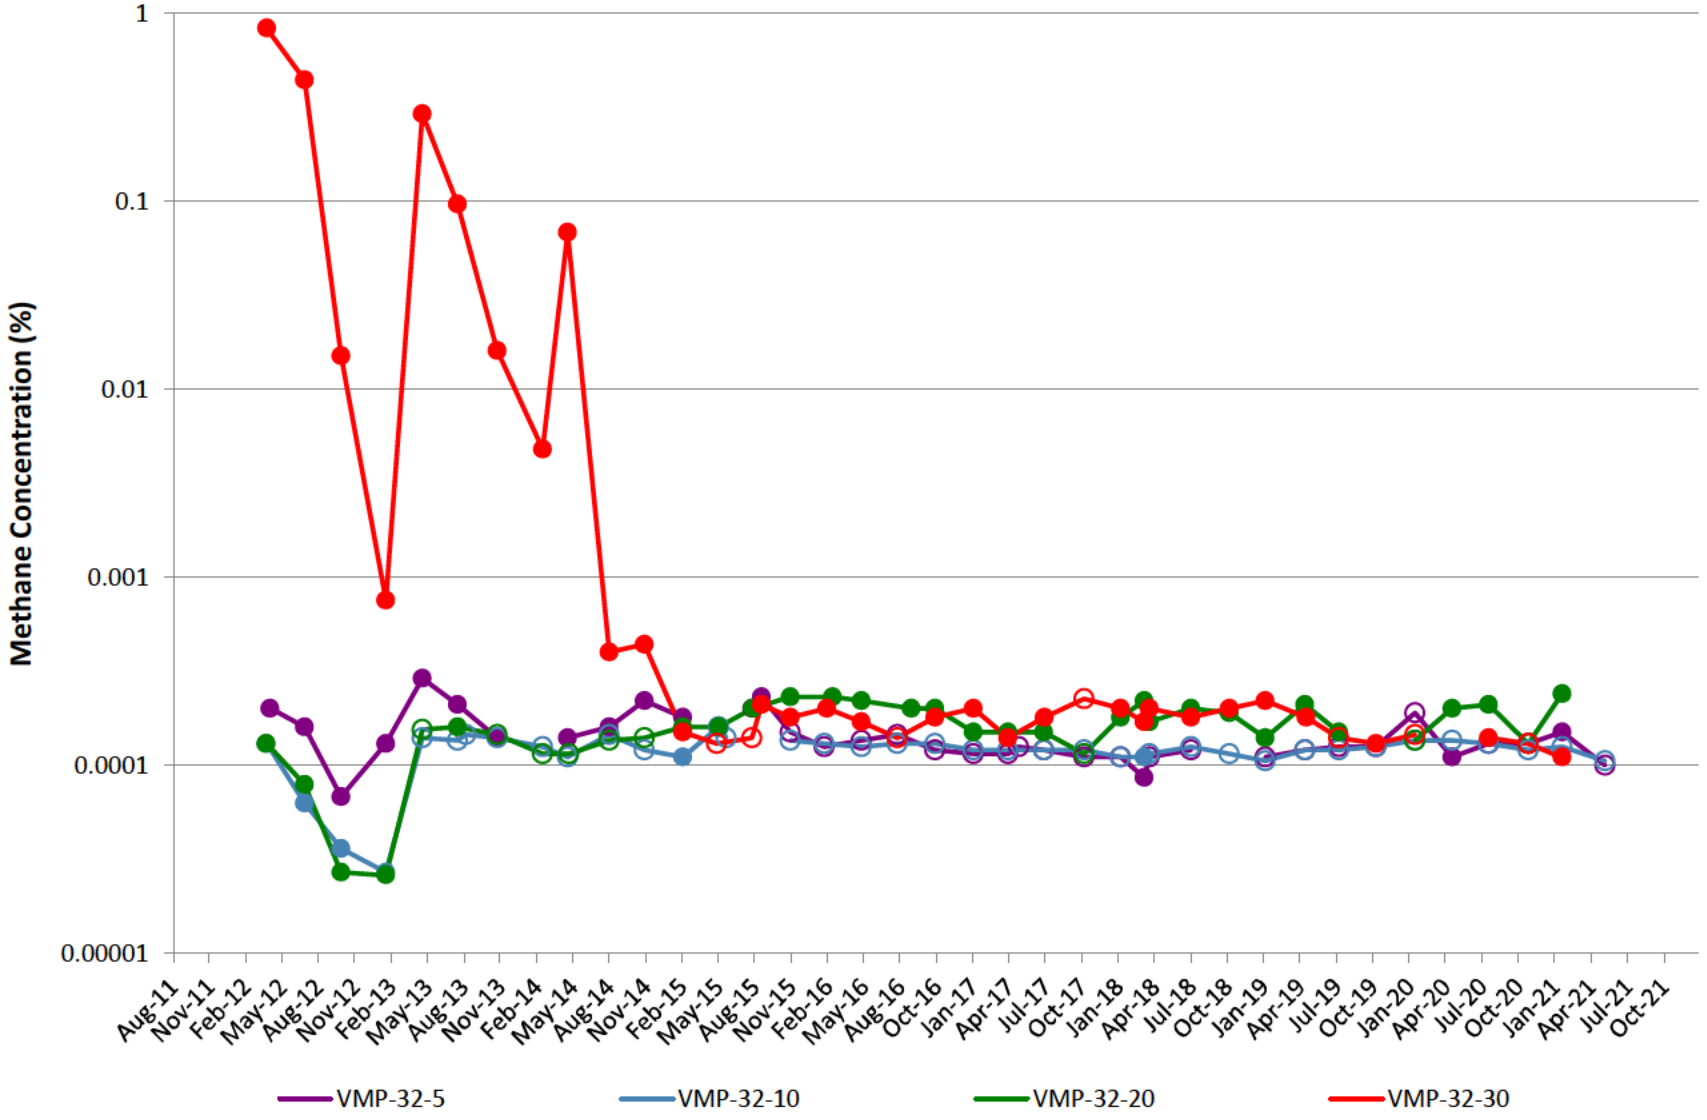


VMP-41

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

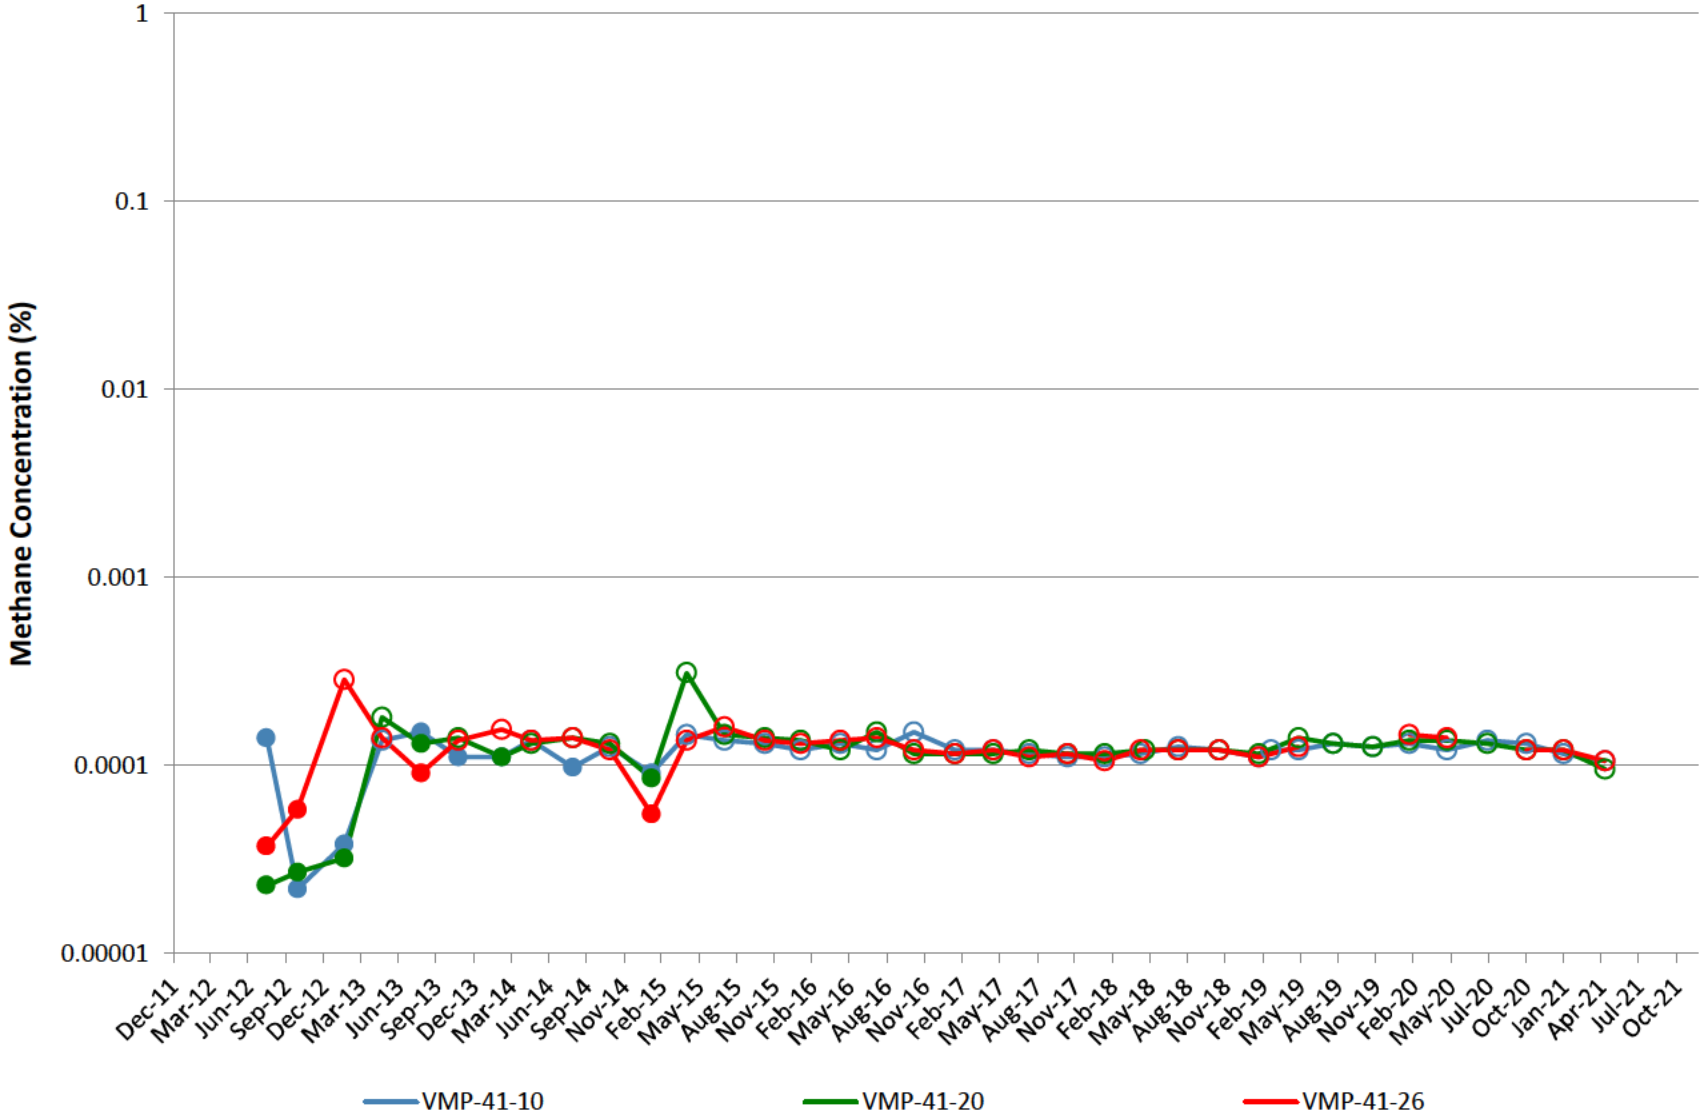


VMP-42

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

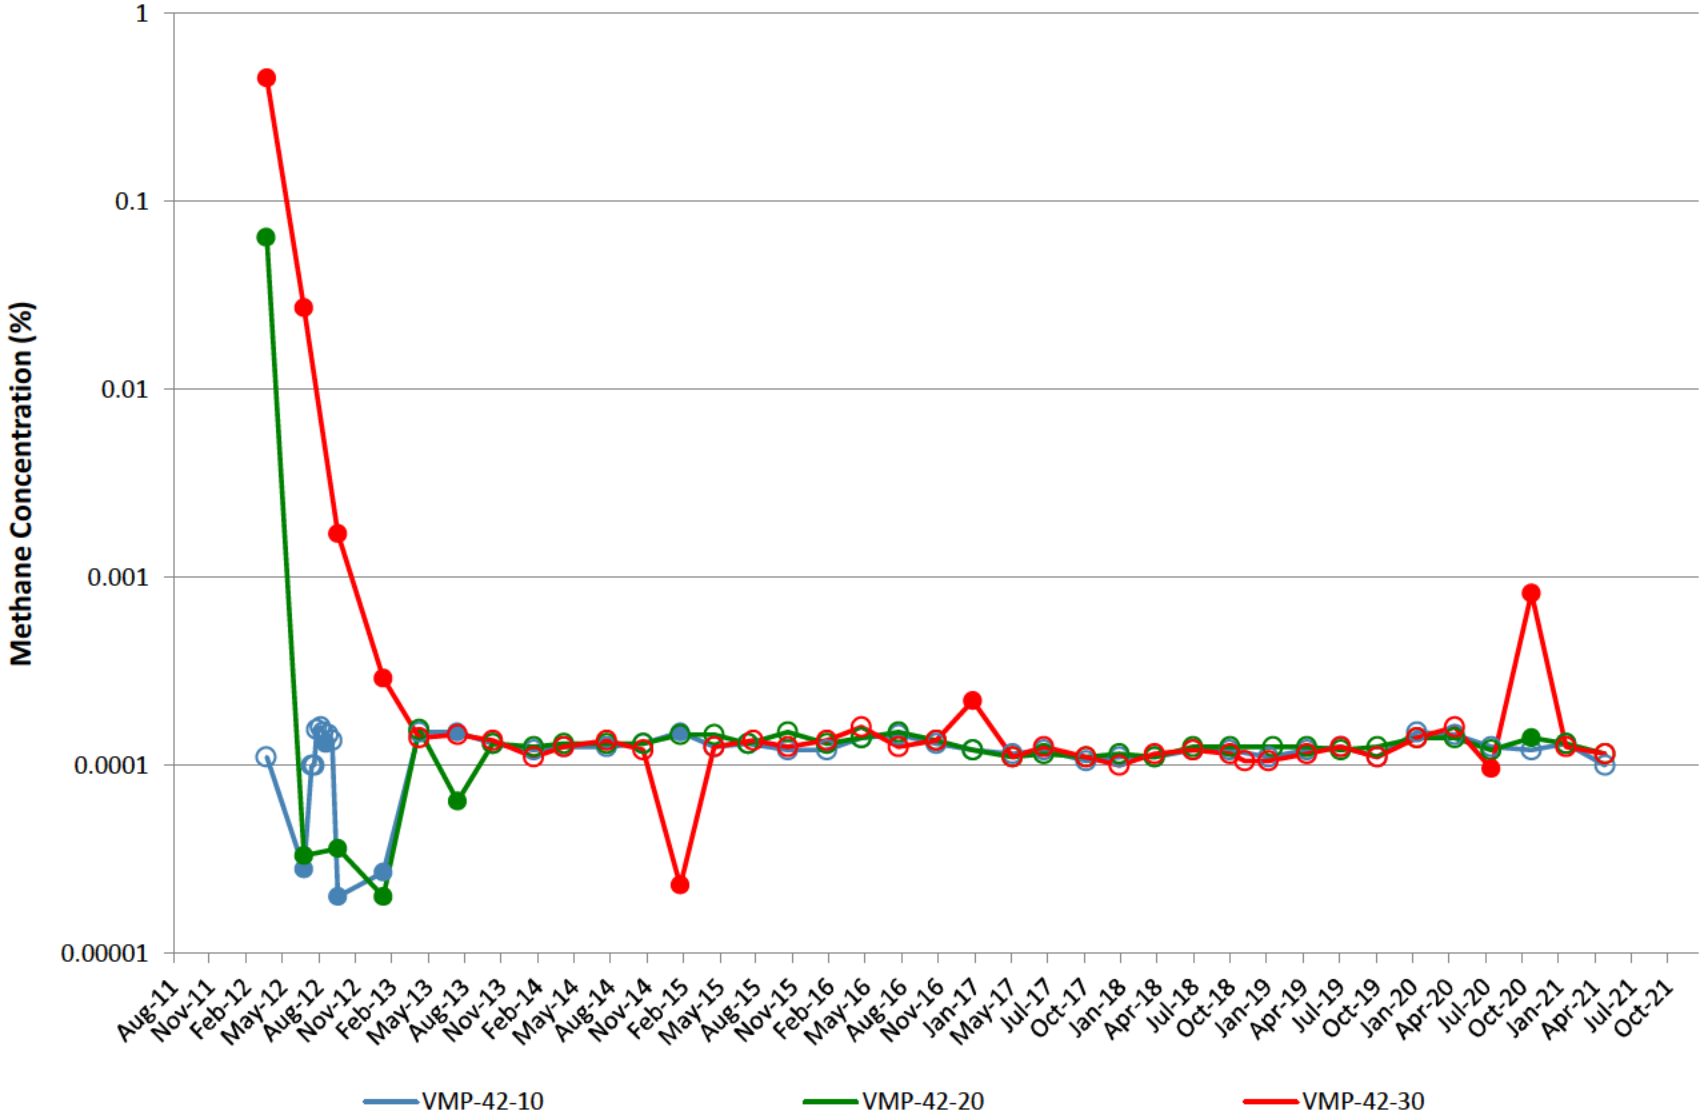


VMP-43

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

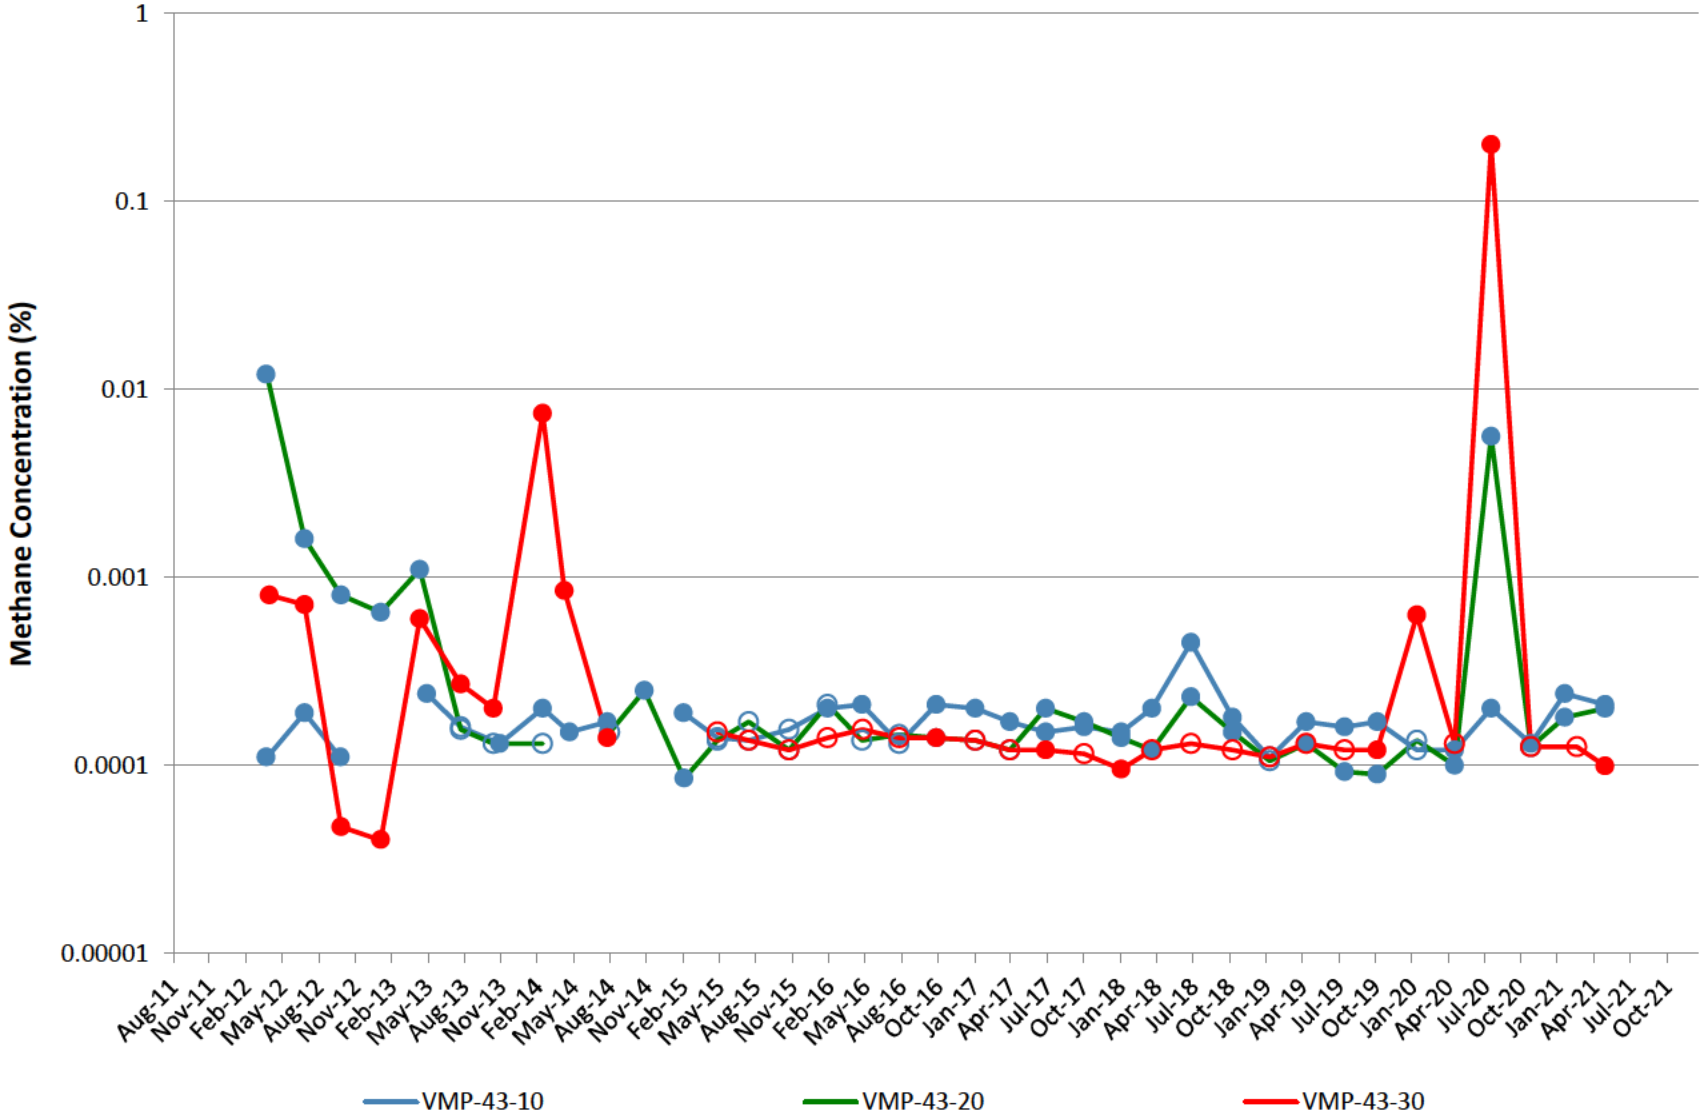


VMP-44

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. Effective 4Q20, samples will no longer be collected at VMP-44 due to port integrity.

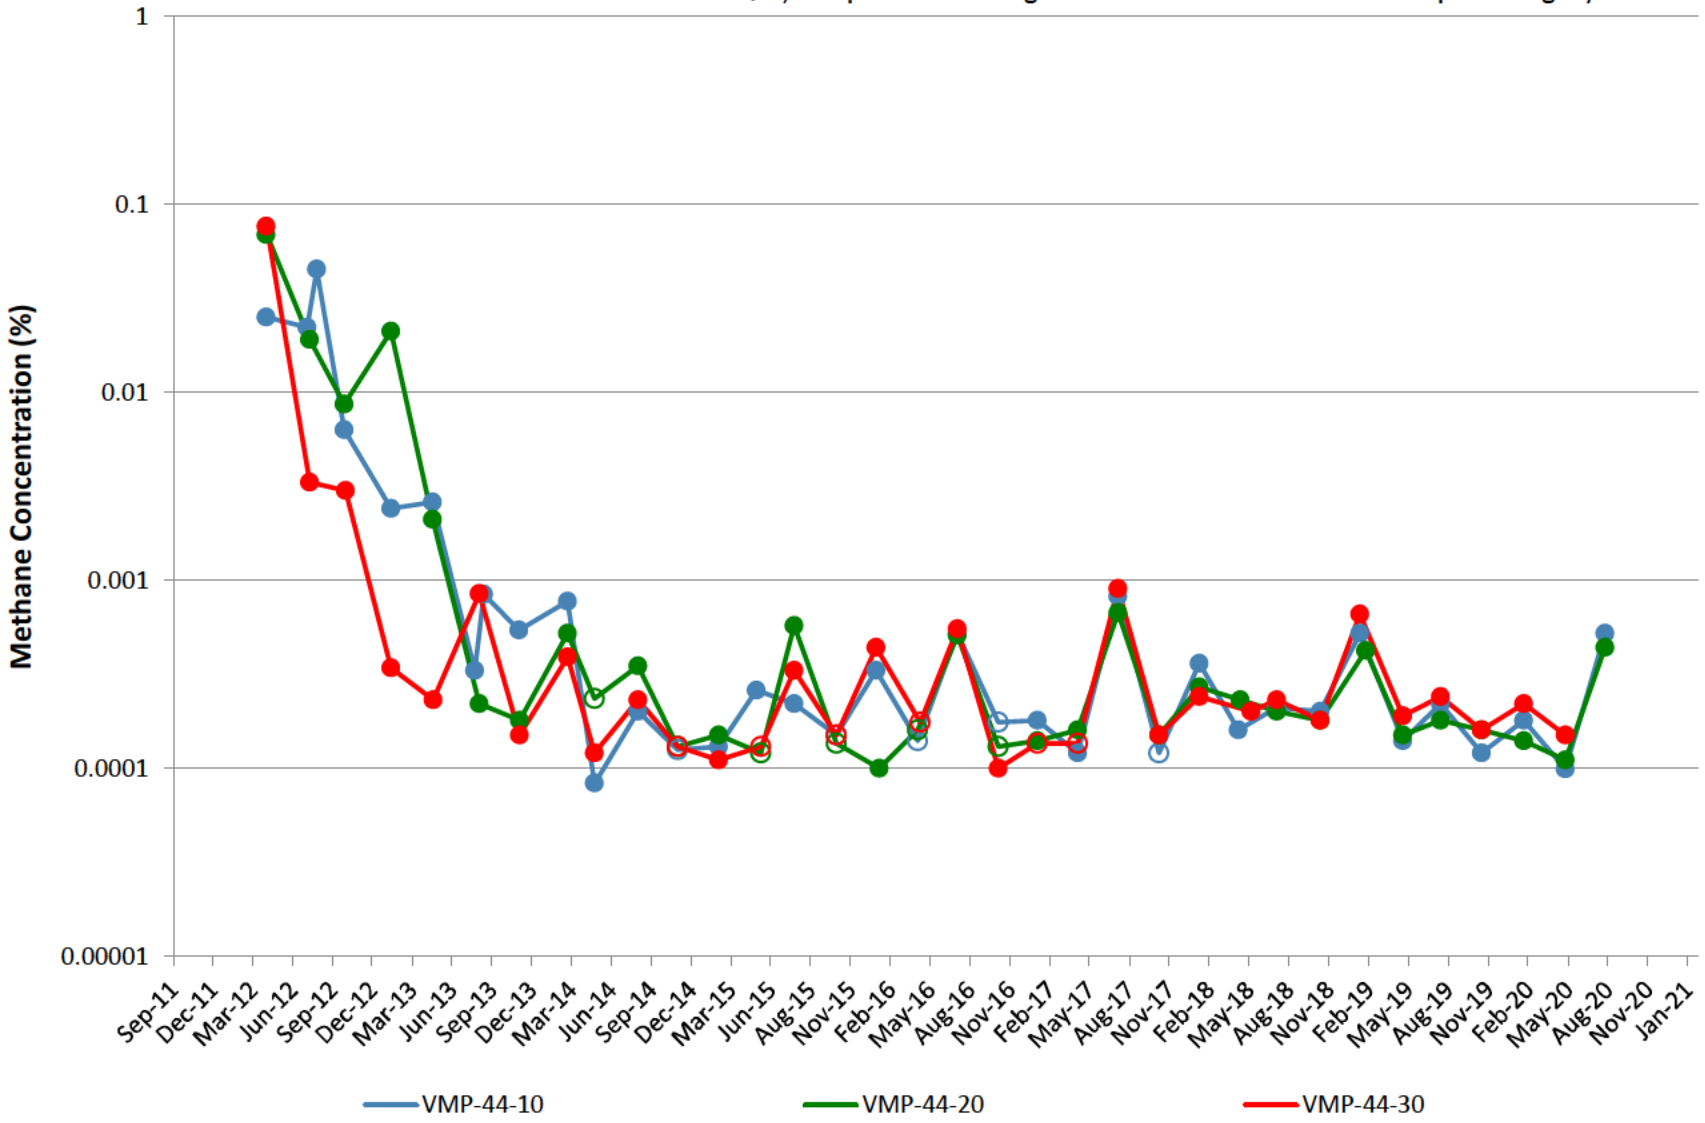


VMP-45

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

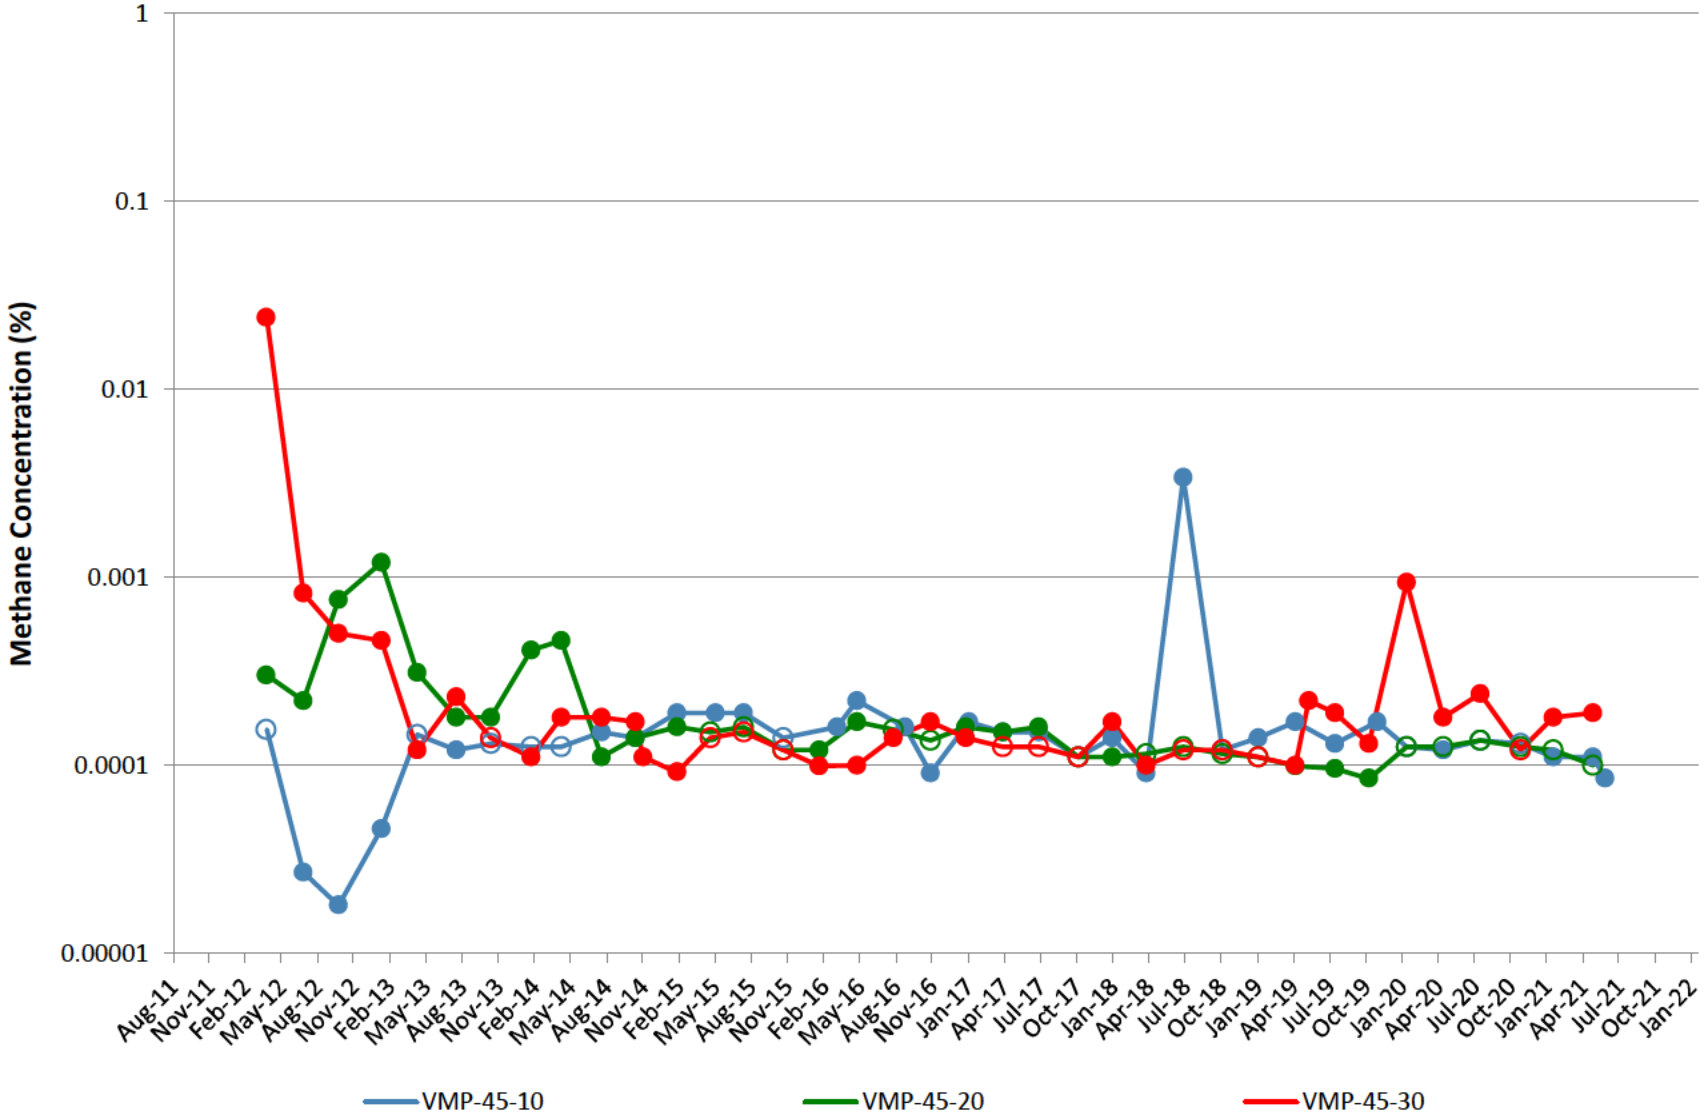


VMP-47

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

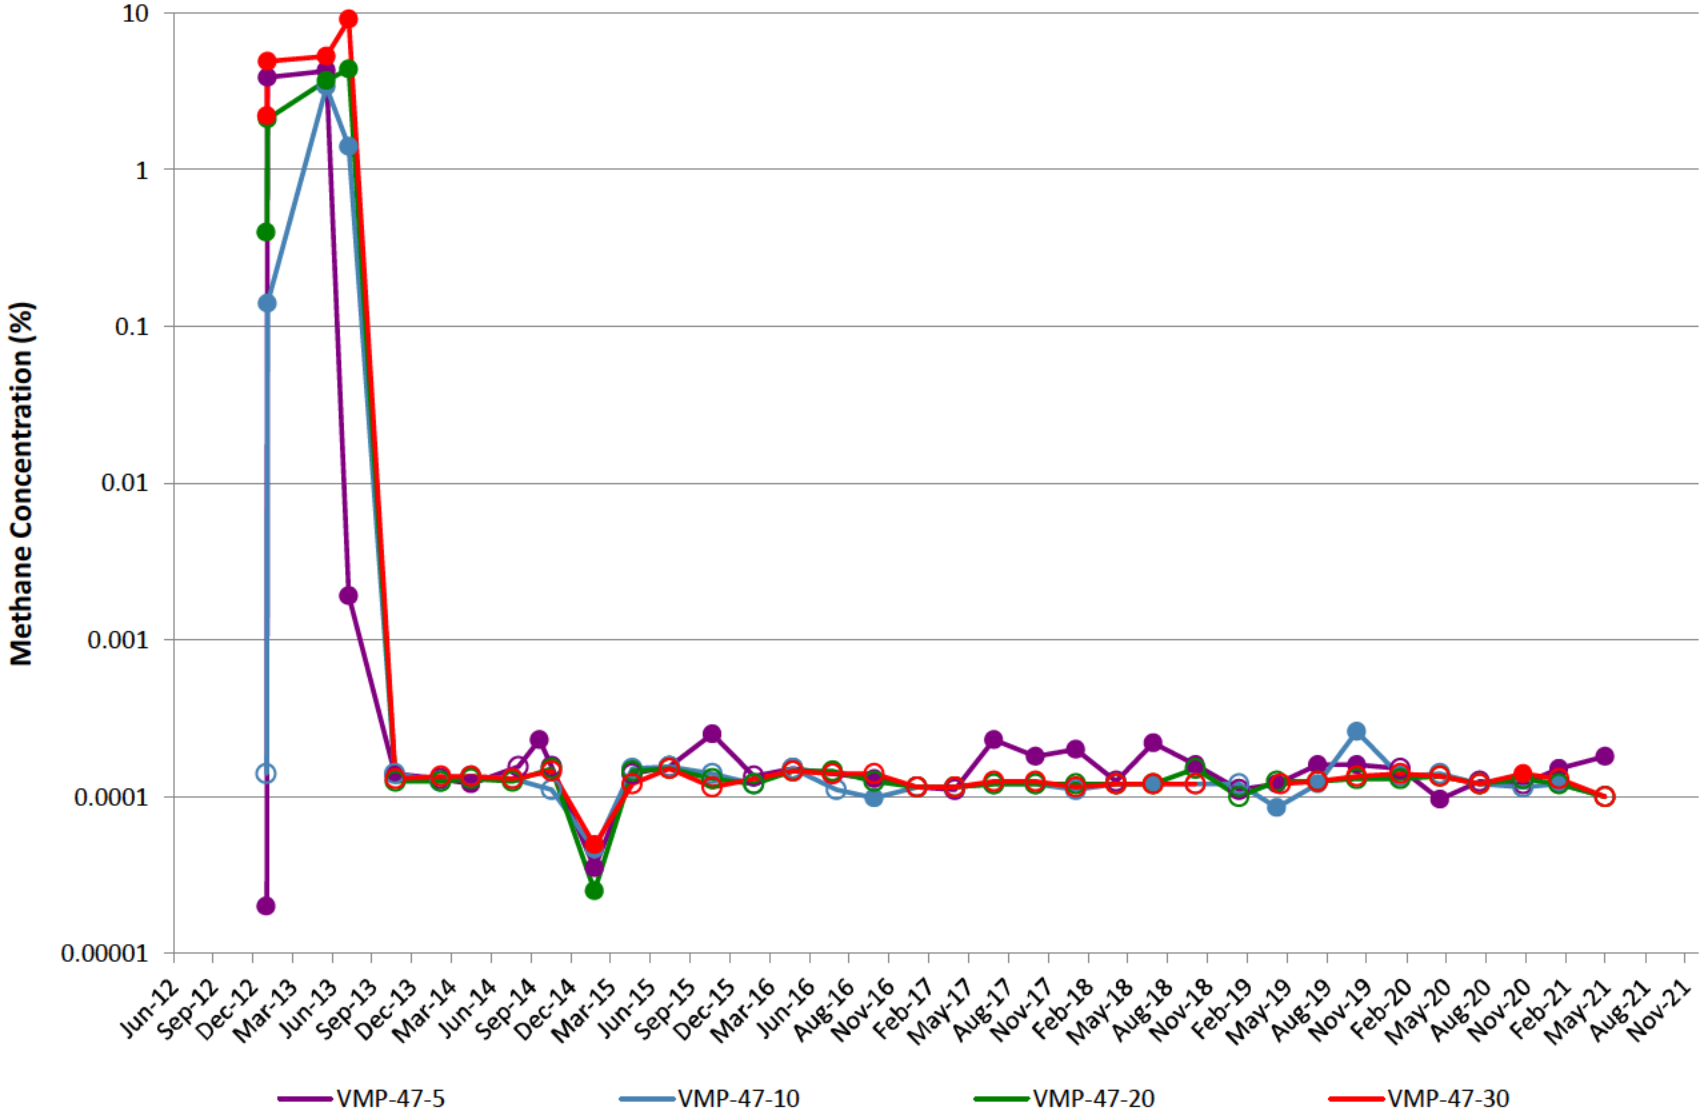


VMP-48

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

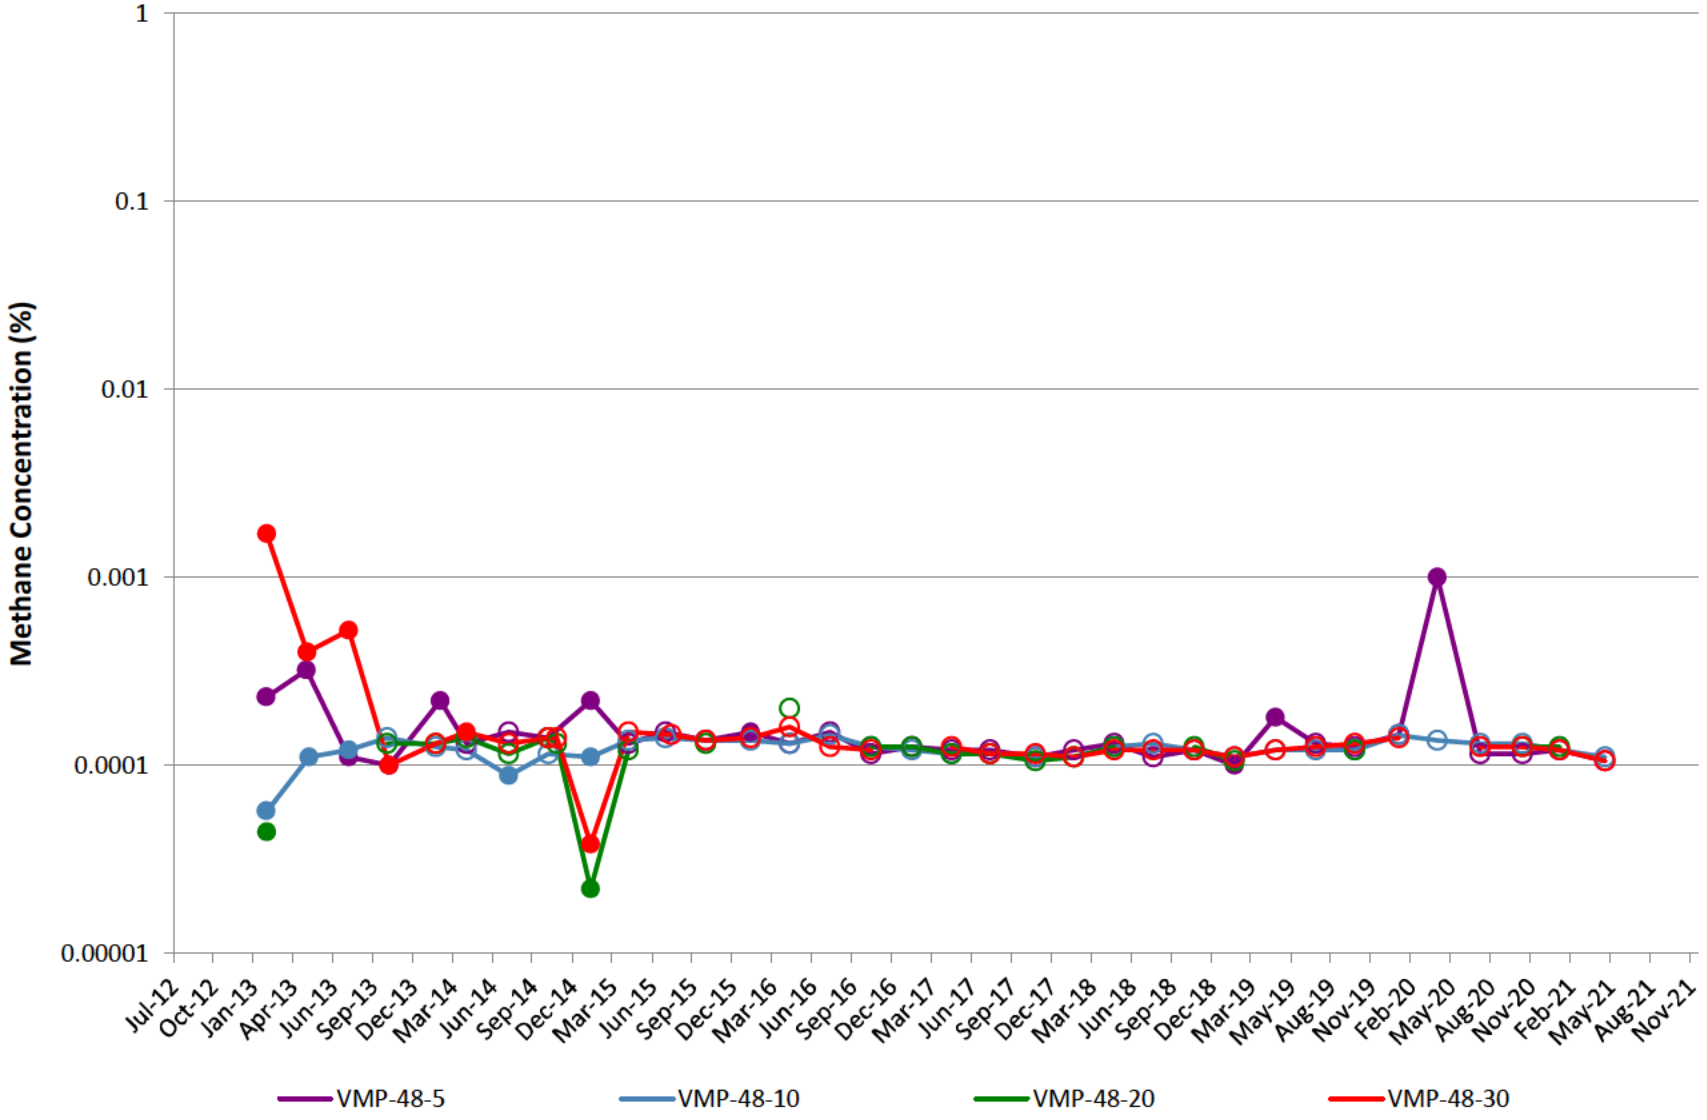


VMP-49

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

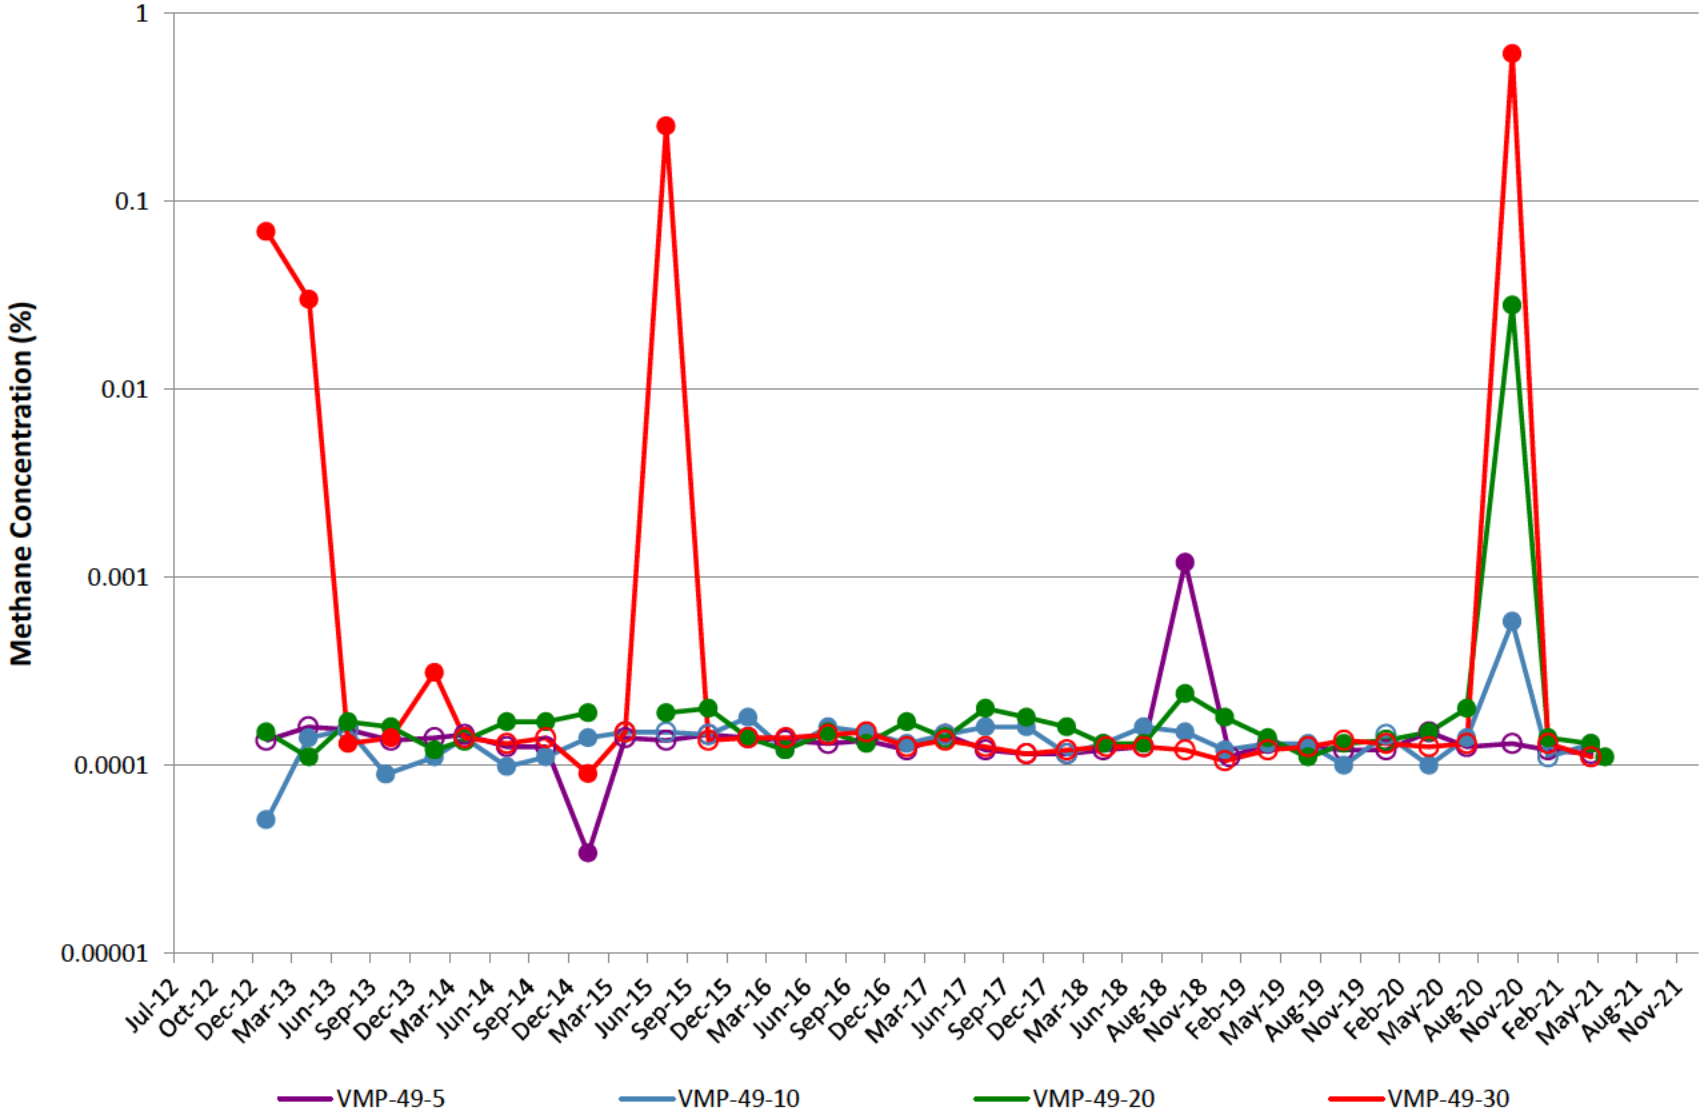


VMP-50

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL). Gap in plot line indicates sample not able to be collected due to site conditions. Natural gas utility line leak near VMP-50 was discovered by Ameren Illinois on May 1, 2018 and repaired on May 31,

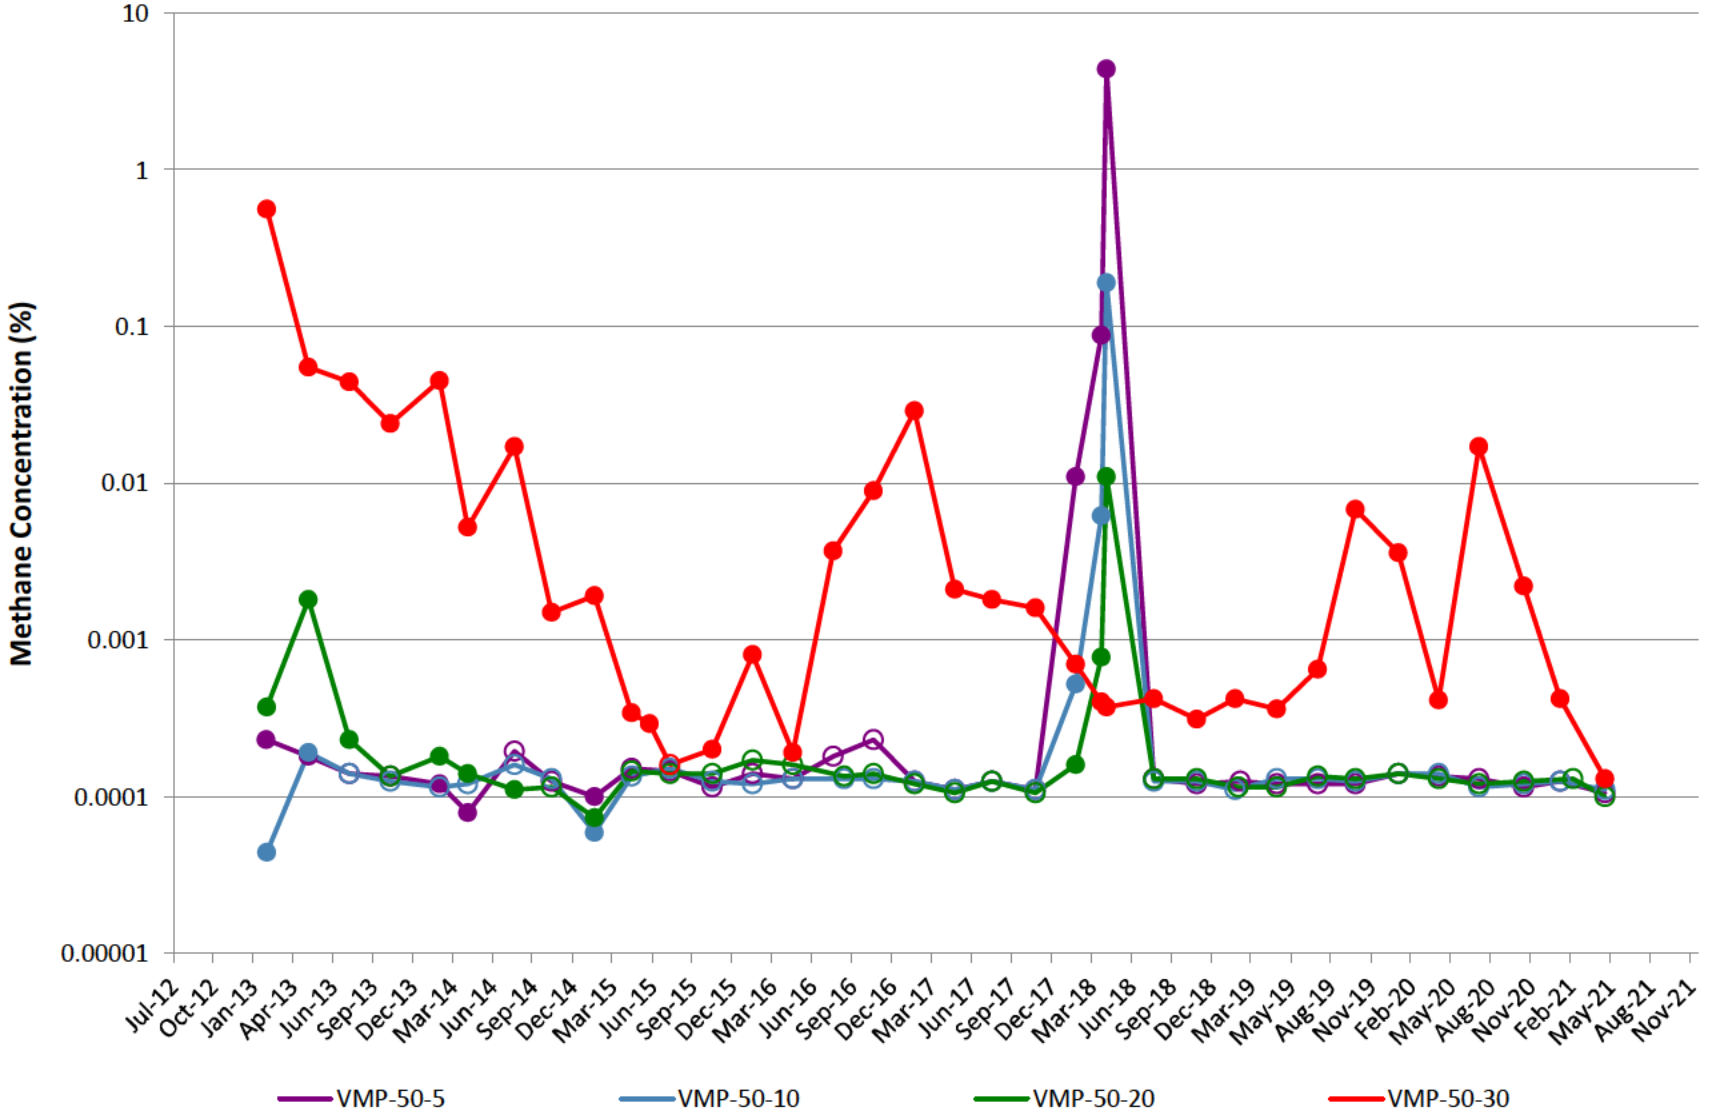


VMP-51

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

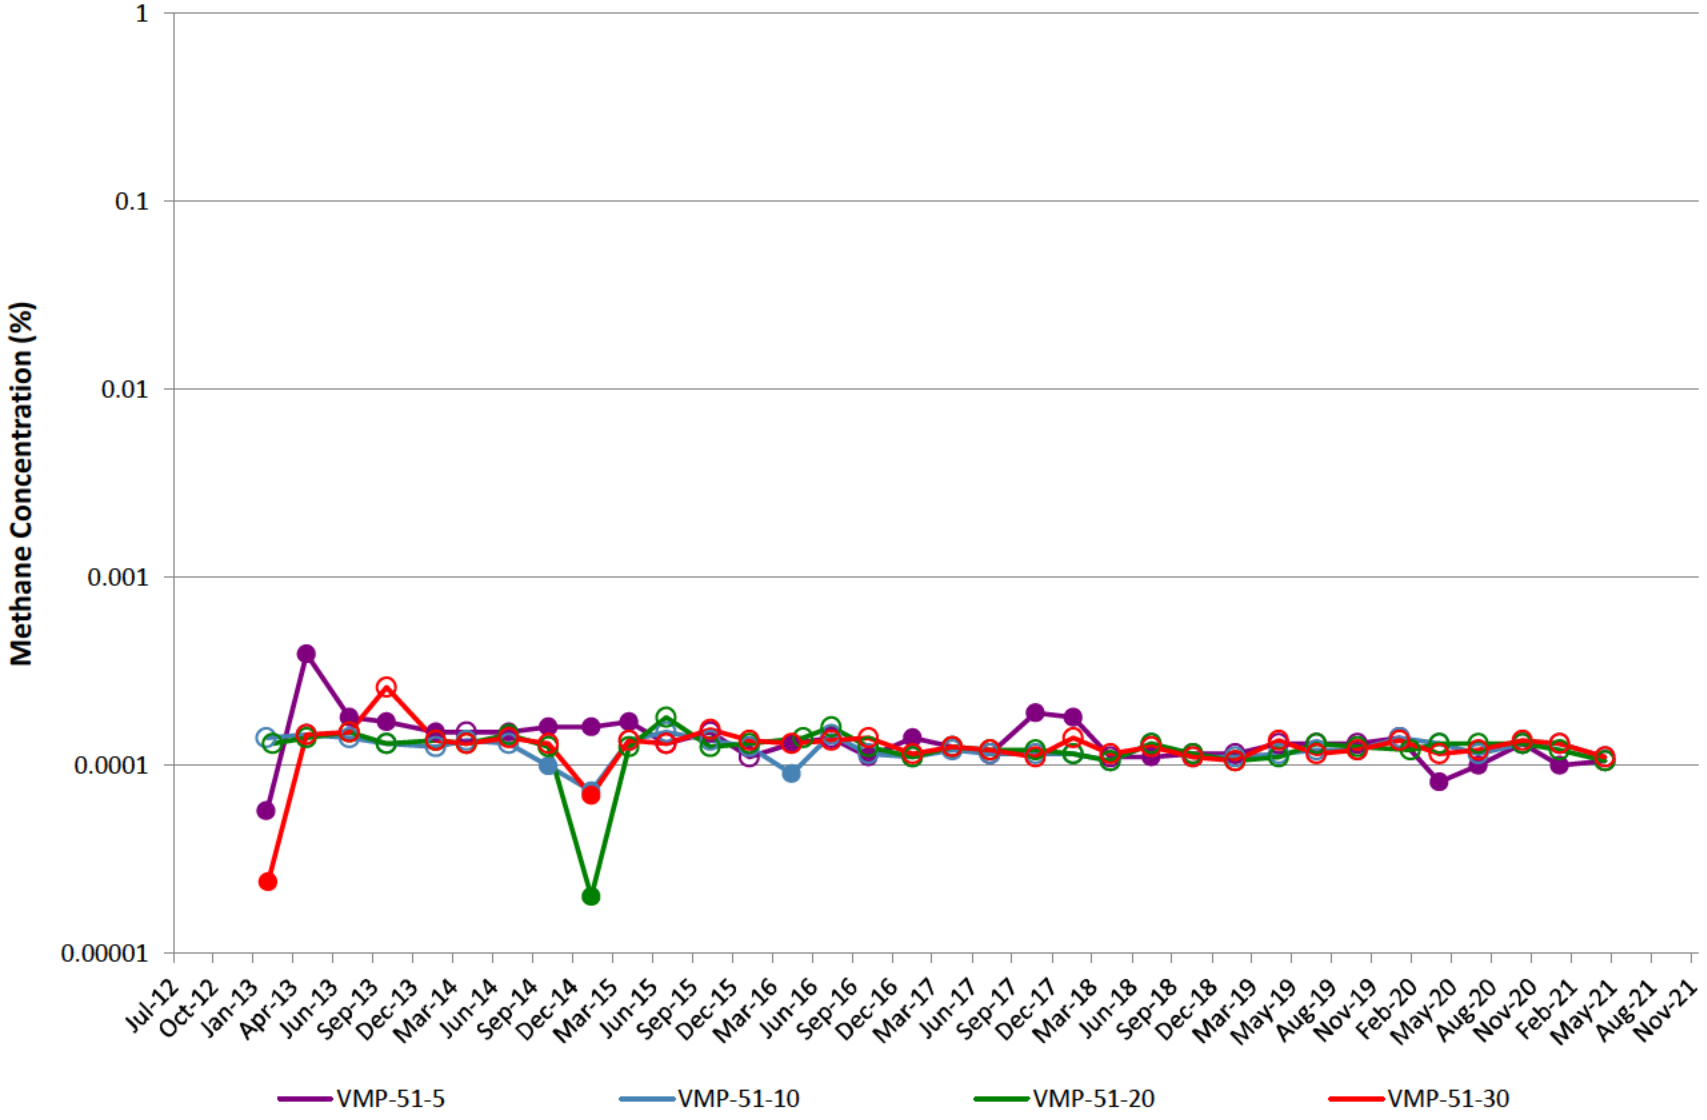


VMP-52

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

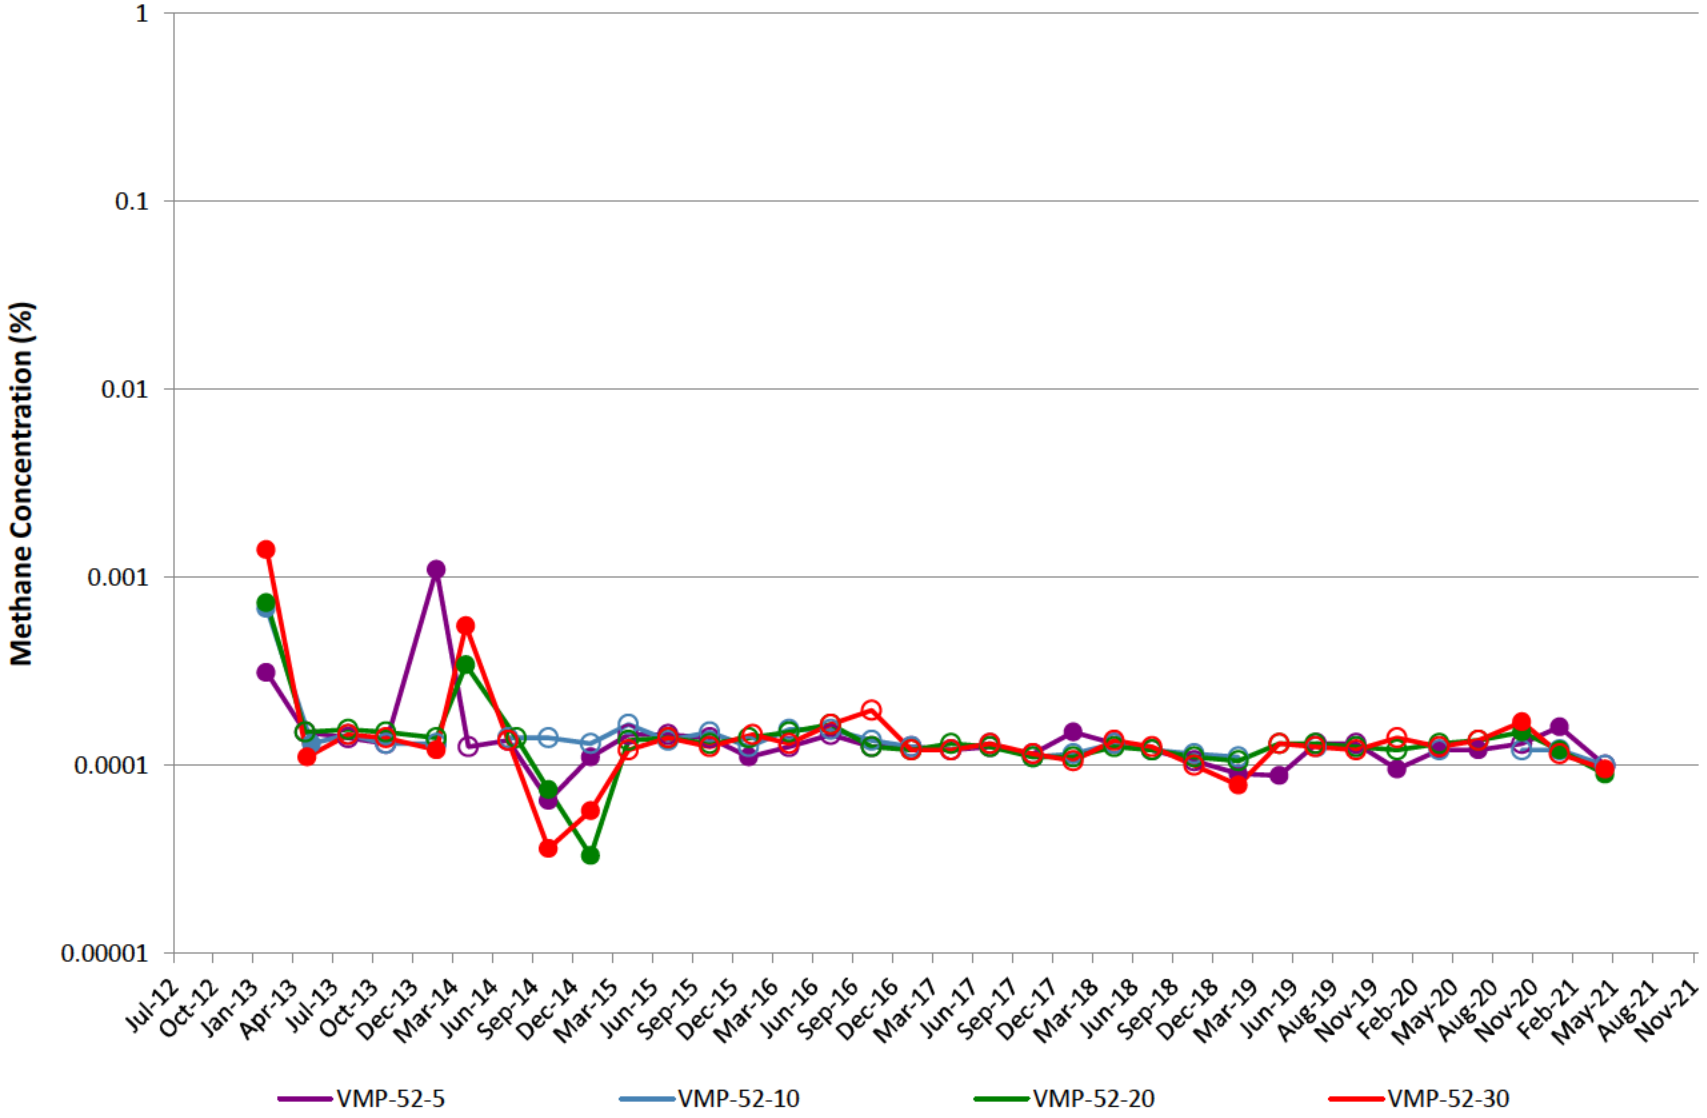


VMP-53

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

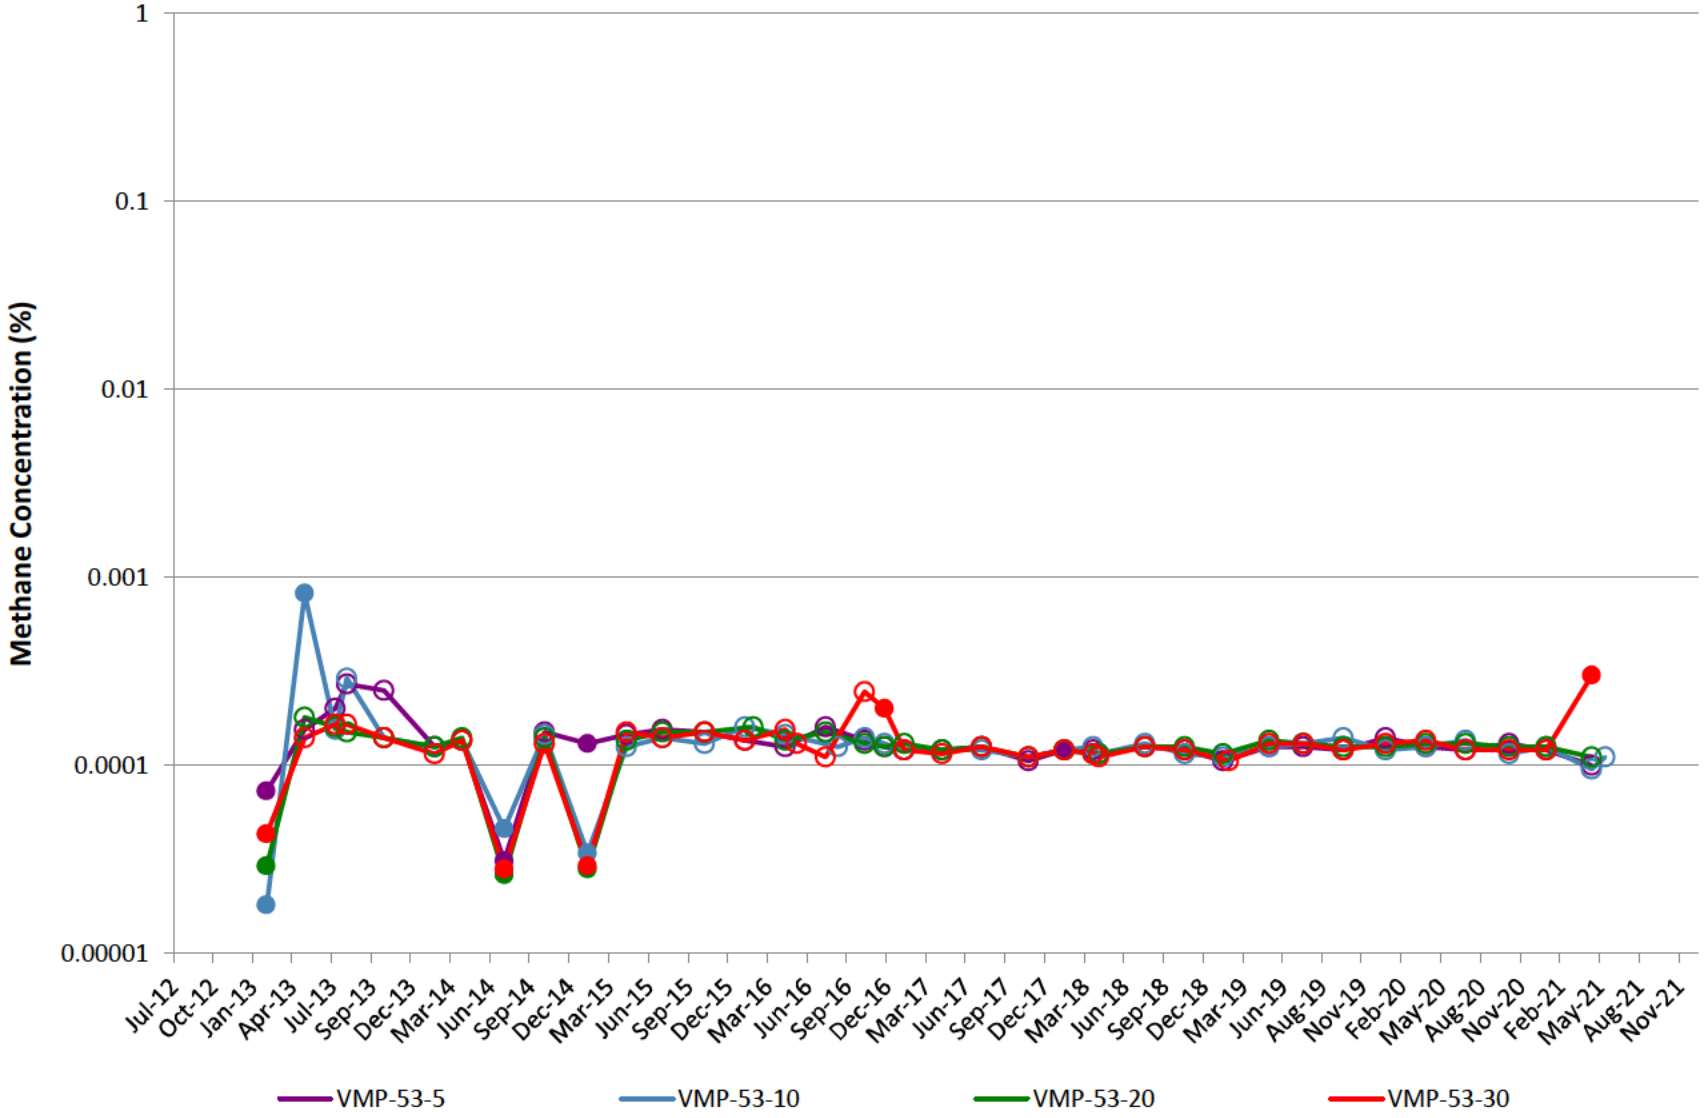


VMP-54

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

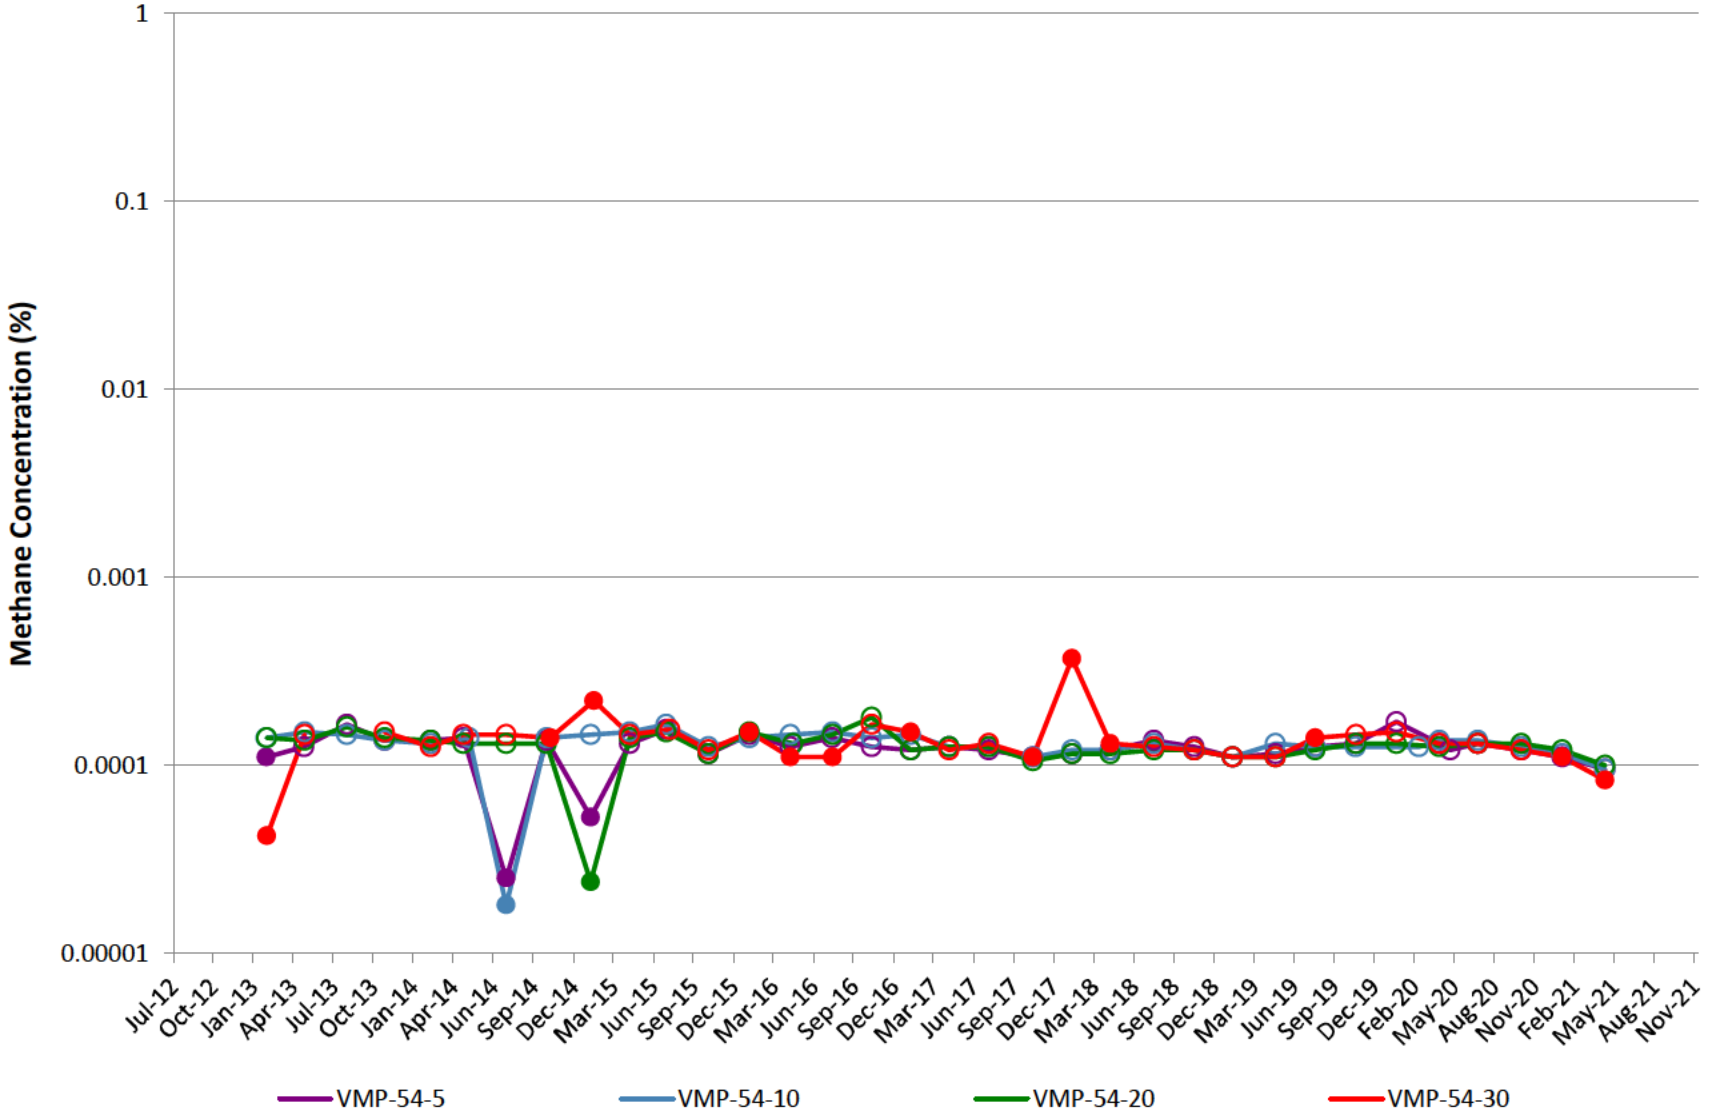


VMP-55

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

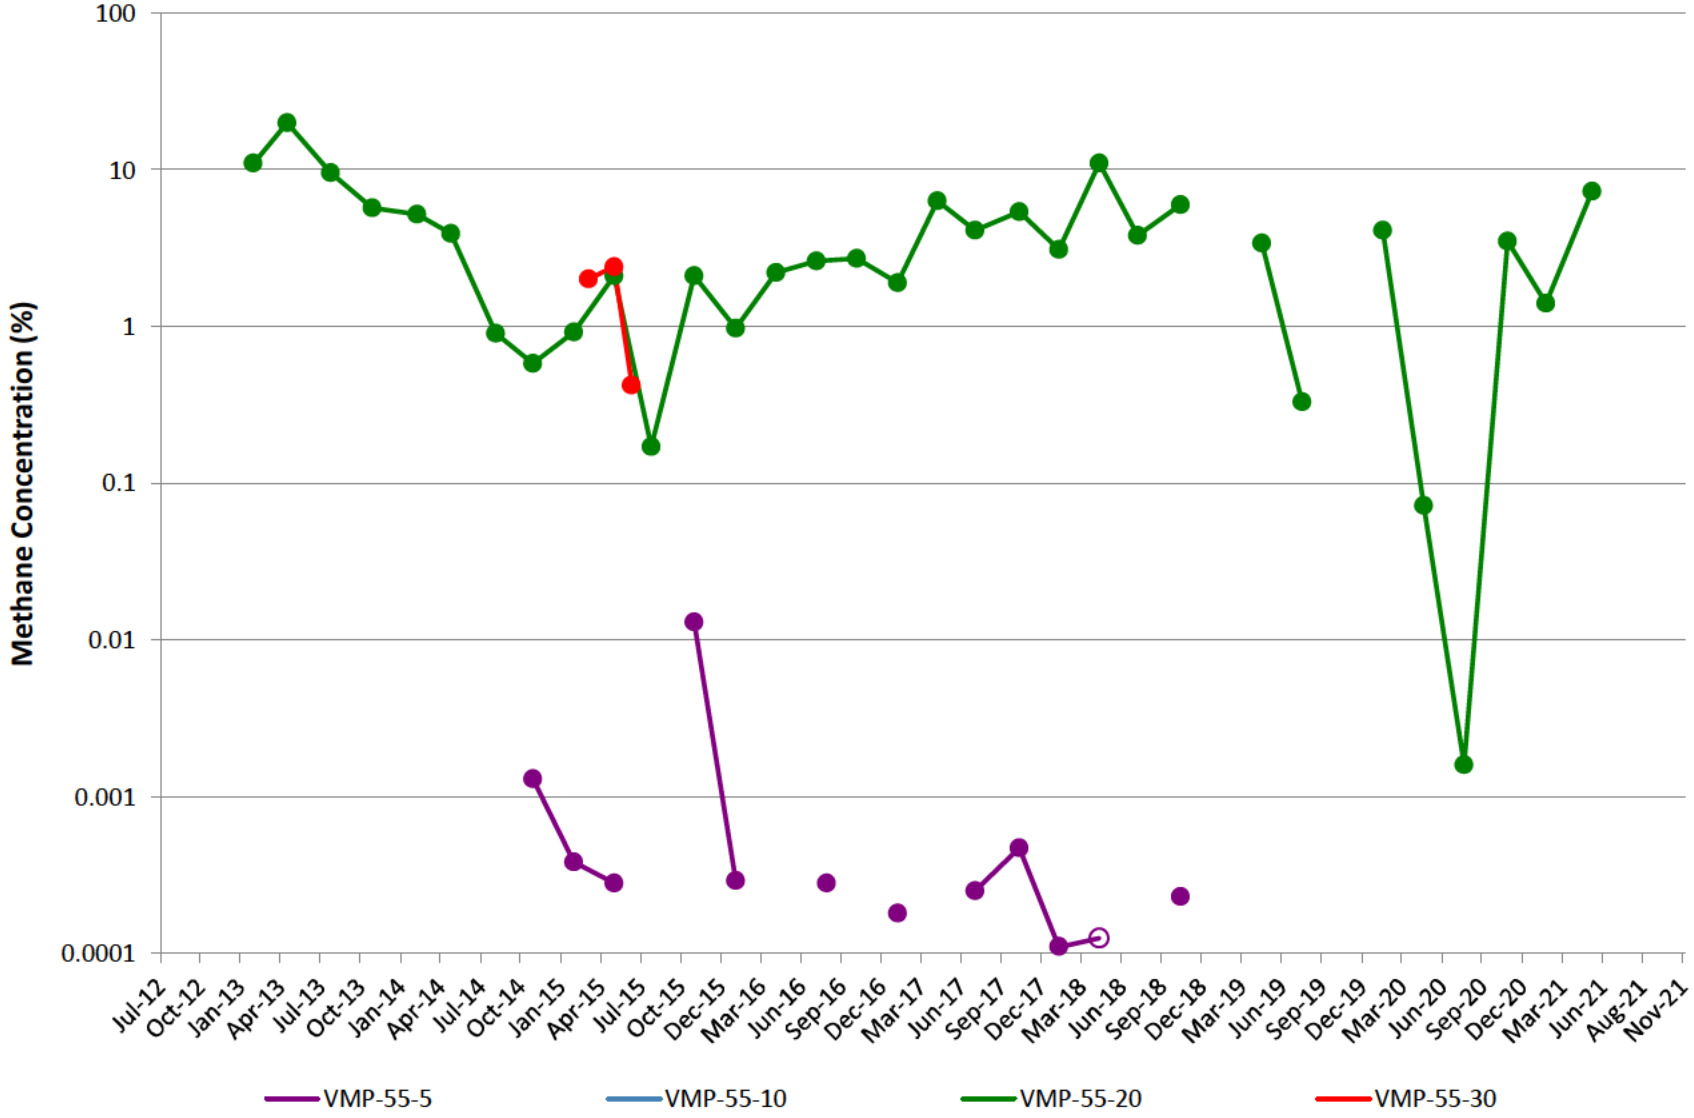


VMP-56

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

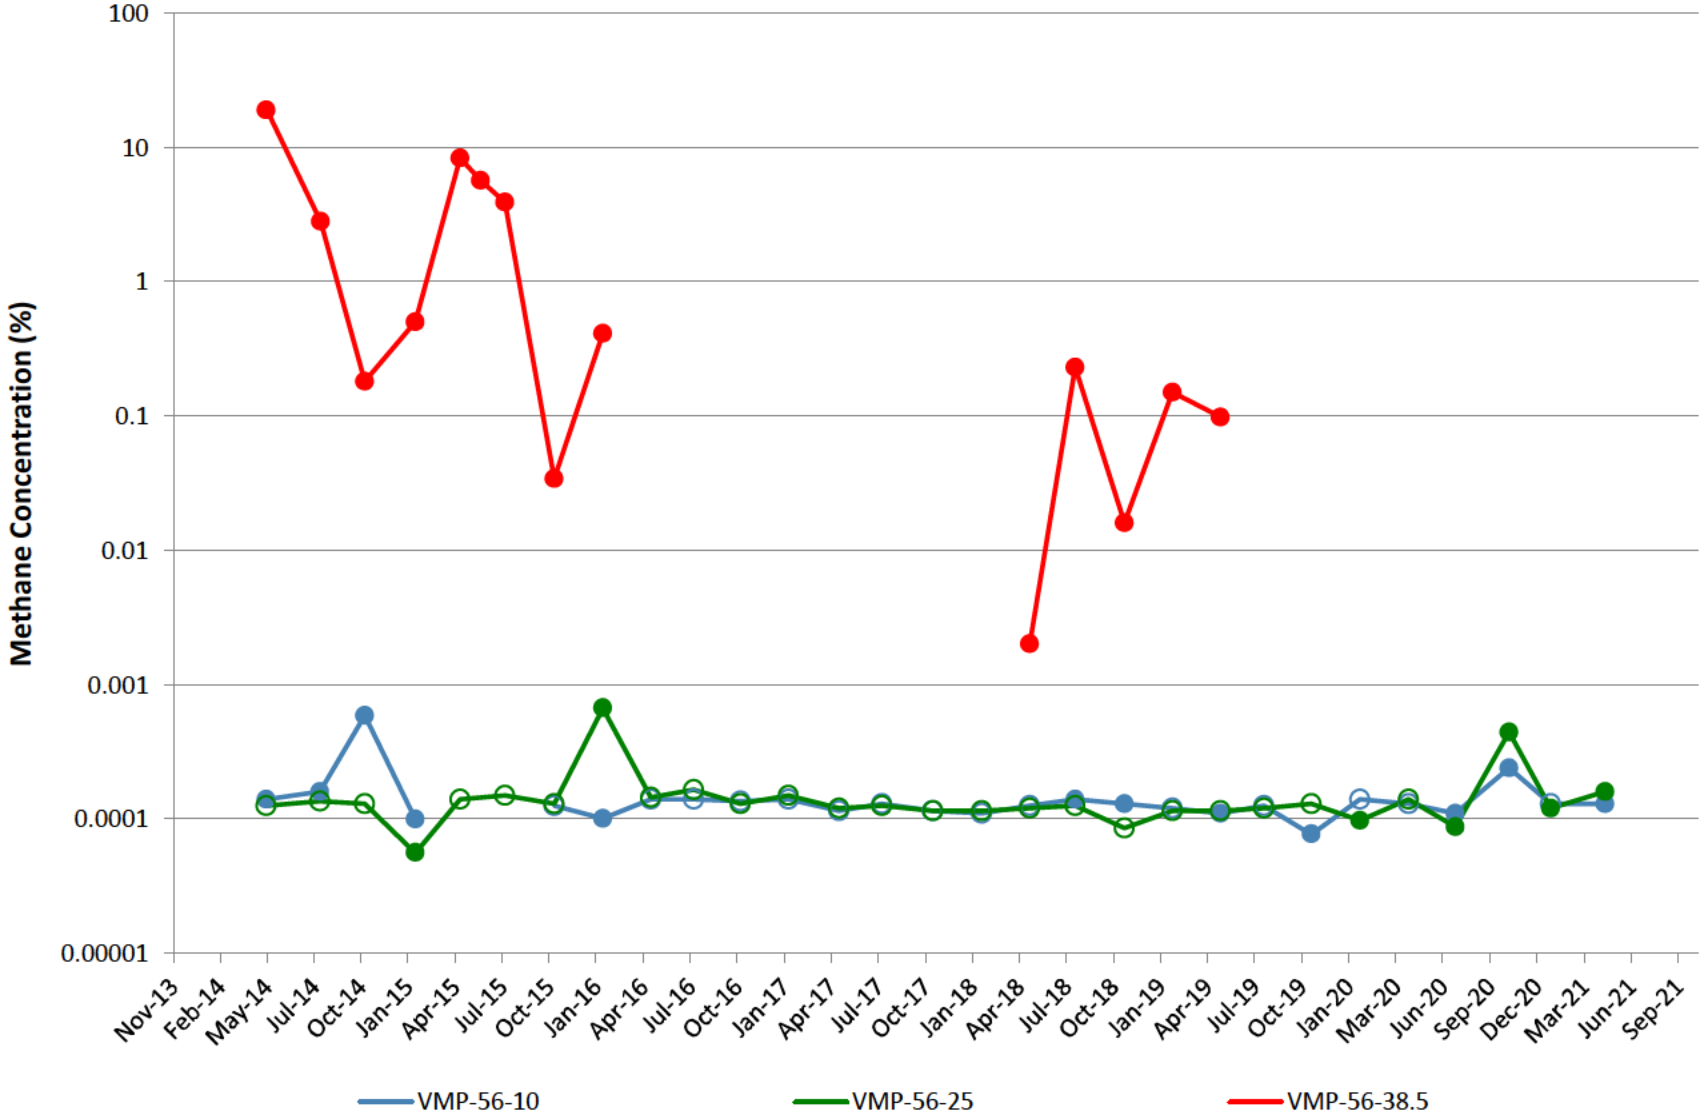


VMP-62

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

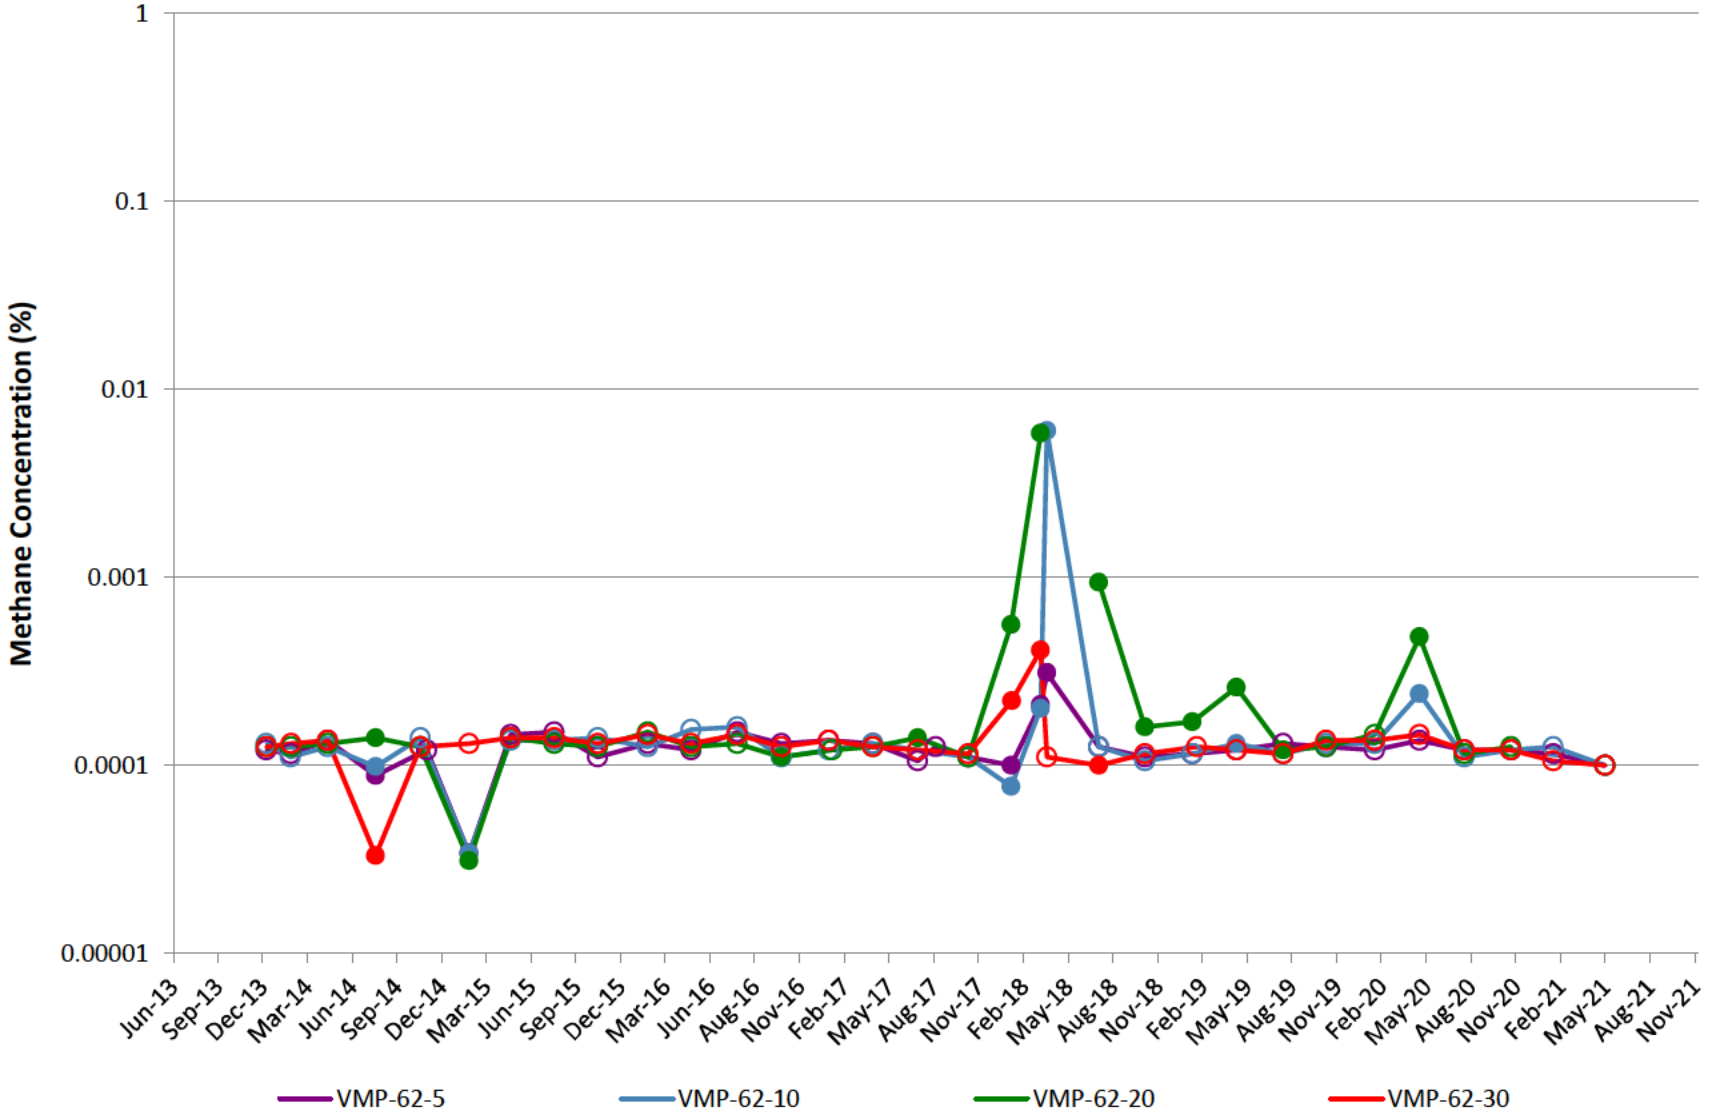


VMP-63

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

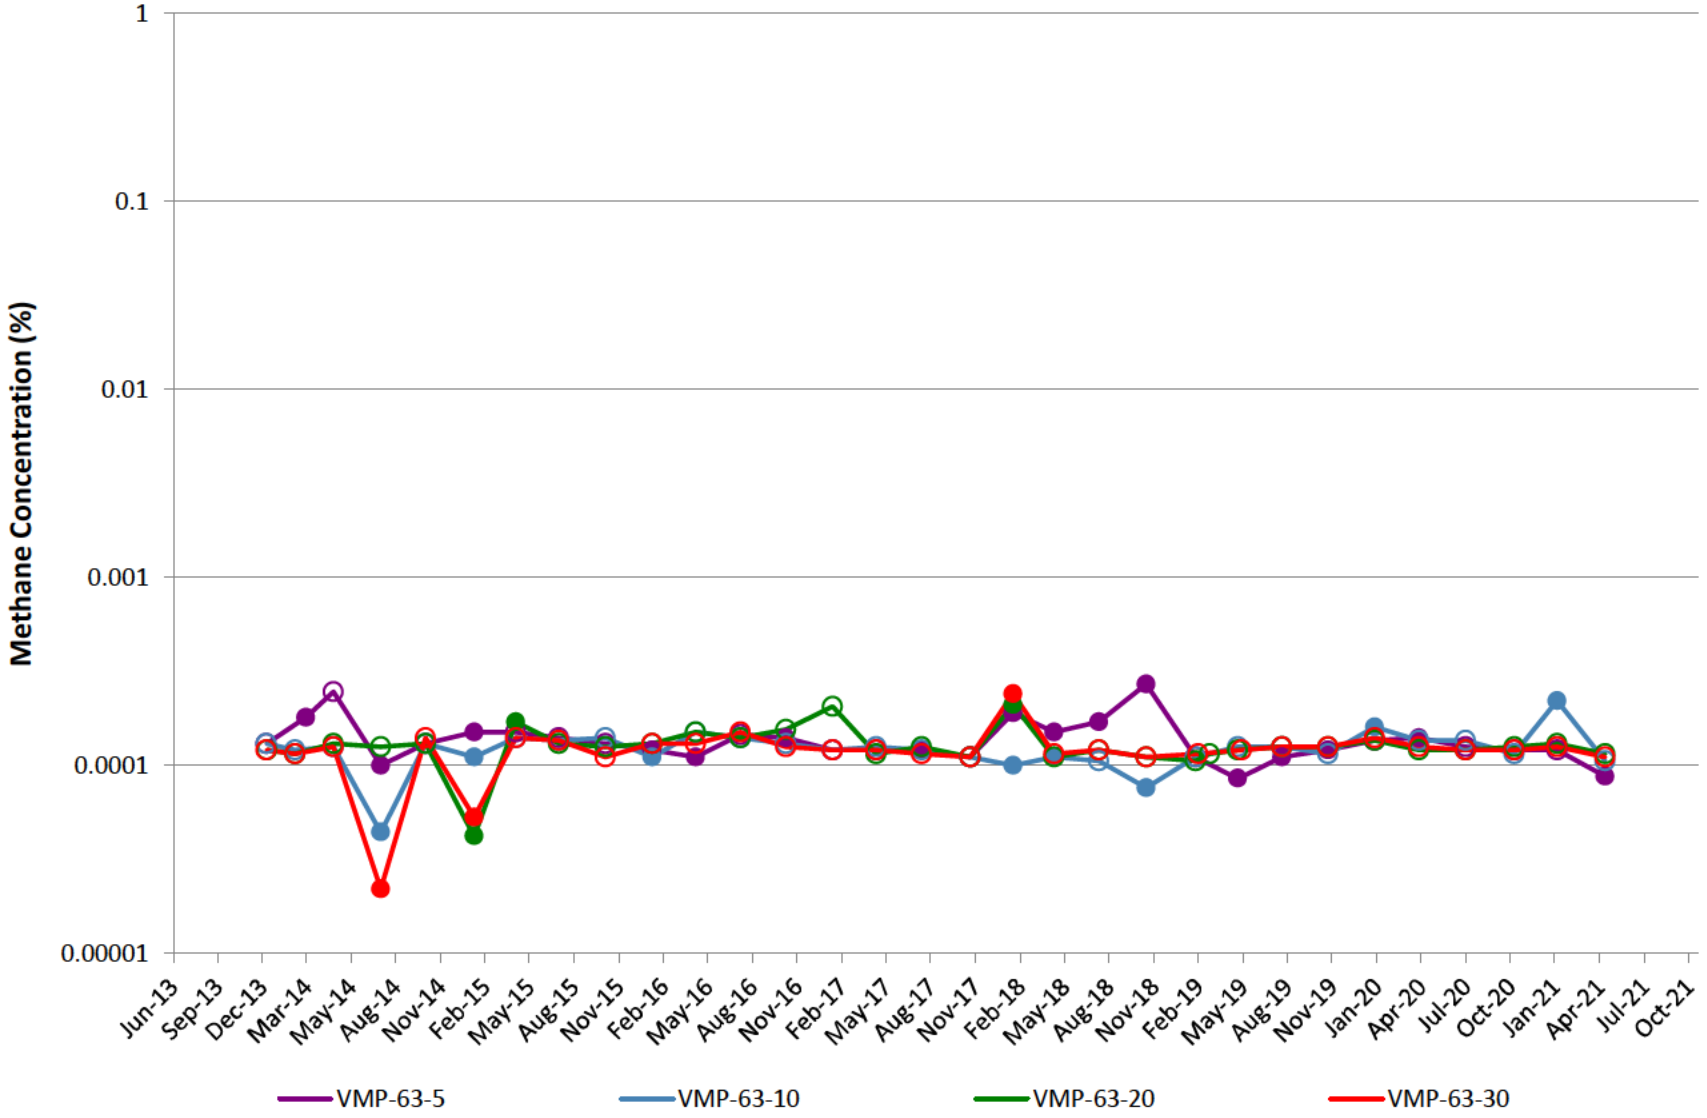

VMP-64

Note: Open circles are non-detect results shown at 1/2 the reporting limit (PQL).
Gap in plot line indicates sample not able to be collected due to site conditions.

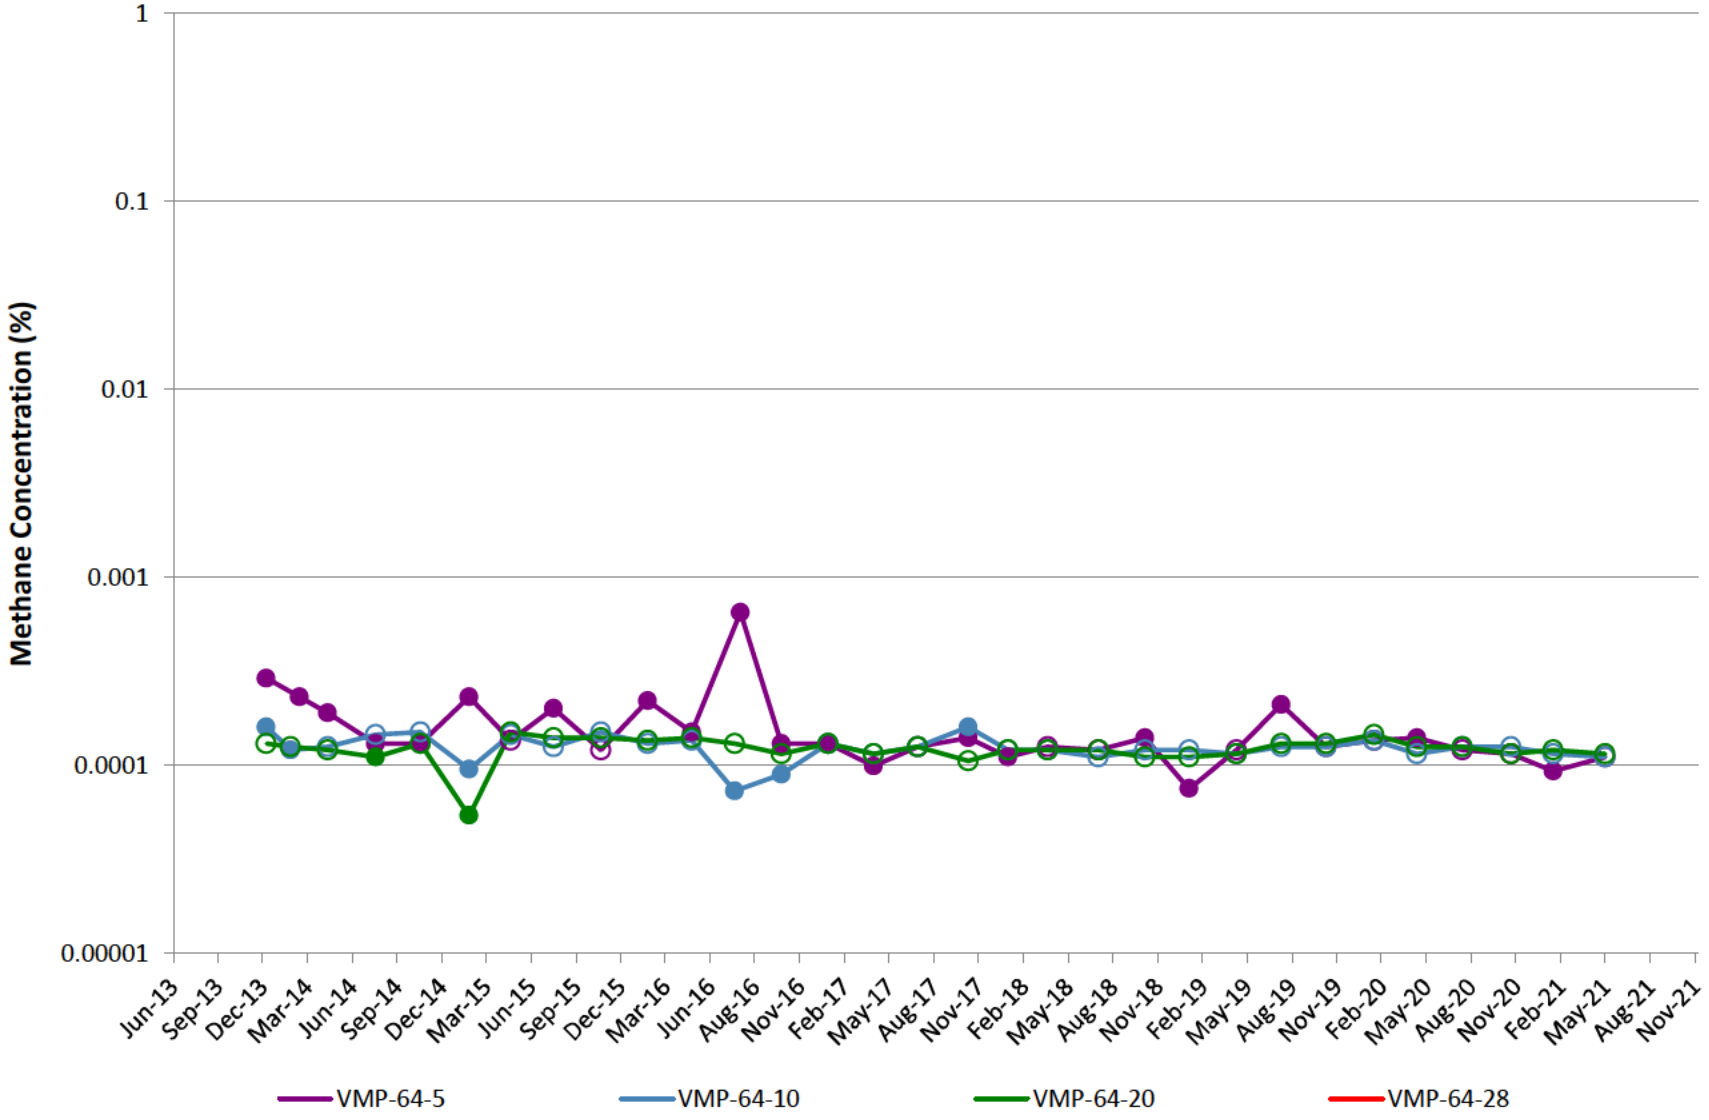

Appendix C
SVE System Operating Efficiency and Maintenance Chronology

APPENDIX C
SVE SYSTEM OPERATING EFFICIENCY

April-21		Hours of Operation	May-21		Hours of Operation	June-21		Hours of Operation
Date	Hours		Date	Hours		Date	Hours	
1	24	24	1	24	24	1	24	24
2	24	24	2	24	24	2	24	24
3	24	24	3	24	24	3	24	24
4	24	24	4	24	24	4	24	24
5	24	24	5	24	24	5	24	24
6	24	24	6	24	24	6	24	24
7	24	24	7	24	24	7	24	24
8	24	24	8	24	24	8	24	24
9	24	24	9	24	24	9	24	23.73
10	24	24	10	24	24	10	24	24
11	24	24	11	24	24	11	24	24
12	24	24	12	24	24	12	24	24
13	24	24	13	24	24	13	24	24
14	24	24	14	24	24	14	24	24
15	24	24	15	24	24	15	24	23.98
16	24	14	16	24	24	16	24	22.3
17	24	0	17	24	24	17	24	24
18	24	0	18	24	24	18	24	24
19	24	0	19	24	24	19	24	24
20	24	0	20	24	24	20	24	24
21	24	10.88	21	24	18.17	21	24	24
22	24	22.03	22	24	24	22	24	24
23	24	23.87	23	24	24	23	24	22.62
24	24	24	24	24	24	24	24	24
25	24	24	25	24	22.47	25	24	24
26	24	24	26	24	24	26	24	24
27	24	24	27	24	24	27	24	24
28	24	24	28	24	24	28	24	24
29	24	24	29	24	24	29	24	24
30	24	24	30	24	24	30	24	24
			31	24	24			
Totals	**720**	**598.78**	**Totals**	**744**	**736.64**	**Totals**	**720**	**716.63**
% Up Time		**83.16%**	**% Up Time**		**99.01%**	**% Up Time**		**99.53%**

APPENDIX C
SVE SYSTEM MAINTENANCE CHRONOLOGY

- **April 2, 2021–** Closed SVE-29.
- **April 5, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **April 9, 2021–** Cleaned WFL and PW VLS float housings.
- **April 12, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **April 19, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line. Cleaned WFL and PW VLS float systems and housings.
- **April 20, 2021–** Replaced poppet mufflers, system fan belts, two high temp thermocouples, combustion filter, and changed oil from the poppet valve oiler.
- **April 21, 2021– 800 hour maintenance –** Replaced WFL and PW VLS filter, replaced blower filter and pre-filter, greased all system fittings, and replaced system data card.
- **April 23, 2021–** Tested AST, VLS and process room floats.
- **April 26, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **May 3, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **May 10, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **May 12, 2021–** Cleaned WFL and PW VLS float housings.
- **May 17, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **May 18, 2021–** Opened SVE-37 to 100% open. Closed SVE-38.
- **May 24, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.
- **May 25, 2021– 800 hour maintenance –** Replaced WFL and PW VLS filter and pre-filter, replaced blower pre-filter, replaced combustion filter, greased all system fittings, and replaced system data card. Tested AST, VLS and process room floats. Closed SVE-3R, SVE-42, SVE-43, SVE-44, and SVE-47. Blower speed adjusted from 50% to 39%.
- **May 28, 2021–** Cleaned WFL and PW VLS float housings.

APPENDIX C
SVE SYSTEM MAINTENANCE CHRONOLOGY

- **June 1, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.

- **June 3, 2021–** WFL AST interstitial vacuum adjusted from -9.5 in/hg to -18.5 in/hg.

- **June 7, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.

- **June 9, 2021–** Replaced WFL VLS filter and pre-filter, and replaced PW VLS pre-filter.

- **June 12, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line. Cleaned WFL VLS float systems and housings.

- **June 21, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.

- **June 22, 2021–** Cleaned WFL VLS float systems and housings.

- **June 23, 2021– 800 hour maintenance –** Replaced WFL and PW VLS filter and pre-filter, replaced blower filter and pre-filter, replaced combustion filter, greased all system fittings, and replaced system data card. Tested AST, VLS and process room floats. Cleaned both WFL and PW VLS units. Cleaned both WFL and PW VLS float systems and housings.

- **June 28, 2021–** Drained condensate from both system compressors and performed bubble test on natural gas line.

- **June 30, 2021–** Replaced bolt and the left shock in SVE-39 vault.

Appendix D
SVE System Leg Flow Rates

SEE LAST PAGE OF TABLE FOR NOTES

APPENDIX D
SVE SYSTEM LEG FLOW RATES

Date	Red Leg Flow[1] (SCFM)	Blue Leg Flow[1] (SCFM)	Green Leg Flow[1] (SCFM)	Teal Leg Flow[1] (SCFM)	Purple Leg Flow[1] (SCFM)	Brown Leg Flow[1] (SCFM)
7/1/2020	162	75	307	93	153	0
7/7/2020	158	76	313	101	150	0
7/8/2020	0	86	0	88	170	0
7/14/2020	0	84	0	94	171	0
7/20/2020	0	0	0	0	211	0
7/24/2020	0	240	0	0	0	0
8/6/2020	0	244	0	0	0	0
8/12/2020	0	243	0	0	0	0
8/19/2020	0	238	0	0	0	0
8/25/2020	0	235	0	0	0	0
9/2/2020	0	236	0	0	0	0
9/9/2020	0	235	0	0	0	0
9/16/2020	0	243	0	0	0	0
9/21/2020	0	243	0	0	0	0
9/23/2020	0	0	0	422	0	0
9/29/2020	0	0	0	418	0	0
10/1/2020	0	0	0	414	0	0
10/6/2020	0	0	0	412	0	0
10/13/2020	0	0	0	401	0	0
10/20/2020	0	0	0	330	0	0
10/26/2020	0	0	0	335	0	0
11/3/2020	0	0	0	323	0	0
11/10/2020	0	222	0	312	219	0
11/11/2020	0	228	0	319	220	0
11/17/2020	0	223	0	327	195	0
11/20/2020	0	219	0	329	196	0
11/23/2020	0	232	0	324	196	0
12/1/2020	0	233	0	330	169	0
12/8/2020	121	233	0	315	158	0
12/16/2020	60	187	0	339	131	0
12/22/2020	106	231	0	310	164	0
12/29/2020	95	224	0	316	171	0
1/5/2021	92	214	0	284	162	0
1/12/2021	91	204	0	289	165	0
1/19/2021	94	157	0	205	155	0
1/27/2021	107	214	0	304	184	0
2/4/2021	89	196	0	279	202	0
2/10/2021	134	219	0	167	235	0
2/25/2021	115	212	0	305	227	0
3/4/2021	110	214	0	295	210	0
3/9/2021	117	221	0	294	204	0
3/17/2021	119	218	0	291	208	0
3/24/2021	97	209	0	282	187	0

APPENDIX D
SVE SYSTEM LEG FLOW RATES

Date	Red Leg Flow[1] (SCFM)	Blue Leg Flow[1] (SCFM)	Green Leg Flow[1] (SCFM)	Teal Leg Flow[1] (SCFM)	Purple Leg Flow[1] (SCFM)	Brown Leg Flow[1] (SCFM)
4/1/2021	112	213	0	285	204	0
4/6/2021	111	209	0	278	190	0
4/13/2021	100	216	0	280	182	0
4/22/2021	118	203	0	296	205	0
4/28/2021	103	211	0	276	172	0
5/3/2021	108	206	0	272	164	0
5/11/2021	96	220	0	284	162	0
5/19/2021	160	208	0	267	158	0
5/26/2021	161	0	0	281	163	0
6/1/2021	158	0	0	268	154	0
6/7/2021	153	0	0	270	155	0
6/15/2021	151	0	0	269	170	0
6/22/2021	148	0	0	270	168	0

[1]USEPA Method 2 "Determination of Stack Gas Velocity and Volumetric Flow Rate (Type S Pitot Tube)" specifies that a default pitot tube coefficient of 0.99 shall be used to calculate flow if the coefficient is unknown and the tube is designed according to he criteria of Sections 6.7.1 to 6.7 5 of this method. During the 2nd Quarter 2013, a review of the calculation was performed and it was noted that a 0.67 coefficient should be used for the specific pitot tubes used to collect data at the site. AECOM has corrected the previously calculated mass removal to reflect the 0.67 pitot tube coefficient.

[2]Brown Leg was shut off on December 20, 2017.

[3]Red Leg and Green Leg were shut off on July 7, 2020 as part of SVE System Assessment. Red Leg was re-opened December 1, 2020.

[4]Purple Leg was shut off between July 20 and November 9, 2020 as part of SVE System Assessment.

[5]Teal Leg was shut off between July 14 and September 21, 2020 as part of SVE System Assessment.

[6]Blue Leg was shut off between July 7-14, 2020, and between September 21 and November 9, 2020 as part of SVE System Assessment.

[7]Blue Leg was shut off on May 25, 2021.

Appendix E
Total Header Hydrocarbon Concentrations

SEE LAST PAGE OF TABLE FOR NOTES

APPENDIX E
TOTAL HEADER HYDROCARBON CONCENTRATIONS

Date	West Fenceline Concentration (ppmv)	Public Works Concentration (ppmv)
7/1/2020	8,769	14,200
7/7/2020	9,400	10,300
7/8/2020	15,500	16,000
7/14/2020	17,000	14,500
7/20/2020	14,100	NA
7/24/2020	4,789	NA
8/6/2020	7,946	NA
8/12/2020	8,286	NA
8/19/2020	7,293	NA
8/25/2020	6,671	NA
9/2/2020	6,922	NA
9/9/2020	4,495	NA
9/16/2020	5,414	NA
9/21/2020	6,053	NA
9/23/2020	NA	8,341
9/29/2020	NA	9,345
10/1/2020	NA	9,268
10/6/2020	NA	10,800
10/13/2020	NA	9,838
10/20/2020	NA	12,600
10/26/2020	NA	14,600
11/3/2020	NA	18,800
11/10/2020	38,740	21,400
11/11/2020	30,750	20,200
11/17/2020	20,600	17,300
11/20/2020	22,100	24,600
11/23/2020	21,600	18,300
12/1/2020	17,600	22,400
12/8/2020	16,100	21,500
12/16/2020	19,100	21,800
12/22/2020	13,800	18,300
12/29/2020	13,500	14,600
1/5/2021	13,700	16,800
1/12/2021	14,100	15,900
1/19/2021	12,700	15,600
1/27/2021	13,100	15,400
2/4/2021	18,400	20,700
2/10/2021	15,200	19,100
2/25/2021	15,900	17,200
3/4/2021	15,600	16,000
3/9/2021	15,600	16,000
3/17/2021	14,600	14,100
3/24/2021	16,200	15,400

SEE LAST PAGE OF TABLE FOR NOTES

APPENDIX E
TOTAL HEADER HYDROCARBON CONCENTRATIONS

Date	West Fenceline Concentration (ppmv)	Public Works Concentration (ppmv)
4/1/2021	16,300	13,700
4/6/2021	14,900	12,000
4/13/2021	15,100	12,300
4/22/2021	17,900	17,500
4/28/2021	11,300	10,300
5/3/2021	15,200	11,800
5/11/2021	13,100	10,200
5/19/2021	9,401	10,100
5/26/2021	14,600	11,800
6/1/2021	13,100	8,310
6/7/2021	14,900	10,300
6/15/2021	14,470	9,707
6/22/2021	15,200	9,300

[1]NA = Not Applicable

[2]West Fenceline Header was shut off between September 21 and November 9, 2020 as part of SVE System Assessment.

[3]Public Works Header was shut off between July 14 and September 21, 2020 as part of SVE System Assessment.

Appendix F
SVE System Flow Rates

SEE LAST PAGE OF TABLE FOR NOTES

APPENDIX F
SVE SYSTEM FLOW RATES

Date	West Fenceline Header[1] (SCFM)	Public Works Header[1] (SCFM)
7/1/2020	699	93
7/7/2020	698	101
7/8/2020	257	88
7/14/2020	254	94
7/20/2020	211	0
7/24/2020	240	0
8/6/2020	244	0
8/12/2020	243	0
8/19/2020	238	0
8/25/2020	235	0
9/2/2020	236	0
9/9/2020	235	0
9/16/2020	243	0
9/21/2020	243	0
9/23/2020	0	422
9/29/2020	0	418
10/1/2020	0	414
10/6/2020	0	412
10/13/2020	0	401
10/20/2020	0	330
10/26/2020	0	335
11/3/2020	0	323
11/10/2020	440	312
11/11/2020	448	319
11/17/2020	418	327
11/20/2020	415	329
11/23/2020	427	324
12/1/2020	402	330
12/8/2020	512	315
12/16/2020	378	339
12/22/2020	501	310
12/29/2020	491	316
1/5/2021	468	284
1/12/2021	460	289
1/19/2021	407	205
1/27/2021	506	304
2/4/2021	487	279
2/10/2021	587	167
2/25/2021	555	305
3/4/2021	534	295
3/9/2021	541	294
3/17/2021	546	291
3/24/2021	493	282

SEE LAST PAGE OF TABLE FOR NOTES

APPENDIX F
SVE SYSTEM FLOW RATES

Date	West Fenceline Header[1] (SCFM)	Public Works Header[1] (SCFM)
4/1/2021	529	285
4/6/2021	510	278
4/13/2021	498	280
4/22/2021	526	296
4/28/2021	487	276
5/3/2021	477	272
5/11/2021	478	284
5/19/2021	526	267
5/26/2021	324	281
6/1/2021	312	268
6/7/2021	308	270
6/15/2021	321	269
6/22/2021	317	270

[1]USEPA Method 2 "Determination of Stack Gas Velocity and Volumetric Flow Rate (Type S Pitot Tube)" specifies that a default pitot tube coefficient of 0.99 shall be used to calculate flow if the coefficient is unknown and the tube is designed according to the criteria of Sections 6.7.1 to 6.7.5 of this method. During the 2nd Quarter 2013, a review of the calculation was performed and it was noted that a 0.67 coefficient should be used for the specific pitot tubes used to collect data at the site. AECOM has corrected the previously calculated mass removal to reflect the 0.67 pitot tube coefficient.

[2]West Fenceline Header was shut off between September 21 and November 9, 2020 as part of SVE System Assessment.
[3]Public Works Header was shut off between July 14 and September 21, 2020 as part of SVE System Assessment.

AECOM
100 N. Broadway, 20th Floor
St. Louis, MO 63102
aecom.com