Illinois Environmental Protection Agency

Bureau of Land • 1021 North Grand Avenue East • P.O. Box 19276 • Springfield • Illinois • 62794-9276

ILLINOIS EPA RCRA CORRECTIVE ACTION CERTIFICATION

This certification must accompany any document submitted to Illinois EPA in accordance with the corrective action requirements set forth in a facility's RCRA permit. The original and two copies of all documents submitted must be provided.

1.0 Facility Identification

Name: Equilon Enterprises LLC d/b/a/ SOPUS
County: Madison
Street Address: 900 South Central Ave
Site No. (IEPA): 1191150002
City: Roxana
Site No. (USEPA): ILD080 012 305

2.0 Owner Information

Name: Not Applicable
Mail Address:
City:
State: Zip Code:
Contact Name:
Contact Title:
Phone:

3.0 Operator Information

Name: Equilon Enterprises LLC d/b/a/ SOPUS
Mail Address: 128 East Center Street
City: Nazareth
State: PA Zip Code: 18064
Contact Name: Leroy Bealer
Contact Title: Principal Program Manager
Phone: 484-632-7955

4.0 Type of Submission (check applicable item and provide requested information, as applicable)

☐ RFI Phase I Workplan/Report
☐ RFI Phase II Workplan/Report
☐ CMP Report;
☒ Other (describe): Response to TACO Tier 3 Demonstration 10/1/2020 IEPA Comment Letter

IEPA Permit Log No. B-43R
Date of Last IEPA Letter on Project: October 1, 2020
Log No. of Last IEPA Letter on Project: B-43R-CA-95, CA-98

Does this submittal include groundwater information: ☒ Yes ☐ No

Date of Submittal: January 4, 2022

5.0 Description of Submittal: (briefly describe what is being submitted and its purpose)

Response to IEPA comments regarding the TACO Tier 3 Demonstration submittal

6.0 Documents Submitted (identify all documents in submittal, including cover letter; give dates of all documents)

Cover letter, RCRA Corrective Action Certification, and Response to comments including text, tables, figures and attachments. Copy of submittal also sent directly to C. Hawbaker, R. Watson, and A. Butler of IPEA.

7.0 Certification Statement

(This statement is part of the overall certification being provided by the owner/operator, professional and laboratory in Items 7.1, 7.2 and 7.3 below). The activities described in the subject submittals have been carried out in accordance with procedures approved by Illinois EPA. I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations.

For: Response to ~~IEPA~~ TACO Tier 3 Demonstration 10/1/2020 IEPA Comment Letter

Date of Submission: January 4, 2022

7.1 Owner/Operator Certification

(Must be completed for all submittals. Certification and signature requirements are set forth in 35 IAC 702.126.) All submittals pertaining to the corrective action requirements set forth in a RCRA Permit must be signed by the person designated below (or by a duly authorized representative of that person):

1. For a Corporation, by a principal executive officer of at least the level of vice president.
2. For a Partnership or Sole Proprietorship, by a general partner or the proprietor, respectively.
3. For a Governmental Entity, by either a principal executive officer or a ranking elected official.

A person is a duly authorized representative only if:

1. the authorization is made in writing by a person described above; and
2. the written authorization is provided with this submittal (a copy of a previously submitted authorization can be used).

Owner Signature: *NOT APPLICABLE* Date: _____

Title: _____

Operator Signature: _____ Date: 1/4/2022

Title: Principal Program Manager

For: Response to TACO Tier 3 Demonstration 10/1/2020 IEPA Comment Letter

Date of Submission: January 4, 2022

7.2 Professional Certification (if necessary)

Work carried out in this submittal or the regulations may also be subject to other laws governing professional services, such as the Illinois Professional Land Surveyor Act of 1989, the Professional Engineering Practice Act of 1989, the Professional Geologist Licensing Act, and the Structural Engineering Licensing Act of 1989. No one is relieved from compliance with these laws and the regulations adopted pursuant to these laws. All work that falls within the scope and definitions of these laws must be performed in compliance with them. The Illinois EPA may refer any discovered violation of these laws to the appropriate regulating authority.

Any person who knowingly makes a false, fictitious, or fraudulent material statement, orally or in writing, to the Illinois EPA commits a Class 4 felony. A second or subsequent offense after conviction is a Class 3 felony. (415 ILCS 5/44 (h))

Professional's Signature: Wendy M Pennington Date: 1/4/2022

Professional's Name: Wendy M. Pennington


Address: 100 N. Broadway, 20th Floor

City: St. Louis

State: MO Zip Code: 63102

Phone: 314-429-0100

Professional's Seal:



7.3 Laboratory Certification (if necessary)

The sample collection, handling, preservation, preparation and analysis efforts for which this laboratory was responsible were carried out in accordance with procedures approved by Illinois EPA.

Name of Laboratory NOT APPLICABLE

_____ Date: _____

Signature of Laboratory Responsible Officer

Mailing Address of Laboratory

Address _____

City _____

State _____ Zip Code _____

_____

Name and Title of Laboratory Responsible Officer

AECOM
100 North Broadway
20th Floor
St. Louis, MO 63110
aecom.com

January 4, 2022

Mr. Kenneth Smith, PE
Manager, Permit Section
Illinois Environmental Protection System
Bureau of Land
1021 North Grand Ave East
Springfiled, IL 62794

Response to TACO Tier 3 Demonstration 10/1/2020 IEPA Comment Letter
Equilon Enterprises LLC d/b/a Shell Oil Products US
Roxana, Illinois
1191150002 - Madison County (ILD080012305)
Log No. B-43R-CA-95, CA-98

Dear Mr. Smith;

AECOM Technical Services, Inc. (AECOM), on behalf of Equilon Enterprises LLC d/b/a Shell Oil Products US (SOPUS), is providing this letter in response to the Illinois Environmental Protection Agency's (IEPA's) October 1, 2020 letter. In that letter, IEPA neither approved or denied the TACO Tier 3 Demonstration submittals and did provide conditions and modifications to the submittals. Enclosed, please find specific responses to each of IEPA's comments in their October 1, 2020 letter along with supporting tables, figures and attachments.

If you have any questions concerning this submittal, please contact Leroy (Buddy) Bealer, SOPUS Principal Program Manager, at (484) 632-7955 or leroy.bealer@shell.com, or me at (314) 452-8929 or wendy.pennington@aecom.com.

Sincerely,

Wendy Pennington, PE
Project Manager
AECOM
M: 314-452-8929
E: wendy.pennington@aecom.com

enclosures: Response to IEPA 10/1/2020 Comments
Tables
Figures
Attachments

cc: Leroy (Buddy) Bealer, SOPUS
Amy Butler, IEPA Springfield
Carol Hawbaker, IEPA Springfield
Gina Search, IEPA Collinsville
Repositories (Roxana Public Library, Roxana Website)
Project File

IEPA Comment 1:

> *Groundwater concentrations from Roxana Interim Groundwater Monitoring Reports for Second Quarter 2018 to present were compared to values published in Appendix B, Table H, of 35 Ill. Adm. Code Part 742, and there continues to be a potential for vapor migration after shutdown of the SVE system. Therefore, any future proposal must maintain the SVE system in areas of concern until the groundwater concentrations have been reduced to levels consistent with applicable standards at groundwater monitoring wells within the Village of Roxana.*

SOPUS Response:

The comment is acknowledged. The SVE system remains operational and will remain so until closure criteria are reached (additional information will be presented/proposed in the Steam Enhanced Extraction (SEE) Proposal and Effectiveness Report). Although a few groundwater concentrations are above the referenced screening criteria, multiple lines of evidence support a conclusion that there currently is not a potential for vapor migration after shutdown of the SVE system, some of which include:

- A vapor intrusion investigation was performed at several homes throughout the Village of Roxana in 2011 and 2012 and found **no evidence of vapor intrusion.**

- SVE system has removed over 3,000 tons of total mass and **created a significant zone of remediated soil that is now effective as a barrier** between groundwater and vapor intrusion. The SVE system has been operating for approximately 10 years, during which time soil gas has been remediated from the surface through the intermediate zone (i.e., to a depth of approximately 20 feet below ground surface [bgs]). Even though concentrations have been detected in a few soil vapor samples collected at depth (i.e., below 20 feet bgs shallow soil vapor data at these locations show that attenuation mechanisms decrease concentrations to below remedial objectives (ROs) at shallow depths, demonstrating that the vapor intrusion pathway is not complete.

- Groundwater concentrations in the Village of Roxana between 3rd quarter 2018 (3Q18) and 2nd quarter 2021 (2Q21) were evaluated with respect to the values published in Appendix B, Table H of 35 IAC Part 742 (Table H). A total of 23 locations were sampled during this time; **only the 6 locations shown in the table below had concentrations above the residential screening values** (17 of these locations exhibited no exceedances). The areas where groundwater is above the screening values is at the Roxana Public Works Yard and in the vicinity of 4th Street and Chaffer Avenue (the SVE system is currently operating in these areas). Groundwater concentrations in the vicinity of 4th Street and Chaffer Avenue have been trending downward since late 2015. Groundwater concentrations have been trending downward in the western portion of the Roxana Public Works Yard and trending upward in the eastern portion; demonstrating the WRR Water Production System is pulling water and dissolved phase contamination eastward, toward the interior of the facility. Contamination in the Roxana Public Works Yard vicinity will be further addressed with the implementation of the proposed SEE system. **Table 1** shows groundwater analytical results screened against the remediation objectives for the indoor inhalation exposure route values on Table H. **Figure 1** shows the locations of the groundwater monitoring wells with the wells above groundwater remediation objectives for the indoor inhalation exposure route values highlighted.

Well ID	Location	Average Depth to Water (ft btoc)	Constituent	Quarter(s)	Exceedance Results (mg/L)	Table H GW ROs (mg/L)
MW-2	Corner of Chaffer and alley between 6th and 7th St	39.89	Ethylbenzene	2Q19, 3Q19, 4Q19, 2Q20	0.63 – 1.2	0.37
MW-7	Public Works Yard along 8th St	38.41	Benzene	3Q18 through 2Q21	530 – 2,200	0.11
			Ethylbenzene	3Q19	0.52 J	0.37
MW-8	Public Works Yard (lower)	29.83	Benzene	3Q18 through 2Q21	29 – 840	0.11
			Ethylbenzene	3Q19, 4Q19	0.4 J and 0.54	0.37
			Naphthalene	4Q19	1.2	0.075
MW-22	4th St midway between Chaffer and Route 111	37.62	Benzene	3Q18, 2Q19	0.22 – 0.79	0.11
			Ethylbenzene	3Q18, 4Q18, 1Q19, 2Q19, 2Q21	0.53 – 2	0.37
			Naphthalene	3Q18, 4Q18, 1Q19, 2Q19	0.14 – 0.21	0.075
ROST-4-PZ(C)	3rd St west of Chaffer	37.93	Naphthalene	3Q19, 1Q21	0.089 and 0.092	0.075
ROST-4-PZ(E)	Chaffer south of 3rd St	37.26	Benzene	3Q19 1Q21	0.11 and 0.19	0.11
			Ethylbenzene	4Q19, 2Q20, 3Q20, 4Q20, 1Q21, 2Q21	0.39 – 0.52	0.37
			Naphthalene	3Q19, 4Q19, 1Q20, 2Q20, 3Q20, 4Q20, 1Q21, 2Q21	0.094 – 0.16	0.075

J = Concentration is estimated

- The EPA June 2015 *Technical Guide for Addressing Petroleum Vapor Intrusion at Leaking Underground Storage Tank Sites*[1] and the June 2015 *OSWER Technical Guide for Assessing and*

[1] Unites States Environmental Protection Agency (USEPA), June 2015; *Technical Guide for Addressing Petroleum Vapor Intrusion at Leaking Underground Storage Tank Sites*.

Mitigating the Vapor Intrusion Pathway from Subsurface Vapor Sources to Indoor Air[2] both discuss vertical separation distances for buildings. These referenced technical guides state that "additional investigation is generally unnecessary if the vertical separation is greater than 6 feet for dissolved phase contamination beneath buildings of any size…" Throughout the Village of Roxana, the groundwater table is located at least about 20 to 25 feet below the lowest possible building foundation (refer to the Depth to Water column in **Table 1**). These documents also discuss low-permeability layers above the groundwater table impeding or preventing upward migration of vapors from deeper sources in the vadose zone. The upper 4 to 6 feet of subsurface in the 4th Street and Chaffer Ave vicinity as well as at the Public Works Yard consist of clay and/or silt. This material is underlain by sand which starts as fine grained with silty and clayey zones and coarsens with depths below the water table.

SVE system operations at the Roxana Public Works Yard (PWY) will be suspended during the construction and installation of the Steam Enhanced Extraction (SEE) system, at which time the current network of PWY SVE wells will be abandoned. SVE operations at the PWY will be replaced by SEE operations upon startup of the proposed system. The SEE system proposal and/or effectiveness report will include a plan for SVE system shutdown after completion of SEE operations. This plan may include a rebound test to shut down SVE operation and monitor for one year. This rebound monitoring program could include triggers for increased monitoring and SVE system restart should Site conditions change. The SVE system would be maintained such that a timely restart during the rebound monitoring period would be possible.

Given the information provided above, it is requested that groundwater no longer be considered a source for potential vapor intrusion.

IEPA Comment 2:

The indoor air calculations evaluate methyl-tert-butyl ether (MTBE) and 1,1,2- trichloroethane as carcinogens.

35 III. Adm. Code 742.200 defines a carcinogen as a contaminant that is classified as a category A1 or A2 carcinogen by the American Conference of Governmental Industrial Hygienists; a category 1 or 2A/2B carcinogen by the World Health Organization's International Agency for Research on Cancer; a "human carcinogen" or "anticipated human carcinogen" by the United States Department of Health and Human Service National Toxicological Program; or a category A or B1/B2 carcinogen or as "carcinogenic to humans" or "likely to be carcinogenic to humans" by the (United States Environmental Protection Agency in the integrated risk information system or a final rule issued in a Federal Register notice by the USEFA). [415 ILCS 5/58.2]

MTBE is classified as an "A3" carcinogen by the American Conference of Governmental Industrial Hygienists, and a "3" carcinogen by the World Health Organization's International Agency for Research on Cancer.

[2] USEPA, June 2015; *OSWER Technical Guide for Assessing and Mitigating the Vapor Intrusion Pathway from Subsurface Vapor Sources to Indoor Air*.

1,1,2-trichloroethane is classified as an "A3" carcinogen by the American Conference of Governmental Industrial Hygienists, a "3" carcinogen by the World Health Organization's International Agency for Research on Cancer and a "C" carcinogen by the United States Environmental Protection Agency in the integrated risk information system.

Neither of these chemicals meet the definition of a carcinogen provided in both 35 Ill. Adm. Code 742 and 415 ILCS. When evaluating MTBE and 1,1,2-trichloroethane as non-carcinogens, the appropriate indoor air remediation objectives are 3.1 mg/m^3 and 0.00021 mg/m^3, respectively.

SOPUS Response:

The comment is acknowledged. As recommended, the non-carcinogen TACO indoor air ROs have been updated for MTBE and 1,1,2-trichloroethane using 3.1 mg/m^3 and 0.00021 mg/m^3, respectively, (Refer to **Appendix 2-B, Table 1 – rev. 1** in **Attachment 1**). Based on the recalculations, there are no changes to the initial conclusion:

- Soil gas data were compared to the Tier 3 ROs, and the data for petroleum hydrocarbons in the residential area meet these objectives in the shallow zone (0-10 feet bgs). In certain areas, site data exceeded the objectives at depth (below 20 feet bgs). These results do not pose a concern as attenuation mechanisms decrease concentrations to below the objectives at shallower depths.

IEPA Comment 3:

The indoor air carcinogen calculation for 1,2-dichloropropane uses an incorrect value of 3.7E-05 (ug/m^3)$^{-1}$ for the inhalation unit risk factor (URF). The proper value is 3.7E-06 (ug/m^3)$^{-1}$. Using the correct URF value in the calculation, the indoor air remediation objective for 1,2-dichloropropane is 0.00066 mg/m^3.

SOPUS Response:

The comment is acknowledged. The RO for 1,2-dichloropropane has been recalculated using 3.7E-06 as the inhalation URF (Refer to **Appendix 2-B, Table 1 – rev. 1** in **Attachment 1**). Based on the recalculations, there are no changes to the initial conclusion:

- Soil gas data were compared to the Tier 3 ROs, and the data for petroleum hydrocarbons in the residential area meet these objectives in the shallow zone (0-10 feet bgs). In certain areas, site data exceeded the objectives at depth (below 20 feet bgs). These results do not pose a concern as attenuation mechanisms decrease concentrations to below the objectives at shallower depths.

IEPA Comment 4:

The chloroform calculation uses a dimensionless henry's constant (H') value of 1.5E-01. This value is associated with a system temperature of 25° C. Per 35 Ill. Adm. Code 742.717(h), the default henry's constant system temperature for the indoor inhalation exposure route is 13°C. The appropriate chloroform H' value at 13° C is 9.18E-02. The value is provided at 35 III. Adm. Code 742, Appendix C, Table E.

SOPUS Response:

The comment is acknowledged. The RO for chloroform has been recalculated using 9.18E-02 as the dimensionless Henry's Law Constant as associated with a system temperature of 13 °C (Refer to **Appendix 2-B, Table 1 – rev. 1** in **Attachment 1**). Based on the recalculations, there are no changes to the initial conclusion:

- Soil gas data were compared to the Tier 3 ROs, and the data for petroleum hydrocarbons in the residential area meet these objectives in the shallow zone (0-10 feet bgs). In certain areas, site data exceeded the objectives at depth (below 20 feet bgs). These results do not pose a concern as attenuation mechanisms decrease concentrations to below the objectives at shallower depths.

IEPA Comment 5:

The vinyl chloride calculation uses a diffusivity in air (D_i) value of 1.1E-01 cm^2/s, a diffusivity in water (D_w) value of 1.20E-05 cm^2/s, and a henry's constant (H^1) value of 1.14E+00. These values are not consistent with the values provided in 35 Ill, Adm. Code 742, Appendix C, Table E. The Appendix C, Table E values are:

Parameter	*Value*	*Units*
D_i	*1.06E-01*	cm^2/s
D_w	*1.23E-06*	cm^2/s
H^1	*8.14E-01*	*unitless*

The Illinois EPA notes the values utilized are values presented for the USEPA's regional screening level (RSL) chemical and physical parameters.

SOPUS Response:

The comment is acknowledged. The RO for vinyl chloride has been recalculated using the input parameters provided by IEPA in the table above (Refer to **Appendix 2-B, Table 1 – rev. 1** in **Attachment 1**). Based on the recalculations, there are no changes to the initial conclusion:

- Soil gas data were compared to the Tier 3 ROs, and the data for petroleum hydrocarbons in the residential area meet these objectives in the shallow zone (0-10 feet bgs). In certain areas, site data exceeded the objectives at depth (below 20 feet bgs). These results do not pose a concern as attenuation mechanisms decrease concentrations to below the objectives at shallower depths.

IEPA Comment 6:

The following table lists non-TACO chemicals utilizing a henry's constant value set at a system temperature of 25° C. The henry's constant system temperature for the indoor inhalation exposure route is 13° C. The corrected henry's constant values using a system temperature of 13° C are as follows:

Chemical	***Proposed H1 at 25° C***	***Corrected H1 at 13° C***
Benzyl Chloride	*1.7E-02*	*8.21E-03*
1,3-Butadiene	*3.01E+00*	*2.18E+00*
Chloromethane	*3.61E-01*	*2.69E-01*
Cyclohexane	*6.13E+00*	*3.64E+00*
Ethyl Chloride	*4.54E-01*	*3.12E-01*
Hexachlorobutadiene	*4.21E-01*	*1.77E-01*
Hexane	*7.36E+01*	*4.45E+01*
2-Hexanone	*3.81E-03*	*1.93E-03*
4-Methyl-2-pentanone	*1.38E-04*	*2.93E-03*
Isopropanol	*3.31E-04*	*1.41E-04*
n-Propylbenzene	*4.29E-01*	*2.00E-01*
1,1,2,2-Tetrachloroethylene	*1.50E-02*	*7.43E-03*
Tetrahydrofuran	*2.88E-03*	*1.74E-03*
1,1,2-Trichloro-1,2,2-trifluoroethane	*2.15E+02*	*1.37E+01*
1,2,4-Trimethylbenzene	*2.52E-01*	*1.15E-01*
1,3,5-Trimethylbenzene	*3.59E-01*	*1.64E-01*

The Illinois EPA wishes to clarify data for the enthalpy of vaporization at the normal boiling point ($H_{v,b}$) for n-Heptane is not available; therefore, a henry's constant value of 8.18E+01 at 25°C must be used.

SOPUS Response:

The comment is acknowledged. The ROs for the chemicals listed in IEPA Comment 6 above have been recalculated using the provided corrected dimensionless Henry's Law Constants associated with a system temperature of 13 ^{o}C (Refer to **Appendix 2-B, Table 1 – rev. 1** in **Attachment 1**). Based on the recalculations, there are no changes to the initial conclusion:

- Soil gas data were compared to the Tier 3 ROs, and the data for petroleum hydrocarbons in the residential area meet these objectives in the shallow zone (0-10 feet bgs). In certain areas, site data exceeded the objectives at depth (below 20 feet bgs). These results do not pose a concern as attenuation mechanisms decrease concentrations to below the objectives at shallower depths.

IEPA Comment 7:

The Tier 3 evaluation proposes a dirt floor residential building scenario, with a basement foundation extending to 7 feet (2.13 meters) below ground surface (bgs). The Illinois EPA provides the following comments regarding the proposed building parameters:

a. When using a building parameter value other than a default value listed in 35 Ill. Adm. Code 742, Appendix C, Table L, an institutional control stating buildings may not be present above the contamination plume that are smaller than the proposed building parameters used to calculate the remediation objectives is necessary. To avoid any institutional controls for the area of concern, the

Illinois EPA recommends using the default value of 2.0 meters for the distance from the ground surface to the bottom of the basement slab (LF) value.

b. The calculations use a building height of 2.44 meters. The 2.44-meter building height value is associated with a slab-on-grade building. Per 35 Ill. Adm. Code 742, Appendix C, Table M, the appropriate building height for a basement foundation building is 4.27 meters.

c. The calculations use a slab footprint value of 100 m^2. The Illinois EPA wishes to clarify the parameter represents the surface area of the enclosed space at or below grade, and is represented by the symbol "A_B" at Section 742, Appendix C, Tables L and M. To calculate an appropriate basement "A_S" value for use in the proposed equations. Appendix C, Table L provides equation J&E12b for calculating the values for a basement building scenario. The equation is:

$$A_B = (L_B \times W_B) + (2 \times L_F \times L_B) + (2 \times L_F \times W_B)$$

Using the proposed building length (L_B) and width (W_B), and the recommended 2.0-meter default distance between the ground surface to the bottom of the slab (L_F), the appropriate "A_B" value for use in the calculation is 180 m^2.

d. The calculations propose a building ventilation rate (Q_{bldg}) of 129 m^3/hr, or 3.59E+04 cm^3/s. The Illinois EPA wishes to clarify the proposed value is appropriate for slab-on-grade buildings, not basement buildings. The appropriate Q_{bldg} value for a basement scenario when using the Illinois EPA default 2.0 meter L_F value is 226 m^3/hr or 6.28E+04 cm^2/s. This value is available at 35 III. Adm. Code 742, Appendix C, Table M.

SOPUS Response:

The comment is acknowledged. The ROs have been recalculated using 2.0 m for the distance between the ground surface to the bottom of the slab, 4.27 m for the building height for a basement foundation building, 180 m^2 as the surface area of the enclosed space at or below grade, and 226 m^3/hr as the building ventilation rate per the updated building dimensions (Refer to **Appendix 2-B, Table 1 – rev. 1** in **Attachment 1**). Based on the recalculations, there are no changes to the initial conclusion:

- Soil gas data were compared to the Tier 3 ROs, and the data for petroleum hydrocarbons in the residential area meet these objectives in the shallow zone (0-10 feet bgs). In certain areas, site data exceeded the objectives at depth (below 20 feet bgs). These results do not pose a concern as attenuation mechanisms decrease concentrations to below the objectives at shallower depths.

IEPA Comment 8:

The following chemicals may be excluded from further consideration, as the chemical concentrations do not exceed the applicable residential indoor inhalation exposure route remediation objectives for all depths sampled:

- *Acetone*
- *2-Butanone*
- *Carbon Disulfide*

- *Chlorodibromomethane*
- *Chloroethane*
- *Cyclohexane*
- *1,2-Dichlorobenzene*
- *1,1 -Dichloroethane*
- *1,1 -Dichloroethylene*
- *cis-1,2-Dichloroethvlene*
- *trans-1,2-Dichioroethylene*
- *Isopropylbenzene (Cumene)*
- *4-Methyl-2-Petanone (MIBK)*
- *Methyl-tert-Butyl-Ether (MTBE)*
- *n-Propylbenzene*
- *Styrene*
- *Tetrahydrofuran*
- *Toluene*
- *1,1,1 -Trichloroethane*
- *Trichlorofluoromethane*
- *1,2,2-Trichloro-1,2,2-Trifluoroethane (Freon 113)*

SOPUS Response:

The comment is acknowledged. The chemicals listed in IEPA Comment 8 above will be excluded from consideration going forward and removed from the TO-15 analysis list going forward.

Based on the modeling information provided in the original Tier 3 Demonstration submittal, a total of ten constituents were identified as Chemicals of Potential Concern (COPCs). Based on the comments provided in IEPA Comment 8, the following eight constituents remain as the COPCs:

COPCs	Recalculated RO (mg/m^3)
Benzene	0.17
Ethylbenzene	0.61
Hexane	470
Naphthalene	0.05
1,2,4-Trimethylbenzene	48
1,3,5-Trimethylbenzene	49
o-Xylenes	56
m,p-Xylenes	63

The recalculated ROs for the COPCs listed above were compared to recent site data (1st quarter 2015 [1Q15] through 1st quarter 2021 [1Q21]). This timeframe was chosen because it incorporates the timeframe presented in the original Tier 3 Demonstration submittal (1Q15 through 4Q16) and extends to include the more recent data collected (1Q17 through 1Q21). This comparison for the residential scenario is shown on the revised charts from the original Tier 3 Demonstration in **Attachment 2** [Chart 1 (rev. 1), Chart 3 (rev. 1), Chart 4 (rev. 1), Chart 6 (rev. 1), Chart 7 (rev. 1),

Chart 8 (rev. 1), and Chart 9, (rev. 1)][3]. These charts show that no sample collected at depths shallower than 10 feet bgs had concentrations exceeding the recalculated Tier 3 ROs with 3 exceptions that are considered outliers (one-time events with concentrations close to the recalculated RO – no action is proposed for these locations):

- Benzene detected at 0.18 mg/m3 at VMP-63 in the 10 ft bgs port in 1Q21
- Ethylbenzene detected at 0.63 mg/m3 at VMP-4 in the 5 ft bgs port in 2Q16
- Ethylbenzene detected at 0.79 mg/m3 at VMP-2 in the 5 ft bgs port in 1Q15

Attachment 3 contains the soil vapor analytical results within the Village of Roxana and the Roxana Public Works Yard screened against the recalculated ROs for 1Q15 through 1Q21.

Given the information provided above, it is requested that these eight (8) COPCs be used for decision making purposes.

IEPA Comment 9:

The facility collected and analyzed several soil gas samples from 5 feet bgs. Samples collected from the 5-foot depth demonstrate contaminated soil gas has migrated above the proposed basement floor. In other words, no vertical separation or transport distance between the basement floor and contaminated soil gas exists.

When no vertical separation exists between the soil gas sample depth and the bottom of the proposed basement floor, the D_{source} value should set at 1 cm below the foundation floor depth. This will result in a distance between the source and foundation (L_T) of 1 cm. When using a L_T value of 1 cm, soil gas sample concentrations from the most recent sample event that demonstrate exceedances of residential remediation objectives at 5 feet bgs are as follows:

Bromodichloromethane exceeds the residential remediation objective of 0.0005 mg/m^3 at the following sample point:

Location	***Concentration (mg/m^3)***
VMP-47	*0.0018*

Chloroform exceeds the residential remediation objective of 0.00044 mg/m^3 at the following sample points:

Location	***Concentration (mg/m^3)***
VMP-1	*0.0068*
VMP-6	*0.0069*
VMP-7	*0.0021*
VMP-8	*0.00097*
VMP-9	*0.0014*
VMP-23	*0.003*

[3] Naphthalene has not been nor is it currently included as an analyte in the soil vapor monitoring program; therefore, there is no chart provided to depict the comparison for the residential scenario.

VMP-24	*0.0013*
VMP-32	*0.0031*
VMP-47	*0.0046*
VMP-64	*0.0009*

Ethylbenzene exceeds the residential remediation objective of 0.0056 mg/m3 at the following sample points:

Location	***Concentration (mg/m^3)***
VMP-1	*0.068*
VMP-4	*0.061*
VMP-63	*0.025*

Naphthalene exceeds the residential remediation objective of 0.00053 mg/m^3 at the following sample point:

Location	***Concentration (mg/m^3)***
VMP-24	*0.00058*

In addition, several chemicals' method detection limits exceed the residential remediation objectives at the 5-foot sample depth. As a result, the Illinois EPA cannot determine if the remediation objectives are met. The following table is a list of chemicals with method detection limits exceeding remediation objectives at 5 feet bgs. Due to the number of locations where the method detection limits exceed the remediation objectives, the below table provides the chemical and the remediation objective that the method detection limit must meet for the chemical when analyzed for soil gas from 5 feet bgs:

Chemical	***R.O. for 1 cm L_T (mg/m^3)***
Benzene	*0.0015*
Bromodichloromethane	*0.00051*
Bromoform	*0.064*
Bromomethane	*0.031*
1,3-Butadiene	*0.00035*
Carbon Tetrachloride	*0.0023*
Chloroform	*0.00044*
1,2-Dibromoethane	*0.000040*
1,4-Dichlorobenzene	*0.0014*
1,2-Dichloroethane	*0.0039*
1,2-Dichloropropane	*0.0037*
1,3-Dichloropropylene (cis+trans)	*0.0042*
1,4-Dioxane	*0.00088*
Ethylbenzene	*0.0056*
Naphthalene	*0.00053*
Hexachlorobutadiene	*0.0018*
2-Hexanone	*0.19*
1,1,2,2-Tetrachloroethane	*0.00037*
Tetrachloroethylene	*0.057*

1,2,4-Trichlorobenzene	*0.03*
1,1,2-Trichloroethane	*0.0012*
Trichloroethylene	*0.0033*
Vinyl Chloride	*0.0011*

SOPUS Response:

The comment is acknowledged. Method Detection Limits (MDLs - the results of a statistical calculation) have not been provided; however, reporting limits (RLs – the limit of detection of a specific target analyte for a specific sample after adjustments are made for dilutions or percent moisture) are provided by the laboratory and were included in the original Tier 3 submittals. Therefore, AECOM is interpreting that "reporting limit" was meant in place of "method detection limit."

During a technical discussion with IEPA on July 15, 2021, it was communicated by IEPA that soil vapor samples from appropriate depths with respect to residence foundations need to be considered and evaluated. Based on this information, a review of the foundation information for residences with respect to VMP locations was performed. This evaluation was used to determine the appropriate depths for soil vapor samples from each vapor monitoring point. Refer to **Table 2** for the evaluation of VMP locations compared to nearby residence foundation type. **Figure 2** shows the locations of residences and VMPs.

The closest residences to VMP-1, VMP-7, VMP-8, VMP-9, VMP-23, VMP-32, VMP-47, VMP-63, and VMP-64 have foundations that consist of concrete basements. Based on this evaluation, the appropriate port to consider at these locations is the 8.5-ft bgs port (at VMP-1), the 9.5-ft bgs port (at VMP-8), the 10-ft bgs port (at VMP-23, VMP-32, VMP-47), the 11.5-ft bgs port (at VMP-9), and the 13.5-ft bgs port (at VMP-7). These depths at the identified locations do not exhibit any exceedances of the recalculated RO for bromodichloromethane (0.06 mg/m^3); do exhibit limited sporadic exceedances of the recalculated RO for chloroform (0.05 mg/m^3); and do not exhibit exceedances of the recalculated RO for ethylbenzene (0.61 mg/m^3). None of these VMP locations are located near the groundwater exceedances of the groundwater remediation objective for the indoor inhalation exposure route discussed in the response to Comment 1 above.

The closest residences to VMP-4, and VMP-24, have foundations that consist of concrete basements and soil crawl spaces. Based on this evaluation, the appropriate ports to consider at these locations are the 5-ft and 12-ft bgs ports at VMP-4, and the 5-ft and 10-ft bgs ports at VMP-24. The 12-ft bgs port at VMP-4 and the 10-ft bgs port at VMP-24 do not exhibit any exceedances of the recalculated RO for ethylbenzene (0.61 mg/m3). Neither of these VMP locations are located near the groundwater exceedances of the groundwater remediation objective for the indoor inhalation exposure route.

Naphthalene has not been nor is it currently included as an analyte of the TO-15 analysis performed for the soil vapor monitoring program.

The closest residences to VMP-6 have foundations that consist of concrete slab-on-grade. Based on this evaluation, the appropriate port to consider at this location is the 5-ft bgs port.

Based on the evaluation of VMP locations compared to surrounding residence foundations, the only locations where the 5-ft bgs port is an appropriate sample location are listed below:

VMP-1	VMP-11	VMP-48
VMP-4	VMP-17	VMP-49
VMP-5	VMP-20	VMP-50
VMP-6	VMP-24	VMP-52
VMP-7	VMP-32	VMP-62

Based on the information provided above, it is requested that the 5-ft bgs samples at only the locations above be considered and that the 5-ft bgs samples at all other locations be removed from consideration for establishment of the proposed Tier 3 ROs.

A proposal to modify the quarterly soil vapor monitoring program in accordance with the evaluation of VMP locations compared to surrounding residence foundations was discussed with IEPA during a technical presentation on October 14, 2021. The purpose of this modification proposal will be to focus monitoring and data collection efforts at more relevant VMP depths based on location throughout the Village of Roxana. Based on IEPA comments during the October 14, 2021 technical discussion, this proposal will be made after evaluation of the effectiveness of the SEE system at the PWY.

IEPA Comment 10:

Using the correct values noted in Items 2-7 above, the following chemicals exceed the residential indoor inhalation exposure route for soil gas samples collected from depths between 8.5 and 20 feet bgs:

- *Chloroform exceeds the residential indoor inhalation remediation objective of 0.048 mg/m^3 at 10 feet bgs for the following sample point:*

Location	***Concentration (mg/m^3)***
VMP-50	*0.066*

SOPUS Response:

The comment is acknowledged. VMP-50 is located in the alley between East 4th and East 5th Streets to the west of Chaffer Avenue and consists of four ports located at 5-ft, 10-ft, 20-ft and 30-ft below ground surface (bgs). The residences immediately surrounding VMP-50 have foundations consisting of concrete basements and soil crawl spaces. Groundwater in the vicinity of VMP-50 has been approximately 36 to 45 feet bgs from 2013 to present. The recalculated RO for chloroform (based on IEPA comments 2-7 above) is 0.05 mg/m^3. Considering the foundation construction of the surrounding residences, the appropriate depth of analytical data to consider at VMP-50 is that from the 5-ft and 10-ft bgs ports. Evaluation of the chloroform analytical data (1Q15 through 1Q21) from the 5-ft port shows no exceedances of the recalculated RO (the RL for chloroform exceeded the recalculated RO in the 4/10/2018 sample because a nearby Ameren Illinois natural gas utility line leak caused elevated reporting limits for the sample). Evaluation of the chloroform analytical data (1Q15 through 1Q21) from the 10-ft port at VMP-50 shows sporadic exceedances of the recalculated

RO in 3Q16, 4Q16, 3Q18 and 1Q21 with concentrations ranging between 0.055 and 0.099 mg/m^3. Refer to **Table 3** for the evaluation of chloroform analytical results vs the recalculated ROs.

Considering the foundation construction of the surrounding residences, the 20-ft and 30-ft bgs ports at VMP-50 are not appropriate depths for evaluation of analytical data with respect to indoor air. Chloroform is the only constituent at VMP-50 (10-ft port) which exhibited exceedances when screened against the recalculated ROs. VMP-50 is not located near any groundwater exceedances of the groundwater remediation objective for the indoor inhalation exposure route.

Chloroform is not a COPC for this site. Potential sources of chloroform in soil gas and groundwater include discharge of chlorinated water such as lawn irrigation, leakage/drainage from a swimming pool, or leaking municipal water lines. Other sources include pulp and papermills, sanitary landfills and hazardous waste sites. Chloroform was used in the past as an extraction solvent for fats, oils, greases and other products; as dry-cleaning spot remover; in fire extinguishers; as a fumigant; and as an anesthetic. However, chloroform is no longer used in the products. Chloroform may also be found in some foods and beverages, largely from the use of tap water during production processes.[4]

Given the information provided above, it is requested that chloroform be removed from consideration for soil vapor at the Roxana project site.

IEPA Comment 11:

Using the correct values noted in Items 2-7 above, the following chemicals either exceed or present method detection limits that exceed the residential indoor inhalation exposure route for the most recent soil gas analyses at sample location VMP-56 at 38.5 feet bgs:

Chemical	***Concentration (mg/m^3)***	***Remediation Objective (mg/m^3)***
Benzene	*470*	*1.5*
Bromodichloromethane	*<57 (MDL)*	*0.51*
Bromoform	*<87 (MDL)*	*64*
Bromomethane	*<33 (MDL)*	*23*
1,3-Butadiene	*<19 (MDL)*	*0.35*
Carbon Tetrachloride	*<53 (MDL)*	*2.3*
Chloroform	*<41 (MDL)*	*0.44*
alpha-Chlorotoluene	*<41 (MDL)*	*0.34*
1,2-Dibromoethane	*<65 (MDL)*	*0.04*
1,4-Dichlorobenzene	*<51 (MDL)*	*1.4*
1,2-Dichloroethane	*<34 (MDL)*	*3.9*
1,2-Dichloropropane	*<39 (MDL)*	*3.7*
1,2-Dichloropropylene (cis+trans)	*<38 (MDL)*	*4.2*
1,4-Dioxane	*<120 (MDL)*	*0.88*
Ethylbenzene	*250*	*5.7*
Hexachlorobutadiene	*<300 (MDL)*	*1.8*
2-Hexanone	*8,400*	*4,400*

[4] Chloroform – USEPA (epa.gov/sites/default/files/2016-09/documents/chloroform.pdf

1,1,2,2-Tetrachloroethane	*<58 (MDL)*	*3*
1,2,4-Trichlorobenzene	*<250 (MDL)*	*30*
1,1,2-Trichloroethane	*<46 (MDL)*	*1.2*
Trichloroethylene	*<45 (MDL)*	*3.3*
Vinyl Chloride	*<22 (MDL)*	*1.1*

SOPUS Response:

The comment is acknowledged. Method Detection Limits (MDLs - the results of a statistical calculation) have not been provided; however, reporting limits (RLs – the limit of detection of a specific target analyte for a specific sample after adjustments are made for dilutions or percent moisture) are provided by the laboratory and were included in the original Tier 3 submittals. Therefore, AECOM is interpreting that "reporting limit" was meant in place of "method detection limit."

VMP-56 is located on East 4th Street to the east of Chaffer Avenue and consists of three ports located at 10-ft, 25-ft and 38.5-ft bgs. The properties immediately surrounding VMP-56 are vacant lots currently owned by SOPUS. The closest residence to this location has a foundation consisting of a concrete basement and a soil crawl space; however, VMP-32 is closer to this residence than VMP-56. Groundwater in the vicinity of VMP-56 has been approximately 35 to 43 feet bgs from 2013 to present; therefore, the 38.5-ft bgs port at VMP-56 is often submerged and unable to be sampled. Considering the foundation construction of the surrounding residences, the appropriate depth of analytical data to consider at VMP-56 is that from the 10-ft bgs port. Evaluation of the analytical data (1Q15 through 1Q21) from the 10-ft port and 25-ft port at VMP-56 exhibits no analytical results in exceedance of the recalculated ROs. Refer to **Table 4** for the evaluation of analytical results vs the recalculated ROs at VMP-56.

Considering the proximity of this this location to any residence and the foundation construction of the closest residence, the 25-ft and 38.5-ft bgs ports at VMP-56 are not appropriate depths for evaluation of analytical data. There are no exceedances for the constituents listed in IEPA Comment 11 at VMP-56 in the 10-ft port when screened against the recalculated ROs. VMP-56 is also not located near any groundwater exceedances of the groundwater remediation objective for the indoor inhalation exposure route.

Given the information provided above, it is requested that VMP-56 be removed from consideration for establishment of the proposed Tier 3 ROs.

IEPA Comment 12:

Using the correct values noted in Items 1-6 above, the following chemicals either exceed or present method detection limits that exceed the residential indoor inhalation exposure route for the most recent soil gas analyses at sample location VMP-2 at 42 feet bgs:

Chemical	***Concentration (mg/m^3)***	***Remediation Objective (mg/m^3)***
Benzene	*51 (estimated)*	*1.7*

Bromodichloromethane	*<540 (MDL)*	*0.57*
Bromoform	*<840 (MDL)*	*71*
Bromomethane	*<3,100 (MDL)*	*25*
1,3-Butadiene	*<180 (MDL)*	*0.39*
Carbon Tetrachloride	*<510 (MDL)*	*2.5*
Chlorobenzene	*<370 (MDL)*	*350*
Chloroform	*<400 (MDL)*	*0.49*
Chloromethane	*<1,700 (MDL)*	*380*
alpha-Chlorotoluene	*<420 (MDL)*	*0.38*
1,2-Dibromoethane	*<620 (MDL)*	*0.045*
1,4-Dichlorobenzene	*<490 (MDL)*	*1.6*
1,2-Dichloroethane	*<330 (MDL)*	*4.3*
1,2-Dichloropropane	*<370 (MDL)*	*4.1*
1,2-Dichloropropylene (cis+trans)	*<370 (MDL)*	*4.7*
1,4-Dioxane	*<1,200 (MDL)*	*0.98*
Ethylbenzene	*<350 (MDL)*	*6.3*
Hexachlorobutadiene	*<3,400 (MDL)*	*2.0*
2-Hexanone	*<1,300*	*210*
1,1,2,2-Tetrachloroethane	*<560 (MDL)*	*0.41*
Tetrachloroethylene	*<550 (MDL)*	*63*
1,2,4-Trichlorobenzene	*<2,400 (MDL)*	*34*
1,1,2-Trichloroethane	*<440 (MDL)*	*1.3*
Trichloroethylene	*<440 (MDL)*	*3.6*
Vinyl Chloride	*<210 (MDL)*	*1.3*

SOPUS Response:

The comment is acknowledged. Method Detection Limits (MDLs - the results of a statistical calculation) have not been provided; however, reporting limits (RLs – the limit of detection of a specific target analyte for a specific sample after adjustments are made for dilutions or percent moisture) are provided by the laboratory and were included in the original Tier 3 submittals. Therefore, AECOM is interpreting that "reporting limit" was meant in place of "method detection limit."

VMP-2 is located in the alley between East 3rd and East 2nd Streets at Chaffer Avenue and consists of four ports located at 5-ft, 8.5-ft, 22-ft and 42-ft bgs. The properties immediately surrounding VMP-2 have foundations consisting of primarily of concrete basements; one nearby residence has a concrete basement and soil crawl space. Groundwater in the vicinity of VMP-2 has been approximately 34 to 42 feet bgs from 2011 to present; therefore, the 42-ft bgs port at VMP-2 is often submerged and unable to be sampled. Considering the foundation construction of the surrounding residences, the appropriate depth of analytical data to consider at VMP-2 is that from the 5-ft and 8.5-ft bgs ports. Evaluation of the analytical data (1Q15 through 1Q21) from the 5-ft port and 8.5-ft ports at VMP-2 exhibits no analytical results in exceedance of the recalculated ROs with one exception (an exceedance of ethylbenzene was observed in the 5-ft bgs port in 1Q15 [0.79 mg/m^3 detected vs 0.61 mg/m^3 recalculated RO]). Refer to **Table 5** for the evaluation of analytical

results vs the recalculated ROs at VMP-2. VMP-2 is also not located near any groundwater exceedances of the groundwater remediation objective for the indoor inhalation exposure route.

Most of the chemicals listed in IEPA Comment 12 are not COPCs for this Site based on the modeling information provided in the original Tier 3 Demonstration submittal. Benzene and ethylbenzene are the chemicals listed in IEPA Comment 12 that are also included in the COPCs for this site (refer to discussion in response to IEPA Comment 8 for more information on the COPCs for this Site).

Given the information provided above, it is requested that VMP-2 be removed from consideration for establishment of the proposed Tier 3 ROs.

IEPA Comment 13:

In addition to the above noted method detection limit exceedances for 1,2-Dibromoethane, analyses results for the chemical demonstrates method detection limit exceedances of the applicable residential soil gas indoor inhalation remediation objectives. Due to the number of locations where the method detection limits exceed the applicable remediation objectives, the below table provides the indoor inhalation remediation objective that the method detection limit must meet at the specified soil gas
sample depths:

Soil Gas Sample Depth (feet bgs)	***1,2-Dibromoethane Soil Gas R.O. (mg/m^3)***
8.5	*0.0025*
9.5	*0.0037*
10	*0.0043*
11.5	*0.0062*
12	*0.0069*
12.5	*0.0075*
13.5	*0.0088*
23.5	*0.021*

SOPUS Response:

The comment is acknowledged. Method Detection Limits (MDLs - the results of a statistical calculation) have not been provided; however, reporting limits (RLs – the limit of detection of a specific target analyte for a specific sample after adjustments are made for dilutions or percent moisture) are provided by the laboratory and were included in the original Tier 3 submittals. Therefore, AECOM is interpreting that "reporting limit" was meant in place of "method detection limit."

1,2-Dibromoethane has been estimated below the reporting limit (RL) 36 times and detected above the RL one time out of 6,983 total samples collected since the beginning of soil vapor sampling in Roxana in 2009 (0.13 mg/m^3 in August 2016 at VMP-50-30). RLs primarily ranged from 0.0077 to 0.012 mg/m^3 since 2009, with a few exceptions. The recalculated RO (based on IEPA comments 2-7 above) for 1,2-dibromoethane is 0.004 mg/m3.

Groundwater throughout the Village of Roxana has had sporadic detections of 1,2-dibromoethane during 1Q15 through 1Q21 with no exceedances (the Class 1 groundwater screening criteria is 0.00005 mg/L; the RLs range from 0.000019 mg/L to 0.000022 mg/L).

1,2-Dibromoethane has historically been used in pesticides. This compound volatilizes very easily. We have discussed the potential to achieve lower reporting limits for 1,2-dibromoethane with Eurofins (analytical laboratory used to analyze soil vapor samples).

Based on modeling information in conjunction with reviews of the historic analytical data presented in the original Tier 3 Demonstration submittal, a list of COPCs for the Roxana Site was developed (refer to the SOPUS Response to IEPA Comment 8 above). 1,2-Dibromoethane is not a COPC for this site.

Given the information provided above, it is requested that 1,2-dibromoethane be removed from consideration for soil vapor at the Roxana project site.

IEPA Comment 14:

The facility proposes to exclude the construction worker population indoor inhalation exposure route using a "trench" scenario, in place of a building. The Illinois EPA wishes to clarify construction worker populations are not subject to the exclusion of the indoor inhalation route. In addition, 35 Ill. Adm. Code 742.200 defines a "building" as a man-made structure with an enclosing roof and enclosing walls (except for windows and doors) that is fit for any human occupancy for at least six consecutive months. The proposed trench in the scenario does not meet the definition of a building pursuant to Section 742.200.

SOPUS Response:

The comment is acknowledged. For the construction worker scenario, the ingestion and dermal contact exposure pathways are managed through controls such as safe work plans. Construction worker is not anticipated as a potential receptor for the indoor inhalation exposure pathway, as the Village of Roxana is an established neighborhood with homes and other infrastructure already in place. As such, construction worker Tier 3 ROs have not been recalculated and are no longer proposed.

IEPA Comment 15:

RCRA corrective action activities carried out at the Equilon facility including off-site activities as necessary must meet the requirements of: (1) 35 Ill. Admin. Code 724.201; (2) the facility's RCRA permit; and (3) Illinois EPA letters regarding such activities.

SOPUS Response:

The comment is acknowledged.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					**1,000,000**	**0.11**	**10,000**	**67**	**26**	**0.07**	**0.00065**	**0.0035**	**0.054**	**3,500**	**0.12**	**0.37**	**2.7**	**1,900**	**0.075**	**0.091**	**530**	**0.028**	**38**	**40**	**30**
Location	**Sample ID**	**Sample Date**	**Screened Interval (ft btoc)**	**Depth to Water (ft btoc)**	**Analytical Results (mg/L)**																				
MW-01	MW1-ROX-040618	4/6/2018	48.80 - 58.80	40.82	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-070618	7/6/2018		41.40	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-101018	10/10/2018		41.17	<0.025	**0.0018**	<0.05	<0.001	<0.001	<0.001	<0.0001	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.001	<0.001	<0.001	<0.002	<0.001	<0.003
	MW1-ROX-010819	1/8/2019		40.96	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000032	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-041119	4/11/2019		40.50	<0.025 UJ	**0.00045 J**	<0.025 UJ	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-071119	7/11/2019		38.16	<0.025	**0.00044 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-101119	10/11/2019		35.72	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-010920	1/9/2020		37.09	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-040920	4/9/2020		36.54	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-071320	7/13/2020		35.52	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-100920	10/9/2020		36.06	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.0011**	<0.001	<0.001	<0.001	<0.001	**0.0014**	<0.001	**0.0036 J**	**0.0017 J**	**0.0053 J**
	MW1-ROX-011221	1/12/2021		37.37	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW1-ROX-041321	4/13/2021		37.72	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-02	MW2-ROX-040918	4/9/2018	49.87 - 59.87	42.1	**0.029**	**0.0016**	**0.019 J**	<0.001	<0.001	**0.0021**	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.22**	**0.026**	<0.001	**0.036**	<0.001	**0.006**	<0.001	**0.12**	**0.0094**	**0.13**
	MW2-ROX-071018	7/10/2018		42.59	<0.025	**0.007**	**0.0095 J**	**0.00093 J**	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.077**	**0.052**	<0.001	**0.01**	<0.001	**0.008**	<0.001	**0.028**	**0.0031 J**	**0.031**
	MW2-ROX-101218	10/12/2018		42.71	**0.021 J**	**0.0044**	**0.0099 J**	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.11**	**0.035**	<0.001	**0.011**	<0.001	**0.0049**	<0.001	**0.045 J**	**0.0053**	**0.05**
	MW2-ROX-101218-DUP	10/12/2018		42.71	**0.017 J**	**0.0045**	**0.0095 J**	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.13**	**0.035**	<0.001	**0.013**	<0.001	**0.0054**	<0.001	**0.058 J**	**0.0067**	**0.065**
	MW2-ROX-010819	1/8/2019		42.43	<0.05	**0.0032**	**0.02 J**	<0.002	<0.002	<0.002	<0.000031	<0.000021	<0.002	<0.002	<0.002	**0.22**	**0.061**	<0.002	**0.023**	<0.002	**0.0089**	<0.002	**0.1**	**0.0096 J**	**0.11**
	MW2-ROX-010819-DUP	1/8/2019		42.43	<0.05	**0.0032**	**0.026 J**	<0.002	<0.002	<0.002	<0.000031	<0.000021	<0.002	<0.002	<0.002	**0.21**	**0.061**	<0.002	**0.023**	<0.002	**0.0085**	<0.002	**0.092**	**0.0091 J**	**0.1**
	MW2-ROX-041619	4/16/2019		41.8	<0.13	<0.005	<0.13	<0.005	<0.005	<0.005	<0.00003	<0.00002	<0.005	<0.005	<0.005	**0.64**	**0.042**	<0.005	**0.041**	<0.005	**0.0068**	<0.005	**0.38**	**0.032**	**0.41**
	MW2-ROX-070919	7/9/2019		37.86	<0.13	<0.005	<0.13	<0.005	<0.005	<0.005	<0.000031	<0.000021	<0.005	<0.005	<0.005	**1.2**	**0.074**	<0.005	**0.064**	<0.005	**0.0092**	<0.005	**0.78**	**0.063**	**0.84**
	MW2-ROX-101019	10/10/2019		36.99	<0.13	<0.005	<0.13	<0.005	<0.005	<0.005	<0.00003	<0.00002	<0.005	<0.005	<0.005	**0.63**	**0.06**	<0.005	**0.065**	<0.005	**0.0084**	<0.005	**0.38**	**0.035**	**0.42**
	MW2-ROX-010920	1/9/2020		38.52	<0.05	<0.002	<0.05	<0.002	<0.002	<0.002	<0.00003	<0.00002	<0.002	<0.002	<0.002	**0.21**	**0.034**	<0.002	**0.02**	<0.002	**0.0063**	<0.002	**0.11**	**0.013**	**0.13**
	MW2-ROX-040820	4/8/2020		37.69	<0.13	**0.0032 J**	<0.13	<0.005	<0.005	<0.005	<0.000029	<0.000019	<0.005	<0.005	<0.005	**0.77**	**0.043**	<0.005	**0.06**	<0.005	**0.014**	<0.005	**0.47**	**0.042**	**0.51**
	MW2-ROX-071520	7/15/2020		36.85	<0.025	**0.0015**	<0.025	<0.001	<0.001	<0.001	<0.000032	<0.000021	<0.001	<0.001	<0.001	**0.039**	**0.051**	<0.001	**0.0095**	<0.001	**0.0069**	<0.001	**0.016**	**0.0023 J**	**0.019**
	MW2-ROX-101620	10/16/2020		37.48	<0.025	**0.0035**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	**0.11**	**0.074**	<0.001	**0.017**	<0.001	**0.0085**	<0.001	**0.047**	**0.0061**	**0.053**
	MW2-ROX-011421	1/14/2021		38.43	<0.025	**0.0028**	**0.0084 J**	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	**0.12 F1 J**	**0.066 F1 J**	<0.001	**0.02**	<0.001	**0.0083**	<0.001	**0.057 F1 J**	**0.0062**	**0.063**
	MW2-ROX-041521	4/15/2021		38.86	<0.05	**0.0012 J**	<0.05	<0.002	<0.002	<0.002	<0.000029	<0.000019	<0.002	<0.002	<0.002	**0.095**	**0.023**	<0.002	**0.0099**	<0.002	**0.0031**	<0.002	**0.045**	**0.0047 J**	**0.049**
	MW2-ROX-041521-DUP	4/15/2021		38.86	<0.05	<0.002	<0.05	<0.002	<0.002	<0.002	<0.00003	<0.00002	<0.002	<0.002	<0.002	**0.09**	**0.022**	<0.002	**0.009**	<0.002	**0.0033**	<0.002	**0.041**	**0.0048 J**	**0.046**
MW-03	MW3-ROX-040518	4/5/2018	34.67 - 44.67	27.98	**0.01 J**	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	**0.0028**	**0.0027**	<0.001	<0.001	**0.00095 J**	<0.001	**0.005**	**0.00081 J**	**0.0058 J**
	MW3-ROX-070618	7/6/2018		28.30	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.004**	<0.001	<0.001	<0.001	**0.0019**	<0.001	**0.011**	**0.0016 J**	**0.012**
	MW3-ROX-100518	10/5/2018		28.18	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.0022**	**0.0019**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW3-ROX-010919	1/9/2019		28.05	<0.025 UJ	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.0023**	<0.001	<0.001	<0.001	**0.0027**	<0.001	**0.01**	**0.0011 J**	**0.011**
	MW3-ROX-040919	4/9/2019		27.50	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.00056 J**	<0.001	<0.005	<0.005	<0.01
	MW3-ROX-071019	7/10/2019		22.66	<0.025	**0.0011**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	**0.0037**	**0.013**	<0.001	<0.001	<0.001	**0.014**	<0.001	**0.024**	**0.0022 J**	**0.026**
	MW3-ROX-101419	10/14/2019		22.66	<0.025	**0.00039 J**	<0.025	**0.00088 J**	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.0029**	**0.005**	<0.001	<0.001	<0.001	**0.0038**	<0.001	**0.0069**	<0.005	**0.0073 J**
	MW3-ROX-011020	1/10/2020		24.02	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.006**	<0.001	<0.001	<0.001	**0.001**	<0.001	**0.0019 J**	<0.005	**0.0019 J**
	MW3-ROX-040820	4/8/2020		23.42	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	**0.0033**	<0.001	<0.001	<0.001	**0.0012**	<0.001	**0.0023 J**	<0.005	**0.0026 J**
	MW3-ROX-071420	7/14/2020		22.48	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	**0.0026**	<0.001	<0.001	<0.001	**0.0013**	<0.001	**0.0044 J**	**0.0006 J**	**0.005 J**
	MW3-ROX-101520	10/15/2020		23.53	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW3-ROX-010821	1/8/2021		24.71	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW3-ROX-041321	4/13/2021		24.93	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.00063 J**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					1,000,000	0.11	10,000	67	26	0.07	0.00065	0.0035	0.054	3,500	0.12	0.37	2.7	1,900	0.075	0.091	530	0.028	38	40	30
Location	**Sample ID**	**Sample Date**	**Screened Interval (ft btoc)**	**Depth to Water (ft btoc)**	**Analytical Results (mg/L)**																			
MW-04	MW4-ROX-040918	4/9/2018	45.06 - 55.06	39.32	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0036**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-071018	7/10/2018		39.60	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0039**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-100818	10/8/2018		39.61	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0032**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-010719	1/7/2019		39.22	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0042**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-040819	4/8/2019		38.97	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0031**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-070819	7/8/2019		34.47	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0033**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-100819	10/8/2019		34.07	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-010620	1/6/2020		35.54	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-040620	4/6/2020		34.92	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000037	<0.000025	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-070820	7/8/2020		33.88	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.00084 J**	<0.001	<0.001	**0.00047 J**	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-101220	10/12/2020		34.49	<0.025	**0.00041 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0019**	<0.001	<0.001	**0.00047 J**	<0.001	<0.005	**0.00067 J**	**0.0021 J**
	MW4-ROX-011821	1/18/2021		35.93	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW4-ROX-041921	4/19/2021		35.83	<0.025	**0.00059 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0021**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-05	MW5-ROX-040918	4/9/2018	33.97 - 43.97	27.78	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0011**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-071018	7/10/2018		27.87	<0.025	**0.00091 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0023**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-101218	10/12/2018		27.95	<0.025	**0.0019**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-010819	1/8/2019		27.65	<0.025	**0.0022**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-041519	4/15/2019		26.96	<0.025	**0.0033**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0024**	<0.001	<0.001	<0.001	**0.00075 J**	<0.005	<0.005	<0.01
	MW5-ROX-071219	7/12/2019		22.37	**0.074**	**0.01**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.0068**	**0.0027**	**0.0028**	<0.001	<0.001	**0.0066**	<0.001	**0.012**	**0.002 J**	**0.014**
	MW5-ROX-101519	10/15/2019		22.23	<0.025	**0.0044**	<0.025	**0.00059 J**	<0.001	**0.0017**	<0.000029	<0.000019	<0.001	**0.00052 J**	<0.001	<0.001	**0.0023**	**0.0032**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-010620	1/6/2020		23.68	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	**0.00071 J**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-041320	4/13/2020		23.11	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-071420	7/14/2020		22.18	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0015**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-101420	10/14/2020		23.10	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0019**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-011121	1/11/2021		24.48	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.002**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW5-ROX-041421	4/14/2021		24.53	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000018	<0.001	<0.001	<0.001	<0.001	<0.001	**0.002**	<0.001	<0.001	**0.00065 J**	<0.001	<0.005	<0.005	<0.01

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																			
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					1,000,000	0.11	10,000	67	26	0.07	0.00065	0.0035	0.054	3,500	0.12	0.37	2.7	1,900	0.075	0.091	530	0.028	38	40	30
Location	Sample ID	Sample Date	Screened Interval (ft btoc)	Depth to Water (ft btoc)	Analytical Results (mg/L)																			
MW-07	MW7-ROX-040918	4/9/2018	42.92 - 52.92	41.38	<25	**780**	<25	<1	<1	<1	**0.000049**	<0.00002	<1	<1	<1	<1	<1	<1	<1	<1	**0.8 J**	<1	<5	<5	<10
	MW7-ROX-040918-DUP	4/9/2018		41.38	<25	**770**	<25	<1	<1	<1	**0.000056**	<0.00002	<1	<1	<1	<1	<1	<1	<1	<1	**0.96 J**	<1	<5	<5	<10
	MW7-ROX-071018	7/10/2018		41.64	<250	**1900**	<250	<10	<10	<10	<0.000029	<0.000019	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<50	<50	<100
	MW7-ROX-071018-DUP	7/10/2018		41.64	<250	**1700**	<250	<10	<10	<10	<0.000031	<0.00002	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<50	<50	<100
	MW7-ROX-100818	10/8/2018		41.69	<63	**650**	<63	<2.5	<2.5	<2.5	<0.000032	<0.000021	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<13	<13	<25
	MW7-ROX-010719	1/7/2019		41.25	<130	**650**	<130	<5	<5	<5	<0.000031	<0.000021	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<25	<25	<50
	MW7-ROX-040819	4/8/2019		40.94	<250	**1000**	<250	<10	<10	<10	<0.00003	<0.00002	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<50	<50	<100
	MW7-ROX-040819-DUP	4/8/2019		40.94	<250	**1000**	<250	<10	<10	<10	<0.00003	<0.00002	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<50	<50	<100
	MW7-ROX-070819	7/8/2019		36.58	<25	**1300**	<25	<1	<1	<1	<0.000031	<0.00002	<1	<1	<1	**0.52 J**	<1	<1	<1	<1	**1.5**	<1	<5	<5	<10
	MW7-ROX-070819-DUP	7/8/2019		36.58	<25	**1400**	<25	<1	<1	<1	<0.000029	<0.000019	<1	<1	<1	<1	<1	<1	<1	<1	**1.5**	<1	<5	<5	<10
	MW7-ROX-100819	10/8/2019		36.1	<130	**1700**	<130	<5	<5	<5	<0.00003	<0.00002	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<25	<25	<50
	MW7-ROX-100819-DUP	10/8/2019		36.1	<130	**1600**	<130	<5	<5	<5	<0.000029	<0.000019	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<25	<25	<50
	MW7-ROX-010620	1/6/2020		37.6	<130	**800**	<130	<5	<5	<5	<0.000032	<0.000021	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<25	<25	<50
	MW7-ROX-010620-DUP	1/6/2020		37.6	<130	**750**	<130	<5	<5	<5	<0.000034	<0.000023	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<25	<25	<50
	MW7-ROX-040620	4/6/2020		36.84	<25 UJ	**700**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.000033 UJ	<0.000022 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-040620-DUP	4/6/2020		36.84	<25 UJ	**700**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.000036 UJ	<0.000024 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-070920	7/9/2020		35.98	<25 UJ	**640**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.000029 UJ	<0.000019 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-070920-DUP	7/9/2020		35.98	<25 UJ	**650**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.000029 UJ	<0.000019 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-101220	10/12/2020		36.63	<25 UJ	**1400**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.000031 UJ	<0.00002 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-101220-DUP	10/12/2020		36.63	<25 UJ	**1400**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.00003 UJ	<0.00002 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-011821	1/18/2021		37.96	<250	**2000**	<250	<10	<10	<10	<0.000031	<0.000021	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<50	<50	<100
	MW7-ROX-011821-DUP	1/18/2021		37.96	<250	**2200**	<250	<10	<10	<10	<0.000031	<0.000021	<10	<10	<10	<10	<10	<10	<10	<10	<10	<10	<50	<50	<100
	MW7-ROX-041921	4/19/2021		37.81	<25 UJ	**640**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.00003 UJ	<0.00002 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
	MW7-ROX-041921-DUP	4/19/2021		37.81	<25 UJ	**530**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.00003 UJ	<0.00002 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ
MW-08	MW8-ROX-040918	4/9/2018	33.60 - 43.60	32.27	<25	**510**	<25	<1	<1	<1	<0.00003	<0.00002	<1	<1	<1	<1	<1	<1	<1	<1	<1	<1	<5	<5	<10
	MW8-ROX-071018	7/10/2018		32.42	<130	**840**	<130	<5	<5	<5	<0.00003	<0.00002	<5	<5	<5	<5	<5	<5	<5	<5	<5	<5	<25	<25	<50
	MW8-ROX-100818	10/8/2018		32.45	<63	**550**	<63	<2.5	<2.5	<2.5	<0.00003	<0.00002	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<13	<13	<25
	MW8-ROX-100818-DUP	10/8/2018		32.45	<63	**560**	<63	<2.5	<2.5	<2.5	<0.000031	<0.000021	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<13	<13	<25
	MW8-ROX-010719	1/7/2019		32.04	<50	**420**	<50	<2	<2	<2	<0.00003	<0.00002	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<10	<10	<20
	MW8-ROX-010719-DUP	1/7/2019		32.04	<50	**450**	<50	<2	<2	<2	<0.000029	<0.00002	<2	<2	<2	<2	<2	<2	<2	<2	<2	<2	<10	<10	<20
	MW8-ROX-040819	4/8/2019		31.7	<63	**550**	<63	<2.5	<2.5	<2.5	<0.00003	<0.00002	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<2.5	<13	<13	<25
	MW8-ROX-070819	7/8/2019		27.15	<13	**280**	<13	<0.5	<0.5	<0.5	<0.00003	<0.00002	<0.5	<0.5	<0.5	**0.54**	<0.5	<0.5	<0.5	<0.5	**0.48 J**	<0.5	<2.5	<2.5	**0.89 J**
	MW8-ROX-100819	10/8/2019		26.91	<13	**110**	<13	<0.5	<0.5	<0.5	<0.000029	<0.000019	<0.5	<0.5	<0.5	**0.4 J**	<0.5	<0.5	**1.2**	<0.5	**0.29 J**	<0.5	<2.5	**0.38 J**	**1 J**
	MW8-ROX-010620	1/6/2020		28.35	<5	**42**	<5	<0.2	<0.2	<0.2	<0.000034	<0.000022	<0.2	<0.2	<0.2	**0.19 J**	<0.2	<0.2	<0.2	<0.2	**0.1 J**	<0.2	<1	**0.13 J**	**0.44 J**
	MW8-ROX-040620	4/6/2020		27.7	<5	**49**	<5	<0.2	<0.2	<0.2	<0.000041	<0.000028	<0.2	<0.2	<0.2	**0.31**	<0.2	<0.2	<0.2	<0.2	<0.2	<0.2	<1	**0.18 J**	**0.49 J**
	MW8-ROX-070920	7/9/2020		26.69	<2.5	**33**	<2.5	<0.1	<0.1	<0.1	<0.000029	<0.00002	<0.1	<0.1	<0.1	**0.07 J**	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.5	<0.5	<1
	MW8-ROX-101220	10/12/2020		27.54	<13	**130**	<13	<0.5	<0.5	<0.5	<0.00003	<0.00002	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<2.5	<2.5	<5
	MW8-ROX-011821	1/18/2021		28.95	<2.5	**29**	<2.5	<0.1	<0.1	<0.1	<0.00003	<0.00002	<0.1	<0.1	<0.1	**0.056 J**	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.5	<0.5	<1
	MW8-ROX-041921	4/19/2021		28.71	<25 UJ	**290**	<25 UJ	<1 UJ	<1 UJ	<1 UJ	<0.00003 UJ	<0.00002 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<1 UJ	<5 UJ	<5 UJ	<10 UJ

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					1,000,000	0.11	10,000	67	26	0.07	0.00065	0.0035	0.054	3,500	0.12	0.37	2.7	1,900	0.075	0.091	530	0.028	38	40	30
Location	Sample ID	Sample Date	Screened Interval (ft btoc)	Depth to Water (ft btoc)	Analytical Results (mg/L)																			
MW-09	MW9-ROX-040618	4/6/2018	46.04 - 56.04	42.29	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-070918	7/9/2018		42.82	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-101018	10/10/2018		42.88	<0.025	**0.00024 J**	<0.05	<0.001	<0.001	<0.001	<0.000099	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.001	<0.001	<0.001	<0.002	<0.001	<0.003
	MW9-ROX-011419	1/14/2019		42.97	<0.025	**0.00063 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-011419-DUP	1/14/2019		42.97	<0.025	**0.00053 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-041119	4/11/2019		42.54	<0.025	**0.00091 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-071019	7/10/2019		38.74	<0.025	**0.0027 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-071019-DUP	7/10/2019		38.74	<0.025	**0.00065 J J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-101419	10/14/2019		38.08	<0.025	**0.00082 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-011320	1/13/2020		38.95	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-011320-DUP	1/13/2020		38.95	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-041020	4/10/2020		38.51	<0.025	**0.0049**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-071720	7/17/2020		37.25	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-100920	10/9/2020		37.43	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0006 J**	<0.001	<0.005	**0.00075 J**	**0.0022 J**
	MW9-ROX-011221	1/12/2021		38.79	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW9-ROX-040821	4/8/2021		39.23	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-10	MW10-ROX-040518	4/5/2018	44.43 - 54.43	41.94	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-070918	7/9/2018		42.88	**0.033**	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-101018	10/10/2018		42.87	<0.025	<0.001	<0.05	<0.001	<0.001	<0.001	<0.0001	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.001	<0.001	<0.001	<0.002	<0.001	<0.003
	MW10-ROX-011119	1/11/2019		43.06	<0.025	**0.00047 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-042219	4/22/2019		42.54	<0.025 UJ	**0.0012**	<0.025 UJ	**0.0012**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-071219	7/12/2019		39.33	<0.025	**0.00065 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-101419	10/14/2019		38.40	<0.025 UJ	**0.00046 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-011020	1/10/2020		39.05	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-041020	4/10/2020		38.59	<0.025	**0.0036**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-071520	7/15/2020		37.15	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000033	<0.000022	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW10-ROX-100920	10/9/2020		37.26	**0.012 J**	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.00051 J**	<0.001	<0.005	**0.0007 J**	**0.0022 J**
	MW10-ROX-011221	1/12/2021		35.88	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001 UJ	<0.001 UJ	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005 UJ	<0.005 UJ	<0.01 UJ
	MW10-ROX-040821	4/8/2021		38.97	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-11	MW11-ROX-040618	4/6/2018	41.66 - 51.66	39.98	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-070918	7/9/2018		40.54	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-101118	10/11/2018		40.65	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-011019	1/10/2019		40.45	<0.025	**0.00044 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-041119	4/11/2019		40.03	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-070919	7/9/2019		35.95	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-100419	10/4/2019		35.36	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-010720	1/7/2020		36.45	<0.025	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000032	<0.000022	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-040920	4/9/2020		36.02	**0.013 J**	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-071720	7/17/2020		34.82	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-100920	10/9/2020		35.17	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.00082 J**	<0.001	<0.001	<0.001	<0.001	**0.00093 J**	<0.001	**0.0029 J**	**0.0014 J**	**0.0043 J**
	MW11-ROX-011321	1/13/2021		36.45	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW11-ROX-041221	4/12/2021		36.96	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					**1,000,000**	**0.11**	**10,000**	**67**	**26**	**0.07**	**0.00065**	**0.0035**	**0.054**	**3,500**	**0.12**	**0.37**	**2.7**	**1,900**	**0.075**	**0.091**	**530**	**0.028**	**38**	**40**	**30**
Location	**Sample ID**	**Sample Date**	**Screened Interval (ft btoc)**	**Depth to Water (ft btoc)**	**Analytical Results (mg/L)**																				
MW-12	MW12-ROX-040518	4/5/2018	41.92 - 51.92	40.50	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-040518-DUP	4/5/2018		40.50	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-070618	7/6/2018		41.03	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-101018	10/10/2018		40.84	<0.025	<0.001	<0.05	<0.001	<0.001	<0.001	<0.0001	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.001	<0.001	<0.002	<0.001	<0.003
	MW12-ROX-010919	1/9/2019		40.78	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-040919	4/9/2019		40.42	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-071019	7/10/2019		35.87	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-100419	10/4/2019		35.49	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-010720	1/7/2020		36.78	<0.025	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000036	<0.000024	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-040820	4/8/2020		36.20	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-071020	7/10/2020		35.19	<0.025	<0.001	<0.025	<0.001	**0.00079 J**	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-101520	10/15/2020		35.68	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-010721	1/7/2021		37.08	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000032	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW12-ROX-041221	4/12/2021		37.37	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-16	MW16-ROX-040618	4/6/2018	37.50 - 47.50	41.54	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-070618	7/6/2018		42.35	**0.01 J F2**	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-100518	10/5/2018		42.24	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-011119	1/11/2019		42.10	<0.025	**0.00078 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-041219	4/12/2019		41.74	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-070919	7/9/2019		37.55	<0.025	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-100719	10/7/2019		36.86	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-010920	1/9/2020		38.16	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-041320	4/13/2020		37.64	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-071320	7/13/2020		36.49	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-101420	10/14/2020		36.72	<0.025	**0.00058 J**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	**0.00073 J**	**0.0019 J**
	MW16-ROX-011321	1/13/2021		38.04	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW16-ROX-040821	4/8/2021		38.35	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-22	MW22-ROX-041018	4/10/2018	38.43 - 48.43	NM	<0.5	**0.43**	<0.5	<0.02	<0.02	<0.02	<0.000029	<0.00002	<0.02	<0.02	<0.02	**1.8**	**0.052**	<0.02	**0.16**	<0.02	**0.28**	<0.02	**3.3**	**1**	**4.3**
	MW22-ROX-071018	7/10/2018		40.88	<0.63	**0.79**	<0.63	<0.025	<0.025	<0.025	<0.000029	<0.000019	<0.025	<0.025	<0.025	**2**	**0.057**	<0.025	**0.2**	<0.025	**0.41**	<0.025	**3.9**	**0.85**	**4.8**
	MW22-ROX-101518	10/15/2018		41.11	<0.25	**0.056**	<0.25	<0.01	<0.01	<0.01	<0.00003	<0.00002	<0.01	<0.01	<0.01	**1.5**	**0.066**	<0.01	**0.21**	<0.01	**0.13**	<0.01	**2.9**	**0.3**	**3.2**
	MW22-ROX-010919	1/9/2019		40.91	<0.63	**0.1**	<0.63	<0.025	<0.025	<0.025	<0.00003	**0.000022 p J**	<0.025	<0.025	<0.025	**1.3**	**0.056**	<0.025	**0.14**	<0.025	**0.071**	<0.025	**2.6**	**0.17**	**2.8**
	MW22-ROX-041719	4/17/2019		40.31	<0.63	**0.22**	<0.63	<0.025	<0.025	<0.025	<0.00003	<0.00002	<0.025	<0.025	<0.025	**2**	**0.081**	<0.025	**0.2**	<0.025	**0.15**	<0.025	**3.7**	**0.3**	**4**
	MW22-ROX-101519	10/15/2019		35.38	**0.013 J**	**0.0035**	**0.0046 J**	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	**0.25**	**0.011**	<0.001	**0.028**	<0.001	**0.0089**	<0.001	**0.16 J**	**0.014**	**0.18 J**
	MW22-ROX-101519-DUP	10/15/2019		35.38	**0.012 J**	**0.0039**	**0.0042 J**	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.3**	**0.01**	<0.001	**0.032**	<0.001	**0.0096**	<0.001	**0.29 J**	**0.02**	**0.31 J**
	MW22-ROX-010620	1/6/2020		36.83	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000032	<0.000021	<0.001	<0.001	<0.001	**0.016**	**0.00064 J**	<0.001	**0.0018**	<0.001	**0.00043 J**	<0.001	**0.0089**	**0.00099 J**	**0.0099 J**
	MW22-ROX-041520	4/15/2020		36.3	<0.025	**0.00092 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.053**	**0.0044**	<0.001	**0.012**	<0.001	**0.0019**	<0.001	**0.062**	**0.0037 J**	**0.066**
	MW22-ROX-071420	7/14/2020		35.11	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.0011**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW22-ROX-101520	10/15/2020		35.56	<0.025	**0.00042 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.015**	**0.0041**	<0.001	**0.0069**	<0.001	**0.00062 J**	<0.001	**0.019**	**0.0016 J**	**0.02**
	MW22-ROX-011321	1/13/2021		36.65	<0.025	**0.0073**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	**0.21**	**0.02**	<0.001	**0.049**	<0.001	**0.0068**	<0.001	**0.21**	**0.012**	**0.22**
	MW22-ROX-041521	4/15/2021		37.03	<0.13	**0.066**	<0.13	<0.005	<0.005	<0.005	<0.000029	<0.000019	<0.005	<0.005	<0.005	**0.53**	**0.032**	<0.005	**0.07**	<0.005	**0.045**	<0.005	**0.8**	**0.053**	**0.86**

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					1,000,000	0.11	10,000	67	26	0.07	0.00065	0.0035	0.054	3,500	0.12	0.37	2.7	1,900	0.075	0.091	530	0.028	38	40	30
Location	Sample ID	Sample Date	Screened Interval (ft btoc)	Depth to Water (ft btoc)	Analytical Results (mg/L)																				
MW-24	MW24-ROX-040618	4/6/2018	39.61 - 49.61	41.28	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-040618-DUP	4/6/2018		41.28	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000033	<0.000022	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-070618	7/6/2018		41.87	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-100518	10/5/2018		41.81	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-011019	1/10/2019		41.76	<0.025	**0.00088 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-041219	4/12/2019		41.33	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-070919	7/9/2019		37.04	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-100719	10/7/2019		36.56	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-010720	1/7/2020		37.67	<0.025	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000033	<0.000022	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-040920	4/9/2020		37.28	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-071020	7/10/2020		36.13	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-101320	10/13/2020		36.6	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	**0.0008 J**	**0.0023 J**
	MW24-ROX-011121	1/11/2021		37.88	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW24-ROX-041321	4/13/2021		38.31	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-25	MW25-ROX-040918	4/9/2018	35.59 - 45.59	36.49	<0.025	**0.02**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0022**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-071018	7/10/2018		36.71	<0.025	**0.005**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-100818	10/8/2018		36.73	<0.025	**0.0071**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-010719	1/7/2019		36.33	<0.025	**0.0023**	<0.025	**0.00068 J**	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.00099 J**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-040819	4/8/2019		36.03	<0.025	**0.017**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0023**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-070819	7/8/2019		31.52	<0.025	**0.016**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0024**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-100819	10/8/2019		31.18	<0.025	**0.044**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0041**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-010620	1/6/2020		32.63	<0.025	**0.028**	<0.025	<0.001	<0.001	<0.001	<0.000035	<0.000023	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-040620	4/6/2020		32.00	<0.025	**0.019**	<0.025	**0.0005 J**	<0.001	<0.001	<0.000041	<0.000027	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0012**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-070920	7/9/2020		30.98	<0.025	**0.0087**	<0.025	**0.00071 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0026**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-101220	10/12/2020		31.67	<0.025	**0.045**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0033**	<0.001	<0.001	**0.00056 J**	<0.001	<0.005	**0.00083 J**	**0.0022 J**
	MW25-ROX-011821	1/18/2021		33.11	<0.025	**0.044**	**0.005 J**	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.004**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-011821-DUP	1/18/2021		33.11	<0.025	**0.035**	**0.0026 J**	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0037**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW25-ROX-041921	4/19/2021		32.97	<0.025	**0.032**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-26	MW26-ROX-040518	4/5/2018	38.15 - 48.15	39.22	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-070618	7/6/2018		39.73	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-100918	10/9/2018		39.53	<0.025	<0.001	<0.05	<0.001	<0.001	<0.001	<0.0001	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.001	<0.001	<0.001	<0.002	<0.001	<0.003
	MW26-ROX-010919	1/9/2019		39.46	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-041019	4/10/2019		38.90	<0.025 UJ	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-071019	7/10/2019		34.54	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-100919	10/9/2019		33.99	<0.025 UJ	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-010920	1/9/2020		35.45	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-041020	4/10/2020		34.83	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-071420	7/14/2020		33.84	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-101520	10/15/2020		34.56	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-010821	1/8/2021		35.78	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW26-ROX-040921	4/9/2021		35.96	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																			
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					1,000,000	0.11	10,000	67	26	0.07	0.00065	0.0035	0.054	3,500	0.12	0.37	2.7	1,900	0.075	0.091	530	0.028	38	40	30
Location	Sample ID	Sample Date	Screened Interval (ft btoc)	Depth to Water (ft btoc)	Analytical Results (mg/L)																			
MW-27	MW27-ROX-040618	4/6/2018	39.79 - 49.79	40.34	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-070918	7/9/2018		41.16	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-100918	10/9/2018		41.06	<0.025	<0.001	<0.05	<0.001	<0.001	<0.001	<0.0001	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.00052 J**	<0.001	<0.001	<0.001	<0.002	<0.001	<0.003
	MW27-ROX-011119	1/11/2019		41.06	<0.025	**0.0014**	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-041519	4/15/2019		40.99	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-070919	7/9/2019		37.65	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-100319	10/3/2019		36.07	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-010720	1/7/2020		36.96	<0.025	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-041020	4/10/2020		36.82	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-071020	7/10/2020		35.76	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-101320	10/13/2020		35.55	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	**0.00061 J**	**0.0018 J**
	MW27-ROX-010821	1/8/2021		36.67	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW27-ROX-040821	4/8/2021		37.60	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
MW-28	MW28-ROX-040618	4/6/2018	33.61 - 43.61	39.25	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0041**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-070918	7/9/2018		40.08	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0016**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-101118	10/11/2018		40.25	<0.025	**0.0026**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.005**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-010819	1/8/2019		40.32	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0084**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-040919	4/9/2019		40.42	<0.025	**0.00083 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0096**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-071019	7/10/2019		37.14	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0048**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-100419	10/4/2019		35.90	<0.025	**0.00047 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.035**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-011020	1/10/2020		36.55	**0.014 J**	**0.0067**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	**0.0015**	<0.001	<0.001	**0.0023**	**0.079**	<0.001	<0.001	<0.001	<0.001	<0.005	**0.0048 J**	**0.0048 J**
	MW28-ROX-041620	4/16/2020		36.25	<0.025	**0.012**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	**0.0013**	<0.001	<0.001	**0.00095 J**	**0.05**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-071620	7/16/2020		35.06	<0.025	**0.098**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	**0.0017**	<0.001	<0.001	**0.0015**	**0.14**	<0.001	<0.001	**0.0016**	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-101920	10/19/2020		35.10	<0.025	**0.0052**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	**0.045**	**0.001**	<0.001	<0.001	<0.001	<0.005	**0.0007 J**	<0.01
	MW28-ROX-011421	1/14/2021		35.82	<0.025	**0.034**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.00054 J**	**0.027**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-041621	4/16/2021		36.69	<0.025	**0.004**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.0025**	**0.069**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	MW28-ROX-041621-DUP	4/16/2021		36.69	<0.025	**0.004**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	**0.0014**	**0.074**	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
P-54	P54-ROX-040618	4/6/2018	38.00 - 63.00	40.05	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-070618	7/6/2018		40.51	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-100518	10/5/2018		40.46	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-011019	1/10/2019		40.37	<0.025	**0.00065 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-041119	4/11/2019		39.91	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-070919	7/9/2019		35.60	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-100419	10/4/2019		35.22	<0.025 UJ	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-010720	1/7/2020		36.29	<0.025	<0.001	<0.025 UJ	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-040920	4/9/2020		35.94	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000033	<0.000022	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-071020	7/10/2020		34.76	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-101320	10/13/2020		35.36	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	**0.00061 J**	**0.0018 J**
	P54-ROX-011121	1/11/2021		36.68	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	P54-ROX-041321	4/13/2021		37.07	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					**1,000,000**	**0.11**	**10,000**	**67**	**26**	**0.07**	**0.00065**	**0.0035**	**0.054**	**3,500**	**0.12**	**0.37**	**2.7**	**1,900**	**0.075**	**0.091**	**530**	**0.028**	**38**	**40**	**30**
Location	**Sample ID**	**Sample Date**	**Screened Interval (ft btoc)**	**Depth to Water (ft btoc)**	**Analytical Results (mg/L)**																				
ROST-3-MW	ROST3MW-ROX-040618	4/6/2018	37.81 - 47.81	39.98	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000032	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-070518	7/5/2018		40.74	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-100918	10/9/2018		40.72	<0.025	<0.001	<0.05	<0.001	<0.001	<0.001	<0.0001	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.00093 J**	<0.001	<0.001	<0.001	<0.002	<0.001	<0.003
	ROST3MW-ROX-011019	1/10/2019		40.62	<0.025	**0.0007 J**	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX041219	4/12/2019		40.40	<0.025	**0.00047 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.0031**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.003 J**	**0.00073 J**	**0.0037 J**
	ROST3MW-ROX-071119	7/11/2019		36.38	<0.025	**0.0081**	**0.0034 J**	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.015**	**0.0021**	<0.001	**0.0045**	<0.001	**0.0021**	<0.001	**0.04**	**0.0057**	**0.046**
	ROST3MW-ROX-101419	10/14/2019		35.57	<0.025	<0.001	<0.025	**0.00062 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-010920	1/9/2020		36.56	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-041020	4/10/2020		36.33	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-071320	7/13/2020		34.98	<0.025	**0.0033**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.0028**	**0.0012**	<0.001	**0.0032**	<0.001	**0.00062 J**	<0.001	**0.0056**	**0.0021 J**	**0.0077 J**
	ROST3MW-ROX-101920	10/19/2020		35.35	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	**0.00067 J**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-010821	1/8/2021		36.49	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST3MW-ROX-041321	4/13/2021		37.08	<0.025	**0.00099 J**	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	**0.00063 J**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	**0.0016 J**
ROST-4-PZ(C)	ROST4PZC-ROX-040918	4/9/2018	34.95 - 44.95	40.13	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZC-ROX-070918	7/9/2018		40.87	<0.025	**0.0018**	<0.025	**0.00069 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.0011**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZC-ROX-101218	10/12/2018		40.91	**0.027**	**0.0085**	**0.0083 J**	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.061**	**0.0016**	<0.001	**0.031**	<0.001	**0.011**	<0.001	**0.055**	**0.00099 J**	**0.056**
	ROST4PZC-ROX-010919	1/9/2019		40.89	<0.025	**0.006**	<0.025	**0.0012**	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	**0.034**	**0.0029**	<0.001	**0.044**	<0.001	**0.0045**	<0.001	**0.058**	**0.0011 J**	**0.059**
	ROST4PZC-ROX-041619	4/16/2019		40.69	<0.025	**0.006**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.033**	**0.0033**	<0.001	**0.037**	<0.001	**0.0087**	<0.001	**0.073**	**0.0015 J**	**0.074**
	ROST4PZC-ROX-071219	7/12/2019		37.64	**0.38**	**0.0077**	<0.025	**0.00059 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.12**	**0.0064**	<0.001	**0.092**	<0.001	**0.014**	<0.001	**0.19**	<0.005	**0.19**
	ROST4PZC-ROX-101419	10/14/2019		35.97	<0.025	**0.0047**	**0.014 J**	**0.00051 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.038**	**0.0089**	<0.001	**0.064**	<0.001	**0.0071**	<0.001	**0.065**	**0.0041 J**	**0.069**
	ROST4PZC-ROX-010720	1/7/2020		36.95	<0.025	**0.0014**	<0.025 UJ	<0.001	<0.001	<0.001	<0.000032	<0.000021	<0.001	<0.001	<0.001	**0.017**	**0.0021**	<0.001	**0.022**	<0.001	**0.0023**	<0.001	**0.023**	**0.00093 J**	**0.024**
	ROST4PZC-ROX-041520	4/15/2020		36.71	<0.025	**0.0047**	**0.003 J**	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.047**	**0.006**	<0.001	**0.055**	<0.001	**0.0088**	<0.001	**0.086**	**0.0016 J**	**0.088**
	ROST4PZC-ROX-071520	7/15/2020		35.49	<0.025	**0.0046**	<0.025	**0.0014**	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	**0.033**	**0.0055**	<0.001	**0.063**	<0.001	**0.0084**	<0.001	**0.087**	**0.0014 J**	**0.088**
	ROST4PZC-ROX-071520-DUP	7/15/2020		35.49	<0.025	**0.0047**	<0.025	**0.00074 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.036**	**0.0061**	<0.001	**0.068**	<0.001	**0.0089**	<0.001	**0.095**	**0.0015 J**	**0.096**
	ROST4PZC-ROX-101920	10/19/2020		35.51	<0.025	**0.0039**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.022**	**0.0075**	<0.001	**0.055**	<0.001	**0.0091**	<0.001	**0.083**	**0.00092 J**	**0.084**
	ROST4PZC-ROX-011421	1/14/2021		36.44	<0.025	**0.0048**	<0.025	**0.00067 J**	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.016**	**0.0071**	<0.001	**0.089**	<0.001	**0.011**	<0.001	**0.13**	**0.0016 J**	**0.13**
	ROST4PZC-ROX-041521	4/15/2021		37.32	<0.05	**0.0017 J**	<0.05	<0.002	<0.002	<0.002	<0.000029	<0.000019	<0.002	<0.002	<0.002	**0.0014 J**	**0.0023**	<0.002	**0.018**	<0.002	**0.0025**	<0.002	**0.022**	**<0.01**	**0.022**
ROST-4-PZ(E)	ROST4PZE-ROX-040918	4/9/2018	34.75 - 44.75	38.93	**0.053**	**0.014**	**0.039**	<0.001	<0.001	<0.001	**0.000041 p**	<0.00002	<0.001	<0.001	<0.001	**0.0025**	**0.0018**	<0.001	**0.023**	<0.001	**0.0027**	<0.001	**0.041**	**0.015**	**0.056**
	ROST4PZE-ROX-071018	7/10/2018		39.52	<0.025	**0.011**	**0.036**	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	**0.0069**	**0.0023**	<0.001	**0.015**	<0.001	**0.0027**	<0.001	**0.03**	**0.013**	**0.044**
	ROST4PZE-ROX-101518	10/15/2018		39.76	<0.025 UJ	**0.0011**	<0.025 UJ	<0.001 UJ	<0.001 UJ	<0.001 UJ	<0.000031 UJ	<0.000021 UJ	<0.001 UJ	<0.001 UJ	<0.001 UJ	<0.001 UJ	<0.001 UJ	<0.001 UJ	**0.0015**	<0.001 UJ	<0.001 UJ	<0.001 UJ	**0.0028 J**	**0.0014 J**	**0.0042 J**
	ROST4PZE-ROX-010719	1/7/2019		39.72	<0.025	**0.0011**	**0.0065 J**	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.00051 J**	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZE-ROX-041219	4/12/2019		39.55	<0.025	**0.0038**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.0028**	<0.001	<0.001	**0.0027**	<0.001	**0.0011**	<0.001	**0.006**	**0.0014 J**	**0.0074 J**
	ROST4PZE-ROX-041219-DUP	4/12/2019		39.55	<0.025	**0.0035**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	**0.0021**	<0.001	<0.001	**0.0026**	<0.001	**0.00097 J**	<0.001	**0.0045 J**	**0.0011 J**	**0.0056 J**
	ROST4PZE-ROX-071219	7/12/2019		NM	**0.38**	**0.11**	**0.0099 J**	<0.001	<0.001	<0.001	<0.000033	<0.000022	<0.001	<0.001	<0.001	**0.13**	**0.0076**	<0.001	**0.094**	<0.001	**0.029**	<0.001	**0.21**	<0.005	**0.21**
	ROST4PZE-ROX-101519	10/15/2019		35.01	<0.025	**0.19**	<0.025	**0.00065 J**	**0.00057 J**	<0.001	<0.000027	<0.000018	<0.001	<0.001	<0.001	**0.52**	**0.017**	<0.001	**0.16**	<0.001	**0.058**	<0.001	**0.64**	**0.13**	**0.77**
	ROST4PZE-ROX-010720	1/7/2020		36.1	**0.047 J**	**0.037**	**0.034 J * J**	<0.002	<0.002	<0.002	<0.000038	<0.000025	<0.002	<0.002	<0.002	**0.19**	**0.0054**	<0.002	**0.12**	<0.002	**0.022**	<0.002	**0.29**	**0.033**	**0.32**
	ROST4PZE-ROX-041620	4/16/2020		35.9	<0.13	**0.088**	<0.13	**0.0025 J**	<0.005	<0.005	<0.000031	<0.000021	<0.005	**0.0039 J**	<0.005	**0.43**	**0.016**	<0.005	**0.14**	<0.005	**0.04**	<0.005	**0.47**	**0.074**	**0.55**
	ROST4PZE-ROX-071720	7/17/2020		34.73	<0.05	**0.097**	<0.05	<0.002	**0.001 J**	<0.002	<0.000038	<0.000025	<0.002	<0.002	<0.002	**0.39**	**0.017**	<0.002	**0.13**	<0.002	**0.034**	<0.002	**0.44**	**0.066**	**0.51**
	ROST4PZE-ROX-071720-DUP	7/17/2020		34.73	<0.05	**0.098**	<0.05	<0.002	<0.002	<0.002	<0.000034	<0.000023	<0.002	<0.002	<0.002	**0.39**	**0.016**	<0.002	**0.15**	<0.002	**0.035**	<0.002	**0.45**	**0.069**	**0.52**
	ROST4PZE-ROX-101920	10/19/2020		34.59	<0.13	**0.097**	<0.13	<0.005	<0.005	<0.005	<0.000032	<0.000021	<0.005	<0.005	<0.005	**0.41**	**0.015**	<0.005	**0.15**	<0.005	**0.042**	<0.005	**0.45**	**0.071**	**0.52**
	ROST4PZE-ROX-041621	4/16/2021		36.29	<0.13	**0.058**	<0.13	<0.005	<0.005	<0.005	<0.000031	<0.00002	<0.005	<0.005	<0.005	**0.43**	**0.017**	<0.005	**0.13**	<0.005	**0.038**	<0.005	**0.51**	**0.068**	**0.57**

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 1
SUMMARY OF GROUNDWATER MONITORING WELL ANALYTICAL DETECTIONS AND SCREENING

					VOCs																		
					Acetone	Benzene	2-Butanone	Carbon disulfide	Chlorobenzene	Chloroform	1,2-Dibromo-3-chloropropane (DBCP)	1,2-Dibromoethane	1,2-Dichloroethane	cis-1,2-Dichloroethene	1,2-Dichloropropane	Ethylbenzene	Isopropylbenzene (Cumene)	Methyl tert-Butyl Ether (MTBE)	Naphthalene	Tetrachloroethene	Toluene	Vinyl chloride	m,p-Xylenes	o-Xylenes	Xylenes (total)
GW Remediation Objectives for Indoor Inhalation Route (mg/L) [35 IAC 742 Appendix B Table H]					**1,000,000**	**0.11**	**10,000**	**67**	**26**	**0.07**	**0.00065**	**0.0035**	**0.054**	**3,500**	**0.12**	**0.37**	**2.7**	**1,900**	**0.075**	**0.091**	**530**	**0.028**	**38**	**40**	**30**
Location	**Sample ID**	**Sample Date**	**Screened Interval (ft btoc)**	**Depth to Water (ft btoc)**	**Analytical Results (mg/L)**																				
ROST-4-PZ(G)	ROST4PZG-ROX-040918	4/9/2018	34.28 - 44.28	40.07	<0.025	<0.001	<0.025	**0.00053 J**	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-070918	7/9/2018		40.81	<0.025	**0.0037**	<0.025	**0.00054 J**	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-101218	10/12/2018		40.93	<0.025	**0.0011**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-010719	1/7/2019		40.49	<0.025	**0.00041 J**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-041119	4/11/2019		40.35	<0.025	**0.00048 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-071219	7/12/2019		36.60	<0.025	<0.001	**0.005 J**	**0.0021**	<0.001	<0.001	<0.000029	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0014**	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-100719	10/7/2019		35.69	<0.025	**0.0006 J**	<0.025	**0.0037**	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0049**	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-011320	1/13/2020		37.07	<0.025	**0.00055 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0041**	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-041520	4/15/2020		36.28	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0025**	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-041520-DUP	4/15/2020		36.28	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	**0.0018**	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-071320	7/13/2020		35.09	**0.066**	**0.0007 J**	**0.05**	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	**0.00075 J**	**0.0011**	<0.001	<0.001	<0.001	**0.0015**	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-101620	10/16/2020		35.41	<0.025	**0.0018**	<0.025	<0.001	<0.001	<0.001	<0.000031	<0.000021	<0.001	<0.001	<0.001	**0.0056**	**0.0051**	<0.001	<0.001	<0.001	**0.0024**	<0.001	**0.0089**	**0.001 J**	**0.01**
	ROST4PZG-ROX-011321	1/13/2021		36.30	<0.025	**0.00038 J**	<0.025	<0.001	<0.001	<0.001	<0.00003	<0.00002	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-041521	4/15/2021		36.88	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000029	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01
	ROST4PZG-ROX-041521-DUP	4/15/2021		36.88	<0.025	<0.001	<0.025	<0.001	<0.001	<0.001	<0.000028	<0.000019	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.001	<0.005	<0.005	<0.01

NOTES:

1) Chemicals listed are those that are included on Table H and also in the project groundwater analyte list.

Indicates a historical exceedance of screening criteria.

Indicates a current exceedance of screening criteria.

LABORATORY QUALIFIERS

B = Target analyte was identified in the method blank, indicating possible lab contamination.
J = The analyte was detected below the reporting limit. Result is estimated.
H = Analyzed or extracted out of holding time criteria.
F1 = Indicates MS and/or MSD recovery is outside acceptance limit.
*+ = Indicates LCS and/or LCSD is outside acceptance limit, high biased
*1 = LCS/LCSD RPD is outside contol limit
<#.## Indicates the analyte was not detected above the given reporting limit.

AECOM QUALIFIERS

J = The result is estimated.
UJ = Estimated non-detect.
U = Result is non-detect.

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 2

VAPOR MONITORING LOCATIONS COMPARED TO FOUNDATION TYPE OF NEARBY RESIDENCE(S)

Nearest VMP	Nearest VMP primary depth[1]	Nearest VMP secondary depth[2]	Street	Address	Foundation Type	Foundation Wall Material (if applicable)	Foundation Floor Material (if applicable)	Additional Near VMP almost as close	Additional VMP primary depth[1]	Additional VMP secondary depth[2]
VMP-1	8.5	NA	2nd	146 E 2nd Street	basement	concrete	concrete	NA	NA	NA
VMP-1	8.5	NA	2nd	147 E 2nd Street	basement	concrete	concrete	VMP-47	10	NA
VMP-4	12.5	NA	4th	147 E 4th Street	*home demolished - SOPUS owned*			VMP-43	10	NA
VMP-4	12	5	5th	148 E 5th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	VMP-50	10	5
VMP-4	12	5	5th	150 E 5th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	VMP-50	10	5
VMP-5	12.5	5	5th	149 E 5th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	NA	NA	NA
VMP-6	5	NA	7th	150B E 7th Street	slab on grade	NA	concrete	NA	NA	NA
VMP-7	5	NA	7th	150A E 7th Street	slab on grade	NA	concrete	NA	NA	NA
VMP-7	13.5	NA	7th	151 E 7th Street	basement	concrete	concrete	VMP-9	11.5	NA
VMP-11	5	NA	8th	141 E 8th Street - Roxana Public Works - WWTP	slab on grade	NA	concrete	NA	NA	NA
VMP-17	5	NA	8th	149 E 8th Street - Roxana Public Works - MG	slab on grade	NA	concrete	VMP-11	5	NA
VMP-18	8.5	NA	8th	136 E 8th Street	basement	concrete	concrete	VMP-8	9.5	NA
VMP-18	8.5	NA	8th	140 E 8th Street	basement	brick	concrete	VMP-53	10	NA
VMP-20	10	NA	2nd	112 E 2nd Street	basement	concrete	concrete	NA	NA	NA
VMP-20	5	10	3rd	116 E 3rd Street	crawlspace	concrete	soil	NA	NA	NA
VMP-20	10	NA	3rd	130 E 3rd Street	basement	concrete	concrete	NA	NA	NA
VMP-21	10	NA	4th	100 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-21	10	NA	4th	106 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-22	10	NA	4th	111 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-22	10	NA	4th	125 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-22	10	NA	5th	112 E 5th Street	basement	concrete	concrete	NA	NA	NA
VMP-22	10	NA	5th	124 E 5th Street	basement	concrete	concrete	NA	NA	NA
VMP-23	10	NA	5th	111 E 5th Street	basement	concrete	concrete	NA	NA	NA
VMP-23	10	NA	6th	126 E 6th Street	basement	concrete	concrete	NA	NA	NA
VMP-23	10	NA	6th	128 E 6th Street	basement	concrete	concrete	VMP-51	10	NA
VMP-24	10	5	7th	118 E 7th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	NA	NA	NA
VMP-32	10	NA	4th	126 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-32	10	NA	4th	129 E 4th Street	basement	concrete	concrete	VMP-50	10	NA
VMP-32	10	NA	4th	132 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-32	10	NA	4th	133 E 4th Street	basement	concrete	concrete	NA	NA	NA

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 2

VAPOR MONITORING LOCATIONS COMPARED TO FOUNDATION TYPE OF NEARBY RESIDENCE(S)

Nearest VMP	Nearest VMP primary depth[1]	Nearest VMP secondary depth[2]	Street	Address	Foundation Type	Foundation Wall Material (if applicable)	Foundation Floor Material (if applicable)	Additional Near VMP almost as close	Additional VMP primary depth[1]	Additional VMP secondary depth[2]
VMP-32	10	NA	4th	136 E 4th Street	basement	concrete	concrete	NA	NA	NA
VMP-32	10	5	4th	140 E 4th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	NA	NA	NA
VMP-42	10	NA	3rd	142 E 3rd Street	basement	concrete	concrete	NA	NA	NA
VMP-42	10	NA	3rd	143 E 3rd Street Apt 3	basement	concrete	concrete	VMP-3	10	NA
VMP-43	10	NA	4th	145 E 4th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	VMP-50	10	5
VMP-45	10	NA	6th	142 E 6th Street	basement	concrete	concrete	VMP-51	10	NA
VMP-45	10	NA	6th	147 E 6th Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	VMP-6	10	5
VMP-45	10	NA	6th	148 E 6th Street	basement	concrete	concrete	NA	NA	NA
VMP-48	10	NA	2nd	139 E 2nd Street	basement	concrete	concrete	NA	NA	NA
VMP-48	10	5	2nd	143 E 2nd Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	VMP-1	8.5	5
VMP-49	10	5	3rd	137 E 3rd Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	NA	NA	NA
VMP-50	10	NA	5th	144 E 5th Street	basement	concrete	concrete	VMP-4	12	NA
VMP-51	10	NA	5th	139 E 5th Street	basement	concrete	concrete	NA	NA	NA
VMP-52	5	NA	6th	123 E 6th Street	slab on grade	NA	concrete	NA	NA	NA
VMP-52	5	NA	7th	146 E 7th Street	slab on grade	NA	concrete	NA	NA	NA
VMP-52	5	NA	7th	148 E 7th Street	slab on grade	NA	concrete	NA	NA	NA
VMP-53	10	NA	7th	139 E 7th Street	basement	concrete	concrete	VMP-24	10	NA
VMP-54	10	NA	7th	111 E 7th Street	basement	concrete	concrete	NA	NA	NA
VMP-54	10	NA	7th	115 E 7th Street	basement	concrete	concrete	VMP-8	9.5	NA
VMP-56	10	NA	4th	146 E 4th Street	*home demolished - SOPUS owned*			VMP-32	10	NA
VMP-56	10	NA	4th	150 E 4th Street	*home demolished - SOPUS owned*			VMP-43	10	NA
VMP-62	10	5	2nd	116 E 2nd Street	basement and crawlspace	concrete	concrete basement/ soil crawlspace	NA	NA	NA
VMP-62	10	NA	2nd	138 E 2nd Street	basement	concrete	concrete	NA	NA	NA

NOTES:

1) The "Primary depth" is the port that is within 3-5 ft below the bottom of lowest part of the foundation or the closest to that interval if there are no ports within 3-5 ft of foundation bottom.

2) The "Secondary depth" is the port that is within 3-5 ft below the bottom of crawlspace if the house has both basement & crawlspace, or the closest to that interval if there are no ports within 3-5 ft of crawlspace bottom.

SEE LAST PAGE OF TABLE FOR NOTES **TABLE 3**

SUMMARY OF VMP-50 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Chloroform		
				0.05		
				Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	5 ft	VMP-50-5-021015	2/10/2015	<0.0062	U	
		VMP-50-5-050515	5/5/2015	<0.0072	U	
		VMP-50-5-073015	7/30/2015	<0.007	U	
		VMP-50-5-110315	11/3/2015	<0.0056	U	
		VMP-50-5-020216	2/2/2016	<0.007	U	
		VMP-50-5-050316	5/3/2016	<0.0065	U	
		VMP-50-5-080216	8/2/2016	<0.0088	U	
		VMP-50-5-103116	10/31/2016	<0.011	U	
		VMP-50-5-020117	2/1/2017	<0.0062	U	
		VMP-50-5-050317	5/3/2017	<0.0053	U	
		VMP-50-5-072617	7/26/2017	<0.0062	U	
		VMP-50-5-110117	11/1/2017	<0.0054	U	
		VMP-50-5-013118	1/31/2018	**0.0018**	J	
		VMP-50-5-032918	3/29/2018	<0.0057	U	
		VMP-50-5-041018 [see note]	4/10/2018	<0.13	U	
		VMP-50-5-072618	7/26/2018	**0.035**		
		VMP-50-5-103018	10/30/2018	<0.0058	U	
		VMP-50-5-020519	2/5/2019	<0.006	U	
		VMP-50-5-042919	4/29/2019	<0.0058	U	
		VMP-50-5-073019	7/30/2019	<0.0057	U	
		VMP-50-5-102319	10/23/2019	<0.0058	U	
		VMP-50-5-012820	1/28/2020	<0.0067	U	
		VMP-50-5-042820	4/28/2020	<0.0065	U	
		VMP-50-5-072720	7/27/2020	<0.0062	U	
		VMP-50-5-110520	11/5/2020	**0.0026**	J	
		VMP-50-5-012621	1/26/2021	**0.00053**	J	

SEE LAST PAGE OF TABLE FOR NOTES **TABLE 3**

SUMMARY OF VMP-50 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Chloroform		
				0.05		
				Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50 (cont'd)	10 ft	VMP-50-10-021015	2/10/2015	**0.0033**	J	
		VMP-50-10-050515	5/5/2015	**0.0088**		
		VMP-50-10-073015	7/30/2015	**0.022**		
		VMP-50-10-110315	11/3/2015	**0.0096**		
		VMP-50-10-020216	2/2/2016	**0.0039**	J	
		VMP-50-10-050316	5/3/2016	**0.01**		
		VMP-50-10-082616	8/26/2016	**0.055**		
		VMP-50-10-103116	10/31/2016	**0.066**		
		VMP-50-10-020117	2/1/2017	**0.03**		
		VMP-50-10-050317	5/3/2017	**0.02**		
		VMP-50-10-072617	7/26/2017	**0.026**		
		VMP-50-10-110117	11/1/2017	**0.035**		
		VMP-50-10-013118	1/31/2018	**0.029**		
		VMP-50-10-032918	3/29/2018	**0.016**		
		VMP-50-10-041018	4/10/2018	**0.028**		
		VMP-50-10-072618	7/26/2018	**0.099**		
		VMP-50-10-103018	10/30/2018	**0.022**		
		VMP-50-10-012519	1/25/2019	**0.0011**	J	
		VMP-50-10-042919	4/29/2019	**0.0018**	J	
		VMP-50-10-073019	7/30/2019	**0.011**		
		VMP-50-10-102319	10/23/2019	**0.0018**	J	
		VMP-50-10-012820	1/28/2020	**0.0036**	J	
		VMP-50-10-042820	4/28/2020	**0.00097**	J	
		VMP-50-10-072720	7/27/2020	**0.013**		
		VMP-50-10-110520	11/5/2020	**0.021**		
		VMP-50-10-012621	1/26/2021	**0.077**		

SEE LAST PAGE OF TABLE FOR NOTES **TABLE 3**

SUMMARY OF VMP-50 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Chloroform		
				0.05		
				Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50 (cont'd)	20 ft	VMP-50-20-021015	2/10/2015	**0.0066**		
		VMP-50-20-050515	5/5/2015	**0.012**		
		VMP-50-20-073015	7/30/2015	**0.02**		
		VMP-50-20-110315	11/3/2015	**0.016**		
		VMP-50-20-020216	2/2/2016	**0.016**		
		VMP-50-20-050316	5/3/2016	**0.022**		
		VMP-50-20-082616	8/26/2016	**0.033**		
		VMP-50-20-103116	10/31/2016	**0.068**		
		VMP-50-20-020117	2/1/2017	**0.11**		
		VMP-50-20-050317	5/3/2017	**0.032**		
		VMP-50-20-072617	7/26/2017	**0.052**		
		VMP-50-20-110117	11/1/2017	**0.054**		
		VMP-50-20-013118	1/31/2018	<0.023	U	
		VMP-50-20-013118-DUP	1/31/2018	<0.023	U	
		VMP-50-20-032918	3/29/2018	**0.04**		
		VMP-50-20-041018	4/10/2018	<0.55	U	
		VMP-50-20-041018-DUP	4/10/2018	<0.56	U	
		VMP-50-20-072618	7/26/2018	**0.0036**	J	
		VMP-50-20-103018	10/30/2018	**0.015**		
		VMP-50-20-020119	2/1/2019	**0.0023**	J	
		VMP-50-20-042919	4/29/2019	**0.0052**	J	
		VMP-50-20-073019	7/30/2019	**0.0041**	J	
		VMP-50-20-102319	10/23/2019	**0.0039**	J	
		VMP-50-20-012820	1/28/2020	**0.012**		
		VMP-50-20-042820	4/28/2020	**0.0036**	J	
		VMP-50-20-072720	7/27/2020	**0.0039**	J	
		VMP-50-20-110520	11/5/2020	**0.0056**	J	
		VMP-50-20-110520-DUP	11/5/2020	**0.0058**	J	
		VMP-50-20-022521	2/25/2021	**0.027**		
		VMP-50-20-022521-DUP	2/25/2021	**0.028**		

SEE LAST PAGE OF TABLE FOR NOTES **TABLE 3**

SUMMARY OF VMP-50 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Chloroform		
				0.05		
				Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50 (cont'd)	30 ft	VMP-50-30-021015	2/10/2015	<1.5	U	
		VMP-50-30-050515	5/5/2015	<1.4	U	
		VMP-50-30-061515-R	6/15/2015	<0.67	U	
		VMP-50-30-073015	7/30/2015	<0.96	U	
		VMP-50-30-110315	11/3/2015	<0.066	U	
		VMP-50-30-020216	2/2/2016	<2	U	
		VMP-50-30-020216-DUP	2/2/2016	<2.2	U	
		VMP-50-30-050316	5/3/2016	<0.23	U	
		VMP-50-30-080216	8/2/2016	<0.069	U	
		VMP-50-30-103116	10/31/2016	<0.14	U	
		VMP-50-30-020117	2/1/2017	<0.06	U	
		VMP-50-30-050317	5/3/2017	<0.068	U	
		VMP-50-30-050317-DUP	5/3/2017	<0.07	U	
		VMP-50-30-072617	7/26/2017	<0.08	U	
		VMP-50-30-110117	11/1/2017	<0.054	U	
		VMP-50-30-110117-DUP	11/1/2017	<0.053	U	
		VMP-50-30-013118	1/31/2018	<0.055	U	
		VMP-50-30-032918	3/29/2018	<0.076	U	
		VMP-50-30-032918-DUP	3/29/2018	<0.071	U	
		VMP-50-30-041018	4/10/2018	<1.1	U	
		VMP-50-30-072618	7/26/2018	<0.12	U	
		VMP-50-30-103018	10/30/2018	<0.0058	U	
		VMP-50-30-012519	1/25/2019	**0.034**	J	
		VMP-50-30-012519-DUP	1/25/2019	<0.1	U	
		VMP-50-30-042919	4/29/2019	**0.021**	J	
		VMP-50-30-073019	7/30/2019	<0.12	U	
		VMP-50-30-102319	10/23/2019	<0.062	U	
		VMP-50-30-012820	1/28/2020	<0.13	U	
		VMP-50-30-042820	4/28/2020	<0.083	U	
		VMP-50-30-072720	7/27/2020	<0.061	U	
		VMP-50-30-110520	11/5/2020	<0.012	U	
		VMP-50-30-012621	1/26/2021	<0.12	U	

Notes:

Yellow highlighted cells indicate detected results that exceed RO.

The RL for chloroform exceeded the RO in the 4/10/2018 sample because a nearby natural gas utility line leak caused elevated reporting limits for the sample.

Lab Qualifiers

J = Estimated value; results between the MDL and RL

U = Compound analyzed for but not detected above the RL

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 4
SUMMARY OF VMP-56 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Carbon tetrachloride			Chloroform			alpha-Chlorotoluene			1,2-Dibromoethane			1,4-Dichlorobenzene		
				0.17			0.06			6.9			3.4			3.79E-02			0.2			0.05			0.04			4.35E-03			0.2		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.008	U		<0.0062	U		<0.0066	U		<0.0098	U		<0.0077	U	
		VMP-56-10-110315	11/3/2015	**0.0011**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0062	U		<0.0065	U		<0.0097	U		<0.0076	U	
		VMP-56-10-020416	2/4/2016	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0063	U		<0.0067	U		<0.0099	U		<0.0078	U	
		VMP-56-10-050516	5/5/2016	**0.018**			<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.0089	U		<0.0069	U		<0.0073	U		<0.011	U		<0.0085	U	
		VMP-56-10-072716	7/27/2016	**0.00082**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.0088	U		**0.0012**	J		<0.0072	U		<0.011	U		<0.0084	U	
		VMP-56-10-102416	10/24/2016	<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		**0.009**			<0.0068	U		<0.01	U		<0.008	U	
		VMP-56-10-012417	1/24/2017	<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.0089	U		<0.0069	U		<0.0073	U		<0.011	U		<0.0085	U	
		VMP-56-10-050117	5/1/2017	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		<0.0057	U		<0.006	U		<0.009	U		<0.007	U	
		VMP-56-10-072117	7/21/2017	<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.0081	U		**0.0012**	J		<0.0067	U		<0.01	U		<0.0078	U	
		VMP-56-10-102717	10/27/2017	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		**0.00077**	J		<0.006	U		<0.0089	U		<0.0069	U	
		VMP-56-10-012918	1/29/2018	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.0069	U		<0.0054	U		<0.0057	U		<0.0084	U		<0.0066	U	
		VMP-56-10-050118	5/1/2018	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.0078	U		<0.0061	U		<0.0064	U		<0.0096	U		<0.0075	U	
		VMP-56-10-072618	7/26/2018	**0.00074**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U	UJ	<0.0078	U		<0.0061	U		<0.0064	U		<0.0096	U		<0.0075	U	
		VMP-56-10-102918	10/29/2018	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		<0.0057	U		<0.006	U		<0.009	U		<0.007	U	
		VMP-56-10-012819	1/28/2019	<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.0077	U		<0.006	U		<0.0063	U		<0.0094	U		<0.0073	U	
		VMP-56-10-050119	5/1/2019	**0.061**			<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.0074	U		<0.0057	U		<0.0061	U		<0.009	U		<0.0071	U	
		VMP-56-10-072319	7/23/2019	**0.0018**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0062	U		<0.0065	U		<0.0097	U		<0.0076	U	
		VMP-56-10-102119	10/21/2019	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.0069	U		**0.00084**	J		<0.0057	U		<0.0084	U		<0.0066	U	
		VMP-56-10-012220	1/22/2020	<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.0089	U		<0.0069	U		<0.0073	U		<0.011	U		<0.0085	U	
		VMP-56-10-042420	4/24/2020	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0082	U		<0.0064	U		<0.0068	U		<0.01	U		<0.0079	U	
		VMP-56-10-072320	7/23/2020	**0.0016**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.0081	U		<0.0063	U		<0.0067	U		<0.01	U		<0.0078	U	
		VMP-56-10-072320-DUP	7/23/2020	**0.0021**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.0087	U		<0.0068	U		<0.0072	U		<0.011	U		<0.0083	U	
		VMP-56-10-110320	11/3/2020	<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.0078	U		<0.006	U		<0.0064	U		<0.0095	U		<0.0074	U	
		VMP-56-10-012121	1/21/2021	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0082	U		<0.0064	U		<0.0068	U		<0.01	U		<0.0079	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		<0.0064	U		<0.0068	U		<0.01	U		<0.0079	U	
		VMP-56-25-050715	5/7/2015	**0.002**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.0089	U		<0.0069	U		<0.0073	U		<0.011	U		<0.0085	U	
		VMP-56-25-073115	7/31/2015	<0.0047	J	U	<0.01	U		<0.015	U		<0.058	U		<0.0033	U	UJ	<0.0093	U		<0.0072	J	U	<0.0077	U		<0.011	U		<0.0089	U	
		VMP-56-25-110315	11/3/2015	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0063	U		<0.0067	U		<0.0099	U		<0.0078	U	
		VMP-56-25-020416	2/4/2016	**0.00067**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0062	U		<0.0065	U		<0.0097	U		<0.0076	U	
		VMP-56-25-050516	5/5/2016	<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.0092	U		**0.001**	J		<0.0076	U		<0.011	U		<0.0088	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.0094	U		<0.0073	U		<0.0078	U		<0.012	U		<0.009	U	
		VMP-56-25-072716	7/27/2016	**0.0022**	J		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		<0.01	U		**0.0049**	J		<0.0085	U		<0.013	U		<0.0099	U	
		VMP-56-25-102416	10/24/2016	**0.0015**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		**0.0039**	J		<0.0066	U		<0.0099	U		<0.0077	U	
		VMP-56-25-012417	1/24/2017	<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.0093	U		**0.0026**	J		<0.0077	U		<0.011	U		<0.0089	U	
		VMP-56-25-050117	5/1/2017	**0.00085**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.0075	U		**0.0043**	J		<0.0062	U		<0.0091	U		<0.0072	U	
		VMP-56-25-072117	7/21/2017	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		**0.0017**	J		<0.0065	U		<0.0096	U		<0.0075	U	
		VMP-56-25-102717	10/27/2017	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.0071	U		**0.0015**	J		<0.0059	U		<0.0087	U		<0.0068	U	
		VMP-56-25-012918	1/29/2018	<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.0071	U		<0.0055	U		<0.0058	U		<0.0086	U		<0.0068	U	
		VMP-56-25-050118	5/1/2018	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		<0.0059	U		<0.0062	U		<0.0092	U		<0.0072	U	
		VMP-56-25-072618	7/26/2018	**0.00066**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.0077	U		**0.0039**	J		<0.0064	U		<0.0094	U		<0.0074	U	
		VMP-56-25-102918	10/29/2018	**0.0013**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		**0.0013**	J		<0.0063	U		<0.0093	U		<0.0073	U	
		VMP-56-25-012819	1/28/2019	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.0071	U		**0.00088**	J		<0.0058	U		<0.0087	U		<0.0068	U	
		VMP-56-25-012819-DUP	1/28/2019	**0.00094**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.0072	U		**0.00093**	J		<0.006	U		<0.0088	U		<0.0069	U	
		VMP-56-25-050119	5/1/2019	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		**0.00095**	J		<0.006	U		<0.0089	U		<0.0069	U	
		VMP-56-25-072319	7/23/2019	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		**0.0017**	J		<0.0063	U		<0.0093	U		<0.0073	U	
		VMP-56-25-102119	10/21/2019	**0.0042**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0063	U		<0.0067	U		<0.0099	U		<0.0078	U	
		VMP-56-25-012220	1/22/2020	<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.0081	U		<0.0063	U		<0.0067	U		<0.01	U		<0.0078	U	
		VMP-56-25-042420	4/24/2020	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.0086	U		**0.0014**	J		<0.0071	U		<0.01	U		<0.0083	U	
		VMP-56-25-072320	7/23/2020	<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.0079	U		**0.0013**	J		<0.0065	U		<0.0096	U		<0.0075	U	
		VMP-56-25-110320	11/3/2020	**0.00094**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0063	U		<0.0067	U		<0.0099	U		<0.0078	U	
		VMP-56-25-110320-DUP	11/3/2020	**0.0023**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		**0.001**	J		<0.0067	U		<0.0099	U		<0.0078	U	
		VMP-56-25-012121	1/21/2021	<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0062	U		<0.0065	U		<0.0097	U		<0.0076	U	
		VMP-56-25-012121-DUP	1/21/2021	**0.00084**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.0079	U		<0.0061	U		<0.0065	U		<0.0096	U		<0.0075	U	
	38.5 ft	VMP-56-38.5-021015	2/10/2015	**1000**			<8.9	U		<14	U		<5.2	U		<3	U		<8.4	U		<6.5	U		<6.9	U		<10	U		<8	U	
		VMP-56-38.5-050715	5/7/2015	**1400**			<100	U		<160	U		<59	U		<34	U		<96	U		<75	U		<79	U		<120	U		<92	U	
		VMP-56-38.5-061515-R	6/15/2015	**970**			<9.9	U		<15	U		<5.7	U		<3.3	U		<9.3	U		<7.2	U		<7.6	U		<11	U		<8.9	U	
		VMP-56-38.5-073115	7/31/2015	**670**			<8.6	U		<13	U		<5	U		<2.8	U		<8.1	U		<6.3	U		<6.7	U		<9.9	U		<7.8	U	
		VMP-56-38.5-073115-DUP	7/31/2015	**720**			<32	U		<49	U		<18	U		<10	U		<30	U		<23	U		<25	U		<37	U		<29	U	
		VMP-56-38.5-110315	11/3/2015	**590**			<10	U		<16	U		<5.9	U	UJ	<3.4	U		<9.5	U		<7.4	U		<7.8	U	UJ	<12	U		<9.1	U	
		VMP-56-38.5-110315-DUP	11/3/2015	**530**			<74	U		<110	U		<43	U	UJ	<24	U		<69	U		<54	U		<57	U	UJ	<84	U		<66	U	
		VMP-56-38.5-020416	2/4/2016	**470**			<57	U		<87	U		<33	U		<19	U		<53	U		<41	U		<44	U		<65	U		<51	U	
		VMP-56-38.5-050118	5/1/2018	**880**			<32	U		<50	U		<75	U		<11	U		<30	U		<24	U		<25	U		<37	U		<29	U	
		VMP-56-38.5-072618	7/26/2018	**730**			<87	U		<130	U		<200	U		<29	U		<81	U		<63	U		<67	U		<100	U		<78	U	
		VMP-56-38.5-102918	10/29/2018	**960**			<16	U		<25	U		<37	U		<5.3	U		<15	U		<12	U		<12	U		<18	U		<14	U	
		VMP-56-38.5-012819	1/28/2019	**600**			<590	U		<910	U		<1400	U		<200	U		<560	U		<430	U		<1800	U		<680	U		<530	U	
		VMP-56-38.5-050119	5/1/2019	**880**			<330	U		<510	U		<770	U		<110	U		<310	U		<240	U		<260	U		<380	U		<300	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 4
SUMMARY OF VMP-56 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	1,2-Dichloroethane			1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			1,2-Dichloropropane			1,4-Dioxane			Ethylbenzene			Hexachlorobutadiene			Hexane			1,1,2,2-Tetrachloroethane		
				0.420331819			110									0.394937995			0.1			0.61			0.2			470			4.02E-02		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.0059	U		<0.018	U		<0.0056	U		<0.055	U		**0.00073**	J		<0.0088	U	
		VMP-56-10-110315	11/3/2015	<0.0051	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		<0.0055	U		<0.054	U		**0.0024**	J		<0.0086	U	
		VMP-56-10-020416	2/4/2016	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.018	U		<0.0056	U		<0.055	U		<0.0045	U		<0.0088	U	
		VMP-56-10-050516	5/5/2016	<0.0057	U		<0.0056	U		<0.0056	U		<0.0056	U		<0.0065	U		<0.02	U		<0.0061	U		<0.06	U		**0.013**			<0.0097	U	
		VMP-56-10-072716	7/27/2016	<0.0056	U		<0.0055	U		<0.0055	U		<0.0055	U		<0.0064	U		<0.02	U		<0.006	U		<0.06	U		<0.0049	U		<0.0096	U	
		VMP-56-10-102416	10/24/2016	<0.0054	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.0061	U		<0.019	U		**0.014**			<0.056	U		**0.0018**	J		<0.0091	U	
		VMP-56-10-012417	1/24/2017	<0.0057	U		<0.0056	U		<0.0056	U		<0.0056	U		<0.0065	U		<0.02	U		**0.0023**	J		<0.06	U		<0.005	U		<0.0097	U	
		VMP-56-10-050117	5/1/2017	<0.0047	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.0054	U		<0.017	U		<0.005	U		<0.05	U		<0.0041	U		<0.008	U	
		VMP-56-10-072117	7/21/2017	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.019	U		<0.0056	U		<0.055	U		<0.0046	U		<0.0089	U	
		VMP-56-10-102717	10/27/2017	<0.0047	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.0053	U		<0.017	U		<0.005	U		<0.049	U		<0.0041	U		<0.0079	U	
		VMP-56-10-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.0044	U		<0.0051	U		<0.016	U		<0.0048	U		<0.047	U		**0.0022**	J		<0.0076	U	
		VMP-56-10-050118	5/1/2018	<0.005	U		<0.0049	U		<0.0049	U		<0.0049	U		<0.0058	U		<0.018	U		<0.0054	U		<0.053	U		**0.0017**	J		<0.0085	U	
		VMP-56-10-072618	7/26/2018	<0.005	U		<0.0049	U		<0.0049	U		<0.0049	U		<0.0058	U		<0.018	U		<0.0054	U		<0.053	U		**0.013**			<0.0085	U	
		VMP-56-10-102918	10/29/2018	<0.0047	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.0054	U		<0.017	U		<0.005	U		<0.05	U		<0.0041	U		<0.008	U	
		VMP-56-10-012819	1/28/2019	<0.0049	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.0056	U		<0.018	U		<0.0053	U		<0.052	U		<0.0043	U		<0.0084	U	
		VMP-56-10-050119	5/1/2019	<0.0048	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.0054	U		<0.017	U		**0.0014**	J		<0.05	U		**0.46**			<0.0081	U	
		VMP-56-10-072319	7/23/2019	<0.0051	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		**0.00077**	J		<0.054	U		**0.0036**	J		<0.0086	U	
		VMP-56-10-102119	10/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.0044	U		<0.0051	U		<0.016	U		<0.0048	U		<0.047	U		<0.0039	U		<0.0076	U	
		VMP-56-10-012220	1/22/2020	<0.0057	U		<0.0056	U		<0.0056	U		<0.0056	U		<0.0065	U		<0.02	U		<0.0061	U		<0.06	U		<0.005	U		<0.0097	U	
		VMP-56-10-042420	4/24/2020	<0.0053	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.006	U		**0.0014**	J		<0.0057	U		<0.056	U		<0.0046	U		<0.009	U	
		VMP-56-10-072320	7/23/2020	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.019	U		**0.0073**			<0.055	U		**0.12**			<0.0089	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.0056	U		<0.0055	U		<0.0055	U		<0.0055	U		<0.0064	U		<0.02	U		**0.0051**	J		<0.059	U		**0.12**			<0.0095	U	
		VMP-56-10-110320	11/3/2020	<0.005	U		<0.0049	U		<0.0049	U		<0.0049	U		<0.0057	U		<0.018	U		<0.0054	U		<0.053	U		<0.0044	U		<0.0085	U	
		VMP-56-10-012121	1/21/2021	<0.0053	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.006	U		<0.019	U		<0.0057	U		<0.056	U		<0.0046	U		<0.009	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.0053	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.0061	U		<0.019	U		<0.0057	U		<0.056	U		**0.0021**	J		<0.009	U	
		VMP-56-25-050715	5/7/2015	<0.0057	U		<0.0056	U		<0.0056	U		<0.0056	U		<0.0065	U		**0.0019**	J		<0.0061	U		<0.06	U		**0.0017**	J		<0.0097	U	
		VMP-56-25-073115	7/31/2015	<0.006	U		<0.0059	U		<0.0059	U		<0.0059	U		<0.0069	U		<0.021	U		<0.0064	U		<0.063	U		**0.0046**	J		<0.01	U	
		VMP-56-25-110315	11/3/2015	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.018	U		**0.0015**	J		<0.055	U		**0.0055**			<0.0088	U	
		VMP-56-25-020416	2/4/2016	<0.0051	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		<0.0055	U		<0.054	U		<0.0044	U		<0.0086	U	
		VMP-56-25-050516	5/5/2016	<0.0059	U		<0.0058	U		<0.0058	U		<0.0058	U		<0.0067	U		<0.021	U		<0.0063	U		<0.062	U		**0.0014**	J		<0.01	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.0061	U		<0.0059	U		<0.0059	U		<0.0059	U		<0.0069	U		<0.022	U		<0.0065	U		<0.064	U		<0.0053	U		<0.01	U	
		VMP-56-25-072716	7/27/2016	<0.0067	U		<0.0065	U		<0.0065	U		<0.0065	U		<0.0076	U		<0.024	U		<0.0072	U		<0.07	U		**0.0028**	J		<0.011	U	
		VMP-56-25-102416	10/24/2016	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.0059	U		<0.018	U		**0.027**			<0.055	U		**0.0019**	J		<0.0088	U	
		VMP-56-25-012417	1/24/2017	<0.006	U		<0.0059	U		<0.0059	U		<0.0059	U		<0.0068	U		<0.021	U		**0.0019**	J		<0.063	U		**0.00041**	J		<0.01	U	
		VMP-56-25-050117	5/1/2017	<0.0048	U		<0.0047	U		<0.0047	U		<0.0047	U		<0.0055	U		<0.017	U		**0.0024**	J		<0.051	U		<0.0042	U		<0.0082	U	
		VMP-56-25-072117	7/21/2017	<0.0051	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		<0.0054	U		<0.054	U		<0.0044	U		<0.0086	U	
		VMP-56-25-102717	10/27/2017	<0.0046	U		<0.0045	U		<0.0045	U		<0.0045	U		<0.0052	U		<0.016	U		<0.0049	U		<0.048	U		**0.0015**	J		<0.0078	U	
		VMP-56-25-012918	1/29/2018	<0.0046	U		<0.0045	U		<0.0045	U		<0.0045	U		<0.0052	U		<0.016	U		<0.0049	U		<0.048	U		<0.004	U		<0.0077	U	
		VMP-56-25-050118	5/1/2018	<0.0049	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.0056	U		<0.017	U		<0.0052	U		<0.051	U		**0.0014**	J		<0.0083	U	
		VMP-56-25-072618	7/26/2018	<0.005	U		<0.0049	U		<0.0049	U		<0.0049	U		<0.0057	U		<0.018	U		<0.0053	U		<0.052	U		<0.0043	U		<0.0084	U	
		VMP-56-25-102918	10/29/2018	<0.0049	U		<0.0048	U		0.0014	J		<0.0048	U		<0.0056	U		<0.017	U		<0.0052	U		<0.052	U		<0.0043	U		<0.0083	U	
		VMP-56-25-012819	1/28/2019	<0.0046	U		<0.0045	U		<0.0045	U		<0.0045	U		<0.0052	U		<0.016	U		<0.0049	U		<0.048	U		**0.0049**			<0.0078	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.0053	U		<0.016	U		<0.005	U		<0.049	U		**0.0045**			<0.0079	U	
		VMP-56-25-050119	5/1/2019	<0.0047	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.0053	U		<0.017	U		<0.005	U		<0.049	U		**0.0012**	J		<0.0079	U	
		VMP-56-25-072319	7/23/2019	<0.0049	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.0056	U		<0.017	U		<0.0052	U		<0.052	U		<0.0043	U		<0.0083	U	
		VMP-56-25-102119	10/21/2019	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.018	U		**0.01**			<0.055	U		**0.03**			<0.0088	U	
		VMP-56-25-012220	1/22/2020	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.019	U		<0.0056	U		<0.055	U		<0.0046	U		<0.0089	U	
		VMP-56-25-042420	4/24/2020	<0.0056	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.0064	U		**0.026**			<0.006	U		<0.059	U		<0.0048	U		<0.0094	U	
		VMP-56-25-072320	7/23/2020	<0.005	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		<0.0054	U		<0.053	U		<0.0044	U		<0.0086	U	
		VMP-56-25-110320	11/3/2020	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.018	U		<0.0056	U		<0.055	U		<0.0045	U	UJ	<0.0088	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0052	U		<0.0051	U		<0.0051	U		<0.0051	U		<0.006	U		<0.018	U		<0.0056	U		<0.055	U		**0.014**		J	<0.0088	U	
		VMP-56-25-012121	1/21/2021	<0.0051	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		<0.0055	U		<0.054	U		<0.0044	U		<0.0086	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.005	U		<0.005	U		<0.005	U		<0.005	U		<0.0058	U		<0.018	U		<0.0054	U		<0.053	U		**0.0022**	J		<0.0086	U	
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<5.4	U		<5.3	U		<5.3	U		<5.3	U		<6.2	U		<19	U		**580**			<57	U		**4200**			<9.2	U	
		VMP-56-38.5-050715	5/7/2015	<62	U		<61	U		<61	U		<61	U		<71	U		<220	U		**510**			<650	U		**10000**			<100	U	
		VMP-56-38.5-061515-R	6/15/2015	<6	U		<5.8	U		<5.8	U		<5.8	U		<6.8	U		<21	U		**390**			<63	U		**4700**			<10	U	
		VMP-56-38.5-073115	7/31/2015	<5.2	U		<5.1	U		<5.1	U		<5.1	U		<6	U		<18	U		**510**			<55	U		**1200**			<8.8	U	
		VMP-56-38.5-073115-DUP	7/31/2015	<19	U		<19	U		<19	U		<19	U		<22	U		<69	U		**500**			<200	U		**1200**			<33	U	
		VMP-56-38.5-110315	11/3/2015	<6.1	U		<6	U		<6	U		<6	U		<7	U		<22	U		**830**		J	<65	U		**9600**			<10	U	
		VMP-56-38.5-110315-DUP	11/3/2015	<44	U		<44	U		<44	U		<44	U		<51	U		<160	U		**440**		J	<470	U		**9300**			<76	U	
		VMP-56-38.5-020416	2/4/2016	<34	U		<34	U		<34	U		<34	U		<39	U		<120	U		**250**			<360	U		**8400**			<58	U	
		VMP-56-38.5-050118	5/1/2018	<20	U		<19	U		<19	U		<19	U		<22	U		<70	U		**560**			<210	U		**12000**			<33	U	
		VMP-56-38.5-072618	7/26/2018	<52	U		<51	U		<51	U		<51	U		<60	U		<190	U		**460**			<550	U		**9900**			<89	U	
		VMP-56-38.5-102918	10/29/2018	<9.6	U		<9.4	U		<9.4	U		<9.4	U		<11	U		<34	U		**400**			<100	U		**11000**			<16	U	
		VMP-56-38.5-012819	1/28/2019	<360	U		<350	U		<350	U		<350	U		<410	U		<1300	U		**210**	J		<3800	U		**5800**			<610	U	
		VMP-56-38.5-050119	5/1/2019	<200	U		<200	U		<200	U		<200	U		<230	U		<710	U		**470**			<2100	U		**10000**			<340	U	

TABLE 4
SUMMARY OF VMP-56 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	1,2,4-Trichlorobenzene			1,1,2-Trichloroethane			Trichloroethene			Vinyl chloride		
				3.3			0.1			0.35			0.1		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-10-110315	11/3/2015	<0.037	U		<0.0069	U		<0.0068	U		<0.0032	U	
		VMP-56-10-020416	2/4/2016	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-10-050516	5/5/2016	<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-56-10-072716	7/27/2016	<0.041	U		<0.0076	U		<0.0075	U		<0.0036	U	
		VMP-56-10-102416	10/24/2016	<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-56-10-012417	1/24/2017	<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-56-10-050117	5/1/2017	<0.034	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-56-10-072117	7/21/2017	<0.038	U		<0.0071	U		<0.007	U		<0.0033	U	
		VMP-56-10-102717	10/27/2017	<0.034	U		<0.0063	U		<0.0062	U		<0.003	U	
		VMP-56-10-012918	1/29/2018	<0.033	U		<0.006	U		<0.0059	U		<0.0028	U	
		VMP-56-10-050118	5/1/2018	<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-56-10-072618	7/26/2018	<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-56-10-102918	10/29/2018	<0.034	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-56-10-012819	1/28/2019	<0.036	U		<0.0066	U		<0.0066	U		<0.0031	U	
		VMP-56-10-050119	5/1/2019	<0.035	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-56-10-072319	7/23/2019	<0.037	U		<0.0069	U		<0.0068	U		<0.0032	U	
		VMP-56-10-102119	10/21/2019	<0.033	U		<0.006	U		<0.0059	U		<0.0028	U	
		VMP-56-10-012220	1/22/2020	<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-56-10-042420	4/24/2020	<0.039	U		<0.0071	U		<0.007	U		<0.0033	U	
		VMP-56-10-072320	7/23/2020	<0.038	J	U	<0.0071	U		<0.007	U		<0.0033	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.041	U		<0.0076	U		<0.0074	U		<0.0035	U	
		VMP-56-10-110320	11/3/2020	<0.037	U		<0.0067	U		<0.0066	U		<0.0032	U	
		VMP-56-10-012121	1/21/2021	<0.039	U		<0.0071	U		<0.007	U		<0.0033	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-56-25-050715	5/7/2015	<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-56-25-073115	7/31/2015	<0.044	U	UJ	<0.0081	U		<0.008	U		<0.0038	U	
		VMP-56-25-110315	11/3/2015	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-25-020416	2/4/2016	<0.037	U		<0.0069	U		<0.0068	U		<0.0032	U	
		VMP-56-25-050516	5/5/2016	<0.043	U		<0.008	U		<0.0078	U		<0.0037	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.044	U		<0.0082	U		<0.0081	U		<0.0038	U	
		VMP-56-25-072716	7/27/2016	<0.049	U		<0.009	U		<0.0089	U		<0.0042	U	
		VMP-56-25-102416	10/24/2016	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-25-012417	1/24/2017	<0.044	U		<0.0081	U		<0.008	U		<0.0038	U	
		VMP-56-25-050117	5/1/2017	<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-56-25-072117	7/21/2017	<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-56-25-102717	10/27/2017	<0.034	U		<0.0062	U		<0.0061	U		<0.0029	U	
		VMP-56-25-012918	1/29/2018	<0.033	U		<0.0061	U		<0.006	U		<0.0029	U	
		VMP-56-25-050118	5/1/2018	<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-56-25-072618	7/26/2018	<0.036	U		<0.0067	U		**0.0022**	J		<0.0031	U	
		VMP-56-25-102918	10/29/2018	<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-56-25-012819	1/28/2019	<0.034	U		<0.0062	U		<0.0061	U		<0.0029	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.034	U		<0.0063	U		**0.0043**	J		<0.0029	U	
		VMP-56-25-050119	5/1/2019	<0.034	U		<0.0063	U		<0.0062	U		<0.003	U	
		VMP-56-25-072319	7/23/2019	<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-56-25-102119	10/21/2019	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-25-012220	1/22/2020	<0.038	U		<0.0071	U		<0.007	U		<0.0033	U	
		VMP-56-25-042420	4/24/2020	<0.041	U		<0.0075	U		<0.0074	U		<0.0035	U	
		VMP-56-25-072320	7/23/2020	<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-56-25-110320	11/3/2020	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-56-25-012121	1/21/2021	<0.037	U		<0.0069	U		<0.0068	U		<0.0032	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<40	U		<7.3	U		<7.2	U		<3.4	U	
		VMP-56-38.5-050715	5/7/2015	<450	U		<83	U		<82	U		<39	U	
		VMP-56-38.5-061515-R	6/15/2015	<44	U		<8	U		<7.9	U		<3.8	U	
		VMP-56-38.5-073115	7/31/2015	<38	U		<7	U		<6.9	U		<3.3	U	
		VMP-56-38.5-073115-DUP	7/31/2015	<140	U		<26	U		<26	U		<12	U	
		VMP-56-38.5-110315	11/3/2015	<45	U		<8.3	U		<8.1	U		<3.9	U	
		VMP-56-38.5-110315-DUP	11/3/2015	<330	U		<60	U		<59	U		<28	U	
		VMP-56-38.5-020416	2/4/2016	<250	U		<46	U		<45	U		<22	U	
		VMP-56-38.5-050118	5/1/2018	<140	U		<26	U		<26	U		<12	U	
		VMP-56-38.5-072618	7/26/2018	<380	U		<71	U		<70	U		<33	U	
		VMP-56-38.5-102918	10/29/2018	<71	U		<13	U		<13	U		<6.1	U	
		VMP-56-38.5-012819	1/28/2019	<2600	U		<480	U		<480	U		<230	U	
		VMP-56-38.5-050119	5/1/2019	<1500	U		<270	U		<270	U		<130	U	

Notes:
Yellow highlighted cells indicate readings that exceed residential screening criterion.
Blank cells in Result column indicate that analyte was not on target analyte list.

Lab Qualifiers
J = Estimated value; results between the MDL and RL
U = Compound analyzed for but not detected above the RL
CN = Indicates potential high bias due to use of Tedlar© bag for off-line dilution
ND,UJ = Non-detected compound associated with low bias in the continuing calibration verification (CCV)
J0 = Estimated value due to bias in the CCV

AECOM Qualifiers
J = Estimated detection
UJ = Estimated non-detect
U = Non-detect due to blank contamination

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
SUMMARY OF VMP-2 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Carbon tetrachloride			Chlorobenzene			Chloroform			Chloromethane		
				0.17			0.06			6.9			3.4			3.79E-02			0.2			33			0.05			36		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	**0.0022**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		<0.0061	U		**0.0019**	J		<0.027	U	
		VMP-2-5-050615	5/6/2015	**0.0019**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.0092	U		<0.0067	U		**0.0014**	J		<0.03	U	
		VMP-2-5-110415	11/4/2015	**0.003**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.0078	U		<0.0057	U		<0.0061	U		<0.026	U	
		VMP-2-5-020116	2/1/2016	**0.00072**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		<0.0056	U		<0.0059	U		<0.025	U	
		VMP-2-5-042716	4/27/2016	<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.0098	U		<0.0072	U		<0.0076	U		<0.032	U	
		VMP-2-5-072616	7/26/2016	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0082	U		<0.006	U		<0.0064	U		<0.027	ND,UJ	UJ
		VMP-2-5-102616	10/26/2016	<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.0086	U		<0.0063	U		<0.0066	U		<0.028	U	
		VMP-2-5-012517	1/25/2017	**0.0016**	J		<0.012	U		<0.018	U		<0.069	U		<0.0039	U		<0.011	U		<0.0082	U		<0.0087	U		<0.037	U	
		VMP-2-5-050317	5/3/2017	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		<0.0053	U		<0.0057	U		<0.024	U	
		VMP-2-5-072417	7/24/2017	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.0078	U		<0.0057	U		<0.006	U		<0.026	U	
		VMP-2-5-102617	10/26/2017	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.0074	U		<0.0054	U		<0.0057	U		<0.024	U	
		VMP-2-5-012918	1/29/2018	<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.0068	U		<0.005	U		<0.0053	U		<0.022	U	
		VMP-2-5-032818	3/28/2018	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.0075	U		<0.0055	U		<0.0058	U		<0.024	U	
		VMP-2-5-041018	4/10/2018	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.0072	U		<0.0053	U		<0.0056	U		<0.024	U	
		VMP-2-5-072418	7/24/2018	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.0074	U		<0.0054	U		<0.0058	U		<0.024	U	
		VMP-2-5-102418	10/24/2018	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		<0.0056	U		<0.0059	U		<0.025	U	
		VMP-2-5-012319	1/23/2019	<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.0067	U		<0.0049	U		<0.0052	U		<0.022	U	
		VMP-2-5-042619	4/26/2019	**0.00091**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.0078	U		<0.0057	U		<0.006	U		<0.026	U	
		VMP-2-5-072519	7/25/2019	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U	UJ	<0.0026	U		<0.0073	U		<0.0053	U		<0.0057	U		<0.024	U	
		VMP-2-5-102119	10/21/2019	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		<0.0054	U		<0.0057	U		<0.024	U	
		VMP-2-5-012420	1/24/2020	<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		<0.0061	U		<0.0065	U		<0.027	U	
		VMP-2-5-042420	4/24/2020	**0.0013**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.0084	U		<0.0061	U		<0.0065	U		<0.027	U	
		VMP-2-5-072420	7/24/2020	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.0072	U		<0.0053	U		<0.0056	U		<0.024	U	
		VMP-2-5-110420	11/4/2020	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0082	U		<0.006	U		<0.0064	U		<0.027	U	
		VMP-2-5-012521	1/25/2021	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0059	U		<0.0063	U		<0.027	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.0087	U		<0.0064	U		<0.0067	U		<0.028	U	
		VMP-2-8.5-050615	5/6/2015	**0.0023**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.0087	U		<0.0064	U		<0.0068	U		<0.029	U	
		VMP-2-8.5-110415	11/4/2015	**0.0022**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.0088	U		<0.0064	U		<0.0068	U		<0.029	U	
		VMP-2-8.5-021616	2/16/2016	<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.01	U		<0.0073	U		<0.0078	U		<0.033	U	
		VMP-2-8.5-042716	4/27/2016	**0.0025**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.0098	U		<0.0072	U		<0.0076	U		<0.032	U	
		VMP-2-8.5-072616	7/26/2016	**0.0015**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.0092	U		<0.0068	U		<0.0072	U		<0.03	ND,UJ	UJ
		VMP-2-8.5-102616	10/26/2016	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.0085	U		<0.0062	U		<0.0066	U		<0.028	U	
		VMP-2-8.5-012517	1/25/2017	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.0085	U		<0.0062	U		<0.0066	U		<0.028	U	
		VMP-2-8.5-050317	5/3/2017	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.0071	U		<0.0052	U		<0.0055	U		<0.023	U	
		VMP-2-8.5-072417	7/24/2017	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.0086	U		<0.0063	U		<0.0067	U		<0.028	U	
		VMP-2-8.5-102617	10/26/2017	<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		<0.0056	U		<0.0059	U		<0.025	U	
		VMP-2-8.5-012918	1/29/2018	**0.0063**			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.007	U		<0.0052	U		<0.0055	U		<0.023	U	
		VMP-2-8.5-032818	3/28/2018	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.0072	U		<0.0053	U		<0.0056	U		<0.024	U	
		VMP-2-8.5-041018	4/10/2018	<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.0071	U		<0.0052	U		<0.0055	U		<0.023	U	
		VMP-2-8.5-072418	7/24/2018	**0.0003**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.0071	U		<0.0052	U		**0.00091**	J		<0.023	U	
		VMP-2-8.5-102418	10/24/2018	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.0074	U		<0.0054	U		<0.0057	U		<0.024	U	
		VMP-2-8.5-012319	1/23/2019	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.007	U		<0.0051	U		<0.0054	U		<0.023	U	
		VMP-2-8.5-042619	4/26/2019	**0.022**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		<0.0056	U		<0.0059	U		<0.025	U	
		VMP-2-8.5-072519	7/25/2019	<0.0043	U		<0.009	U		<0.014	U		<0.052	U	UJ	<0.003	U		<0.0084	U		<0.0062	U		**0.002**	J		<0.028	U	
		VMP-2-8.5-102119	10/21/2019	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.0075	U		<0.0055	U		<0.0058	U		<0.024	U	
		VMP-2-8.5-012420	1/24/2020	<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.0087	U		<0.0064	U		<0.0068	U		<0.029	U	
		VMP-2-8.5-042420	4/24/2020	**0.0012**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		**0.00098**	J		<0.0064	U		<0.027	U	
		VMP-2-8.5-072420	7/24/2020	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.0075	U		<0.0055	U		<0.0058	U		<0.024	U	
		VMP-2-8.5-110420	11/4/2020	<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.0077	U		<0.0056	U		<0.006	U		<0.025	U	
		VMP-2-8.5-012521	1/25/2021	**0.00094**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0059	U		<0.0063	U		<0.026	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
SUMMARY OF VMP-2 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Carbon tetrachloride			Chlorobenzene			Chloroform			Chloromethane		
				0.17			0.06			6.9			3.4			3.79E-02			0.2			33			0.05			36		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2 (cont'd)	22 ft	VMP-2-22-021015	2/10/2015	**0.0017**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.0081	U		<0.0059	U		<0.0063	U		<0.027	U	
		VMP-2-22-021015-DUP	2/10/2015	**0.0014**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.008	U		<0.0058	U		<0.0062	U		<0.026	U	
		VMP-2-22-050615	5/6/2015	<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.0093	U		<0.0068	U		<0.0072	U		<0.03	U	
		VMP-2-22-073015	7/30/2015	**0.0024**	J		**0.0032**	J		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		<0.0061	U		**0.0046**	J		<0.027	U	
		VMP-2-22-110415	11/4/2015	<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.0083	U		<0.0061	U		<0.0065	U		<0.027	U	
		VMP-2-22-020116	2/1/2016	**0.0016**	J		**0.0019**	J		<0.014	U		<0.055	U		<0.0031	U		<0.0089	U		<0.0065	U		**0.004**	J		<0.029	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.0046	U		**0.002**	J		<0.015	U		<0.056	U		<0.0032	U		<0.0091	U		<0.0066	U		**0.0043**	J		<0.03	U	
		VMP-2-22-042716	4/27/2016	**0.00076**	J		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.01	U		<0.0073	U		<0.0078	U		<0.033	U	
		VMP-2-22-072616	7/26/2016	<0.0046	U		**0.0017**	J		<0.015	U		<0.056	U		<0.0032	U		<0.009	U		<0.0066	U		**0.0053**	J		<0.03	ND,UJ	UJ
		VMP-2-22-102616	10/26/2016	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.0085	U		<0.0062	U		<0.0066	U		<0.028	U	
		VMP-2-22-020217	2/2/2017	**0.00061**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.0075	U		<0.0055	U		<0.0058	U		<0.025	ND,UJ	
		VMP-2-22-050317	5/3/2017	**0.002**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.007	U		<0.0052	U		**0.0017**	J		<0.023	U	
		VMP-2-22-072417	7/24/2017	**0.00085**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.0082	U		<0.006	U		**0.0051**	J		<0.027	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0058	U		**0.003**	J		<0.026	U	
		VMP-2-22-102617	10/26/2017	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.007	U		<0.0051	U		**0.0039**	J		<0.023	U	
		VMP-2-22-012918	1/29/2018	<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.0068	U		<0.0049	U		**0.00096**	J		<0.022	U	
		VMP-2-22-032818	3/28/2018	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.0072	U		<0.0052	U		**0.0014**	J		<0.024	U	
		VMP-2-22-041018	4/10/2018	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.0073	U		<0.0054	U		**0.00073**	J		<0.024	U	
		VMP-2-22-072418	7/24/2018	<0.004	U		**0.0041**	J		<0.013	U		<0.048	U		<0.0027	U		<0.0078	U		<0.0057	U		**0.015**			<0.026	U	
		VMP-2-22-072418-DUP	7/24/2018	**0.0017**	J		**0.0043**	J		<0.012	U		<0.047	U		<0.0026	U		<0.0076	U		<0.0055	U		**0.014**			**0.013**	J	
		VMP-2-22-102418	10/24/2018	<0.0034	U		**0.0016**	J		<0.011	U		<0.042	U		<0.0024	U		<0.0068	U		<0.005	U		**0.0056**			<0.022	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.0038	U		**0.0012**	J		<0.012	U		<0.046	U		<0.0026	U		<0.0074	U		<0.0054	U		**0.0056**	J		<0.024	U	
		VMP-2-22-012319	1/23/2019	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.007	U		<0.0051	U		<0.0054	U		<0.023	U	
		VMP-2-22-042619	4/26/2019	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0058	U		<0.0062	U		<0.026	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.0075	U		<0.0055	U		<0.0058	U		<0.024	U	
		VMP-2-22-072519	7/25/2019	<0.0039	U		**0.0024**	J		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.0077	U		<0.0056	U		**0.0089**			<0.025	U	
		VMP-2-22-102119	10/21/2019	<0.0039	U		**0.0019**	J		<0.012	U		<0.047	U		<0.0027	U		<0.0076	U		<0.0056	U		**0.008**			<0.025	U	
		VMP-2-22-012420	1/24/2020	<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.0088	U		<0.0064	U		**0.0019**	J		<0.029	U	
		VMP-2-22-042420	4/24/2020	<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.0089	U		**0.0014**	J		<0.0069	U		<0.029	U	
		VMP-2-22-042420-DUP	4/24/2020	**0.0027**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.0089	U		<0.0065	U		<0.0069	U		<0.029	U	
		VMP-2-22-072420	7/24/2020	<0.0041	U		**0.0015**	J		<0.013	U		<0.05	U		<0.0028	U		<0.008	U		<0.0059	U		**0.0078**			<0.026	U	
		VMP-2-22-110420	11/4/2020	**0.091**			<0.082	U		<0.13	U		<0.19	U		<0.027	U		<0.077	U		<0.056	U		<0.06	U		<0.1	U	
		VMP-2-22-012521	1/25/2021	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.0079	U		<0.0058	U		**0.0025**	J		<0.026	U	
	42 ft	VMP-2-42-021015	2/10/2015	**15**			<8	U		<12	U		<4.6	U		<2.6	U		<7.5	U		<5.5	U		<5.8	U		<9.8	U	
		VMP-2-42-050615	5/6/2015	**28**	J		<110	U		<180	U		<66	U		<38	U		<110	U		<78	U		<83	U		<140	U	
		VMP-2-42-061515-R	6/15/2015	**39**	J		<91	U		<140	U		<53	U		<30	U		<86	U		<63	U		<66	U		<110	U	
		VMP-2-42-073015	7/30/2015	**51**	J		<540	U		<840	U		<3100	U		<180	U	UJ	<510	U		<370	U		<400	U		<1700	U	

SEE LAST PAGE OF TABLE FOR NOTES

TABLE 5
SUMMARY OF VMP-2 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	alpha-Chlorotoluene			1,2-Dibromoethane			1,4-Dichlorobenzene			1,2-Dichloroethane			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane			Ethylbenzene		
				0.04			4.35E-03			0.2			0.420331819			0.394937995			0.5			0.5			0.1			0.61		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.0068	U		<0.01	U		<0.0079	U		<0.0053	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U		**0.79**		
		VMP-2-5-050615	5/6/2015	<0.0075	U		<0.011	U		<0.0087	U		<0.0059	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U		<0.0063	U	
		VMP-2-5-110415	11/4/2015	<0.0064	U		<0.0096	U		<0.0075	U		<0.005	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U		<0.0054	U	
		VMP-2-5-020116	2/1/2016	<0.0063	U		<0.0093	U		<0.0073	U		<0.0049	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U		<0.0052	U	
		VMP-2-5-042716	4/27/2016	<0.008	U		<0.012	U		<0.0093	U		<0.0063	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U		<0.0068	U	
		VMP-2-5-072616	7/26/2016	<0.0068	U		<0.01	U		<0.0079	U		<0.0053	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U		<0.0057	U	
		VMP-2-5-102616	10/26/2016	<0.007	U		<0.01	U		<0.0082	U		<0.0055	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U		<0.0059	U	
		VMP-2-5-012517	1/25/2017	<0.0092	U		<0.014	U		<0.011	U		<0.0072	U		<0.0082	U		<0.0081	U		<0.0081	U		<0.026	U		**0.02**		
		VMP-2-5-050317	5/3/2017	<0.006	U		<0.0089	U		<0.007	U		<0.0047	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U		<0.005	U	
		VMP-2-5-072417	7/24/2017	<0.0064	U		<0.0095	U		<0.0074	U		<0.005	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U		**0.0027**	J	
		VMP-2-5-102617	10/26/2017	<0.0061	U		<0.009	U		<0.0071	U		<0.0048	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U		<0.0051	U	
		VMP-2-5-012918	1/29/2018	<0.0056	U		<0.0084	U		<0.0066	U		<0.0044	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U		<0.0047	U	
		VMP-2-5-032818	3/28/2018	<0.0062	U		<0.0091	U		<0.0072	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0052	U	
		VMP-2-5-041018	4/10/2018	<0.0059	U		<0.0088	U		<0.0069	U		<0.0046	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U		<0.005	U	
		VMP-2-5-072418	7/24/2018	<0.0061	U		<0.0091	U		<0.0071	U		<0.0048	U		**0.0016**	J		<0.0054	U		<0.0054	U		<0.017	U		<0.0051	U	
		VMP-2-5-102418	10/24/2018	<0.0063	U		<0.0093	U		<0.0073	U		<0.0049	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U		<0.0052	U	
		VMP-2-5-012319	1/23/2019	<0.0055	U		<0.0082	U		<0.0064	U		<0.0043	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U		<0.0046	U	
		VMP-2-5-042619	4/26/2019	<0.0064	U		<0.0095	U		<0.0074	U		<0.005	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U		<0.0054	U	
		VMP-2-5-072519	7/25/2019	<0.006	ND,UJ	UJ	<0.0089	U		<0.007	U		<0.0047	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U		<0.005	U	
		VMP-2-5-102119	10/21/2019	<0.006	U		<0.009	U		<0.007	U		<0.0047	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U		<0.005	U	
		VMP-2-5-012420	1/24/2020	<0.0068	U		<0.01	U		<0.008	U		<0.0054	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U		<0.0058	U	
		VMP-2-5-042420	4/24/2020	<0.0069	U		<0.01	U		<0.008	U		<0.0054	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U		<0.0058	U	
		VMP-2-5-072420	7/24/2020	<0.006	U		<0.0088	U		<0.0069	U		<0.0046	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U		<0.005	U	
		VMP-2-5-110420	11/4/2020	<0.0068	U		<0.01	U		<0.0079	U		<0.0053	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U		<0.0057	U	
		VMP-2-5-012521	1/25/2021	<0.0067	U		<0.0099	U		<0.0078	U		<0.0052	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U		<0.0056	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.0071	U		<0.011	U		<0.0083	U		<0.0056	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U		<0.006	U	
		VMP-2-8.5-050615	5/6/2015	<0.0072	U		<0.011	U		<0.0084	U		<0.0056	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U		**0.0019**	J	
		VMP-2-8.5-110415	11/4/2015	<0.0072	U		<0.011	U		<0.0084	U		<0.0057	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U		<0.0061	U	
		VMP-2-8.5-021616	2/16/2016	<0.0082	U		<0.012	U		<0.0096	U		<0.0064	U		<0.0073	U		<0.0072	U		<0.0072	U		**0.0019**	J		<0.0069	U	
		VMP-2-8.5-042716	4/27/2016	<0.008	U		<0.012	U		<0.0093	U		<0.0063	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U		<0.0068	U	
		VMP-2-8.5-072616	7/26/2016	<0.0076	U		<0.011	U		<0.0088	U		<0.0059	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U		<0.0064	U	
		VMP-2-8.5-102616	10/26/2016	<0.007	U		<0.01	U		<0.0081	U		<0.0055	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U		**0.0031**	J	
		VMP-2-8.5-012517	1/25/2017	<0.007	U		<0.01	U		<0.0081	U		<0.0054	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U		<0.0058	U	
		VMP-2-8.5-050317	5/3/2017	<0.0058	U		<0.0087	U		<0.0068	U		<0.0046	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U		<0.0049	U	
		VMP-2-8.5-072417	7/24/2017	<0.0071	U		<0.01	U		<0.0082	U		<0.0055	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U		<0.0059	U	
		VMP-2-8.5-102617	10/26/2017	<0.0063	U		<0.0093	U		<0.0073	U		<0.0049	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U		<0.0053	U	
		VMP-2-8.5-012918	1/29/2018	<0.0058	U		<0.0086	U		<0.0067	U		<0.0045	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U		<0.0049	U	
		VMP-2-8.5-032818	3/28/2018	<0.0059	U		<0.0088	U		<0.0069	U		<0.0046	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U		<0.005	U	
		VMP-2-8.5-041018	4/10/2018	<0.0058	U		<0.0086	U		<0.0068	U		<0.0046	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U		<0.0049	U	
		VMP-2-8.5-072418	7/24/2018	<0.0059	U		<0.0087	U		<0.0068	U		<0.0046	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U		<0.0049	U	
		VMP-2-8.5-102418	10/24/2018	<0.0061	U		<0.009	U		<0.0071	U		<0.0048	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U		<0.0051	U	
		VMP-2-8.5-012319	1/23/2019	<0.0058	U		<0.0086	U		<0.0067	U		<0.0045	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U		<0.0048	U	
		VMP-2-8.5-042619	4/26/2019	<0.0063	U		<0.0093	U		<0.0073	U		<0.0049	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U		**0.018**		
		VMP-2-8.5-072519	7/25/2019	<0.0069	ND,UJ	UJ	<0.01	U		<0.008	U		<0.0054	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U		<0.0058	U	
		VMP-2-8.5-102119	10/21/2019	<0.0062	U		<0.0091	U		<0.0072	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0052	U	
		VMP-2-8.5-012420	1/24/2020	<0.0072	U		<0.011	U		<0.0083	U		<0.0056	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U		<0.006	U	
		VMP-2-8.5-042420	4/24/2020	<0.0068	U		<0.01	U		<0.0079	U		<0.0053	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U		<0.0057	U	
		VMP-2-8.5-072420	7/24/2020	<0.0062	U		<0.0091	U		<0.0072	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0052	U	
		VMP-2-8.5-110420	11/4/2020	<0.0063	U		<0.0094	U		<0.0073	U		<0.0049	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U		<0.0053	U	
		VMP-2-8.5-012521	1/25/2021	<0.0066	U		<0.0099	U		<0.0077	U		<0.0052	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U		<0.0056	U	

TABLE 5
SUMMARY OF VMP-2 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	alpha-Chlorotoluene			1,2-Dibromoethane			1,4-Dichlorobenzene			1,2-Dichloroethane			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane			Ethylbenzene		
				0.04			4.35E-03			0.2			0.420331819			0.394937995			0.5			0.5			0.1			0.61		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2 (cont'd)	22 ft	VMP-2-22-021015	2/10/2015	<0.0067	U		<0.0099	U		<0.0078	U		<0.0052	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U		**0.0032**	J	
		VMP-2-22-021015-DUP	2/10/2015	<0.0065	U		<0.0097	U		<0.0076	U		<0.0051	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U		**0.0024**	J	
		VMP-2-22-050615	5/6/2015	<0.0077	U		<0.011	U		<0.0089	U		<0.006	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U		<0.0064	U	
		VMP-2-22-073015	7/30/2015	<0.0068	U		<0.01	U		<0.0079	U		<0.0053	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U		<0.0057	U	
		VMP-2-22-110415	11/4/2015	<0.0068	U		<0.01	U		<0.008	U		<0.0054	U		<0.0061	U		<0.006	U		<0.006	U		**0.0033**	J		<0.0058	U	
		VMP-2-22-020116	2/1/2016	<0.0073	U		<0.011	U		<0.0085	U		<0.0057	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U		<0.0061	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.0075	U		<0.011	U		<0.0087	U		<0.0058	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U		<0.0063	U	
		VMP-2-22-042716	4/27/2016	<0.0082	U		<0.012	U		<0.0096	U		<0.0064	U		<0.0074	U		<0.0072	U		<0.0072	U		<0.023	U		<0.0069	U	
		VMP-2-22-072616	7/26/2016	<0.0074	U		<0.011	U		<0.0086	U		<0.0058	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U		<0.0062	U	
		VMP-2-22-102616	10/26/2016	<0.007	U		<0.01	U		<0.0081	U		<0.0055	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U		**0.0017**	J	
		VMP-2-22-020217	2/2/2017	<0.0062	U		<0.0092	U		<0.0072	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0052	U	
		VMP-2-22-050317	5/3/2017	<0.0058	U		<0.0086	U		<0.0067	U		<0.0045	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U		<0.0049	U	
		VMP-2-22-072417	7/24/2017	<0.0068	U		<0.01	U		<0.0079	U		<0.0053	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U		<0.0057	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.0065	U		<0.0096	U		<0.0075	U		<0.0051	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U		<0.0054	U	
		VMP-2-22-102617	10/26/2017	<0.0057	U		<0.0085	U		<0.0066	U		<0.0045	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U		<0.0048	U	
		VMP-2-22-012918	1/29/2018	<0.0056	U		<0.0083	U		<0.0065	U		<0.0044	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U		<0.0047	U	
		VMP-2-22-032818	3/28/2018	<0.0059	U		<0.0088	U		<0.0068	U		<0.0046	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U		<0.0049	U	
		VMP-2-22-041018	4/10/2018	<0.006	U		<0.009	U		<0.007	U		<0.0047	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U		<0.005	U	
		VMP-2-22-072418	7/24/2018	<0.0064	U		<0.0095	U		<0.0074	U		<0.005	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U		<0.0054	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.0062	U		<0.0092	U		<0.0072	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0052	U	
		VMP-2-22-102418	10/24/2018	<0.0056	U		<0.0083	U		<0.0065	U		<0.0044	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U		<0.0047	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.0061	U		<0.0091	U		<0.0071	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0051	U	
		VMP-2-22-012319	1/23/2019	<0.0057	U		<0.0085	U		<0.0066	U		<0.0045	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U		<0.0048	U	
		VMP-2-22-042619	4/26/2019	<0.0065	U		<0.0097	U		<0.0076	U		<0.0051	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U		<0.0055	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.0062	U		<0.0091	U		<0.0072	U		<0.0048	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U		<0.0052	U	
		VMP-2-22-072519	7/25/2019	<0.0063	ND,UJ	UJ	<0.0094	U		<0.0074	U		<0.005	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U		<0.0053	U	
		VMP-2-22-102119	10/21/2019	<0.0063	U		<0.0093	U		<0.0073	U		<0.0049	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U		<0.0052	U	
		VMP-2-22-012420	1/24/2020	<0.0072	U		<0.011	U		<0.0084	U		<0.0056	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U		<0.006	U	
		VMP-2-22-042420	4/24/2020	<0.0073	U		<0.011	U		<0.0085	U		<0.0057	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U		<0.0061	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.0073	U		<0.011	U		<0.0085	U		<0.0057	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U		<0.0061	U	
		VMP-2-22-072420	7/24/2020	<0.0066	U		<0.0098	U		<0.0077	U		<0.0052	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U		<0.0056	U	
		VMP-2-22-110420	11/4/2020	<0.063	U		<0.094	U		<0.074	U		<0.05	U		<0.057	U		<0.056	U		<0.056	U		<0.18	U		<0.053	U	
		VMP-2-22-012521	1/25/2021	<0.0065	U		<0.0097	U		<0.0076	U		<0.0051	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U		<0.0055	U	
	42 ft	VMP-2-42-021015	2/10/2015	<6.2	U		<9.1	U		<7.2	U		<4.8	U		<5.5	U		<5.4	U		<5.4	U		<17	U		**1.8**	J	
		VMP-2-42-050615	5/6/2015	<88	U		<130	U		<100	U		<69	U		<78	U		<77	U		<77	U		<240	U		<74	U	
		VMP-2-42-061515-R	6/15/2015	<70	U		<100	U		<82	U		<55	U		<63	U		<62	U		<62	U		<200	U		<59	U	
		VMP-2-42-073015	7/30/2015	<420	U		<620	U		<490	U		<330	U		<370	U		<370	U		<370	U		<1200	U		<350	U	

TABLE 5
SUMMARY OF VMP-2 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Hexachlorobutadiene			2-Hexanone (Methyl N-Butyl Ketone)			1,1,2,2-Tetrachloroethane			Tetrachloroethene			1,2,4-Trichlorobenzene			1,1,2-Trichloroethane			Trichloroethene			Vinyl chloride		
				0.2			21			4.02E-02			6.1			3.3			0.1			0.35			0.1		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.056	U		<0.022	U		<0.0091	U		<0.009	U		<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-2-5-050615	5/6/2015	<0.062	U		**0.0042**	J		<0.01	U		**0.062**			<0.043	U		<0.0079	U		<0.0078	U		<0.0037	U	
		VMP-2-5-110415	11/4/2015	<0.053	U		**0.001**	J		<0.0085	U		**0.0049**	J		<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-2-5-020116	2/1/2016	<0.052	U		<0.02	U		<0.0083	U		<0.0082	U		<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-2-5-042716	4/27/2016	<0.066	U		<0.025	U		<0.011	U		**0.0055**	J		<0.046	U		<0.0085	U		<0.0084	U		<0.004	U	
		VMP-2-5-072616	7/26/2016	<0.056	U		<0.021	U		<0.009	U		**0.022**			<0.039	U		<0.0071	U		<0.007	U		<0.0033	U	
		VMP-2-5-102616	10/26/2016	<0.058	U		<0.022	U		<0.0093	U		**0.012**			<0.04	U		<0.0074	U		<0.0073	U		<0.0035	U	
		VMP-2-5-012517	1/25/2017	<0.076	U		**0.0048**	J		<0.012	U		<0.012	U		<0.053	U		<0.0097	U		<0.0096	U		<0.0046	U	
		VMP-2-5-050317	5/3/2017	<0.049	U		<0.019	U		<0.008	U		**0.0073**	J		<0.034	U		<0.0063	U		<0.0062	U		<0.003	U	
		VMP-2-5-072417	7/24/2017	<0.053	U		<0.02	U		<0.0085	U		**0.02**			<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-2-5-102617	10/26/2017	<0.05	U		<0.019	U		<0.0081	U		**0.0064**	J		<0.035	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-2-5-012918	1/29/2018	<0.046	U		<0.018	U		<0.0075	U		<0.0074	U		<0.032	U		<0.0059	U		<0.0058	U		<0.0028	U	
		VMP-2-5-032818	3/28/2018	<0.051	U		<0.019	U		<0.0082	U		**0.0021**	J		<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-5-041018	4/10/2018	<0.049	U		<0.019	U		<0.0079	U		**0.0026**	J		<0.034	U		<0.0062	U		<0.0062	U		<0.0029	U	
		VMP-2-5-072418	7/24/2018	<0.05	U		<0.019	U		<0.0081	U		**0.027**			<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-5-102418	10/24/2018	<0.052	U		<0.02	U		<0.0083	U		**0.0065**	J		<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-2-5-012319	1/23/2019	<0.046	U		<0.018	U		<0.0073	U		**0.0013**	J		<0.032	U		<0.0058	U		<0.0058	U		<0.0027	U	
		VMP-2-5-042619	4/26/2019	<0.053	U		<0.02	U		<0.0085	U		**0.0033**	J		<0.037	U		<0.0067	U		<0.0066	U		<0.0032	U	
		VMP-2-5-072519	7/25/2019	<0.049	U		<0.019	U		<0.008	U		**0.018**			<0.034	U		<0.0063	U		<0.0062	U		<0.003	U	
		VMP-2-5-102119	10/21/2019	<0.05	U		<0.019	U		<0.008	U		**0.0062**	J		<0.034	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-2-5-012420	1/24/2020	<0.056	U		<0.022	U		<0.0091	U		<0.009	U		<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-2-5-042420	4/24/2020	<0.057	U		<0.022	U		<0.0091	U		<0.009	U		<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-2-5-072420	7/24/2020	<0.049	U		<0.019	U		<0.0079	U		**0.012**			<0.034	U		<0.0063	U		<0.0062	U		<0.0029	U	
		VMP-2-5-110420	11/4/2020	<0.056	U		<0.021	U		<0.009	U		**0.84**			<0.039	U		<0.0071	U		**0.041**			<0.0033	U	
		VMP-2-5-012521	1/25/2021	<0.055	U		<0.021	U		<0.0088	U		<0.0088	U		<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.059	U		<0.023	U		<0.0095	U		**0.0047**	J		<0.041	U		<0.0075	U		<0.0074	U		<0.0035	U	
		VMP-2-8.5-050615	5/6/2015	<0.059	U		<0.023	U		<0.0095	U		**0.11**			<0.041	U		<0.0076	U		<0.0075	U		<0.0036	U	
		VMP-2-8.5-110415	11/4/2015	<0.06	U		**0.001**	J		<0.0096	U		**0.012**			<0.042	U		<0.0076	U		<0.0075	U		<0.0036	U	
		VMP-2-8.5-021616	2/16/2016	<0.068	U		**0.0029**	J		<0.011	U		<0.011	U		<0.047	U		<0.0087	U		<0.0085	U		<0.0041	U	
		VMP-2-8.5-042716	4/27/2016	<0.066	U		**0.0019**	J		<0.011	U		**0.0074**	J		<0.046	U		<0.0085	U		<0.0084	U		<0.004	U	
		VMP-2-8.5-072616	7/26/2016	<0.063	U		<0.024	U		<0.01	U		**0.02**			<0.044	U		<0.008	U		<0.0079	U		<0.0038	U	
		VMP-2-8.5-102616	10/26/2016	<0.058	U		<0.022	U		<0.0093	U		**0.02**			<0.04	U		<0.0074	U		<0.0072	U		<0.0034	U	
		VMP-2-8.5-012517	1/25/2017	<0.057	U		**0.0015**	J		<0.0092	U		**0.0092**			<0.04	U		<0.0073	U		<0.0072	U		<0.0034	U	
		VMP-2-8.5-050317	5/3/2017	<0.048	U		<0.018	U		<0.0078	U		**0.01**			<0.034	U		<0.0062	U		<0.0061	U		<0.0029	U	
		VMP-2-8.5-072417	7/24/2017	<0.058	U		<0.022	U		<0.0094	U		**0.017**			<0.041	U		<0.0075	U		<0.0074	U		<0.0035	U	
		VMP-2-8.5-102617	10/26/2017	<0.052	U		<0.02	U		<0.0083	U		**0.019**			<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-2-8.5-012918	1/29/2018	<0.048	U		<0.018	U		<0.0077	U		**0.0078**			<0.033	U		<0.0061	U		<0.006	U		<0.0029	U	
		VMP-2-8.5-032818	3/28/2018	<0.049	U		<0.019	U		<0.0079	U		**0.0067**	J		<0.034	U		<0.0062	U		<0.0062	U		<0.0029	U	
		VMP-2-8.5-041018	4/10/2018	<0.048	U		<0.018	U		<0.0077	U		**0.0065**	J		<0.033	U		<0.0061	U		<0.006	U		<0.0029	U	
		VMP-2-8.5-072418	7/24/2018	<0.048	U		<0.018	U		<0.0078	U		**0.021**			<0.034	U		<0.0062	U		<0.0061	U		<0.0029	U	
		VMP-2-8.5-102418	10/24/2018	<0.05	U		<0.019	U		<0.0081	U		**0.016**			<0.035	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-2-8.5-012319	1/23/2019	<0.048	U		<0.018	U		<0.0076	U		**0.0047**	J		<0.033	U		<0.0061	U		<0.006	U		<0.0028	U	
		VMP-2-8.5-042619	4/26/2019	<0.052	U		<0.02	U		<0.0083	U		**0.004**	J		<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-2-8.5-072519	7/25/2019	<0.057	U		<0.022	U		<0.0092	U		**0.011**			<0.04	U		<0.0073	U		<0.0072	U		<0.0034	U	
		VMP-2-8.5-102119	10/21/2019	<0.051	U		<0.019	U		<0.0082	U		**0.01**			<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-8.5-012420	1/24/2020	<0.059	U		<0.023	U		<0.0095	U		**0.0048**	J		<0.041	U		<0.0076	U		<0.0074	U		<0.0035	U	
		VMP-2-8.5-042420	4/24/2020	<0.056	U		<0.022	U		<0.0091	U		**0.0031**	J		<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-2-8.5-072420	7/24/2020	<0.051	U		<0.019	U		<0.0082	U		**0.0092**			<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-8.5-110420	11/4/2020	<0.052	U		<0.02	U		<0.0084	U		**0.0066**	J		<0.036	U		<0.0066	U		<0.0066	U		<0.0031	U	
		VMP-2-8.5-012521	1/25/2021	<0.055	U		<0.021	U		<0.0088	U		<0.0087	U		<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	

TABLE 5
SUMMARY OF VMP-2 SOIL VAPOR ANALYTICAL DETECTIONS AND SCREENING RESULTS

Location	Depth	Sample ID	Sample Date	Hexachlorobutadiene			2-Hexanone (Methyl N-Butyl Ketone)			1,1,2,2-Tetrachloroethane			Tetrachloroethene			1,2,4-Trichlorobenzene			1,1,2-Trichloroethane			Trichloroethene			Vinyl chloride		
				0.2			21			4.02E-02			6.1			3.3			0.1			0.35			0.1		
				Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2 (cont'd)	22 ft	VMP-2-22-021015	2/10/2015	<0.055	U		<0.021	U		<0.0088	U		**0.0027**	J		<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-2-22-021015-DUP	2/10/2015	<0.054	U		<0.021	U		<0.0087	U		**0.0019**	J		<0.038	U		<0.0069	U		<0.0068	U		<0.0032	U	
		VMP-2-22-050615	5/6/2015	<0.063	U		**0.0032**	J		<0.01	U		**0.22**			<0.044	U		<0.0081	U		<0.008	U		<0.0038	U	
		VMP-2-22-073015	7/30/2015	<0.056	U		<0.022	ND,UJ	UJ	<0.0091	U		**0.19**			<0.039	U	UJ	<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-2-22-110415	11/4/2015	<0.056	U		**0.0016**	J		<0.0091	U		**0.016**			<0.039	U		<0.0072	U		<0.0071	U		<0.0034	U	
		VMP-2-22-020116	2/1/2016	<0.06	U		<0.023	U		<0.0097	U		**0.0071**	J		<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.062	U		<0.024	U		<0.0099	U		**0.0048**	J		<0.043	U		<0.0079	U		<0.0078	U		<0.0037	U	
		VMP-2-22-042716	4/27/2016	<0.068	U		**0.0016**	J		<0.011	U		**0.0037**	J		<0.047	U		<0.0087	U		<0.0086	U		<0.0041	U	
		VMP-2-22-072616	7/26/2016	<0.061	U		<0.023	U		<0.0098	U		**0.01**			<0.042	U		<0.0078	U		<0.0077	U		<0.0036	U	
		VMP-2-22-102616	10/26/2016	<0.058	U		**0.0041**	J		<0.0093	U		**0.014**			<0.04	U		<0.0074	U		<0.0072	U		<0.0034	U	
		VMP-2-22-020217	2/2/2017	<0.051	U		<0.02	U		<0.0082	U		**0.01**			<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-22-050317	5/3/2017	<0.048	U		<0.018	U		<0.0077	U		**0.012**			<0.033	U		<0.0061	U		<0.006	U		<0.0029	U	
		VMP-2-22-072417	7/24/2017	<0.056	U		<0.021	U		<0.009	U		**0.0081**	J		<0.039	U		<0.0071	U		<0.007	U		<0.0033	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.054	U		<0.02	U		<0.0086	U		**0.007**	J		<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-2-22-102617	10/26/2017	<0.047	U		<0.018	U		<0.0076	U		**0.015**			<0.033	U		<0.006	U		<0.0059	U		<0.0028	U	
		VMP-2-22-012918	1/29/2018	<0.046	U		<0.018	U		<0.0074	U		**0.0058**	J		<0.032	U		<0.0059	U		<0.0058	U		<0.0027	U	
		VMP-2-22-032818	3/28/2018	<0.049	U		<0.019	U		<0.0078	U		**0.0069**	J		<0.034	U		<0.0062	U		<0.0061	U		<0.0029	U	
		VMP-2-22-041018	4/10/2018	<0.05	U		<0.019	U		<0.008	U		**0.0059**	J		<0.034	U		<0.0064	U		<0.0063	U		<0.003	U	
		VMP-2-22-072418	7/24/2018	<0.053	U		<0.02	U		<0.0085	U		**0.011**			<0.037	U		<0.0068	U		<0.0067	U		<0.0032	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.051	U		<0.02	U		<0.0082	U		**0.012**			<0.036	U		<0.0065	U		<0.0064	U		<0.0031	U	
		VMP-2-22-102418	10/24/2018	<0.046	U		<0.018	U		<0.0074	U		**0.013**			<0.032	U		<0.0059	U		<0.0058	U		<0.0028	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.05	U		<0.019	U		<0.0081	U		**0.013**			<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-22-012319	1/23/2019	<0.047	U		<0.018	U		<0.0076	U		**0.008**			<0.033	U		<0.006	U		<0.0059	U		<0.0028	U	
		VMP-2-22-042619	4/26/2019	<0.054	U		<0.021	U		<0.0086	U		**0.0062**	J		<0.037	U		<0.0069	U		<0.0068	U		<0.0032	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.051	U		<0.019	U		<0.0082	U		**0.0064**	J		<0.035	U		<0.0065	U		<0.0064	U		<0.003	U	
		VMP-2-22-072519	7/25/2019	<0.052	U		<0.02	U		<0.0084	U		**0.0068**	J		<0.036	U		<0.0067	U		<0.0066	U		<0.0031	U	
		VMP-2-22-102119	10/21/2019	<0.052	U		<0.02	U		<0.0083	U		**0.0099**			<0.036	U		<0.0066	U		<0.0065	U		<0.0031	U	
		VMP-2-22-012420	1/24/2020	<0.06	U		<0.023	U		<0.0096	U		<0.0095	U		<0.041	U		<0.0076	U		<0.0075	U		<0.0036	U	
		VMP-2-22-042420	4/24/2020	<0.06	U		<0.023	U		<0.0097	U		**0.0039**	J		<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.06	U		<0.023	U		<0.0097	U		**0.0035**	J		<0.042	U		<0.0077	U		<0.0076	U		<0.0036	U	
		VMP-2-22-072420	7/24/2020	<0.055	U		<0.021	U		<0.0088	U		**0.0059**	J		<0.038	U		<0.007	U		<0.0069	U		<0.0033	U	
		VMP-2-22-110420	11/4/2020	<0.52	U		<0.2	U		<0.084	U		<0.083	U		<0.36	U		<0.067	U		<0.066	U		<0.031	U	
		VMP-2-22-012521	1/25/2021	<0.054	U		<0.021	U		<0.0086	U		**0.0036**	J		<0.037	U		<0.0069	U		<0.0068	U		<0.0032	U	
	42 ft	VMP-2-42-021015	2/10/2015	<51	U		<19	U		<8.2	U		<8.1	U		<35	U		<6.5	U		<6.4	U		<3	U	
		VMP-2-42-050615	5/6/2015	<720	U		<280	U		<120	U					<500	U		<93	U		<91	U		<43	U	
		VMP-2-42-061515-R	6/15/2015	<580	U		<220	U		<93	U		<92	U		<400	U		<74	U		<73	U		<35	U	
		VMP-2-42-073015	7/30/2015	<3400	U		<1300	U		<560	U		<550	U		<2400	U	UJ	<440	U		<440	U		<210	U	

Notes:
Yellow highlighted cells indicate readings that exceed residential screening criterion.
Blank cells in Result column indicate that analyte was not on target analyte list.

Lab Qualifiers
J = Estimated value; results between the MDL and RL
U = Compound analyzed for but not detected above the RL
CN = Indicates potential high bias due to use of Tedlar© bag for off-line dilution
ND,UJ = Non-detected compound associated with low bias in the continuing calibration verification (CCV)
J0 = Estimated value due to bias in the CCV

AECOM Qualifiers
J = Estimated detection
UJ = Estimated non-detect
U = Non-detect due to blank contamination

File: C:\USERS\CRACIUNS\AECOM\GDS GIS SERVICES - DCS AMERICAS\SHELL\ILLINOIS\USF00666-900_S_CENTRAL_AVE-ROXANA-IL\ROXANA 3Q21 GW RPT\2021.09.16\WORK\FIGURE 2 GROUNDWATER MONITORING WELL SAMPLING LOCATIONS.DWG Last edited: Sep. 16, 21 @ 12:48 PM by: craciuns

LEGEND

- ROXANA INTERIM GROUNDWATER MONITORING WELL LOCATION
- GROUNDWATER MONITORING WELL LOCATION (NOT INCLUDED IN THE ROXANA INTERIM GROUNDWATER MONITORING PROGRAM)
- GROUNDWATER PIEZOMETER LOCATION
- GROUNDWATER PIEZOMETER LOCATION (NOT INCLUDED IN THE ROXANA INTERIM GROUNDWATER MONITORING PROGRAM)
- * ROXANA INTERIM GROUNDWATER MONITORING WELL SAMPLING LOCATION

Location with analytical exceedance of groundwater remediation objective for indoor inhalation exposure route

FIRST ST
SECOND ST
THIRD ST
FOURTH ST
FIFTH ST
SIXTH ST
SEVENTH ST
EIGHTH ST
VILLAGE OF ROXANA
HIGHWAY 111 (S. CENTRAL AVE)
CHAFFER AVE
RAND AVENUE
NORTH PROPERTY
MAIN PROPERTY
WEST PROPERTY
BP
1986 APPROXIMATE BENZENE RELEASE SITE
2020 APPROXIMATE BUCKEYE PIPELINE GASOLINE RELEASE SITE

PZ-1(101)
PZ-1(85)
PZ-2(84)
PZ-2(70.5)
MW-9 *
MW-10 *
MW-11 *
MW-12 *
MW-13 *
MW-16 *
MW-17
MW-18
MW-19
MW-20
MW-21
MW-22 *
MW-23 *
MW-24 *
MW-25 *
MW-26 *
MW-27 *
MW-28 *
MW-1 *
MW-2 *
MW-3 *
MW-4 *
MW-5 *
MW-6A *
MW-6B *
MW-6C *
MW-6D *
MW-7 *
MW-8 *
MW-14 *
P-54 *
P-55R *
P-56 *
P-57 *
P-58 *
P-59 *
P-66 *
P-68 *
P-74 *
P-93A *
P-93B *
P-93C *
P-93D *
P-114R *
ROST-3-MW *
ROST-4-PZ(A)
ROST-4-PZ(B)
ROST-4-PZ(C) *
ROST-4-PZ(D)
ROST-4-PZ(E) *
ROST-4-PZ(F)
ROST-4-PZ(G) *
ROST-4-PZ
P-60-11
P-60-S
P-60-12
P-60
P-60-13
T-1
T-6
T-12 *
T-24
A-28
A-27
P-61
GP-9-PZ
P-69
P-70
P-73
P-75
MW-15 *
MW-29 *
MW-30 *
MW-31 *
MW-32 *
MW-33 *
MW-34 *
MW-35 *
MW-36 *
MW-37 *
MW-38 *
MW-39 *
MW-40 *
MW-41 *
MW-42 *
MW-43 *
MW-44 *
MW-45 *
MW-46 *
MW-47 *
MW-48 *
MW-49 *
MW-50 *
MW-51 *
MW-52 *
MW-53 *
MW-54 *
MW-55 *
MW-56 *
MW-57 *
MW-58 *
MW-59 *
MW-60 *
MW-61 *
MW-62 *
MW-63 *
MW-64 *
MW-65 *
MW-66 *
MW-67 *
MW-68 *
MW-69 *
MW-70 *
MW-71 *
MW-72 *
MW-73 *
MW-74 *
MW-75 *
MW-76 *
MW-77 *
MW-78 *
MW-79 *
MW-80 *
MW-81 *
MW-82 *
MW-83 *
MW-84 *
MW-85 *
MW-86 *
MW-87 *
MW-88 *
MW-89 *
MW-90 *
MW-91 *
MW-92 *
MW-93 *
MW-94 *
MW-95 *
MW-96 *
MW-97 *
MW-98 *
MW-99 *
MW-100 *
MW-101 *
MW-102 *
MW-103 *
MW-104 *
MW-105 *
MW-106 *
MW-107 *
MW-108 *
MW-109 *
MW-110 *
MW-111 *
MW-112 *
MW-113 *
MW-114 *
MW-115 *
MW-116 *
MW-117 *
MW-118 *
MW-119 *
MW-120 *
MW-121 *
MW-122 *
MW-123 *
MW-124 *
MW-125 *
MW-126 *
MW-127 *
MW-128 *
MW-129 *
MW-130 *
MW-131 *
MW-132 *
MW-133 *
MW-134 *
MW-135 *
MW-136 *
MW-137 *
MW-138 *
MW-139 *
MW-140 *
MW-141 *
MW-142 *
MW-143 *
MW-144 *
MW-145 *
MW-146 *
MW-147 *
MW-148 *
MW-149 *
MW-150 *
MW-151 *
MW-152 *
MW-153 *
MW-154 *
MW-155 *
MW-156 *
MW-157 *
MW-158 *
MW-159 *
MW-160 *
MW-161 *
MW-162 *
MW-163 *
MW-164 *
MW-165 *
MW-166 *
MW-167 *
MW-168 *
MW-169 *
MW-170 *
MW-171 *
MW-172 *
MW-173 *
MW-174 *
MW-175 *
MW-176 *
MW-177 *
MW-178 *
MW-179 *
MW-180 *
MW-181 *
MW-182 *
MW-183 *
MW-184 *
MW-185 *
MW-186 *
MW-187 *
MW-188 *
MW-189 *
MW-190 *
MW-191 *
MW-192 *
MW-193 *
MW-194 *
MW-195 *
MW-196 *
MW-197 *
MW-198 *
MW-199 *
MW-200 *
MW-201 *
MW-202 *
MW-203 *
MW-204 *
MW-205 *
MW-206 *
MW-207 *
MW-208 *
MW-209 *
MW-210 *
MW-211 *
MW-212 *
MW-213 *
MW-214 *
MW-215 *
MW-216 *
MW-217 *
MW-218 *
MW-219 *
MW-220 *
MW-221 *
MW-222 *
MW-223 *
MW-224 *
MW-225 *
MW-226 *
MW-227 *
MW-228 *
MW-229 *
MW-230 *
MW-231 *
MW-232 *
MW-233 *
MW-234 *
MW-235 *
MW-236 *
MW-237 *
MW-238 *
MW-239 *
MW-240 *
MW-241 *
MW-242 *
MW-243 *
MW-244 *
MW-245 *
MW-246 *
MW-247 *
MW-248 *
MW-249 *
MW-250 *
MW-251 *
MW-252 *
MW-253 *
MW-254 *
MW-255 *
MW-256 *
MW-257 *
MW-258 *
MW-259 *
MW-260 *
MW-261 *
MW-262 *
MW-263 *
MW-264 *
MW-265 *
MW-266 *
MW-267 *
MW-268 *
MW-269 *
MW-270 *
MW-271 *
MW-272 *
MW-273 *
MW-274 *
MW-275 *
MW-276 *
MW-277 *
MW-278 *
MW-279 *
MW-280 *
MW-281 *
MW-282 *
MW-283 *
MW-284 *
MW-285 *
MW-286 *
MW-287 *
MW-288 *
MW-289 *
MW-290 *
MW-291 *
MW-292 *
MW-293 *
MW-294 *
MW-295 *
MW-296 *
MW-297 *
MW-298 *
MW-299 *
MW-300 *
MW-301 *
MW-302 *
MW-303 *
MW-304 *
MW-305 *
MW-306 *
MW-307 *
MW-308 *
MW-309 *
MW-310 *
MW-311 *
MW-312 *
MW-313 *
MW-314 *
MW-315 *
MW-316 *
MW-317 *
MW-318 *
MW-319 *
MW-320 *
MW-321 *
MW-322 *
MW-323 *
MW-324 *
MW-325 *
MW-326 *
MW-327 *
MW-328 *
MW-329 *
MW-330 *
MW-331 *
MW-332 *
MW-333 *
MW-334 *
MW-335 *
MW-336 *
MW-337 *
MW-338 *
MW-339 *
MW-340 *
MW-341 *
MW-342 *
MW-343 *
MW-344 *
MW-345 *
MW-346 *
MW-347 *
MW-348 *
MW-349 *
MW-350 *
MW-351 *
MW-352 *
MW-353 *
MW-354 *
MW-355 *
MW-356 *
MW-357 *
MW-358 *
MW-359 *
MW-360 *
MW-361 *
MW-362 *
MW-363 *
MW-364 *
MW-365 *
MW-366 *
MW-367 *
MW-368 *
MW-369 *
MW-370 *
MW-371 *
MW-372 *
MW-373 *
MW-374 *
MW-375 *
MW-376 *
MW-377 *
MW-378 *
MW-379 *
MW-380 *
MW-381 *
MW-382 *
MW-383 *
MW-384 *
MW-385 *
MW-386 *
MW-387 *
MW-388 *
MW-389 *
MW-390 *
MW-391 *
MW-392 *
MW-393 *
MW-394 *
MW-395 *
MW-396 *
MW-397 *
MW-398 *
MW-399 *
MW-400 *
MW-401 *
MW-402 *
MW-403 *
MW-404 *
MW-405 *
MW-406 *
MW-407 *
MW-408 *
MW-409 *
MW-410 *
MW-411 *
MW-412 *
MW-413 *
MW-414 *
MW-415 *
MW-416 *
MW-417 *
MW-418 *
MW-419 *
MW-420 *
MW-421 *
MW-422 *
MW-423 *
MW-424 *
MW-425 *
MW-426 *
MW-427 *
MW-428 *
MW-429 *
MW-430 *
MW-431 *
MW-432 *
MW-433 *
MW-434 *
MW-435 *
MW-436 *
MW-437 *
MW-438 *
MW-439 *
MW-440 *
MW-441 *
MW-442 *
MW-443 *
MW-444 *
MW-445 *
MW-446 *
MW-447 *
MW-448 *
MW-449 *
MW-450 *
MW-451 *
MW-452 *
MW-453 *
MW-454 *
MW-455 *
MW-456 *
MW-457 *
MW-458 *
MW-459 *
MW-460 *
MW-461 *
MW-462 *
MW-463 *
MW-464 *
MW-465 *
MW-466 *
MW-467 *
MW-468 *
MW-469 *
MW-470 *
MW-471 *
MW-472 *
MW-473 *
MW-474 *
MW-475 *
MW-476 *
MW-477 *
MW-478 *
MW-479 *
MW-480 *
MW-481 *
MW-482 *
MW-483 *
MW-484 *
MW-485 *
MW-486 *
MW-487 *
MW-488 *
MW-489 *
MW-490 *
MW-491 *
MW-492 *
MW-493 *
MW-494 *
MW-495 *
MW-496 *
MW-497 *
MW-498 *
MW-499 *
MW-500 *
MW-501 *
MW-502 *
MW-503 *
MW-504 *
MW-505 *
MW-506 *
MW-507 *
MW-508 *
MW-509 *
MW-510 *
MW-511 *
MW-512 *
MW-513 *
MW-514 *
MW-515 *
MW-516 *
MW-517 *
MW-518 *
MW-519 *
MW-520 *
MW-521 *
MW-522 *
MW-523 *
MW-524 *
MW-525 *
MW-526 *
MW-527 *
MW-528 *
MW-529 *
MW-530 *
MW-531 *
MW-532 *
MW-533 *
MW-534 *
MW-535 *
MW-536 *
MW-537 *
MW-538 *
MW-539 *
MW-540 *
MW-541 *
MW-542 *
MW-543 *
MW-544 *
MW-545 *
MW-546 *
MW-547 *
MW-548 *
MW-549 *
MW-550 *
MW-551 *
MW-552 *
MW-553 *
MW-554 *
MW-555 *
MW-556 *
MW-557 *
MW-558 *
MW-559 *
MW-560 *
MW-561 *
MW-562 *
MW-563 *
MW-564 *
MW-565 *
MW-566 *
MW-567 *
MW-568 *
MW-569 *
MW-570 *
MW-571 *
MW-572 *
MW-573 *
MW-574 *
MW-575 *
MW-576 *
MW-577 *
MW-578 *
MW-579 *
MW-580 *
MW-581 *
MW-582 *
MW-583 *
MW-584 *
MW-585 *
MW-586 *
MW-587 *
MW-588 *
MW-589 *
MW-590 *
MW-591 *
MW-592 *
MW-593 *
MW-594 *
MW-595 *
MW-596 *
MW-597 *
MW-598 *
MW-599 *
MW-600 *
MW-601 *
MW-602 *
MW-603 *
MW-604 *
MW-605 *
MW-606 *
MW-607 *
MW-608 *
MW-609 *
MW-610 *
MW-611 *
MW-612 *
MW-613 *
MW-614 *
MW-615 *
MW-616 *
MW-617 *
MW-618 *
MW-619 *
MW-620 *
MW-621 *
MW-622 *
MW-623 *
MW-624 *
MW-625 *
MW-626 *
MW-627 *
MW-628 *
MW-629 *
MW-630 *
MW-631 *
MW-632 *
MW-633 *
MW-634 *
MW-635 *
MW-636 *
MW-637 *
MW-638 *
MW-639 *
MW-640 *
MW-641 *
MW-642 *
MW-643 *
MW-644 *
MW-645 *
MW-646 *
MW-647 *
MW-648 *
MW-649 *
MW-650 *
MW-651 *
MW-652 *
MW-653 *
MW-654 *
MW-655 *
MW-656 *
MW-657 *
MW-658 *
MW-659 *
MW-660 *
MW-661 *
MW-662 *
MW-663 *
MW-664 *
MW-665 *
MW-666 *
MW-667 *
MW-668 *
MW-669 *
MW-670 *
MW-671 *
MW-672 *
MW-673 *
MW-674 *
MW-675 *
MW-676 *
MW-677 *
MW-678 *
MW-679 *
MW-680 *
MW-681 *
MW-682 *
MW-683 *
MW-684 *
MW-685 *
MW-686 *
MW-687 *
MW-688 *
MW-689 *
MW-690 *
MW-691 *
MW-692 *
MW-693 *
MW-694 *
MW-695 *
MW-696 *
MW-697 *
MW-698 *
MW-699 *
MW-700 *
MW-701 *
MW-702 *
MW-703 *
MW-704 *
MW-705 *
MW-706 *
MW-707 *
MW-708 *
MW-709 *
MW-710 *
MW-711 *
MW-712 *
MW-713 *
MW-714 *
MW-715 *
MW-716 *
MW-717 *
MW-718 *
MW-719 *
MW-720 *
MW-721 *
MW-722 *
MW-723 *
MW-724 *
MW-725 *
MW-726 *
MW-727 *
MW-728 *
MW-729 *
MW-730 *
MW-731 *
MW-732 *
MW-733 *
MW-734 *
MW-735 *
MW-736 *
MW-737 *
MW-738 *
MW-739 *
MW-740 *
MW-741 *
MW-742 *
MW-743 *
MW-744 *
MW-745 *
MW-746 *
MW-747 *
MW-748 *
MW-749 *
MW-750 *
MW-751 *
MW-752 *
MW-753 *
MW-754 *
MW-755 *
MW-756 *
MW-757 *
MW-758 *
MW-759 *
MW-760 *
MW-761 *
MW-762 *
MW-763 *
MW-764 *
MW-765 *
MW-766 *
MW-767 *
MW-768 *
MW-769 *
MW-770 *
MW-771 *
MW-772 *
MW-773 *
MW-774 *
MW-775 *
MW-776 *
MW-777 *
MW-778 *
MW-779 *
MW-780 *
MW-781 *
MW-782 *
MW-783 *
MW-784 *
MW-785 *
MW-786 *
MW-787 *
MW-788 *
MW-789 *
MW-790 *
MW-791 *
MW-792 *
MW-793 *
MW-794 *
MW-795 *
MW-796 *
MW-797 *
MW-798 *
MW-799 *
MW-800 *
MW-801 *
MW-802 *
MW-803 *
MW-804 *
MW-805 *
MW-806 *
MW-807 *
MW-808 *
MW-809 *
MW-810 *
MW-811 *
MW-812 *
MW-813 *
MW-814 *
MW-815 *
MW-816 *
MW-817 *
MW-818 *
MW-819 *
MW-820 *
MW-821 *
MW-822 *
MW-823 *
MW-824 *
MW-825 *
MW-826 *
MW-827 *
MW-828 *
MW-829 *
MW-830 *
MW-831 *
MW-832 *
MW-833 *
MW-834 *
MW-835 *
MW-836 *
MW-837 *
MW-838 *
MW-839 *
MW-840 *
MW-841 *
MW-842 *
MW-843 *
MW-844 *
MW-845 *
MW-846 *
MW-847 *
MW-848 *
MW-849 *
MW-850 *
MW-851 *
MW-852 *
MW-853 *
MW-854 *
MW-855 *
MW-856 *
MW-857 *
MW-858 *
MW-859 *
MW-860 *
MW-861 *
MW-862 *
MW-863 *
MW-864 *
MW-865 *
MW-866 *
MW-867 *
MW-868 *
MW-869 *
MW-870 *
MW-871 *
MW-872 *
MW-873 *
MW-874 *
MW-875 *
MW-876 *
MW-877 *
MW-878 *
MW-879 *
MW-880 *
MW-881 *
MW-882 *
MW-883 *
MW-884 *
MW-885 *
MW-886 *
MW-887 *
MW-888 *
MW-889 *
MW-890 *
MW-891 *
MW-892 *
MW-893 *
MW-894 *
MW-895 *
MW-896 *
MW-897 *
MW-898 *
MW-899 *
MW-900 *
MW-901 *
MW-902 *
MW-903 *
MW-904 *
MW-905 *
MW-906 *
MW-907 *
MW-908 *
MW-909 *
MW-910 *
MW-911 *
MW-912 *
MW-913 *
MW-914 *
MW-915 *
MW-916 *
MW-917 *
MW-918 *
MW-919 *
MW-920 *
MW-921 *
MW-922 *
MW-923 *
MW-924 *
MW-925 *
MW-926 *
MW-927 *
MW-928 *
MW-929 *
MW-930 *
MW-931 *
MW-932 *
MW-933 *
MW-934 *
MW-935 *
MW-936 *
MW-937 *
MW-938 *
MW-939 *
MW-940 *
MW-941 *
MW-942 *
MW-943 *
MW-944 *
MW-945 *
MW-946 *
MW-947 *
MW-948 *
MW-949 *
MW-950 *
MW-951 *
MW-952 *
MW-953 *
MW-954 *
MW-955 *
MW-956 *
MW-957 *
MW-958 *
MW-959 *
MW-960 *
MW-961 *
MW-962 *
MW-963 *
MW-964 *
MW-965 *
MW-966 *
MW-967 *
MW-968 *
MW-969 *
MW-970 *
MW-971 *
MW-972 *
MW-973 *
MW-974 *
MW-975 *
MW-976 *
MW-977 *
MW-978 *
MW-979 *
MW-980 *
MW-981 *
MW-982 *
MW-983 *
MW-984 *
MW-985 *
MW-986 *
MW-987 *
MW-988 *
MW-989 *
MW-990 *
MW-991 *
MW-992 *
MW-993 *
MW-994 *
MW-995 *
MW-996 *
MW-997 *
MW-998 *
MW-999 *
MW-1000 *

0 200
SCALE FEET

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US
INTERIM GROUNDWATER MONITORING PROGRAM
ROXANA, ILLINOIS

PROJECT NO. 60648474


AECOM

DRN. BY:gds October 2021
DSGN. BY:mr
CHKD. BY:wmp

Roxana Interim Groundwater Monitoring Well Locations


FIG. NO. 1

File: P:\ENVIRONMENTAL\SHELL OIL PRODUCT US\B-ROXANA-ROUTE 111\2156XXXX_ROXANA INVESTIGATION & ASSESSMENT\VAPOR INTRUSION\FINAL INDOOR AIR PLAN\FIG 3 SAMPLING LOCATIONS.DWG Last edited: MAR. 10, 11 @ 1:52 p.m. by: david_deguire

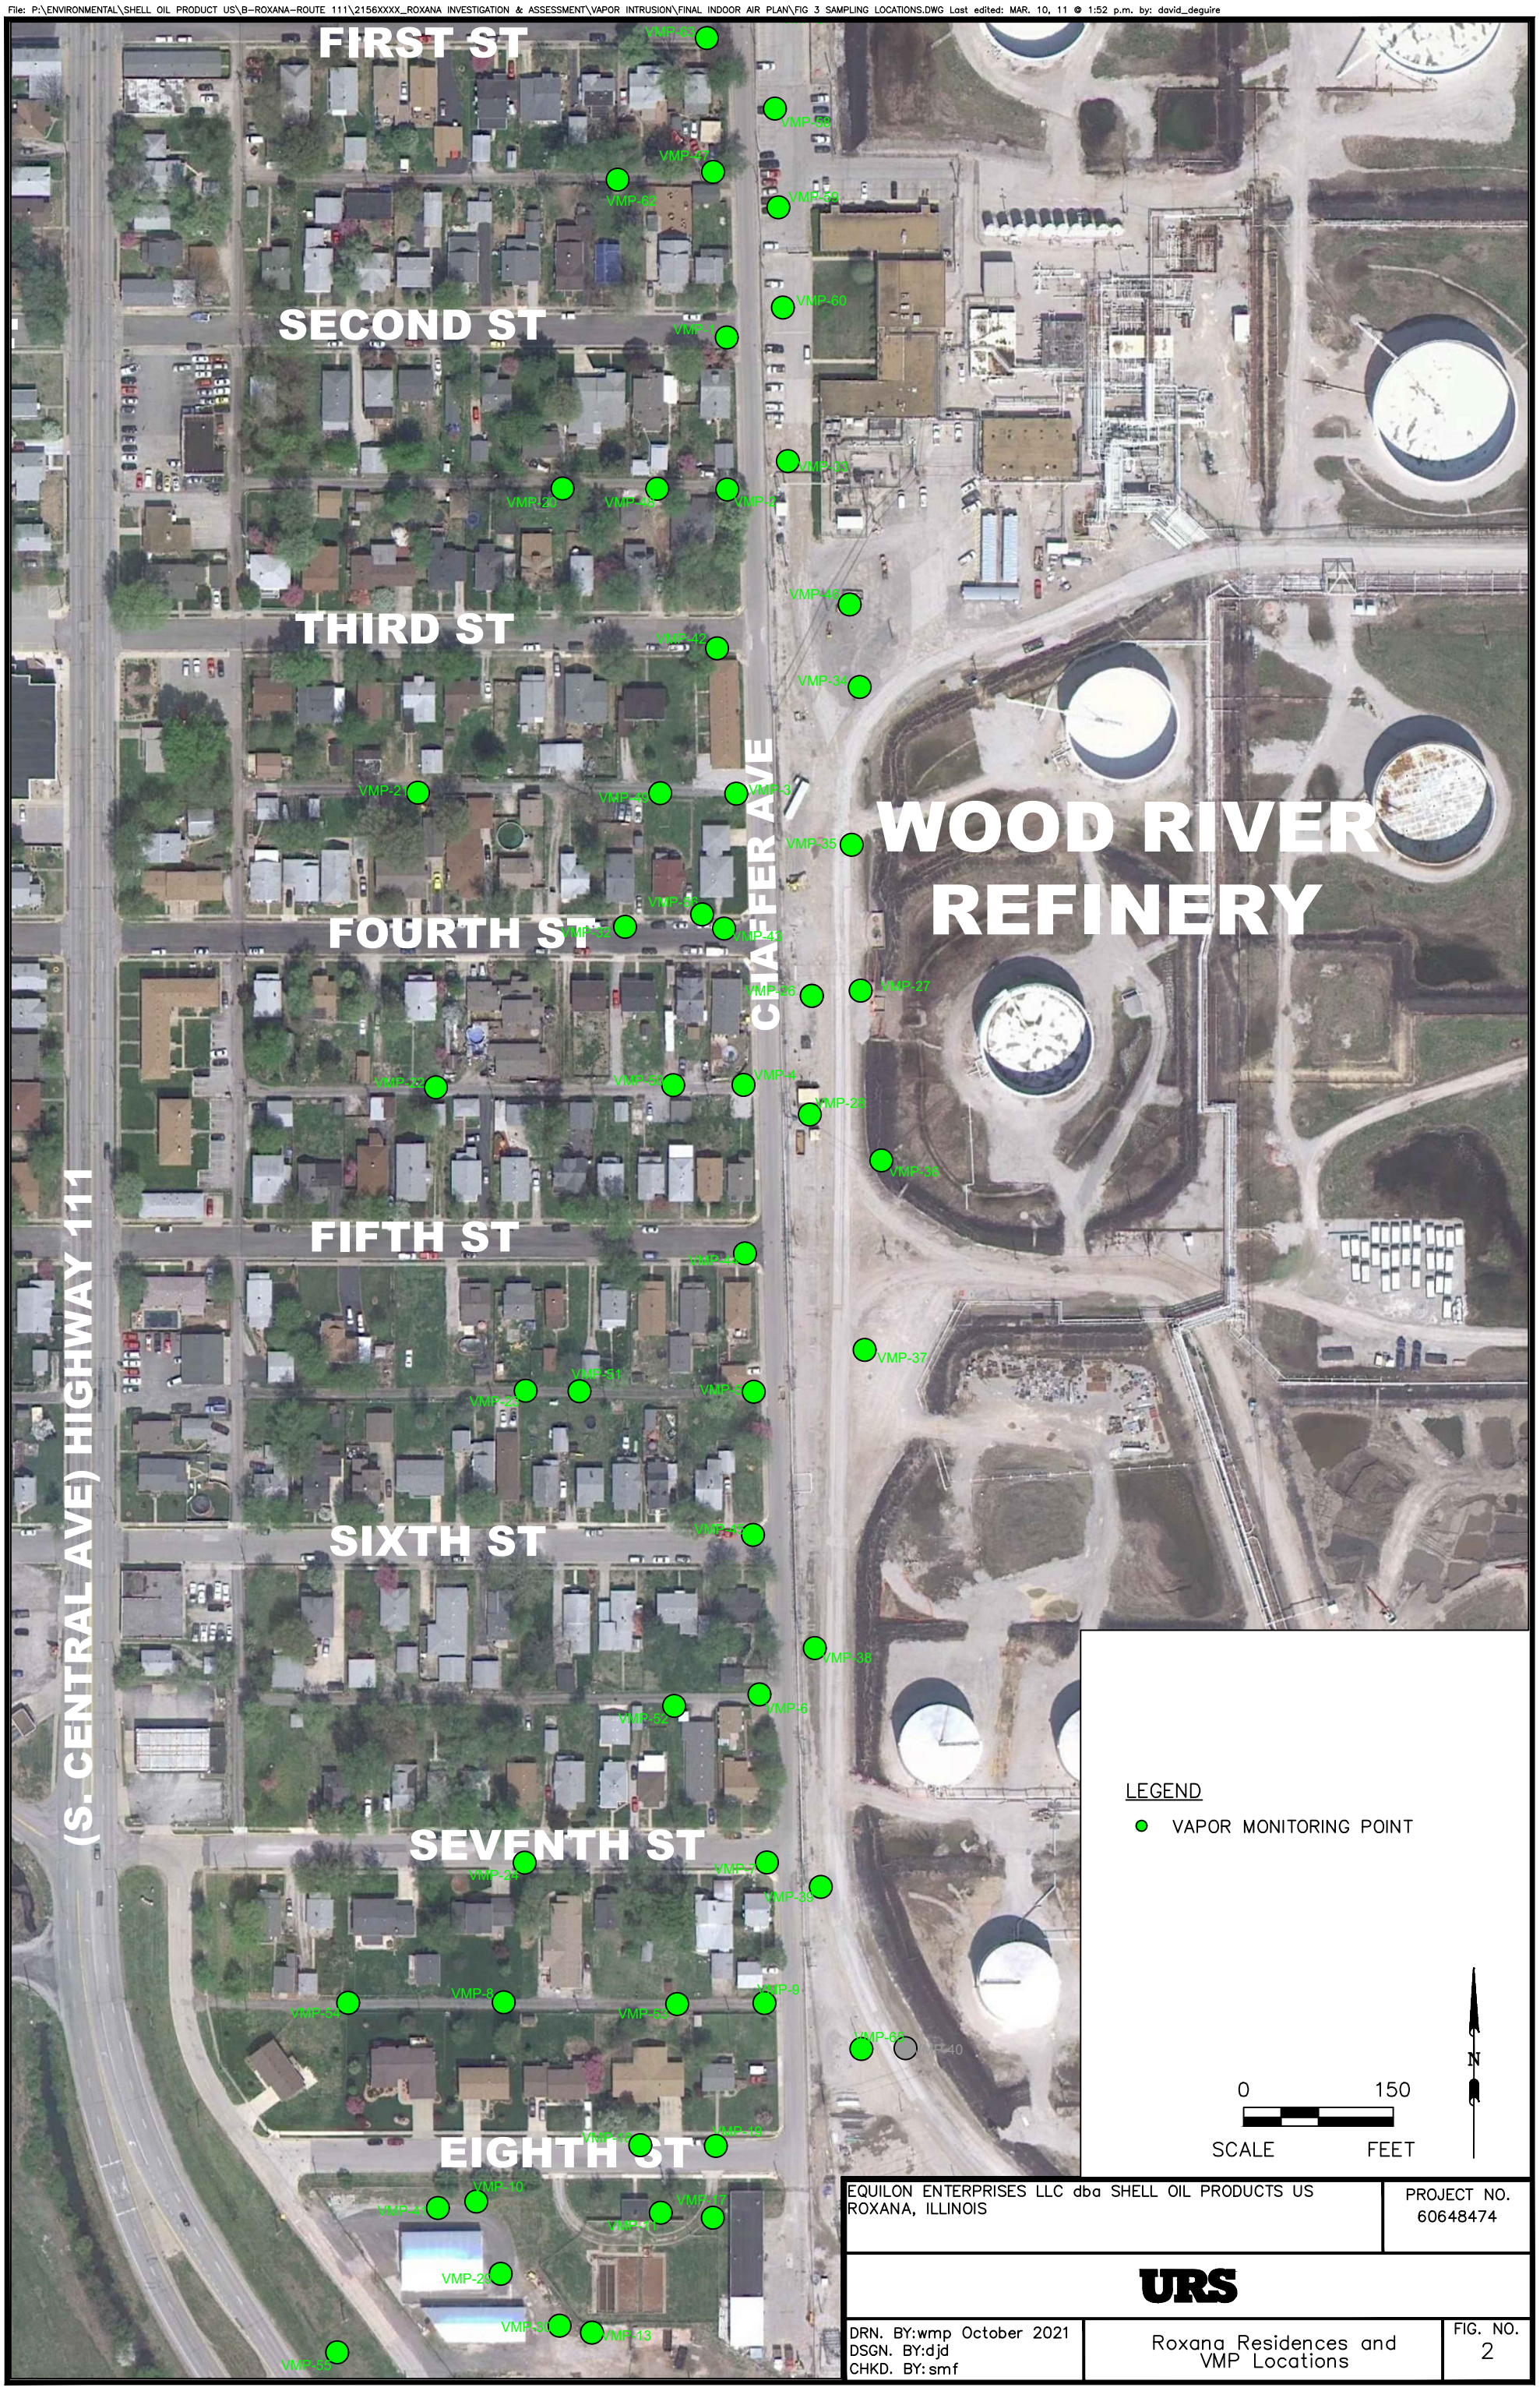

EQUILON ENTERPRISES LLC dba SHELL OIL PRODUCTS US ROXANA, ILLINOIS	PROJECT NO. 60648474
URS	
DRN. BY:wmp October 2021 DSGN. BY:djd CHKD. BY: smf	Roxana Residences and VMP Locations
	FIG. NO. 2

File: P:\ENVIRONMENTAL\SHELL OIL PRODUCT US\B-ROXANA-ROUTE 111\2156XXXX_ROXANA INVESTIGATION & ASSESSMENT\VAPOR INTRUSION\FINAL INDOOR AIR PLAN\FIG 3 SAMPLING LOCATIONS.DWG Last edited: MAR. 10, 11 @ 1:52 p.m. by: david_deguire

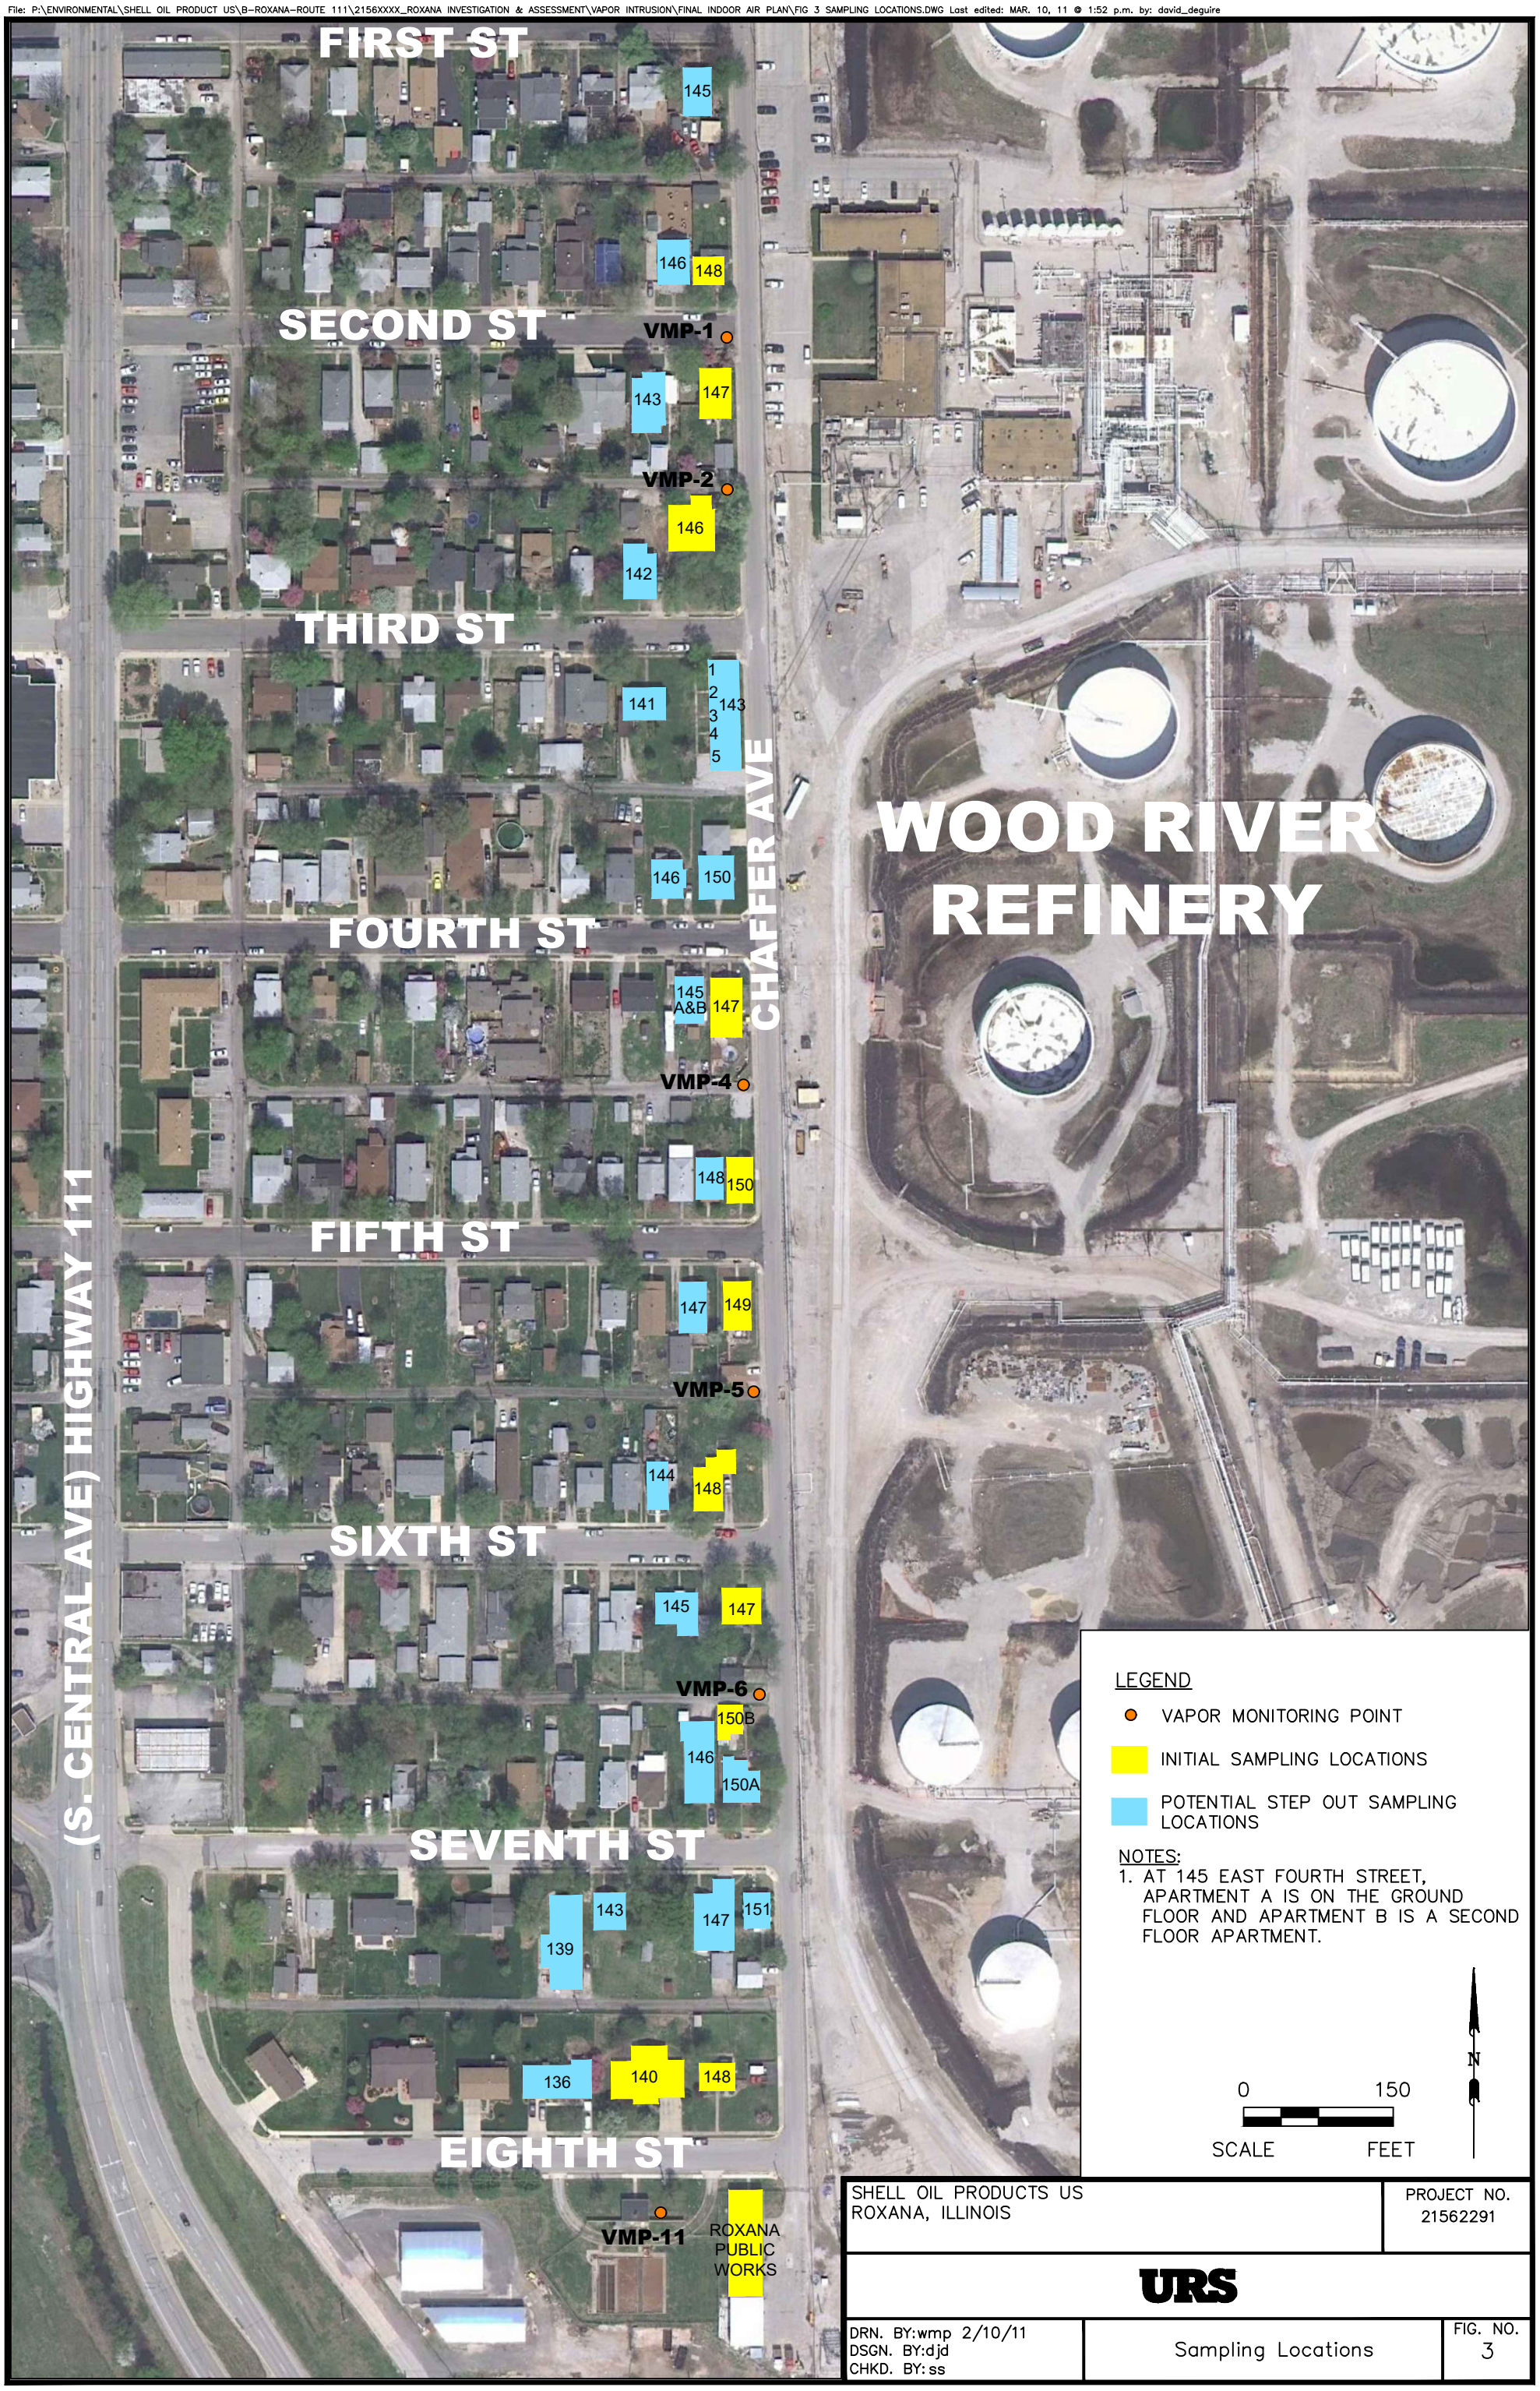

SHELL OIL PRODUCTS US ROXANA, ILLINOIS	PROJECT NO. 21562291
URS	
DRN. BY:wmp 2/10/11 DSGN. BY:djd CHKD. BY: ss	Sampling Locations — FIG. NO. 3

ATTACHMENT 1

REVISED APPENDIX 2-B TABLE 1 FROM ORIGINAL TIER 3 DEMONSTRATION SUBMITTAL

APPENDIX 2-B, TABLE 1 (rev. 1)
LITTLE, DAISEY, NAZAROFF MODEL INPUT PARAMETERS AND CALCULATIONS (RESIDENTIAL)

NOTES:
Little, Daisey, Nazaroff Model
Chemical Properties Sources :
USEPA RSL Chemical Specific Parameters in *Blue*, all others provided in TACO, Appendix C, Table E

	Symbol	Definition	Units	CAS: / Chemical:	67-64-1 Acetone	71-43-2 Benzene	100-44-7 Benzyl Chloride	75-27-4 Bromo-dichloro-methane	75-25-2 Bromoform	74-83-9 Bromomethane	106-99-0 Butadiene, 1,3-	78-93-3 2-Butanone	75-15-0 Carbon Disulfide	56-23-5 Carbon Tetrachloride	108-90-7 Chlorobenzene	67-66-3 Chloroform	74-87-3 Chloro-methane	110-82-7 Cyclo-hexane	106-93-4 Dibromo-ethane, 1,2-	95-50-1 Dichloro-benzene, 1,2-	106-46-7 Dichloro-benzene, 1,4-	75-71-8 Dichloro-difluoro-methane	75-34-3 Dichloro-ethane, 1,1-	75-35-4 Dichloro-ethylene, 1,1-	75-09-2 Dichloro-methane
TACO Values	RO_IA	Indoor Air RO	mg/m3		3.23E+01	3.12E-04	4.97E-05	6.58E-05	2.21E-03	5.21E-03	8.11E-05	5.21E+00	7.30E-01	4.06E-04	5.21E-02	1.06E-04	9.39E-02	6.26E+00	4.06E-06	0.209	2.21E-04	1.04E-01	1.52E-03	0.209	2.43E-01
Chemical Properties	MW	Molecular Weight	g/mol		*5.81E+01*	*7.81E+01*	*126.59*	*1.64E+02*	*252.73*	*94.94*	*54.09*	*7.21E+01*	*7.61E+01*	*153.82*	*112.56*	*1.19E+02*	*5.05E+01*	*8.42E+01*	*187.86*	*147.00*	*147.00*	*1.21E+02*	*98.96*	*96.94*	*8.49E+01*
	Da	Diffusivity in Air	cm2/sec		1.24E-01	8.80E-02	*6.34E-02*	5.61E-02	1.49E-02	7.28E-02	*1.00E-01*	8.08E-02	1.04E-01	7.80E-02	7.30E-02	1.04E-01	*1.24E-01*	*8.00E-02*	4.37E-02	6.90E-02	6.90E-02	7.60E-02	7.42E-02	9.00E-02	1.01E-01
	Dw	Diffusivity in Water	cm2/sec		1.14E-05	1.02E-05	*8.81E-06*	1.06E-05	1.03E-05	1.21E-05	*1.03E-05*	9.80E-06	1.00E-05	8.80E-06	8.70E-06	1.00E-05	*1.36E-05*	*9.11E-06*	8.44E-06	7.90E-06	7.90E-06	1.08E-05	1.05E-05	1.04E-05	1.17E-05
	H'	Henry's Law Constant	unitless		9.73E-04	1.34E-01	8.21E-03	3.71E-02	1.06E-02	1.79E-01	*2.180*	1.32E-03	8.06E-01	7.48E-01	7.93E-02	9.18E-02	*2.69E-01*	*3.64E+00*	1.54E-02	3.56E-02	4.69E-02	8.14E+00	1.42E-01	7.10E-01	5.70E-02
	H	Henry's Law Constant	atm-m3/mol		*3.50E-05*	*5.55E-03*	*4.12E-04*	*2.12E-03*	*5.35E-04*	*7.34E-03*	*7.36E-02*	*5.69E-05*	*1.44E-02*	*2.76E-02*	*3.11E-03*	*3.67E-03*	*8.82E-03*	*1.50E-01*	*6.50E-04*	*1.92E-03*	*2.41E-03*	*3.43E-01*	*5.62E-03*	*2.61E-02*	*3.25E-03*
	S	Water Solubility	mg/L		1.00E+06	1.80E+03	*5.25E+02*	6.70E+03	3.10E+03	1.50E+04	*7.35E+02*	2.20E+05	1.20E+03	7.90E+02	4.70E+02	7.90E+03	*5.32E+03*	*5.50E+01*	4.00E+03	1.56E+02	7.90E+01	2.80E+02	5.10E+03	2.30E+03	1.30E+04
	Koc	Organic carbon partition	cm3/g		0.78	50	*446.1*	50	91.2	10	*39.6*	2	63	200	200	50	*13.22*	*145.8*	50	575	790	61.7	32	50	13
	P	Vapor Pressure	mm Hg		230	95	*1.23*	50	5.51	1620	*2107*	95	360	120	12	200	*4,300*	*96.86*	13	1.36	1	4,850	230	600	430
Soil Properties	T	Temperature	°C		13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13	13
	"	"	°K		286	286	286	286	286	286	286	286	286	286	286	286	286	286	286	286	286	286	286	286	286
	θt	Total porosity	unitless		0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43
	θw	Water-filled porosity	unitless		0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	θa	Air-filled porosity	unitless		0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
Building Dimensions	L	Length	m		10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	W	Width	m		10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	H	Ceiling height	m		4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27
	LF	From ground to bottom of basement	m		2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
	A_B	Surface Area	m2		180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180
	Vbldg	Internal volume	m3		427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427
Building Ventilation	AER	Air changes per hour	hr^{-1}		0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53
	Qbldg	Air flow rate	m3/hr		226	226	226	226	226	226	226	226	226	226	226	226	226	226	226	226	226	226	226	226	226
Millington-Quirk Relationship	D_e	effective diffusivity	cm^2/sec		0.0098	0.0069	0.0050	0.0044	0.0012	0.0057	0.0078	0.0064	0.0081	0.0061	0.0057	0.0081	0.0097	0.0062	0.0034	0.0054	0.0054	0.0059	0.0058	0.0070	0.0079
	D_e	effective diffusivity	m^2/hr		0.0035	0.0025	0.0018	0.0016	0.0004	0.0020	0.0028	0.0023	0.0029	0.0022	0.0021	0.0029	0.0035	0.0022	0.0012	0.0019	0.0019	0.0021	0.0021	0.0025	0.0028
	Da	diffusivity in air	cm^2/sec		0.124	0.088	0.063	0.056	0.015	0.073	0.100	0.081	0.104	0.078	0.073	0.104	0.124	0.080	0.044	0.069	0.069	0.076	0.074	0.090	0.101
	q_a	air-filled porosity of soil	vol/vol		0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
	q_t	total porosity of soil	vol/vol		0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43

Calculated Tier 3 Soil Gas Attenuation Factors

Transport Distance (below assumed 6.6 feet (2 meter) basement depth) (ft)	(m)	Acetone	Benzene	Benzyl Chloride	Bromo-dichloro-methane	Bromoform	Bromomethane	Butadiene, 1,3-	2-Butanone	Carbon Disulfide	Carbon Tetrachloride	Chlorobenzene	Chloroform	Chloro-methane	Cyclo-hexane	Dibromo-ethane, 1,2-	Dichloro-benzene, 1,2-	Dichloro-benzene, 1,4-	Dichloro-difluoro-methane	Dichloro-ethane, 1,1-	Dichloro-ethylene, 1,1-	Dichloro-methane
3.44	1.05	2.67E-03	1.87E-03	1.35E-03	1.20E-03	3.20E-04	1.55E-03	2.14E-03	1.74E-03	2.22E-03	1.66E-03	1.56E-03	2.22E-03	2.64E-03	1.70E-03	9.32E-04	1.47E-03	1.47E-03	1.62E-03	1.58E-03	1.92E-03	2.15E-03

Calculated Tier 3 Soil Gas Remediation Objectives

Transport Distance (below assumed 6.6 feet (2 meter) basement depth) (ft)	(m)	Acetone mg/m3	Benzene mg/m3	Benzyl Chloride mg/m3	Bromo-dichloro-methane mg/m3	Bromoform mg/m3	Bromomethane mg/m3	Butadiene, 1,3- mg/m3	2-Butanone mg/m3	Carbon Disulfide mg/m3	Carbon Tetrachloride mg/m3	Chlorobenzene mg/m3	Chloroform mg/m3	Chloro-methane mg/m3	Cyclo-hexane mg/m3	Dibromo-ethane, 1,2- mg/m3	Dichloro-benzene, 1,2- mg/m3	Dichloro-benzene, 1,4- mg/m3	Dichloro-difluoro-methane mg/m3	Dichloro-ethane, 1,1- mg/m3	Dichloro-ethylene, 1,1- mg/m3	Dichloro-methane mg/m3
3.44	1.05	1.21E+04	1.66E-01	3.67E-02	5.50E-02	6.91E+00	3.36E+00	3.79E-02	2.99E+03	3.30E+02	2.44E-01	3.35E+01	4.78E-02	3.56E+01	3.67E+03	4.35E-03	1.42E+02	1.50E-01	6.42E+01	9.62E-01	1.09E+02	1.13E+02

Calculated Tier 3 LDN Screening Values

Transport Distance (below assumed 6.6 feet (2 meter) basement depth) (ft)	(m)	Acetone mg/m3	Benzene mg/m3	Benzyl Chloride mg/m3	Bromo-dichloro-methane mg/m3	Bromoform mg/m3	Bromomethane mg/m3	Butadiene, 1,3- mg/m3	2-Butanone mg/m3	Carbon Disulfide mg/m3	Carbon Tetrachloride mg/m3	Chlorobenzene mg/m3	Chloroform mg/m3	Chloro-methane mg/m3	Cyclo-hexane mg/m3	Dibromo-ethane, 1,2- mg/m3	Dichloro-benzene, 1,2- mg/m3	Dichloro-benzene, 1,4- mg/m3	Dichloro-difluoro-methane mg/m3	Dichloro-ethane, 1,1- mg/m3	Dichloro-ethylene, 1,1- mg/m3	Dichloro-methane mg/m3
3.44	1.05	12,000	0.17	0.04	0.06	6.90	3	0.038	3000	330	0.20	33	0.05	36	3700	0.004	140	0.20	64	1.00	110	110
C_v^{sat} Values		750,000	420,000	8,700	450,000	78,000	8,600,000	6,400,000	380,000	1,500,000	1,000,000	74,000	1,300,000	12,000,000	460,000	140,000	11,000	8,400	33,000,000	1,300,000	3,300,000	2,000,000

Chemicals of Potential Concern (COPCs)

This spreadsheet and all the information contained within is provided "as-is" for the intended sole use of the Illinois Environmental Protection Agency (IEPA) only. Any use or re-use of the electronic form of the spreadsheet is at the user's sole risk. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted in any form.

APPENDIX 2-B, TABLE 1 (rev. 1)
LITTLE, DAISEY, NAZAROFF MODEL INPUT PARAMETERS AND CALCULATIONS (RESIDENTIAL)

NOTES:
Little, Daisey, Nazaroff Model
Chemical Properties Sources :
USEPA RSL Chemical Specific Parameters in *Blue*, all others provided in TACO, Appendix C, Table E

	Symbol	Definition	Units	CAS:	78-87-5	542-75-6	542-75-6	123-91-1	100-41-4	75-00-3	107-06-2	142-82-5	87-68-3	110-54-3	591-78-6	98-82-8	108-10-1	1634-04-4	91-20-3	67-63-0	103-65-1	100-42-5	79-34-5	127-18-4
				Chemical:	Dichloro-propane, 1,2-	Dichloro-propene, 1,3-cis	Dichloro-propene, 1,3-trans	Dioxane, 1,4-	Ethyl-benzene	Ethyl Chloride (Chloro-ethane)	Ethylene dichloride (Dichloro-ethane, 1,2-)	Heptane, N-	Hexachloro-butadiene	Hexane	2-Hexanone	Isopropyl-benzene (Cumene)	4-Methyl-2-pentanone	Methyl tert-Butyl Ether (MTBE)	Naphthalene	2-Propanol (Isopropanol)	n-Propyl-benzene	Styrene	Tetrachloro-ethane, 1,1,2,2-	Tetrachloro-ethene
TACO Values	RO_IA	Indoor Air RO	mg/m3		6.58E-04	6.08E-04	6.08E-04	4.87E-04	9.73E-04	1.04E+01	9.36E-05	4.17E-01	1.11E-04	7.30E-01	3.13E-02	4.17E-01	3.13E+00	3.10E+00	7.16E-05	2.09E-01	1.04E+00	1.04E+00	4.20E-05	9.36E-03
Chemical Properties	MW	Molecular Weight	g/mol		*112.99*	*110.97*	*110.97*	*88.11*	*1.06E+02*	*64.52*	*98.96*	100.21	*260.76*	*8.62E+01*	*1.00E+02*	*1.20E+02*	*1.00E+02*	*88.15*	*1.28E+02*	*6.01E+01*	*1.20E+02*	*1.04E+02*	*167.85*	*1.66E+02*
	Da	Diffusivity in Air	cm2/sec		7.82E-02	6.26E-02	6.26E-02	2.29E-01	7.50E-02	*1.04E-01*	1.04E-02	*6.49E-02*	*2.67E-02*	*7.31E-02*	*7.04E-02*	6.50E-02	*6.98E-02*	8.59E-02	5.90E-02	*1.03E-01*	*6.02E-02*	7.10E-02	*4.89E-02*	7.20E-02
	Dw	Diffusivity in Water	cm2/sec		8.73E-06	1.00E-05	1.00E-05	1.02E-05	7.80E-06	*1.16E-05*	9.90E-06	*7.59E-06*	*7.03E-06*	*8.17E-06*	*8.44E-06*	7.10E-06	*8.35E-06*	1.10E-05	7.50E-06	*1.12E-05*	*7.83E-06*	8.00E-06	*9.29E-06*	8.20E-06
	H'	Henry's Law Constant	unitless		6.52E-02	3.98E-01	3.98E-01	1.07E-04	1.64E-01	3.12E-01	2.29E-02	8.18E+01	1.77E-01	*4.45E+01*	*1.93E-03*	2.10E+01	*2.93E-03*	1.50E-02	8.29E-03	*1.41E-04*	*2.00E-01*	5.48E-03	*7.43E-03*	4.00E-01
	H	Henry's Law Constant	atm-m3/mol		*2.82E-03*	*3.55E-03*	*3.55E-03*	*4.80E-06*	*7.88E-03*	*1.11E-02*	*1.18E-03*	2.00E+00	*1.03E-02*	*1.80E+00*	*9.32E-05*	*1.15E-02*	*1.38E-04*	*5.87E-04*	*1.97E-02*	*8.10E-06*	*1.05E-02*	*2.75E-03*	*3.67E-04*	*1.77E-02*
	S	Water Solubility	mg/L		2.80E+03	2.80E+03	2.80E+03	1.00E+06	1.70E+02	*6.71E+03*	8.50E+03	3.40E+00	*3.20E+00*	*9.50E+00*	*1.72E+04*	6.10E+01	*1.90E+04*	5.10E+04	3.10E+01	*1.00E+06*	*5.22E+01*	3.10E+02	*2.83E+03*	2.00E+02
	Koc	Organic carbon partition	cm3/g		50	20	20	0.72	320	*21.73*	20	*239.7*	*845.2*	*131.5*	*14.98*	1020	*12.6*	10.00	500	*1.53*	*813.1*	316	*94.94*	631
	P	Vapor Pressure	mm Hg		52	34	34	38.1	9.6	*1008*	79	46	*0.22*	*151.3*	*11.6*	4.5	*19.86*	250	8.50E-02	*45.42*	*3.42*	6.1	*4.62*	19
Soil Properties	T	Temperature	°C		13	13	13	13	13	25	13	25	13	13	13	13	13	13	13	13	13	13	25	13
	"	"	°K		286	286	286	286	286	298	286	298	286	286	286	286	286	286	286	286	286	286	298	286
	θt	Total porosity	unitless		0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43
	θw	Water-filled porosity	unitless		0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	θa	Air-filled porosity	unitless		0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
Building Dimensions	L	Length	m		10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	W	Width	m		10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0
	H	Ceiling height	m		4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27
	LF	From ground to bottom of basement	m		2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
	A_B	Surface Area	m2		180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180	180
	Vbldg	Internal volume	m3		427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427	427
Building Ventilation	AER	Air changes per hour	hr^{-1}		0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53
	Qbldg	Air flow rate	m3/hr		226	226	226	226	226	226	226	226	226	226	226	226	226	226	129	226	226	226	226	226
Millington-Quirk Relationship	D_e	effective diffusivity	cm^2/sec		0.0061	0.0049	0.0049	0.0188	0.0059	0.0081	0.0008	0.0051	0.0021	0.0057	0.0055	0.0051	0.0055	0.0067	0.0046	0.0088	0.0047	0.0056	0.0038	0.0056
	D_e	effective diffusivity	m^2/hr		0.0022	0.0018	0.0018	0.0068	0.0021	0.0029	0.0003	0.0018	0.0008	0.0021	0.0020	0.0018	0.0020	0.0024	0.0017	0.0032	0.0017	0.0020	0.0014	0.0020
	Da	diffusivity in air	cm^2/sec		0.078	0.063	0.063	0.229	0.075	0.104	0.010	0.065	0.027	0.073	0.070	0.065	0.070	0.086	0.059	0.103	0.060	0.071	0.049	0.072
	q_a	air-filled porosity of soil	vol/vol		0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28
	q_t	total porosity of soil	vol/vol		0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43

Calculated Tier 3 Soil Gas Attenuation Factors

Transport Distance (below assumed 6.6 feet (2 meter) basement depth)		Dichloro-propane, 1,2-	Dichloro-propene, 1,3-cis	Dichloro-propene, 1,3-trans	Dioxane, 1,4-	Ethyl-benzene	Ethyl Chloride (Chloro-ethane)	Ethylene dichloride (Dichloro-ethane, 1,2-)	Heptane, N-	Hexachloro-butadiene	Hexane	2-Hexanone	Isopropyl-benzene (Cumene)	4-Methyl-2-pentanone	Methyl tert-Butyl Ether (MTBE)	Naphthalene	2-Propanol (Isopropanol)	n-Propyl-benzene	Styrene	Tetrachloro-ethane, 1,1,2,2-	Tetrachloro-ethene
(ft)	(m)	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--
3.44	1.05	1.67E-03	1.33E-03	1.33E-03	5.13E-03	1.60E-03	2.21E-03	2.23E-04	1.38E-03	5.70E-04	1.56E-03	1.51E-03	1.38E-03	1.49E-03	1.83E-03	1.40E-03	2.41E-03	1.28E-03	1.52E-03	1.05E-03	1.53E-03

Calculated Tier 3 Soil Gas Remediation Objectives

Transport Distance (below assumed 6.6 feet (2 meter) basement depth)		Dichloro-propane, 1,2-	Dichloro-propene, 1,3-cis	Dichloro-propene, 1,3-trans	Dioxane, 1,4-	Ethyl-benzene	Ethyl Chloride (Chloro-ethane)	Ethylene dichloride (Dichloro-ethane, 1,2-)	Heptane, N-	Hexachloro-butadiene	Hexane	2-Hexanone	Isopropyl-benzene (Cumene)	4-Methyl-2-pentanone	Methyl tert-Butyl Ether (MTBE)	Naphthalene	2-Propanol (Isopropanol)	n-Propyl-benzene	Styrene	Tetrachloro-ethane, 1,1,2,2-	Tetrachloro-ethene
(ft)	(m)	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3
3.44	1.05	3.95E-01	4.56E-01	4.56E-01	9.49E-02	6.09E-01	4.71E+03	4.20E-01	3.02E+02	1.95E-01	4.69E+02	2.07E+01	3.01E+02	2.10E+03	1.69E+03	5.10E-02	8.67E+01	8.12E+02	6.86E+02	4.02E-02	6.10E+00

Calculated Tier 3 LDN Screening Values

Transport Distance (below assumed 6.6 feet (2 meter) basement depth)		Dichloro-propane, 1,2-	Dichloro-propene, 1,3-cis	Dichloro-propene, 1,3-trans	Dioxane, 1,4-	Ethyl-benzene	Ethyl Chloride (Chloro-ethane)	Ethylene dichloride (Dichloro-ethane, 1,2-)	Heptane, N-	Hexachloro-butadiene	Hexane	2-Hexanone	Isopropyl-benzene (Cumene)	4-Methyl-2-pentanone	Methyl tert-Butyl Ether (MTBE)	Naphthalene	2-Propanol (Isopropanol)	n-Propyl-benzene	Styrene	Tetrachloro-ethane, 1,1,2,2-	Tetrachloro-ethene
(ft)	(m)	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3
3.44	1.05	0.395	0.5	0.5	0.10	0.61	4700	0.42	300	0.20	470	21	300	2100	1700	0.05	87	810	690	0.040	6.1
C_v^{sat} Values		320,000	210,000	210,000	190,000	59,000	3,600,000	440,000	260,000	3,200	730,000	65,000	30,000	110,000	1,200,000	620	150,000	23,000	34,000	43,000	180,000

Chemicals of Potential Concern (COPCs)

APPENDIX 2-B, TABLE 1 (rev. 1)
LITTLE, DAISEY, NAZAROFF MODEL INPUT PARAMETERS AND CALCULATIONS (RESIDENTIAL)

NOTES:
Little, Daisey, Nazaroff Model
Chemical Properties Sources :
USEPA RSL Chemical Specific Parameters in *Blue*, all others provided in TACO, Appendix C, Table E

	Symbol	Definition	Units	CAS:	109-99-9	108-88-3	120-82-1	71-55-6	79-00-5	79-01-6	76-13-1	95-63-6	108-67-8	75-01-4	108-38-3	106-42-3	95-47-6	Comments
				Chemical:	Tetrahydro-furan	Toluene	Trichloro-benzene, 1,2,4-	Trichloro-ethane, 1,1,1-	Trichloro-ethane, 1,1,2-	Trichloro-ethene	Trichloro-1,2,2-trifluoro-ethane, 1,1,2-(Freon 113)	1,2,4-Trimethyl-benzene	1,3,5-Trimethyl-benzene	Vinyl Chloride	m-Xylenes	p-Xylenes	o-Xylenes	
TACO Values	RO_IA	Indoor Air RO	mg/m3		2.09E+00	5.21E+00	2.09E-03	5.21	2.10E-04	5.93E-04	5.21E+00	6.26E-02	6.26E-02	2.80E-04	1.04E-01	1.04E-01	1.04E-01	
Chemical Properties	MW	Molecular Weight	g/mol		*7.21E+01*	*9.21E+01*	*181.45*	*133.41*	*133.41*	*1.31E+02*	*187.38*	*1.20E+02*	*1.20E+02*	*62.50*	*1.06E+02*	*1.06E+02*	*1.06E+02*	USEPA RSL Chemical Specific Parameters in *Blue*,
	Da	Diffusivity in Air	cm2/sec		*9.94E-02*	8.70E-02	3.00E-02	7.80E-02	7.80E-02	7.90E-02	*3.76E-02*	*6.07E-02*	*6.02E-02*	*0.11*	7.00E-02	7.69E-02	8.70E-02	all others provided in TACO, Appendix C, Table E
	Dw	Diffusivity in Water	cm2/sec		*1.08E-05*	8.60E-06	8.23E-06	8.80E-06	8.80E-06	9.10E-06	*8.59E-06*	*7.92E-06*	*7.84E-06*	*1.23E-06*	7.80E-06	8.44E-06	1.00E-05	
	H'	Henry's Law Constant	unitless		*1.74E-03*	1.49E-01	2.38E-02	4.21E-01	1.98E-02	2.41E-01	*1.37E+01*	*1.15E-01*	*1.64E-01*	*8.14E-01*	1.52E-01	1.59E-01	1.07E-01	at 13 deg C / at 25 deg C
	H	Henry's Law Constant	atm-m3/mol		*7.05E-05*	*6.64E-03*	*1.42E-03*	*1.72E-02*	*8.24E-04*	*9.85E-03*	*5.26E-01*	*6.16E-03*	*8.77E-03*	*2.78E-02*	*7.18E-03*	*6.90E-03*	*5.18E-03*	at 25 deg C
	S	Water Solubility	mg/L		*1.00E+06*	5.30E+02	3.50E+01	1.30E+03	4.40E+03	1.50E+03	*1.70E+02*	*5.70E+01*	*4.82E+01*	*8.80E+03*	1.60E+02	1.60E+02	1.80E+02	
	Koc	Organic carbon partition	cm3/g		*10.75*	158	1580	126	50.1	100	*196.8*	*614.3*	*602.1*	*21.73*	398	316	316	
	P	Vapor Pressure	mm Hg		*162.2*	28	0.43	120	23	73	*362.5*	*2.1*	*2.48*	*2,980*	8.5	8.9	6.6	
Soil Properties	T	Temperature	°C		13	13	13	13	13	13	13	13	13	13	13	13	13	TACO, Appendix C, Table M J&E Parameters
	"	"	°K		286	286	286	286	286	286	286	286	286	286	286	286	286	TACO, Appendix C, Table M J&E Parameters
	θt	Total porosity	unitless		0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	TACO, Appendix C, Table M J&E Parameters
	θw	Water-filled porosity	unitless		0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15	TACO, Appendix C, Table M J&E Parameters
	θa	Air-filled porosity	unitless		0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	TACO, Appendix C, Table M J&E Parameters
Building Dimensions	L	Length	m		10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	= 100 cm
	W	Width	m		10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	= 100 cm
	H	Ceiling height	m		4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	4.27	= 427 cm
	LF	From ground to bottom of basement	m		2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	= 200 cm TACO
	A_B	Surface Area	m2		180	180	180	180	180	180	180	180	180	180	180	180	180	= Surface Area of Enclosed Space; TACO Appendic C, Table L Equation 12b = (LxW)+(2xLxH)+(2xWxH)
	Vbldg	Internal volume	m3		427	427	427	427	427	427	427	427	427	427	427	427	427	= L x W x H
Building Ventilation	AER	Air changes per hour	hr^{-1}		0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	0.53	TACO, Appendix C, Table M J&E Parameters
	Qbldg	Air flow rate	m3/hr		226	226	226	226	226	226	226	226	226	226	226	226	226	=4564 ft3/hr
Millington-Quirk Relationship	D_e	effective diffusivity	cm^2/sec		0.0078	0.0068	0.0023	0.0061	0.0061	0.0062	0.0029	0.0047	0.0047	0.0083	0.0055	0.0060	0.0068	TACO, Appendix C, Table C RBCA Equation R6
	D_e	effective diffusivity	m^2/hr		0.0028	0.0024	0.0008	0.0022	0.0022	0.0022	0.0011	0.0017	0.0017	0.0030	0.0020	0.0022	0.0024	
	Da	diffusivity in air	cm^2/sec		0.099	0.087	0.030	0.078	0.078	0.079	0.038	0.061	0.060	0.106	0.070	0.077	0.087	
	q_a	air-filled porosity of soil	vol/vol		0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	0.28	
	q_t	total porosity of soil	vol/vol		0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	0.43	

	Transport Distance (below assumed 6.6 feet (2 meter) basement depth)		Tetrahydro-furan	Toluene	Trichloro-benzene, 1,2,4-	Trichloro-ethane, 1,1,1-	Trichloro-ethane, 1,1,2-	Trichloro-ethene	Trichloro-1,2,2-trifluoro-ethane, 1,1,2-(Freon 113)	1,2,4-Trimethyl-benzene	1,3,5-Trimethyl-benzene	Vinyl Chloride	m-Xylenes	p-Xylenes	o-Xylenes	
	(ft)	(m)	--	--	--	--	--	--	--	--	--	--	--	--	--	
Calculated Tier 3 Soil Gas Attenuation Factors	3.44	1.05	2.13E-03	1.85E-03	6.40E-04	1.66E-03	1.66E-03	1.68E-03	8.00E-04	1.29E-03	1.28E-03	2.26E-03	1.49E-03	1.64E-03	1.85E-03	
Calculated Tier 3 Soil Gas Remediation Objectives			Tetrahydro-furan	Toluene	Trichloro-benzene, 1,2,4-	Trichloro-ethane, 1,1,1-	Trichloro-ethane, 1,1,2-	Trichloro-ethene	Trichloro-1,2,2-trifluoro-ethane, 1,1,2-(Freon 113)	1,2,4-Trimethyl-benzene	1,3,5-Trimethyl-benzene	Vinyl Chloride	m-Xylenes	p-Xylenes	o-Xylenes	
	(ft)	(m)	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	
	3.44	1.05	9.80E+02	2.81E+03	3.27E+00	3.14E+03	1.26E-01	3.52E-01	6.51E+03	4.84E+01	4.88E+01	1.24E-01	6.97E+01	6.35E+01	5.61E+01	
Calculated Tier 3 LDN Screening Values			Tetrahydro-furan	Toluene	Trichloro-benzene, 1,2,4-	Trichloro-ethane, 1,1,1-	Trichloro-ethane, 1,1,2-	Trichloro-ethene	Trichloro-1,2,2-trifluoro-ethane, 1,1,2-(Freon 113)	1,2,4-Trimethyl-benzene	1,3,5-Trimethyl-benzene	Vinyl Chloride	m-Xylenes	p-Xylenes	o-Xylenes	
	(ft)	(m)	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	mg/m3	
	3.44	1.05	980	2800	3.3	3100	0.1	0.35	6500	48	49	0.1	70	63	56	Tier 3 Screening Criteria
C_v^{sat} Values			630,000	140,000	4,400	870,000	170,000	530,000	3,800,000	14,000	17,000	11,000,000	52,000	55,000	41,000	TACO Default Value or Calculated using J&E Equation 5


Chemicals of Potential Concern (COPCs)

ATTACHMENT 2

REVISED CHARTS 1, 3, 4, 6, 7, 8 AND 9 FROM ORIGINAL TIER 3 DEMONSTRATION SUBMITTAL

Chart 1 (rev. 1)

Benzene Concentration at VMPS in Village of Roxana
Compared to Proposed [recalculated] Tier 3 Remdiation Objectives
(1Q15 - 1Q21)

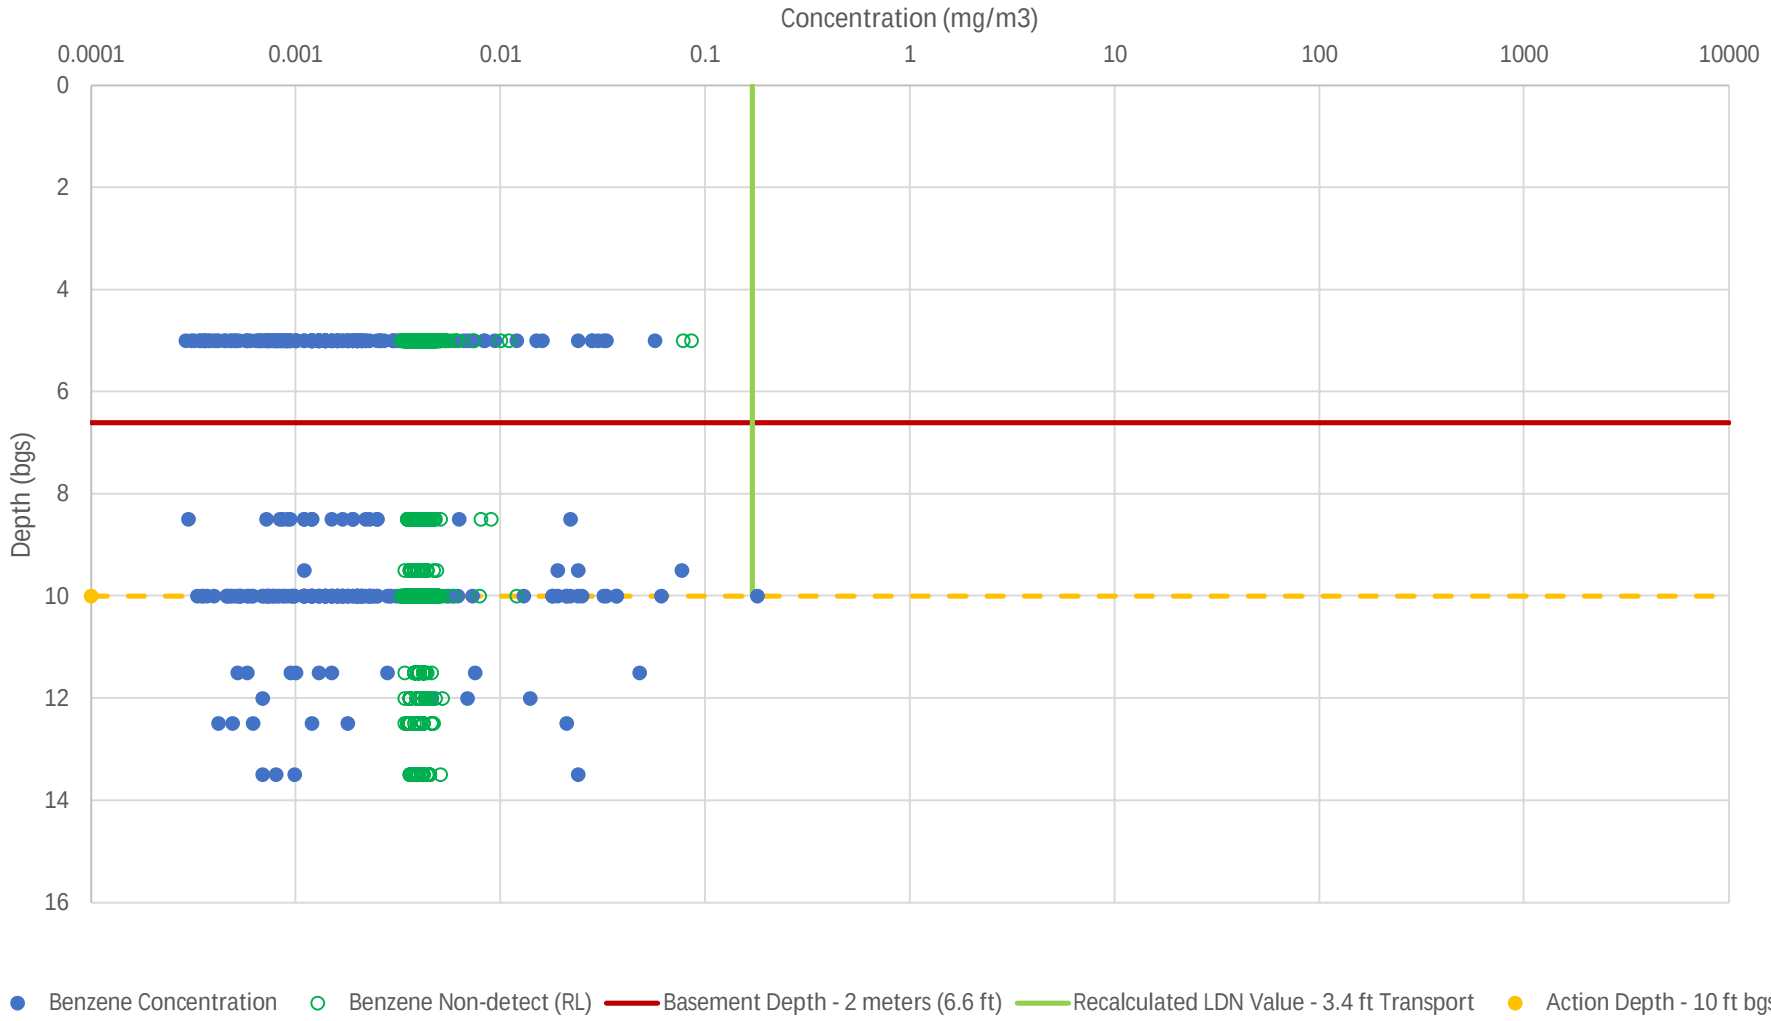

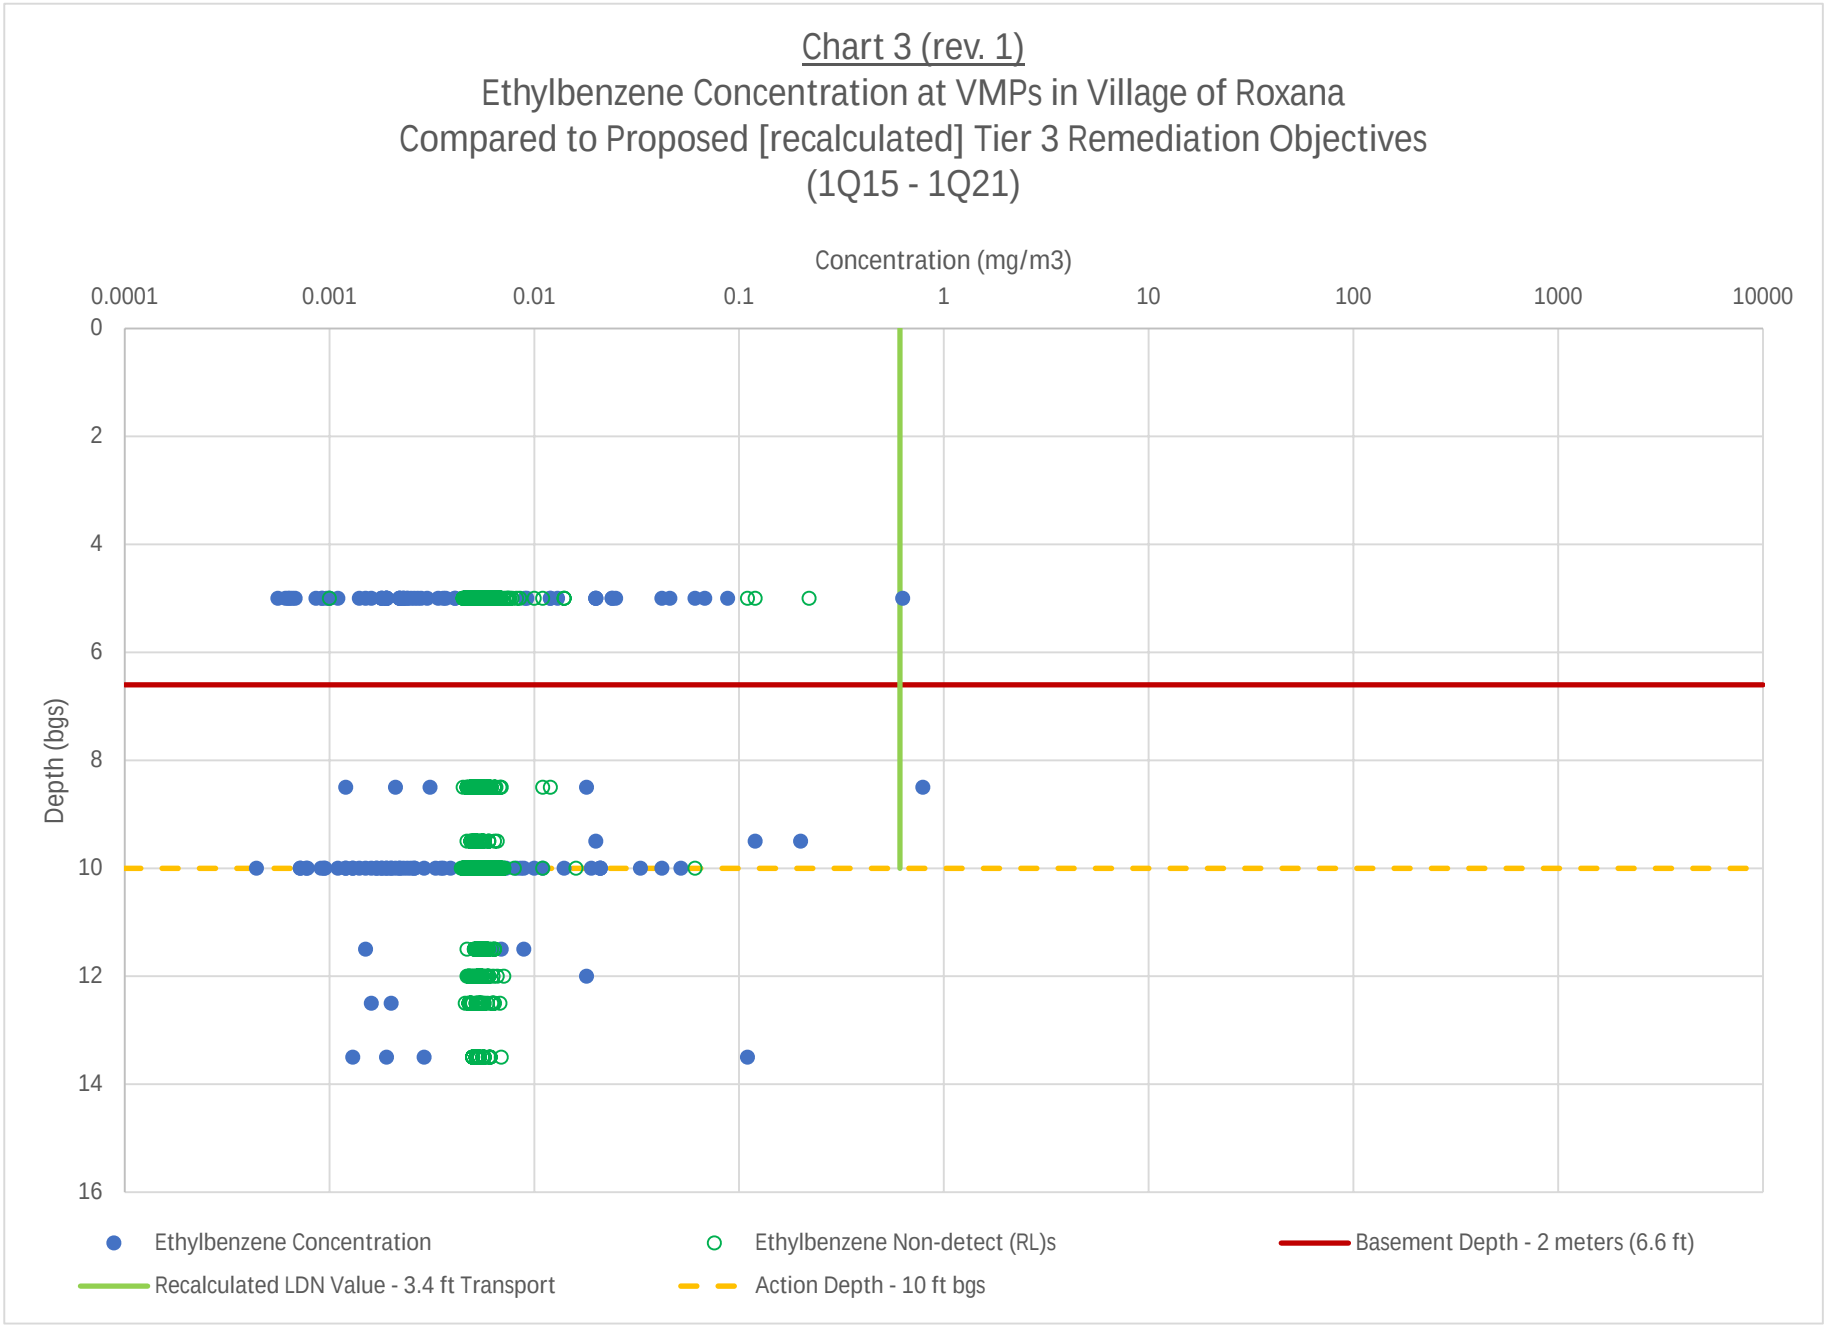

Chart 3 (rev. 1)
Ethylbenzene Concentration at VMPs in Village of Roxana
Compared to Proposed [recalculated] Tier 3 Remediation Objectives
(1Q15 - 1Q21)
Concentration (mg/m3)
0.0001
0.001
0.01
0.1
1
10
100
1000
10000
Depth (bgs)
0
2
4
6
8
10
12
14
16
Ethylbenzene Concentration
Ethylbenzene Non-detect (RL)s
Basement Depth - 2 meters (6.6 ft)
Recalculated LDN Value - 3.4 ft Transport
Action Depth - 10 ft bgs

Chart 4 (rev. 1)

Hexane Concentration at VMPs in Village of Roxana
Compared to Proposed [recalculated] Tier 3 Remediation Objectives
(1Q15 - 1Q21)

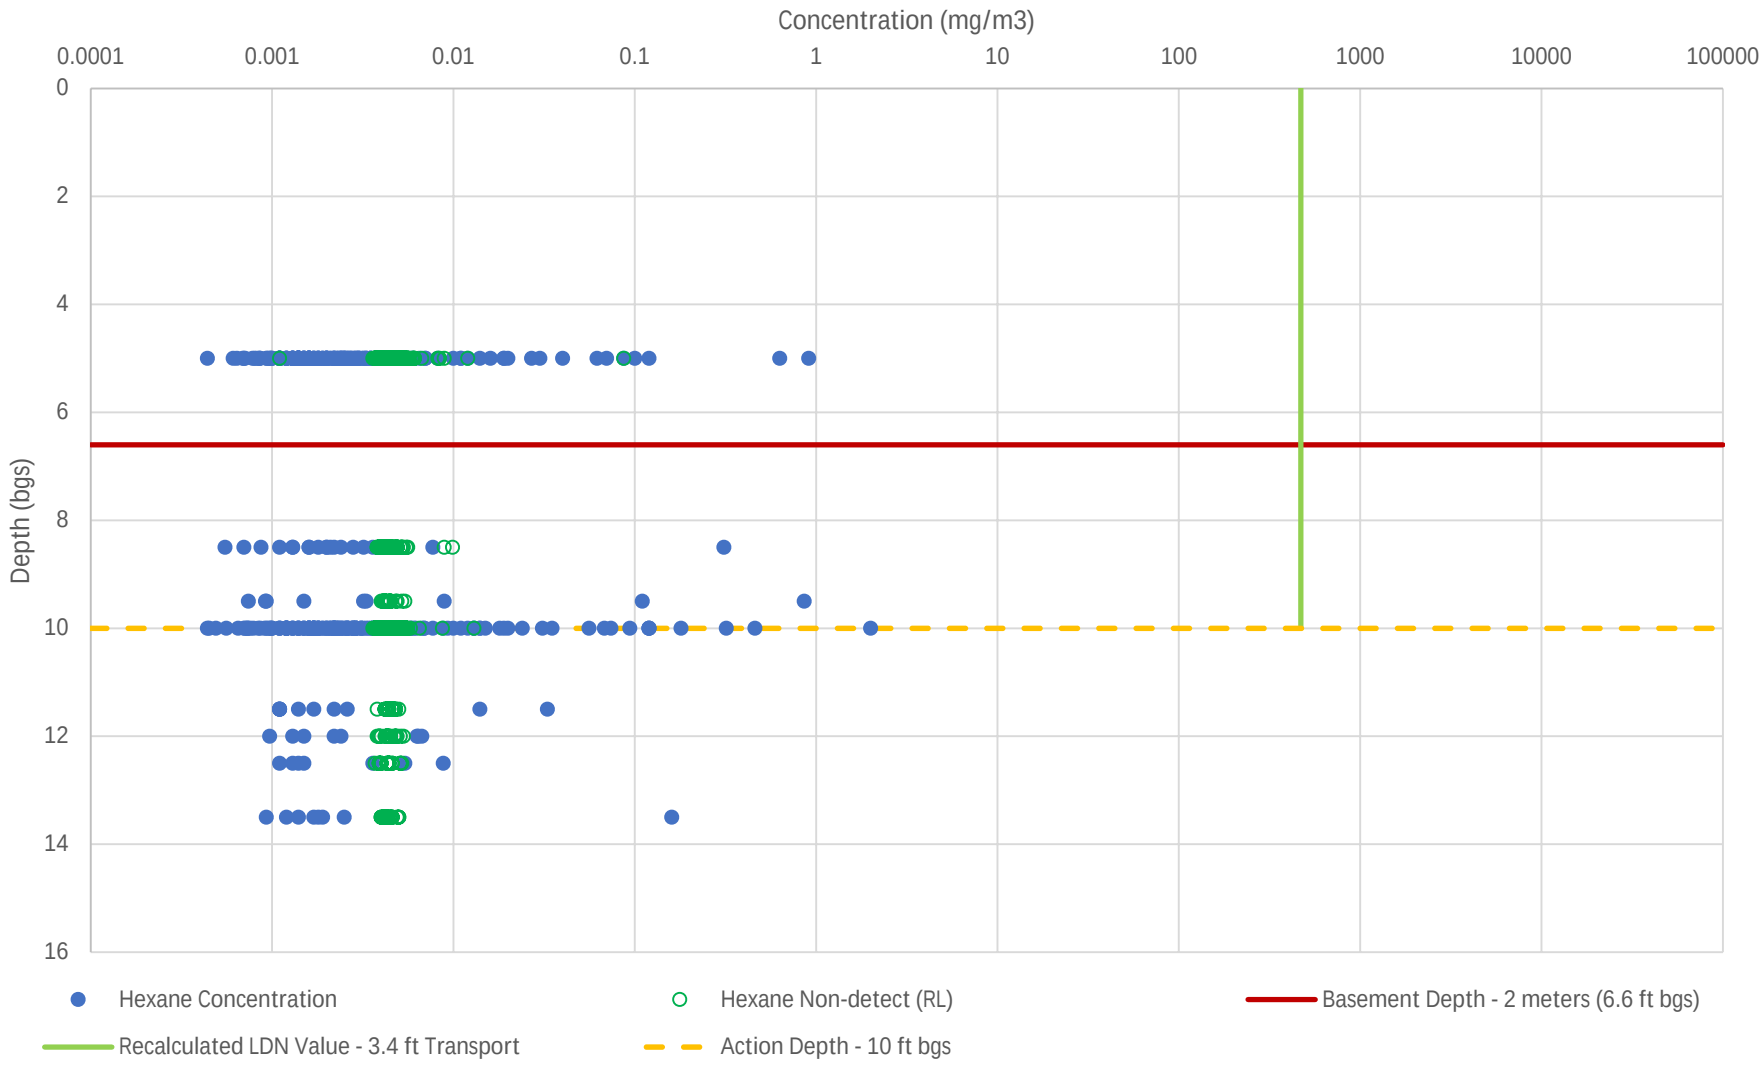


Chart 6 (rev. 1)

1,2,4-Trimethylbenzene Concentration at VMPs in Village of Roxana Compared to Proposed [recalculated] Tier 3 Remediation Objectives (1Q15 - 1Q21)

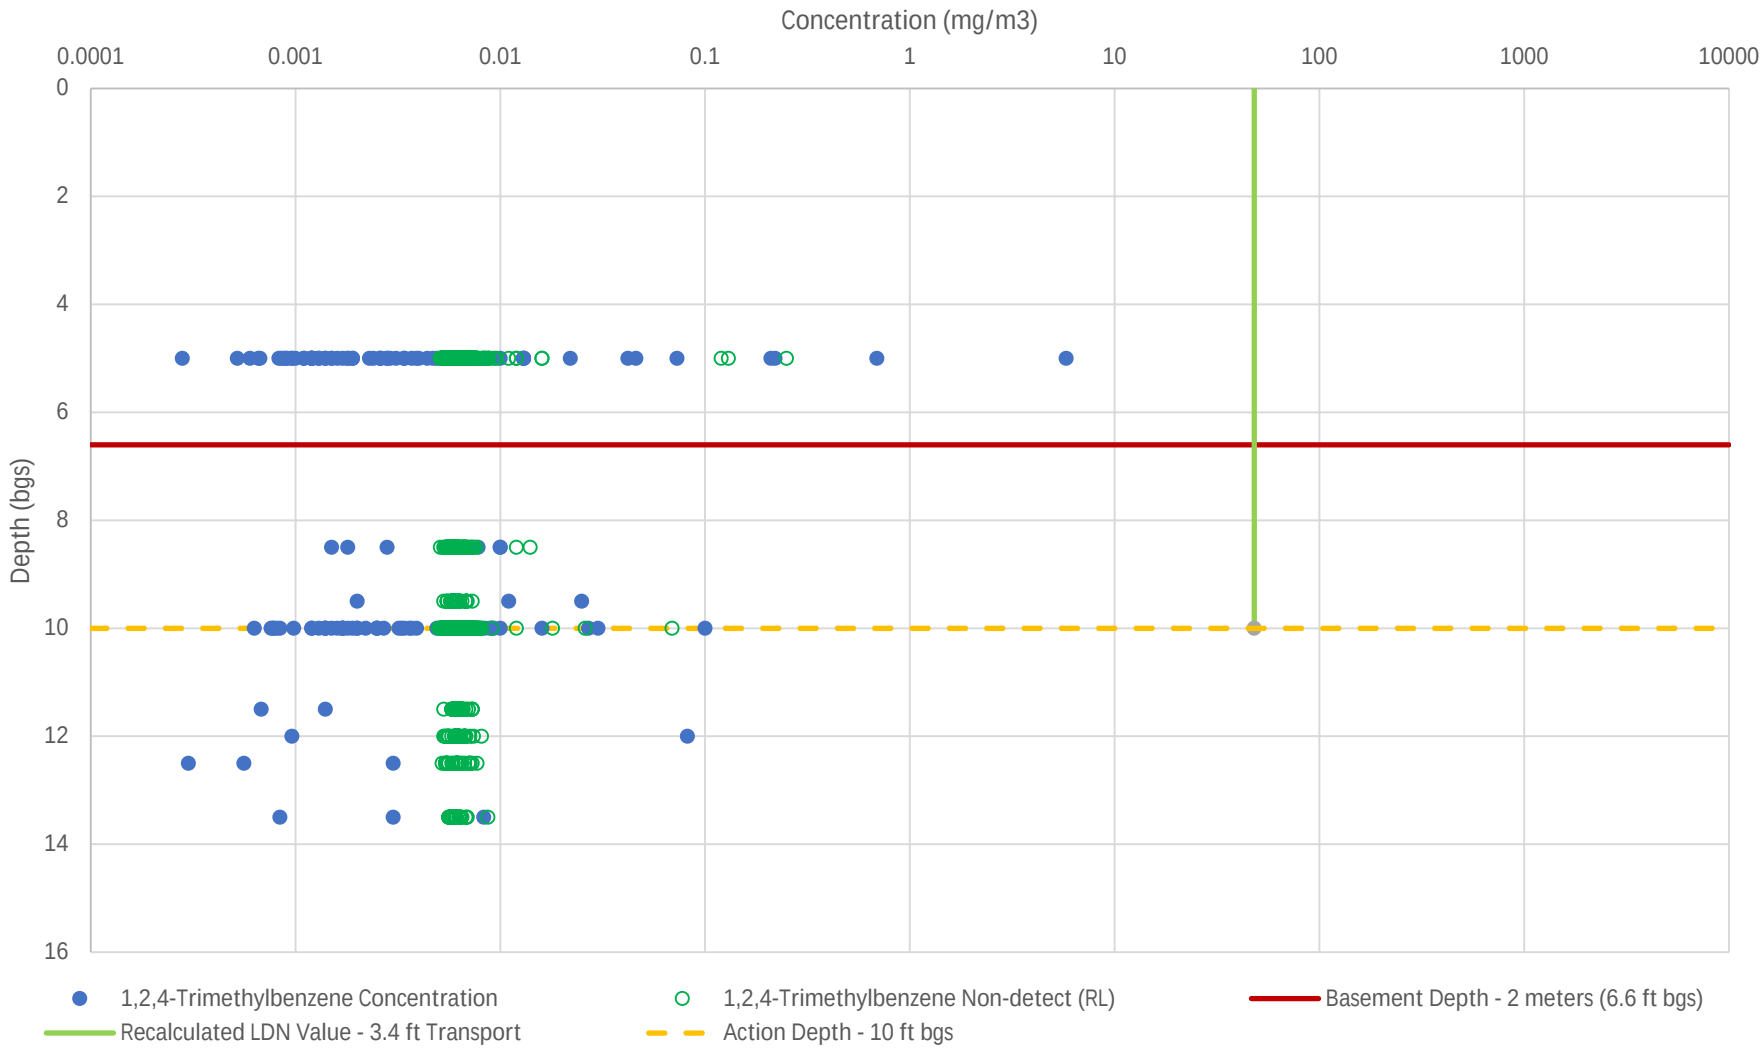


Chart 7 (rev. 1)

1,3,5-Trimethylbenzene Concentration at VMPs in Village of Roxana Compared to Proposed [recalculated] Tier 3 Remediation Objectives (1Q15 - 1Q21)

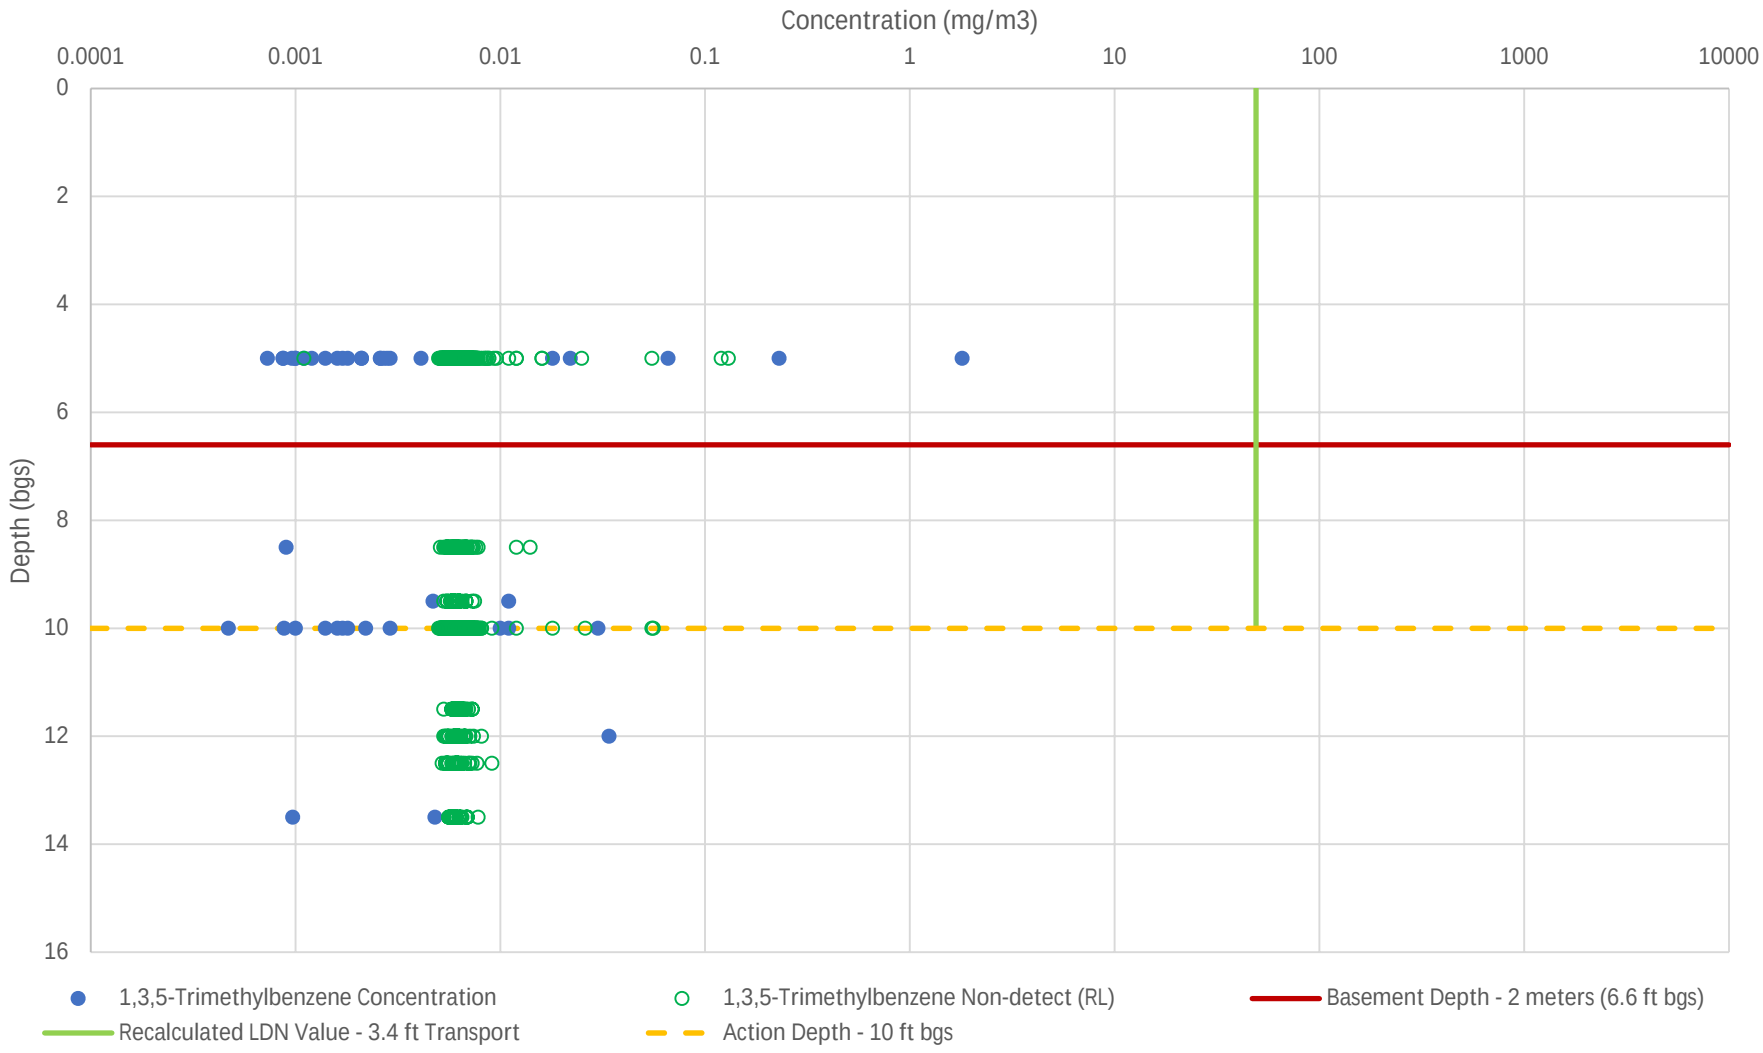


Chart 8 (rev. 1)

m,p-Xylenes Concentration at VMPs in Village of Roxana Compared to Proposed [recalculated] Tier 3 Remediation Objectives (1Q15 - 1Q21)


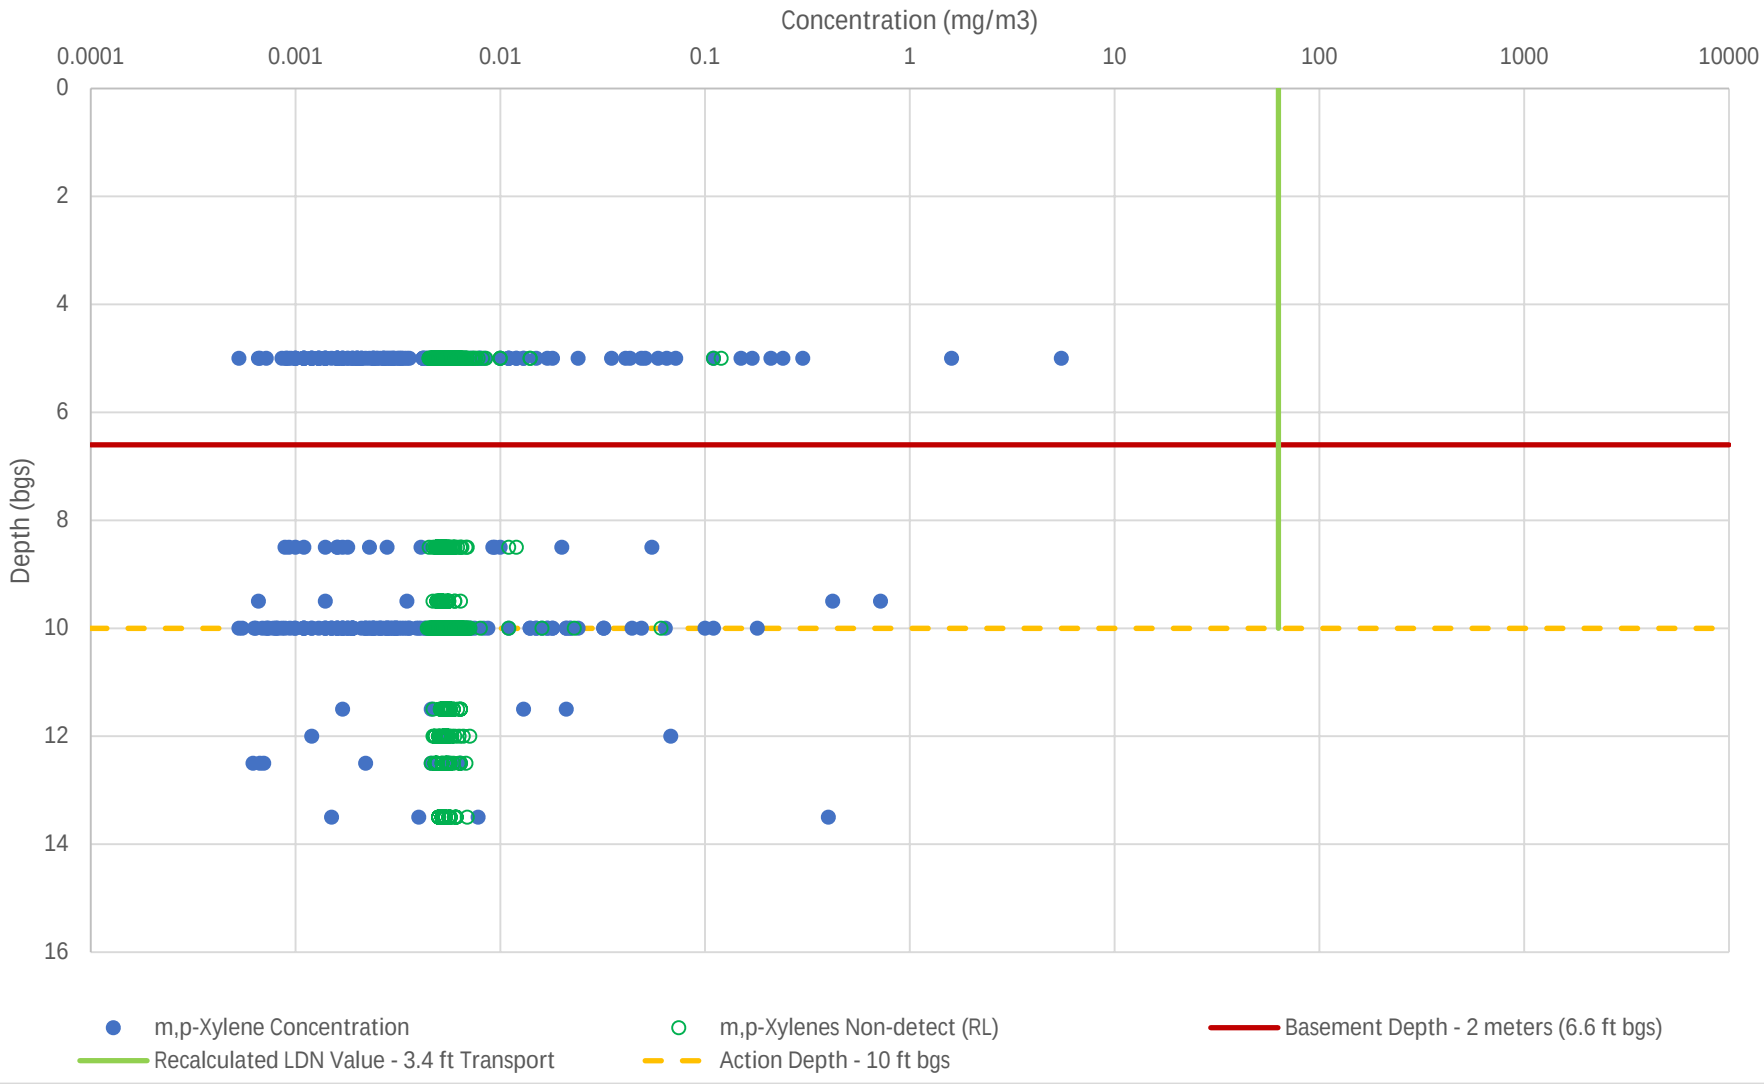


Chart 9 (rev. 1)

o-Xylene Concentration at VMPs in Village of Roxana Compared to Proposed Tier 3 Remediation Objectives (1Q15 - 1Q21)

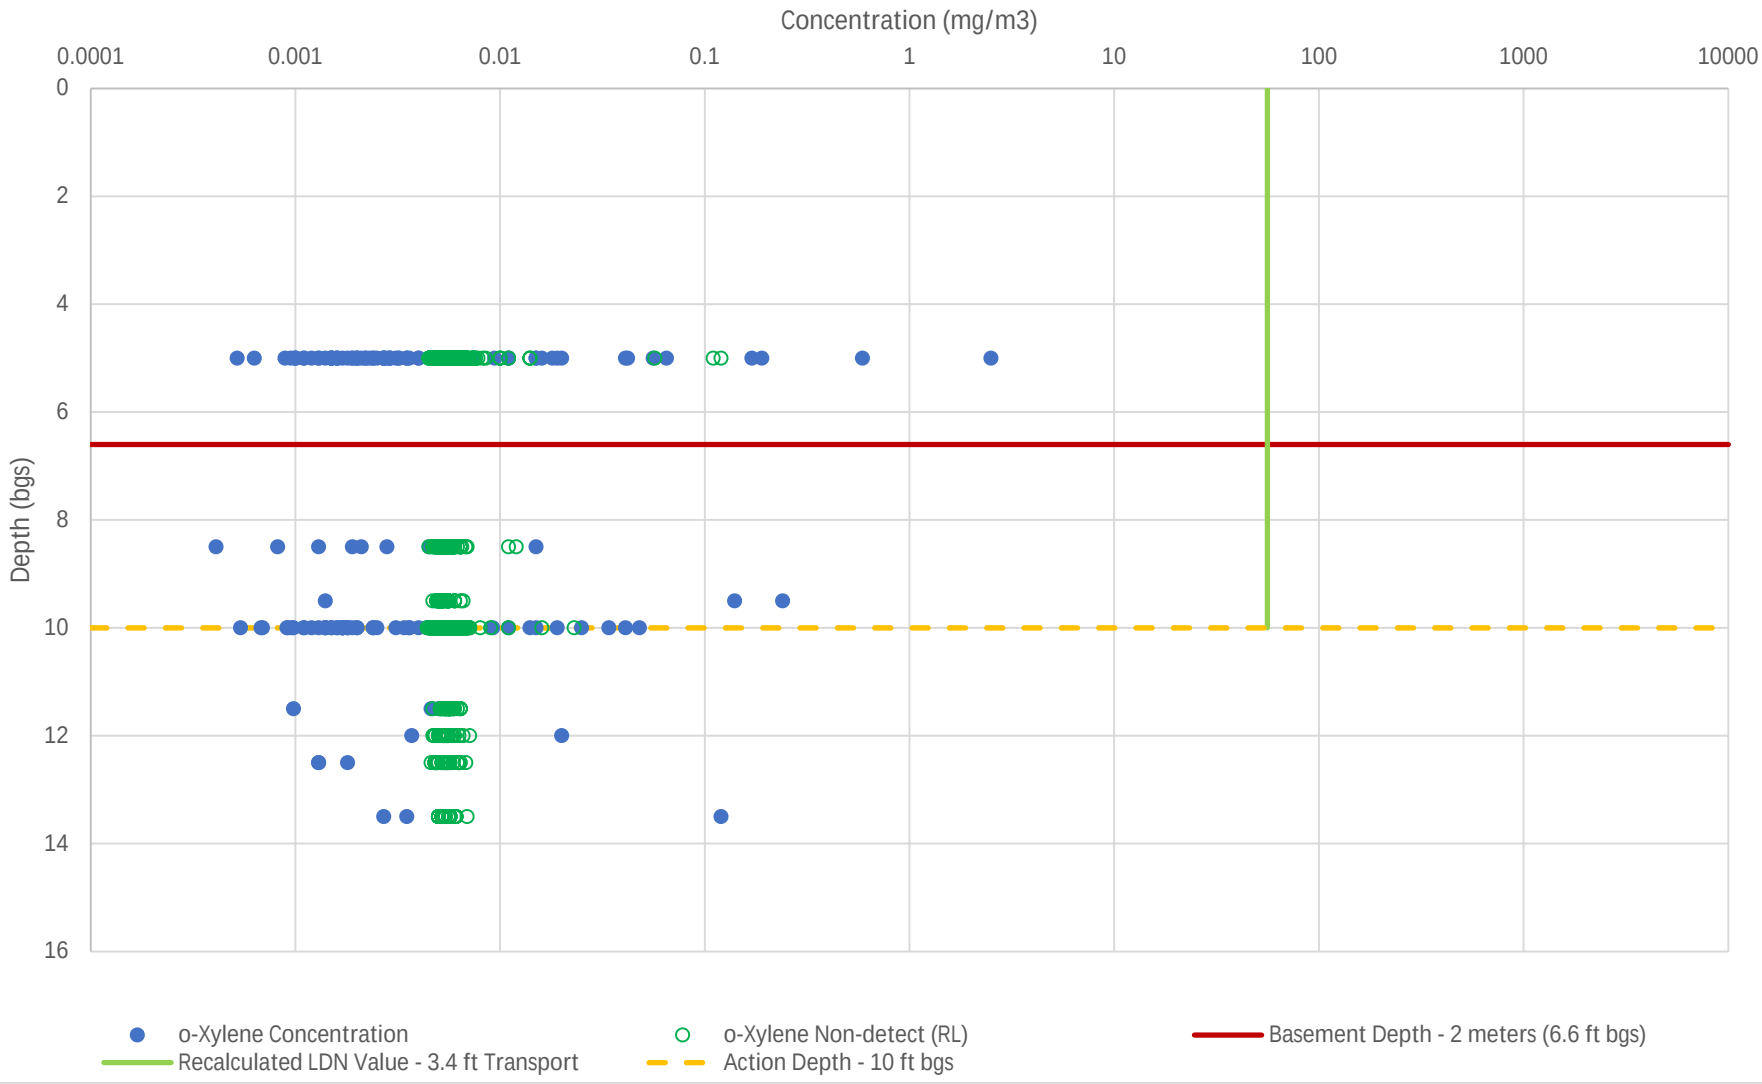

ATTACHMENT 3

SOIL VAPOR ANALYTICAL DETECTIONS COMPARED TO RECALCULATED REMEDIATION OBJECTIVES - VILLAGE OF ROXANA AND PUBLIC WORKS YARD

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	**0.0094**	J		**0.00073**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0057	J		<0.014	U	
		VMP-1-5-050515	5/5/2015	**0.03**	J		**0.0048**			<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		**0.044**		
		VMP-1-5-073015	7/30/2015	**0.028**	J		**0.0025**	J		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.015**	J	
		VMP-1-5-110315	11/3/2015	**0.03**	J		**0.0016**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.018**		
		VMP-1-5-020316	2/3/2016	<0.031	J	U	**0.0014**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0058**	J	
		VMP-1-5-050316	5/3/2016	**0.0069**	J		**0.0012**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0022**	J	
		VMP-1-5-072516	7/25/2016	**0.024**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-1-5-102816	10/28/2016	**0.02**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-1-5-012517	1/25/2017	**0.011**	J		**0.00079**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-1-5-042817	4/28/2017	<0.03	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0058**	J	
		VMP-1-5-072417	7/24/2017	**0.033**			**0.0021**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0091**	J	
		VMP-1-5-102617	10/26/2017	**0.021**	J		**0.00066**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0062**	J	
		VMP-1-5-012618	1/26/2018	**0.014**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0037**	J	
		VMP-1-5-042718	4/27/2018	**0.031**			**0.00088**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0037**	J	
		VMP-1-5-071818	7/18/2018	**0.021**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0034**	J	
		VMP-1-5-102218	10/22/2018	**0.031**			**0.0014**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.017			**0.0042**	J	
		VMP-1-5-012319	1/23/2019	**0.019**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0053	J		<0.013	U	
		VMP-1-5-043019	4/30/2019	**0.015**	J		**0.00084**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0022	J		<0.015	U	
		VMP-1-5-072319	7/23/2019	**0.02**	J		**0.0016**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-1-5-102419	10/24/2019	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-5-012720	1/27/2020	**0.0062**	J	J	<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-1-5-042420	4/24/2020	**0.0096**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0028	J		<0.016	U	
		VMP-1-5-072820	7/28/2020	**0.013**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0016**	J	
		VMP-1-5-110220	11/2/2020	**0.01**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-1-5-012921	1/29/2021	**0.0098**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	**0.012**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-1-8.5-050515	5/5/2015	**0.028**	J		**0.0025**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.034**		
		VMP-1-8.5-073015	7/30/2015	**0.026**	J		<0.0044	J	U	<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0078**	J	
		VMP-1-8.5-110315	11/3/2015	**0.016**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	J	U
		VMP-1-8.5-020316	2/3/2016	<0.033	J	U	**0.0017**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0029**	J	
		VMP-1-8.5-050316	5/3/2016	**0.017**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0058**	J	
		VMP-1-8.5-072516	7/25/2016	**0.045**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0069	J		**0.0089**	J	
		VMP-1-8.5-102816	10/28/2016	**0.025**	J		**0.0019**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.019			**0.011**	J	
		VMP-1-8.5-012517	1/25/2017	**0.044**			**0.00086**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.017**		
		VMP-1-8.5-042817	4/28/2017	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-1-8.5-072417	7/24/2017	**0.03**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.01**	J	
		VMP-1-8.5-102617	10/26/2017	**0.018**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.0058	J		**0.0033**	J	
		VMP-1-8.5-012418	1/24/2018	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-1-8.5-042718	4/27/2018	**0.012**	J		**0.00072**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0031**	J	
		VMP-1-8.5-071818	7/18/2018	**0.046**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0072**	J	
		VMP-1-8.5-102218	10/22/2018	**0.0082**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-1-8.5-012319	1/23/2019	**0.014**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-1-8.5-043019	4/30/2019	**0.033**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0043**	J	
		VMP-1-8.5-072319	7/23/2019	**0.012**	J		**0.0019**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-1-8.5-102419	10/24/2019	**0.014**	J		<0.009	U		<0.019	U		<0.029	U		<0.11	U		<0.0062	U		<0.027	U		<0.033	U	
		VMP-1-8.5-102419-DUP	10/24/2019	**0.011**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-8.5-111519R	11/15/2019	**0.0043**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-8.5-012720	1/27/2020	**0.0062**	J	J	<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-1-8.5-042420	4/24/2020	**0.015**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0023	J		<0.015	U	
		VMP-1-8.5-072820	7/28/2020	**0.024**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0019**	J	
		VMP-1-8.5-110220	11/2/2020	**0.012**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-8.5-012921	1/29/2021	**0.0058**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-1-5-050515	5/5/2015	**0.0019**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-1-5-073015	7/30/2015	<0.017	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.0029**	J		<0.028	U		<0.0069	U	
		VMP-1-5-110315	11/3/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0084**			<0.029	U		<0.0072	U	
		VMP-1-5-020316	2/3/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0018**	J		<0.027	U		<0.0068	U	
		VMP-1-5-050316	5/3/2016	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0017**	J		<0.027	U	UJ	<0.0068	U	
		VMP-1-5-072516	7/25/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0068**			<0.028	U		<0.0071	U	
		VMP-1-5-102816	10/28/2016	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0057**	J		<0.025	U		<0.0062	U	
		VMP-1-5-012517	1/25/2017	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0011**	J		<0.028	U		<0.007	U	
		VMP-1-5-042817	4/28/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-1-5-072417	7/24/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.004**	J		<0.026	U		<0.0064	U	
		VMP-1-5-102617	10/26/2017	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0034**	J		<0.024	U		<0.006	U	
		VMP-1-5-012618	1/26/2018	**0.0022**	J		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		**0.00079**	J		<0.023	U		<0.0057	U	
		VMP-1-5-042718	4/27/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-1-5-071818	7/18/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0022**	J		<0.025	U		<0.0062	U	
		VMP-1-5-102218	10/22/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0025**	J		<0.026	U		<0.0066	U	
		VMP-1-5-012319	1/23/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-1-5-043019	4/30/2019	**0.0025**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-1-5-072319	7/23/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0031**	J		<0.028	U		<0.007	U	
		VMP-1-5-102419	10/24/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-1-5-012720	1/27/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U	UJ	<0.0064	U	
		VMP-1-5-042420	4/24/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-1-5-072820	7/28/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0018**	J		<0.024	U		<0.0062	U	
		VMP-1-5-110220	11/2/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0014**	J		<0.027	U		<0.0067	U	
		VMP-1-5-012921	1/29/2021	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-1-8.5-050515	5/5/2015	**0.058**			<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-1-8.5-073015	7/30/2015	**0.011**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0013**	J		<0.028	U		<0.0071	U	
		VMP-1-8.5-110315	11/3/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0093**			<0.025	U		<0.0063	U	
		VMP-1-8.5-020316	2/3/2016	**0.0019**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-1-8.5-050316	5/3/2016	**0.0012**	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U	UJ	<0.0073	U	
		VMP-1-8.5-072516	7/25/2016	**0.075**			<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0064	U	
		VMP-1-8.5-102816	10/28/2016	**0.0059**	J		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0014**	J		<0.023	U		<0.0057	U	
		VMP-1-8.5-012517	1/25/2017	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-1-8.5-042817	4/28/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-1-8.5-072417	7/24/2017	**0.0067**	J		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0064	U	
		VMP-1-8.5-102617	10/26/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0014**	J		<0.023	U		<0.0058	U	
		VMP-1-8.5-012418	1/24/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.00082**	J		<0.023	U		<0.0058	U	
		VMP-1-8.5-042718	4/27/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-1-8.5-071818	7/18/2018	**0.0014**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0014**	J		<0.027	U		<0.0067	U	
		VMP-1-8.5-102218	10/22/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0017**	J		<0.023	U		<0.0058	U	
		VMP-1-8.5-012319	1/23/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-1-8.5-043019	4/30/2019	**0.0033**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-1-8.5-072319	7/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0032**	J		<0.026	U		<0.0064	U	
		VMP-1-8.5-102419	10/24/2019	<0.035	U		<0.018	U		<0.013	U		<0.024	U		<0.03	U		<0.014	U		<0.058	U		<0.014	U	
		VMP-1-8.5-102419-DUP	10/24/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-1-8.5-111519R	11/15/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-1-8.5-012720	1/27/2020	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U	UJ	<0.0074	U	
		VMP-1-8.5-042420	4/24/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-1-8.5-072820	7/28/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0015**	J		<0.026	U		<0.0066	U	
		VMP-1-8.5-110220	11/2/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0012**	J		<0.026	U		<0.0064	U	
		VMP-1-8.5-012921	1/29/2021	**0.0051**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-1-5-050515	5/5/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-1-5-073015	7/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0029**	J		<0.0054	U		<0.0054	U	
		VMP-1-5-110315	11/3/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0044**	J		<0.0057	U		<0.0057	U	
		VMP-1-5-020316	2/3/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0035**	J		<0.0053	U		<0.0053	U	
		VMP-1-5-050316	5/3/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-1-5-072516	7/25/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-1-5-102816	10/28/2016	**0.00075**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-1-5-012517	1/25/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-1-5-042817	4/28/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-1-5-072417	7/24/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-1-5-102617	10/26/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-1-5-012618	1/26/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-1-5-042718	4/27/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-1-5-071818	7/18/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-1-5-102218	10/22/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0037**	J		<0.0052	U		<0.0052	U	
		VMP-1-5-012319	1/23/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-1-5-043019	4/30/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-1-5-072319	7/23/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0054	U		**0.0021**	J	
		VMP-1-5-102419	10/24/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		**0.0014**	J	
		VMP-1-5-012720	1/27/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-1-5-042420	4/24/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-1-5-072820	7/28/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-1-5-110220	11/2/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-1-5-012921	1/29/2021	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-1-8.5-050515	5/5/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0019**	J		<0.0056	U		<0.0056	U	
		VMP-1-8.5-073015	7/30/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-1-8.5-110315	11/3/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0038**	J		<0.005	U		<0.005	U	
		VMP-1-8.5-020316	2/3/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-1-8.5-050316	5/3/2016	**0.0011**	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-1-8.5-072516	7/25/2016	**0.0011**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-1-8.5-102816	10/28/2016	**0.0046**			<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-1-8.5-012517	1/25/2017	**0.00086**	J		<0.01	U		<0.008	U		<0.008	U		**0.0013**	J		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-1-8.5-042817	4/28/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-1-8.5-072417	7/24/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-1-8.5-102617	10/26/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-1-8.5-012418	1/24/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0031**	J		<0.0045	U		<0.0045	U	
		VMP-1-8.5-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-1-8.5-071818	7/18/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-1-8.5-102218	10/22/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-1-8.5-012319	1/23/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0044	U		<0.0044	U	
		VMP-1-8.5-043019	4/30/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-1-8.5-072319	7/23/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-1-8.5-102419	10/24/2019	<0.0096	U		<0.022	U		<0.017	U		<0.017	U		<0.017	U		**0.0018**	J		<0.011	U		<0.011	U	
		VMP-1-8.5-102419-DUP	10/24/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	J	U	<0.0076	U		**0.0024**	J		<0.0051	U		**0.00072**	J	
		VMP-1-8.5-111519R	11/15/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0063	U		<0.0051	U		<0.0051	U	
		VMP-1-8.5-012720	1/27/2020	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-1-8.5-042420	4/24/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-1-8.5-072820	7/28/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-1-8.5-110220	11/2/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-1-8.5-012921	1/29/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-5-050515	5/5/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-1-5-073015	7/30/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.0037**	J		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-1-5-110315	11/3/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.013**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-1-5-020316	2/3/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-1-5-050316	5/3/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-1-5-072516	7/25/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-1-5-102816	10/28/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-1-5-012517	1/25/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-1-5-042817	4/28/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-5-072417	7/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.008**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-5-102617	10/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-1-5-012618	1/26/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-1-5-042718	4/27/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-5-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-5-102218	10/22/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0022**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-5-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-1-5-043019	4/30/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-5-072319	7/23/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-1-5-102419	10/24/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-1-5-012720	1/27/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-5-042420	4/24/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-1-5-072820	7/28/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-5-110220	11/2/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-1-5-012921	1/29/2021	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-1-8.5-050515	5/5/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-1-8.5-073015	7/30/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0082**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-1-8.5-110315	11/3/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-8.5-020316	2/3/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-1-8.5-050316	5/3/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0089**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-1-8.5-072516	7/25/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.029**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-8.5-102816	10/28/2016	<0.0044	U		<0.0044	U		<0.0044	U		**0.0053**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-1-8.5-012517	1/25/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-1-8.5-042817	4/28/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-1-8.5-072417	7/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0031**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-8.5-102617	10/26/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-1-8.5-012418	1/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-1-8.5-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-1-8.5-071818	7/18/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-8.5-102218	10/22/2018	<0.0044	U		<0.0044	U		<0.0044	U		**0.0016**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-1-8.5-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-1-8.5-043019	4/30/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		**0.0045**	J	
		VMP-1-8.5-072319	7/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-8.5-102419	10/24/2019	<0.011	U		0.0049	J		<0.011	U		<0.097	U		<0.013	U		<0.013	U		<0.013	U		<0.04	U	
		VMP-1-8.5-102419-DUP	10/24/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-1-8.5-111519R	11/15/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-8.5-012720	1/27/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-1-8.5-042420	4/24/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-1-8.5-072820	7/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-8.5-110220	11/2/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-8.5-012921	1/29/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	0.0085	J		<0.0051	U		0.0014	J		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0016**	J	
		VMP-1-5-050515	5/5/2015	0.0083	J		<0.0061	U		0.0026	J		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		**0.0016**	J	
		VMP-1-5-073015	7/30/2015	<0.01	J	U	**0.0016**	J		0.0015	J		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-1-5-110315	11/3/2015	0.007	J		<0.0061	U		0.014			<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0024**	J	
		VMP-1-5-020316	2/3/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-1-5-050316	5/3/2016	<0.0099	U		<0.0057	U		0.0012	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-1-5-072516	7/25/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0032**	J		<0.058	U		**0.0022**	J	
		VMP-1-5-102816	10/28/2016	0.018			**0.068**			0.01			<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-1-5-012517	1/25/2017	0.016			**0.0046**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-1-5-042817	4/28/2017	0.0086	J		**0.02**			0.0056	J		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.0014**	J	
		VMP-1-5-072417	7/24/2017	0.0076	J		**0.012**			0.0022	J		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0014**	J	
		VMP-1-5-102617	10/26/2017	<0.0088	J	U	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-1-5-012618	1/26/2018	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-1-5-042718	4/27/2018	0.026			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-1-5-071818	7/18/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-1-5-102218	10/22/2018	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0015**	J		<0.055	U		**0.0045**		
		VMP-1-5-012319	1/23/2019	0.0076	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-1-5-043019	4/30/2019	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-1-5-072319	7/23/2019	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0024**	J	
		VMP-1-5-102419	10/24/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-1-5-012720	1/27/2020	<0.0093	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-1-5-042420	4/24/2020	0.01		J	<0.0057	U		<0.0065	J	U	<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0014**	J	
		VMP-1-5-072820	7/28/2020	0.014			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-1-5-110220	11/2/2020	0.01	J	J	<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-1-5-012921	1/29/2021	0.0087	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	0.0074	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-1-8.5-050515	5/5/2015	0.008	J		**0.0024**	J		0.0035	J		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-1-8.5-073015	7/30/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-1-8.5-110315	11/3/2015	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-1-8.5-020316	2/3/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		**0.0013**	J	
		VMP-1-8.5-050316	5/3/2016	0.0073	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0025**	J		<0.06	U		**0.002**	J	
		VMP-1-8.5-072516	7/25/2016	0.016			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		**0.01**			<0.052	U		**0.002**	J	
		VMP-1-8.5-102816	10/28/2016	0.033			**0.0058**			0.002	J		<0.0085	U		<0.0077	U		**0.0038**	J		<0.047	U		<0.0039	U	
		VMP-1-8.5-012517	1/25/2017	0.019			**0.0021**	J		<0.0065	U		<0.01	U		<0.0093	U		**0.0016**	J		<0.057	U		**0.0016**	J	
		VMP-1-8.5-042817	4/28/2017	0.0056	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-1-8.5-072417	7/24/2017	0.014			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-1-8.5-102617	10/26/2017	<0.0085	J	U	<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		**0.0031**	J		<0.048	U		**0.0028**	J	
		VMP-1-8.5-012418	1/24/2018	0.017			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-1-8.5-042718	4/27/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-1-8.5-071818	7/18/2018	0.007	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-1-8.5-102218	10/22/2018	0.0039	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-1-8.5-012319	1/23/2019	0.0038	J		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-1-8.5-043019	4/30/2019	0.0034	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-1-8.5-072319	7/23/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-1-8.5-102419	10/24/2019	<0.021	U	UJ	<0.012	U		<0.014	U		<0.021	U		<0.02	U		<0.011	U		<0.12	U		<0.0099	U	
		VMP-1-8.5-102419-DUP	10/24/2019	0.0021	J	J	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	J	U	<0.0044	U	
		VMP-1-8.5-111519R	11/15/2019	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-1-8.5-012720	1/27/2020	<0.011	U	UJ	<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-1-8.5-042420	4/24/2020	<0.0098	U	UJ	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-1-8.5-072820	7/28/2020	0.016			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-1-8.5-110220	11/2/2020	0.014	J	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-1-8.5-012921	1/29/2021	<0.022	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.0043	U					**0.11**			<0.0058	U	
		VMP-1-5-050515	5/5/2015	**0.012**	J		0.0042	J		<0.007	J	U	**0.014**			<0.0051	U					**0.012**	J		<0.007	J	U
		VMP-1-5-073015	7/30/2015	**0.0088**	J		<0.016	U		**0.0055**	J		**0.0032**	J		<0.0048	U					**0.007**	J		<0.0066	U	
		VMP-1-5-110315	11/3/2015	**0.0014**	J		0.0039	J		<0.0069	U		<0.0057	J	U	<0.005	U					**0.018**			<0.0069	U	
		VMP-1-5-020316	2/3/2016	**0.0027**	J		0.0028	J		**0.0026**	J		<0.0054	U		<0.0048	U					**0.006**	J		<0.0065	U	
		VMP-1-5-050316	5/3/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0047	U					**0.0019**	J		<0.0065	U	
		VMP-1-5-072516	7/25/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.037**			<0.0067	U	
		VMP-1-5-102816	10/28/2016	<0.02	U		0.0034	J		<0.0059	J	U	**0.004**	J		<0.017	U		<0.013	U		**0.021**			**0.0022**	J	
		VMP-1-5-012517	1/25/2017	<0.022	U		0.0039	J		<0.0066	U		<0.0055	U		<0.019	U					**0.0052**	J		<0.0066	U	
		VMP-1-5-042817	4/28/2017	**0.0022**	J		0.0046	J		**0.0021**	J		<0.0053	U		<0.018	U					**0.0076**	J		**0.0014**	J	
		VMP-1-5-072417	7/24/2017	**0.0044**	J		0.0028	J		**0.0078**			<0.0051	U		<0.018	U					**0.023**			<0.0061	U	
		VMP-1-5-102617	10/26/2017	<0.019	U		0.0044	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0061**	J	J	<0.0057	J	U
		VMP-1-5-012618	1/26/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-1-5-042718	4/27/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0053**	J		<0.0061	U	
		VMP-1-5-071818	7/18/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-1-5-102218	10/22/2018	<0.021	U		0.016			<0.0063	U		<0.0052	U		<0.018	U					**0.0058**	J		<0.0063	U	
		VMP-1-5-012319	1/23/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0033**	J		<0.0053	U	
		VMP-1-5-043019	4/30/2019	<0.021	U		0.0044	J		**0.0011**	J		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-1-5-072319	7/23/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-1-5-102419	10/24/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0022**	J		<0.0062	U	
		VMP-1-5-012720	1/27/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-1-5-042420	4/24/2020	<0.022	U		0.0038	J		**0.0019**	J		<0.0054	U		<0.019	U					**0.007**	J		**0.0051**	J	
		VMP-1-5-072820	7/28/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0084**	J		<0.0058	U	
		VMP-1-5-110220	11/2/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0092**	J		<0.0064	U	
		VMP-1-5-012921	1/29/2021	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.023**			<0.0056	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.0042	U					**0.0067**	J		<0.0058	U	
		VMP-1-8.5-050515	5/5/2015	**0.0047**	J		<0.016	U		<0.0068	U		**0.0087**			<0.005	U					**0.014**			<0.0068	U	
		VMP-1-8.5-073015	7/30/2015	**0.004**	J		<0.016	U		**0.00079**	J		**0.0017**	J		<0.0049	U					**0.0054**	J		<0.0067	U	
		VMP-1-8.5-110315	11/3/2015	<0.02	U		0.0058	J		<0.006	U		<0.005	J	U	<0.0044	U					**0.0061**	J		<0.006	U	
		VMP-1-8.5-020316	2/3/2016	**0.0018**	J		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.0077**	J		<0.0068	U	
		VMP-1-8.5-050316	5/3/2016	**0.001**	J		0.02			<0.0069	U		<0.0058	U		<0.0051	U					**0.0052**	J		<0.0069	U	
		VMP-1-8.5-072516	7/25/2016	<0.02	U		0.025			<0.006	U		<0.005	U		<0.018	U					**0.057**			<0.006	U	
		VMP-1-8.5-102816	10/28/2016	<0.018	U		0.019			<0.0054	U		<0.0045	U		<0.016	U		<0.012	U		**0.1**			<0.0054	U	
		VMP-1-8.5-012517	1/25/2017	**0.0018**	J		0.0035	J		**0.00042**	J		**0.0015**	J		<0.019	U					**0.0096**	J		**0.00064**	J	
		VMP-1-8.5-042817	4/28/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0015**	J		<0.0056	U	
		VMP-1-8.5-072417	7/24/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.019**			<0.0061	U	
		VMP-1-8.5-102617	10/26/2017	<0.018	U		0.0019	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-1-8.5-012418	1/24/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-1-8.5-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-1-8.5-071818	7/18/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0058**	J		<0.0063	U	
		VMP-1-8.5-102218	10/22/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-1-8.5-012319	1/23/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0023**	J		<0.0054	U	
		VMP-1-8.5-043019	4/30/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-1-8.5-072319	7/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-1-8.5-102419	10/24/2019	<0.046	U		<0.033	U		<0.014	U		<0.011	U		<0.04	U					<0.028	U		<0.014	U	
		VMP-1-8.5-102419-DUP	10/24/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-1-8.5-111519R	11/15/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-1-8.5-012720	1/27/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					<0.014	U		**0.0029**	J	
		VMP-1-8.5-042420	4/24/2020	<0.021	U		0.004	J		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-1-8.5-072820	7/28/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.011**	J		**0.0013**	J	
		VMP-1-8.5-110220	11/2/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0049**	J		<0.0061	U	
		VMP-1-8.5-012921	1/29/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0025**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0011**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-1-5-050515	5/5/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0029**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-1-5-073015	7/30/2015	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		**0.0035**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-1-5-110315	11/3/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.002**	J		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-1-5-020316	2/3/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0016**	J		<0.039	U	UJ	<0.0072	U		<0.0072	U	
		VMP-1-5-050316	5/3/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0062**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-1-5-072516	7/25/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.0036**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-1-5-102816	10/28/2016	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.013**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-1-5-012517	1/25/2017	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0018**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-1-5-042817	4/28/2017	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0054**			<0.038	U		<0.007	U		<0.007	U	
		VMP-1-5-072417	7/24/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0074**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-1-5-102617	10/26/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0012**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-1-5-012618	1/26/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-1-5-042718	4/27/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0013**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-1-5-071818	7/18/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-1-5-102218	10/22/2018	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-5-012319	1/23/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-1-5-043019	4/30/2019	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0026**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-5-072319	7/23/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0069**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-1-5-102419	10/24/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0012**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-1-5-012720	1/27/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-1-5-042420	4/24/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0016**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-1-5-072820	7/28/2020	<0.0081	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-1-5-110220	11/2/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-1-5-012921	1/29/2021	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-1-8.5-050515	5/5/2015	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-1-8.5-073015	7/30/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-1-8.5-110315	11/3/2015	<0.0052	U		<0.0084	U		<0.0083	U		**0.0012**	J		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-1-8.5-020316	2/3/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U	UJ	<0.0076	U		<0.0076	U	
		VMP-1-8.5-050316	5/3/2016	<0.006	U		<0.0096	U		**0.0059**	J		<0.0041	U		**0.0073**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-1-8.5-072516	7/25/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0056**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-1-8.5-102816	10/28/2016	<0.0047	U		<0.0076	U		**0.0061**	J		<0.0032	U		**0.035**			<0.033	U		<0.006	U		<0.006	U	
		VMP-1-8.5-012517	1/25/2017	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0021**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-1-8.5-042817	4/28/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-1-8.5-072417	7/24/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0014**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-1-8.5-102617	10/26/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-1-8.5-012418	1/24/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-1-8.5-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-1-8.5-071818	7/18/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-8.5-102218	10/22/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-1-8.5-012319	1/23/2019	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-1-8.5-043019	4/30/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-1-8.5-072319	7/23/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0064**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-1-8.5-102419	10/24/2019	<0.012	U		<0.019	U		**8.2**		J	<0.0083	U		<0.01	U		<0.083	U		<0.015	U		<0.015	U	
		VMP-1-8.5-102419-DUP	10/24/2019	<0.0054	U		<0.0086	U		**0.064**		J	<0.0037	U		**0.00054**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-1-8.5-111519R	11/15/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-1-8.5-012720	1/27/2020	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-1-8.5-042420	4/24/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0015**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-1-8.5-072820	7/28/2020	<0.0086	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-1-8.5-110220	11/2/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.00049**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-1-8.5-012921	1/29/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-1	5 ft	VMP-1-5-020915	2/9/2015	<0.0064	U		<0.0066	U		**0.0024**	J		<0.0058	U		<0.0055	U		<0.003	U		0.002	J		<0.0051	U	
		VMP-1-5-050515	5/5/2015	**0.0025**	J		0.0015	J		**0.0034**	J		<0.007	J	U	<0.0066	U		<0.0036	U		0.003	J		<0.0061	U	
		VMP-1-5-073015	7/30/2015	<0.0072	U		0.0014	J		**0.0014**	J		<0.0066	U		<0.0062	U		<0.0034	U		0.0042	J		**0.0013**	J	
		VMP-1-5-110315	11/3/2015	<0.0075	U		0.0021	J		**0.022**			<0.0069	J	U	0.0024	J		<0.0036	U		0.0029	J		**0.002**	J	
		VMP-1-5-020316	2/3/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-1-5-050316	5/3/2016	<0.0071	U		<0.0074	U		**0.0019**	J		<0.0065	U		<0.0061	U		<0.0034	U		0.003	J		**0.0014**	J	
		VMP-1-5-072516	7/25/2016	<0.0073	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0025	J		<0.0035	U		0.0027	J		<0.0059	U	
		VMP-1-5-102816	10/28/2016	<0.0065	U		0.0012	J		<0.0073		U	<0.0059	U		<0.0056	J	U	<0.0031	U		0.24			**0.065**		
		VMP-1-5-012517	1/25/2017	<0.0072	U		0.0013	J		**0.001**	J		<0.0066	U		<0.0063	U		<0.0034	U		0.013			**0.0027**	J	
		VMP-1-5-042817	4/28/2017	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	J	U	<0.006	J	U	<0.0033	U		0.065			**0.018**		
		VMP-1-5-072417	7/24/2017	<0.0067	U		0.0011	J		**0.0012**	J		<0.0061	U		<0.0058	U		<0.0032	U		0.043			**0.0094**		
		VMP-1-5-102617	10/26/2017	<0.0063	U		0.0016	J		<0.0057	U		<0.0057	U		0.017			<0.003	U		0.0011	J		<0.005	U	
		VMP-1-5-012618	1/26/2018	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-1-5-042718	4/27/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.002	J		<0.0032	U		0.001	J		<0.0054	U	
		VMP-1-5-071818	7/18/2018	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-1-5-102218	10/22/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-5-012319	1/23/2019	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-1-5-043019	4/30/2019	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-5-072319	7/23/2019	<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		0.0014	J		<0.0034	U		0.0024	J		<0.0058	U	
		VMP-1-5-102419	10/24/2019	**0.00094**	J		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		**0.00071**	J		0.00072	J		<0.0055	U	
		VMP-1-5-012720	1/27/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-1-5-042420	4/24/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.015			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-1-5-072820	7/28/2020	<0.0064	U		0.00085	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-1-5-110220	11/2/2020	<0.007	U		0.002	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-5-012921	1/29/2021	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
	8.5 ft	VMP-1-8-020915	2/9/2015	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-1-8.5-050515	5/5/2015	<0.0075	U		<0.0078	U		**0.0078**			<0.0068	J	U	0.0062	J		<0.0036	U		0.0094			**0.0045**	J	
		VMP-1-8.5-073015	7/30/2015	<0.0074	U		0.0014	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-1-8.5-110315	11/3/2015	<0.0066	U		0.0017	J		<0.006	U		<0.006	U		0.0011	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-1-8.5-020316	2/3/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.01			<0.0036	U		<0.006	U		<0.006	U	
		VMP-1-8.5-050316	5/3/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		0.00089	J		<0.0061	U	
		VMP-1-8.5-072516	7/25/2016	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.001	J		<0.0031	U		0.0016	J		<0.0053	U	
		VMP-1-8.5-102816	10/28/2016	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0056			<0.0028	U		0.02			**0.006**		
		VMP-1-8.5-012517	1/25/2017	<0.0071	U		0.0018	J		**0.0018**	J		<0.0065	U		<0.0062	U		<0.0034	U		0.0049	J		**0.0013**	J	
		VMP-1-8.5-042817	4/28/2017	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	J	U	<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-1-8.5-072417	7/24/2017	<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0018	J		<0.0054	U	
		VMP-1-8.5-102617	10/26/2017	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		0.003	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-1-8.5-012418	1/24/2018	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-1-8.5-042718	4/27/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0021	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-1-8.5-071818	7/18/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-8.5-102218	10/22/2018	<0.006	U		0.0018	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-1-8.5-012319	1/23/2019	**0.0027**	J		0.0012	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-1-8.5-043019	4/30/2019	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-1-8.5-072319	7/23/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0031	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-1-8.5-102419	10/24/2019	**0.045**		J	<0.016	U		<0.014	U		<0.014	U		<0.013	U		<0.0072	U		<0.012	U		<0.012	U	
		VMP-1-8.5-102419-DUP	10/24/2019	**0.00099**	J	J	<0.0071	U		<0.0062	U		<0.0062	J	U	<0.0059	U		<0.0032	U		0.0016	J		**0.00041**	J	
		VMP-1-8.5-111519R	11/15/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-1-8.5-012720	1/27/2020	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-1-8.5-042420	4/24/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.001	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-8.5-072820	7/28/2020	**0.001**	J		0.0012	J		<0.0062	U		<0.0062	U		0.0012	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-1-8.5-110220	11/2/2020	<0.0067	U		0.002	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-1-8.5-012921	1/29/2021	<0.0064	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.029	U		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-1-23.5-050515	5/5/2015	**0.023**	J		**0.00062**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0075**	J	
		VMP-1-23.5-073015	7/30/2015	**0.04**			<0.0049	J	U	<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0069**	J	
		VMP-1-23.5-110315	11/3/2015	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0054**	J	
		VMP-1-23.5-020316	2/3/2016	<0.032	J	U	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-1-23.5-050316	5/3/2016	**0.013**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0042**	J	
		VMP-1-23.5-050316-DUP	5/3/2016	**0.014**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0037**	J	
		VMP-1-23.5-072516	7/25/2016	**0.026**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0061**	J	
		VMP-1-23.5-072516-DUP	7/25/2016	**0.02**	J		**0.0012**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP1-23.5-102816	10/28/2016	**0.033**			**0.0025**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.012	J		**0.007**	J	
		VMP-1-23.5-012517	1/25/2017	**0.018**	J		**0.048**			<0.011	U		<0.017	U		<0.064	U		<0.0036	U		0.57			**0.0064**	J	
		VMP-1-23.5-042817	4/28/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-1-23.5-072417	7/24/2017	**0.027**	J		**0.00086**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.017			**0.0034**	J	
		VMP-1-23.5-102617	10/26/2017	**0.019**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0033**	J	
		VMP-1-23.5-012618	1/26/2018	**0.029**			<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		0.0046	J		**0.0079**	J	
		VMP-1-23.5-042718	4/27/2018	**0.041**			**0.001**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.013			**0.0051**	J	
		VMP-1-23.5-071818	7/18/2018	**0.026**	J		**0.0014**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.005**	J	
		VMP-1-23.5-102218	10/22/2018	**0.0061**	J		**0.0012**	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.017			<0.014	U	
		VMP-1-23.5-102218-DUP	10/22/2018	**0.014**	J		**0.0015**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0021**	J	
		VMP-1-23.5-012319	1/23/2019	**0.013**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0034	J		<0.013	U	
		VMP-1-23.5-012319-DUP	1/23/2019	**0.02**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		**0.003**	J	
		VMP-1-23.5-043019	4/30/2019	**0.035**			**0.0014**	J		<0.008	U		<0.012	U		**0.0026**	J		<0.0026	U		0.0028	J		<0.014	U	
		VMP-1-23.5-072319	7/23/2019	**0.025**	J		**0.0034**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-1-23.5-102419	10/24/2019	**0.018**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-1-23.5-012720	1/27/2020	**0.0091**	J	J	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-23.5-042420	4/24/2020	**0.015**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0039	J		<0.014	U	
		VMP-1-23.5-072820	7/28/2020	**0.031**			<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0017**	J	
		VMP-1-23.5-110220	11/2/2020	**0.01**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-23.5-012921	1/29/2021	**0.014**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	**2.3**	J		**0.45**			<0.88	U		<1.4	U		**0.33**	J		<0.29	U		<1.2	U		**0.38**	J	
		VMP-1-38.5-020915-DUP	2/9/2015	**1.6**	J		**0.23**	J		<0.85	U		<1.3	U		<4.9	U		<0.28	U		<1.2	U		<1.5	U	
		VMP-1-38.5-050515	5/5/2015	**0.42**	J		<0.42	U		<0.89	U		<1.4	U		<0.51	U		<0.29	U		140			**0.44**	J	
		VMP-1-38.5-061515-R	6/15/2015	<0.14	U		**0.012**	J		<0.097	U		<0.15	U		<0.056	U		<0.032	U		8.8			<0.17	U	
		VMP-1-38.5-073015	7/30/2015	**0.041**			**0.016**			<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.011**	J	
		VMP-1-38.5-012720	1/27/2020	**0.013**	J	J	<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-1-38.5-072820	7/28/2020	**0.038**			<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0073**	J	
		VMP-1-38.5-110220	11/2/2020	**0.011**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-1-38.5-012921	1/29/2021	**0.013**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-1-23.5-050515	5/5/2015	**0.0013**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-1-23.5-073015	7/30/2015	<0.019	J	U	<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.001**	J		**0.0095**	J		<0.0079	U	
		VMP-1-23.5-110315	11/3/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0051**	J		<0.026	U		<0.0066	U	
		VMP-1-23.5-020316	2/3/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-1-23.5-050316	5/3/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U	UJ	<0.0074	U	
		VMP-1-23.5-050316-DUP	5/3/2016	**0.00068**	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U	UJ	<0.0072	U	
		VMP-1-23.5-072516	7/25/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-1-23.5-072516-DUP	7/25/2016	**0.0077**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP1-23.5-102816	10/28/2016	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0026**	J		<0.025	U		<0.0063	U	
		VMP-1-23.5-012517	1/25/2017	**0.0019**	J		<0.01	U		<0.0076	U		<0.014	U		<0.017	U		<0.008	U		<0.034	U		<0.0085	U	
		VMP-1-23.5-042817	4/28/2017	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-1-23.5-072417	7/24/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0013**	J		<0.024	U		<0.0062	U	
		VMP-1-23.5-102617	10/26/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0029**	J		<0.024	U		<0.0061	U	
		VMP-1-23.5-012618	1/26/2018	**0.0082**	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-1-23.5-042718	4/27/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		**0.0091**	J		<0.0064	U	
		VMP-1-23.5-071818	7/18/2018	**0.0017**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-1-23.5-102218	10/22/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0021**	J		<0.025	U		<0.0062	U	
		VMP-1-23.5-102218-DUP	10/22/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0019**	J		<0.025	U		<0.0062	U	
		VMP-1-23.5-012319	1/23/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-1-23.5-043019	4/30/2019	**0.0024**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-1-23.5-072319	7/23/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0024**	J		<0.028	U		<0.007	U	
		VMP-1-23.5-102419	10/24/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-1-23.5-012720	1/27/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U	UJ	<0.0065	U	
		VMP-1-23.5-042420	4/24/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-1-23.5-072820	7/28/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0016**	J		<0.027	U		<0.0068	U	
		VMP-1-23.5-110220	11/2/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0018**	J		<0.027	U		<0.0067	U	
		VMP-1-23.5-012921	1/29/2021	**0.0073**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	<1.6	U		**0.27**	J		<0.61	U		<1.1	U		<1.4	U		**0.34**	J		<2.7	U		<0.68	U	
		VMP-1-38.5-020915-DUP	2/9/2015	<1.6	U		<0.8	U		<0.58	U		<1.1	U		<1.3	U		<0.62	U		<2.6	U		<0.66	U	
		VMP-1-38.5-050515	5/5/2015	<0.41	U		<0.83	U		<0.61	U		<1.1	U		<1.4	U		<0.65	U		<1.1	U		<0.68	U	
		VMP-1-38.5-061515-R	6/15/2015	<0.045	U		<0.092	U		<0.067	U		<0.12	U		<0.15	U		<0.071	U		<0.12	U		<0.075	U	
		VMP-1-38.5-073015	7/30/2015	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-1-38.5-012720	1/27/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U	UJ	<0.0066	U	
		VMP-1-38.5-072820	7/28/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0013**	J		<0.026	U		<0.0066	U	
		VMP-1-38.5-110220	11/2/2020	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0018**	J		<0.024	U		<0.0059	U	
		VMP-1-38.5-012921	1/29/2021	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-1-23.5-050515	5/5/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-1-23.5-073015	7/30/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0024**	J		<0.0062	U		<0.0062	U	
		VMP-1-23.5-110315	11/3/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0044**	J		<0.0052	U		<0.0052	U	
		VMP-1-23.5-020316	2/3/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.003**	J		<0.0055	U		<0.0055	U	
		VMP-1-23.5-050316	5/3/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-1-23.5-050316-DUP	5/3/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-1-23.5-072516	7/25/2016	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0037**	J		<0.0052	U		<0.0052	U	
		VMP-1-23.5-072516-DUP	7/25/2016	<0.0048	U		<0.011	U		**0.0022**	J		<0.0083	U		<0.0083	U		**0.0031**	J		<0.0056	U		<0.0056	U	
		VMP1-23.5-102816	10/28/2016	**0.0024**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-1-23.5-012517	1/25/2017	**0.091**			<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		**0.0022**	J		<0.0066	U		<0.0066	U	
		VMP-1-23.5-042817	4/28/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-1-23.5-072417	7/24/2017	**0.0042**			<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-1-23.5-102617	10/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-1-23.5-012618	1/26/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-1-23.5-042718	4/27/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0035**	J		<0.005	U		<0.005	U	
		VMP-1-23.5-071818	7/18/2018	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-1-23.5-102218	10/22/2018	**0.003**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0037**	J		<0.0048	U		<0.0048	U	
		VMP-1-23.5-102218-DUP	10/22/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.004**	J		<0.0049	U		<0.0049	U	
		VMP-1-23.5-012319	1/23/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0023**	J		<0.0043	U		<0.0043	U	
		VMP-1-23.5-043019	4/30/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-1-23.5-072319	7/23/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0054	U		**0.0024**	J	
		VMP-1-23.5-102419	10/24/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-1-23.5-012720	1/27/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-1-23.5-042420	4/24/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-1-23.5-072820	7/28/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-1-23.5-110220	11/2/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-1-23.5-012921	1/29/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	<0.45	U		<1	U		**0.069**	J		0.078	J		<0.79	U		**0.5**	J		**0.23**	J		**0.28**	J	
		VMP-1-38.5-020915-DUP	2/9/2015	<0.44	U		<0.98	U		<0.76	U		<0.76	U		<0.76	U		<0.63	U		<0.51	U		<0.51	U	
		VMP-1-38.5-050515	5/5/2015	**2.5**			<1	U		<0.8	U		<0.8	U		<0.8	U		<0.66	U		<0.54	U		<0.54	U	
		VMP-1-38.5-061515-R	6/15/2015	**0.17**			<0.11	U		<0.087	U		<0.087	U		<0.087	U		<0.072	U		<0.059	U		<0.059	U	
		VMP-1-38.5-073015	7/30/2015	**0.0041**	J		<0.011	U		<0.0088	U		<0.0088	J	U	<0.0088	U		**0.0025**	J		<0.0059	U		<0.0059	U	
		VMP-1-38.5-012720	1/27/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0063	U		<0.0052	U		<0.0052	U	
		VMP-1-38.5-072820	7/28/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-1-38.5-110220	11/2/2020	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-1-38.5-012921	1/29/2021	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0031**	J		<0.0047	U		<0.0047	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-1-23.5-050515	5/5/2015	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-1-23.5-073015	7/30/2015	<0.0061	U		<0.0061	U		<0.0061	U		**0.0057**	J		<0.0071	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-1-23.5-110315	11/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.0032**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-23.5-020316	2/3/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-1-23.5-050316	5/3/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-1-23.5-050316-DUP	5/3/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-1-23.5-072516	7/25/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-23.5-072516-DUP	7/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP1-23.5-102816	10/28/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0045**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-23.5-012517	1/25/2017	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0076	U		<0.0075	U		<0.0075	U		<0.024	U	
		VMP-1-23.5-042817	4/28/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-1-23.5-072417	7/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.044**			<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-23.5-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-23.5-012618	1/26/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-1-23.5-042718	4/27/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-1-23.5-071818	7/18/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-1-23.5-102218	10/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.002**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-23.5-102218-DUP	10/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0018**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-1-23.5-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-1-23.5-043019	4/30/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-23.5-072319	7/23/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-1-23.5-102419	10/24/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-1-23.5-012720	1/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-1-23.5-042420	4/24/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-1-23.5-072820	7/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-1-23.5-110220	11/2/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-23.5-012921	1/29/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	**0.26**	J		<0.52	U		<0.52	U		<4.6	U		**0.22**	J		<0.6	U		<0.6	U		<1.9	U	
		VMP-1-38.5-020915-DUP	2/9/2015	<0.5	U		<0.5	U		<0.5	U		<4.4	U		<0.59	U		<0.58	U		<0.58	U		<1.8	U	
		VMP-1-38.5-050515	5/5/2015	<0.52	U		<0.52	U		<0.52	U		<0.46	U		<0.61	U		<0.6	U		<0.6	U		<1.9	U	
		VMP-1-38.5-061515-R	6/15/2015	<0.058	U		<0.058	U		<0.058	U		<0.05	U		<0.067	U		<0.066	U		<0.066	U		<0.21	U	
		VMP-1-38.5-073015	7/30/2015	<0.0058	U		<0.0058	U		<0.0058	U		**0.0062**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-1-38.5-012720	1/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-38.5-072820	7/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-1-38.5-110220	11/2/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-1-38.5-012921	1/29/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-1-23.5-050515	5/5/2015	0.0058	J		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-1-23.5-073015	7/30/2015	<0.012	J	U	<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0063	U		<0.065	U		<0.0054	U	
		VMP-1-23.5-110315	11/3/2015	0.0059	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0019**	J		<0.055	U		**0.0014**	J	
		VMP-1-23.5-020316	2/3/2016	<0.01	U		<0.0059	U		0.0061	J		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-1-23.5-050316	5/3/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		**0.0011**	J	
		VMP-1-23.5-050316-DUP	5/3/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0011**	J	
		VMP-1-23.5-072516	7/25/2016	<0.0097	U		**0.0015**	J		<0.0063	U		<0.0098	U		<0.009	U		**0.0053**			<0.055	U		**0.0068**		
		VMP-1-23.5-072516-DUP	7/25/2016	<0.01	U		**0.0022**	J		<0.0068	U		<0.01	U		<0.0096	U		**0.0055**	J		<0.059	U		**0.0071**		
		VMP1-23.5-102816	10/28/2016	0.028			**0.16**			0.024			<0.0094	U		<0.0086	U		**0.0027**	J		<0.052	U		<0.0043	U	
		VMP-1-23.5-012517	1/25/2017	0.015			**0.0018**	J		<0.0081	U		<0.013	U		<0.012	U		**0.0024**	J		<0.07	U		**0.0044**	J	
		VMP-1-23.5-042817	4/28/2017	0.0094			**0.0016**	J		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-1-23.5-042817-DUP	4/28/2017	0.0062	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.00085**	J	
		VMP-1-23.5-072417	7/24/2017	0.023			**0.0019**	J		<0.0058	U		<0.0091	U		<0.0083	U		**0.0028**	J		<0.051	U		**0.0082**		
		VMP-1-23.5-102617	10/26/2017	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-1-23.5-012618	1/26/2018	0.011			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0022**	J		<0.046	U		**0.0018**	J	
		VMP-1-23.5-042718	4/27/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.0026**	J	
		VMP-1-23.5-071818	7/18/2018	0.012			<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-1-23.5-102218	10/22/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0019**	J		<0.051	U		**0.0099**		J
		VMP-1-23.5-102218-DUP	10/22/2018	0.0079	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	UJ
		VMP-1-23.5-012319	1/23/2019	0.011			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		**0.0013**	J	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.008	U		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-1-23.5-043019	4/30/2019	0.0082	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.00099**	J		<0.051	U		<0.0042	U	
		VMP-1-23.5-072319	7/23/2019	0.014			**0.00074**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0059**		
		VMP-1-23.5-102419	10/24/2019	0.0026	J	J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-1-23.5-012720	1/27/2020	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-1-23.5-042420	4/24/2020	0.012		J	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-1-23.5-072820	7/28/2020	0.0097	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-1-23.5-110220	11/2/2020	0.011	J	J	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-1-23.5-012921	1/29/2021	<0.024	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0036**	J	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.025	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0027**	J	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	1.8			**0.39**	J		0.25	J		**0.52**	J		0.62	J		**0.65**			<5.6	U		**0.52**		
		VMP-1-38.5-020915-DUP	2/9/2015	<0.96	U		<0.55	U		0.57	J		<0.97	U		<0.89	U		<0.52	U		<5.4	U		<0.45	U	
		VMP-1-38.5-050515	5/5/2015	0.52	J		<0.58	U		0.24	J		<1	U		<0.93	U		**1.4**			<5.6	U		**12**		
		VMP-1-38.5-061515-R	6/15/2015	<0.11	U		<0.063	U		<0.072	U		<0.11	U		<0.1	U		<0.06	U		<0.62	U		**0.23**		
		VMP-1-38.5-073015	7/30/2015	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		**0.0041**	J		<0.062	U		**0.0057**		
		VMP-1-38.5-012720	1/27/2020	<0.0096	U	UJ	<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-1-38.5-072820	7/28/2020	0.017			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-1-38.5-110220	11/2/2020	0.011	J	J	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-1-38.5-012921	1/29/2021	<0.022	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0067**	J		<0.006	U	
		VMP-1-23.5-050515	5/5/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					**0.0032**	J		<0.0061	U	
		VMP-1-23.5-073015	7/30/2015	<0.025	U		<0.018	U		<0.0075	U		**0.0018**	J		<0.0055	U					<0.015	U		<0.0075	U	
		VMP-1-23.5-110315	11/3/2015	<0.021	U		0.0077	J		<0.0063	U		<0.0052	U		<0.0046	U					**0.0028**	J		<0.0063	U	
		VMP-1-23.5-020316	2/3/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0048**	J		<0.0067	U	
		VMP-1-23.5-050316	5/3/2016	**0.0013**	J		<0.017	U		<0.007	U		<0.0059	U		<0.0052	U					**0.0025**	J		<0.007	U	
		VMP-1-23.5-050316-DUP	5/3/2016	**0.0011**	J		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.0018**	J		<0.0068	U	
		VMP-1-23.5-072516	7/25/2016	<0.021	U		0.0049	J		<0.0063	U		<0.0053	U		<0.018	U					**0.014**			<0.0063	U	
		VMP-1-23.5-072516-DUP	7/25/2016	<0.023	U		0.0046	J		<0.0068	U		<0.0056	U		<0.02	U					**0.0094**	J		**0.0017**	J	
		VMP1-23.5-102816	10/28/2016	<0.02	U		0.065			**0.0057**	J		**0.007**			<0.018	U		<0.013	U		**0.1**			**0.0055**	J	
		VMP-1-23.5-012517	1/25/2017	<0.027	U		1.7			**0.0005**	J		<0.0067	U		<0.024	U					**0.0028**	J		<0.0081	U	
		VMP-1-23.5-042817	4/28/2017	<0.019	U		<0.014	U		**0.00068**	J		<0.0047	U		<0.017	U					**0.0025**	J		**0.0021**	J	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-1-23.5-072417	7/24/2017	<0.019	U		0.062			<0.0058	U		<0.0049	U		<0.017	U					**0.059**			<0.0058	U	
		VMP-1-23.5-102617	10/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	J	U
		VMP-1-23.5-012618	1/26/2018	<0.018	U		0.075			<0.0053	U		<0.0044	U		<0.016	U					**0.014**			<0.0053	U	
		VMP-1-23.5-042718	4/27/2018	<0.02	U		0.0051	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-1-23.5-071818	7/18/2018	<0.021	U		<0.015	U		**0.0016**	J		<0.0053	U		<0.019	U					<0.013	U		**0.0052**	J	
		VMP-1-23.5-102218	10/22/2018	<0.02	U		0.03			<0.0059	U		<0.0049	U		<0.017	U					**0.0028**	J		<0.0059	U	
		VMP-1-23.5-102218-DUP	10/22/2018	<0.02	U		0.0059	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-1-23.5-012319	1/23/2019	<0.018	U		0.0036	J		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0024**	J		<0.0052	U	
		VMP-1-23.5-043019	4/30/2019	<0.02	U		0.0045	J		<0.0059	U		<0.0049	U		<0.017	U					**0.008**	J		<0.0059	U	
		VMP-1-23.5-072319	7/23/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0027**	J		<0.0066	U	
		VMP-1-23.5-102419	10/24/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0026**	J		<0.0059	U	
		VMP-1-23.5-012720	1/27/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0056**	J		<0.0062	U	
		VMP-1-23.5-042420	4/24/2020	<0.019	U		0.0038	J		<0.0058	U		<0.0048	U		<0.017	U					**0.008**	J		<0.0058	U	
		VMP-1-23.5-072820	7/28/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0098**	J		<0.0064	U	
		VMP-1-23.5-110220	11/2/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0057**	J		<0.0063	U	
		VMP-1-23.5-012921	1/29/2021	<0.021	U		0.0026	J		<0.0063	U		<0.0053	U		<0.019	U					**0.011**	J		<0.0063	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0056**	J		<0.0065	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	<2.2	U		33			<0.65	U		**0.29**	J		**0.24**	J					**0.5**	J		**0.1**	J	
		VMP-1-38.5-020915-DUP	2/9/2015	<2.1	U		30			<0.62	U		**0.22**	J		<0.46	U					<1.2	U		**0.1**	J	
		VMP-1-38.5-050515	5/5/2015	<2.2	U		200			<0.65	U		<0.54	U		<0.48	U					**0.44**	J		<0.65	U	
		VMP-1-38.5-061515-R	6/15/2015	<0.24	U		27			<0.072	U		<0.06	U		<0.052	U					<0.14	U		<0.072	U	
		VMP-1-38.5-073015	7/30/2015	**0.0028**	J		0.0059	J		**0.0011**	J		**0.0018**	J		<0.0053	U					**0.017**			<0.0072	U	
		VMP-1-38.5-012720	1/27/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-1-38.5-072820	7/28/2020	**0.0013**	J		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0076**	J		<0.0062	U	
		VMP-1-38.5-110220	11/2/2020	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.01**	J		<0.0056	U	
		VMP-1-38.5-012921	1/29/2021	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0065**	J		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-1-23.5-050515	5/5/2015	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-1-23.5-073015	7/30/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0058	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-1-23.5-110315	11/3/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0021**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-23.5-020316	2/3/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U	UJ	<0.0075	U		<0.0075	U	
		VMP-1-23.5-050316	5/3/2016	<0.0061	U		<0.0098	U		**0.0045**	J		<0.0042	U		**0.001**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-1-23.5-050316-DUP	5/3/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.00076**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-1-23.5-072516	7/25/2016	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.00077**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-23.5-072516-DUP	7/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0012**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP1-23.5-102816	10/28/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.031**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-1-23.5-012517	1/25/2017	<0.007	U		<0.011	U		<0.011	U		<0.0048	U		**0.0014**	J		<0.049	U		<0.009	U		<0.009	U	
		VMP-1-23.5-042817	4/28/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.001**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.00058**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-1-23.5-072417	7/24/2017	**0.0011**	J		<0.0082	U		<0.0081	U		<0.0035	U		**0.0076**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-1-23.5-102617	10/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-1-23.5-012618	1/26/2018	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		**0.045**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-1-23.5-042718	4/27/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-1-23.5-071818	7/18/2018	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-1-23.5-102218	10/22/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-1-23.5-102218-DUP	10/22/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-1-23.5-012319	1/23/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.00096**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.00091**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-1-23.5-043019	4/30/2019	**0.00088**	J		<0.0082	U		<0.0081	U		<0.0035	U		**0.0019**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-1-23.5-072319	7/23/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.006**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-1-23.5-102419	10/24/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-1-23.5-012720	1/27/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-1-23.5-042420	4/24/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.002**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-1-23.5-072820	7/28/2020	<0.0089	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-1-23.5-110220	11/2/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.00063**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-23.5-012921	1/29/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0011**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0011**	J		<0.039	U		<0.0072	U		<0.0072	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	**0.39**	J		**0.13**	J		**0.27**	J		<0.39	U		**16**		J	<3.9	U		**0.34**	J		**0.18**	J	
		VMP-1-38.5-020915-DUP	2/9/2015	**0.17**	J		<0.87	U		<0.86	U		<0.37	U		**0.96**		J	<3.8	U		<0.69	U		<0.69	U	
		VMP-1-38.5-050515	5/5/2015	<0.56	U		<0.91	U					<0.39	U		**0.45**	J		<3.9	U		<0.72	U		<0.72	U	
		VMP-1-38.5-061515-R	6/15/2015	<0.062	U		<0.1	U		<0.099	U		<0.043	U		<0.055	U		<0.43	U		<0.079	U		<0.079	U	
		VMP-1-38.5-073015	7/30/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U	UJ	<0.008	U		<0.008	U	
		VMP-1-38.5-012720	1/27/2020	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-1-38.5-072820	7/28/2020	<0.0086	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-1-38.5-110220	11/2/2020	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-1-38.5-012921	1/29/2021	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-1-23.5-020915	2/9/2015	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-1-23.5-050515	5/5/2015	<0.0067	U		0.0015	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-1-23.5-073015	7/30/2015	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-1-23.5-110315	11/3/2015	<0.0069	U		0.002	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-23.5-020316	2/3/2016	<0.0074	U		<0.0077	U		**0.0097**			<0.0067	J	U	<0.0064	U		<0.0035	U		0.0017	J		<0.0059	U	
		VMP-1-23.5-050316	5/3/2016	**0.0024**	J		<0.0081	U		<0.007	U		<0.007	U		0.0012	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-1-23.5-050316-DUP	5/3/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.00094	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-1-23.5-072516	7/25/2016	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.0067			<0.0033	U		0.0012	J		<0.0056	U	
		VMP-1-23.5-072516-DUP	7/25/2016	<0.0074	U		<0.0078	U		**0.0032**	J		<0.0068	U		0.0065			<0.0035	U		0.0028	J		<0.006	U	
		VMP1-23.5-102816	10/28/2016	<0.0066	U		<0.0069	U		**0.016**			<0.0068		U	<0.0057	J	U	<0.0031	U		0.58			**0.15**		
		VMP-1-23.5-012517	1/25/2017	<0.0088	U		<0.0092	U		<0.0081	U		<0.0081	U		0.15			<0.0042	U		0.0068	J		**0.0017**	J	
		VMP-1-23.5-042817	4/28/2017	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		0.003	J		<0.003	U		0.0049	J		**0.0014**	J	
		VMP-1-23.5-042817-DUP	4/28/2017	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0022	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-1-23.5-072417	7/24/2017	<0.0064	U		0.0019	J		<0.0058	U		<0.0058	U		0.0029	J		<0.003	U		0.0054			**0.0025**	J	
		VMP-1-23.5-102617	10/26/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.005	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-1-23.5-012618	1/26/2018	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		0.00077	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-1-23.5-042718	4/27/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-1-23.5-071818	7/18/2018	**0.012**			<0.0073	U		**0.0021**	J		<0.0064	U		0.0071			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-23.5-102218	10/22/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-1-23.5-102218-DUP	10/22/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0013	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-1-23.5-012319	1/23/2019	<0.0058	U		0.0015	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-1-23.5-012319-DUP	1/23/2019	<0.0057	U		0.0012	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-1-23.5-043019	4/30/2019	<0.0064	U		0.0011	J		<0.0059	U		<0.0059	U		0.0018	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-1-23.5-072319	7/23/2019	<0.0072	U		0.0017	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-1-23.5-102419	10/24/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-1-23.5-012720	1/27/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-1-23.5-042420	4/24/2020	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-1-23.5-072820	7/28/2020	**0.00082**	J		0.0009	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-1-23.5-110220	11/2/2020	<0.0069	U		0.0019	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-23.5-012921	1/29/2021	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.0012	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-1-23.5-012921-DUP	1/29/2021	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
	38.5 ft	VMP-1-38.5-020915	2/9/2015	**0.23**	J		0.46	J		**0.25**	J		**0.15**	J		310			<0.34	U		0.77			**0.28**	J	
		VMP-1-38.5-020915-DUP	2/9/2015	<0.68	U		<0.71	U		**0.69**			**0.19**	J		320			<0.32	U		0.19	J		**0.11**	J	
		VMP-1-38.5-050515	5/5/2015	<0.71	U		<0.74	U		**0.2**	J		<0.65	U		61			<0.34	U		0.88			**0.39**	J	
		VMP-1-38.5-061515-R	6/15/2015	<0.078	U		<0.082	U		<0.072	U		<0.072	U		25			<0.037	U		<0.063	U		<0.063	U	
		VMP-1-38.5-073015	7/30/2015	<0.0078	U		0.0017	J		<0.0072	U		<0.0072	U		0.13			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-1-38.5-012720	1/27/2020	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-1-38.5-072820	7/28/2020	<0.0068	U		0.00087	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-1-38.5-110220	11/2/2020	<0.0062	U		0.002	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-1-38.5-012921	1/29/2021	<0.0063	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	**0.016**	J		**0.0022**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0055**	J	
		VMP-2-5-050615	5/6/2015	**0.019**	J		**0.0019**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.018**		
		VMP-2-5-110415	11/4/2015	**0.02**	J		**0.003**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0061**	J	
		VMP-2-5-020116	2/1/2016	**0.012**	J		**0.00072**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0056	J		**0.0022**	J	
		VMP-2-5-042716	4/27/2016	**0.0087**	J		<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		<0.018	U	
		VMP-2-5-072616	7/26/2016	**0.011**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-2-5-102616	10/26/2016	**0.017**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-2-5-012517	1/25/2017	**0.024**	J		**0.0016**	J		<0.012	U		<0.018	U		<0.069	U		<0.0039	U		0.016	J		**0.01**	J	
		VMP-2-5-050317	5/3/2017	**0.028**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0031	J		<0.014	U	
		VMP-2-5-072417	7/24/2017	**0.079**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0074	J		**0.014**	J	
		VMP-2-5-102617	10/26/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-5-012918	1/29/2018	<0.026	J	U	<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-2-5-032818	3/28/2018	**0.0084**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.005	J		<0.014	U	
		VMP-2-5-041018	4/10/2018	**0.0081**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0053	J		**0.0029**	J	
		VMP-2-5-072418	7/24/2018	**0.018**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-5-102418	10/24/2018	**0.014**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-2-5-012319	1/23/2019	**0.0083**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-2-5-042619	4/26/2019	**0.01**	J		**0.00091**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-2-5-072519	7/25/2019	**0.038**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U	UJ	<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-5-102119	10/21/2019	**0.0098**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-5-012420	1/24/2020	<0.031	U		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-2-5-042420	4/24/2020	**0.057**			**0.0013**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-2-5-072420	7/24/2020	**0.019**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-2-5-110420	11/4/2020	**0.023**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0046**	J	
		VMP-2-5-012521	1/25/2021	**0.0066**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	**0.018**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-2-8.5-050615	5/6/2015	**0.017**	J		**0.0023**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.018**		
		VMP-2-8.5-110415	11/4/2015	**0.04**			**0.0022**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.019**		
		VMP-2-8.5-021616	2/16/2016	**0.07**			<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		**0.014**	J	
		VMP-2-8.5-042716	4/27/2016	**0.017**	J		**0.0025**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0031**	J	
		VMP-2-8.5-072616	7/26/2016	**0.14**			**0.0015**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.025**		
		VMP-2-8.5-102616	10/26/2016	**0.0097**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-2-8.5-012517	1/25/2017	**0.036**			<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0047**	J	
		VMP-2-8.5-050317	5/3/2017	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-2-8.5-072417	7/24/2017	**0.039**			<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-2-8.5-102617	10/26/2017	<0.029	J	U	<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-2-8.5-012918	1/29/2018	<0.027	J	U	**0.0063**			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-2-8.5-032818	3/28/2018	**0.012**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0029**	J	
		VMP-2-8.5-041018	4/10/2018	**0.014**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.0024	J		**0.004**	J	
		VMP-2-8.5-072418	7/24/2018	**0.022**	J		**0.0003**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0037**	J	
		VMP-2-8.5-102418	10/24/2018	**0.037**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-8.5-012319	1/23/2019	**0.0088**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-2-8.5-042619	4/26/2019	**0.015**	J		**0.022**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.057			**0.0047**	J	
		VMP-2-8.5-072519	7/25/2019	**0.006**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U	UJ	<0.003	U		<0.013	U		<0.016	U	
		VMP-2-8.5-102119	10/21/2019	**0.0085**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-8.5-012420	1/24/2020	**0.008**	J	J	<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-2-8.5-042420	4/24/2020	**0.02**	J		**0.0012**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-2-8.5-072420	7/24/2020	**0.017**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-8.5-110420	11/4/2020	**0.036**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0018**	J	
		VMP-2-8.5-012521	1/25/2021	**0.018**	J		**0.00094**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.011	J		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0019**	J		<0.027	U		<0.0068	U	
		VMP-2-5-050615	5/6/2015	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0014**	J		<0.03	U		<0.0075	U	
		VMP-2-5-110415	11/4/2015	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-2-5-020116	2/1/2016	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-2-5-042716	4/27/2016	<0.019	U		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-2-5-072616	7/26/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-2-5-102616	10/26/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-2-5-012517	1/25/2017	**0.0026**	J		<0.011	U		<0.0082	U		<0.015	U		<0.019	U		<0.0087	U		<0.037	U		<0.0092	U	
		VMP-2-5-050317	5/3/2017	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-2-5-072417	7/24/2017	**0.0026**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-2-5-102617	10/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-2-5-012918	1/29/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-2-5-032818	3/28/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-2-5-041018	4/10/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-2-5-072418	7/24/2018	**0.002**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-2-5-102418	10/24/2018	**0.0024**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-2-5-012319	1/23/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-2-5-042619	4/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-2-5-072519	7/25/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	ND,UJ	UJ
		VMP-2-5-102119	10/21/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-2-5-012420	1/24/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-2-5-042420	4/24/2020	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-2-5-072420	7/24/2020	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-2-5-110420	11/4/2020	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-2-5-012521	1/25/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-2-8.5-050615	5/6/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-2-8.5-110415	11/4/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-2-8.5-021616	2/16/2016	**0.013**	J		<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0078	U		<0.033	U		<0.0082	U	
		VMP-2-8.5-042716	4/27/2016	<0.019	U		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-2-8.5-072616	7/26/2016	**0.0072**	J		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	ND,UJ	UJ	<0.0076	U	
		VMP-2-8.5-102616	10/26/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-2-8.5-012517	1/25/2017	**0.0013**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-2-8.5-050317	5/3/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-2-8.5-072417	7/24/2017	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-2-8.5-102617	10/26/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-2-8.5-012918	1/29/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-2-8.5-032818	3/28/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-2-8.5-041018	4/10/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-2-8.5-072418	7/24/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.00091**	J		<0.023	U		<0.0059	U	
		VMP-2-8.5-102418	10/24/2018	**0.0022**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-2-8.5-012319	1/23/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-2-8.5-042619	4/26/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-2-8.5-072519	7/25/2019	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		**0.002**	J		<0.028	U		<0.0069	ND,UJ	UJ
		VMP-2-8.5-102119	10/21/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-2-8.5-012420	1/24/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-2-8.5-042420	4/24/2020	<0.016	U		<0.0083	U		**0.00098**	J		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-2-8.5-072420	7/24/2020	**0.0018**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-2-8.5-110420	11/4/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-2-8.5-012521	1/25/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	**0.014**			<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-2-5-050615	5/6/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-2-5-110415	11/4/2015	**0.0028**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0033**	J		<0.005	U		<0.005	U	
		VMP-2-5-020116	2/1/2016	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-2-5-042716	4/27/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	U		<0.0063	U		<0.0063	U	
		VMP-2-5-072616	7/26/2016	<0.0045	U		<0.01	U		**0.0029**	J		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-2-5-102616	10/26/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0025**	J		<0.0055	U		<0.0055	U	
		VMP-2-5-012517	1/25/2017	<0.0061	U		<0.014	U		<0.011	U		<0.011	U		<0.011	U		<0.0088	U		<0.0072	U		<0.0072	U	
		VMP-2-5-050317	5/3/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-2-5-072417	7/24/2017	**0.0033**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-2-5-102617	10/26/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-2-5-012918	1/29/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0029**	J		<0.0044	U		<0.0044	U	
		VMP-2-5-032818	3/28/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-2-5-041018	4/10/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-2-5-072418	7/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-2-5-102418	10/24/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-2-5-012319	1/23/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0027**	J		<0.0043	U		<0.0043	U	
		VMP-2-5-042619	4/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-2-5-072519	7/25/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-2-5-102119	10/21/2019	**0.001**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0035**	J		<0.0047	U		<0.0047	U	
		VMP-2-5-012420	1/24/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-2-5-042420	4/24/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-2-5-072420	7/24/2020	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-2-5-110420	11/4/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-2-5-012521	1/25/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0033**	J		<0.0056	U		<0.0056	U	
		VMP-2-8.5-050615	5/6/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-2-8.5-110415	11/4/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0036**	J		<0.0057	U		<0.0057	U	
		VMP-2-8.5-021616	2/16/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		**0.0036**	J		<0.0064	U		<0.0064	U	
		VMP-2-8.5-042716	4/27/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	U		<0.0063	U		<0.0063	U	
		VMP-2-8.5-072616	7/26/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0035**	J		<0.006	U		<0.0059	U	
		VMP-2-8.5-102616	10/26/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0055	U		<0.0055	U	
		VMP-2-8.5-012517	1/25/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.002**	J		<0.0054	U		<0.0054	U	
		VMP-2-8.5-050317	5/3/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-2-8.5-072417	7/24/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-2-8.5-102617	10/26/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-2-8.5-012918	1/29/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-2-8.5-032818	3/28/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-2-8.5-041018	4/10/2018	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0019**	J		<0.0046	U		<0.0046	U	
		VMP-2-8.5-072418	7/24/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-2-8.5-102418	10/24/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		<0.0058	U		<0.0048	U		<0.0048	U	
		VMP-2-8.5-012319	1/23/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-2-8.5-042619	4/26/2019	**0.023**			<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-2-8.5-072519	7/25/2019	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-2-8.5-102119	10/21/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-2-8.5-012420	1/24/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-2-8.5-042420	4/24/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-2-8.5-072420	7/24/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-2-8.5-110420	11/4/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-2-8.5-012521	1/25/2021	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0033**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-2-5-050615	5/6/2015	<0.0058	U		<0.0058	U		<0.0058	U		**0.0017**	J	J	<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-2-5-110415	11/4/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-2-5-020116	2/1/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-2-5-042716	4/27/2016	<0.0062	U		<0.0062	U		<0.0062	U		**0.0017**	J		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-2-5-072616	7/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.0018**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-2-5-102616	10/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-2-5-012517	1/25/2017	<0.007	U		<0.007	U		<0.007	U		<0.062	U		<0.0082	U		<0.0081	U		<0.0081	U		<0.026	U	
		VMP-2-5-050317	5/3/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-2-5-072417	7/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.018**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-2-5-102617	10/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-2-5-012918	1/29/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-2-5-032818	3/28/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-5-041018	4/10/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-2-5-072418	7/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		**0.0016**	J		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-5-102418	10/24/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-2-5-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-2-5-042619	4/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-2-5-072519	7/25/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-2-5-102119	10/21/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-2-5-012420	1/24/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-2-5-042420	4/24/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-2-5-072420	7/24/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-2-5-110420	11/4/2020	<0.0052	U		0.0014	J		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-2-5-012521	1/25/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-2-8.5-050615	5/6/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-2-8.5-110415	11/4/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.0045**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-2-8.5-021616	2/16/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		**0.0019**	J	
		VMP-2-8.5-042716	4/27/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-2-8.5-072616	7/26/2016	<0.0058	U		<0.0058	U		<0.0058	U		**0.0029**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-2-8.5-102616	10/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-2-8.5-012517	1/25/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-2-8.5-050317	5/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-2-8.5-072417	7/24/2017	<0.0054	U		<0.0054	U		<0.0054	U		**0.0034**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-2-8.5-102617	10/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-2-8.5-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-2-8.5-032818	3/28/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-2-8.5-041018	4/10/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-2-8.5-072418	7/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-2-8.5-102418	10/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-2-8.5-012319	1/23/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-2-8.5-042619	4/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-2-8.5-072519	7/25/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-2-8.5-102119	10/21/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-8.5-012420	1/24/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-2-8.5-042420	4/24/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-2-8.5-072420	7/24/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-8.5-110420	11/4/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-2-8.5-012521	1/25/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.0099	J	U	**0.79**			5.3		J	<0.01	U		<0.0092	U		**0.099**			<0.056	U		**0.016**		
		VMP-2-5-050615	5/6/2015	0.011	J		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-2-5-110415	11/4/2015	0.01			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0024**	J		<0.053	U		**0.0056**		
		VMP-2-5-020116	2/1/2016	0.0044	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-2-5-042716	4/27/2016	<0.012	U		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-2-5-072616	7/26/2016	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-2-5-102616	10/26/2016	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	J	U
		VMP-2-5-012517	1/25/2017	0.019			**0.02**			0.0026	J		<0.014	U		<0.012	U		<0.0073	U		<0.076	U		**0.001**	J	
		VMP-2-5-050317	5/3/2017	0.0054	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-2-5-072417	7/24/2017	0.1			**0.0027**	J		<0.0061	U		<0.0095	U		<0.0087	U		**0.0022**	J		<0.053	U		**0.003**	J	
		VMP-2-5-102617	10/26/2017	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-2-5-012918	1/29/2018	0.063			<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-2-5-032818	3/28/2018	0.0052	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.004**	J		<0.051	U		**0.0049**		
		VMP-2-5-041018	4/10/2018	0.0099			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.00093**	J	
		VMP-2-5-072418	7/24/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-2-5-102418	10/24/2018	0.0059	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-2-5-012319	1/23/2019	<0.0081	U		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-2-5-042619	4/26/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-2-5-072519	7/25/2019	0.0052	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-2-5-102119	10/21/2019	0.013			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-2-5-012420	1/24/2020	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-2-5-042420	4/24/2020	0.017			<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-2-5-072420	7/24/2020	0.01			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-2-5-110420	11/4/2020	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-2-5-012521	1/25/2021	<0.024	J	U	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.01	J	U	<0.006	U		0.0051	J		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-2-8.5-050615	5/6/2015	<0.01	U		**0.0019**	J		0.0038	J		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-2-8.5-110415	11/4/2015	0.0082	J		<0.0061	U		0.0028	J		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0024**	J	
		VMP-2-8.5-021616	2/16/2016	0.0084	J		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.068	U		<0.0056	U	
		VMP-2-8.5-042716	4/27/2016	<0.012	U		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-2-8.5-072616	7/26/2016	<0.011	U		<0.0064	U		0.0045	J		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-2-8.5-102616	10/26/2016	<0.01	U		**0.0031**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	J	U
		VMP-2-8.5-012517	1/25/2017	<0.01	J	U	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0007**	J	
		VMP-2-8.5-050317	5/3/2017	0.014			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-2-8.5-072417	7/24/2017	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-2-8.5-102617	10/26/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-2-8.5-012918	1/29/2018	0.0045	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-2-8.5-032818	3/28/2018	0.0082	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-2-8.5-041018	4/10/2018	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		**0.00087**	J	
		VMP-2-8.5-072418	7/24/2018	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-2-8.5-102418	10/24/2018	0.0076	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-2-8.5-012319	1/23/2019	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-2-8.5-042619	4/26/2019	0.0047	J		**0.018**			<0.0059	U		<0.0093	U		<0.0084	U		**0.15**			<0.052	U		**0.31**		
		VMP-2-8.5-072519	7/25/2019	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-2-8.5-102119	10/21/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-2-8.5-012420	1/24/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-2-8.5-042420	4/24/2020	0.0042	J	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-2-8.5-072420	7/24/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-2-8.5-110420	11/4/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-2-8.5-012521	1/25/2021	0.0078	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		**0.0028**	J		<0.055	U		**0.0032**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.022	U		0.006	J		**0.13**			<0.0054	U		<0.0048	U					**0.0041**	J		**0.21**		
		VMP-2-5-050615	5/6/2015	**0.0042**	J		<0.017	U		<0.0072	U		<0.006	U		<0.0052	U					**0.017**		J	<0.0072	U	
		VMP-2-5-110415	11/4/2015	**0.001**	J		0.016			<0.0061	U		<0.0051	J	U	<0.0045	U					**0.0069**	J		<0.0061	U	
		VMP-2-5-020116	2/1/2016	<0.02	U		0.0032	J		<0.0059	U		<0.005	U		<0.0044	U					**0.0097**	J		<0.0059	U	
		VMP-2-5-042716	4/27/2016	<0.025	U		0.007	J		<0.0076	U		<0.0064	U		<0.0056	U					**0.0073**	J		<0.0076	U	
		VMP-2-5-072616	7/26/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0061**	J		<0.0064	U	
		VMP-2-5-102616	10/26/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U		<0.014	U		**0.013**	J		<0.0067	U	
		VMP-2-5-012517	1/25/2017	**0.0048**	J		0.0089	J		<0.0088	J	U	<0.0073	U		<0.026	U					**0.019**			<0.0088	U	
		VMP-2-5-050317	5/3/2017	<0.019	U		0.0069	J		**0.0014**	J		<0.0048	U		<0.017	U					<0.011	U		**0.0054**	J	
		VMP-2-5-072417	7/24/2017	<0.02	U		0.088			<0.0061	U		<0.0051	U		<0.018	U					**0.06**			<0.0061	U	
		VMP-2-5-102617	10/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-2-5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0017**	J		<0.0054	U	
		VMP-2-5-032818	3/28/2018	<0.019	U		0.0025	J		<0.0058	U		<0.0049	U		<0.017	U		**0.00088**	J		<0.012	U		<0.0058	U	
		VMP-2-5-041018	4/10/2018	<0.019	U		0.0084	J		<0.0056	U		<0.0047	U		<0.016	U		<0.012	U		**0.014**			<0.0056	U	
		VMP-2-5-072418	7/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-2-5-102418	10/24/2018	<0.02	U		0.01	J		<0.0059	U		<0.005	U		<0.017	U					**0.0036**	J		<0.0059	U	
		VMP-2-5-012319	1/23/2019	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					**0.004**	J		<0.0053	U	
		VMP-2-5-042619	4/26/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-2-5-072519	7/25/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-2-5-102119	10/21/2019	<0.019	U		0.022			<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-2-5-012420	1/24/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-2-5-042420	4/24/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.067**			<0.0065	U	
		VMP-2-5-072420	7/24/2020	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.017**			<0.0056	U	
		VMP-2-5-110420	11/4/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0082**	J		<0.0064	U	
		VMP-2-5-012521	1/25/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0047**	J		<0.0063	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					<0.014	U		<0.0068	U	
		VMP-2-8.5-050615	5/6/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.065**		J	<0.0068	U	
		VMP-2-8.5-110415	11/4/2015	**0.001**	J		0.0067	J		<0.0069	U		<0.0057	J	U	<0.005	U					**0.03**			<0.0069	U	
		VMP-2-8.5-021616	2/16/2016	**0.0029**	J		0.002	J		<0.0078	U		**0.0015**	J		**0.0019**	J					**0.037**			<0.0078	U	
		VMP-2-8.5-042716	4/27/2016	**0.0019**	J		<0.018	U		<0.0076	U		<0.0064	U		<0.0056	U					**0.0067**	J		<0.0076	U	
		VMP-2-8.5-072616	7/26/2016	<0.024	U		<0.017	U		**0.0022**	J		<0.006	U		<0.021	U					**0.16**			<0.0072	U	
		VMP-2-8.5-102616	10/26/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.0035**	J		<0.0066	U	
		VMP-2-8.5-012517	1/25/2017	**0.0015**	J		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0044**	J		<0.0066	U	
		VMP-2-8.5-050317	5/3/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-2-8.5-072417	7/24/2017	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.15**			<0.0067	U	
		VMP-2-8.5-102617	10/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-2-8.5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0015**	J		<0.0055	U	
		VMP-2-8.5-032818	3/28/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	J	U	<0.016	U		<0.012	U		<0.011	U		<0.0056	U	
		VMP-2-8.5-041018	4/10/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		<0.012	U		**0.0096**	J		<0.0055	U	
		VMP-2-8.5-072418	7/24/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-2-8.5-102418	10/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0046**	J		<0.0058	U	
		VMP-2-8.5-012319	1/23/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0023**	J		<0.0055	U	
		VMP-2-8.5-042619	4/26/2019	<0.02	U		0.32			<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-2-8.5-072519	7/25/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-2-8.5-102119	10/21/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-2-8.5-012420	1/24/2020	<0.023	U		0.003	J		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-2-8.5-042420	4/24/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0046**	J		<0.0065	U	
		VMP-2-8.5-072420	7/24/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.032**			<0.0058	U	
		VMP-2-8.5-110420	11/4/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.014**			<0.006	U	
		VMP-2-8.5-012521	1/25/2021	<0.021	U		0.007	J		**0.0026**	J		<0.0053	U		<0.018	U					**0.017**			<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.37**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-2-5-050615	5/6/2015	<0.0062	U		<0.01	U		**0.062**			<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-2-5-110415	11/4/2015	<0.0053	U		<0.0085	U		**0.0049**	J		<0.0037	U		**0.0032**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-2-5-020116	2/1/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.001**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-2-5-042716	4/27/2016	<0.0066	U		<0.011	U		**0.0055**	J		<0.0046	U		**0.0033**	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-2-5-072616	7/26/2016	<0.0056	U		<0.009	U		**0.022**			<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-2-5-102616	10/26/2016	<0.0058	U		<0.0093	U		**0.012**			<0.004	U		<0.0051	J	U	<0.04	U		<0.0074	U		<0.0074	U	
		VMP-2-5-012517	1/25/2017	<0.0076	U		<0.012	U		<0.012	U		<0.0052	U		**0.012**			<0.053	U		<0.0097	U		<0.0097	U	
		VMP-2-5-050317	5/3/2017	<0.0049	U		<0.008	U		**0.0073**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-2-5-072417	7/24/2017	**0.0044**	J		<0.0085	U		**0.02**			<0.0036	U		**0.056**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-2-5-102617	10/26/2017	<0.005	U		<0.0081	U		**0.0064**	J		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-2-5-012918	1/29/2018	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-2-5-032818	3/28/2018	<0.0051	U		<0.0082	U		**0.0021**	J		<0.0035	U		**0.00028**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-5-041018	4/10/2018	<0.0049	U		<0.0079	U		**0.0026**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-2-5-072418	7/24/2018	<0.005	U		<0.0081	U		**0.027**			<0.0035	U		**0.0006**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-5-102418	10/24/2018	<0.0052	U		<0.0083	U		**0.0065**	J		<0.0036	U		**0.012**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-2-5-012319	1/23/2019	<0.0046	U		<0.0073	U		**0.0013**	J		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-2-5-042619	4/26/2019	<0.0053	U		<0.0085	U		**0.0033**	J		<0.0036	U		**0.0022**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-2-5-072519	7/25/2019	<0.0049	U		<0.008	U		**0.018**			<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-2-5-102119	10/21/2019	<0.005	U		<0.008	U		**0.0062**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-2-5-012420	1/24/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-2-5-042420	4/24/2020	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-2-5-072420	7/24/2020	<0.0049	U		<0.0079	U		**0.012**			<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-2-5-110420	11/4/2020	<0.0056	U		<0.009	U		**0.84**			<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-2-5-012521	1/25/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.0059	U		<0.0095	U		**0.0047**	J		<0.0041	U		**0.0011**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-2-8.5-050615	5/6/2015	<0.0059	U		<0.0095	U		**0.11**			<0.0041	U		**0.0032**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-2-8.5-110415	11/4/2015	<0.006	U		<0.0096	U		**0.012**			<0.0041	U		**0.0053**			<0.042	U		<0.0076	U		<0.0076	U	
		VMP-2-8.5-021616	2/16/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		<0.006	U		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-2-8.5-042716	4/27/2016	<0.0066	U		<0.011	U		**0.0074**	J		<0.0046	U		**0.00082**	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-2-8.5-072616	7/26/2016	<0.0063	U		<0.01	U		**0.02**			**0.037**			**0.001**	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-2-8.5-102616	10/26/2016	<0.0058	U		<0.0093	U		**0.02**			<0.004	U		<0.0051	J	U	<0.04	U		<0.0074	U		<0.0074	U	
		VMP-2-8.5-012517	1/25/2017	<0.0057	U		<0.0092	U		**0.0092**			<0.004	U		**0.00062**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-2-8.5-050317	5/3/2017	<0.0048	U		<0.0078	U		**0.01**			<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-2-8.5-072417	7/24/2017	<0.0058	U		<0.0094	U		**0.017**			<0.004	U		**0.0011**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-2-8.5-102617	10/26/2017	<0.0052	U		<0.0083	U		**0.019**			<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-2-8.5-012918	1/29/2018	<0.0048	U		<0.0077	U		**0.0078**			<0.0033	U		**0.00052**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-2-8.5-032818	3/28/2018	<0.0049	U		<0.0079	U		**0.0067**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-2-8.5-041018	4/10/2018	<0.0048	U		<0.0077	U		**0.0065**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-2-8.5-072418	7/24/2018	<0.0048	U		<0.0078	U		**0.021**			<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-2-8.5-102418	10/24/2018	<0.005	U		<0.0081	U		**0.016**			<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-2-8.5-012319	1/23/2019	<0.0047	U		<0.0076	U		**0.0047**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-2-8.5-042619	4/26/2019	<0.0052	U		<0.0083	U		**0.004**	J		<0.0036	U		**0.17**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-2-8.5-072519	7/25/2019	<0.0057	U		<0.0092	U		**0.011**			<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-2-8.5-102119	10/21/2019	<0.0051	U		<0.0082	U		**0.01**			<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-8.5-012420	1/24/2020	<0.0059	U		<0.0095	U		**0.0048**	J		<0.0041	U		**0.0043**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-2-8.5-042420	4/24/2020	<0.0056	U		<0.0091	U		**0.0031**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-2-8.5-072420	7/24/2020	<0.0051	U		<0.0082	U		**0.0092**			<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-8.5-110420	11/4/2020	<0.0052	U		<0.0084	U		**0.0066**	J		<0.0036	U		**0.00048**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-2-8.5-012521	1/25/2021	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0034**	J		<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-2	5 ft	VMP-2-5-021015	2/10/2015	<0.0071	U		<0.0074	U		**5.8**			**1.8**			0.12			<0.0034	U		5.5			**2.5**		
		VMP-2-5-050615	5/6/2015	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-2-5-110415	11/4/2015	<0.0067	U		0.0021	J		<0.0061	J	U	<0.0061	U		0.0032	J		<0.0032	U		0.0021	J		**0.002**	J	
		VMP-2-5-020116	2/1/2016	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-2-5-042716	4/27/2016	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-2-5-072616	7/26/2016	<0.007	U		0.0014	J		<0.0064	J	U	<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-2-5-102616	10/26/2016	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0078			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-2-5-012517	1/25/2017	<0.0096	U		<0.01	U		<0.0088	U		<0.0088	U		0.00076	J		<0.0046	U		0.059			**0.011**		
		VMP-2-5-050317	5/3/2017	<0.0062	U		<0.0065	U		**0.004**	J		<0.0057	U		0.013			<0.003	U		<0.005	U		<0.005	U	
		VMP-2-5-072417	7/24/2017	<0.0067	U		0.0018	J		**0.0009**	J		<0.0061	U		<0.0058	U		<0.0032	U		0.0071			**0.0027**	J	
		VMP-2-5-102617	10/26/2017	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-2-5-012918	1/29/2018	<0.0058	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-2-5-032818	3/28/2018	<0.0064	U		0.00088	J		**0.00052**	J		<0.0058	U		0.0049	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-2-5-041018	4/10/2018	<0.0062	U		0.0018	J		<0.0056	U		<0.0056	U		0.001	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-2-5-072418	7/24/2018	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-2-5-102418	10/24/2018	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-2-5-012319	1/23/2019	<0.0058	U		0.0013	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-2-5-042619	4/26/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0016	J		<0.0054	U	
		VMP-2-5-072519	7/25/2019	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-2-5-102119	10/21/2019	<0.0063	U		0.00094	J		<0.0057	U		<0.0057	U		0.052			<0.003	U		<0.005	U		<0.005	U	
		VMP-2-5-012420	1/24/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-2-5-042420	4/24/2020	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-2-5-072420	7/24/2020	<0.0062	U		0.0022	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-2-5-110420	11/4/2020	**0.041**			0.0016	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-2-5-012521	1/25/2021	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
	8.5 ft	VMP-2-8.5-021015	2/10/2015	<0.0074	U		<0.0078	U		**0.01**			<0.0068	J	U	0.0012	J		<0.0035	U		0.0041	J		**0.0021**	J	
		VMP-2-8.5-050615	5/6/2015	<0.0075	U		<0.0078	U		**0.0065**	J		<0.0068	J	U	0.0011	J		<0.0036	U		0.0092			**0.0048**	J	
		VMP-2-8.5-110415	11/4/2015	<0.0075	U		<0.0079	U		**0.0028**	J		<0.0069	U		0.009			<0.0036	U		0.0028	J		**0.0019**	J	
		VMP-2-8.5-021616	2/16/2016	<0.0085	U		0.0021	J		**0.0015**	J		<0.0078	U		0.012			<0.0041	U		<0.0069	U		<0.0069	U	
		VMP-2-8.5-042716	4/27/2016	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-2-8.5-072616	7/26/2016	<0.0079	U		<0.0082	U		<0.0072	J	U	<0.0072	U		<0.0069	U		<0.0038	U		0.00093	J		<0.0064	U	
		VMP-2-8.5-102616	10/26/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.01			**0.0028**	J	
		VMP-2-8.5-012517	1/25/2017	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.0011	J		<0.0058	U	
		VMP-2-8.5-050317	5/3/2017	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	J	U	<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-2-8.5-072417	7/24/2017	<0.0074	U		0.0018	J		<0.0067	U		<0.0067	U		0.0042	J		<0.0035	U		0.0017	J		<0.0059	U	
		VMP-2-8.5-102617	10/26/2017	<0.0065	U		0.001	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-2-8.5-012918	1/29/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-2-8.5-032818	3/28/2018	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		0.00062	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-2-8.5-041018	4/10/2018	<0.006	U		0.0016	J		<0.0055	U		**0.0009**	J		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-2-8.5-072418	7/24/2018	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		0.0019	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-2-8.5-102418	10/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-2-8.5-012319	1/23/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-2-8.5-042619	4/26/2019	<0.0065	U		0.0011	J		<0.0059	U		<0.0059	U		0.39			<0.0031	U		0.055			**0.015**		
		VMP-2-8.5-072519	7/25/2019	<0.0072	U		0.0012	J		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-2-8.5-102119	10/21/2019	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		0.0042	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-2-8.5-012420	1/24/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-2-8.5-042420	4/24/2020	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-2-8.5-072420	7/24/2020	<0.0064	U		0.0025	J		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-2-8.5-110420	11/4/2020	<0.0066	U		0.0023	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-2-8.5-012521	1/25/2021	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.0095			<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	**0.016**	J		**0.0017**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0052	J		<0.015	U	
		VMP-2-22-021015-DUP	2/10/2015	**0.006**	J		**0.0014**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-2-22-050615	5/6/2015	**0.08**			<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.018**		
		VMP-2-22-073015	7/30/2015	**0.043**			**0.0024**	J		**0.0032**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.011**	J	
		VMP-2-22-110415	11/4/2015	**0.035**			<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.015**	J	
		VMP-2-22-020116	2/1/2016	**0.026**	J		**0.0016**	J		**0.0019**	J		<0.014	U		<0.055	U		<0.0031	U		0.006	J		**0.0041**	J	
		VMP-2-22-020116-DUP	2/1/2016	**0.023**	J		<0.0046	U		**0.002**	J		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0024**	J	
		VMP-2-22-042716	4/27/2016	**0.033**	J		**0.00076**	J		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		**0.0041**	J	
		VMP-2-22-072616	7/26/2016	**0.0073**	J		<0.0046	U		**0.0017**	J		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-2-22-102616	10/26/2016	**0.031**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0093**	J	
		VMP-2-22-020217	2/2/2017	**0.0038**	J		**0.00061**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-22-050317	5/3/2017	<0.027	J	U	**0.002**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0058	J		<0.013	U	
		VMP-2-22-072417	7/24/2017	**0.029**	J		**0.00085**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0042**	J	
		VMP-2-22-072417-DUP	7/24/2017	**0.045**			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0068**	J	
		VMP-2-22-102617	10/26/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-2-22-012918	1/29/2018	<0.026	U		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-2-22-032818	3/28/2018	**0.013**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0027**	J	
		VMP-2-22-041018	4/10/2018	**0.011**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0025**	J	
		VMP-2-22-072418	7/24/2018	**0.023**	J	J	<0.004	U		**0.0041**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-2-22-072418-DUP	7/24/2018	**0.13**		J	**0.0017**	J		**0.0043**	J		<0.012	U		<0.047	U		<0.0026	U		0.015			**0.0051**	J	
		VMP-2-22-102418	10/24/2018	**0.0077**	J		<0.0034	U		**0.0016**	J		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-2-22-102418-DUP	10/24/2018	**0.015**	J		<0.0038	U		**0.0012**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-22-012319	1/23/2019	**0.012**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-2-22-042619	4/26/2019	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-2-22-042619-DUP	4/26/2019	**0.018**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-2-22-072519	7/25/2019	**0.01**	J		<0.0039	U		**0.0024**	J		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.012	U		<0.014	U	
		VMP-2-22-102119	10/21/2019	**0.0091**	J		<0.0039	U		**0.0019**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-2-22-012420	1/24/2020	**0.0056**	J	J	<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-2-22-042420	4/24/2020	**0.0079**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-2-22-042420-DUP	4/24/2020	**0.013**	J		**0.0027**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		0.0027	J		<0.017	U	
		VMP-2-22-072420	7/24/2020	**0.01**	J		<0.0041	U		**0.0015**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-2-22-110420	11/4/2020	**0.045**	J		**0.091**			<0.082	U		<0.13	U		<0.19	U		<0.027	U		17			<0.14	U	
		VMP-2-22-012521	1/25/2021	**0.0064**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	42 ft	VMP-2-42-021015	2/10/2015	<11	U		**15**			<8	U		<12	U		<4.6	U		<2.6	U		36000			<14	U	
		VMP-2-42-050615	5/6/2015	<160	U		**28**	J		<110	U		<180	U		<66	U		<38	U		44000			<200	U	
		VMP-2-42-061515-R	6/15/2015	<130	U		**39**	J		<91	U		<140	U		<53	U		<30	U		75000	E	J	<160	U	
		VMP-2-42-073015	7/30/2015	**310**	J		**51**	J		<540	U		<840	U		<3100	U		<180	U	UJ	48000		J	<960	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-2-22-021015-DUP	2/10/2015	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-2-22-050615	5/6/2015	**0.0069**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-2-22-073015	7/30/2015	**0.027**			<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0046**	J		<0.027	U		<0.0068	U	
		VMP-2-22-110415	11/4/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-2-22-020116	2/1/2016	**0.0023**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.004**	J		<0.029	U		<0.0073	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0043**	J		<0.03	U		<0.0075	U	
		VMP-2-22-042716	4/27/2016	<0.02	U		<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0078	U		<0.033	U		<0.0082	U	
		VMP-2-22-072616	7/26/2016	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0053**	J		<0.03	ND,UJ	UJ	<0.0074	U	
		VMP-2-22-102616	10/26/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-2-22-020217	2/2/2017	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	ND,UJ		<0.0062	U	
		VMP-2-22-050317	5/3/2017	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0017**	J		<0.023	U		<0.0058	U	
		VMP-2-22-072417	7/24/2017	**0.0038**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0051**	J		<0.027	U		<0.0068	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.003**	J		<0.026	U		<0.0065	U	
		VMP-2-22-102617	10/26/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0039**	J		<0.023	U		<0.0057	U	
		VMP-2-22-012918	1/29/2018	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.00096**	J		<0.022	U		<0.0056	U	
		VMP-2-22-032818	3/28/2018	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0014**	J		<0.024	U		<0.0059	U	
		VMP-2-22-041018	4/10/2018	**0.0046**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.00073**	J		<0.024	U		<0.006	U	
		VMP-2-22-072418	7/24/2018	**0.002**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.015**			<0.026	U		<0.0064	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.014**			**0.013**	J		<0.0062	U	
		VMP-2-22-102418	10/24/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0056**			<0.022	U		<0.0056	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0056**	J		<0.024	U		<0.0061	U	
		VMP-2-22-012319	1/23/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-2-22-042619	4/26/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-2-22-072519	7/25/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0089**			<0.025	U		<0.0063	ND,UJ	UJ
		VMP-2-22-102119	10/21/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.008**			<0.025	U		<0.0063	U	
		VMP-2-22-012420	1/24/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0019**	J		<0.029	U		<0.0072	U	
		VMP-2-22-042420	4/24/2020	<0.018	U		<0.0089	U		**0.0014**	J		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-2-22-072420	7/24/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0078**			<0.026	U		<0.0066	U	
		VMP-2-22-110420	11/4/2020	<0.15	U		<0.077	U		<0.056	U		<0.1	U		<0.13	U		<0.06	U		<0.1	U		<0.063	U	
		VMP-2-22-012521	1/25/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0025**	J		<0.026	U		<0.0065	U	
	42 ft	VMP-2-42-021015	2/10/2015	<3.7	U		<7.5	U		<5.5	U		<10	U		<12	U		<5.8	U		<9.8	U		<6.2	U	
		VMP-2-42-050615	5/6/2015	<53	U		<110	U		<78	U		<140	U		<180	U		<83	U		<140	U		<88	U	
		VMP-2-42-061515-R	6/15/2015	<42	U		<86	U		<63	U		<120	U		<140	U		<66	U		<110	U		<70	U	
		VMP-2-42-073015	7/30/2015	**130**	J		<510	U		<370	U		<690	U		<850	U		<400	U		<1700	U		<420	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	**0.0012**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0031**	J		<0.0052	U		<0.0052	U	
		VMP-2-22-021015-DUP	2/10/2015	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-2-22-050615	5/6/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-2-22-073015	7/30/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.005**	J		<0.0053	U		<0.0053	U	
		VMP-2-22-110415	11/4/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0046**	J		<0.0054	U		<0.0054	U	
		VMP-2-22-020116	2/1/2016	**0.0034**	J		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0019**	J		<0.0058	U		<0.0058	U	
		VMP-2-22-042716	4/27/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		<0.0079	U		<0.0064	U		<0.0064	U	
		VMP-2-22-072616	7/26/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-2-22-102616	10/26/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-2-22-020217	2/2/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-2-22-050317	5/3/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		<0.0055	U		<0.0045	U		<0.0045	U	
		VMP-2-22-072417	7/24/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-2-22-102617	10/26/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-2-22-012918	1/29/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-2-22-032818	3/28/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-2-22-041018	4/10/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-2-22-072418	7/24/2018	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0042**	J		<0.005	U		<0.005	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-2-22-102418	10/24/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-2-22-012319	1/23/2019	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-2-22-042619	4/26/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-2-22-072519	7/25/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0055**	J		<0.005	U		<0.005	U	
		VMP-2-22-102119	10/21/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0038**	J		<0.0049	U		<0.0049	U	
		VMP-2-22-012420	1/24/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-2-22-042420	4/24/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0023**	J		<0.0057	U		<0.0057	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-2-22-072420	7/24/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0049**	J		<0.0052	U		<0.0052	U	
		VMP-2-22-110420	11/4/2020	**0.46**			<0.094	U		<0.074	U		<0.074	U		<0.074	U		<0.06	U		<0.05	U		<0.05	U	
		VMP-2-22-012521	1/25/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
	42 ft	VMP-2-42-021015	2/10/2015	**320**			<9.1	U		<7.2	U		<7.2	U		<7.2	U		<5.9	U		<4.8	U		<4.8	U	
		VMP-2-42-050615	5/6/2015	**290**			<130	U		<100	U		<100	U		<100	U		<84	U		<69	U		<69	U	
		VMP-2-42-061515-R	6/15/2015	**510**			<100	U		<82	U		<82	U		<82	U		<67	U		<55	U		<55	U	
		VMP-2-42-073015	7/30/2015	**390**			<620	U		<490	U		<490	U		<490	U		<400	U		<330	U		<330	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-2-22-021015-DUP	2/10/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-2-22-050615	5/6/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-2-22-073015	7/30/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0041**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-2-22-110415	11/4/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0044**	J		<0.0061	U		<0.006	U		<0.006	U		**0.0033**	J	
		VMP-2-22-020116	2/1/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-2-22-042716	4/27/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0074	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-2-22-072616	7/26/2016	<0.0057	U		<0.0057	U		<0.0057	U		**0.003**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-2-22-102616	10/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-2-22-020217	2/2/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-22-050317	5/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0041**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-2-22-072417	7/24/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.005	U		<0.005	U		<0.005	U		**0.003**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-2-22-102617	10/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-2-22-012918	1/29/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-2-22-032818	3/28/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-2-22-041018	4/10/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-2-22-072418	7/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.0048	U		0.0012	J		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-22-102418	10/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-22-012319	1/23/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-2-22-042619	4/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-2-22-072519	7/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-2-22-102119	10/21/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-2-22-012420	1/24/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-2-22-042420	4/24/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-2-22-072420	7/24/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-2-22-110420	11/4/2020	<0.048	U		<0.048	U		<0.048	U		<0.17	U		<0.057	U		<0.056	U		<0.056	U		<0.18	U	
		VMP-2-22-012521	1/25/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	42 ft	VMP-2-42-021015	2/10/2015	<4.7	U		<4.7	U		<4.7	U		<4.1	U		<5.5	U		<5.4	U		<5.4	U		<17	U	
		VMP-2-42-050615	5/6/2015	<67	U		<67	U		<67	U		<59	U		<78	U		<77	U		<77	U		<240	U	
		VMP-2-42-061515-R	6/15/2015	<54	U		<54	U		<54	U		<47	U		<63	U		<62	U		<62	U		<200	U	
		VMP-2-42-073015	7/30/2015	<320	U		<320	U		<320	U		**160**	J		<370	U		<370	U		<370	U		<1200	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	0.023		J	**0.0032**	J		0.0031	J	J	<0.0099	U		<0.009	U		**0.0042**	J		<0.055	U		**0.011**		
		VMP-2-22-021015-DUP	2/10/2015	<0.0095	J	UJ	**0.0024**	J		0.0012	J	J	<0.0097	U		<0.0088	U		**0.005**	J		<0.054	U		**0.0098**		
		VMP-2-22-050615	5/6/2015	0.0096	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-2-22-073015	7/30/2015	0.013	J0	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-2-22-110415	11/4/2015	0.018			<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		**0.0035**	J		<0.056	U		**0.0014**	J	
		VMP-2-22-020116	2/1/2016	0.0086	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-2-22-020116-DUP	2/1/2016	0.0094	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-2-22-042716	4/27/2016	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.068	U		<0.0056	U	
		VMP-2-22-072616	7/26/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-2-22-102616	10/26/2016	0.011			**0.0017**	J		<0.0066	U		<0.01	U		<0.0094	U		**0.003**	J		<0.058	U		**0.0015**	J	
		VMP-2-22-020217	2/2/2017	0.058			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-2-22-050317	5/3/2017	0.0086			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.003**	J		<0.048	U		**0.0047**		
		VMP-2-22-072417	7/24/2017	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-2-22-072417-DUP	7/24/2017	0.018			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-2-22-102617	10/26/2017	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-2-22-012918	1/29/2018	0.0039	J		<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-2-22-032818	3/28/2018	0.0052	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-2-22-041018	4/10/2018	0.012			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-2-22-072418	7/24/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-2-22-072418-DUP	7/24/2018	0.01			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0021**	J	
		VMP-2-22-102418	10/24/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0018**	J		<0.046	U		**0.0041**		
		VMP-2-22-102418-DUP	10/24/2018	0.0046	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0045**		
		VMP-2-22-012319	1/23/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-2-22-042619	4/26/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-2-22-072519	7/25/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-2-22-102119	10/21/2019	0.014			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-2-22-012420	1/24/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-2-22-042420	4/24/2020	0.0052	J	J	<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-2-22-042420-DUP	4/24/2020	0.005	J	J	<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-2-22-072420	7/24/2020	0.0068	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-2-22-110420	11/4/2020	<0.092	U		<0.053	U		<0.06	U		<0.094	U		<0.086	U		**0.13**			<0.52	U		**1.5**		
		VMP-2-22-012521	1/25/2021	<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	42 ft	VMP-2-42-021015	2/10/2015	<9	U		**1.8**	J		<5.8	U		<9.1	U		<8.3	U		**130**			<51	U		**1000**		
		VMP-2-42-050615	5/6/2015	44	J		<74	U		<84	U		<130	U		<120	U		**220**			<720	U		**1400**		
		VMP-2-42-061515-R	6/15/2015	<100	U		<59	U		<67	U		<100	U		<95	U		**510**			<580	U		**3200**		
		VMP-2-42-073015	7/30/2015	<610	U		<350	U		<400	U		<620	U		<570	U		**200**	J		<3400	U		**1500**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	<0.021	U		0.0085	J		<0.0063	U		<0.0053	U		<0.0046	U					**0.038**		J	<0.0063	U	
		VMP-2-22-021015-DUP	2/10/2015	<0.021	U		0.0061	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.0039**	J	J	<0.0062	U	
		VMP-2-22-050615	5/6/2015	**0.0032**	J		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					**0.011**	J	J	<0.0073	U	
		VMP-2-22-073015	7/30/2015	<0.022	ND,UJ	UJ	<0.016	U		<0.0065	U		**0.0025**	J		<0.0048	U					**0.0028**	J		<0.0065	U	
		VMP-2-22-110415	11/4/2015	**0.0016**	J		0.026			<0.0065	U		<0.0054	J	U	<0.0048	U					**0.34**			<0.0065	U	
		VMP-2-22-020116	2/1/2016	<0.023	U		0.0061	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.014**			<0.0069	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.024	U		0.0059	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.0033**	J		<0.0071	U	
		VMP-2-22-042716	4/27/2016	**0.0016**	J		<0.019	U		<0.0078	U		<0.0065	U		<0.0058	U					**0.004**	J		<0.0078	U	
		VMP-2-22-072616	7/26/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.021	U					**0.012**	J		<0.007	U	
		VMP-2-22-102616	10/26/2016	**0.0041**	J		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.013**			<0.0066	U	
		VMP-2-22-020217	2/2/2017	<0.02	U		0.0023	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0096**	J		<0.0059	U	
		VMP-2-22-050317	5/3/2017	<0.018	U		0.034			**0.0025**	J		<0.0046	U		<0.016	U					<0.011	U		**0.0019**	J	
		VMP-2-22-072417	7/24/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0068**	J		<0.0064	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.034**			<0.0062	U	
		VMP-2-22-102617	10/26/2017	<0.018	U		0.0034	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-2-22-012918	1/29/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0014**	J		<0.0053	U	
		VMP-2-22-032818	3/28/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U		<0.012	U		<0.011	U		<0.0056	U	
		VMP-2-22-041018	4/10/2018	<0.019	U		<0.014	U		<0.0057	U		**0.0014**	J		<0.017	U		<0.012	U		**0.01**	J		<0.0057	U	
		VMP-2-22-072418	7/24/2018	<0.02	U		0.0027	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.02	U		0.0066	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0054**	J		<0.0059	U	
		VMP-2-22-102418	10/24/2018	<0.018	U		0.0058	J		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.019	U		0.0041	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0017**	J		<0.0058	U	
		VMP-2-22-012319	1/23/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-2-22-042619	4/26/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0024**	J		<0.0062	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0055**	J		<0.0058	U	
		VMP-2-22-072519	7/25/2019	<0.02	U		0.0032	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-2-22-102119	10/21/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0019**	J		<0.0059	U	
		VMP-2-22-012420	1/24/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-2-22-042420	4/24/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.0038**	J		<0.007	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.0053**	J		<0.007	U	
		VMP-2-22-072420	7/24/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.01**	J		<0.0063	U	
		VMP-2-22-110420	11/4/2020	<0.2	U		71			<0.06	U		<0.05	U		<0.044	U					<0.12	U		**0.016**	J	
		VMP-2-22-012521	1/25/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0078**	J		<0.0062	U	
	42 ft	VMP-2-42-021015	2/10/2015	<19	U		20000			<5.8	U		<4.9	U		<4.3	U					<12	U		<5.8	U	
		VMP-2-42-050615	5/6/2015	<280	U		29000			<84	U		<70	U		<61	U					<170	U		<84	U	
		VMP-2-42-061515-R	6/15/2015	<220	U		45000	E	J	<67	U		<56	U		<49	U					<130	U		<67	U	
		VMP-2-42-073015	7/30/2015	<1300	U		32000			<400	U		<330	U		<290	U					<800	U		<400	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	<0.0055	U		<0.0088	U		**0.0027**	J		<0.0038	U		**0.0097**			<0.038	U		<0.007	U		<0.007	U	
		VMP-2-22-021015-DUP	2/10/2015	<0.0054	U		<0.0087	U		**0.0019**	J		<0.0037	U		**0.0085**			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-2-22-050615	5/6/2015	<0.0063	U		<0.01	U		**0.22**			<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-2-22-073015	7/30/2015	<0.0056	U		<0.0091	U		**0.19**			**0.0021**	J		<0.005	U		<0.039	U	UJ	<0.0072	J	U	<0.0072	U	
		VMP-2-22-110415	11/4/2015	<0.0056	U		<0.0091	U		**0.016**			**0.0024**	J		**0.0045**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-2-22-020116	2/1/2016	<0.006	U		<0.0097	U		**0.0071**	J		<0.0042	U		**0.0029**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.0062	U		<0.0099	U		**0.0048**	J		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-2-22-042716	4/27/2016	<0.0068	U		<0.011	U		**0.0037**	J		**0.0053**			<0.006	U		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-2-22-072616	7/26/2016	<0.0061	U		<0.0098	U		**0.01**			<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-2-22-102616	10/26/2016	<0.0058	U		<0.0093	U		**0.014**			<0.004	U		<0.0051	J	U	<0.04	U		<0.0074	U		<0.0074	U	
		VMP-2-22-020217	2/2/2017	<0.0051	U		<0.0082	U		**0.01**			<0.0035	U		**0.00064**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-22-050317	5/3/2017	<0.0048	U		<0.0077	U		**0.012**			<0.0033	U		**0.0006**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-2-22-072417	7/24/2017	<0.0056	U		<0.009	U		**0.0081**	J		<0.0039	U		**0.0012**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-2-22-072417-DUP	7/24/2017	**0.001**	J		<0.0086	U		**0.007**	J		<0.0037	U		**0.00094**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-2-22-102617	10/26/2017	<0.0047	U		<0.0076	U		**0.015**			<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-2-22-012918	1/29/2018	<0.0046	U		<0.0074	U		**0.0058**	J		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-2-22-032818	3/28/2018	<0.0048	U		<0.0078	U		**0.0069**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-2-22-041018	4/10/2018	<0.005	U		<0.008	U		**0.0059**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-2-22-072418	7/24/2018	<0.0053	U		<0.0085	U		**0.011**			<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.0051	U		<0.0082	U		**0.012**			<0.0035	U		**0.00068**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-2-22-102418	10/24/2018	<0.0046	U		<0.0074	U		**0.013**			<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.005	U		<0.0081	U		**0.013**			<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-22-012319	1/23/2019	<0.0047	U		<0.0076	U		**0.008**			<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-2-22-042619	4/26/2019	<0.0054	U		<0.0086	U		**0.0062**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.0051	U		<0.0082	U		**0.0064**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-2-22-072519	7/25/2019	<0.0052	U		<0.0084	U		**0.0068**	J		<0.0036	U		**0.0008**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-2-22-102119	10/21/2019	<0.0052	U		<0.0083	U		**0.0099**			<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-2-22-012420	1/24/2020	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-2-22-042420	4/24/2020	<0.006	U		<0.0097	U		**0.0039**	J		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.006	U		<0.0097	U		**0.0035**	J		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-2-22-072420	7/24/2020	<0.0054	U		<0.0088	U		**0.0059**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-2-22-110420	11/4/2020	<0.052	U		<0.084	U		<0.083	U		<0.036	U		<0.046	U		<0.36	U		<0.067	U		<0.067	U	
		VMP-2-22-012521	1/25/2021	<0.0054	U		<0.0086	U		**0.0036**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
	42 ft	VMP-2-42-021015	2/10/2015	<5.1	U		<8.2	U		<8.1	U		<3.5	U		**0.7**	J		<35	U		<6.5	U		<6.5	U	
		VMP-2-42-050615	5/6/2015	<72	U		<120	U					<50	U		**27**	J		<500	U		<93	U		<93	U	
		VMP-2-42-061515-R	6/15/2015	<58	U		<93	U		<92	U		<40	U		**40**	J		<400	U		<74	U		<74	U	
		VMP-2-42-073015	7/30/2015	<340	U		<560	U		<550	U		<240	U		**150**	J		<2400	U	UJ	<440	U		<440	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	22 ft	VMP-2-22-021015	2/10/2015	<0.0069	U		<0.0072	U		**0.0053**	J		<0.0063	J	U	0.012			<0.0033	U		0.0066			**0.0021**	J	
		VMP-2-22-021015-DUP	2/10/2015	<0.0068	U		<0.0071	U		<0.0062	J	U	<0.0062	J	U	0.011			<0.0032	U		0.0037	J		**0.0012**	J	
		VMP-2-22-050615	5/6/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.013			<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-2-22-073015	7/30/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0058	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-2-22-110415	11/4/2015	<0.0071	U		0.0025	J		<0.0065	U		<0.0065	U		0.002	J		<0.0034	U		0.0017	J		<0.0058	U	
		VMP-2-22-020116	2/1/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-2-22-020116-DUP	2/1/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-2-22-042716	4/27/2016	<0.0086	U		<0.009	U		<0.0078	U		<0.0078	U		<0.0074	U		<0.0041	U		<0.0069	U		<0.0069	U	
		VMP-2-22-072616	7/26/2016	<0.0077	U		0.0018	J		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-2-22-102616	10/26/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.0063			**0.0015**	J	
		VMP-2-22-020217	2/2/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.026			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-2-22-050317	5/3/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.088			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-2-22-072417	7/24/2017	<0.007	U		0.0014	J		**0.00078**	J		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-2-22-072417-DUP	7/24/2017	<0.0067	U		0.0015	J		**0.00073**	J		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-2-22-102617	10/26/2017	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-2-22-012918	1/29/2018	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-2-22-032818	3/28/2018	<0.0061	U		0.0012	J		<0.0056	U		<0.0056	U		0.00057	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-2-22-041018	4/10/2018	<0.0063	U		0.0016	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-2-22-072418	7/24/2018	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-2-22-072418-DUP	7/24/2018	<0.0064	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-2-22-102418	10/24/2018	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		0.0025	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-2-22-102418-DUP	10/24/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0022	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-2-22-012319	1/23/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-2-22-042619	4/26/2019	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-2-22-042619-DUP	4/26/2019	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-2-22-072519	7/25/2019	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		0.0015	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-2-22-102119	10/21/2019	<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-2-22-012420	1/24/2020	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-2-22-042420	4/24/2020	<0.0076	U		0.0013	J		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-2-22-042420-DUP	4/24/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-2-22-072420	7/24/2020	<0.0069	U		0.0028	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-2-22-110420	11/4/2020	<0.066	U		<0.069	U		<0.06	U		<0.06	U		0.98			<0.031	U		<0.053	U		<0.053	U	
		VMP-2-22-012521	1/25/2021	<0.0068	U		0.0023	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
	42 ft	VMP-2-42-021015	2/10/2015	<6.4	U		<6.7	U		<5.8	U		<5.8	U		970			<3	U		6.2			<5.2	U	
		VMP-2-42-050615	5/6/2015	<91	U		<96	U		<84	U		<84	U		940			<43	U		43	J		**15**	J	
		VMP-2-42-061515-R	6/15/2015	<73	U		<76	U		<67	U		<67	U		1200			<35	U		<59	U		<59	U	
		VMP-2-42-073015	7/30/2015	<440	U		<460	U		<400	U		<400	U		670			<210	U		<350	U		<350	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	**0.0076**	J		<0.0039	U		**0.0017**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-3-5-050415	5/4/2015	**0.038**			**0.0037**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		**0.021**		
		VMP-3-5-072915	7/29/2015	**0.03**	J		**0.0039**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.011	J		**0.012**	J	
		VMP-3-5-110515	11/5/2015	**0.024**	J		**0.0013**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.016			**0.019**		
		VMP-3-5-021616	2/16/2016	**0.048**			**0.001**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.014			**0.0086**	J	
		VMP-3-5-042716	4/27/2016	**0.01**	J		**0.0038**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0061	J		**0.01**	J	
		VMP-3-5-080116	8/1/2016	**0.019**	J		<0.0062	U		<0.013	U		<0.02	U		<0.076	U		<0.0043	U		<0.018	U		<0.023	U	
		VMP-3-5-102616	10/26/2016	**0.023**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0074**	J	
		VMP-3-5-013117	1/31/2017	**0.0082**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-3-5-042717	4/27/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-3-5-072017	7/20/2017	**0.0082**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-3-5-102617	10/26/2017	**0.012**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-3-5-012318	1/23/2018	**0.015**	J		**0.0014**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0028**	J	
		VMP-3-5-042718	4/27/2018	**0.015**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0032**	J	
		VMP-3-5-072318	7/23/2018	**0.03**			**0.00035**	J		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0059**	J	
		VMP-3-5-102918	10/29/2018	**0.0097**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.01	J		<0.014	U	
		VMP-3-5-012419	1/24/2019	**0.012**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.0048	J		**0.0029**	J	
		VMP-3-5-042919	4/29/2019	**0.049**			<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-3-5-072519	7/25/2019	**0.015**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U	UJ	<0.0028	U		<0.012	U		<0.015	U	
		VMP-3-5-101819	10/18/2019	**0.0083**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U	UJ	<0.015	U	
		VMP-3-5-012720	1/27/2020	**0.0077**	J	J	<0.0054	U		<0.011	U		<0.018	U		<0.066	U		<0.0038	U		<0.016	U		<0.02	U	
		VMP-3-5-012720-DUP	1/27/2020	**0.0082**	J	J	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-3-5-042920	4/29/2020	**0.011**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-3-5-072920	7/29/2020	**0.022**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.0026**	J	
		VMP-3-5-110420	11/4/2020	**0.024**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0032**	J	
		VMP-3-5-012521	1/25/2021	**0.0065**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
	10 ft	VMP-3-10-020915	2/9/2015	**0.013**	J		**0.0015**	J		**0.0044**	J		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-3-10-050415	5/4/2015	**0.032**	J		**0.0059**			<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.028**		
		VMP-3-10-072915	7/29/2015	**0.077**			**0.0031**	J		**0.0026**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.018**		
		VMP-3-10-110315	11/3/2015	**0.022**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0081	J		**0.0085**	J	
		VMP-3-10-021616	2/16/2016	**0.025**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0057**	J	
		VMP-3-10-042716	4/27/2016	**0.026**	J		**0.0017**	J		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		0.0068	J		**0.015**	J	
		VMP-3-10-080216	8/2/2016	**0.079**			**0.0023**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.018**		
		VMP-3-10-102616	10/26/2016	**0.033**	J		**0.0023**	J		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		**0.0058**	J	
		VMP-3-10-013117	1/31/2017	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0023**	J	
		VMP-3-10-042717	4/27/2017	<0.028	J	U	**0.0025**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0085**	J	
		VMP-3-10-072017	7/20/2017	**0.029**	J		**0.00053**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0056**	J	
		VMP-3-10-102617	10/26/2017	**0.018**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0043**	J	
		VMP-3-10-012318	1/23/2018	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-3-10-042718	4/27/2018	**0.0077**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-3-10-072318	7/23/2018	**0.023**	J		**0.00061**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-3-10-102918	10/29/2018	**0.012**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-3-10-020119	2/1/2019	**0.02**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0037**	J	
		VMP-3-10-042919	4/29/2019	**0.016**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-3-10-072519	7/25/2019	**0.019**	J		<0.004	U		**0.0019**	J		<0.013	U		<0.049	U	UJ	<0.0028	U		<0.012	U		<0.015	U	
		VMP-3-10-072519-DUP	7/25/2019	**0.02**	J		<0.0048	U		**0.0021**	J		<0.016	U		<0.059	U	UJ	<0.0034	U		<0.014	U		<0.018	U	
		VMP-3-10-101819	10/18/2019	**0.0084**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U	UJ	<0.017	U	
		VMP-3-10-022120	2/21/2020	<0.027	U		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-3-10-072920	7/29/2020	**0.018**	J		<0.004	U		**0.0015**	J		<0.013	U		<0.049	U		<0.0028	U		0.0021	J		**0.0039**	J	
		VMP-3-10-110420	11/4/2020	**0.021**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0034**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.004**	J		<0.025	U		<0.0064	U	
		VMP-3-5-050415	5/4/2015	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0017**	J		<0.029	U		<0.0074	U	
		VMP-3-5-072915	7/29/2015	**0.0045**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	J	U	**0.0039**	J		<0.0068	U	
		VMP-3-5-110515	11/5/2015	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		**0.0018**	J		<0.0058	U	
		VMP-3-5-021616	2/16/2016	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-3-5-042716	4/27/2016	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0067	U	
		VMP-3-5-080116	8/1/2016	**0.0062**	J		<0.012	U		<0.009	U		<0.017	U		<0.021	U		**0.011**			<0.04	U		<0.01	U	
		VMP-3-5-102616	10/26/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-3-5-013117	1/31/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	ND,UJ	UJ	<0.0064	U	
		VMP-3-5-042717	4/27/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-3-5-072017	7/20/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0052**	J		<0.026	U		<0.0065	U	
		VMP-3-5-102617	10/26/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-3-5-012318	1/23/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-3-5-042718	4/27/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-3-5-072318	7/23/2018	**0.0021**	J		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0066	U	
		VMP-3-5-102918	10/29/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-3-5-012419	1/24/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-3-5-042919	4/29/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-3-5-072519	7/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-3-5-101819	10/18/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	J	U
		VMP-3-5-012720	1/27/2020	<0.021	U		<0.011	U		<0.0078	U		<0.014	U		<0.018	U		<0.0083	U		<0.035	U	UJ	<0.0088	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-3-5-042920	4/29/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-3-5-072920	7/29/2020	**0.0023**	J		<0.0084	U		**0.00063**	J		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-3-5-110420	11/4/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-3-5-012521	1/25/2021	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
	10 ft	VMP-3-10-020915	2/9/2015	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.01**			<0.023	U		<0.0058	U	
		VMP-3-10-050415	5/4/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0019**	J		<0.03	U		<0.0074	U	
		VMP-3-10-072915	7/29/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.008**			**0.0062**	J		<0.0063	U	
		VMP-3-10-110315	11/3/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.0021**	J		<0.029	U		<0.0072	U	
		VMP-3-10-021616	2/16/2016	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-3-10-042716	4/27/2016	**0.0039**	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.0064**	J		<0.031	U		<0.0078	U	
		VMP-3-10-080216	8/2/2016	**0.077**			<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0096**			<0.028	U		<0.0071	U	
		VMP-3-10-102616	10/26/2016	**0.011**	J		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		**0.0037**	J		<0.032	U		<0.0081	U	
		VMP-3-10-013117	1/31/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-3-10-042717	4/27/2017	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-3-10-072017	7/20/2017	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0061**	J		<0.027	U		<0.0068	U	
		VMP-3-10-102617	10/26/2017	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0014**	J		<0.026	U		<0.0064	U	
		VMP-3-10-012318	1/23/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-3-10-042718	4/27/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0083**			<0.024	U		<0.0062	U	
		VMP-3-10-072318	7/23/2018	**0.0028**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0026**	J		<0.025	U		<0.0063	U	
		VMP-3-10-102918	10/29/2018	**0.0013**	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0015**	J		<0.023	U		<0.0058	U	
		VMP-3-10-020119	2/1/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0018**	J		<0.026	U		<0.0064	U	
		VMP-3-10-042919	4/29/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0033**	J		<0.025	U		<0.0062	U	
		VMP-3-10-072519	7/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0074**			<0.026	U		<0.0065	ND,UJ	UJ
		VMP-3-10-072519-DUP	7/25/2019	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0083**			<0.031	U		<0.0079	ND,UJ	UJ
		VMP-3-10-101819	10/18/2019	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-3-10-022120	2/21/2020	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-3-10-072920	7/29/2020	**0.003**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.003**	J		<0.026	U		<0.0065	U	
		VMP-3-10-110420	11/4/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0059**	J		<0.028	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-3-5-050415	5/4/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-3-5-072915	7/29/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-3-5-110515	11/5/2015	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0045**	J		<0.0045	U		<0.0045	U	
		VMP-3-5-021616	2/16/2016	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0036**	J		<0.0047	U		<0.0047	U	
		VMP-3-5-042716	4/27/2016	**0.0054**			<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-3-5-080116	8/1/2016	<0.0067	U		<0.015	U		<0.012	U		<0.012	U		<0.012	U		**0.0037**	J		<0.0079	U		<0.0079	U	
		VMP-3-5-102616	10/26/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-3-5-013117	1/31/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-3-5-042717	4/27/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-3-5-072017	7/20/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-3-5-102617	10/26/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-3-5-012318	1/23/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-3-5-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-3-5-072318	7/23/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-3-5-102918	10/29/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-3-5-012419	1/24/2019	**0.00079**	J		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-3-5-042919	4/29/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0033**	J		<0.0046	U		<0.0046	U	
		VMP-3-5-072519	7/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-3-5-101819	10/18/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	J	U	<0.0075	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-3-5-012720	1/27/2020	<0.0059	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		<0.0084	U		<0.0069	U		<0.0069	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-3-5-042920	4/29/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-3-5-072920	7/29/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0022**	J		**0.0023**	J		<0.0054	U	
		VMP-3-5-110420	11/4/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-3-5-012521	1/25/2021	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0028**	J		<0.0054	U		<0.0054	U	
	10 ft	VMP-3-10-020915	2/9/2015	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-3-10-050415	5/4/2015	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0022**	J		<0.0058	U		<0.0058	U	
		VMP-3-10-072915	7/29/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-3-10-110315	11/3/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.003**	J		<0.0056	U		<0.0056	U	
		VMP-3-10-021616	2/16/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-3-10-042716	4/27/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0028**	J		<0.0061	U		<0.0061	U	
		VMP-3-10-080216	8/2/2016	**0.0014**	J		<0.011	U		<0.0083	U		<0.0083	U		**0.0023**	J		**0.0032**	J		<0.0056	U		<0.0056	U	
		VMP-3-10-102616	10/26/2016	**0.0014**	J		<0.012	U		<0.0094	U		<0.0094	U		<0.0094	U		**0.0025**	J		<0.0063	U		<0.0063	U	
		VMP-3-10-013117	1/31/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-3-10-042717	4/27/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-3-10-072017	7/20/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.002**	J		<0.0053	U		<0.0053	U	
		VMP-3-10-102617	10/26/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-3-10-012318	1/23/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-3-10-042718	4/27/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-3-10-072318	7/23/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-3-10-102918	10/29/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-3-10-020119	2/1/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-3-10-042919	4/29/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0035**	J		<0.0049	U		<0.0049	U	
		VMP-3-10-072519	7/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-3-10-072519-DUP	7/25/2019	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0021**	J		<0.0062	U		<0.0062	U	
		VMP-3-10-101819	10/18/2019	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0022**	J		<0.006	U		<0.006	U	
		VMP-3-10-022120	2/21/2020	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-3-10-072920	7/29/2020	<0.0043	U		<0.0097	U		<0.0076	U		0.00074	J		<0.0076	J	U	**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-3-10-110420	11/4/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-5-050415	5/4/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.0029**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP-3-5-072915	7/29/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0034**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-3-5-110515	11/5/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	J	U	<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-5-021616	2/16/2016	<0.0046	U		<0.0046	U		<0.0046	U		**0.0026**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-3-5-042716	4/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-3-5-080116	8/1/2016	<0.0078	U		<0.0078	U		<0.0078	U		<0.068	U		<0.009	U		<0.0089	U		<0.0089	U		<0.028	U	
		VMP-3-5-102616	10/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-3-5-013117	1/31/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-5-042717	4/27/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-5-072017	7/20/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-5-102617	10/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-5-012318	1/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-3-5-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0031**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-5-072318	7/23/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-3-5-102918	10/29/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-5-012419	1/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		**0.0017**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-3-5-042919	4/29/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-3-5-072519	7/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-5-101819	10/18/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-5-012720	1/27/2020	<0.0068	U		<0.0068	U		<0.0068	U		<0.059	U		<0.0079	U		<0.0077	U		<0.0077	U		<0.024	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-3-5-042920	4/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-3-5-072920	7/29/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-3-5-110420	11/4/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-5-012521	1/25/2021	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
	10 ft	VMP-3-10-020915	2/9/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-10-050415	5/4/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0024**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-3-10-072915	7/29/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-3-10-110315	11/3/2015	<0.0055	U		0.0094			<0.0055	U		**0.005**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-3-10-021616	2/16/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-10-042716	4/27/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-3-10-080216	8/2/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-3-10-102616	10/26/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.0071	U		<0.0071	U		<0.022	U	
		VMP-3-10-013117	1/31/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-10-042717	4/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-3-10-072017	7/20/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-3-10-102617	10/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-10-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-3-10-042718	4/27/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-10-072318	7/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-10-102918	10/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-10-020119	2/1/2019	<0.0049	U		<0.0049	U		0.003	J		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-10-042919	4/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		**0.0031**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-10-072519	7/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-10-072519-DUP	7/25/2019	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-3-10-101819	10/18/2019	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-3-10-022120	2/21/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-3-10-072920	7/29/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		**0.001**	J	
		VMP-3-10-110420	11/4/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		**0.0012**	J		<0.052	U		<0.0043	U	
		VMP-3-5-050415	5/4/2015	0.0096	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0058	U		<0.061	U		<0.005	U	
		VMP-3-5-072915	7/29/2015	0.029			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		**0.0012**	J		<0.056	U		**0.0025**	J	
		VMP-3-5-110515	11/5/2015	<0.0084	U		**0.013**			0.017			<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-3-5-021616	2/16/2016	0.085			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		**0.0026**	J	
		VMP-3-5-042716	4/27/2016	0.0052	J		**0.0019**	J		<0.0064	U		<0.0099	U		<0.009	U		**0.017**			<0.055	U		**0.04**		
		VMP-3-5-080116	8/1/2016	0.0056	J		<0.0085	U		<0.0096	U		<0.015	U		<0.014	U		**0.0038**	J		<0.083	U		**0.0012**	J	
		VMP-3-5-102616	10/26/2016	<0.01	J	U	**0.0036**	J		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	J	U
		VMP-3-5-013117	1/31/2017	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-5-042717	4/27/2017	0.012			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-5-072017	7/20/2017	0.018			<0.0055	U		0.00081	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-3-5-102617	10/26/2017	0.0064	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-5-012318	1/23/2018	0.042			<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-3-5-042718	4/27/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-3-5-072318	7/23/2018	0.003	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-3-5-102918	10/29/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-3-5-012419	1/24/2019	0.007	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-3-5-042919	4/29/2019	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-3-5-072519	7/25/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-5-101819	10/18/2019	0.018	J0	J	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-5-012720	1/27/2020	<0.013	U	UJ	<0.0074	U		<0.0084	U		<0.013	U		<0.012	U		<0.007	U		<0.073	U		<0.006	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-3-5-042920	4/29/2020	0.012		J	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-3-5-072920	7/29/2020	0.012			<0.0058	U		0.0016	J		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.002**	J	
		VMP-3-5-110420	11/4/2020	0.021			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-5-012521	1/25/2021	0.0045	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
	10 ft	VMP-3-10-020915	2/9/2015	0.011			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		**0.0014**	J		<0.048	U		**0.0017**	J	
		VMP-3-10-050415	5/4/2015	0.011	J		<0.0062	U		0.0023	J		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		**0.00095**	J	
		VMP-3-10-072915	7/29/2015	0.026			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-3-10-110315	11/3/2015	0.0076	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		**0.0027**	J		<0.059	U		**0.0026**	J	
		VMP-3-10-021616	2/16/2016	0.0096			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-10-042716	4/27/2016	0.0072	J		<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		**0.0035**	J		<0.064	U		**0.0022**	J	
		VMP-3-10-080216	8/2/2016	0.011			**0.0026**	J		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0029**	J	
		VMP-3-10-102616	10/26/2016	0.0086	J		**0.033**			0.0033	J		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		**0.0028**	J	
		VMP-3-10-013117	1/31/2017	0.0041	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-3-10-042717	4/27/2017	0.022			**0.0017**	J		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-3-10-072017	7/20/2017	0.012			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.00086**	J	
		VMP-3-10-102617	10/26/2017	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-10-012318	1/23/2018	0.0098			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-3-10-042718	4/27/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-10-072318	7/23/2018	0.0043	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-3-10-102918	10/29/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-3-10-020119	2/1/2019	0.01			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-10-042919	4/29/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-10-072519	7/25/2019	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.0021**	J	
		VMP-3-10-072519-DUP	7/25/2019	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-3-10-101819	10/18/2019	<0.011	ND,UJ	UJ	<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-3-10-022120	2/21/2020	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-3-10-072920	7/29/2020	0.0077	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-3-10-110420	11/4/2020	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0067**	J		<0.006	U	
		VMP-3-5-050415	5/4/2015	<0.023	U		0.0022	J		<0.007	U		**0.0069**			<0.0051	U					**0.02**			<0.007	U	
		VMP-3-5-072915	7/29/2015	**0.0036**	J		0.011	J		**0.0028**	J		**0.0039**	J		<0.0047	U					**0.024**			<0.0064	U	
		VMP-3-5-110515	11/5/2015	**0.0033**	J		0.0069	J		**0.018**			<0.0046	U		<0.004	U					**0.0094**	J		**0.046**		
		VMP-3-5-021616	2/16/2016	<0.019	U		0.025			<0.0057	U		**0.001**	J		<0.0042	U					**0.096**			<0.0057	U	
		VMP-3-5-042716	4/27/2016	<0.021	U		0.022			<0.0064	U		<0.0053	U		<0.0047	U					**0.019**			<0.0064	U	
		VMP-3-5-080116	8/1/2016	<0.032	U		0.0052	J		<0.0096	U		<0.008	U		<0.028	U					**0.0084**	J		<0.0096	U	
		VMP-3-5-102616	10/26/2016	<0.023	U		<0.016	U		<0.0068	U		**0.0019**	J		<0.02	U		<0.014	U		**0.012**	J		<0.0068	U	
		VMP-3-5-013117	1/31/2017	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0017**	J		<0.0061	U	
		VMP-3-5-042717	4/27/2017	<0.019	U		0.0057	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-3-5-072017	7/20/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		**0.00054**	J	
		VMP-3-5-102617	10/26/2017	<0.02	U		0.0024	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-3-5-012318	1/23/2018	<0.018	U		0.0062	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0099**	J		<0.0054	U	
		VMP-3-5-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-3-5-072318	7/23/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0027**	J		<0.0063	U	
		VMP-3-5-102918	10/29/2018	<0.019	U		0.0057	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-3-5-012419	1/24/2019	<0.019	U		0.024			<0.0057	U		<0.0047	U		<0.017	U					**0.014**			<0.0057	U	
		VMP-3-5-042919	4/29/2019	<0.019	U		0.0044	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0058**	J		<0.0056	U	
		VMP-3-5-072519	7/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-3-5-101819	10/18/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-3-5-012720	1/27/2020	<0.028	U		<0.02	U		<0.0084	U		<0.007	U		<0.024	U					<0.017	U		<0.0084	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-3-5-042920	4/29/2020	<0.022	U		0.0028	J		<0.0066	U		<0.0055	U		<0.019	U					**0.0072**	J		<0.0066	J	U
		VMP-3-5-072920	7/29/2020	<0.022	U		0.0072	J		**0.007**			<0.0054	U		<0.019	U					**0.006**	J		**0.023**		
		VMP-3-5-110420	11/4/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.02**			<0.0061	U	
		VMP-3-5-012521	1/25/2021	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0074**	J		<0.0066	U	
	10 ft	VMP-3-10-020915	2/9/2015	<0.018	U		0.01	J		<0.0055	U		<0.0046	U		<0.004	U					**0.015**			<0.0055	U	
		VMP-3-10-050415	5/4/2015	**0.0075**	J		0.0027	J		<0.0071	J	U	**0.013**			<0.0052	U					**0.017**			<0.0071	J	U
		VMP-3-10-072915	7/29/2015	**0.0036**	J		0.0021	J		<0.006	J	U	**0.0027**	J		<0.0044	U					**0.036**			<0.006	U	
		VMP-3-10-110315	11/3/2015	**0.0011**	J		<0.016	U		<0.0068	U		<0.0057	J	U	**0.00094**	J					**0.0094**	J		<0.0068	U	
		VMP-3-10-021616	2/16/2016	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					**0.13**			<0.0061	U	
		VMP-3-10-042716	4/27/2016	<0.024	U		0.023			**0.003**	J		<0.0061	U		<0.0054	U					**0.024**			<0.0074	U	
		VMP-3-10-080216	8/2/2016	<0.023	U		0.0055	J		<0.0068	U		<0.0056	U		<0.02	U					**0.018**			<0.0068	U	
		VMP-3-10-102616	10/26/2016	<0.026	U		0.0045	J		<0.0077	J	U	**0.0027**	J		<0.022	U		**0.0017**	J	J	**0.018**			<0.0077	U	
		VMP-3-10-013117	1/31/2017	**0.0012**	J		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0018**	J		<0.0059	U	
		VMP-3-10-042717	4/27/2017	<0.019	U		0.0024	J		**0.0017**	J		<0.0048	U		<0.017	U					**0.0054**	J		<0.0058	U	
		VMP-3-10-072017	7/20/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.018**			<0.0064	U	
		VMP-3-10-102617	10/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-3-10-012318	1/23/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0031**	J		<0.0054	U	
		VMP-3-10-042718	4/27/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-3-10-072318	7/23/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0019**	J		<0.006	U	
		VMP-3-10-102918	10/29/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-3-10-020119	2/1/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0028**	J		<0.0061	U	
		VMP-3-10-042919	4/29/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-3-10-072519	7/25/2019	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.0041**	J		<0.0062	U	
		VMP-3-10-072519-DUP	7/25/2019	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.022	U					**0.0025**	J		<0.0075	U	
		VMP-3-10-101819	10/18/2019	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					<0.014	U		<0.0073	U	
		VMP-3-10-022120	2/21/2020	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-3-10-072920	7/29/2020	<0.021	U		0.0024	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0096**	J		<0.0062	U	
		VMP-3-10-110420	11/4/2020	<0.022	U		0.002	J		<0.0066	U		<0.0055	U		<0.019	U					**0.014**			<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-3-5-050415	5/4/2015	<0.0061	U		<0.0098	U		**0.0019**	J		<0.0042	U		**0.0033**	J		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-3-5-072915	7/29/2015	<0.0056	U		<0.009	U		**0.002**	J		<0.0039	U		**0.0036**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-3-5-110515	11/5/2015	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0031**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-3-5-021616	2/16/2016	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-3-5-042716	4/27/2016	<0.0055	U		<0.0089	U		**0.0028**	J		<0.0038	U		**0.018**			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-3-5-080116	8/1/2016	<0.0083	U		<0.013	U		<0.013	U		<0.0058	U		**0.0014**	J		<0.058	U		<0.011	U		<0.011	U	
		VMP-3-5-102616	10/26/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.002**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-3-5-013117	1/31/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-3-5-042717	4/27/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-5-072017	7/20/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.001**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-3-5-102617	10/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-5-012318	1/23/2018	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.0017**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-3-5-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-5-072318	7/23/2018	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-3-5-102918	10/29/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-5-012419	1/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0052**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-3-5-042919	4/29/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-3-5-072519	7/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-5-101819	10/18/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		**0.0058**	J		<0.0068	U		<0.0068	U	
		VMP-3-5-012720	1/27/2020	<0.0073	U		<0.012	U		<0.012	U		<0.005	U		<0.0064	U		<0.051	U		<0.0093	U		<0.0093	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-3-5-042920	4/29/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-3-5-072920	7/29/2020	<0.0091	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		**0.0019**	J		<0.0072	U	
		VMP-3-5-110420	11/4/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-3-5-012521	1/25/2021	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0011**	J		<0.04	U		<0.0073	U		<0.0073	U	
	10 ft	VMP-3-10-020915	2/9/2015	<0.0047	U		<0.0076	U		<0.0076	U		**0.0015**	J		**0.0039**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-3-10-050415	5/4/2015	<0.0061	U		<0.0099	U		**0.0013**	J		<0.0042	U		**0.0066**			<0.043	U		<0.0078	U		<0.0078	U	
		VMP-3-10-072915	7/29/2015	<0.0052	U		<0.0083	U		<0.0082	U		**0.0024**	J		**0.0013**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-10-110315	11/3/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-3-10-021616	2/16/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-10-042716	4/27/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.0035**	J		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-3-10-080216	8/2/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0096**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-3-10-102616	10/26/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		**0.013**			<0.046	U		<0.0085	U		<0.0085	U	
		VMP-3-10-013117	1/31/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-10-042717	4/27/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0017**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-3-10-072017	7/20/2017	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00092**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-3-10-102617	10/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0005**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-10-012318	1/23/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-3-10-042718	4/27/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00079**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-10-072318	7/23/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0031**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-3-10-102918	10/29/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-3-10-020119	2/1/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-3-10-042919	4/29/2019	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-10-072519	7/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0012**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-10-072519-DUP	7/25/2019	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-3-10-101819	10/18/2019	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-3-10-022120	2/21/2020	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-3-10-072920	7/29/2020	<0.0086	U		**0.00078**	J		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	J	U	<0.0069	U		<0.0069	U	
		VMP-3-10-110420	11/4/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-3-5-020915	2/9/2015	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-3-5-050415	5/4/2015	<0.0076	U		0.0017	J		<0.007	J	U	<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-3-5-072915	7/29/2015	<0.007	U		0.0018	J		**0.00091**	J		<0.0064	U		0.002	J		<0.0033	U		0.0014	J		**0.001**	J	
		VMP-3-5-110515	11/5/2015	<0.006	U		0.0019	J		**0.042**			**0.0067**			0.09			<0.0029	U		0.0064			<0.0049	U	
		VMP-3-5-021616	2/16/2016	<0.0062	U		0.0016	J		<0.0057	U		<0.0057	U		0.001	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-3-5-042716	4/27/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.05			<0.0033	U		0.0017	J		<0.0056	U	
		VMP-3-5-080116	8/1/2016	<0.01	U		<0.011	U		<0.0096	U		<0.0096	U		<0.0091	U		<0.005	U		<0.0085	U		<0.0085	U	
		VMP-3-5-102616	10/26/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0012	J		<0.0036	U		0.015			**0.0035**	J	
		VMP-3-5-013117	1/31/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-5-042717	4/27/2017	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-3-5-072017	7/20/2017	<0.0068	U		0.0012	J		**0.0014**	J		<0.0062	U		0.0053	J		<0.0032	U		0.0044	J		**0.0011**	J	
		VMP-3-5-102617	10/26/2017	<0.0067	U		0.00097	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-5-012318	1/23/2018	<0.0058	U		0.0016	J		<0.0054	U		<0.0054	U		0.0013	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-3-5-042718	4/27/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-3-5-072318	7/23/2018	**0.0014**	J		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-3-5-102918	10/29/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-3-5-012419	1/24/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0013	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-3-5-042919	4/29/2019	<0.0062	U		0.0026	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-3-5-072519	7/25/2019	<0.0067	U		0.00074	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-5-101819	10/18/2019	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-5-012720	1/27/2020	<0.0092	U		<0.0096	U		<0.0084	U		<0.0084	U		<0.008	U		<0.0044	U		<0.0074	U		<0.0074	U	
		VMP-3-5-012720-DUP	1/27/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-3-5-042920	4/29/2020	<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		0.001	J		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-3-5-072920	7/29/2020	<0.0071	U		<0.0075	U		**0.0013**	J		<0.0065	U		0.036			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-3-5-110420	11/4/2020	<0.0066	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-5-012521	1/25/2021	<0.0072	U		0.002	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
	10 ft	VMP-3-10-020915	2/9/2015	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0019	J		<0.0028	U		0.0017	J		<0.0048	U	
		VMP-3-10-050415	5/4/2015	<0.0077	U		<0.0081	U		**0.0037**	J		<0.0071	U		<0.0067	U		<0.0037	U		0.0019	J		<0.0062	U	
		VMP-3-10-072915	7/29/2015	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-3-10-110315	11/3/2015	**0.063**			0.0022	J		<0.0068	U		<0.0068	U		0.0011	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-3-10-021616	2/16/2016	<0.0067	U		0.0021	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-10-042716	4/27/2016	<0.0081	U		0.0016	J		<0.0074	U		<0.0074	U		0.0022	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-3-10-080216	8/2/2016	<0.0074	U		0.0017	J		<0.0068	U		<0.0068	U		0.0063	J		<0.0035	U		0.0043	J		**0.0018**	J	
		VMP-3-10-102616	10/26/2016	<0.0084	U		<0.0088	U		<0.0077	U		<0.0077	U		0.0017	J		<0.004	U		0.11			**0.025**		
		VMP-3-10-013117	1/31/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.00083	J		<0.0031	U		0.0019	J		<0.0052	U	
		VMP-3-10-042717	4/27/2017	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0072			<0.0051	U	
		VMP-3-10-072017	7/20/2017	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.0015	J		<0.0057	U	
		VMP-3-10-102617	10/26/2017	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-10-012318	1/23/2018	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0041	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-3-10-042718	4/27/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-3-10-072318	7/23/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0013	J		<0.0031	U		0.0014	J		<0.0053	U	
		VMP-3-10-102918	10/29/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0014	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-3-10-020119	2/1/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-10-042919	4/29/2019	<0.0065	U		0.0021	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-3-10-072519	7/25/2019	<0.0067	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0011	J		<0.0054	U	
		VMP-3-10-072519-DUP	7/25/2019	<0.0082	U		0.00086	J		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-3-10-101819	10/18/2019	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-3-10-022120	2/21/2020	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		0.0015	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-3-10-072920	7/29/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.004	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-3-10-110420	11/4/2020	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.029	U		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-3-22-050815	5/8/2015	**0.039**			**0.0025**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.0049	J		**0.029**		
		VMP-3-22-072915	7/29/2015	**0.032**	J		**0.005**			<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.04			**0.019**		
		VMP-3-22-110315	11/3/2015	**0.025**	J		**0.0012**	J		<0.0087	U		<0.013	U		**0.0021**	J		<0.0029	U		0.0053	J		**0.0098**	J	
		VMP-3-22-021616	2/16/2016	**0.016**	J		<0.0046	U		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		0.0039	J		**0.0035**	J	
		VMP-3-22-042716	4/27/2016	**0.015**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.0077**	J	
		VMP-3-22-080116	8/1/2016	**0.038**	J		**0.006**			<0.012	U		<0.018	U		<0.068	U		<0.0039	U		0.017	J		**0.0084**	J	
		VMP-3-22-102616	10/26/2016	**0.012**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-3-22-013117	1/31/2017	<0.029	U		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-3-22-042717	4/27/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0037**	J	
		VMP-3-22-072017	7/20/2017	**0.013**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0018**	J	
		VMP-3-22-102617	10/26/2017	**0.014**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-3-22-012318	1/23/2018	**0.011**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0035**	J	
		VMP-3-22-042718	4/27/2018	**0.014**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0036**	J	
		VMP-3-22-072318	7/23/2018	**0.062**			**0.00046**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-3-22-102918	10/29/2018	**0.046**			**0.002**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		**0.008**	J	
		VMP-3-22-012419	1/24/2019	**0.013**	J		**0.0026**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0045	J		**0.0026**	J	
		VMP-3-22-042919	4/29/2019	**0.031**			**0.0021**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-3-22-072519	7/25/2019	**0.01**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U	UJ	<0.0028	U		<0.012	U		<0.015	U	
		VMP-3-22-101819	10/18/2019	**0.0064**	J		**0.003**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.003	J	J	<0.015	U	
		VMP-3-22-012720	1/27/2020	**0.0092**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-3-22-042920	4/29/2020	**0.019**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.0032	J		<0.017	U	
		VMP-3-22-072920	7/29/2020	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0016**	J	
		VMP-3-22-110420	11/4/2020	**0.02**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0021**	J	
		VMP-3-22-012521	1/25/2021	**0.0069**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	**0.006**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-3-31.5-110315	11/3/2015	**0.061**			**0.0034**	J		<0.0086	U		<0.013	U		**0.0029**	J		<0.0028	U		0.076			**0.049**		
		VMP-3-31.5-020116	2/1/2016	**0.027**	J		**0.0023**	J		<0.011	U		<0.017	U		<0.065	U		<0.0037	U		0.048			**0.0058**	J	
		VMP-3-31.5-042716	4/27/2016	**0.022**	J		**0.0022**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.064			**0.0045**	J	
		VMP-3-31.5-080116	8/1/2016	**0.044**			**0.0031**	J		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		0.075			**0.0093**	J	
		VMP-3-31.5-102616	10/26/2016	**0.03**			**0.0028**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.051			**0.007**	J	
		VMP-3-31.5-013117	1/31/2017	**0.0067**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.019			<0.014	U	
		VMP-3-31.5-042717	4/27/2017	**0.027**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.014			**0.0074**	J	
		VMP-3-31.5-072017	7/20/2017	**0.036**			**0.0011**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		0.014			**0.0066**	J	
		VMP-3-31.5-102617	10/26/2017	**0.012**	J		**0.0044**			<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.039			<0.014	U	
		VMP-3-31.5-102617-DUP	10/26/2017	**0.014**	J		**0.0044**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.046			**0.0038**	J	
		VMP-3-31.5-042718	4/27/2018	**0.018**	J		**0.00063**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0099	J		**0.0046**	J	
		VMP-3-31.5-072318	7/23/2018	**0.054**			**0.0022**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0098**	J	
		VMP-3-31.5-102918	10/29/2018	**0.012**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0089	J		<0.014	U	
		VMP-3-31.5-012419	1/24/2019	**0.024**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0094	J		<0.013	U	
		VMP-3-31.5-042919	4/29/2019	**0.1**			**0.012**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0073	J		**0.012**	J	
		VMP-3-31.5-072519	7/25/2019	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U	UJ	<0.0029	U		0.0069	J		<0.015	U	
		VMP-3-31.5-101819	10/18/2019	**16**	J		<12	U		<24	U		<38	U		<140	U		<8	U		1800		J	<43	U	
		VMP-3-31.5-101819-DUP	10/18/2019	**14**	J		<11	U		<24	U		<37	U		<140	U		<7.8	U		1800		J	<42	U	
		VMP-3-31.5-022120	2/21/2020	<0.28	U		<0.038	U		<0.079	U		<0.12	U		<0.46	U		<0.026	U		1			<0.14	U	
		VMP-3-31.5-042920	4/29/2020	<3.1	U		**0.48**	J	J	<2.2	U		<3.3	U		<5	U		<0.71	U		370		J	<3.8	U	
		VMP-3-31.5-072920	7/29/2020	**0.019**	J		**0.0089**	J		<0.069	U		<0.11	U		<0.4	U		<0.023	U		<0.098	U		<0.12	U	
		VMP-3-31.5-110420	11/4/2020	<12	U		<4	U		<8.4	U		<13	U		<20	U		<2.8	U		6000			<15	U	
		VMP-3-31.5-012521	1/25/2021	**0.0091**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.021**			<0.025	U		<0.0063	U	
		VMP-3-22-050815	5/8/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-3-22-072915	7/29/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0065**	J		<0.03	U		<0.0074	U	
		VMP-3-22-110315	11/3/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.033**			<0.027	U		<0.0068	U	
		VMP-3-22-021616	2/16/2016	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.019**			<0.029	U		<0.0074	U	
		VMP-3-22-042716	4/27/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.012**			<0.027	U		<0.0069	U	
		VMP-3-22-080116	8/1/2016	**0.022**			<0.011	U		<0.0081	U		<0.015	U		<0.019	U		**0.0092**			<0.036	U		<0.0091	U	
		VMP-3-22-102616	10/26/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.021**			<0.03	U		<0.0074	U	
		VMP-3-22-013117	1/31/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.017**			<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-3-22-042717	4/27/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0076**			<0.025	U		<0.0062	U	
		VMP-3-22-072017	7/20/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.01**			<0.026	U		<0.0066	U	
		VMP-3-22-102617	10/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.012**			<0.024	U		<0.0061	U	
		VMP-3-22-012318	1/23/2018	<0.014	U		**0.027**			<0.0052	U		<0.0096	U		<0.012	U		**0.029**			<0.023	U		<0.0058	U	
		VMP-3-22-042718	4/27/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0061**	J		<0.027	U		<0.0067	U	
		VMP-3-22-072318	7/23/2018	**0.0043**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0084**			**0.0031**	J		<0.0065	U	
		VMP-3-22-102918	10/29/2018	**0.0034**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.012**			<0.024	U		<0.006	U	
		VMP-3-22-012419	1/24/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0046**	J		<0.023	U		<0.0058	U	
		VMP-3-22-042919	4/29/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0042**	J		<0.025	U		<0.0062	U	
		VMP-3-22-072519	7/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0055**	J		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-3-22-101819	10/18/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0025**	J		<0.026	U		<0.0065	U	
		VMP-3-22-012720	1/27/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0021**	J		<0.027	U		<0.0067	U	
		VMP-3-22-042920	4/29/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0025**	J		<0.03	U		<0.0074	U	
		VMP-3-22-072920	7/29/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0039**	J		<0.027	U		<0.0068	U	
		VMP-3-22-110420	11/4/2020	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0051**	J		<0.028	U		<0.007	U	
		VMP-3-22-012521	1/25/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0065	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0037**	J		<0.023	U		<0.0058	U	
		VMP-3-31.5-110315	11/3/2015	**0.0062**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0041**	J		**0.0053**	J		<0.0066	U	
		VMP-3-31.5-020116	2/1/2016	<0.021	J	U	<0.011	U		<0.0078	U		<0.014	U		<0.018	U		**0.005**	J		<0.035	U		<0.0087	U	
		VMP-3-31.5-042716	4/27/2016	**0.0038**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0069**			<0.026	U		<0.0066	U	
		VMP-3-31.5-080116	8/1/2016	**0.0087**	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.0026**	J		<0.031	U		<0.0078	U	
		VMP-3-31.5-102616	10/26/2016	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0036**	J		<0.024	U		<0.0062	U	
		VMP-3-31.5-013117	1/31/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0079**			<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-3-31.5-042717	4/27/2017	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0078**			<0.026	U		<0.0064	U	
		VMP-3-31.5-072017	7/20/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0045**	J		<0.026	U		<0.0065	U	
		VMP-3-31.5-102617	10/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.005**	J		<0.024	U		<0.0061	U	
		VMP-3-31.5-102617-DUP	10/26/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.006**			<0.024	U		<0.0062	U	
		VMP-3-31.5-042718	4/27/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0064**			<0.024	U		<0.006	U	
		VMP-3-31.5-072318	7/23/2018	**0.0054**	J		**0.0015**	J		<0.0058	U		<0.011	U		<0.013	U		**0.014**			**0.015**	J		<0.0065	U	
		VMP-3-31.5-102918	10/29/2018	**0.0014**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-3-31.5-012419	1/24/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-3-31.5-042919	4/29/2019	**0.0024**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-3-31.5-072519	7/25/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-3-31.5-101819	10/18/2019	<45	U		<23	U		<17	U		<31	U		<38	U		<18	U		<75	U		<19	U	
		VMP-3-31.5-101819-DUP	10/18/2019	<44	U		<22	U		<16	U		<30	U		<37	U		<17	U		<73	U		<18	U	
		VMP-3-31.5-022120	2/21/2020	<0.15	U		<0.074	U		<0.054	U		<0.1	U		<0.12	U		<0.057	U		<0.24	U		<0.061	U	
		VMP-3-31.5-042920	4/29/2020	<4	U		<2	U		<1.5	U		<2.7	U		<3.4	U		<1.6	U		<2.7	U		<1.7	U	
		VMP-3-31.5-072920	7/29/2020	<0.13	U		<0.065	U		<0.047	U		<0.088	U		<0.11	U		<0.05	U		<0.21	U		<0.053	U	
		VMP-3-31.5-110420	11/4/2020	<16	U		<7.9	U		<5.8	U		<11	U		<13	U		<6.2	U		<10	U		**2.4**	J	
		VMP-3-31.5-012521	1/25/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0032**	J		<0.0049	U		<0.0049	U	
		VMP-3-22-050815	5/8/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-3-22-072915	7/29/2015	**0.0028**	J		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0023**	J		<0.0058	U		<0.0058	U	
		VMP-3-22-110315	11/3/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0042**	J		<0.0053	U		<0.0053	U	
		VMP-3-22-021616	2/16/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.003**	J		<0.0058	U		<0.0058	U	
		VMP-3-22-042716	4/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-3-22-080116	8/1/2016	**0.001**	J		<0.014	U		<0.011	U		<0.011	U		<0.011	U		**0.0033**	J		<0.0071	U		<0.0071	U	
		VMP-3-22-102616	10/26/2016	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0028**	J		<0.0058	U		<0.0058	U	
		VMP-3-22-013117	1/31/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-3-22-042717	4/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-3-22-072017	7/20/2017	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-3-22-102617	10/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-3-22-012318	1/23/2018	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-3-22-042718	4/27/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-3-22-072318	7/23/2018	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-3-22-102918	10/29/2018	**0.0026**	J		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-3-22-012419	1/24/2019	**0.0026**	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-3-22-042919	4/29/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-3-22-072519	7/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-3-22-101819	10/18/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-3-22-012720	1/27/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0033**	J		<0.0052	U		<0.0052	U	
		VMP-3-22-042920	4/29/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0022**	J		<0.0058	U		<0.0058	U	
		VMP-3-22-072920	7/29/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-3-22-110420	11/4/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-3-22-012521	1/25/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-3-31.5-110315	11/3/2015	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.004**	J		<0.0052	U		<0.0052	U	
		VMP-3-31.5-020116	2/1/2016	**0.0025**	J		<0.013	U		<0.01	U		<0.01	U		<0.01	U		<0.0083	U		<0.0068	U		<0.0068	U	
		VMP-3-31.5-042716	4/27/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-3-31.5-080116	8/1/2016	**0.0011**	J		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0031**	J		<0.0061	U		<0.0061	U	
		VMP-3-31.5-102616	10/26/2016	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-3-31.5-013117	1/31/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-3-31.5-042717	4/27/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0019**	J		<0.005	U		<0.005	U	
		VMP-3-31.5-072017	7/20/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-3-31.5-102617	10/26/2017	**0.0017**	J		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-3-31.5-102617-DUP	10/26/2017	**0.0011**	J		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-3-31.5-042718	4/27/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0031**	J		<0.0047	U		<0.0047	U	
		VMP-3-31.5-072318	7/23/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.01**			<0.005	U		**0.0013**	J	
		VMP-3-31.5-102918	10/29/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-3-31.5-012419	1/24/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0096**			<0.0045	U		<0.0045	U	
		VMP-3-31.5-042919	4/29/2019	**0.0043**			<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-3-31.5-072519	7/25/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-3-31.5-101819	10/18/2019	**9.2**	J		<28	U		<22	U		<22	U		<22	U		<18	U		<15	U		<15	U	
		VMP-3-31.5-101819-DUP	10/18/2019	**9.1**	J		<27	U		<21	U		<21	U		<21	U		<18	U		<14	U		<14	U	
		VMP-3-31.5-022120	2/21/2020	<0.04	U		<0.09	U		<0.071	U		<0.071	U		<0.071	U		<0.058	U		<0.048	U		<0.048	U	
		VMP-3-31.5-042920	4/29/2020	<1.1	U		<2.5	U		<1.9	U		<1.9	U		<1.9	U		<1.6	U		<1.3	U		<1.3	U	
		VMP-3-31.5-072920	7/29/2020	<0.035	U		<0.079	U		<0.062	U		<0.062	U		<0.062	U		<0.051	U		<0.042	U		<0.042	U	
		VMP-3-31.5-110420	11/4/2020	**17**			<9.7	U		<7.6	U		<7.6	U		<7.6	U		<6.2	U		<5.1	U		<5.1	U	
		VMP-3-31.5-012521	1/25/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-3-22-050815	5/8/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-3-22-072915	7/29/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-3-22-110315	11/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0049**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-3-22-021616	2/16/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP-3-22-042716	4/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-3-22-080116	8/1/2016	<0.007	U		<0.007	U		<0.007	U		<0.061	U		<0.0082	U		<0.008	U		<0.008	U		<0.025	U	
		VMP-3-22-102616	10/26/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-3-22-013117	1/31/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-22-042717	4/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-22-072017	7/20/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-3-22-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-22-012318	1/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-22-042718	4/27/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0026**	J		<0.006	U		<0.0058	U		**0.0019**	J		<0.018	U	
		VMP-3-22-072318	7/23/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-22-102918	10/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-3-22-012419	1/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-22-042919	4/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-22-072519	7/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-22-101819	10/18/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-22-012720	1/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-3-22-042920	4/29/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-3-22-072920	7/29/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-3-22-110420	11/4/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-3-22-012521	1/25/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-31.5-110315	11/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.0056**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-3-31.5-020116	2/1/2016	<0.0067	U		<0.0067	U		<0.0067	U		<0.058	U		<0.0078	U		<0.0076	U		<0.0076	U		<0.024	U	
		VMP-3-31.5-042716	4/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-3-31.5-080116	8/1/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-3-31.5-102616	10/26/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-31.5-013117	1/31/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-31.5-042717	4/27/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-31.5-072017	7/20/2017	<0.005	U		<0.005	U		<0.005	U		**0.0077**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-3-31.5-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-31.5-102617-DUP	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-31.5-042718	4/27/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-3-31.5-072318	7/23/2018	<0.005	U		<0.005	U		<0.005	U		**0.0061**	J		<0.0058	U		<0.0057	U		<0.0057	U		**0.02**		
		VMP-3-31.5-102918	10/29/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0053**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-31.5-012419	1/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-3-31.5-042919	4/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-3-31.5-072519	7/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-3-31.5-101819	10/18/2019	<14	U		<14	U		<14	U		**8.3**	J		<17	U		<16	U		<16	U		<52	U	
		VMP-3-31.5-101819-DUP	10/18/2019	<14	U		<14	U		<14	U		**6.6**	J		<16	U		<16	U		<16	U		<51	U	
		VMP-3-31.5-022120	2/21/2020	<0.046	U		<0.046	U		<0.046	U		<0.41	U		<0.054	U		<0.053	U		<0.053	U		<0.17	U	
		VMP-3-31.5-042920	4/29/2020	<1.3	U		<1.3	U		<1.3	U		<4.5	U		<1.5	U		<1.5	U		<1.5	U		<4.6	U	
		VMP-3-31.5-072920	7/29/2020	<0.041	U		<0.041	U		<0.041	U		<0.36	U		<0.048	U		<0.047	U		<0.047	U		<0.15	U	
		VMP-3-31.5-110420	11/4/2020	<5	U		<5	U		<5	U		<18	U		<5.8	U		<5.7	U		<5.7	U		<18	U	
		VMP-3-31.5-012521	1/25/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-3-22-050815	5/8/2015	0.0056	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0013**	J	
		VMP-3-22-072915	7/29/2015	<0.011	U		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		**0.003**	J		<0.061	U		**0.0087**		
		VMP-3-22-110315	11/3/2015	0.0046	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		**0.0027**	J		<0.056	U		**0.003**	J	
		VMP-3-22-021616	2/16/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0058	U		<0.061	U		<0.005	U	
		VMP-3-22-042716	4/27/2016	0.0086	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.00096**	J	
		VMP-3-22-080116	8/1/2016	0.012	J		<0.0077	U		<0.0087	U		<0.014	U		<0.012	U		**0.0043**	J		<0.075	U		**0.0059**	J	
		VMP-3-22-102616	10/26/2016	0.013			**0.03**			0.003	J		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-3-22-013117	1/31/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-3-22-042717	4/27/2017	0.019			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-22-072017	7/20/2017	0.0074	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-3-22-102617	10/26/2017	0.0093			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-3-22-012318	1/23/2018	0.019			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-3-22-042718	4/27/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-3-22-072318	7/23/2018	0.0053	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-3-22-102918	10/29/2018	<0.0087	U		**0.0035**	J		0.0037	J		<0.0088	U		<0.008	U		**0.005**			<0.049	U		**0.0046**		
		VMP-3-22-012419	1/24/2019	0.0047	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.002**	J		<0.048	U		**0.0078**		
		VMP-3-22-042919	4/29/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-22-072519	7/25/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-22-101819	10/18/2019	0.0076	J J0	J	**0.01**			0.0021	J		<0.0096	U		<0.0088	U		**0.012**			<0.054	U		**0.0084**		
		VMP-3-22-012720	1/27/2020	<0.0098	ND,UJ	UJ	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-3-22-042920	4/29/2020	0.011		J	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-3-22-072920	7/29/2020	0.011			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-3-22-110420	11/4/2020	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-3-22-012521	1/25/2021	0.0054	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.00081**	J	
		VMP-3-31.5-110315	11/3/2015	0.016			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		**0.0027**	J		<0.055	U		**0.0028**	J	
		VMP-3-31.5-020116	2/1/2016	0.0053	J		<0.0073	U		<0.0083	U		<0.013	U		<0.012	U		<0.0069	U		<0.072	U		<0.0059	U	
		VMP-3-31.5-042716	4/27/2016	0.0068	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0031**	J		<0.055	U		**0.0017**	J	
		VMP-3-31.5-080116	8/1/2016	0.011	J		<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		**0.00066**	J	
		VMP-3-31.5-102616	10/26/2016	0.021			**0.022**			0.0033	J		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0013**	J	
		VMP-3-31.5-013117	1/31/2017	<0.0091	U		<0.0052	U		0.0019	J		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.001**	J	
		VMP-3-31.5-042717	4/27/2017	0.18			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-31.5-072017	7/20/2017	0.019			**0.021**			0.0039	J		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0011**	J	
		VMP-3-31.5-102617	10/26/2017	<0.0089	U		**0.0026**	J		0.012			<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0053**		
		VMP-3-31.5-102617-DUP	10/26/2017	<0.009	U		**0.0026**	J		0.007			<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0051**		
		VMP-3-31.5-042718	4/27/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-3-31.5-072318	7/23/2018	0.011			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-3-31.5-102918	10/29/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-31.5-012419	1/24/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-3-31.5-042919	4/29/2019	0.014			**0.0039**	J		0.002	J		<0.0091	U		<0.0083	U		**0.006**			<0.051	U		<0.0042	U	
		VMP-3-31.5-072519	7/25/2019	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-3-31.5-101819	10/18/2019	64	J0 CN	J	<16	U		<18	U		<28	U		<25	U		<15	U		<150	U		**6.6**	J	
		VMP-3-31.5-101819-DUP	10/18/2019	61	J0 CN	J	<15	U		<17	U		<27	U		<25	U		<14	U		<150	U		**6.8**	J	
		VMP-3-31.5-022120	2/21/2020	<0.088	U		<0.051	U		<0.058	U		<0.09	U		<0.082	U		<0.048	U		<0.5	U		<0.041	U	
		VMP-3-31.5-042920	4/29/2020	<2.4	U		<1.4	U		<1.6	U		<2.5	U		<2.2	U		<1.3	U		<14	U		**3.4**		J
		VMP-3-31.5-072920	7/29/2020	<0.078	U		<0.045	U		<0.051	U		<0.079	U		<0.072	U		<0.042	U		<0.44	U		<0.036	U	
		VMP-3-31.5-110420	11/4/2020	<9.5	U		<5.5	U		1.3	J		<9.6	U		<8.8	U		<5.2	U		<54	U		**48**		
		VMP-3-31.5-012521	1/25/2021	0.0048	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.011**	J		<0.006	U	
		VMP-3-22-050815	5/8/2015	**0.0034**	J		0.0075	J		<0.0069	U		**0.004**	J		<0.0051	U					**0.011**	J		<0.0069	U	
		VMP-3-22-072915	7/29/2015	**0.009**	J		0.026			**0.0078**			**0.0048**	J		<0.0052	U					**0.0084**	J		<0.0071	U	
		VMP-3-22-110315	11/3/2015	**0.002**	J		0.002	J		<0.0064	U		<0.0053	J	U	<0.0047	U					**0.0057**	J		<0.0064	U	
		VMP-3-22-021616	2/16/2016	<0.023	U		0.0016	J		<0.007	U		**0.0016**	J		<0.0051	U					**0.024**			<0.007	U	
		VMP-3-22-042716	4/27/2016	<0.022	U		<0.016	U		**0.0012**	J		<0.0054	U		<0.0048	U					**0.016**			<0.0065	U	
		VMP-3-22-080116	8/1/2016	<0.029	U		0.014	J		**0.0036**	J		<0.0072	U		<0.025	U					**0.011**	J		<0.0087	U	
		VMP-3-22-102616	10/26/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U		<0.015	U		**0.014**			**0.0011**	J	
		VMP-3-22-013117	1/31/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0012**	J		<0.0059	U	
		VMP-3-22-042717	4/27/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0026**	J		<0.0059	U	
		VMP-3-22-072017	7/20/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.016**			<0.0062	U	
		VMP-3-22-102617	10/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-3-22-012318	1/23/2018	<0.018	U		0.0039	J		<0.0055	U		<0.0046	U		<0.016	U					**0.024**			<0.0055	U	
		VMP-3-22-042718	4/27/2018	<0.021	U		<0.015	U		<0.0063	U		**0.0082**			<0.019	U					<0.013	U		<0.0063	U	
		VMP-3-22-072318	7/23/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0061**	J		<0.0062	U	
		VMP-3-22-102918	10/29/2018	<0.019	U		<0.014	U		**0.0012**	J		<0.0047	U		<0.016	U					**0.012**			**0.0016**	J	
		VMP-3-22-012419	1/24/2019	<0.018	U		0.016			<0.0055	U		<0.0046	U		<0.016	U					**0.0015**	J		<0.0055	U	
		VMP-3-22-042919	4/29/2019	<0.02	U		0.003	J		<0.0059	U		<0.0049	ND,UJ	UJ	<0.017	U					**0.004**	J		<0.0059	U	
		VMP-3-22-072519	7/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-3-22-101819	10/18/2019	<0.021	U		0.008	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-3-22-012720	1/27/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.004**	J		<0.0064	U	
		VMP-3-22-042920	4/29/2020	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.021	U					**0.0072**	J		<0.007	U	
		VMP-3-22-072920	7/29/2020	<0.022	U		0.004	J		<0.0065	U		<0.0054	U		<0.019	U					**0.0073**	J		<0.0065	J	U
		VMP-3-22-110420	11/4/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0096**	J		<0.0066	U	
		VMP-3-22-012521	1/25/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0088**	J		<0.0062	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.0041	U					**0.0057**	J		<0.0056	U	
		VMP-3-31.5-110315	11/3/2015	**0.0092**	J		0.044			<0.0063	U		<0.0053	U		<0.0046	U					**0.028**			<0.0063	U	
		VMP-3-31.5-020116	2/1/2016	<0.028	U		0.03			<0.0083	U		<0.0069	U		<0.0061	U					**0.0082**	J		<0.0083	U	
		VMP-3-31.5-042716	4/27/2016	<0.021	U		0.017			<0.0063	U		<0.0052	U		<0.0046	U					**0.0091**	J		<0.0063	U	
		VMP-3-31.5-080116	8/1/2016	<0.024	U		0.0084	J		<0.0074	U		<0.0061	U		<0.022	U					**0.0097**	J		<0.0074	U	
		VMP-3-31.5-102616	10/26/2016	<0.019	U		0.012	J		<0.0058	U		<0.0049	U		<0.017	U		<0.012	U		**0.01**	J		<0.0058	U	
		VMP-3-31.5-013117	1/31/2017	<0.02	U		0.0026	J		<0.0059	U		<0.005	U		<0.017	U					**0.0035**	J		<0.0059	U	
		VMP-3-31.5-042717	4/27/2017	<0.02	U		0.0028	J		<0.0061	U		<0.0051	U		<0.018	U					**0.0067**	J		<0.0061	U	
		VMP-3-31.5-072017	7/20/2017	<0.02	U		0.0028	J		**0.0011**	J		<0.0051	U		<0.018	U					**0.027**			**0.00061**	J	
		VMP-3-31.5-102617	10/26/2017	<0.019	U		0.095			**0.00085**	J		<0.0048	U		<0.017	U					<0.012	U		**0.0034**	J	
		VMP-3-31.5-102617-DUP	10/26/2017	<0.019	U		0.098			**0.00062**	J		<0.0049	U		<0.017	U					<0.012	U		**0.002**	J	
		VMP-3-31.5-042718	4/27/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-3-31.5-072318	7/23/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0034**	J		<0.0061	U	
		VMP-3-31.5-102918	10/29/2018	<0.019	U		0.0053	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-3-31.5-012419	1/24/2019	<0.018	U		0.0025	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0041**	J		<0.0055	U	
		VMP-3-31.5-042919	4/29/2019	<0.019	U		0.0054	J		<0.0058	U		<0.0049	ND,UJ	UJ	<0.017	U					**0.009**	J		<0.0058	U	
		VMP-3-31.5-072519	7/25/2019	<0.021	U		<0.015	U		**0.00087**	J		<0.0054	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-3-31.5-101819	10/18/2019	<59	U		2300			<18	U		<15	U		<52	U					**18**	J		<18	U	
		VMP-3-31.5-101819-DUP	10/18/2019	<58	U		2300			<17	U		<14	U		<51	U					**14**	J		<17	U	
		VMP-3-31.5-022120	2/21/2020	<0.19	U		14			<0.058	U		<0.048	U		<0.17	U					<0.12	U		<0.058	U	
		VMP-3-31.5-042920	4/29/2020	<5.3	U		1600		J	**0.34**	J	J	<1.3	U		<1.2	U					<3.2	U		**0.93**	J	J
		VMP-3-31.5-072920	7/29/2020	<0.17	U		0.12			<0.051	U		<0.042	U		<0.15	U					**0.014**	J		<0.051	U	
		VMP-3-31.5-110420	11/4/2020	<21	U		7300			**4.8**	J		<5.2	U		<4.5	U					<12	U		**18**		
		VMP-3-31.5-012521	1/25/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0074**	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-22-050815	5/8/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-3-22-072915	7/29/2015	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		**0.0023**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-3-22-110315	11/3/2015	<0.0056	U		<0.009	U		<0.0088	U		**0.0018**	J		**0.0017**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-3-22-021616	2/16/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-3-22-042716	4/27/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-3-22-080116	8/1/2016	<0.0075	U		<0.012	U		<0.012	U		<0.0052	U		**0.0055**	J		<0.052	U		<0.0096	U		<0.0096	U	
		VMP-3-22-102616	10/26/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		**0.0075**			<0.043	U		<0.0078	U		<0.0078	U	
		VMP-3-22-013117	1/31/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-22-042717	4/27/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-3-22-072017	7/20/2017	<0.0054	U		<0.0087	U		**0.0036**	J		<0.0037	U		**0.00062**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-3-22-102617	10/26/2017	<0.005	U		<0.0081	U		**0.0021**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-22-012318	1/23/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0076**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-3-22-042718	4/27/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.00075**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-3-22-072318	7/23/2018	<0.0054	U		<0.0087	U		<0.0086	U		**0.0012**	J		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-3-22-102918	10/29/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0086**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-3-22-012419	1/24/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-3-22-042919	4/29/2019	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	ND,UJ	UJ	<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-22-072519	7/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00049**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-22-101819	10/18/2019	<0.0054	U		<0.0086	U		<0.0085	U		**0.0037**			**0.048**			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-3-22-012720	1/27/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-3-22-042920	4/29/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-3-22-072920	7/29/2020	<0.009	U		<0.0091	U		**0.02**			<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-3-22-110420	11/4/2020	<0.0058	U		<0.0093	U		**0.0015**	J		<0.004	U		**0.0007**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-3-22-012521	1/25/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0011**	J		<0.037	U		<0.0069	U		<0.0069	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0009**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-3-31.5-110315	11/3/2015	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0042**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-3-31.5-020116	2/1/2016	<0.0072	U		<0.012	U		<0.011	U		<0.005	U		**0.0018**	J		<0.05	U		<0.0092	U		<0.0092	U	
		VMP-3-31.5-042716	4/27/2016	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0013**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-3-31.5-080116	8/1/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.007**			<0.044	U		<0.0082	U		<0.0082	U	
		VMP-3-31.5-102616	10/26/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0063**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-31.5-013117	1/31/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-31.5-042717	4/27/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0013**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-31.5-072017	7/20/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0051**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-31.5-102617	10/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00082**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-3-31.5-102617-DUP	10/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.001**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-31.5-042718	4/27/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-3-31.5-072318	7/23/2018	<0.0053	U		<0.0086	U		<0.0085	U		**0.0071**			**0.00085**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-31.5-102918	10/29/2018	<0.0051	U		<0.0082	U		**0.0016**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-31.5-012419	1/24/2019	<0.0048	U		<0.0077	U		**0.0021**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-3-31.5-042919	4/29/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	ND,UJ	UJ	**0.07**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-3-31.5-072519	7/25/2019	<0.0056	U		<0.009	U		**0.0011**	J		<0.0039	U		**0.001**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-3-31.5-101819	10/18/2019	<15	U		<25	U		<25	U		<11	U		**19**			<110	U		<20	U		<20	U	
		VMP-3-31.5-101819-DUP	10/18/2019	<15	U		<24	U		<24	U		<10	U		**14**			<100	U		<19	U		<19	U	
		VMP-3-31.5-022120	2/21/2020	<0.05	U		<0.081	U		<0.08	U		<0.035	U		<0.044	U		<0.35	U		<0.064	U		<0.064	U	
		VMP-3-31.5-042920	4/29/2020	<1.4	U		<2.2	U		<2.2	U		<0.95	U		<1.2	U		<9.6	U		<1.8	U		<1.8	U	
		VMP-3-31.5-072920	7/29/2020	<0.07	U		<0.071	U		<0.07	U		<0.03	U		<0.039	U		<0.3	U		<0.056	U		<0.056	U	
		VMP-3-31.5-110420	11/4/2020	<5.4	U		<8.6	U		<8.5	U		<3.7	U		<4.7	U		<37	U		<6.9	U		<6.9	U	
		VMP-3-31.5-012521	1/25/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-3	22 ft	VMP-3-22-020915	2/9/2015	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-3-22-050815	5/8/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.03			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-3-22-072915	7/29/2015	<0.0077	U		<0.0081	U		**0.0015**	J		<0.0071	U		0.0063	J		<0.0037	U		0.003	J		<0.0062	U	
		VMP-3-22-110315	11/3/2015	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0016	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-3-22-021616	2/16/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-3-22-042716	4/27/2016	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		0.00097	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-3-22-080116	8/1/2016	<0.0095	U		<0.0099	U		<0.0087	U		<0.0087	U		0.011			<0.0045	U		0.0023	J		<0.0077	U	
		VMP-3-22-102616	10/26/2016	<0.0077	U		<0.0081	U		<0.0071	J	U	<0.0071	U		0.0011	J		<0.0037	U		0.098			**0.026**		
		VMP-3-22-013117	1/31/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0018	J		<0.0052	U	
		VMP-3-22-042717	4/27/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		0.0063			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-3-22-072017	7/20/2017	<0.0068	U		0.00092	J		<0.0062	U		<0.0062	U		0.0031	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-3-22-102617	10/26/2017	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0026	J		<0.0051	U	
		VMP-3-22-012318	1/23/2018	**0.0015**	J		0.0014	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-3-22-042718	4/27/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-3-22-072318	7/23/2018	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-3-22-102918	10/29/2018	<0.0062	U		<0.0065	U		**0.01**			**0.0022**	J		0.00084	J		<0.0029	U		0.0063			**0.0033**	J	
		VMP-3-22-012419	1/24/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.008			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-3-22-042919	4/29/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-3-22-072519	7/25/2019	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-22-101819	10/18/2019	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		0.024			<0.0032	U		0.031			**0.01**		
		VMP-3-22-012720	1/27/2020	<0.007	U		0.0028	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-3-22-042920	4/29/2020	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-3-22-072920	7/29/2020	**0.0016**	J		<0.0074	U		<0.0065	U		<0.0065	U		0.004	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-3-22-110420	11/4/2020	<0.0072	U		0.0013	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.00069	J		<0.0059	U	
		VMP-3-22-012521	1/25/2021	<0.0068	U		0.0018	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
	31.5 ft	VMP-3-31.5-020915	2/9/2015	<0.0061	U		0.013			<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-3-31.5-110315	11/3/2015	<0.0069	U		0.022			<0.0063	U		<0.0063	U		0.07			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-3-31.5-020116	2/1/2016	<0.009	U		0.016			<0.0083	U		<0.0083	U		0.11			<0.0043	U		0.0015	J		<0.0073	U	
		VMP-3-31.5-042716	4/27/2016	<0.0069	U		0.0082			<0.0063	U		<0.0063	U		0.053			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-3-31.5-080116	8/1/2016	<0.0081	U		0.011			<0.0074	U		<0.0074	U		0.0053	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-3-31.5-102616	10/26/2016	<0.0064	U		0.019			<0.0058	J	U	<0.0058	U		0.0037	J		<0.003	U		0.084			**0.024**		
		VMP-3-31.5-013117	1/31/2017	<0.0065	U		0.011			**0.0025**	J		**0.0036**	J		0.0021	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-3-31.5-042717	4/27/2017	<0.0067	U		0.011			**0.001**	J		<0.0061	U		0.017			<0.0032	U		0.0071			**0.0039**	J	
		VMP-3-31.5-072017	7/20/2017	<0.0067	U		0.011			**0.0048**	J		**0.0022**	J		0.0026	J		<0.0032	U		0.086			**0.021**		
		VMP-3-31.5-102617	10/26/2017	<0.0063	U		0.0068			**0.011**			**0.0061**			0.0062			<0.003	U		0.012			**0.0046**	J	
		VMP-3-31.5-102617-DUP	10/26/2017	<0.0064	U		0.0065	J		**0.0063**			**0.0038**	J		0.0061			<0.003	U		0.0098			**0.0036**	J	
		VMP-3-31.5-042718	4/27/2018	<0.0063	U		0.0073			<0.0057	U		<0.0057	U		0.059			<0.003	U		<0.005	U		<0.005	U	
		VMP-3-31.5-072318	7/23/2018	<0.0067	U		0.014			<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-31.5-102918	10/29/2018	<0.0064	U		0.018			<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-3-31.5-012419	1/24/2019	<0.006	U		0.026			<0.0055	U		<0.0055	U		0.0019	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-3-31.5-042919	4/29/2019	<0.0064	U		0.023			**0.0026**	J		<0.0058	U		0.0031	J		<0.003	U		0.011			**0.003**	J	
		VMP-3-31.5-072519	7/25/2019	<0.007	U		0.016			<0.0064	U		<0.0064	U		0.0012	J		<0.0033	U		0.0012	J		<0.0057	U	
		VMP-3-31.5-101819	10/18/2019	<20	U		<20	U		<18	U		<18	U		570			<9.3	U		7	J		<16	U	
		VMP-3-31.5-101819-DUP	10/18/2019	<19	U		<20	U		<17	U		<17	U		610			<9.1	U		4	J		<15	U	
		VMP-3-31.5-022120	2/21/2020	<0.063	U		<0.066	U		<0.058	U		<0.058	U		3			<0.03	U		<0.051	U		<0.051	U	
		VMP-3-31.5-042920	4/29/2020	**0.6**	J	J	<1.8	U		<1.6	U		<1.6	U		730		J	<0.82	U		<1.4	U		<1.4	U	
		VMP-3-31.5-072920	7/29/2020	<0.055	U		<0.058	U		<0.051	U		<0.051	U		12			<0.026	U		<0.045	U		<0.045	U	
		VMP-3-31.5-110420	11/4/2020	<6.8	U		<7.1	U		<6.2	U		<6.2	U		570			<3.2	U		<5.5	U		<5.5	U	
		VMP-3-31.5-012521	1/25/2021	<0.0069	U		0.0026	J		<0.0063	U		<0.0063	U		0.022			<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<94	U		<13	U		<27	U		<41	U		<150	U		<8.8	U		2100			<47	U	
		VMP-3-39-110315	11/3/2015	**0.034**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.03			**0.012**	J	
		VMP-3-39-020116	2/1/2016	**0.014**	J		**0.0022**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.021			**0.002**	J	
		VMP-3-39-020116-DUP	2/1/2016	**0.013**	J		**0.0026**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.023			<0.016	U	
		VMP-3-39-042718	4/27/2018	**0.031**	J		**0.0014**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.011**	J	
		VMP-3-39-042718-DUP	4/27/2018	**0.017**	J		**0.0018**	J		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-3-39-072318	7/23/2018	**0.099**			**0.0028**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.0083	J		**0.015**	J	
		VMP-3-39-102918	10/29/2018	**0.0083**	J		**0.0015**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-3-39-012419	1/24/2019	**0.01**	J		**0.00095**	J		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		0.012			**0.0017**	J	
		VMP-3-39-012419-DUP	1/24/2019	**0.01**	J		**0.002**	J		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		0.013			**0.0021**	J	
	5 ft	VMP-4-5-021015	2/10/2015	**0.0077**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0052	J		<0.015	U	
		VMP-4-5-110215	11/2/2015	**0.04**			<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0058**	J	
		VMP-4-5-020316	2/3/2016	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0052**	J	
		VMP-4-5-050516	5/5/2016	**0.12**	J		**0.03**	J		<0.39	U		<0.6	U		<2.3	U		<0.13	U		26			<0.69	U	
		VMP-4-5-080216	8/2/2016	**0.026**	J		**0.0013**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0078	J		**0.0055**	J	
		VMP-4-5-102816	10/28/2016	**0.026**	J		**0.001**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0072**	J	
		VMP-4-5-012417	1/24/2017	<0.032	J	U	<0.0043	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-4-5-050317	5/3/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0027**	J	
		VMP-4-5-072517	7/25/2017	**0.021**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0038**	J	
		VMP-4-5-110117	11/1/2017	<0.026	J	U	**0.0007**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-4-5-012318	1/23/2018	**0.012**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-4-5-041118	4/11/2018	**0.035**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0052	J		**0.0095**	J	
		VMP-4-5-072318	7/23/2018	**0.017**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0028**	J	
		VMP-4-5-102918	10/29/2018	**0.013**	J		**0.0012**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.013			<0.014	U	
		VMP-4-5-012119	1/21/2019	**0.013**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U	UJ	<0.013	U	
		VMP-4-5-043019	4/30/2019	**0.016**	J		**0.0007**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0046**	J	
		VMP-4-5-072519	7/25/2019	**0.02**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U	UJ	<0.0028	U		<0.012	U		<0.015	U	
		VMP-4-5-102119	10/21/2019	**0.016**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-4-5-012320	1/23/2020	**0.0086**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-4-5-042820	4/28/2020	**0.025**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.004**	J	
		VMP-4-5-073020	7/30/2020	**0.037**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-4-5-073020-DUP	7/30/2020	**0.037**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0042**	J	
		VMP-4-5-103020	10/30/2020	<0.029	J	U	**0.0012**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-4-5-012821	1/28/2021	**0.0082**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<50	U		<25	U		<18	U		<34	U		<42	U		<19	U		<82	U		<21	U	
		VMP-3-39-110315	11/3/2015	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-3-39-020116	2/1/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-3-39-020116-DUP	2/1/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-3-39-042718	4/27/2018	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-3-39-072318	7/23/2018	**0.0031**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0047**	J		<0.028	U		<0.0071	U	
		VMP-3-39-102918	10/29/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0032**	J		<0.025	U		<0.0062	U	
		VMP-3-39-012419	1/24/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.0013**	J		<0.022	U		<0.0054	U	
		VMP-3-39-012419-DUP	1/24/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		**0.0014**	J		<0.021	U		<0.0054	U	
	5 ft	VMP-4-5-021015	2/10/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-4-5-110215	11/2/2015	**0.0017**	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-4-5-020316	2/3/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-4-5-050516	5/5/2016	**0.036**	J		<0.37	U		<0.27	U		<0.5	U		<0.62	U		<0.28	U		<1.2	U	UJ	<0.3	U	
		VMP-4-5-080216	8/2/2016	**0.0033**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-4-5-102816	10/28/2016	**0.0029**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-4-5-012417	1/24/2017	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-4-5-050317	5/3/2017	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-4-5-072517	7/25/2017	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-4-5-110117	11/1/2017	<0.014	U		<0.007	U		**0.00045**	J		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-4-5-012318	1/23/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-4-5-041118	4/11/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-4-5-072318	7/23/2018	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-4-5-102918	10/29/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-4-5-012119	1/21/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-4-5-043019	4/30/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-4-5-072519	7/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-4-5-102119	10/21/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-4-5-012320	1/23/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-4-5-042820	4/28/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-4-5-073020	7/30/2020	**0.0033**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-4-5-073020-DUP	7/30/2020	**0.0048**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-4-5-103020	10/30/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-4-5-012821	1/28/2021	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<14	U		<30	U		<24	U		<24	U		<24	U		<20	U		<16	U		<16	U	
		VMP-3-39-110315	11/3/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-3-39-020116	2/1/2016	**0.0012**	J		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0023**	J		<0.0057	U		<0.0057	U	
		VMP-3-39-020116-DUP	2/1/2016	**0.0025**	J		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0017**	J		<0.0056	U		<0.0056	U	
		VMP-3-39-042718	4/27/2018	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0034**	J		<0.0059	U		<0.0059	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0028**	J		<0.006	U		<0.006	U	
		VMP-3-39-072318	7/23/2018	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0034**	J		<0.0055	U		<0.0055	U	
		VMP-3-39-102918	10/29/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-3-39-012419	1/24/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0024**	J		<0.0042	U		<0.0042	U	
		VMP-3-39-012419-DUP	1/24/2019	**0.00063**	J		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0031**	J		<0.0042	U		<0.0042	U	
	5 ft	VMP-4-5-021015	2/10/2015	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-4-5-110215	11/2/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-4-5-020316	2/3/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-4-5-050516	5/5/2016	<0.2	U		<0.45	U		<0.35	U		<0.35	U		<0.35	U		<0.29	U		<0.24	U		<0.24	U	
		VMP-4-5-080216	8/2/2016	**0.0052**			<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0028**	J		<0.0054	U		<0.0054	U	
		VMP-4-5-102816	10/28/2016	**0.0023**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-4-5-012417	1/24/2017	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-4-5-050317	5/3/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-4-5-072517	7/25/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-4-5-110117	11/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-4-5-012318	1/23/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0031**	J		<0.0047	U		<0.0047	U	
		VMP-4-5-041118	4/11/2018	**0.0012**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-4-5-072318	7/23/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-4-5-102918	10/29/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-4-5-012119	1/21/2019	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-4-5-043019	4/30/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-4-5-072519	7/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-4-5-102119	10/21/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-4-5-012320	1/23/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-4-5-042820	4/28/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-4-5-073020	7/30/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	J	U	**0.0022**	J		<0.005	U		<0.005	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-4-5-103020	10/30/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-4-5-012821	1/28/2021	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<16	U		<16	U		<16	U		<140	U		<18	U		<18	U		<18	U		<57	U	
		VMP-3-39-110315	11/3/2015	<0.0049	U		<0.0049	U		<0.0049	U		**0.011**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-3-39-020116	2/1/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-3-39-020116-DUP	2/1/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-3-39-042718	4/27/2018	<0.0058	U		<0.0058	U		<0.0058	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-3-39-072318	7/23/2018	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-3-39-102918	10/29/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-3-39-012419	1/24/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-3-39-012419-DUP	1/24/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
	5 ft	VMP-4-5-021015	2/10/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-5-110215	11/2/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.0047**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-4-5-020316	2/3/2016	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-5-050516	5/5/2016	<0.23	U		<0.23	U		<0.23	U		<2	U		<0.27	U		<0.26	U		<0.26	U		<0.84	U	
		VMP-4-5-080216	8/2/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-4-5-102816	10/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-4-5-012417	1/24/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-4-5-050317	5/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-4-5-072517	7/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0018**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-5-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-4-5-012318	1/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-4-5-041118	4/11/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-5-072318	7/23/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-5-102918	10/29/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-4-5-012119	1/21/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-4-5-043019	4/30/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-5-072519	7/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-5-102119	10/21/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-4-5-012320	1/23/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-5-042820	4/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-5-073020	7/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		**0.0017**	J	
		VMP-4-5-103020	10/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-5-012821	1/28/2021	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<30	U		<17	U		4.4	J		<30	U		<28	U		<16	U		<170	U		**14**	J	
		VMP-3-39-110315	11/3/2015	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0027**	J		<0.053	U		**0.0036**	J	
		VMP-3-39-020116	2/1/2016	<0.011	U		**0.0064**			0.003	J		<0.011	U		<0.0098	U		**0.0089**			<0.06	U		**0.021**		
		VMP-3-39-020116-DUP	2/1/2016	<0.01	U		**0.0064**			0.0048	J		<0.01	U		<0.0096	U		**0.011**			<0.059	U		**0.024**		
		VMP-3-39-042718	4/27/2018	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-3-39-072318	7/23/2018	0.0063	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0022**	J		<0.058	U		**0.0019**	J	
		VMP-3-39-102918	10/29/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-3-39-012419	1/24/2019	0.0076	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		**0.0012**	J		<0.045	U		**0.0029**	J	
		VMP-3-39-012419-DUP	1/24/2019	<0.0078	U		**0.0012**	J		<0.0051	U		<0.0079	U		<0.0072	U		**0.0031**	J		<0.044	U		**0.0083**		
	5 ft	VMP-4-5-021015	2/10/2015	<0.0097	J	U	<0.0056	U		0.00099	J	J	<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.0008**	J	
		VMP-4-5-110215	11/2/2015	0.007	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-4-5-020316	2/3/2016	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		**0.0012**	J		<0.053	U		**0.0013**	J	
		VMP-4-5-050516	5/5/2016	<0.44	U		**0.63**			0.58			<0.45	U		<0.41	U		**0.13**	J		<2.5	U		**0.91**		
		VMP-4-5-080216	8/2/2016	0.013			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.005**	J		<0.057	U		**0.0035**	J	
		VMP-4-5-102816	10/28/2016	0.011			**0.061**			0.0081			<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-4-5-012417	1/24/2017	0.0041	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-4-5-050317	5/3/2017	0.0082	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-4-5-072517	7/25/2017	0.0061	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.00064**	J	
		VMP-4-5-110117	11/1/2017	0.011			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-4-5-012318	1/23/2018	<0.0088	J	U	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-4-5-041118	4/11/2018	0.016			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.002**	J		<0.053	U		<0.0044	U	
		VMP-4-5-072318	7/23/2018	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-5-102918	10/29/2018	0.0064	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0024**	J	
		VMP-4-5-012119	1/21/2019	0.0052	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-4-5-043019	4/30/2019	0.01			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-5-072519	7/25/2019	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-4-5-102119	10/21/2019	0.0037	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-5-012320	1/23/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-4-5-042820	4/28/2020	<0.0097	ND,UJ	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-4-5-073020	7/30/2020	0.0093			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-5-073020-DUP	7/30/2020	0.012			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-4-5-103020	10/30/2020	0.0063	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-4-5-012821	1/28/2021	0.0054	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<65	U		900			<20	U		<16	U		<14	U					<39	U		<20	U	
		VMP-3-39-110315	11/3/2015	**0.0019**	J		0.017			<0.0061	U		<0.0051	J	U	<0.0045	U					**0.012**			<0.0061	U	
		VMP-3-39-020116	2/1/2016	<0.023	U		0.024			<0.0069	U		<0.0058	U		<0.0051	U					**0.0047**	J		<0.0069	U	
		VMP-3-39-020116-DUP	2/1/2016	<0.023	U		0.03			<0.0068	U		<0.0056	U		<0.005	U					**0.0034**	J		<0.0068	U	
		VMP-3-39-042718	4/27/2018	<0.024	U		0.016	J		<0.0072	U		<0.006	U		<0.021	U					**0.0038**	J		<0.0072	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.024	U		0.012	J		<0.0073	U		<0.0061	U		<0.021	U					<0.014	U		<0.0073	U	
		VMP-3-39-072318	7/23/2018	<0.022	U		0.0065	J		<0.0067	U		<0.0056	U		**0.0062**	J					**0.006**	J		<0.0067	U	
		VMP-3-39-102918	10/29/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-3-39-012419	1/24/2019	<0.017	U		0.0049	J		<0.0052	U		<0.0043	U		<0.015	U					**0.0014**	J		<0.0052	U	
		VMP-3-39-012419-DUP	1/24/2019	<0.017	U		0.0072	J		<0.0051	U		<0.0042	U		<0.015	U					**0.0047**	J		<0.0051	U	
	5 ft	VMP-4-5-021015	2/10/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.0029**	J		<0.0063	U	
		VMP-4-5-110215	11/2/2015	<0.023	U		0.0047	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.005**	J		<0.0069	U	
		VMP-4-5-020316	2/3/2016	**0.0021**	J		0.0024	J		**0.0018**	J		<0.0051	U		<0.0045	U					**0.0052**	J		<0.0061	U	
		VMP-4-5-050516	5/5/2016	<0.96	U		30			**0.052**	J		<0.24	U		<0.21	U					<0.58	U		**0.14**	J	
		VMP-4-5-080216	8/2/2016	<0.022	U		0.016	J		<0.0066	U		<0.0055	U		<0.019	U					**0.013**			<0.0066	U	
		VMP-4-5-102816	10/28/2016	<0.021	U		0.0036	J		<0.0064	J	U	**0.0032**	J		<0.019	U		<0.014	U		**0.019**			**0.002**	J	
		VMP-4-5-012417	1/24/2017	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0087**	J		<0.0067	U	
		VMP-4-5-050317	5/3/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-4-5-072517	7/25/2017	<0.02	U		0.0014	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-4-5-110117	11/1/2017	<0.018	U		0.0027	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-4-5-012318	1/23/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0028**	J		<0.0057	U	
		VMP-4-5-041118	4/11/2018	**0.0034**	J		0.034			**0.00091**	J		<0.005	U		<0.018	U					**0.014**			**0.00065**	J	
		VMP-4-5-072318	7/23/2018	<0.02	U		<0.014	U		**0.0018**	J		<0.005	U		<0.018	U					**0.03**			<0.006	U	
		VMP-4-5-102918	10/29/2018	<0.02	U		0.005	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-4-5-012119	1/21/2019	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0024**	J		<0.0056	U	
		VMP-4-5-043019	4/30/2019	<0.02	U		0.0021	J		**0.0018**	J		<0.005	U		<0.018	U					**0.0036**	J		<0.006	U	
		VMP-4-5-072519	7/25/2019	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.002**	J		<0.0062	U	
		VMP-4-5-102119	10/21/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0019**	J		<0.0059	U	
		VMP-4-5-012320	1/23/2020	<0.021	U		0.0075	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0097**	J		<0.0063	U	
		VMP-4-5-042820	4/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.005**	J		<0.0063	U	
		VMP-4-5-073020	7/30/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.01**	J		<0.006	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.0065**	J		<0.0063	U	
		VMP-4-5-103020	10/30/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0089**	J		<0.0061	U	
		VMP-4-5-012821	1/28/2021	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0056**	J		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<17	U		<27	U		<27	U		<12	U		**7.3**	J		<120	U		<22	U		<22	U	
		VMP-3-39-110315	11/3/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0021**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-3-39-020116	2/1/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.016**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-3-39-020116-DUP	2/1/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.017**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-3-39-042718	4/27/2018	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.00096**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-3-39-072318	7/23/2018	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.001**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-3-39-102918	10/29/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-3-39-012419	1/24/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-3-39-012419-DUP	1/24/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.003	U		<0.0039	U		<0.031	U		<0.0056	U		<0.0056	U	
	5 ft	VMP-4-5-021015	2/10/2015	<0.0055	U		<0.0088	U		**0.0026**	J		<0.0038	U		**0.0013**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-5-110215	11/2/2015	<0.006	U		<0.0096	U		<0.0095	U		**0.0026**	J		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-4-5-020316	2/3/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U	UJ	<0.0068	U		<0.0068	U	
		VMP-4-5-050516	5/5/2016	<0.25	U		<0.4	U		<0.4	U		<0.17	U		**0.88**			<1.7	U		<0.32	U		<0.32	U	
		VMP-4-5-080216	8/2/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.042**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-4-5-102816	10/28/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.017**			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-4-5-012417	1/24/2017	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-4-5-050317	5/3/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-4-5-072517	7/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.00052**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-4-5-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.00044**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-4-5-012318	1/23/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-4-5-041118	4/11/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-4-5-072318	7/23/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00098**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-4-5-102918	10/29/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-4-5-012119	1/21/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-4-5-043019	4/30/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0023**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-4-5-072519	7/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0017**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-4-5-102119	10/21/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-4-5-012320	1/23/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-5-042820	4/28/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-5-073020	7/30/2020	<0.0084	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	J	U	<0.0067	U		<0.0067	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0088	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.001**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-5-103020	10/30/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-4-5-012821	1/28/2021	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39 ft	VMP-3-39-020915	2/9/2015	<21	U		<22	U		**4.5**	J		<20	U		150			<10	U		<17	U		<17	U	
		VMP-3-39-110315	11/3/2015	<0.0067	U		0.12			<0.0061	U		<0.0061	U		0.0062			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-3-39-020116	2/1/2016	<0.0076	U		0.1			**0.0028**	J		**0.00081**	J		0.023			<0.0036	U		0.013			**0.0046**	J	
		VMP-3-39-020116-DUP	2/1/2016	<0.0074	U		0.11			**0.0052**	J		**0.0016**	J		0.026			<0.0035	U		0.018			**0.0062**		
		VMP-3-39-042718	4/27/2018	<0.0078	U		0.034			<0.0072	U		<0.0072	U		2			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-3-39-042718-DUP	4/27/2018	<0.008	U		0.035			<0.0073	U		<0.0073	U		2			<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-3-39-072318	7/23/2018	<0.0073	U		0.012			<0.0067	U		<0.0067	U		0.0016	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-3-39-102918	10/29/2018	<0.0065	U		0.025			<0.0059	U		<0.0059	U		0.001	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-3-39-012419	1/24/2019	<0.0056	U		0.042			<0.0052	U		<0.0052	U		0.0017	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-3-39-012419-DUP	1/24/2019	<0.0056	U		0.039			<0.0051	U		<0.0051	U		0.0039	J		<0.0026	U		0.0013	J		<0.0045	U	
	5 ft	VMP-4-5-021015	2/10/2015	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	J	U	<0.006	U		<0.0033	U		<0.0056	J	U	<0.0056	U	
		VMP-4-5-110215	11/2/2015	<0.0076	U		0.0015	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-4-5-020316	2/3/2016	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-4-5-050516	5/5/2016	<0.31	U		<0.33	U		**0.69**			**0.23**	J		0.19	J		<0.15	U		1.6			**0.59**		
		VMP-4-5-080216	8/2/2016	<0.0072	U		0.0013	J		<0.0066	U		<0.0066	U		0.0011	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-4-5-102816	10/28/2016	<0.007	U		<0.0073	U		<0.0064	J	U	<0.0064	U		<0.0061	J	U	<0.0033	U		0.21			**0.056**		
		VMP-4-5-012417	1/24/2017	**0.0024**	J		<0.0076	U		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		0.0012	J		<0.0059	U	
		VMP-4-5-050317	5/3/2017	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.036			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-4-5-072517	7/25/2017	<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-4-5-110117	11/1/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-4-5-012318	1/23/2018	<0.0063	U		0.0016	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-4-5-041118	4/11/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.016			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-4-5-072318	7/23/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-5-102918	10/29/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.0027	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-5-012119	1/21/2019	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-4-5-043019	4/30/2019	<0.0066	U		0.0013	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-5-072519	7/25/2019	<0.0067	U		0.00085	J		<0.0062	U		<0.0062	U		0.0013	J		<0.0032	U		0.0012	J		<0.0054	U	
		VMP-4-5-102119	10/21/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-4-5-012320	1/23/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-4-5-042820	4/28/2020	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-4-5-073020	7/30/2020	<0.0066	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-5-073020-DUP	7/30/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-4-5-103020	10/30/2020	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-4-5-012821	1/28/2021	<0.0061	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	**0.0055**	J		**0.014**			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-4-12-051115	5/11/2015	**0.021**	J		**0.0069**			<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0048	J		**0.0049**	J	
		VMP-4-12-080315	8/3/2015	**0.035**	J		<0.0048	J	U	**0.0031**	J		<0.016	U		<0.059	U		<0.0033	U		<0.014	U		**0.0073**	J	
		VMP-4-12-110215	11/2/2015	**0.019**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0036**	J	
		VMP-4-12-020316	2/3/2016	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0062	J		<0.015	U	
		VMP-4-12-050316	5/3/2016	**0.016**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.0043	J		**0.0062**	J	
		VMP-4-12-080216	8/2/2016	**0.038**	J		<0.0052	U		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		<0.016	U		**0.0094**	J	
		VMP-4-12-102816	10/28/2016	**0.017**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-4-12-012417	1/24/2017	**0.012**	J		<0.0043	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.003**	J	
		VMP-4-12-050317	5/3/2017	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.004**	J	
		VMP-4-12-072517	7/25/2017	**0.018**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0043**	J	
		VMP-4-12-110117	11/1/2017	<0.026	J	U	**0.00069**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-4-12-012318	1/23/2018	**0.01**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-4-12-041118	4/11/2018	**0.02**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0099	J		**0.0035**	J	
		VMP-4-12-072318	7/23/2018	**0.024**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0039**	J	
		VMP-4-12-102918	10/29/2018	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0039**	J	
		VMP-4-12-012119	1/21/2019	**0.029**			<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U	UJ	**0.002**	J	
		VMP-4-12-043019	4/30/2019	**0.014**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-4-12-072519	7/25/2019	**0.013**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.012	U		<0.014	U	
		VMP-4-12-102119	10/21/2019	**0.0095**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0035	J		<0.015	U	
		VMP-4-12-012320	1/23/2020	**0.0047**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-4-12-042820	4/28/2020	**0.019**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0031**	J	
		VMP-4-12-073020	7/30/2020	**0.031**			**0.0046**			<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.037			**0.0025**	J	
		VMP-4-12-103020	10/30/2020	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-4-12-012821	1/28/2021	**0.0082**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-4-12-051115	5/11/2015	**0.0022**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-4-12-080315	8/3/2015	**0.0036**	J		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		**0.0099**			<0.031	U		<0.0078	U	
		VMP-4-12-110215	11/2/2015	**0.0039**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-4-12-020316	2/3/2016	**0.0019**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-4-12-050316	5/3/2016	**0.0012**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0013**	J		<0.028	U	UJ	<0.0071	U	
		VMP-4-12-080216	8/2/2016	**0.0075**	J		<0.01	U		<0.0076	U		<0.014	U		<0.017	U		**0.0054**	J		<0.034	U		<0.0085	U	
		VMP-4-12-102816	10/28/2016	**0.003**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0034**	J		<0.028	U		<0.007	U	
		VMP-4-12-012417	1/24/2017	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-4-12-050317	5/3/2017	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-4-12-072517	7/25/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0022**	J		<0.025	U		<0.0062	U	
		VMP-4-12-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0015**	J		<0.023	U		<0.0057	U	
		VMP-4-12-012318	1/23/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	J	U	<0.024	U		<0.0059	U	
		VMP-4-12-041118	4/11/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-4-12-072318	7/23/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0044**	J		<0.025	U		<0.0063	U	
		VMP-4-12-102918	10/29/2018	**0.001**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-4-12-012119	1/21/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-4-12-043019	4/30/2019	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-4-12-072519	7/25/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	ND,UJ	UJ
		VMP-4-12-102119	10/21/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-4-12-012320	1/23/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-4-12-042820	4/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-4-12-073020	7/30/2020	**0.002**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0065	U	
		VMP-4-12-103020	10/30/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0064	U	
		VMP-4-12-012821	1/28/2021	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	**0.002**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-4-12-051115	5/11/2015	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-4-12-080315	8/3/2015	<0.0052	U		<0.012	U		**0.0038**	J		<0.0091	U		<0.0091	U		**0.0025**	J		<0.0061	U		<0.0061	U	
		VMP-4-12-110215	11/2/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0025**	J		<0.0058	U		<0.0058	U	
		VMP-4-12-020316	2/3/2016	**0.0024**	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0037**	J		<0.0051	U		<0.0051	U	
		VMP-4-12-050316	5/3/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-4-12-080216	8/2/2016	<0.0056	U		<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		**0.0022**	J		<0.0066	U		<0.0066	U	
		VMP-4-12-102816	10/28/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0034**	J		<0.0055	U		<0.0055	U	
		VMP-4-12-012417	1/24/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-4-12-050317	5/3/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-4-12-072517	7/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-4-12-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-4-12-012318	1/23/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-4-12-041118	4/11/2018	**0.0021**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-4-12-072318	7/23/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0017**	J		<0.0049	U		<0.0049	U	
		VMP-4-12-102918	10/29/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-4-12-012119	1/21/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-4-12-043019	4/30/2019	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-4-12-072519	7/25/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-4-12-102119	10/21/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-4-12-012320	1/23/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-4-12-042820	4/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-4-12-073020	7/30/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-4-12-103020	10/30/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-4-12-012821	1/28/2021	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-4-12-051115	5/11/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-4-12-080315	8/3/2015	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-4-12-110215	11/2/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0041**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-4-12-020316	2/3/2016	<0.005	U		<0.005	U		<0.005	U		**0.003**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-12-050316	5/3/2016	<0.0055	U		<0.0055	U		<0.0055	U		**0.0024**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-4-12-080216	8/2/2016	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0076	U		<0.0074	U		<0.0074	U		<0.024	U	
		VMP-4-12-102816	10/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-4-12-012417	1/24/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-4-12-050317	5/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-4-12-072517	7/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0056**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-4-12-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-4-12-012318	1/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-4-12-041118	4/11/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-12-072318	7/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0024**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-4-12-102918	10/29/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-12-012119	1/21/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-4-12-043019	4/30/2019	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-4-12-072519	7/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-12-102119	10/21/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-12-012320	1/23/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-12-042820	4/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-4-12-073020	7/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		**0.0019**	J	
		VMP-4-12-103020	10/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-12-012821	1/28/2021	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	<0.0098	J	U	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0063**		
		VMP-4-12-051115	5/11/2015	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0024**	J	
		VMP-4-12-080315	8/3/2015	0.0087	J		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-4-12-110215	11/2/2015	0.011	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		**0.0013**	J		<0.062	U		<0.0051	U	
		VMP-4-12-020316	2/3/2016	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0013**	J	
		VMP-4-12-050316	5/3/2016	<0.01	U		<0.006	U		0.064			<0.01	U		<0.0096	U		**0.0058**			<0.059	U		**0.0067**		
		VMP-4-12-080216	8/2/2016	0.0061	J		<0.0071	U		<0.0081	U		<0.012	U		<0.011	U		<0.0067	U		<0.07	U		**0.00097**	J	
		VMP-4-12-102816	10/28/2016	<0.01	J	U	**0.018**			0.0029	J		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-4-12-012417	1/24/2017	0.0087	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-4-12-050317	5/3/2017	0.0079	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-4-12-072517	7/25/2017	0.0092			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-4-12-110117	11/1/2017	0.0042	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-4-12-012318	1/23/2018	<0.0086	J	U	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0015**	J	
		VMP-4-12-041118	4/11/2018	0.013			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-4-12-072318	7/23/2018	0.0063	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-12-102918	10/29/2018	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-4-12-012119	1/21/2019	0.0086			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-4-12-043019	4/30/2019	0.042			<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-4-12-072519	7/25/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-12-102119	10/21/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0022**	J	
		VMP-4-12-012320	1/23/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-4-12-042820	4/28/2020	0.01	J	J	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-4-12-073020	7/30/2020	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.0064**		
		VMP-4-12-103020	10/30/2020	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-12-012821	1/28/2021	0.0031	J		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	<0.021	U		0.0086	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.0036**	J		<0.0064	U	
		VMP-4-12-051115	5/11/2015	**0.001**	J		0.006	J		<0.0058	U		**0.0011**	J		<0.0042	U					**0.0087**	J		<0.0058	U	
		VMP-4-12-080315	8/3/2015	<0.025	U		<0.018	U		<0.0074	U		**0.0018**	J		<0.0054	U					<0.015	U		<0.0074	U	
		VMP-4-12-110215	11/2/2015	<0.024	U		0.0033	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.013**	J		<0.0071	U	
		VMP-4-12-020316	2/3/2016	<0.021	U		0.0049	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.023**			<0.0062	U	
		VMP-4-12-050316	5/3/2016	**0.0016**	J		0.0044	J		<0.0068	U		**0.0017**	J		<0.005	U					**0.0031**	J		<0.0068	U	
		VMP-4-12-080216	8/2/2016	<0.027	U		<0.019	U		<0.0081	U		<0.0067	U		<0.024	U					**0.016**			<0.0081	U	
		VMP-4-12-102816	10/28/2016	<0.022	U		0.004	J		<0.0067	U		<0.0056	U		<0.02	U		<0.014	U		**0.015**			<0.0067	U	
		VMP-4-12-012417	1/24/2017	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0095**	J		<0.0067	U	
		VMP-4-12-050317	5/3/2017	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-4-12-072517	7/25/2017	<0.02	U		0.0023	J		**0.00041**	J		<0.0049	U		<0.017	U					<0.012	U		**0.00097**	J	
		VMP-4-12-110117	11/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-4-12-012318	1/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0049**	J		<0.0056	U	
		VMP-4-12-041118	4/11/2018	<0.021	U		0.087			<0.0063	U		<0.0053	U		<0.019	U					**0.014**			<0.0063	U	
		VMP-4-12-072318	7/23/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0034**	J		<0.006	U	
		VMP-4-12-102918	10/29/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-4-12-012119	1/21/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0038**	J		<0.0053	U	
		VMP-4-12-043019	4/30/2019	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-4-12-072519	7/25/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-4-12-102119	10/21/2019	<0.021	U		0.0038	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0052**	J		<0.0062	U	
		VMP-4-12-012320	1/23/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-4-12-042820	4/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0039**	J		**0.0016**	J	
		VMP-4-12-073020	7/30/2020	<0.02	U		0.012	J		<0.0062	U		<0.0051	U		<0.018	U					**0.0082**	J		<0.0062	U	
		VMP-4-12-103020	10/30/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0075**	J		<0.006	U	
		VMP-4-12-012821	1/28/2021	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0032**	J		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0011**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-4-12-051115	5/11/2015	<0.005	U		<0.0081	U		**0.003**	J		**0.0024**	J		**0.0028**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-4-12-080315	8/3/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U	UJ	<0.0082	U		<0.0082	U	
		VMP-4-12-110215	11/2/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-4-12-020316	2/3/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0016**	J		<0.038	U	UJ	<0.0069	U		<0.0069	U	
		VMP-4-12-050316	5/3/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0016**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-4-12-080216	8/2/2016	<0.007	U		<0.011	U		<0.011	U		<0.0048	U		<0.0062	U		<0.049	U		<0.0089	U		<0.0089	U	
		VMP-4-12-102816	10/28/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0071**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-4-12-012417	1/24/2017	**0.0053**	J		<0.0093	U		<0.0092	U		<0.004	U		**0.00074**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-4-12-050317	5/3/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-4-12-072517	7/25/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00039**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-4-12-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-4-12-012318	1/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-4-12-041118	4/11/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-12-072318	7/23/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-4-12-102918	10/29/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-4-12-012119	1/21/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-4-12-043019	4/30/2019	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-4-12-072519	7/25/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-4-12-102119	10/21/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-4-12-012320	1/23/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-4-12-042820	4/28/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-4-12-073020	7/30/2020	<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0012**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-4-12-103020	10/30/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-4-12-012821	1/28/2021	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-4	12 ft	VMP-4-12-021015	2/10/2015	<0.007	U		<0.0073	U		<0.0064	J	U	<0.0064	U		0.015			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-4-12-051115	5/11/2015	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-4-12-080315	8/3/2015	<0.0081	U		0.0021	J		<0.0074	U		<0.0074	U		0.0065	J		<0.0038	U		<0.0066	U		<0.0066	U	
		VMP-4-12-110215	11/2/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0022	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-4-12-020316	2/3/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-12-050316	5/3/2016	<0.0074	U		<0.0078	U		**0.082**			**0.034**			<0.0064	U		<0.0035	U		0.0054	J		**0.0037**	J	
		VMP-4-12-080216	8/2/2016	<0.0088	U		<0.0092	U		<0.0081	U		<0.0081	U		0.0012	J		<0.0042	U		<0.0071	U		<0.0071	U	
		VMP-4-12-102816	10/28/2016	<0.0073	U		<0.0076	U		<0.0067	J	U	<0.0067	U		<0.0064	U		<0.0035	U		0.068			**0.02**		
		VMP-4-12-012417	1/24/2017	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		0.0012	J		<0.0059	U	
		VMP-4-12-050317	5/3/2017	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	J	U	<0.0029	U		<0.005	U		<0.005	U	
		VMP-4-12-072517	7/25/2017	<0.0064	U		0.0013	J		**0.00096**	J		<0.0059	U		0.0045	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-4-12-110117	11/1/2017	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-4-12-012318	1/23/2018	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-4-12-041118	4/11/2018	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.041			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-4-12-072318	7/23/2018	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-12-102918	10/29/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-12-012119	1/21/2019	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-4-12-043019	4/30/2019	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-4-12-072519	7/25/2019	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-12-102119	10/21/2019	<0.0068	U		0.00064	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-12-012320	1/23/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-12-042820	4/28/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.00099	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-4-12-073020	7/30/2020	<0.0067	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-4-12-103020	10/30/2020	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-12-012821	1/28/2021	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-4-23.5-021015	2/10/2015	**1.7**	J		**0.2**	J		<0.98	U		<1.5	U		<5.7	U		<0.32	U		35			<1.7	U	
		VMP-4-23.5-050815	5/8/2015	**1.5**	J		**1.4**			<0.93	U		<1.4	U		<5.4	U		<0.31	U		30			**0.38**	J	
		VMP-4-23.5-061515-R	6/15/2015	<0.14	U		**0.37**		J	<0.1	U		<0.15	U		<0.058	U		<0.033	U		34		J	<0.18	U	
		VMP-4-23.5-073015	7/30/2015	<0.53	U		<0.18	U		<0.37	U		<0.57	U		<0.22	U		<0.12	U		17			<0.65	U	
		VMP-4-23.5-110215	11/2/2015	<0.26	U		**0.089**			<0.18	U		<0.28	U		<0.11	U		<0.061	U		16			<0.32	U	
		VMP-4-23.5-020316	2/3/2016	<2.2	U		<0.76	U		<1.6	U		<2.4	U		<0.92	U	UJ	<0.52	U		16			<2.8	U	
		VMP-4-23.5-020316-DUP	2/3/2016	<2.2	U		<0.73	U		<1.5	U		<2.4	U		<0.88	U	UJ	<0.5	U		14			<2.7	U	
		VMP-4-23.5-050316	5/3/2016	<0.17	U		**0.12**		J	<0.12	U		<0.19	U		<0.071	U		<0.04	U		8.8		J	<0.22	U	
		VMP-4-23.5-080216	8/2/2016	**2.1**			<0.22	U		<0.45	U		<0.7	U		<2.6	U		<0.15	U		40			**0.71**	J	
		VMP-4-23.5-080216-DUP	8/2/2016	**2.2**			<0.22	U		<0.46	U		<0.71	U		<2.7	U		<0.15	U		46			**0.81**	J	
		VMP-4-23.5-092316-DUP-R	9/23/2016	**0.12**	J	J	<0.047	U		<0.1	U		<0.15	U		<0.23	U		<0.033	U		16		J	<0.18	U	
		VMP-4-23.5-092316-R	9/23/2016	**0.1**	J	J	<0.051	U		<0.11	U		<0.16	U		<0.25	U		<0.035	U		17		J	<0.19	U	
		VMP-4-23.5-102816	10/28/2016	**0.046**	J		<0.045	U		<0.094	U		<0.14	U		<0.22	U		<0.031	U		14			<0.17	U	
		VMP-4-23.5-012417	1/24/2017	<0.68	U		**0.024**	J		<0.19	U		<0.3	U		<1.1	U		<0.063	U		22			<0.34	U	
		VMP-4-23.5-050317	5/3/2017	<0.34	U		<0.046	U		<0.097	U		<0.15	U		<0.56	U		<0.032	U		11			<0.17	U	
		VMP-4-23.5-050317-DUP	5/3/2017	<0.35	U		<0.047	U		<0.098	U		<0.15	U		<0.57	U		<0.032	U		11			<0.17	U	
		VMP-4-23.5-072517	7/25/2017	**0.026**	J		**0.00073**	J		<0.0081	U		<0.012	U		<0.047	U		**0.00077**	J		<0.012	U		**0.0057**	J	
		VMP-4-23.5-072517-DUP	7/25/2017	<0.03	U		**0.00069**	J		<0.0086	U		<0.013	U		<0.05	U		**0.00075**	J		<0.012	U		<0.015	U	
		VMP-4-23.5-110117	11/1/2017	**0.013**	J		**0.00064**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.008	J		<0.013	U	
		VMP-4-23.5-012318	1/23/2018	<0.03	J	U	<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-4-23.5-041118	4/11/2018	<0.22	U		<0.074	U		<0.16	U		<0.24	U		<0.36	U		<0.052	U		20			<0.27	U	
		VMP-4-23.5-041118-DUP	4/11/2018	<0.25	U		<0.083	U		<0.17	U		<0.27	U		<0.4	U		<0.058	U		23			<0.31	U	
		VMP-4-23.5-072318	7/23/2018	**0.068**			**0.00078**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.032			**0.0079**	J	
		VMP-4-23.5-072318-DUP	7/23/2018	**0.039**			**0.00068**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.035			**0.0043**	J	
		VMP-4-23.5-102918	10/29/2018	**0.012**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-4-23.5-012119	1/21/2019	**0.0094**	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U	UJ	<0.012	U	
		VMP-4-23.5-043019	4/30/2019	**0.013**	J		**0.0012**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0057	J		<0.015	U	
		VMP-4-23.5-072519	7/25/2019	**0.025**	J		**0.0054**			<0.0085	U		<0.013	U		<0.049	U	UJ	<0.0028	U		0.016			<0.015	U	
		VMP-4-23.5-102119	10/21/2019	<0.029	U		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-4-23.5-012320	1/23/2020	<0.032	U		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-4-23.5-042820	4/28/2020	**0.014**	J		**0.0014**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-4-23.5-073020	7/30/2020	**0.018**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0042**	J	
		VMP-4-23.5-103020	10/30/2020	<0.029	J	U	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-4-23.5-012821	1/28/2021	**0.054**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-4-23.5-021015	2/10/2015	<1.8	U		<0.92	U		<0.67	U		<1.2	U		<1.5	U		<0.72	U		<3	U		<0.76	U	
		VMP-4-23.5-050815	5/8/2015	**0.16**	J		<0.87	U		<0.64	U		<1.2	U		<1.5	U		<0.68	U		<2.9	U		<0.72	U	
		VMP-4-23.5-061515-R	6/15/2015	<0.046	U		<0.094	U		<0.068	U		<0.13	U		<0.16	U		<0.073	U		<0.12	U		<0.077	U	
		VMP-4-23.5-073015	7/30/2015	<0.17	U		<0.35	U		<0.26	U		<0.47	U		<0.58	U		<0.27	U		<0.46	U		<0.29	U	
		VMP-4-23.5-110215	11/2/2015	<0.086	U		<0.17	U		<0.13	U		<0.23	U		<0.29	U		<0.13	U		<0.23	U		<0.14	U	UJ
		VMP-4-23.5-020316	2/3/2016	<0.74	U	UJ	<1.5	U		<1.1	U		<2	U		<2.5	U		<1.2	U		<2	U		<1.2	U	
		VMP-4-23.5-020316-DUP	2/3/2016	<0.71	U	UJ	<1.4	U		<1	U		<1.9	U		<2.4	U		<1.1	U		<1.9	U		<1.2	U	
		VMP-4-23.5-050316	5/3/2016	<0.057	U		<0.11	U		<0.084	U		<0.16	U		<0.19	U		<0.089	U		<0.15	U		<0.094	U	
		VMP-4-23.5-080216	8/2/2016	**1.1**			<0.42	U		<0.31	U		<0.58	U		<0.71	U		<0.33	U		<1.4	U		<0.35	U	
		VMP-4-23.5-080216-DUP	8/2/2016	**1.3**			<0.43	U		<0.32	U		<0.59	U		<0.73	U		<0.34	U		<1.4	U		<0.36	U	
		VMP-4-23.5-092316-DUP-R	9/23/2016	<0.18	U		<0.093	U		<0.068	U		<0.13	U		<0.16	U		<0.072	U		<0.12	U		<0.077	U	
		VMP-4-23.5-092316-R	9/23/2016	<0.2	U		<0.1	U		<0.074	U		<0.14	U		<0.17	U		<0.078	U		<0.13	U		<0.083	U	
		VMP-4-23.5-102816	10/28/2016	<0.18	U		<0.089	U		<0.065	U		<0.12	U		<0.15	U		<0.069	U		<0.12	U		<0.073	U	
		VMP-4-23.5-012417	1/24/2017	**0.016**	J		<0.18	U		<0.13	U		<0.24	U		<0.3	U		<0.14	U		<0.59	U		<0.15	U	
		VMP-4-23.5-050317	5/3/2017	**0.017**	J		<0.091	U		<0.066	U		<0.12	U		<0.15	U		<0.07	U		<0.3	U		<0.075	U	
		VMP-4-23.5-050317-DUP	5/3/2017	**0.015**	J		<0.092	U		<0.067	U		<0.12	U		<0.15	U		<0.072	U		<0.3	U		<0.076	U	
		VMP-4-23.5-072517	7/25/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-4-23.5-072517-DUP	7/25/2017	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-4-23.5-110117	11/1/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-4-23.5-012318	1/23/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-4-23.5-041118	4/11/2018	<0.29	U		<0.15	U		<0.11	U		<0.2	U		<0.24	U		<0.11	U		<0.19	U		<0.12	U	
		VMP-4-23.5-041118-DUP	4/11/2018	<0.32	U		<0.16	U		<0.12	U		<0.22	U		<0.27	U		<0.13	U		<0.21	U		<0.13	U	
		VMP-4-23.5-072318	7/23/2018	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		**0.006**	J		<0.0066	U	
		VMP-4-23.5-072318-DUP	7/23/2018	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-4-23.5-102918	10/29/2018	**0.001**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-4-23.5-012119	1/21/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.0051	U		<0.021	U		<0.0054	U	
		VMP-4-23.5-043019	4/30/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		**0.002**	J		<0.0065	U	
		VMP-4-23.5-072519	7/25/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	ND,UJ	UJ
		VMP-4-23.5-102119	10/21/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-4-23.5-012320	1/23/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-4-23.5-042820	4/28/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0068	U	
		VMP-4-23.5-073020	7/30/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.00073**	J		<0.026	U		<0.0066	U	
		VMP-4-23.5-103020	10/30/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-4-23.5-012821	1/28/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-4-23.5-021015	2/10/2015	**86**			<1.1	U		<0.88	U		<0.88	U		<0.88	U		<0.72	U		<0.59	U		<0.59	U	
		VMP-4-23.5-050815	5/8/2015	**54**			<1.1	U		<0.83	U		<0.83	U		<0.83	U		<0.68	U		<0.56	U		<0.56	U	
		VMP-4-23.5-061515-R	6/15/2015	**92**	E	J	<0.11	U		<0.09	U		<0.09	U		<0.09	U		<0.074	U		<0.06	U		<0.06	U	
		VMP-4-23.5-073015	7/30/2015	**49**			<0.43	U		<0.33	U		<0.33	U		<0.33	U		<0.27	U		<0.22	U		<0.22	U	
		VMP-4-23.5-110215	11/2/2015	**33**			<0.21	U		<0.16	U		<0.16	U		<0.16	U		<0.14	U		<0.11	U		<0.11	U	
		VMP-4-23.5-020316	2/3/2016	**45**			<1.8	U		<1.4	U		<1.4	U		<1.4	U		<1.2	U		<0.96	U		<0.96	U	
		VMP-4-23.5-020316-DUP	2/3/2016	**38**			<1.8	U		<1.4	U		<1.4	U		<1.4	U		<1.1	U		<0.92	U		<0.92	U	
		VMP-4-23.5-050316	5/3/2016	**28**		J	<0.14	U		<0.11	U		<0.11	U		<0.11	U		<0.09	U		<0.074	U		<0.074	U	
		VMP-4-23.5-080216	8/2/2016	**18**			<0.52	U		<0.4	U		<0.4	U		<0.4	U		<0.33	U		<0.27	U		<0.27	U	
		VMP-4-23.5-080216-DUP	8/2/2016	**19**			<0.53	U		<0.41	U		<0.41	U		<0.41	U		<0.34	U		<0.28	U		**0.13**	J	
		VMP-4-23.5-092316-DUP-R	9/23/2016	**25**		J	<0.11	U		<0.089	U		<0.089	U		<0.089	U		<0.073	U		<0.06	U		<0.06	U	
		VMP-4-23.5-092316-R	9/23/2016	**27**		J	<0.12	U		<0.096	U		<0.096	U		<0.096	U		<0.079	U		<0.065	U		<0.065	U	
		VMP-4-23.5-102816	10/28/2016	**13**			<0.11	U		<0.085	U		<0.085	U		<0.085	U		<0.07	U		<0.057	U		<0.057	U	
		VMP-4-23.5-012417	1/24/2017	<0.099	U		<0.22	U		<0.17	U		<0.17	U		<0.17	U		<0.14	U		<0.12	U		<0.12	U	
		VMP-4-23.5-050317	5/3/2017	**0.012**	J		<0.11	U		<0.087	U		<0.087	U		<0.087	U		<0.071	U		<0.058	U		<0.058	U	
		VMP-4-23.5-050317-DUP	5/3/2017	**0.014**	J		<0.11	U		<0.088	U		<0.088	U		<0.088	U		<0.072	U		<0.059	U		<0.059	U	
		VMP-4-23.5-072517	7/25/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-4-23.5-072517-DUP	7/25/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-4-23.5-110117	11/1/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-4-23.5-012318	1/23/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-4-23.5-041118	4/11/2018	**3.5**			<0.18	U		<0.14	U		<0.14	U		<0.14	U		<0.12	U		<0.094	U		<0.094	U	
		VMP-4-23.5-041118-DUP	4/11/2018	**4.2**			<0.2	U		<0.16	U		<0.16	U		<0.16	U		<0.13	U		<0.1	U		<0.1	U	
		VMP-4-23.5-072318	7/23/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-4-23.5-072318-DUP	7/23/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-4-23.5-102918	10/29/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-4-23.5-012119	1/21/2019	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0024**	J		<0.0042	U		<0.0042	U	
		VMP-4-23.5-043019	4/30/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-4-23.5-072519	7/25/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-4-23.5-102119	10/21/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-4-23.5-012320	1/23/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-4-23.5-042820	4/28/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-4-23.5-073020	7/30/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-4-23.5-103020	10/30/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-4-23.5-012821	1/28/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-4-23.5-021015	2/10/2015	<0.58	U		<0.58	U		<0.58	U		<5.1	U		<0.68	U		<0.66	U		<0.66	U		<2.1	U	
		VMP-4-23.5-050815	5/8/2015	<0.55	U		<0.55	U		<0.55	U		<4.8	U		<0.64	U		<0.63	U		<0.63	U		<2	U	
		VMP-4-23.5-061515-R	6/15/2015	<0.059	U		<0.059	U		<0.059	U		<0.052	U		<0.069	U		<0.068	U		<0.068	U		<0.21	U	
		VMP-4-23.5-073015	7/30/2015	<0.22	U		<0.22	U		<0.22	U		<0.19	U		<0.26	U		<0.25	U		<0.25	U		<0.8	U	
		VMP-4-23.5-110215	11/2/2015	<0.11	U		<0.11	U		<0.11	U		<0.096	U		<0.13	U		<0.12	U		<0.12	U		<0.4	U	
		VMP-4-23.5-020316	2/3/2016	<0.94	U		<0.94	U		<0.94	U	UJ	<0.82	U		<1.1	U		<1.1	U		<1.1	U		<3.4	U	
		VMP-4-23.5-020316-DUP	2/3/2016	<0.9	U		<0.9	U		<0.9	U	UJ	<0.79	U		<1	U		<1	U		<1	U		<3.3	U	
		VMP-4-23.5-050316	5/3/2016	<0.072	U		<0.072	U		<0.072	U		<0.063	U		<0.084	U		<0.083	U		<0.083	U		<0.26	U	
		VMP-4-23.5-080216	8/2/2016	<0.27	U		<0.27	U		<0.27	U		**0.47**	J		<0.31	U		<0.31	U		<0.31	U		<0.97	U	
		VMP-4-23.5-080216-DUP	8/2/2016	<0.27	U		<0.27	U		<0.27	U		**0.6**	J		<0.32	U		<0.31	U		<0.31	U		<0.99	U	
		VMP-4-23.5-092316-DUP-R	9/23/2016	<0.059	U		<0.059	U		<0.059	U		<0.21	U		<0.069	U		<0.067	U		<0.067	U		<0.21	U	
		VMP-4-23.5-092316-R	9/23/2016	<0.063	U		<0.063	U		<0.063	U		<0.22	U		<0.074	U		<0.073	U		<0.073	U		<0.23	U	
		VMP-4-23.5-102816	10/28/2016	<0.056	U		<0.056	U		<0.056	U		<0.2	U		<0.065	U		<0.064	U		<0.064	U		<0.2	U	
		VMP-4-23.5-012417	1/24/2017	<0.11	U		<0.11	U		<0.11	U		<1	U		<0.13	U		<0.13	U		<0.13	U		<0.41	U	
		VMP-4-23.5-050317	5/3/2017	<0.057	U		<0.057	U		<0.057	U		<0.5	U		<0.067	U		<0.066	U		<0.066	U		<0.21	U	
		VMP-4-23.5-050317-DUP	5/3/2017	<0.058	U		<0.058	U		<0.058	U		<0.51	U		<0.068	U		<0.066	U		<0.066	U		<0.21	U	
		VMP-4-23.5-072517	7/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0024**	J		<0.0056	ND,UJ	UJ	<0.0055	U		<0.0055	U		<0.018	U	
		VMP-4-23.5-072517-DUP	7/25/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	ND,UJ	UJ	<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-23.5-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-4-23.5-012318	1/23/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-23.5-041118	4/11/2018	<0.092	U		<0.092	U		<0.092	U		<0.32	U		<0.11	U		<0.1	U		<0.1	U		<0.34	U	
		VMP-4-23.5-041118-DUP	4/11/2018	<0.1	U		<0.1	U		<0.1	U		<0.36	U		<0.12	U		<0.12	U		<0.12	U		<0.37	U	
		VMP-4-23.5-072318	7/23/2018	<0.005	U		<0.005	U		<0.005	U		**0.0027**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-23.5-072318-DUP	7/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-4-23.5-102918	10/29/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-4-23.5-012119	1/21/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-4-23.5-043019	4/30/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-4-23.5-072519	7/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-4-23.5-102119	10/21/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-4-23.5-012320	1/23/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-4-23.5-042820	4/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-4-23.5-073020	7/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		**0.0014**	J	
		VMP-4-23.5-103020	10/30/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-4-23.5-012821	1/28/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-4-23.5-021015	2/10/2015	<1.1	U		**0.33**	J		4.8			<1.1	U		<1	U		**30**			<6.2	U		**140**		
		VMP-4-23.5-050815	5/8/2015	17			**3.5**			13			<1.1	U		<0.97	U		**27**			<5.9	U		**100**		
		VMP-4-23.5-061515-R	6/15/2015	<0.11	U		**2.5**		J	20		J	<0.11	U		<0.1	U		**44**		J	<0.64	U		**170**	E	J
		VMP-4-23.5-073015	7/30/2015	<0.42	U		**0.86**			6			<0.42	U		<0.39	U		**18**			<2.4	U		**82**		
		VMP-4-23.5-110215	11/2/2015	<0.21	U		**0.3**			1.7			<0.21	U		<0.19	U		**7.5**			<1.2	U		**52**		
		VMP-4-23.5-020316	2/3/2016	<1.8	U		<1	U		0.15	J		<1.8	U		<1.6	U		**5.4**			<10	U		**61**		
		VMP-4-23.5-020316-DUP	2/3/2016	<1.7	U		<0.99	U		<1.1	U		<1.7	U		<1.6	U		**4.3**			<9.7	U		**51**		
		VMP-4-23.5-050316	5/3/2016	<0.14	U		**0.018**	J	J	0.11		J	<0.14	U		<0.13	U		**6.5**		J	<0.78	U		**48**		J
		VMP-4-23.5-080216	8/2/2016	0.92			<0.29	U		<0.33	U		<0.52	U		<0.47	U		**0.89**			<2.9	U		**14**		
		VMP-4-23.5-080216-DUP	8/2/2016	1.2			<0.3	U		<0.34	U		<0.53	U		<0.48	U		**0.94**			<2.9	U		**16**		
		VMP-4-23.5-092316-DUP-R	9/23/2016	<0.11	U		**0.012**	J	J	0.036	J	J	<0.11	U		<0.1	U		<0.061	U		<0.63	U		**14**		J
		VMP-4-23.5-092316-R	9/23/2016	<0.12	U		<0.069	U		0.034	J	J	<0.12	U		<0.11	U		<0.066	U		<0.68	U		**14**		J
		VMP-4-23.5-102816	10/28/2016	0.03	J		**0.14**			0.02	J		<0.11	U		<0.098	U		<0.058	U		<0.6	U		**3.6**		
		VMP-4-23.5-012417	1/24/2017	<0.22	U		<0.12	U		<0.14	U		<0.22	U		<0.2	U		<0.12	U		<1.2	U		<0.1	U	
		VMP-4-23.5-050317	5/3/2017	<0.11	U		<0.063	U		<0.071	U		<0.11	U		<0.1	U		<0.059	U		<0.62	U		<0.051	U	
		VMP-4-23.5-050317-DUP	5/3/2017	0.041	J		<0.064	U		<0.072	U		<0.11	U		<0.1	U		<0.06	U		<0.62	U		<0.052	U	
		VMP-4-23.5-072517	7/25/2017	<0.0092	U		<0.0053	U		<0.006	U		**0.0027**	J		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-23.5-072517-DUP	7/25/2017	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-4-23.5-110117	11/1/2017	0.024			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-4-23.5-012318	1/23/2018	<0.0095	J	U	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-4-23.5-041118	4/11/2018	<0.18	U		<0.1	U		<0.11	U		<0.18	U		<0.16	U		**0.57**			<0.99	U		**14**		
		VMP-4-23.5-041118-DUP	4/11/2018	<0.2	U		<0.11	U		<0.13	U		<0.2	U		<0.18	U		**0.67**			<1.1	U		**16**		
		VMP-4-23.5-072318	7/23/2018	0.01			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		**0.0019**	J	
		VMP-4-23.5-072318-DUP	7/23/2018	0.0062	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.00089**	J	
		VMP-4-23.5-102918	10/29/2018	0.0041	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-4-23.5-012119	1/21/2019	<0.0078	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-4-23.5-043019	4/30/2019	0.018			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-4-23.5-072519	7/25/2019	0.0084	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		**0.0066**		
		VMP-4-23.5-102119	10/21/2019	0.0048	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-4-23.5-012320	1/23/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-4-23.5-042820	4/28/2020	0.021	J0	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-4-23.5-073020	7/30/2020	0.0082	J		**0.0014**	J		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-4-23.5-103020	10/30/2020	0.0069	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-4-23.5-103020-DUP	10/30/2020	0.014			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.00082**	J	
		VMP-4-23.5-012821	1/28/2021	0.005	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-4-23.5-021015	2/10/2015	<2.4	U		100			<0.72	U		<0.6	U		<0.53	U					**0.5**	J		**0.12**	J	
		VMP-4-23.5-050815	5/8/2015	<2.3	U		99			<0.68	U		<0.57	U		<0.5	U					**0.28**	J		<0.68	U	
		VMP-4-23.5-061515-R	6/15/2015	<0.24	U		130	E	J	<0.073	U		<0.061	U		**0.026**	J	J				<0.15	U		<0.073	U	
		VMP-4-23.5-073015	7/30/2015	<0.91	U		66			<0.27	U		<0.23	U		<0.2	U					<0.54	U		<0.27	U	
		VMP-4-23.5-110215	11/2/2015	<0.45	U		54			<0.14	U		<0.11	U		<0.099	ND,UJ	UJ				<0.27	U		<0.14	U	
		VMP-4-23.5-020316	2/3/2016	<3.9	U		42			<1.2	U		<0.97	U		<0.85	U					<2.3	U		<1.2	U	
		VMP-4-23.5-020316-DUP	2/3/2016	<3.7	U		36			<1.1	U		<0.93	U		<0.82	U					<2.2	U		<1.1	U	
		VMP-4-23.5-050316	5/3/2016	<0.3	U		31		J	<0.09	U		<0.075	U		<0.066	U					<0.18	U		<0.09	U	
		VMP-4-23.5-080216	8/2/2016	<1.1	U		82			<0.33	U		**0.96**			<0.97	U					**0.23**	J		<0.33	U	
		VMP-4-23.5-080216-DUP	8/2/2016	<1.1	U		81			<0.34	U		**0.97**			<1	U					**0.24**	J		<0.34	U	
		VMP-4-23.5-092316-DUP-R	9/23/2016	<0.24	U		54		J	**0.014**	J	J	<0.061	U		<0.054	U					**0.039**	J	J	<0.073	U	
		VMP-4-23.5-092316-R	9/23/2016	<0.26	U		56		J	<0.079	U		<0.066	U		<0.058	U					**0.048**	J	J	<0.079	U	
		VMP-4-23.5-102816	10/28/2016	<0.23	U		46			**0.022**	J		<0.058	U		<0.051	U		<0.3	U		<0.14	U		<0.069	U	
		VMP-4-23.5-012417	1/24/2017	<0.47	U		9.8			<0.14	U		<0.12	U		<0.41	U					**0.093**	J		<0.14	U	
		VMP-4-23.5-050317	5/3/2017	<0.24	U		10			<0.071	U		<0.059	U		<0.21	U					<0.14	U		<0.071	U	
		VMP-4-23.5-050317-DUP	5/3/2017	<0.24	U		10			<0.072	U		<0.06	U		<0.21	U					<0.14	U		<0.072	U	
		VMP-4-23.5-072517	7/25/2017	<0.02	U		0.0079	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
	23.5 ft	VMP-4-23.5-072517-DUP	7/25/2017	<0.021	U		0.007	J		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U		<0.0063	J	U
		VMP-4-23.5-110117	11/1/2017	<0.018	U		0.0045	J		<0.0054	U		<0.0045	U		<0.016	U					**0.02**			<0.0054	U	
		VMP-4-23.5-012318	1/23/2018	<0.021	U		0.0066	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0051**	J		<0.0062	U	
		VMP-4-23.5-041118	4/11/2018	<0.38	U		110			<0.11	U		<0.095	U		<0.084	U					<0.23	U		<0.11	U	
		VMP-4-23.5-041118-DUP	4/11/2018	<0.43	U		130			<0.13	U		<0.11	U		<0.094	U					<0.26	U		<0.13	U	
		VMP-4-23.5-072318	7/23/2018	<0.021	U		0.14			<0.0062	U		<0.0052	U		<0.018	U					**0.0038**	J		<0.0062	U	
		VMP-4-23.5-072318-DUP	7/23/2018	<0.02	U		0.17			<0.006	U		<0.005	U		<0.018	U					**0.005**	J		<0.006	U	
		VMP-4-23.5-102918	10/29/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-4-23.5-012119	1/21/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-4-23.5-043019	4/30/2019	<0.021	U		0.007	J		**0.0022**	J		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-4-23.5-072519	7/25/2019	<0.021	U		0.015			**0.006**	J		<0.0052	U		<0.018	U					**0.0073**	J		<0.0062	U	
		VMP-4-23.5-102119	10/21/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-4-23.5-012320	1/23/2020	<0.022	U		0.0072	J		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-4-23.5-042820	4/28/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0037**	J		<0.0065	U	
		VMP-4-23.5-073020	7/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0075**	J		**0.00055**	J	
		VMP-4-23.5-103020	10/30/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0069**	J		<0.0059	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.02	U		0.0051	J		<0.006	U		<0.005	U		<0.018	U					**0.011**	J		<0.006	U	
		VMP-4-23.5-012821	1/28/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.023**			<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-4-23.5-021015	2/10/2015	**0.2**	J		<1	U		<0.99	U		<0.43	U		**1.1**			<4.3	U		<0.8	U		<0.8	U	
		VMP-4-23.5-050815	5/8/2015	<0.59	U		<0.95	U					<0.41	U		**15**			<4.1	U		<0.76	U		<0.76	U	
		VMP-4-23.5-061515-R	6/15/2015	<0.063	U		<0.1	U		<0.1	U		<0.044	U		**1.2**		J	<0.44	U		<0.081	U		<0.081	U	
		VMP-4-23.5-073015	7/30/2015	<0.24	U		<0.38	U		<0.38	U		<0.16	U		**0.12**	J		<1.6	U		<0.3	U		<0.3	U	
		VMP-4-23.5-110215	11/2/2015	<0.12	U		<0.19	U		<0.19	U		<0.081	U		**0.062**	J		<0.82	U	UJ	<0.15	U		<0.15	U	
		VMP-4-23.5-020316	2/3/2016	<1	U		<1.6	U		<1.6	U		<0.7	U		<0.89	U		<7	U		<1.3	U		<1.3	U	
		VMP-4-23.5-020316-DUP	2/3/2016	<0.97	U		<1.6	U		<1.5	U		<0.67	U		<0.86	U		<6.8	U		<1.2	U		<1.2	U	
		VMP-4-23.5-050316	5/3/2016	<0.078	U		<0.12	U		<0.12	U		<0.054	U		<0.069	U		<0.54	U		<0.1	U		<0.1	U	
		VMP-4-23.5-080216	8/2/2016	**0.071**	J		<0.46	U		<0.46	U		<0.2	U		**0.54**			<2	U		<0.37	U		<0.37	U	
		VMP-4-23.5-080216-DUP	8/2/2016	**0.064**	J		<0.47	U		<0.47	U		<0.2	U		**0.6**			<2	U		<0.38	U		<0.38	U	
		VMP-4-23.5-092316-DUP-R	9/23/2016	<0.063	U		<0.1	U		<0.1	U		<0.044	U		<0.056	U		<0.44	U		<0.081	U		<0.081	U	
		VMP-4-23.5-092316-R	9/23/2016	<0.068	U		<0.11	U		<0.11	U		<0.047	U		<0.06	U		<0.47	U		<0.087	U		<0.087	U	
		VMP-4-23.5-102816	10/28/2016	<0.06	U		<0.097	U		<0.096	U		<0.042	U		**0.038**	J		<0.42	U		<0.077	U		<0.077	U	
		VMP-4-23.5-012417	1/24/2017	<0.12	U		<0.2	U		<0.19	U		<0.085	U		<0.11	U		<0.85	U		<0.16	U		<0.16	U	
		VMP-4-23.5-050317	5/3/2017	<0.062	U		<0.099	U		<0.098	U		<0.043	U		<0.054	U		<0.43	U		<0.079	U		<0.079	U	
		VMP-4-23.5-050317-DUP	5/3/2017	<0.062	U		<0.1	U		<0.099	U		<0.043	U		<0.055	U		<0.43	U		<0.08	U		<0.08	U	
		VMP-4-23.5-072517	7/25/2017	<0.0052	U		<0.0083	ND,UJ	UJ	<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	23.5 ft	VMP-4-23.5-072517-DUP	7/25/2017	<0.0055	U		<0.0088	ND,UJ	UJ	<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-23.5-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0016**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-4-23.5-012318	1/23/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0039**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-4-23.5-041118	4/11/2018	<0.099	U		<0.16	U		<0.16	U		<0.069	U		<0.088	U		<0.69	U		<0.13	U		<0.13	U	
		VMP-4-23.5-041118-DUP	4/11/2018	<0.11	U		<0.18	U		<0.18	U		<0.077	U		<0.098	U		<0.77	U		<0.14	U		<0.14	U	
		VMP-4-23.5-072318	7/23/2018	<0.0054	U		**0.0033**	J		<0.0086	U		<0.0037	U		**0.0024**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-4-23.5-072318-DUP	7/23/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-4-23.5-102918	10/29/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-4-23.5-012119	1/21/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-4-23.5-043019	4/30/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0008**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-4-23.5-072519	7/25/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.001**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-4-23.5-102119	10/21/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-4-23.5-012320	1/23/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-4-23.5-042820	4/28/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0014**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-4-23.5-073020	7/30/2020	<0.0087	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-4-23.5-103020	10/30/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-4-23.5-012821	1/28/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	23.5 ft	VMP-4-23.5-021015	2/10/2015	<0.79	U		<0.82	U		**0.78**			**9.6**			120			<0.37	U		2.1			**0.19**	J	
		VMP-4-23.5-050815	5/8/2015	<0.74	U		<0.78	U		**6.2**			**11**			140			<0.35	U		37			**9**		
		VMP-4-23.5-061515-R	6/15/2015	<0.08	U		<0.084	U		**6.8**		J	**22**		J	170	E	J	<0.038	U		32		J	**2.9**		J
		VMP-4-23.5-073015	7/30/2015	<0.3	U		<0.31	U		**0.5**			**9.9**			100			<0.14	U		6.9			**0.32**		
		VMP-4-23.5-110215	11/2/2015	<0.15	U		<0.15	U		<0.14	U		**5.2**			99			<0.07	U		1.4			**0.071**	J	
		VMP-4-23.5-020316	2/3/2016	<1.3	U		<1.3	U		<1.2	U		**1.8**			140			<0.6	ND,UJ	UJ	<1	U		<1	U	
		VMP-4-23.5-020316-DUP	2/3/2016	<1.2	U		<1.3	U		<1.1	U		**1.4**			120			<0.58	ND,UJ	UJ	<0.99	U		<0.99	U	
		VMP-4-23.5-050316	5/3/2016	<0.098	U		<0.1	U		<0.09	U		**0.78**		J	70		J	<0.047	U		0.047	J	J	<0.079	U	
		VMP-4-23.5-080216	8/2/2016	<0.36	U		<0.38	U		**0.14**	J		**0.46**			74			<0.17	U		0.24	J		**0.051**	J	
		VMP-4-23.5-080216-DUP	8/2/2016	<0.37	U		<0.39	U		**0.13**	J		**0.52**			82			<0.18	U		0.27	J		**0.053**	J	
		VMP-4-23.5-092316-DUP-R	9/23/2016	<0.08	U		<0.083	U		<0.073	U		**1.8**		J	100	E	J	<0.038	U		0.099		J	<0.064	U	
		VMP-4-23.5-092316-R	9/23/2016	<0.086	U		<0.09	U		<0.079	U		**1.8**		J	110	E	J	<0.041	U		0.094		J	<0.069	U	
		VMP-4-23.5-102816	10/28/2016	<0.076	U		<0.079	U		**0.015**	J		**1.1**			75			<0.036	U		0.53			**0.12**		
		VMP-4-23.5-012417	1/24/2017	<0.15	U		<0.16	U		<0.14	U		<0.14	U		15			<0.073	U		<0.12	U		<0.12	U	
		VMP-4-23.5-050317	5/3/2017	<0.078	U		<0.081	U		<0.071	U		<0.071	U		17			<0.037	U		<0.063	U		<0.063	U	
		VMP-4-23.5-050317-DUP	5/3/2017	<0.079	U		<0.082	U		<0.072	U		<0.072	U		17			<0.037	U		<0.064	U		<0.064	U	
		VMP-4-23.5-072517	7/25/2017	<0.0065	U		0.0013	J		<0.006	J	U	<0.006	U		0.3			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-23.5-072517-DUP	7/25/2017	<0.0069	U		0.0018	J		<0.0063	U		<0.0063	U		0.3			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-4-23.5-110117	11/1/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0051			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-4-23.5-012318	1/23/2018	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		0.036			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-23.5-041118	4/11/2018	<0.12	U		<0.13	U		<0.11	U		<0.11	U		19			<0.06	U		<0.1	U		<0.1	U	
		VMP-4-23.5-041118-DUP	4/11/2018	<0.14	U		<0.15	U		<0.13	U		<0.13	U		23			<0.066	U		<0.11	U		<0.11	U	
		VMP-4-23.5-072318	7/23/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.52			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-23.5-072318-DUP	7/23/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.53			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-23.5-102918	10/29/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0093			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-4-23.5-012119	1/21/2019	<0.0056	U		<0.0058	U		<0.0051	U		<0.0051	U		0.0048			<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-4-23.5-043019	4/30/2019	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0012	J		<0.0055	U	
		VMP-4-23.5-072519	7/25/2019	<0.0068	U		0.0011	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0029	J		**0.0019**	J	
		VMP-4-23.5-102119	10/21/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-4-23.5-012320	1/23/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.082			<0.0034	U		0.002	J		<0.0058	U	
		VMP-4-23.5-042820	4/28/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-4-23.5-073020	7/30/2020	<0.0068	U		0.0011	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-4-23.5-103020	10/30/2020	<0.0065	U		0.0047	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-4-23.5-103020-DUP	10/30/2020	<0.0066	U		0.0047	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-4-23.5-012821	1/28/2021	<0.0064	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	**0.0035**	J		<0.0042	U		**0.0091**			<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-5-5-042915	4/29/2015	**0.044**			**0.0047**			<0.0089	J	U	<0.014	U		<0.051	U		<0.0029	U		0.01	J		**0.023**		
		VMP-5-5-072915	7/29/2015	**0.028**	J		<0.0056	J	U	**0.014**			<0.018	U		<0.068	U		<0.0039	U		<0.016	U		**0.0057**	J	
		VMP-5-5-102915	10/29/2015	<0.032	J	U	<0.0043	U		**0.0058**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.003**	J	
		VMP-5-5-012516	1/25/2016	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0055	J		**0.0031**	J	
		VMP-5-5-042816	4/28/2016	**0.018**	J		**0.0051**			<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0039**	J	
		VMP-5-5-072816	7/28/2016	**0.012**	J		<0.0046	U		**0.0023**	J		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0027**	J	
		VMP-5-5-102516	10/25/2016	**0.019**	J		**0.0012**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.005**	J	
		VMP-5-5-012617	1/26/2017	**0.0068**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-5-5-042617	4/26/2017	<0.08	J	U	<0.011	U		<0.022	U		<0.035	U		<0.13	U		<0.0074	U		<0.032	U		<0.04	U	
		VMP-5-5-072017	7/20/2017	**0.059**			**0.00075**	J		**0.0018**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.004**	J	
		VMP-5-5-103017	10/30/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-5-012518	1/25/2018	**0.012**	J		<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0036**	J	
		VMP-5-5-041618	4/16/2018	**0.0053**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-5-5-071818	7/18/2018	**0.031**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0038**	J	
		VMP-5-5-101918	10/19/2018	**0.011**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-5-012219	1/22/2019	**0.013**	J		**0.0021**	J		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-5-5-050119	5/1/2019	**0.07**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-5-5-072419	7/24/2019	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-5-5-072419-DUP	7/24/2019	**0.022**	J		<0.0038	U		**0.001**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0057**	J	
		VMP-5-5-102119	10/21/2019	**0.014**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-5-5-012820	1/28/2020	<0.027	U		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-5-042720	4/27/2020	**0.0066**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-5-5-072320	7/23/2020	**0.021**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0024**	J	
		VMP-5-5-103020	10/30/2020	**0.021**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0062**	J	
		VMP-5-5-012221	1/22/2021	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	**0.011**	J		<0.004	U		**0.0086**			<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0024**	J	
		VMP-5-12.5-042915	4/29/2015	**0.042**			<0.0046	J	U	**0.01**			<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0094**	J	
		VMP-5-12.5-072915	7/29/2015	**0.051**			**0.021**			**0.021**			<0.016	U		<0.061	U		<0.0035	U		0.0055	J		**0.012**	J	
		VMP-5-12.5-102915	10/29/2015	**0.023**	J		<0.0046	U		**0.013**			<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0079**	J	
		VMP-5-12.5-012516	1/25/2016	**0.014**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0021	J		**0.0029**	J	
		VMP-5-12.5-042816	4/28/2016	**0.016**	J		**0.0018**	J		**0.0036**	J		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0046**	J	
		VMP-5-12.5-072816	7/28/2016	**0.02**	J		<0.0047	U		**0.0069**	J		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-5-12.5-102516	10/25/2016	**0.02**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0045**	J	
		VMP-5-12.5-012617	1/26/2017	**0.0073**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-5-12.5-042617	4/26/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0046**	J	
		VMP-5-12.5-072017	7/20/2017	**0.017**	J		**0.00049**	J		**0.0094**			<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0032**	J	
		VMP-5-12.5-102017	10/30/2017	<0.025	J	U	<0.0034	J	U	**0.0036**	J		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		**0.0035**	J	
		VMP-5-12.5-012518	1/25/2018	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-12.5-041618	4/16/2018	**0.011**	J		**0.00062**	J		**0.0011**	J		<0.012	U		<0.044	U		<0.0025	U		0.0089	J		**0.0024**	J	
		VMP-5-12.5-071818	7/18/2018	**0.025**	J		**0.0012**	J		**0.0034**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-5-12.5-101918	10/19/2018	**0.018**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0041**	J	
		VMP-5-12.5-012219	1/22/2019	**0.0085**	J		<0.0036	U		**0.0081**			<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-12.5-050119	5/1/2019	**0.022**	J		<0.004	U		**0.012**			<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.004**	J	
		VMP-5-12.5-072419	7/24/2019	**0.008**	J		<0.004	U		**0.012**			<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-5-12.5-102119	10/21/2019	**0.013**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-12.5-012820	1/28/2020	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-5-12.5-042720	4/27/2020	**0.017**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0047**	J	
		VMP-5-12.5-072320	7/23/2020	**0.014**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0015**	J	
		VMP-5-12.5-103020	10/30/2020	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-5-12.5-012221	1/22/2021	**0.015**	J		**0.00042**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0027**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.057**			<0.027	U		<0.0068	U	
		VMP-5-5-042915	4/29/2015	**0.0033**	J		<0.0083	J	U	<0.0061	U		0.0032	J		<0.014	U		**0.007**			<0.027	U		<0.0068	U	
		VMP-5-5-072915	7/29/2015	**0.0043**	J		**0.0028**	J		<0.008	U		<0.015	U		<0.018	U		**0.031**			**0.0083**	J		<0.009	U	
		VMP-5-5-102915	10/29/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.021**			<0.028	U		<0.007	U	
		VMP-5-5-012516	1/25/2016	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-5-5-042816	4/28/2016	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		**0.0038**	J		<0.029	U		<0.0073	U	
		VMP-5-5-072816	7/28/2016	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0058**	J		<0.03	U		<0.0074	U	
		VMP-5-5-102516	10/25/2016	**0.0032**	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-5-5-012617	1/26/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-5-5-042617	4/26/2017	<0.042	U		<0.021	U		<0.015	U		<0.028	U		<0.035	U		<0.016	U		<0.069	U		<0.017	U	
		VMP-5-5-072017	7/20/2017	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0052**	J		<0.024	U		<0.006	U	
		VMP-5-5-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0017**	J		<0.023	U		<0.0058	U	
		VMP-5-5-012518	1/25/2018	**0.01**	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-5-5-041618	4/16/2018	<0.013	J	U	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.002**	J		<0.022	U		<0.0055	U	
		VMP-5-5-071818	7/18/2018	**0.0019**	J		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0033**	J		<0.027	U		<0.0068	U	
		VMP-5-5-101918	10/19/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0038**	J		<0.023	U		<0.0058	U	
		VMP-5-5-012219	1/22/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		**0.0017**	J		<0.021	U		<0.0054	U	
		VMP-5-5-050119	5/1/2019	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0027**	J		<0.027	U		<0.0068	U	
		VMP-5-5-072419	7/24/2019	<0.015	U		**0.0025**	J		<0.0056	U		<0.01	U		<0.013	U		**0.0046**	J		<0.025	U		<0.0063	ND,UJ	UJ
		VMP-5-5-072419-DUP	7/24/2019	<0.015	U		**0.0023**	J		<0.0055	U		<0.01	U		<0.012	U		**0.0055**	J		<0.024	U		<0.0062	ND,UJ	UJ
		VMP-5-5-102119	10/21/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-5-5-012820	1/28/2020	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-5-5-042720	4/27/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-5-5-072320	7/23/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-5-5-103020	10/30/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-5-5-012221	1/22/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.058**			<0.026	U		<0.0064	U	
		VMP-5-12.5-042915	4/29/2015	<0.018	J	U	<0.009	U		<0.0066	U		0.0047	J		<0.015	U		**0.022**			<0.03	U		**0.0016**	J	
		VMP-5-12.5-072915	7/29/2015	<0.02	J	U	<0.0099	U		<0.0072	U		0.0034	J		<0.017	U		**0.036**			<0.032	U		<0.0082	U	
		VMP-5-12.5-102915	10/29/2015	<0.018	J	U	<0.0091	U		<0.0066	U		0.0026	J		<0.015	U		**0.024**			<0.03	U		<0.0075	U	
		VMP-5-12.5-012516	1/25/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-5-12.5-042816	4/28/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.005**	J		<0.028	U		<0.0071	U	
		VMP-5-12.5-072816	7/28/2016	**0.0046**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.012**			<0.03	U		<0.0077	U	
		VMP-5-12.5-102516	10/25/2016	<0.016	U		<0.0079	U		**0.00078**	J		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-5-12.5-012617	1/26/2017	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		**0.0012**	J		<0.023	U		<0.0057	U	
		VMP-5-12.5-042617	4/26/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0016**	J		<0.024	U		<0.0062	U	
		VMP-5-12.5-072017	7/20/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.018**			<0.026	U		<0.0065	U	
		VMP-5-12.5-102017	10/30/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		**0.0087**			<0.022	U		<0.0055	U	
		VMP-5-12.5-012518	1/25/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0013**	J		<0.023	U		<0.0058	U	
		VMP-5-12.5-041618	4/16/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0051**	J		<0.024	U		<0.0059	U	
		VMP-5-12.5-071818	7/18/2018	**0.0014**	J		**0.0044**	J		<0.0057	U		<0.01	U		<0.013	U		**0.017**			<0.026	U		<0.0064	U	
		VMP-5-12.5-101918	10/19/2018	<0.014	U		**0.00076**	J		<0.0051	U		<0.0094	U		<0.012	U		**0.0044**	J		<0.023	U		<0.0057	U	
		VMP-5-12.5-012219	1/22/2019	<0.014	U		<0.007	U		<0.0052	U		0.0018	J		<0.012	U		**0.025**			<0.023	U		<0.0058	U	
		VMP-5-12.5-050119	5/1/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.022**			<0.026	U		<0.0065	U	
		VMP-5-12.5-072419	7/24/2019	<0.016	U		**0.0066**	J		<0.0058	U		<0.011	U		<0.013	U		**0.066**			<0.026	U		<0.0065	ND,UJ	UJ
		VMP-5-12.5-102119	10/21/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0067**			<0.023	U		<0.0058	U	
		VMP-5-12.5-012820	1/28/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0028**	J		<0.027	U		<0.0068	U	
		VMP-5-12.5-042720	4/27/2020	**0.0043**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-5-12.5-072320	7/23/2020	**0.0019**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-5-12.5-103020	10/30/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.003**	J		<0.025	U		<0.0064	U	
		VMP-5-12.5-012221	1/22/2021	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.00069**	J		<0.03	U		<0.0075	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-5-5-042915	4/29/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0023**	J		<0.0054	U		<0.0054	J	U
		VMP-5-5-072915	7/29/2015	<0.006	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.003**	J		<0.0071	U		<0.0071	U	
		VMP-5-5-102915	10/29/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0033**	J		<0.0054	U		<0.0054	U	
		VMP-5-5-012516	1/25/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-5-5-042816	4/28/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0019**	J		<0.0057	U		<0.0057	U	
		VMP-5-5-072816	7/28/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-5-5-102516	10/25/2016	**0.0019**	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0029**	J		<0.0056	U		<0.0056	U	
		VMP-5-5-012617	1/26/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-5-5-042617	4/26/2017	<0.012	U		<0.026	U		<0.02	U		<0.02	U		<0.02	U		**0.0037**	J		<0.014	U		<0.014	U	
		VMP-5-5-072017	7/20/2017	<0.004	U		<0.009	U		**0.00066**	J		0.00087	J		**0.00073**	J		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-5-5-103017	10/30/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-5-5-012518	1/25/2018	**0.0014**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-5-5-041618	4/16/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-5-5-071818	7/18/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-5-5-101918	10/19/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-5-5-012219	1/22/2019	**0.028**			<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0026**	J		<0.0042	U		**0.0015**	J	
		VMP-5-5-050119	5/1/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-5-5-072419	7/24/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0019**	J		<0.0049	U		<0.0049	U	
		VMP-5-5-072419-DUP	7/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-5-5-102119	10/21/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-5-5-012820	1/28/2020	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-5-5-042720	4/27/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-5-5-072320	7/23/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0018**	J		<0.0052	U		<0.0052	U	
		VMP-5-5-103020	10/30/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-5-5-012221	1/22/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.0051	U		<0.0051	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-5-12.5-042915	4/29/2015	<0.0049	U		<0.011	U		**0.0019**	J		0.002	J		**0.0024**	J		**0.0025**	J		<0.0058	U		<0.0058	J	U
		VMP-5-12.5-072915	7/29/2015	**0.0053**	J		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0034**	J		<0.0064	U		<0.0064	U	
		VMP-5-12.5-102915	10/29/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-5-12.5-012516	1/25/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-5-12.5-042816	4/28/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		**0.00086**	J		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-5-12.5-072816	7/28/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0029**	J		<0.006	U		<0.006	U	
		VMP-5-12.5-102516	10/25/2016	**0.0021**	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-5-12.5-012617	1/26/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-5-12.5-042617	4/26/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-5-12.5-072017	7/20/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-5-12.5-102017	10/30/2017	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0027**	J		<0.0043	U		<0.0043	U	
		VMP-5-12.5-012518	1/25/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-5-12.5-041618	4/16/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-5-12.5-071818	7/18/2018	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-5-12.5-101918	10/19/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0024**	J		<0.0045	U		<0.0045	U	
		VMP-5-12.5-012219	1/22/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-5-12.5-050119	5/1/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-5-12.5-072419	7/24/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0016**	J		<0.0051	U		<0.0051	U	
		VMP-5-12.5-102119	10/21/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		<0.0055	U		<0.0045	U		<0.0045	U	
		VMP-5-12.5-012820	1/28/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-5-12.5-042720	4/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-5-12.5-072320	7/23/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-5-12.5-103020	10/30/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-5-12.5-012221	1/22/2021	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0034**	J		<0.0058	U		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-5-042915	4/29/2015	<0.0052	U		<0.0052	J	U	<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-5-072915	7/29/2015	<0.0069	U		<0.0069	U		<0.0069	U		<0.061	U		<0.0081	U		<0.0079	U		<0.0079	U		<0.025	U	
		VMP-5-5-102915	10/29/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.0051**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-5-5-012516	1/25/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-5-5-042816	4/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-5-5-072816	7/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-5-5-102516	10/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-5-5-012617	1/26/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-5-5-042617	4/26/2017	<0.013	U		<0.013	U		<0.013	U		<0.12	U		<0.016	U		<0.015	U		<0.015	U		<0.048	U	
		VMP-5-5-072017	7/20/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0041**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-5-5-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-5-012518	1/25/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		**0.0017**	J		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-5-5-041618	4/16/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-5-5-071818	7/18/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-5-101918	10/19/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-5-012219	1/22/2019	<0.0041	U		<0.0041	U		<0.0041	U		**0.008**	J		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-5-5-050119	5/1/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-5-072419	7/24/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-5-5-072419-DUP	7/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-5-102119	10/21/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-5-5-012820	1/28/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-5-042720	4/27/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-5-072320	7/23/2020	<0.0051	U		0.0013	J		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		**0.0015**	J	
		VMP-5-5-103020	10/30/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-5-012221	1/22/2021	<0.005	U		<0.005	U		<0.005	U		**0.0034**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-12.5-042915	4/29/2015	<0.0057	U		<0.0057	J	U	<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-5-12.5-072915	7/29/2015	<0.0062	U		<0.0062	U		<0.0062	U		<0.055	U		<0.0073	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-5-12.5-102915	10/29/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0052**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-5-12.5-012516	1/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-5-12.5-042816	4/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-5-12.5-072816	7/28/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-5-12.5-102516	10/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-12.5-012617	1/26/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-5-12.5-042617	4/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-12.5-072017	7/20/2017	<0.005	U		<0.005	U		<0.005	U		**0.0024**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-12.5-102017	10/30/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-5-12.5-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-12.5-041618	4/16/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-5-12.5-071818	7/18/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-12.5-101918	10/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-5-12.5-012219	1/22/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-12.5-050119	5/1/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-12.5-072419	7/24/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-12.5-102119	10/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-12.5-012820	1/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-12.5-042720	4/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-5-12.5-072320	7/23/2020	<0.0049	U		<0.0049	U		<0.0049	U		**0.0037**	J		<0.0057	U		<0.0056	U		<0.0056	U		**0.0028**	J	
		VMP-5-12.5-103020	10/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-12.5-012221	1/22/2021	<0.0057	U		<0.0057	U		<0.0057	U		**0.022**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	0.0056	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-5-5-042915	4/29/2015	0.02			<0.0058	U		<0.0065	U		<0.01	J	U	<0.0093	U		<0.0054	U		<0.056	J	U	**0.0038**	J	
		VMP-5-5-072915	7/29/2015	0.014			<0.0076	U		<0.0086	U		<0.013	U		<0.012	U		<0.0072	U		<0.074	U		<0.0061	U	
		VMP-5-5-102915	10/29/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-5-5-012516	1/25/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-5-5-042816	4/28/2016	0.0064	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0013**	J	
		VMP-5-5-072816	7/28/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-5-5-102516	10/25/2016	<0.01	J	U	**0.0019**	J		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0014**	J	
		VMP-5-5-012617	1/26/2017	<0.0086	U		**0.00063**	J		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-5-5-042617	4/26/2017	0.014	J		<0.014	U		<0.016	U		<0.026	U		<0.023	U		<0.014	U		<0.14	U		<0.012	U	
		VMP-5-5-072017	7/20/2017	0.034			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0014**	J	
		VMP-5-5-103017	10/30/2017	<0.0085	J	U	<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-5-5-012518	1/25/2018	0.0069	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0018**	J		<0.046	U		<0.0038	U	
		VMP-5-5-041618	4/16/2018	0.0086			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-5-5-071818	7/18/2018	0.0054	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.001**	J	
		VMP-5-5-101918	10/19/2018	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0012**	J	
		VMP-5-5-012219	1/22/2019	<0.0078	U		**0.046**			<0.0051	U		<0.008	U		<0.0073	U		**0.006**			<0.044	U		<0.0037	U	
		VMP-5-5-050119	5/1/2019	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U	UJ	<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-5-5-072419	7/24/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-5-5-072419-DUP	7/24/2019	0.0042	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-5-5-102119	10/21/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-5-5-012820	1/28/2020	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-5-5-042720	4/27/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-5-5-072320	7/23/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-5-5-103020	10/30/2020	<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-5-5-012221	1/22/2021	0.0077	J		<0.0054	U		<0.0062	U		**0.00072**	J		<0.0088	U		**0.00058**	J		<0.054	U		<0.0044	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	0.005	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-12.5-042915	4/29/2015	0.0075	J		<0.0062	U		<0.007	U		<0.011	J	U	<0.01	U		**0.0026**	J		**0.057**	J		**0.0036**	J	
		VMP-5-12.5-072915	7/29/2015	0.027			<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		**0.0052**	J		<0.067	U		**0.0088**		
		VMP-5-12.5-102915	10/29/2015	0.0084	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-5-12.5-012516	1/25/2016	0.0058	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-5-12.5-042816	4/28/2016	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		**0.0011**	J	
		VMP-5-12.5-072816	7/28/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-5-12.5-102516	10/25/2016	<0.0095	J	U	**0.0016**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0013**	J	
		VMP-5-12.5-012617	1/26/2017	0.0037	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		**0.0015**	J	
		VMP-5-12.5-042617	4/26/2017	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0014**	J	
		VMP-5-12.5-072017	7/20/2017	0.028			**0.002**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-5-12.5-102017	10/30/2017	<0.011		U	<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-5-12.5-012518	1/25/2018	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-5-12.5-041618	4/16/2018	0.024			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0019**	J		<0.049	U		<0.004	U	
		VMP-5-12.5-071818	7/18/2018	0.0054	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0031**	J		<0.053	U		**0.0054**		
		VMP-5-12.5-101918	10/19/2018	0.0086			<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-5-12.5-012219	1/22/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-5-12.5-050119	5/1/2019	0.008	J		<0.0055	U		<0.0062	U		<0.0096	U	UJ	<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-5-12.5-072419	7/24/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-5-12.5-102119	10/21/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-5-12.5-012820	1/28/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-5-12.5-042720	4/27/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-5-12.5-072320	7/23/2020	0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-12.5-103020	10/30/2020	<0.023	U	UJ	<0.0053	U		0.0016	J		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-5-12.5-012221	1/22/2021	0.012	J		<0.0063	U		<0.0071	U		**0.0013**	J		<0.01	U		**0.00057**	J		<0.062	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	<0.022	U		0.0029	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.016**			<0.0065	J	U
		VMP-5-5-042915	4/29/2015	**0.01**	J		0.012	J		**0.0023**	J		**0.0088**			<0.0048	J	U				**2.9**	E	J	<0.0065	U	
		VMP-5-5-072915	7/29/2015	<0.028	U		<0.02	U		<0.0086	U		<0.0071	U		<0.0063	U					**0.0042**	J		<0.0086	U	
		VMP-5-5-102915	10/29/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	U		<0.0066	U	
		VMP-5-5-012516	1/25/2016	<0.021	U		0.005	J		<0.0063	U		<0.0053	U		<0.0046	U					**0.017**			**0.0023**	J	
		VMP-5-5-042816	4/28/2016	**0.0016**	J	J	<0.016	U		**0.00044**	J		<0.0058	U		<0.0051	U					**0.013**	J		<0.0069	U	
		VMP-5-5-072816	7/28/2016	<0.024	U		0.0034	J		<0.007	U		<0.0059	U		<0.021	U					**0.0063**	J		<0.007	U	
		VMP-5-5-102516	10/25/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U		<0.015	U		**0.012**	J		<0.0068	U	
		VMP-5-5-012617	1/26/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0021**	J		<0.0056	U	
		VMP-5-5-042617	4/26/2017	<0.055	U		<0.04	U		<0.016	U		<0.014	U		<0.048	U					**0.0075**	J		<0.016	U	
		VMP-5-5-072017	7/20/2017	<0.019	U		0.0028	J		<0.0057	U		**0.0014**	J		<0.017	U					**0.091**			**0.0005**	J	
		VMP-5-5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-5-5-012518	1/25/2018	<0.018	U		0.089			<0.0053	U		<0.0044	U		<0.016	U					**0.018**			<0.0053	U	
		VMP-5-5-041618	4/16/2018	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-5-5-071818	7/18/2018	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-5-5-101918	10/19/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-5-5-012219	1/22/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					**0.0048**	J		<0.0051	U	
		VMP-5-5-050119	5/1/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.011**	J		<0.0065	U	
		VMP-5-5-072419	7/24/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0046**	J		<0.0059	U	
		VMP-5-5-072419-DUP	7/24/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0061**	J		<0.0058	U	
		VMP-5-5-102119	10/21/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-5-5-012820	1/28/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-5-5-042720	4/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0029**	J		<0.0058	U	
		VMP-5-5-072320	7/23/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.003**	J		<0.0063	U	
		VMP-5-5-103020	10/30/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0049**	J		<0.0059	U	
		VMP-5-5-012221	1/22/2021	<0.02	U		<0.015	U		**0.00085**	J		<0.0051	U		<0.018	U					**0.0071**	J		**0.0021**	J	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					**0.008**	J		<0.0061	U	
		VMP-5-12.5-042915	4/29/2015	**0.0026**	J		0.0023	J		<0.007	U		<0.0058	J	U	<0.0052	J	U				**0.44**			<0.007	U	
		VMP-5-12.5-072915	7/29/2015	<0.026	U		0.01	J		<0.0077	U		<0.0064	U		<0.0057	U					**0.013**	J		<0.0077	U	
		VMP-5-12.5-102915	10/29/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					<0.014	J	U	<0.0071	U	
		VMP-5-12.5-012516	1/25/2016	<0.021	U		0.0012	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.016**			<0.0064	U	
		VMP-5-12.5-042816	4/28/2016	<0.022	ND,UJ	UJ	<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0045**	J		<0.0067	U	
		VMP-5-12.5-072816	7/28/2016	<0.024	U		0.0027	J		<0.0073	U		<0.0061	U		<0.021	U					**0.0032**	J		<0.0073	U	
		VMP-5-12.5-102516	10/25/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.018**			<0.0062	U	
		VMP-5-12.5-012617	1/26/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0052**	J		<0.0054	U	
		VMP-5-12.5-042617	4/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0026**	J		<0.0058	U	
		VMP-5-12.5-072017	7/20/2017	<0.02	U		0.0018	J		<0.0062	U		<0.0051	U		<0.018	U					**0.042**			<0.0062	U	
		VMP-5-12.5-102017	10/30/2017	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-5-12.5-012518	1/25/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0014**	J		<0.0056	U	
		VMP-5-12.5-041618	4/16/2018	<0.019	U		0.0035	J		<0.0056	U		<0.0047	U		<0.016	U					**0.011**	J		<0.0056	U	
		VMP-5-12.5-071818	7/18/2018	<0.02	U		0.0092	J		<0.0061	U		<0.0051	U		<0.018	U					**0.0028**	J		<0.0061	U	
		VMP-5-12.5-101918	10/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-5-12.5-012219	1/22/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-5-12.5-050119	5/1/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-5-12.5-072419	7/24/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-5-12.5-102119	10/21/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-5-12.5-012820	1/28/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-5-12.5-042720	4/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0033**	J		<0.0059	U	
		VMP-5-12.5-072320	7/23/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0044**	J		<0.0061	U	
		VMP-5-12.5-103020	10/30/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0074**	J		**0.0017**	J	
		VMP-5-12.5-012221	1/22/2021	<0.024	U		0.0046	J		**0.00039**	J		<0.0059	U		<0.021	U					**0.023**			<0.0071	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0015**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-5-042915	4/29/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0038**	J		<0.039	J	U	<0.0072	J	U	<0.0072	U	
		VMP-5-5-072915	7/29/2015	<0.0074	U		<0.012	U		<0.012	U		**0.0065**			<0.0066	U		<0.052	U		<0.0095	U		<0.0095	U	
		VMP-5-5-102915	10/29/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-5-5-012516	1/25/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-5-5-042816	4/28/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U	U	**0.00082**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-5-5-072816	7/28/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-5-5-102516	10/25/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.003**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-5-5-012617	1/26/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.00041**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-5-5-042617	4/26/2017	<0.014	U		<0.023	U		**0.011**	J		<0.0099	U		<0.013	U		<0.1	U		<0.018	U		<0.018	U	
		VMP-5-5-072017	7/20/2017	**0.00085**	J		<0.008	U		**0.00096**	J		<0.0034	U		**0.0013**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-5-5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-5-5-012518	1/25/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.05**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-5-5-041618	4/16/2018	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-5-5-071818	7/18/2018	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-5-101918	10/19/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0015**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-5-5-012219	1/22/2019	**0.00075**	J		<0.0071	U		<0.007	U		<0.0031	U		**0.68**			<0.031	U		<0.0057	U		<0.0057	U	
		VMP-5-5-050119	5/1/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-5-072419	7/24/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-5-5-072419-DUP	7/24/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00058**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-5-5-102119	10/21/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-5-5-012820	1/28/2020	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-5-5-042720	4/27/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-5-5-072320	7/23/2020	<0.0088	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-5-5-103020	10/30/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-5-5-012221	1/22/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00035**	J		<0.037	U		<0.0068	U		<0.0068	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.00085**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-12.5-042915	4/29/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.0061**			**0.048**			<0.0078	U		<0.0078	U	
		VMP-5-12.5-072915	7/29/2015	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		<0.0059	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-5-12.5-102915	10/29/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-5-12.5-012516	1/25/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-5-12.5-042816	4/28/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U	U	<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-5-12.5-072816	7/28/2016	<0.0063	U		<0.01	U		**0.0025**	J		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-5-12.5-102516	10/25/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.003**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-5-12.5-012617	1/26/2017	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.00054**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-5-12.5-042617	4/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-5-12.5-072017	7/20/2017	<0.0053	U		<0.0086	U		**0.0015**	J		<0.0037	U		**0.0015**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-12.5-102017	10/30/2017	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.0022**	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-5-12.5-012518	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-5-12.5-041618	4/16/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.00091**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-5-12.5-071818	7/18/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0069**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-12.5-101918	10/19/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-5-12.5-012219	1/22/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-5-12.5-050119	5/1/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-5-12.5-072419	7/24/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00066**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-5-12.5-102119	10/21/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-5-12.5-012820	1/28/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-12.5-042720	4/27/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-5-12.5-072320	7/23/2020	<0.0084	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00095**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-12.5-103020	10/30/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-5-12.5-012221	1/22/2021	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.0016**	J		<0.043	U		<0.0079	U		<0.0079	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-5	5 ft	VMP-5-5-013015	1/30/2015	<0.0071	U		<0.0074	U		<0.0065	J	U	<0.0065	J	U	0.0051	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-5-5-042915	4/29/2015	<0.0071	U		<0.0074	J	U	<0.0065	J	U	<0.0065	U		0.0026	J		<0.0034	U		0.0015	J		<0.0058	U	
		VMP-5-5-072915	7/29/2015	<0.0094	U		0.0021	J		<0.0086	U		<0.0086	U		<0.0082	U		<0.0045	U		<0.0076	U		<0.0076	U	
		VMP-5-5-102915	10/29/2015	<0.0072	U		<0.0076	J	U	<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-5-5-012516	1/25/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.019			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-5-5-042816	4/28/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.00092	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-5-5-072816	7/28/2016	<0.0077	U		0.0038	J		<0.007	U		<0.007	U		0.0017	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-5-5-102516	10/25/2016	<0.0075	U		0.0015	J		<0.0068	U		<0.0068	U		0.001	J		<0.0036	U		0.0053	J		**0.0015**	J	
		VMP-5-5-012617	1/26/2017	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0016	J		<0.005	U	
		VMP-5-5-042617	4/26/2017	<0.018	U		<0.019	U		<0.016	U		<0.016	U		0.0023	J		<0.0086	U		<0.014	U		<0.014	U	
		VMP-5-5-072017	7/20/2017	<0.0063	U		0.0022	J		**0.00066**	J		<0.0057	U		0.00083	J		<0.003	U		0.0013	J		**0.00052**	J	
		VMP-5-5-103017	10/30/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-5-012518	1/25/2018	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		0.0012	J		<0.0047	U	
		VMP-5-5-041618	4/16/2018	<0.0058	U		0.0014	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-5-5-071818	7/18/2018	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0012	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-5-5-101918	10/19/2018	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.0016	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-5-012219	1/22/2019	<0.0056	U		0.0014	J		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		0.17			**0.015**		
		VMP-5-5-050119	5/1/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-5-5-072419	7/24/2019	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.0022	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-5-5-072419-DUP	7/24/2019	<0.0064	U		0.0011	J		<0.0058	U		<0.0058	U		0.002	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-5-5-102119	10/21/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-5-5-012820	1/28/2020	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-5-042720	4/27/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-5-5-072320	7/23/2020	**0.00078**	J		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-5-5-103020	10/30/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-5-5-012221	1/22/2021	<0.0067	U		0.0017	J		<0.0062	U		<0.0062	U		0.0031	J		<0.0032	U		<0.0054	U		<0.0054	U	
	12.5 ft	VMP-5-12.5-013015	1/30/2015	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.001	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-5-12.5-042915	4/29/2015	<0.0077	U		<0.008	J	U	<0.007	J	U	<0.007	U		0.0068			<0.0036	U		0.0022	J		<0.0062	U	
		VMP-5-12.5-072915	7/29/2015	<0.0085	U		0.0024	J		<0.0077	U		<0.0077	U		0.13			<0.004	U		<0.0068	U		<0.0068	U	
		VMP-5-12.5-102915	10/29/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0072			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-5-12.5-012516	1/25/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-5-12.5-042816	4/28/2016	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0068			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-5-12.5-072816	7/28/2016	<0.008	U		0.012			<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-5-12.5-102516	10/25/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00093	J		<0.0032	U		0.0056			**0.0018**	J	
		VMP-5-12.5-012617	1/26/2017	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-5-12.5-042617	4/26/2017	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-5-12.5-072017	7/20/2017	<0.0067	U		0.0042	J		**0.00056**	J		<0.0062	U		<0.0059	U		<0.0032	U		0.0064			**0.0013**	J	
		VMP-5-12.5-102017	10/30/2017	<0.0057	U		0.001	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-5-12.5-012518	1/25/2018	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		0.0016	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-12.5-041618	4/16/2018	<0.0062	U		0.0016	J		**0.0003**	J		<0.0056	U		0.0029	J		<0.0029	U		0.00067	J		<0.005	U	
		VMP-5-12.5-071818	7/18/2018	<0.0067	U		0.0019	J		<0.0061	U		<0.0061	U		0.0053	J		<0.0032	U		0.0046	J		**0.0013**	J	
		VMP-5-12.5-101918	10/19/2018	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-5-12.5-012219	1/22/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-12.5-050119	5/1/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-12.5-072419	7/24/2019	<0.0068	U		0.0011	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-12.5-102119	10/21/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-12.5-012820	1/28/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-5-12.5-042720	4/27/2020	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0059			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-5-12.5-072320	7/23/2020	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-5-12.5-103020	10/30/2020	<0.0066	U		<0.0069	U		**0.003**	J		<0.006	U		<0.0057	U		<0.0031	U		0.0007	J		<0.0053	U	
		VMP-5-12.5-012221	1/22/2021	<0.0078	U		0.0023	J		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		0.00062	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	**0.012**	J		<0.0049	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0024**	J	
		VMP-5-31-042915	4/29/2015	**0.14**			<0.0044	J	U	<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.0023	J		**0.0063**	J	
		VMP-5-31-072915	7/29/2015	**0.046**			**0.0022**	J		<0.0096	U		<0.015	U		**0.0033**	J		<0.0032	U		<0.014	U		**0.015**	J	
		VMP-5-31-102915	10/29/2015	**0.023**	J		**0.0012**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0068**	J	
		VMP-5-31-030916-R	3/9/2016	<0.029	J	U	**0.00098**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-5-31-042816	4/28/2016	**0.01**	J		**0.0017**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-5-31-072816	7/28/2016	**0.027**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0044**	J	
		VMP-5-31-102516	10/25/2016	**0.017**	J		**0.00098**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-5-31-012617	1/26/2017	**0.027**	J		**0.0009**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.011	J		**0.0073**	J	
		VMP-5-31-042617	4/26/2017	<0.028	J	U	**0.0011**	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0062**	J	
		VMP-5-31-072017	7/20/2017	**0.015**	J		<0.004	U		**0.0022**	J		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0028**	J	
		VMP-5-31-072017-DUP	7/20/2017	**0.011**	J		<0.0038	U		**0.002**	J		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0028**	J	
		VMP-5-31-103017	10/30/2017	<0.026	J	U	<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-5-31-012518	1/25/2018	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-5-31-041618	4/16/2018	**0.0064**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-5-31-071818	7/18/2018	**0.017**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-5-31-101918	10/19/2018	**0.0084**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-5-31-012219	1/22/2019	**0.033**			<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0034**	J	
		VMP-5-31-050119	5/1/2019	**0.015**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-5-31-072419	7/24/2019	**0.028**			**0.001**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-5-31-102119	10/21/2019	**0.0095**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-5-31-012820	1/28/2020	**0.0072**	J	J	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-5-31-042720	4/27/2020	**0.016**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-5-31-072320	7/23/2020	**0.012**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0024**	J	
		VMP-5-31-072320-DUP	7/23/2020	**0.018**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-5-31-103020	10/30/2020	**0.017**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.031	J	U	<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-5-31-012221	1/22/2021	<0.029	J	U	**0.00041**	J		<0.0082	U		**0.0014**	J		<0.048	U		<0.0027	U		<0.012	U		**0.0018**	J	
	40 ft	VMP-5-40-013015	1/30/2015	**0.011**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		0.004	J		**0.0019**	J	
		VMP-5-40-042915	4/29/2015	**0.074**			<0.0045	J	U	<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		0.0063	J		**0.006**	J	
		VMP-5-40-072915	7/29/2015	**0.024**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0061	J		**0.0086**	J	
		VMP-5-40-102915	10/29/2015	<0.03	J	U	**0.0012**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.004	J		**0.0037**	J	
		VMP-5-40-012516	1/25/2016	**0.016**	J		**0.0026**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.025			**0.0027**	J	
		VMP-5-40-012516-DUP	1/25/2016	**0.018**	J		**0.0028**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		0.029			**0.0042**	J	
		VMP-5-40-042816	4/28/2016	**0.012**	J		**0.001**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-5-40-072816	7/28/2016	**0.047**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0072**	J	
		VMP-5-40-102516	10/25/2016	**0.0078**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-5-40-012617	1/26/2017	**0.015**	J		**0.00068**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0035**	J	
		VMP-5-40-012617-Dup	1/26/2017	**0.008**	J		**0.00087**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-5-40-042617	4/26/2017	<0.028	J	U	**0.0009**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0044	J		**0.0051**	J	
		VMP-5-40-042617-DUP	4/26/2017	<0.028	J	U	**0.00093**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0065**	J	
		VMP-5-40-012518	1/25/2018	<0.025	J	U	<0.0034	J	U	<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-5-40-041618	4/16/2018	**0.014**	J		**0.00053**	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0068	J		**0.003**	J	
		VMP-5-40-041618-DUP	4/16/2018	**0.016**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0028**	J	
		VMP-5-40-071818	7/18/2018	**0.024**	J		**0.0039**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0027**	J	
		VMP-5-40-101918	10/19/2018	**0.0074**	J		**0.0016**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0056	J		<0.014	U	
		VMP-5-40-020419	2/4/2019	**0.02**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0037**	J	
		VMP-5-40-050119	5/1/2019	**0.04**			<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	<0.019	J	U	<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0029**	J		<0.031	U		<0.0079	U	
		VMP-5-31-042915	4/29/2015	**0.027**			<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	J	U	<0.028	U		<0.0071	U	
		VMP-5-31-072915	7/29/2015	**0.0077**	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0086**			<0.03	U		<0.0074	U	
		VMP-5-31-102915	10/29/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	J	U	<0.027	U		<0.0068	U	
		VMP-5-31-030916-R	3/9/2016	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0022**	J		<0.026	U		<0.0064	U	
		VMP-5-31-042816	4/28/2016	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0033**	J		<0.031	U		<0.0079	U	
		VMP-5-31-072816	7/28/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.003**	J		<0.029	U		<0.0073	U	
		VMP-5-31-102516	10/25/2016	**0.0043**	J		<0.0087	U		**0.0018**	J		<0.012	U		<0.015	U		**0.0046**	J		<0.029	U		<0.0072	U	
		VMP-5-31-012617	1/26/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0014**	J		<0.024	U		<0.006	U	
		VMP-5-31-042617	4/26/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0021**	J		<0.025	U		<0.0062	U	
		VMP-5-31-072017	7/20/2017	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.01**			<0.026	U		<0.0064	U	
		VMP-5-31-072017-DUP	7/20/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0097**			<0.025	U		<0.0062	U	
		VMP-5-31-103017	10/30/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0035**	J		<0.023	U		<0.0057	U	
		VMP-5-31-012518	1/25/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0017**	J		<0.023	U		<0.0059	U	
		VMP-5-31-041618	4/16/2018	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.002**	J		<0.023	U		<0.0057	U	
		VMP-5-31-071818	7/18/2018	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0024**	J		<0.026	U		<0.0066	U	
		VMP-5-31-101918	10/19/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0033**	J		<0.024	U		<0.006	U	
		VMP-5-31-012219	1/22/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0016**	J		<0.023	U		<0.0058	U	
		VMP-5-31-050119	5/1/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0032**	J		<0.026	U		<0.0065	U	
		VMP-5-31-072419	7/24/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0041**	J		<0.024	U		<0.0062	ND,UJ	UJ
		VMP-5-31-102119	10/21/2019	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0049**	J		<0.03	U		<0.0075	U	
		VMP-5-31-012820	1/28/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0032**	J		<0.026	U		<0.0066	U	
		VMP-5-31-042720	4/27/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0042**	J		<0.026	U		<0.0066	U	
		VMP-5-31-072320	7/23/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0063	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0065	U	
		VMP-5-31-103020	10/30/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0021**	J		<0.028	U		<0.0071	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0017**	J		<0.027	U		<0.0067	U	
		VMP-5-31-012221	1/22/2021	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0028**	J		<0.025	U		**0.0013**	J	
	40 ft	VMP-5-40-013015	1/30/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0065**			<0.027	U		<0.0068	U	
		VMP-5-40-042915	4/29/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	J	U	<0.029	U		<0.0073	U	
		VMP-5-40-072915	7/29/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.005**	J		<0.029	U		<0.0072	U	
		VMP-5-40-102915	10/29/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0054**	J		<0.026	U		<0.0065	U	
		VMP-5-40-012516	1/25/2016	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.005**	J		<0.025	U		<0.0063	U	
		VMP-5-40-012516-DUP	1/25/2016	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0054**	J		<0.026	U		<0.0065	U	
		VMP-5-40-042816	4/28/2016	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		**0.0034**	J		<0.03	U		<0.0075	U	
		VMP-5-40-072816	7/28/2016	**0.0041**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.007**			<0.027	U		<0.0068	U	
		VMP-5-40-102516	10/25/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0041**	J		<0.026	U		<0.0064	U	
		VMP-5-40-012617	1/26/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0032**	J		<0.023	U		<0.0058	U	
		VMP-5-40-012617-Dup	1/26/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.003**	J		<0.024	U		<0.006	U	
		VMP-5-40-042617	4/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0033**	J		<0.024	U		<0.0061	U	
		VMP-5-40-042617-DUP	4/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0035**	J		<0.024	U		<0.0061	U	
		VMP-5-40-012518	1/25/2018	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.0042**	J		<0.022	U		<0.0054	U	
		VMP-5-40-041618	4/16/2018	<0.013	J	U	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0078**			<0.022	U		<0.0056	U	
		VMP-5-40-041618-DUP	4/16/2018	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.007**			<0.023	U		<0.0057	U	
		VMP-5-40-071818	7/18/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0036**	J		<0.026	U		<0.0065	U	
		VMP-5-40-101918	10/19/2018	<0.014	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.003**	J		<0.024	U		<0.006	U	
		VMP-5-40-020419	2/4/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0039**	J		<0.026	U		<0.0064	U	
		VMP-5-40-050119	5/1/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0034**	J		<0.023	U		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.002**	J		<0.0062	U		<0.0062	U	
		VMP-5-31-042915	4/29/2015	**0.0024**	J		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-5-31-072915	7/29/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-5-31-102915	10/29/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-5-31-030916-R	3/9/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-5-31-042816	4/28/2016	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0019**	J		<0.0062	U		<0.0062	U	
		VMP-5-31-072816	7/28/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-5-31-102516	10/25/2016	**0.0048**			<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0027**	J		<0.0056	U		<0.0056	U	
		VMP-5-31-012617	1/26/2017	**0.0016**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-5-31-042617	4/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-5-31-072017	7/20/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-5-31-072017-DUP	7/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-5-31-103017	10/30/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-5-31-012518	1/25/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0032**	J		<0.0046	U		<0.0046	U	
		VMP-5-31-041618	4/16/2018	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-5-31-071818	7/18/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-5-31-101918	10/19/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-5-31-012219	1/22/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-5-31-050119	5/1/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-5-31-072419	7/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-5-31-102119	10/21/2019	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-5-31-012820	1/28/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-5-31-042720	4/27/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-5-31-072320	7/23/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-5-31-103020	10/30/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-5-31-012221	1/22/2021	<0.0042	U		**0.0011**	J		**0.0023**	J		0.002	J		**0.002**	J		**0.0028**	J		<0.005	U		<0.005	U	
	40 ft	VMP-5-40-013015	1/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.002**	J		<0.0054	U		<0.0054	U	
		VMP-5-40-042915	4/29/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0021**	J		<0.0057	U		<0.0057	U	
		VMP-5-40-072915	7/29/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0025**	J		<0.0056	U		<0.0056	U	
		VMP-5-40-102915	10/29/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0036**	J		<0.0051	U		<0.0051	U	
		VMP-5-40-012516	1/25/2016	**0.0025**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-5-40-012516-DUP	1/25/2016	**0.0031**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-5-40-042816	4/28/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0022**	J		<0.0059	U		<0.0059	U	
		VMP-5-40-072816	7/28/2016	**0.00098**	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0035**	J		<0.0053	U		<0.0053	U	
		VMP-5-40-102516	10/25/2016	**0.0027**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-5-40-012617	1/26/2017	**0.00091**	J		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-5-40-012617-Dup	1/26/2017	**0.00084**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0027**	J		<0.0047	U		<0.0047	U	
		VMP-5-40-042617	4/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-5-40-042617-DUP	4/26/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-5-40-012518	1/25/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0031**	J		<0.0042	U		<0.0042	U	
		VMP-5-40-041618	4/16/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-5-40-041618-DUP	4/16/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-5-40-071818	7/18/2018	**0.0076**			<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-5-40-101918	10/19/2018	**0.0015**	J		**0.00074**	J		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-5-40-020419	2/4/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-5-40-050119	5/1/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-5-31-042915	4/29/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	J	U
		VMP-5-31-072915	7/29/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-5-31-102915	10/29/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-31-030916-R	3/9/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.0028**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-31-042816	4/28/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-5-31-072816	7/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-5-31-102516	10/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-5-31-012617	1/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0073**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-5-31-042617	4/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0029**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-31-072017	7/20/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-31-072017-DUP	7/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-31-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-5-31-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-5-31-041618	4/16/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-5-31-071818	7/18/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-5-31-101918	10/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-5-31-012219	1/22/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-31-050119	5/1/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-31-072419	7/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-31-102119	10/21/2019	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-5-31-012820	1/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-5-31-042720	4/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-5-31-072320	7/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		**0.0021**	J	
		VMP-5-31-072320-DUP	7/23/2020	<0.005	U		<0.005	U		<0.005	U		**0.0028**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-31-103020	10/30/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-5-31-012221	1/22/2021	<0.0048	U		<0.0048	U		<0.0048	U		**0.0013**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
	40 ft	VMP-5-40-013015	1/30/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-40-042915	4/29/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-5-40-072915	7/29/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-5-40-102915	10/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-40-012516	1/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-40-012516-DUP	1/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-40-042816	4/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-5-40-072816	7/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.0052**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-5-40-102516	10/25/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-40-012617	1/26/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-5-40-012617-Dup	1/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0059**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-5-40-042617	4/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-5-40-042617-DUP	4/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0033**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-5-40-012518	1/25/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-5-40-041618	4/16/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-5-40-041618-DUP	4/16/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-5-40-071818	7/18/2018	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-5-40-101918	10/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-5-40-020419	2/4/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-5-40-050119	5/1/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	0.01	J		**0.0035**	J		<0.0075	J	U	<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-5-31-042915	4/29/2015	0.0044	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		**0.0017**	J		<0.059	U		**0.0028**	J	
		VMP-5-31-072915	7/29/2015	0.012			<0.0062	U		<0.007	U		<0.011	U		<0.01	U		**0.0014**	J		<0.061	U		<0.005	U	
		VMP-5-31-102915	10/29/2015	0.017			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-5-31-030916-R	3/9/2016	0.005	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-31-042816	4/28/2016	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-5-31-072816	7/28/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-5-31-102516	10/25/2016	0.014			**0.0056**	J		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	J	U
		VMP-5-31-012617	1/26/2017	0.016			**0.002**	J		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0024**	J	
		VMP-5-31-042617	4/26/2017	<0.009	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0013**	J	
		VMP-5-31-072017	7/20/2017	0.0081	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-31-072017-DUP	7/20/2017	0.01			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-5-31-103017	10/30/2017	<0.0083	J	U	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-5-31-012518	1/25/2018	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-5-31-041618	4/16/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-5-31-071818	7/18/2018	0.014			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-5-31-101918	10/19/2018	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-5-31-012219	1/22/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-5-31-050119	5/1/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U	UJ	<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-31-072419	7/24/2019	0.0092			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-5-31-102119	10/21/2019	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-5-31-012820	1/28/2020	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-5-31-042720	4/27/2020	0.0045	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-5-31-072320	7/23/2020	0.0017	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-5-31-103020	10/30/2020	<0.026	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		**0.026**	J	J	**0.0032**	J	
		VMP-5-31-103020-DUP	10/30/2020	<0.024	U	UJ	**0.00079**	J		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		**0.24**		J	<0.0046	U	
		VMP-5-31-012221	1/22/2021	0.0089	J		<0.0053	U		0.00095	J		**0.00064**	J		<0.0086	U		<0.005	U		**0.0084**	J		<0.0043	U	
	40 ft	VMP-5-40-013015	1/30/2015	0.0047	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		**0.0022**	J	
		VMP-5-40-042915	4/29/2015	<0.011	U		<0.0061	U		<0.007	U		<0.011	J	U	<0.0099	U		<0.0058	U		<0.06	U		**0.0022**	J	
		VMP-5-40-072915	7/29/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		**0.018**	J		<0.0049	U	
		VMP-5-40-102915	10/29/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-5-40-012516	1/25/2016	<0.0092	U		**0.0059**			0.0033	J		<0.0094	U		<0.0086	U		**0.011**			<0.052	U		**0.033**		
		VMP-5-40-012516-DUP	1/25/2016	<0.0094	U		**0.0071**			0.0033	J		<0.0096	U		<0.0087	U		**0.012**			<0.053	U		**0.035**		
		VMP-5-40-042816	4/28/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.0013**	J	
		VMP-5-40-072816	7/28/2016	<0.0099	U		<0.0057	U		0.0036	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-5-40-102516	10/25/2016	<0.0093	J	U	**0.0058**			<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0015**	J	
		VMP-5-40-012617	1/26/2017	0.0048	J		**0.0014**	J		<0.0056	U		<0.0087	U		<0.0079	U		**0.0018**	J		<0.048	U		**0.0018**	J	
		VMP-5-40-012617-Dup	1/26/2017	0.0078	J		**0.00094**	J		<0.0057	U		<0.0089	U		<0.0081	U		**0.0018**	J		<0.05	U		**0.0016**	J	
		VMP-5-40-042617	4/26/2017	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0015**	J	
		VMP-5-40-042617-DUP	4/26/2017	<0.0088	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0013**	J	
		VMP-5-40-012518	1/25/2018	<0.0079	U		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-5-40-041618	4/16/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0029**	J		<0.046	U		**0.0032**	J	
		VMP-5-40-041618-DUP	4/16/2018	0.0095			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-5-40-071818	7/18/2018	0.0075	J		**0.0014**	J		0.0012	J		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-40-101918	10/19/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0029**	J		<0.05	U		**0.0089**		
		VMP-5-40-020419	2/4/2019	<0.0093	U		<0.0054	U		0.0026	J		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-5-40-050119	5/1/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U	UJ	<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	<0.025	U		0.0044	J		<0.0075	J	U	<0.0062	U		<0.0055	U					**0.015**			<0.0075	J	U
		VMP-5-31-042915	4/29/2015	**0.0015**	J		0.0057	J		<0.0068	U		<0.0056	J	U	<0.005	U					**0.21**			<0.0068	U	
		VMP-5-31-072915	7/29/2015	**0.0039**	J		0.0024	J		**0.0011**	J		**0.0037**	J		<0.0052	U					**0.005**	J		<0.007	U	
		VMP-5-31-102915	10/29/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					<0.013	J	U	<0.0065	U	
		VMP-5-31-030916-R	3/9/2016	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					**0.0045**	J		<0.0061	U	
		VMP-5-31-042816	4/28/2016	<0.025	ND,UJ	UJ	0.0033	J		**0.00066**	J		<0.0062	U		<0.0055	U					**0.0045**	J		<0.0075	U	
		VMP-5-31-072816	7/28/2016	<0.023	U		<0.017	U		**0.001**	J		<0.0058	U		<0.02	U					**0.016**			<0.0069	U	
		VMP-5-31-102516	10/25/2016	<0.023	U		0.0056	J		<0.0068	U		<0.0057	U		<0.02	U		<0.014	U		**0.033**			<0.0068	U	
		VMP-5-31-012617	1/26/2017	<0.019	U		0.031			**0.00042**	J		<0.0048	U		<0.017	U					**0.038**			<0.0057	U	
		VMP-5-31-042617	4/26/2017	<0.02	U		<0.014	U		**0.0014**	J		<0.0049	U		<0.017	U					**0.0047**	J		<0.0059	U	
		VMP-5-31-072017	7/20/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-5-31-072017-DUP	7/20/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-5-31-103017	10/30/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-5-31-012518	1/25/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0019**	J		<0.0056	U	
		VMP-5-31-041618	4/16/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-5-31-071818	7/18/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.01**	J		<0.0062	U	
		VMP-5-31-101918	10/19/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-5-31-012219	1/22/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0033**	J		<0.0055	U	
		VMP-5-31-050119	5/1/2019	<0.02	U		0.002	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-5-31-072419	7/24/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-5-31-102119	10/21/2019	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					<0.014	U		<0.0071	U	
		VMP-5-31-012820	1/28/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-5-31-042720	4/27/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0055**	J		<0.0062	U	
		VMP-5-31-072320	7/23/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0025**	J		<0.006	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0026**	J		<0.0062	U	
		VMP-5-31-103020	10/30/2020	<0.022	U		0.0065	J		<0.0067	U		<0.0056	U		<0.02	U					**0.016**			<0.0067	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0049**	J		<0.0064	U	
		VMP-5-31-012221	1/22/2021	**0.00069**	J		<0.014	U		**0.0007**	J		<0.005	U		<0.018	U					**0.0072**	J		**0.00088**	J	
	40 ft	VMP-5-40-013015	1/30/2015	<0.022	U		0.0069	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.0092**	J		<0.0065	U	
		VMP-5-40-042915	4/29/2015	**0.0019**	J		0.0076	J		<0.007	U		<0.0058	J	U	<0.0051	U					**0.054**			<0.007	U	
		VMP-5-40-072915	7/29/2015	<0.023	U		0.004	J		<0.0068	U		<0.0057	U		<0.005	U					**0.0032**	J		<0.0068	U	
		VMP-5-40-102915	10/29/2015	<0.021	U		0.0067	J		<0.0062	U		<0.0052	U		<0.0045	U					<0.012	J	U	<0.0062	U	
		VMP-5-40-012516	1/25/2016	<0.02	U		0.067			<0.006	U		<0.005	U		<0.0044	U					**0.0093**	J		<0.006	U	
		VMP-5-40-012516-DUP	1/25/2016	<0.02	U		0.071			<0.0061	U		<0.0051	U		<0.0045	U					**0.0067**	J		<0.0061	U	
		VMP-5-40-042816	4/28/2016	**0.0032**	J	J	0.0036	J		**0.00051**	J		<0.0059	U		<0.0052	U					**0.0058**	J		<0.0071	U	
		VMP-5-40-072816	7/28/2016	<0.022	U		0.028			<0.0065	U		<0.0054	U		<0.019	U					**0.0062**	J		<0.0065	J	U
		VMP-5-40-102516	10/25/2016	<0.02	U		0.0072	J		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.016**			<0.0061	U	
		VMP-5-40-012617	1/26/2017	<0.018	U		0.0038	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0068**	J		<0.0056	U	
		VMP-5-40-012617-Dup	1/26/2017	<0.019	U		0.0057	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0054**	J		<0.0057	U	
		VMP-5-40-042617	4/26/2017	<0.019	U		0.0035	J		**0.00099**	J		<0.0048	U		<0.017	U					**0.0029**	J		<0.0058	U	
		VMP-5-40-042617-DUP	4/26/2017	<0.019	U		0.0026	J		**0.00095**	J		<0.0048	U		<0.017	U					**0.0037**	J		<0.0058	U	
		VMP-5-40-012518	1/25/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-5-40-041618	4/16/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-5-40-041618-DUP	4/16/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-5-40-071818	7/18/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0021**	J		**0.0016**	J	
		VMP-5-40-101918	10/19/2018	<0.019	U		0.013	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-5-40-020419	2/4/2019	<0.02	U		<0.015	U		**0.003**	J		<0.0051	U		<0.018	U					**0.002**	J		**0.01**		
		VMP-5-40-050119	5/1/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.004**	J		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.0016**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-5-31-042915	4/29/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-5-31-072915	7/29/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.0038**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-5-31-102915	10/29/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-31-030916-R	3/9/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-31-042816	4/28/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U	U	**0.00087**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-5-31-072816	7/28/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.00074**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-5-31-102516	10/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0085**			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-5-31-012617	1/26/2017	<0.005	U		<0.008	U		<0.0079	U		**0.0025**	J		**0.03**			<0.034	U		<0.0064	U		<0.0064	U	
		VMP-5-31-042617	4/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-5-31-072017	7/20/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-31-072017-DUP	7/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-5-31-103017	10/30/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-5-31-012518	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.00082**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-5-31-041618	4/16/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-5-31-071818	7/18/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-5-31-101918	10/19/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-5-31-012219	1/22/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-5-31-050119	5/1/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-31-072419	7/24/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0026**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-5-31-102119	10/21/2019	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-5-31-012820	1/28/2020	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-5-31-042720	4/27/2020	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-5-31-072320	7/23/2020	<0.0083	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0086	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-5-31-103020	10/30/2020	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U		<0.0071	U		<0.0071	U	
		VMP-5-31-012221	1/22/2021	**0.0006**	J		**0.0014**	J		<0.0083	U		<0.0036	U		**0.00042**	J		<0.036	U		<0.0067	U		<0.0067	U	
	40 ft	VMP-5-40-013015	1/30/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00097**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-40-042915	4/29/2015	<0.006	U		<0.0097	U		**0.0036**	J		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-5-40-072915	7/29/2015	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		**0.011**	J		<0.0076	U		<0.0076	U	
		VMP-5-40-102915	10/29/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-5-40-012516	1/25/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.018**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-5-40-012516-DUP	1/25/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.019**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-40-042816	4/28/2016	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U	U	**0.00061**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-5-40-072816	7/28/2016	<0.0056	U		<0.0091	U		**0.0028**	J		<0.0039	U		**0.0027**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-5-40-102516	10/25/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0049**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-40-012617	1/26/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0013**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-5-40-012617-Dup	1/26/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0016**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-5-40-042617	4/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-5-40-042617-DUP	4/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00092**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-5-40-012518	1/25/2018	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.0011**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-5-40-041618	4/16/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.00048**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-5-40-041618-DUP	4/16/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-5-40-071818	7/18/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-40-101918	10/19/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	J	U	<0.035	U		<0.0064	U		<0.0064	U	
		VMP-5-40-020419	2/4/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0027**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-5-40-050119	5/1/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0019**	J		<0.033	U		<0.0061	U		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	31 ft	VMP-5-31-013015	1/30/2015	<0.0082	U		<0.0086	U		<0.0075	J	U	<0.0075	U		0.074			<0.0039	U		0.0019	J		<0.0066	U	
		VMP-5-31-042915	4/29/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0095			<0.0035	U		<0.006	U		<0.006	U	
		VMP-5-31-072915	7/29/2015	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		0.0023	J		<0.0037	U		0.0033	J		**0.00095**	J	
		VMP-5-31-102915	10/29/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		0.0015	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-5-31-030916-R	3/9/2016	<0.0067	U		0.0022	J		<0.0061	U		<0.0061	U		0.002	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-5-31-042816	4/28/2016	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-5-31-072816	7/28/2016	<0.0076	U		0.0026	J		<0.0069	U		<0.0069	U		0.0012	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-5-31-102516	10/25/2016	<0.0074	U		0.0018	J		<0.0068	U		<0.0068	U		0.0017	J		<0.0035	U		0.017			**0.0036**	J	
		VMP-5-31-012617	1/26/2017	<0.0063	U		0.002	J		<0.0057	U		<0.0057	U		0.002	J		<0.003	U		0.0074			**0.0026**	J	
		VMP-5-31-042617	4/26/2017	<0.0064	U		0.0011	J		<0.0059	U		<0.0059	U		0.0011	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-5-31-072017	7/20/2017	<0.0067	U		0.00099	J		<0.0061	U		<0.0061	U		0.00051	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-5-31-072017-DUP	7/20/2017	<0.0064	U		0.00096	J		<0.0059	U		<0.0059	U		0.00059	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-5-31-103017	10/30/2017	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.001	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-5-31-012518	1/25/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0017	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-31-041618	4/16/2018	<0.0059	U		0.0018	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-5-31-071818	7/18/2018	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-31-101918	10/19/2018	<0.0062	U		0.0026	J		<0.0056	U		<0.0056	U		0.0013	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-5-31-012219	1/22/2019	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-5-31-050119	5/1/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-5-31-072419	7/24/2019	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.00096	J		<0.0052	U	
		VMP-5-31-102119	10/21/2019	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-5-31-012820	1/28/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0092			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-31-042720	4/27/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-31-072320	7/23/2020	<0.0066	U		0.0018	J		<0.006	U		<0.006	U		0.0015	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-5-31-072320-DUP	7/23/2020	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		0.0017	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-31-103020	10/30/2020	<0.0073	U		0.0023	J		<0.0067	U		<0.0067	U		0.0056	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-5-31-103020-DUP	10/30/2020	<0.007	U		0.0032	J		<0.0064	U		<0.0064	U		0.0052	J		<0.0033	U		0.00081	J		<0.0056	U	
		VMP-5-31-012221	1/22/2021	<0.0066	U		0.004	J		**0.0014**	J		<0.006	U		<0.0057	U		<0.0031	U		0.00054	J		<0.0053	U	
	40 ft	VMP-5-40-013015	1/30/2015	<0.0071	U		0.0047	J		<0.0065	U		<0.0065	U		0.0069			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-5-40-042915	4/29/2015	<0.0076	U		0.0083			<0.007	U		<0.007	U		0.0092			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-5-40-072915	7/29/2015	<0.0075	U		0.011			<0.0068	U		<0.0068	U		0.0064	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-5-40-102915	10/29/2015	<0.0068	U		0.024			<0.0062	U		<0.0062	U		0.0061			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-5-40-012516	1/25/2016	<0.0066	U		0.022			**0.0032**	J		**0.0014**	J		0.04			<0.0031	U		0.014			**0.0056**		
		VMP-5-40-012516-DUP	1/25/2016	<0.0067	U		0.022			**0.0031**	J		<0.0061	U		0.041			<0.0032	U		0.014			**0.0047**	J	
		VMP-5-40-042816	4/28/2016	<0.0078	U		0.0065	J		<0.0071	U		<0.0071	U		0.0033	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-5-40-072816	7/28/2016	**0.0026**	J		0.0091			**0.012**			**0.0047**	J		0.013			<0.0034	U		0.0048	J		**0.0023**	J	
		VMP-5-40-102516	10/25/2016	<0.0067	U		0.022			<0.0061	U		<0.0061	U		0.0043	J		<0.0032	U		0.015			**0.0043**	J	
		VMP-5-40-012617	1/26/2017	<0.0061	U		0.0041	J		<0.0056	U		<0.0056	U		0.0084			<0.0029	U		0.0042	J		**0.001**	J	
		VMP-5-40-012617-Dup	1/26/2017	<0.0063	U		0.0044	J		<0.0057	U		<0.0057	U		0.0083			<0.003	U		0.0043	J		**0.00094**	J	
		VMP-5-40-042617	4/26/2017	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		0.0043	J		<0.003	U		0.0016	J		<0.0051	U	
		VMP-5-40-042617-DUP	4/26/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0047	J		<0.003	U		0.0017	J		<0.0051	U	
		VMP-5-40-012518	1/25/2018	<0.0056	U		0.0016	J		<0.0052	U		<0.0052	U		0.0085			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-5-40-041618	4/16/2018	<0.0058	U		0.002	J		<0.0053	U		<0.0053	U		0.0035	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-5-40-041618-DUP	4/16/2018	<0.0059	U		0.0019	J		<0.0054	U		<0.0054	U		0.0016	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-5-40-071818	7/18/2018	<0.0067	U		0.005	J		**0.003**	J		**0.002**	J		0.013			<0.0032	U		0.0056			<0.0054	U	
		VMP-5-40-101918	10/19/2018	<0.0063	U		0.0087			<0.0058	U		<0.0058	U		0.0011	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-5-40-020419	2/4/2019	<0.0067	U		0.0077			**0.0036**	J		<0.0061	U		0.029			<0.0032	U		0.0016	J		<0.0054	U	
		VMP-5-40-050119	5/1/2019	<0.006	U		0.0039	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.029	J	U	**0.028**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0064	J		<0.014	U	
		VMP-6-5-042915	4/29/2015	**0.038**			<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0066**	J	
		VMP-6-5-072715	7/27/2015	**0.032**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0067**	J	
		VMP-6-5-102915	10/29/2015	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0079**	J	
		VMP-6-5-020116	2/1/2016	**0.033**	J		**0.0044**	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.022			**0.0077**	J	
		VMP-6-5-042516	4/25/2016	**0.0064**	J		**0.0006**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-6-5-072816	7/28/2016	**0.028**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.006**	J	
		VMP-6-5-102816	10/28/2016	**0.0076**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-6-5-012517	1/25/2017	**0.018**	J		**0.00057**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.017			**0.004**	J	
		VMP-6-5-042417	4/24/2017	<0.027	J	U	**0.00086**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0033**	J	
		VMP-6-5-052217	5/22/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0036**	J	
		VMP-6-5-072117	7/21/2017	**0.021**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0042**	J	
		VMP-6-5-103117	10/31/2017	<0.025	J	U	<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0028**	J	
		VMP-6-5-012418	1/24/2018	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0067	J		<0.013	U	
		VMP-6-5-042318	4/23/2018	**0.015**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0069**	J	
		VMP-6-5-071918	7/19/2018	**0.025**	J		**0.00048**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0049**	J	
		VMP-6-5-102218	10/22/2018	**0.022**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-6-5-013119	1/31/2019	**0.0089**	J		**0.0094**			<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.045			**0.0019**	J	
		VMP-6-5-042519	4/25/2019	**0.058**			**0.0012**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-6-5-072219	7/22/2019	**0.024**	J		**0.0018**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0051**	J	
		VMP-6-5-102519	10/25/2019	**0.0073**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-6-5-012320	1/23/2020	**0.081**			<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-6-5-042720	4/27/2020	**0.012**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-6-5-072220	7/22/2020	**0.032**			<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-6-5-102920	10/29/2020	**0.013**	J		**0.0004**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.03			<0.014	U	
		VMP-6-5-012921	1/29/2021	<0.029	U		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	10 ft	VMP-6-10-020915	2/9/2015	**0.02**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0044**	J	
		VMP-6-10-042915	4/29/2015	**0.014**	J		**0.0021**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0059**	J	
		VMP-6-10-072715	7/27/2015	**0.021**	J		<0.0046	J	U	<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0054**	J	
		VMP-6-10-102915	10/29/2015	**0.021**	J		**0.0014**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0092**	J	
		VMP-6-10-020116	2/1/2016	**0.036**			**0.0015**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.014			**0.0065**	J	
		VMP-6-10-042516	4/25/2016	**0.011**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0024**	J	
		VMP-6-10-072816	7/28/2016	**0.037**			<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-6-10-102816	10/28/2016	**0.022**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0045**	J	
		VMP-6-10-012517	1/25/2017	**0.0076**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-6-10-042417	4/24/2017	<0.028	J	U	<0.0038	U		**0.0017**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-10-072117	7/21/2017	**0.014**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		**0.0044**	J	
		VMP-6-10-103117	10/31/2017	**0.023**	J		<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		0.004	J		<0.012	U	
		VMP-6-10-012418	1/24/2018	<0.026	J	U	**0.00069**	J		**0.0025**	J		<0.011	U		<0.042	U		<0.0024	U		0.004	J		<0.013	U	
		VMP-6-10-042318	4/23/2018	**0.011**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-10-071918	7/19/2018	**0.038**			<0.0039	U		**0.0013**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0097**	J	
		VMP-6-10-102218	10/22/2018	**0.041**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0093	J		**0.0041**	J	
		VMP-6-10-012219	1/22/2019	**0.011**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-6-10-042519	4/25/2019	**0.014**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-10-072219	7/22/2019	**0.013**	J		<0.0039	U		**0.0054**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-6-10-102519	10/25/2019	**0.014**	J		<0.004	U		**0.001**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0068**	J	
		VMP-6-10-012320	1/23/2020	**0.0059**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-6-10-042720	4/27/2020	**0.012**	J		<0.0041	U		**0.0026**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0028**	J	
		VMP-6-10-072220	7/22/2020	**0.011**	J		<0.0042	U		**0.0044**	J		<0.013	U		**0.004**	J		<0.0029	U		<0.012	U		<0.015	U	
		VMP-6-10-102920	10/29/2020	**0.017**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.015	U		<0.0076	J	U	<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-6-5-042915	4/29/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-6-5-072715	7/27/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-6-5-102915	10/29/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-6-5-020116	2/1/2016	**0.0036**	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-6-5-042516	4/25/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-6-5-072816	7/28/2016	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0024**	J		<0.031	U		<0.0079	U	
		VMP-6-5-102816	10/28/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.0069**			<0.029	U		<0.0072	U	
		VMP-6-5-012517	1/25/2017	**0.0012**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-6-5-042417	4/24/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-6-5-052217	5/22/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-6-5-072117	7/21/2017	**0.0022**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-6-5-103117	10/31/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-6-5-012418	1/24/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-6-5-042318	4/23/2018	<0.013	J	U	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-6-5-071918	7/19/2018	**0.0025**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0063	U	
		VMP-6-5-102218	10/22/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.00086**	J		<0.026	U		<0.0066	U	
		VMP-6-5-013119	1/31/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0051**	J		<0.022	U		<0.0056	U	
		VMP-6-5-042519	4/25/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-6-5-072219	7/22/2019	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-6-5-102519	10/25/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-6-5-012320	1/23/2020	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		**0.011**			<0.03	U		<0.0075	U	
		VMP-6-5-042720	4/27/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-6-5-072220	7/22/2020	<0.016	U		**0.0017**	J		<0.006	U		<0.011	U		<0.014	U		**0.0077**			<0.027	U		<0.0067	U	
		VMP-6-5-102920	10/29/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0049**	J		<0.026	U		<0.0064	U	
		VMP-6-5-012921	1/29/2021	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0063	U	
	10 ft	VMP-6-10-020915	2/9/2015	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-6-10-042915	4/29/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-6-10-072715	7/27/2015	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0038**	J		<0.03	U		<0.0074	U	
		VMP-6-10-102915	10/29/2015	**0.0073**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		**0.0012**	J		<0.0065	U	
		VMP-6-10-020116	2/1/2016	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-6-10-042516	4/25/2016	**0.0013**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0038**	J		<0.03	U		<0.0075	U	
		VMP-6-10-072816	7/28/2016	**0.0069**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.031**			<0.028	U		<0.0071	U	
		VMP-6-10-102816	10/28/2016	**0.0047**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.015**			<0.027	U		<0.0068	U	
		VMP-6-10-012517	1/25/2017	**0.0014**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0037**	J		<0.026	U		<0.0064	U	
		VMP-6-10-042417	4/24/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0045**	J		<0.024	U		<0.0061	U	
		VMP-6-10-072117	7/21/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0036**	J		<0.024	U		<0.006	U	
		VMP-6-10-103117	10/31/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		**0.0023**	J		<0.022	U		<0.0055	U	
		VMP-6-10-012418	1/24/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0082**			<0.022	U		<0.0056	U	
		VMP-6-10-042318	4/23/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0035**	J		<0.024	U		<0.0062	U	
		VMP-6-10-071918	7/19/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.014**			<0.026	U		<0.0064	U	
		VMP-6-10-102218	10/22/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0086**			<0.024	U		<0.006	U	
		VMP-6-10-012219	1/22/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0031**	J		<0.023	U		<0.0057	U	
		VMP-6-10-042519	4/25/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.015**			<0.025	U		<0.0062	U	
		VMP-6-10-072219	7/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.027**			<0.026	U		<0.0064	U	
		VMP-6-10-102519	10/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.024**			<0.026	U		<0.0065	U	
		VMP-6-10-012320	1/23/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.017**			<0.027	U		<0.0067	U	
		VMP-6-10-042720	4/27/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0056**	J		<0.027	U		<0.0067	U	
		VMP-6-10-072220	7/22/2020	<0.016	U		**0.002**	J		<0.006	U		<0.011	U		<0.014	U		**0.087**			<0.027	U		<0.0067	U	
		VMP-6-10-102920	10/29/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0087**			<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	**0.005**			<0.0092	U		<0.0072	J	U	<0.0072	J	U	<0.0072	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-6-5-042915	4/29/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-6-5-072715	7/27/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0029**	J		<0.0056	U		<0.0056	U	
		VMP-6-5-102915	10/29/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.004**	J		<0.0051	U		<0.0051	U	
		VMP-6-5-020116	2/1/2016	**0.015**			<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0025**	J		<0.0058	U		<0.0058	U	
		VMP-6-5-042516	4/25/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0022**	J		<0.006	U		<0.006	U	
		VMP-6-5-072816	7/28/2016	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0023**	J		<0.0062	U		<0.0062	U	
		VMP-6-5-102816	10/28/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-6-5-012517	1/25/2017	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-6-5-042417	4/24/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-6-5-052217	5/22/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-6-5-072117	7/21/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-6-5-103117	10/31/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.002**	J		<0.0043	U		<0.0043	U	
		VMP-6-5-012418	1/24/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0035**	J		<0.0044	U		<0.0044	U	
		VMP-6-5-042318	4/23/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-6-5-071918	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-6-5-102218	10/22/2018	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0032**	J		<0.0052	U		<0.0052	U	
		VMP-6-5-013119	1/31/2019	**0.0098**			<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-6-5-042519	4/25/2019	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-6-5-072219	7/22/2019	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-6-5-102519	10/25/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-6-5-012320	1/23/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0037**	J		<0.0059	U		<0.0059	U	
		VMP-6-5-042720	4/27/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0019**	J		<0.0054	U		<0.0054	U	
		VMP-6-5-072220	7/22/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-6-5-102920	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-6-5-012921	1/29/2021	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
	10 ft	VMP-6-10-020915	2/9/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-6-10-042915	4/29/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-6-10-072715	7/27/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0019**	J		<0.0058	U		<0.0058	U	
		VMP-6-10-102915	10/29/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.004**	J		<0.0051	U		<0.0051	U	
		VMP-6-10-020116	2/1/2016	**0.015**			<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0041**	J		<0.0059	U		<0.0059	U	
		VMP-6-10-042516	4/25/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-6-10-072816	7/28/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.003**	J		<0.0055	U		<0.0055	U	
		VMP-6-10-102816	10/28/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-6-10-012517	1/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-6-10-042417	4/24/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-6-10-072117	7/21/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-6-10-103117	10/31/2017	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0025**	J		<0.0043	U		<0.0043	U	
		VMP-6-10-012418	1/24/2018	**0.00082**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-6-10-042318	4/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	J	U	**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-6-10-071918	7/19/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-6-10-102218	10/22/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0041**	J		<0.0047	U		<0.0047	U	
		VMP-6-10-012219	1/22/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-6-10-042519	4/25/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-6-10-072219	7/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-6-10-102519	10/25/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-6-10-012320	1/23/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-6-10-042720	4/27/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-6-10-072220	7/22/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-6-10-102920	10/29/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-6-5-042915	4/29/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-6-5-072715	7/27/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0026**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-6-5-102915	10/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-6-5-020116	2/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-6-5-042516	4/25/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-6-5-072816	7/28/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-6-5-102816	10/28/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-6-5-012517	1/25/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-6-5-042417	4/24/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-6-5-052217	5/22/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-5-072117	7/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.004**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-6-5-103117	10/31/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-6-5-012418	1/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-6-5-042318	4/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-6-5-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-6-5-102218	10/22/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0072**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-6-5-013119	1/31/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-6-5-042519	4/25/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-6-5-072219	7/22/2019	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-6-5-102519	10/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-6-5-012320	1/23/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-6-5-042720	4/27/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		**0.0012**	J	
		VMP-6-5-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-6-5-102920	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-5-012921	1/29/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
	10 ft	VMP-6-10-020915	2/9/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-10-042915	4/29/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-6-10-072715	7/27/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-6-10-102915	10/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		**0.0075**	J	
		VMP-6-10-020116	2/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-6-10-042516	4/25/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-6-10-072816	7/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-6-10-102816	10/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-6-10-012517	1/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-10-042417	4/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-10-072117	7/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0025**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-6-10-103117	10/31/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-6-10-012418	1/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-6-10-042318	4/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-10-071918	7/19/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		**0.0017**	J		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-10-102218	10/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0058**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-6-10-012219	1/22/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-6-10-042519	4/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-10-072219	7/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-10-102519	10/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-6-10-012320	1/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-6-10-042720	4/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-6-10-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-6-10-102920	10/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0038**	J		**0.014**	J		**0.01**		
		VMP-6-5-042915	4/29/2015	0.0049	J		<0.0057	U		<0.0064	U		<0.01	J	U	<0.0092	U		<0.0054	U		<0.056	U		**0.0011**	J	
		VMP-6-5-072715	7/27/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-6-5-102915	10/29/2015	0.0048	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.0015**	J		**0.0047**	J		<0.0044	U	
		VMP-6-5-020116	2/1/2016	0.0067	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		**0.018**			<0.061	U		**0.006**		
		VMP-6-5-042516	4/25/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0015**	J	
		VMP-6-5-072816	7/28/2016	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-6-5-102816	10/28/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-6-5-012517	1/25/2017	0.017			**0.0057**			0.0055	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.00086**	J	
		VMP-6-5-042417	4/24/2017	0.028			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0022**	J		<0.049	U		**0.0025**	J	
		VMP-6-5-052217	5/22/2017	0.017			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-6-5-072117	7/21/2017	0.01			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0021**	J		<0.05	U		**0.0028**	J	
		VMP-6-5-103117	10/31/2017	0.0081			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-6-5-012418	1/24/2018	0.036			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-6-5-042318	4/23/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0012**	J		<0.046	U		**0.0011**	J	
		VMP-6-5-071918	7/19/2018	0.34			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.0018**	J	
		VMP-6-5-102218	10/22/2018	0.034			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-6-5-013119	1/31/2019	<0.0081	U		**0.012**			0.0042	J		<0.0083	U		<0.0076	U		**0.053**			<0.046	U		**0.12**		
		VMP-6-5-042519	4/25/2019	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0035**	J	
		VMP-6-5-072219	7/22/2019	<0.011	ND,UJ	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0029**	J	
		VMP-6-5-102519	10/25/2019	<0.0092	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-6-5-012320	1/23/2020	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-6-5-042720	4/27/2020	0.0026	J		<0.0058	U		0.00076	J		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-6-5-072220	7/22/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-6-5-102920	10/29/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.0029**	J	
		VMP-6-5-012921	1/29/2021	<0.023	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
	10 ft	VMP-6-10-020915	2/9/2015	0.012			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-6-10-042915	4/29/2015	0.0094	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		**0.0016**	J	
		VMP-6-10-072715	7/27/2015	<0.011	J	U	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-6-10-102915	10/29/2015	0.015			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-6-10-020116	2/1/2016	0.0094	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	J	U	<0.062	U		**0.0023**	J	
		VMP-6-10-042516	4/25/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-6-10-072816	7/28/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-6-10-102816	10/28/2016	<0.01	J	U	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-6-10-012517	1/25/2017	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-6-10-042417	4/24/2017	0.0066	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.002**	J		<0.05	U		**0.0016**	J	
		VMP-6-10-072117	7/21/2017	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-6-10-103117	10/31/2017	0.063			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-6-10-012418	1/24/2018	0.015			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0022**	J		<0.046	U		**0.0025**	J	
		VMP-6-10-042318	4/23/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0012**	J	
		VMP-6-10-071918	7/19/2018	0.0093			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-6-10-102218	10/22/2018	0.0098			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0065**			<0.05	U		**0.0042**		
		VMP-6-10-012219	1/22/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-6-10-042519	4/25/2019	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-6-10-072219	7/22/2019	<0.0093	ND,UJ	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-6-10-102519	10/25/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-6-10-012320	1/23/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-6-10-042720	4/27/2020	0.0026	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-6-10-072220	7/22/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-6-10-102920	10/29/2020	0.013		J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.00084**	J		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.02	U		0.01	J		<0.0059	U		<0.0049	U		<0.0043	U					**0.0066**	J		<0.0059	U	
		VMP-6-5-042915	4/29/2015	**0.0012**	J		<0.015	U		<0.0064	U		<0.0054	J	U	<0.0047	U					**0.013**			<0.0064	U	
		VMP-6-5-072715	7/27/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	J	U	<0.005	U					**0.0026**	J		<0.0068	U	
		VMP-6-5-102915	10/29/2015	**0.0017**	J		0.0039	J		<0.0062	U		<0.0052	J	U	<0.0045	U					**0.0045**	J		<0.0062	U	
		VMP-6-5-020116	2/1/2016	<0.024	U		0.0041	J		<0.007	U		<0.0059	U		<0.0052	U					**0.056**			<0.007	U	
		VMP-6-5-042516	4/25/2016	<0.024	U		0.0021	J		<0.0073	U		<0.0061	U		<0.0053	U					**0.0026**	J		<0.0073	U	
		VMP-6-5-072816	7/28/2016	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.022	U					<0.015	U		<0.0075	U	
		VMP-6-5-102816	10/28/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U		<0.014	U		**0.0053**	J		<0.0068	U	
		VMP-6-5-012517	1/25/2017	**0.0016**	J		0.0033	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0032**	J		<0.0063	U	
		VMP-6-5-042417	4/24/2017	<0.019	U		0.0053	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0056**	J		<0.0056	U	
		VMP-6-5-052217	5/22/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-6-5-072117	7/21/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-6-5-103117	10/31/2017	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-6-5-012418	1/24/2018	<0.018	U		0.0035	J		<0.0054	U		<0.0045	U		<0.016	U					**0.011**			<0.0054	U	
		VMP-6-5-042318	4/23/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-6-5-071918	7/19/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-6-5-102218	10/22/2018	<0.021	U		0.0089	J		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U		<0.0063	U	
		VMP-6-5-013119	1/31/2019	<0.018	U		0.2			<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-6-5-042519	4/25/2019	<0.018	U		0.0054	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0079**	J		<0.0056	U	
		VMP-6-5-072219	7/22/2019	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-6-5-102519	10/25/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-6-5-012320	1/23/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.031**			<0.0071	U	
		VMP-6-5-042720	4/27/2020	<0.022	U		0.0016	J		**0.0018**	J		<0.0055	U		<0.019	U					**0.0071**	J		**0.005**	J	
		VMP-6-5-072220	7/22/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-6-5-102920	10/29/2020	<0.02	U		0.023			<0.0061	U		<0.005	U		<0.018	U					**0.012**			<0.0061	U	
		VMP-6-5-012921	1/29/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0021**	J		<0.006	U	
	10 ft	VMP-6-10-020915	2/9/2015	<0.02	U		0.0077	J		<0.006	U		<0.005	U		<0.0044	U					**0.014**			<0.006	U	
		VMP-6-10-042915	4/29/2015	<0.023	U		0.0096	J		<0.0068	U		<0.0057	J	U	<0.005	U					**0.014**			<0.0068	U	
		VMP-6-10-072715	7/27/2015	<0.024	U		<0.017	U		<0.007	U		<0.0059	J	U	<0.0052	U					<0.014	U		<0.007	U	
		VMP-6-10-102915	10/29/2015	<0.02	U		<0.015	U		<0.0062	U		<0.0051	J	U	<0.0045	U					**0.0042**	J		<0.0062	U	
		VMP-6-10-020116	2/1/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.035**			<0.0071	U	
		VMP-6-10-042516	4/25/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.0081**	J		<0.0071	U	
		VMP-6-10-072816	7/28/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-6-10-102816	10/28/2016	<0.022	U		0.0061	J		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.023**			<0.0065	U	
		VMP-6-10-012517	1/25/2017	<0.02	U		0.0026	J		<0.0061	U		<0.005	U		<0.018	U					**0.0011**	J		<0.0061	U	
		VMP-6-10-042417	4/24/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0046**	J		<0.0058	U	
		VMP-6-10-072117	7/21/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-6-10-103117	10/31/2017	<0.017	U		0.0021	J		<0.0052	U		<0.0043	U		<0.015	U					**0.0078**	J		<0.0052	U	
		VMP-6-10-012418	1/24/2018	<0.018	U		0.0032	J		<0.0053	U		<0.0044	U		<0.016	U					**0.011**			<0.0053	U	
		VMP-6-10-042318	4/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-6-10-071918	7/19/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0058**	J		<0.0061	U	
		VMP-6-10-102218	10/22/2018	<0.019	U		0.014			<0.0058	U		<0.0048	U		<0.017	U					**0.0076**	J		<0.0058	U	
		VMP-6-10-012219	1/22/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-6-10-042519	4/25/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-6-10-072219	7/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-6-10-102519	10/25/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-6-10-012320	1/23/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.026**			<0.0064	U	
		VMP-6-10-042720	4/27/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0044**	J		<0.0063	U	
		VMP-6-10-072220	7/22/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0054**	J		**0.0021**	J	
		VMP-6-10-102920	10/29/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.035**			<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.003**	J		**0.007**	J		<0.0066	U		<0.0066	U	
		VMP-6-5-042915	4/29/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	J	U	<0.0049	U		<0.039	J	U	<0.0071	U		<0.0071	U	
		VMP-6-5-072715	7/27/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-6-5-102915	10/29/2015	<0.0054	U		<0.0086	U		**0.0034**	J		<0.0037	U		**0.0016**	J		**0.0043**	J		<0.0069	U		<0.0069	U	
		VMP-6-5-020116	2/1/2016	<0.0061	U		<0.0098	U		**0.0032**	J		<0.0042	U		**0.0033**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-6-5-042516	4/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-6-5-072816	7/28/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-6-5-102816	10/28/2016	<0.0059	U		<0.0095	U		**0.0076**	J		<0.0041	U		<0.0052	J	U	<0.041	U		<0.0076	U		<0.0076	U	
		VMP-6-5-012517	1/25/2017	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0027**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-6-5-042417	4/24/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-6-5-052217	5/22/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-6-5-072117	7/21/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0012**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-6-5-103117	10/31/2017	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		**0.00048**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-6-5-012418	1/24/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-6-5-042318	4/23/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	J	U	<0.032	U		<0.0059	U		<0.0059	U	
		VMP-6-5-071918	7/19/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0021**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-6-5-102218	10/22/2018	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0017**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-6-5-013119	1/31/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.073**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-6-5-042519	4/25/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-6-5-072219	7/22/2019	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.014**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-6-5-102519	10/25/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-6-5-012320	1/23/2020	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-6-5-042720	4/27/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-6-5-072220	7/22/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-6-5-102920	10/29/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-6-5-012921	1/29/2021	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	10 ft	VMP-6-10-020915	2/9/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0063**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-6-10-042915	4/29/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.013**			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-6-10-072715	7/27/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-6-10-102915	10/29/2015	<0.0053	U		<0.0086	U		<0.0085	U		**0.0032**	J		**0.002**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-6-10-020116	2/1/2016	<0.0062	U		<0.01	U		**0.0024**	J		<0.0043	U		**0.0066**			<0.043	U		<0.0079	U		<0.0079	U	
		VMP-6-10-042516	4/25/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-6-10-072816	7/28/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-6-10-102816	10/28/2016	<0.0056	U		<0.0091	U		**0.0024**	J		<0.0039	U		**0.0052**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-6-10-012517	1/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-6-10-042417	4/24/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-6-10-072117	7/21/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-6-10-103117	10/31/2017	**0.0004**	J		<0.0073	U		<0.0072	U		<0.0031	U		**0.0023**	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-6-10-012418	1/24/2018	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		**0.00076**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-6-10-042318	4/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	J	U	<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-10-071918	7/19/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00064**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-6-10-102218	10/22/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0032**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-6-10-012219	1/22/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.00074**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-6-10-042519	4/25/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-6-10-072219	7/22/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.013**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-6-10-102519	10/25/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-6-10-012320	1/23/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-6-10-042720	4/27/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-6-10-072220	7/22/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-6-10-102920	10/29/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-6-5-020915	2/9/2015	<0.0065	U		<0.0068	J	U	<0.0059	J	U	<0.0059	J	U	0.032			<0.0031	U		0.00066	J		<0.0052	U	
		VMP-6-5-042915	4/29/2015	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-6-5-072715	7/27/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-6-5-102915	10/29/2015	<0.0068	U		0.0025	J		<0.0062	U		<0.0062	U		0.0034	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-6-5-020116	2/1/2016	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		0.022			<0.0037	U		0.0014	J		<0.0062	U	
		VMP-6-5-042516	4/25/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.006	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-6-5-072816	7/28/2016	<0.0082	U		<0.0085	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-6-5-102816	10/28/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0091			<0.0035	U		<0.006	U		<0.006	U	
		VMP-6-5-012517	1/25/2017	<0.0069	U		<0.0072	U		**0.0072**			<0.0063	J	U	<0.006	U		<0.0033	U		0.024			**0.0074**		
		VMP-6-5-042417	4/24/2017	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		0.0023	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-6-5-052217	5/22/2017	<0.0064	U		0.0011	J		**0.00067**	J		<0.0059	U		<0.0056	U		<0.0031	U		0.0035	J		<0.0052	U	
		VMP-6-5-072117	7/21/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0012	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-5-103117	10/31/2017	<0.0058	U		0.0012	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-6-5-012418	1/24/2018	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-6-5-042318	4/23/2018	<0.0058	U		0.0015	J		<0.0053	U		<0.0053	U		0.0034	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-6-5-071918	7/19/2018	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.0013	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-6-5-102218	10/22/2018	<0.0069	U		0.002	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-6-5-013119	1/31/2019	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		0.12			<0.0028	U		0.049			**0.015**		
		VMP-6-5-042519	4/25/2019	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0033	J		<0.0049	U	
		VMP-6-5-072219	7/22/2019	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0036	J		<0.0036	U		0.0042	J		<0.0061	U	
		VMP-6-5-102519	10/25/2019	**0.0027**	J		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-6-5-012320	1/23/2020	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-6-5-042720	4/27/2020	<0.0072	U		0.001	J		<0.0066	U		<0.0066	U		0.017			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-6-5-072220	7/22/2020	<0.007	U		0.0032	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-6-5-102920	10/29/2020	<0.0066	U		0.0018	J		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-6-5-012921	1/29/2021	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
	10 ft	VMP-6-10-020915	2/9/2015	<0.0066	U		<0.0069	J	U	<0.006	U		<0.006	U		0.00066	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-6-10-042915	4/29/2015	<0.0075	U		<0.0078	J	U	<0.0068	U		<0.0068	U		0.0011	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-6-10-072715	7/27/2015	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-6-10-102915	10/29/2015	<0.0067	U		0.0022	J		<0.0062	U		<0.0062	U		0.0013	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-6-10-020116	2/1/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-6-10-042516	4/25/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-6-10-072816	7/28/2016	<0.0073	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-6-10-102816	10/28/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	J	U	<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-6-10-012517	1/25/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.00082	J		<0.0054	U	
		VMP-6-10-042417	4/24/2017	<0.0063	U		0.0011	J		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-10-072117	7/21/2017	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-6-10-103117	10/31/2017	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-6-10-012418	1/24/2018	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		0.0016	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-6-10-042318	4/23/2018	**0.0027**	J		0.0019	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-6-10-071918	7/19/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0051	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-6-10-102218	10/22/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-10-012219	1/22/2019	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-6-10-042519	4/25/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-6-10-072219	7/22/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-6-10-102519	10/25/2019	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-6-10-012320	1/23/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-6-10-042720	4/27/2020	<0.0069	U		0.00094	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-6-10-072220	7/22/2020	<0.007	U		0.0027	J		<0.0064	U		<0.0064	U		0.0069			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-6-10-102920	10/29/2020	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.03	J	U	<0.004	U		<0.0085	J	U	<0.013	U		<0.049	U		<0.0028	U		0.018			<0.015	U	
		VMP-6-31.5-042915	4/29/2015	**0.013**	J		**0.0022**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0051	J		**0.0039**	J	
		VMP-6-31.5-042915-DUP	4/29/2015	**0.0086**	J		**0.0024**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		0.004	J		<0.018	J	U
		VMP-6-31.5-072715	7/27/2015	**0.024**	J		<0.0046	J	U	**0.0014**	J		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0089**	J	
		VMP-6-31.5-112515	11/25/2015	**0.027**	J		**0.0022**	J		<0.016	U		<0.024	U		<0.092	U		<0.0052	U		0.02	J		**0.012**	J	
		VMP-6-31.5-020116	2/1/2016	**0.034**			**0.0026**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.017			**0.007**	J	
		VMP-6-31.5-042516	4/25/2016	**0.0086**	J		**0.001**	J		**0.0013**	J		<0.015	U		<0.057	U		<0.0033	U		0.013	J		<0.017	U	
		VMP-6-31.5-072816	7/28/2016	**0.0099**	J		**0.001**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		0.015			<0.018	U	
		VMP-6-31.5-102816	10/28/2016	**0.057**			**0.0063**	J		<0.014	U		<0.022	U		<0.081	U		<0.0046	U		0.0082	J		**0.013**	J	
		VMP-6-31.5-012517	1/25/2017	**0.0082**	J		**0.00053**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0026	J		<0.014	U	
		VMP-6-31.5-042417	4/24/2017	<0.029	J	U	**0.00094**	J		**0.0013**	J		<0.013	U		<0.047	U		<0.0027	U		0.0048	J		**0.004**	J	
		VMP-6-31.5-072117	7/21/2017	**0.011**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-31.5-072117-DUP	7/21/2017	**0.028**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0085	J		**0.0049**	J	
		VMP-6-31.5-103117	10/31/2017	<0.026	J	U	<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0027**	J	
		VMP-6-31.5-013118	1/31/2018	<0.028	J	U	**0.00041**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0038	J		<0.014	U	
		VMP-6-31.5-042318	4/23/2018	**0.0057**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-31.5-071918	7/19/2018	**0.019**	J		**0.00054**	J		**0.0011**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-6-31.5-102218	10/22/2018	**0.017**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.011	J		**0.0033**	J	
		VMP-6-31.5-020119	2/1/2019	**0.018**	J		**0.1**			<0.015	U		<0.023	U		<0.087	U		<0.005	U		0.28			<0.026	U	
		VMP-6-31.5-042519	4/25/2019	**0.017**	J		**0.045**			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0051	J		<0.015	U	
		VMP-6-31.5-072219	7/22/2019	**0.032**			**0.0039**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.011	J		**0.0053**	J	
		VMP-6-31.5-102519	10/25/2019	<0.03	U		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-6-31.5-022120	2/21/2020	<0.027	U		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-6-31.5-042720	4/27/2020	**0.023**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0035**	J	
		VMP-6-31.5-072220	7/22/2020	**0.013**	J		**0.0013**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.0095	J		**0.0015**	J	
		VMP-6-31.5-102920	10/29/2020	**0.021**	J		**0.0009**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-31.5-012921	1/29/2021	**0.0066**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-6-31.5-012921-DUP	1/29/2021	**0.0088**	J		**0.001**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
	39 ft	VMP-6-39-020915	2/9/2015	<0.028	J	U	**0.002**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.012			<0.014	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.027	J	U	**0.0018**	J		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.011	J		<0.013	U	
		VMP-6-39-042915	4/29/2015	**0.011**	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0028**	J	
		VMP-6-39-072715	7/27/2015	**0.026**	J		<0.0043	J	U	<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0058**	J	
		VMP-6-39-072715-DUP	7/27/2015	**0.014**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0028**	J	
		VMP-6-39-102915	10/29/2015	**0.024**	J		<0.014	U		<0.029	U		<0.045	U		<0.17	U		<0.0096	U		0.91			<0.051	U	
		VMP-6-39-102915-DUP	10/29/2015	**0.019**	J		<0.014	U		<0.029	U		<0.045	U		<0.17	U		<0.0097	U		0.94			<0.052	U	
		VMP-6-39-020116	2/1/2016	<0.031	J	U	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0054	J		<0.016	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.032	J	U	<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-6-39-042516	4/25/2016	**0.014**	J		**0.013**			<0.01	U		<0.016	U		<0.06	U		<0.0034	U		0.17			<0.018	U	
		VMP-6-39-072816	7/28/2016	**0.0092**	J		<0.0052	U		<0.011	U		<0.017	U		<0.063	U		<0.0036	U		<0.016	U		<0.019	U	
		VMP-6-39-102816	10/28/2016	**0.019**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0074**	J	
		VMP-6-39-012517	1/25/2017	**4.7**	J		<9.1	U		<19	U		<30	U		<44	U		<6.3	U		4300			<34	U	
		VMP-6-39-042417	4/24/2017	**0.019**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0061**	J	
		VMP-6-39-042417-DUP	4/24/2017	**0.019**	J		**0.0008**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0048**	J	
		VMP-6-39-103117	10/31/2017	<0.026	J	U	<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.026	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0038**	J	
		VMP-6-39-012418	1/24/2018	**0.01**	J		**0.0052**			<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.013			<0.013	U	
		VMP-6-39-012418-DUP	1/24/2018	<0.028	J	U	**0.0054**			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0087	J		<0.014	U	
		VMP-6-39-042318	4/23/2018	**0.0079**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-6-39-071918	7/19/2018	**0.017**	J		**0.00048**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-6-39-102218	10/22/2018	**0.017**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0036**	J	
		VMP-6-39-012219	1/22/2019	**0.0079**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-6-39-042519	4/25/2019	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.01**			<0.026	U		<0.0065	U	
		VMP-6-31.5-042915	4/29/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.012**			<0.026	U		<0.0066	U	
		VMP-6-31.5-042915-DUP	4/29/2015	<0.019	J	U	<0.0097	U		<0.0071	U		<0.013	U		<0.016	U		**0.012**			<0.032	U		<0.008	U	
		VMP-6-31.5-072715	7/27/2015	**0.014**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.019**			<0.03	U		<0.0074	U	
		VMP-6-31.5-112515	11/25/2015	**0.015**	J		<0.015	U		<0.011	U		<0.02	U		<0.025	U		**0.011**	J		<0.049	U		<0.012	U	
		VMP-6-31.5-020116	2/1/2016	**0.0042**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0054**	J		<0.028	U		<0.007	U	
		VMP-6-31.5-042516	4/25/2016	**0.0027**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0063**	J		<0.03	U		<0.0077	U	
		VMP-6-31.5-072816	7/28/2016	**0.0015**	J		<0.0098	U		<0.0071	U		<0.013	U		<0.016	U		**0.02**			<0.032	U		<0.008	U	
		VMP-6-31.5-102816	10/28/2016	**0.0068**	J		<0.013	U		<0.0096	U		<0.018	U		<0.022	U		**0.0056**	J		<0.043	U		<0.011	U	
		VMP-6-31.5-012517	1/25/2017	**0.0062**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0044**	J		<0.024	U		<0.0062	U	
		VMP-6-31.5-042417	4/24/2017	**0.0024**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.002**	J		<0.025	U		<0.0063	U	
		VMP-6-31.5-072117	7/21/2017	**0.0017**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0018**	J		<0.024	U		<0.0061	U	
		VMP-6-31.5-072117-DUP	7/21/2017	**0.0037**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0019**	J		<0.024	U		<0.0062	U	
		VMP-6-31.5-103117	10/31/2017	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.01**			<0.022	U		<0.0056	U	
		VMP-6-31.5-013118	1/31/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0091**			<0.024	U		<0.0061	U	
		VMP-6-31.5-042318	4/23/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0028**	J		<0.024	U		<0.0062	U	
		VMP-6-31.5-071918	7/19/2018	**0.0046**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.015**			<0.025	U		<0.0063	U	
		VMP-6-31.5-102218	10/22/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0096**			<0.025	U		<0.0062	U	
		VMP-6-31.5-020119	2/1/2019	<0.028	U		<0.014	U		<0.01	U		<0.019	U		<0.024	U		<0.011	U		<0.046	U		<0.012	U	
		VMP-6-31.5-042519	4/25/2019	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0066**			<0.027	U		<0.0067	U	
		VMP-6-31.5-072219	7/22/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0061**	J		<0.027	U		<0.0068	U	
		VMP-6-31.5-102519	10/25/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0058**	J		<0.026	U		<0.0066	U	
		VMP-6-31.5-022120	2/21/2020	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0036**	J		<0.023	U		<0.0058	U	
		VMP-6-31.5-042720	4/27/2020	**0.16**			<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0037**	J		<0.028	U		<0.0071	U	
		VMP-6-31.5-072220	7/22/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0059**	J		<0.028	U		<0.0071	U	
		VMP-6-31.5-102920	10/29/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.004**	J		<0.024	U		<0.0062	U	
		VMP-6-31.5-012921	1/29/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0038**	J		<0.026	U	UJ	<0.0065	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.00078**	J		<0.028	U	UJ	<0.0071	U	
	39 ft	VMP-6-39-020915	2/9/2015	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0031**	J		<0.024	U		<0.006	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0028**	J		<0.023	U		<0.0058	U	
		VMP-6-39-042915	4/29/2015	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	J	U	<0.025	U		<0.0062	U	
		VMP-6-39-072715	7/27/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0057**	J		<0.028	U		<0.007	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0059**	J		<0.029	U		<0.0072	U	
		VMP-6-39-102915	10/29/2015	**0.0075**	J		<0.027	U		<0.02	U		<0.037	U		<0.046	U		<0.021	U		<0.09	U		<0.022	U	
		VMP-6-39-102915-DUP	10/29/2015	**0.0043**	J		<0.028	U		<0.02	U		<0.037	U		<0.046	U		<0.021	U		<0.09	U		<0.023	U	
		VMP-6-39-020116	2/1/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0015**	J		<0.027	U		<0.0068	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-6-39-042516	4/25/2016	**0.00088**	J		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-6-39-072816	7/28/2016	<0.02	U		<0.01	U		<0.0075	U		<0.014	U		<0.017	U		<0.008	U		<0.034	U		<0.0085	U	
		VMP-6-39-102816	10/28/2016	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0064	U	
		VMP-6-39-012517	1/25/2017	<36	U		<18	U		<13	U		<24	U		<30	U		<14	U		<24	U		<15	U	
		VMP-6-39-042417	4/24/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-6-39-042417-DUP	4/24/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-6-39-103117	10/31/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0044**	J		<0.023	U		<0.0057	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.004**	J		<0.023	U		<0.0058	U	
		VMP-6-39-012418	1/24/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-6-39-012418-DUP	1/24/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-6-39-042318	4/23/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0023**	J		<0.024	U		<0.0062	U	
		VMP-6-39-071918	7/19/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0034**	J		<0.026	U		<0.0064	U	
		VMP-6-39-102218	10/22/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0042**	J		<0.024	U		<0.006	U	
		VMP-6-39-012219	1/22/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0039**	J		<0.023	U		<0.0057	U	
		VMP-6-39-042519	4/25/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0031**	J		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-6-31.5-042915	4/29/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-6-31.5-042915-DUP	4/29/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0022**	J		<0.0062	U		<0.0062	U	
		VMP-6-31.5-072715	7/27/2015	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0022**	J		<0.0058	U		<0.0058	U	
		VMP-6-31.5-112515	11/25/2015	<0.0081	U		<0.018	U		<0.014	U		<0.014	U		<0.014	U		**0.0037**	J		<0.0096	U		<0.0096	U	
		VMP-6-31.5-020116	2/1/2016	**0.017**			<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0033**	J		<0.0054	U		<0.0054	U	
		VMP-6-31.5-042516	4/25/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.002**	J		<0.006	U		<0.006	U	
		VMP-6-31.5-072816	7/28/2016	**0.0021**	J		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0023**	J		<0.0063	U		<0.0063	U	
		VMP-6-31.5-102816	10/28/2016	**0.0043**	J		<0.016	U		<0.012	U		<0.012	U		<0.012	U		<0.01	U		<0.0085	U		<0.0085	U	
		VMP-6-31.5-012517	1/25/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-042417	4/24/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-6-31.5-072117	7/21/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-072117-DUP	7/21/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-103117	10/31/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0022**	J		<0.0044	U		<0.0044	U	
		VMP-6-31.5-013118	1/31/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-042318	4/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-071918	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-6-31.5-102218	10/22/2018	**0.0014**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0035**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-020119	2/1/2019	**0.086**			<0.017	U		<0.013	U		<0.013	U		<0.013	U		<0.011	U		<0.0091	U		<0.0091	U	
		VMP-6-31.5-042519	4/25/2019	**0.045**			<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-6-31.5-072219	7/22/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-6-31.5-102519	10/25/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.002**	J		<0.0051	U		<0.0051	U	
		VMP-6-31.5-022120	2/21/2020	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-6-31.5-042720	4/27/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-6-31.5-072220	7/22/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0032**	J		<0.0055	U		<0.0055	U	
		VMP-6-31.5-102920	10/29/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-6-31.5-012921	1/29/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
	39 ft	VMP-6-39-020915	2/9/2015	**0.001**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0034**	J		<0.0047	U		<0.0047	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0034**	J		<0.0046	U		<0.0046	U	
		VMP-6-39-042915	4/29/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	J	U
		VMP-6-39-072715	7/27/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0022**	J		<0.0055	U		<0.0055	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.002**	J		<0.0056	U		<0.0056	U	
		VMP-6-39-102915	10/29/2015	<0.015	U		<0.033	U		<0.026	U		<0.026	U		<0.026	U		<0.021	U		<0.018	U		<0.018	U	
		VMP-6-39-102915-DUP	10/29/2015	<0.015	U		<0.034	U		<0.026	U		<0.026	U		<0.026	U		**0.0081**	J		<0.018	U		<0.018	U	
		VMP-6-39-020116	2/1/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.0046	J	U	<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-6-39-042516	4/25/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0022**	J		<0.0063	U		<0.0063	U	
		VMP-6-39-072816	7/28/2016	<0.0056	U		<0.012	U		<0.0098	U		<0.0098	U		<0.0098	U		**0.0031**	J		<0.0066	U		<0.0066	U	
		VMP-6-39-102816	10/28/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-6-39-012517	1/25/2017	**210**			<22	U		<17	U		<17	U		<17	U		<14	U		<12	U		<12	U	
		VMP-6-39-042417	4/24/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-6-39-042417-DUP	4/24/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-6-39-103117	10/31/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-6-39-012418	1/24/2018	**0.0014**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0032**	J		<0.0044	U		<0.0044	U	
		VMP-6-39-012418-DUP	1/24/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0041**	J		<0.0047	U		<0.0047	U	
		VMP-6-39-042318	4/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-6-39-071918	7/19/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-6-39-102218	10/22/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0042**	J		<0.0047	U		<0.0047	U	
		VMP-6-39-012219	1/22/2019	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-6-39-042519	4/25/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0032**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-6-31.5-042915	4/29/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-6-31.5-042915-DUP	4/29/2015	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	J	U
		VMP-6-31.5-072715	7/27/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-6-31.5-112515	11/25/2015	<0.0094	U		<0.0094	U		<0.0094	U		**0.023**	J		<0.011	U		<0.011	U		<0.011	U		<0.034	U	
		VMP-6-31.5-020116	2/1/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-6-31.5-042516	4/25/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-6-31.5-072816	7/28/2016	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-6-31.5-102816	10/28/2016	<0.0083	U		<0.0083	U		<0.0083	U		<0.073	U		<0.0097	U		<0.0095	U		<0.0095	U		<0.03	U	
		VMP-6-31.5-012517	1/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-31.5-042417	4/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-6-31.5-072117	7/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-6-31.5-072117-DUP	7/21/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0039**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-31.5-103117	10/31/2017	<0.0043	U		<0.0043	U		<0.0043	U		**0.0028**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-6-31.5-013118	1/31/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-31.5-042318	4/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-31.5-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-6-31.5-102218	10/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-31.5-020119	2/1/2019	<0.0089	U		<0.0089	U		<0.0089	U		<0.078	U		<0.01	U		<0.01	U		<0.01	U		<0.032	U	
		VMP-6-31.5-042519	4/25/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-6-31.5-072219	7/22/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-6-31.5-102519	10/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-6-31.5-022120	2/21/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-6-31.5-042720	4/27/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		**0.0017**	J	
		VMP-6-31.5-072220	7/22/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-6-31.5-102920	10/29/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-31.5-012921	1/29/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
	39 ft	VMP-6-39-020915	2/9/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-6-39-042915	4/29/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-39-072715	7/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-6-39-102915	10/29/2015	<0.017	U		<0.017	U		<0.017	U		**0.017**	J		<0.02	U		<0.02	U		<0.02	U		<0.062	U	
		VMP-6-39-102915-DUP	10/29/2015	<0.017	U		<0.017	U		<0.017	U		<0.15	U		<0.02	U		<0.02	U		<0.02	U		<0.063	U	
		VMP-6-39-020116	2/1/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-6-39-042516	4/25/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-6-39-072816	7/28/2016	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0076	U		<0.0074	U		<0.0074	U		<0.024	U	
		VMP-6-39-102816	10/28/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-39-012517	1/25/2017	<11	U		<11	U		<11	U		<40	U		<13	U		<13	U		<13	U		<41	U	
		VMP-6-39-042417	4/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0025**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-39-042417-DUP	4/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-39-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0053**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0039**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-6-39-012418	1/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-6-39-012418-DUP	1/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-6-39-042318	4/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-6-39-071918	7/19/2018	<0.0049	U		<0.0049	U		<0.0049	U		**0.0094**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-6-39-102218	10/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0017**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-6-39-012219	1/22/2019	<0.0044	U		<0.0044	U		<0.0044	U		**0.0036**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-6-39-042519	4/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	0.012			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-6-31.5-042915	4/29/2015	0.0038	J		**0.0027**	J		0.0018	J		<0.0098	J	U	<0.0089	U		**0.0029**	J		<0.055	U		**0.0053**		
		VMP-6-31.5-042915-DUP	4/29/2015	<0.012	U		**0.0025**	J		<0.0076	U		<0.012	J	U	<0.011	U		**0.0024**	J		<0.066	U		**0.0056**		
		VMP-6-31.5-072715	7/27/2015	<0.011	J	U	<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-6-31.5-112515	11/25/2015	0.022			**0.013**			0.015			<0.018	U		<0.016	U		**0.0076**	J		<0.1	U		**0.012**		
		VMP-6-31.5-020116	2/1/2016	0.064			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	J	U	<0.057	U		**0.0032**	J	
		VMP-6-31.5-042516	4/25/2016	<0.011	U		<0.0064	U		0.00098	J		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0011**	J	
		VMP-6-31.5-072816	7/28/2016	<0.012	U		<0.0067	U		0.0017	J		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-6-31.5-102816	10/28/2016	0.026			**0.16**			0.016			<0.016	U		<0.015	U		**0.0038**	J		<0.089	U		**0.0032**	J	
		VMP-6-31.5-012517	1/25/2017	<0.009	U		**0.0016**	J		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-6-31.5-042417	4/24/2017	0.0066	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0019**	J	
		VMP-6-31.5-072117	7/21/2017	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0014**	J	
		VMP-6-31.5-072117-DUP	7/21/2017	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0044**	J		<0.051	U		**0.0046**		
		VMP-6-31.5-103117	10/31/2017	0.018			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-6-31.5-013118	1/31/2018	0.0045	J		<0.0051	U		0.0017	J		<0.0091	U		<0.0083	U		**0.0016**	J		<0.05	U		**0.0033**	J	
		VMP-6-31.5-042318	4/23/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-6-31.5-071918	7/19/2018	0.2			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-6-31.5-102218	10/22/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0014**	J		<0.051	U		**0.0052**		
		VMP-6-31.5-020119	2/1/2019	<0.017	U		**0.83**			0.21			<0.017	U		<0.016	U		**0.74**			<0.096	U		**0.94**		
		VMP-6-31.5-042519	4/25/2019	<0.0098	U		**0.42**			0.09			<0.0099	U		<0.009	U		**0.46**			<0.055	U		**0.29**		
		VMP-6-31.5-072219	7/22/2019	<0.0099	ND,UJ	UJ	**0.0027**	J		<0.0065	U		<0.01	U		<0.0092	U		**0.0049**	J		<0.056	U		**0.0024**	J	
		VMP-6-31.5-102519	10/25/2019	<0.0096	U	UJ	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		**0.0013**	J	
		VMP-6-31.5-022120	2/21/2020	0.01			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-6-31.5-042720	4/27/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		**0.00078**	J		<0.059	U		<0.0049	U	
		VMP-6-31.5-072220	7/22/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-6-31.5-102920	10/29/2020	<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-6-31.5-012921	1/29/2021	<0.024	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.0049**		
		VMP-6-31.5-012921-DUP	1/29/2021	<0.026	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0044**	J	
	39 ft	VMP-6-39-020915	2/9/2015	<0.0088	U		**0.00094**	J		<0.0057	U		<0.0089	U		<0.0081	U		**0.0041**	J		<0.05	U		**0.0093**		
		VMP-6-39-020915-DUP	2/9/2015	0.01			**0.0008**	J		<0.0055	U		<0.0086	U		<0.0079	U		**0.0034**	J		<0.048	U		**0.0095**		
		VMP-6-39-042915	4/29/2015	0.0036	J		<0.0052	U		0.0024	J		<0.0092	J	U	<0.0084	U		<0.0049	U		<0.051	U		**0.0013**	J	
		VMP-6-39-072715	7/27/2015	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-6-39-102915	10/29/2015	<0.033	U		<0.019	U		<0.021	U		<0.033	U		<0.03	U		<0.018	U		<0.18	U		**0.022**		
		VMP-6-39-102915-DUP	10/29/2015	0.016	J		<0.019	U		<0.022	U		<0.034	U		<0.03	U		<0.018	U		<0.19	U		**0.016**		
		VMP-6-39-020116	2/1/2016	0.0084	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	J	U	<0.056	U		**0.0022**	J	
		VMP-6-39-020116-DUP	2/1/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	J	U	<0.057	U		**0.0019**	J	
		VMP-6-39-042516	4/25/2016	<0.012	U		**0.031**			0.0054	J		<0.012	U		<0.011	U		**0.091**			<0.066	U		**0.24**		
		VMP-6-39-072816	7/28/2016	<0.012	U		<0.0071	U		<0.008	U		<0.012	U		<0.011	U		<0.0067	U		<0.07	U		<0.0058	U	
		VMP-6-39-102816	10/28/2016	<0.0093	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-6-39-012517	1/25/2017	<22	U		<12	U		<14	U		<22	U		<20	U		**25**			<120	U		**300**		
		VMP-6-39-042417	4/24/2017	0.041			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0016**	J	
		VMP-6-39-042417-DUP	4/24/2017	0.034			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0017**	J	
		VMP-6-39-103117	10/31/2017	0.019			<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-6-39-103117-DUP	10/31/2017	0.012			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-6-39-012418	1/24/2018	0.049		J	**0.002**	J		0.0016	J	J	<0.0083	U		<0.0076	U		**0.0051**			<0.046	U		**0.007**		
		VMP-6-39-012418-DUP	1/24/2018	0.0096		J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		**0.0024**	J		<0.05	U		**0.0039**	J	
		VMP-6-39-042318	4/23/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-6-39-071918	7/19/2018	0.013			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-6-39-102218	10/22/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-6-39-012219	1/22/2019	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-6-39-042519	4/25/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.021	U		0.0062	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.0081**	J		<0.0062	U	
		VMP-6-31.5-042915	4/29/2015	<0.021	U		0.005	J		<0.0063	U		<0.0052	J	U	<0.0046	U					**0.0033**	J		<0.0063	U	
		VMP-6-31.5-042915-DUP	4/29/2015	<0.025	U		0.0054	J		<0.0076	U		<0.0063	J	U	<0.0056	U					**0.0031**	J		<0.0076	U	
		VMP-6-31.5-072715	7/27/2015	<0.024	U		0.0033	J		<0.0071	U		<0.0059	U		<0.0052	U					<0.014	U		<0.0071	U	
		VMP-6-31.5-112515	11/25/2015	<0.039	U		0.0089	J		**0.014**			<0.0097	U		<0.0085	U					**0.027**			**0.04**		
		VMP-6-31.5-020116	2/1/2016	<0.022	U		0.0052	J		<0.0066	U		<0.0055	U		<0.0048	U					**0.05**			**0.0018**	J	
		VMP-6-31.5-042516	4/25/2016	<0.024	U		0.023			**0.0022**	J		<0.0061	U		<0.0053	U					**0.0037**	J		**0.0048**	J	
		VMP-6-31.5-072816	7/28/2016	<0.025	U		0.017	J		**0.0034**	J		<0.0063	U		<0.022	U					**0.0056**	J		**0.0067**	J	
		VMP-6-31.5-102816	10/28/2016	<0.034	U		0.012	J		**0.0072**	J		**0.013**			<0.03	U		<0.022	U		**0.15**			**0.0042**	J	
		VMP-6-31.5-012517	1/25/2017	<0.019	U		0.0024	J		<0.0058	J	U	<0.0049	U		<0.017	U					**0.0027**	J		**0.0045**	J	
		VMP-6-31.5-042417	4/24/2017	<0.02	U		0.0073	J		<0.006	U		<0.005	U		<0.018	U					**0.0063**	J		<0.006	U	
		VMP-6-31.5-072117	7/21/2017	<0.019	U		0.0019	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-6-31.5-072117-DUP	7/21/2017	<0.019	U		0.0048	J		<0.0058	U		<0.0049	U		<0.017	U					**0.0036**	J		<0.0058	U	
		VMP-6-31.5-103117	10/31/2017	<0.018	U		0.0016	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0024**	J		<0.0053	U	
		VMP-6-31.5-013118	1/31/2018	<0.019	U		0.0034	J		**0.0016**	J		<0.0048	U		<0.017	U					**0.0012**	J		**0.0091**		
		VMP-6-31.5-042318	4/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-6-31.5-071918	7/19/2018	<0.02	U		0.0072	J		<0.0059	U		<0.005	U		<0.017	U					**0.0061**	J		<0.0059	U	
		VMP-6-31.5-102218	10/22/2018	<0.02	U		0.012	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-6-31.5-020119	2/1/2019	<0.037	U		1.1			**0.029**			<0.0092	U		<0.032	U					**0.0049**	J		**0.036**		
		VMP-6-31.5-042519	4/25/2019	<0.021	U		0.11			**0.013**			<0.0053	U		<0.019	U					<0.013	U		**0.016**		
		VMP-6-31.5-072219	7/22/2019	<0.022	U		0.012	J		<0.0065	U		<0.0054	U		<0.019	U					**0.011**	J		<0.0065	U	
		VMP-6-31.5-102519	10/25/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	J	U
		VMP-6-31.5-022120	2/21/2020	<0.018	U		0.0047	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-6-31.5-042720	4/27/2020	<0.023	U		0.0015	J		<0.0068	U		<0.0056	U		<0.02	U					**0.0054**	J		**0.0022**	J	
		VMP-6-31.5-072220	7/22/2020	<0.022	U		0.0045	J		<0.0067	U		<0.0056	U		<0.02	U					<0.013	J	U	<0.0067	U	
		VMP-6-31.5-102920	10/29/2020	<0.019	U		0.002	J		<0.0058	U		<0.0049	U		<0.017	U					**0.015**			<0.0058	U	
		VMP-6-31.5-012921	1/29/2021	<0.02	U		0.0089	J		<0.0062	U		<0.0051	U		<0.018	U					**0.0046**	J		<0.0062	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.023	U		0.008	J		<0.0068	U		<0.0056	U		<0.02	U					**0.015**			<0.0068	U	
	39 ft	VMP-6-39-020915	2/9/2015	<0.019	U		0.0092	J		<0.0057	U		<0.0048	U		<0.0042	U					**0.0066**	J		<0.0057	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.018	U		0.0084	J		<0.0055	U		<0.0046	U		<0.004	U					**0.018**			<0.0055	U	
		VMP-6-39-042915	4/29/2015	<0.02	U		0.0013	J		<0.0059	U		<0.0049	J	U	<0.0043	U					<0.012	J	U	<0.0059	U	
		VMP-6-39-072715	7/27/2015	<0.022	U		0.0054	J		<0.0066	U		<0.0055	J	U	<0.0049	U					<0.013	U		<0.0066	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					<0.014	U		<0.0068	U	
		VMP-6-39-102915	10/29/2015	<0.071	U		5			<0.021	U		**0.0097**	J		<0.016	U					**0.0043**	J		<0.021	U	
		VMP-6-39-102915-DUP	10/29/2015	<0.072	U		5.6			<0.022	U		**0.0099**	J		<0.016	U					<0.043	U		<0.022	U	
		VMP-6-39-020116	2/1/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.011**	J		<0.0065	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.012**	J		<0.0065	U	
		VMP-6-39-042516	4/25/2016	<0.025	U		0.46			<0.0076	U		<0.0064	U		<0.0056	U					**0.022**			**0.0018**	J	
		VMP-6-39-072816	7/28/2016	<0.027	U		0.0054	J		<0.008	U		<0.0067	U		<0.024	U					<0.016	U		<0.008	U	
		VMP-6-39-102816	10/28/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.011**	J		<0.006	U	
		VMP-6-39-012517	1/25/2017	<47	U		9500			<14	U		<12	U		<10	U					<28	U		<14	U	
		VMP-6-39-042417	4/24/2017	<0.019	U		0.0029	J		<0.0058	U		<0.0048	U		<0.017	U					**0.01**	J		<0.0058	U	
		VMP-6-39-042417-DUP	4/24/2017	<0.02	U		0.0018	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0055**	J		<0.0059	U	
		VMP-6-39-103117	10/31/2017	<0.018	U		0.0079	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0037**	J		<0.0054	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0024**	J		<0.0055	U	
		VMP-6-39-012418	1/24/2018	<0.018	U		0.0099	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0061**	J		<0.0053	U	
		VMP-6-39-012418-DUP	1/24/2018	<0.019	U		0.007	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0026**	J		<0.0057	U	
		VMP-6-39-042318	4/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-6-39-071918	7/19/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0031**	J		<0.0061	U	
		VMP-6-39-102218	10/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0032**	J		<0.0058	U	
		VMP-6-39-012219	1/22/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0028**	J		<0.0054	U	
		VMP-6-39-042519	4/25/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.00087**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-6-31.5-042915	4/29/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0037**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-6-31.5-042915-DUP	4/29/2015	<0.0066	U		<0.01	U		<0.01	U		<0.0045	U		**0.0038**	J		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-6-31.5-072715	7/27/2015	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-6-31.5-112515	11/25/2015	<0.01	U		<0.016	U		<0.016	U		<0.007	U		<0.0089	U		<0.07	U		<0.013	U		<0.013	U	
		VMP-6-31.5-020116	2/1/2016	<0.0057	U		<0.0092	U		**0.0069**	J		**0.0036**	J		**0.0072**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-6-31.5-042516	4/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-6-31.5-072816	7/28/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-6-31.5-102816	10/28/2016	<0.0089	U		<0.014	U		**0.0041**	J		<0.0062	U		**0.051**			<0.062	U		<0.011	U		<0.011	U	
		VMP-6-31.5-012517	1/25/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00094**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-31.5-042417	4/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-6-31.5-072117	7/21/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-6-31.5-072117-DUP	7/21/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-31.5-103117	10/31/2017	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0016**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-6-31.5-013118	1/31/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-31.5-042318	4/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-31.5-071918	7/19/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0068**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-6-31.5-102218	10/22/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-6-31.5-020119	2/1/2019	<0.0096	U		<0.015	U		<0.015	U		<0.0066	U		**2**			<0.067	U		<0.012	U		<0.012	U	
		VMP-6-31.5-042519	4/25/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**1.5**			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-6-31.5-072219	7/22/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.027**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-6-31.5-102519	10/25/2019	<0.0054	U		<0.0087	U		**0.0017**	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-6-31.5-022120	2/21/2020	<0.0048	U		<0.0077	U		**0.0021**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-6-31.5-042720	4/27/2020	<0.0059	U		<0.0095	U		**0.0043**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-6-31.5-072220	7/22/2020	<0.0058	U		<0.0094	U		**0.0038**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-6-31.5-102920	10/29/2020	<0.0051	U		<0.0082	U		**0.0026**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-31.5-012921	1/29/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.001**	J		<0.041	U		<0.0075	U		<0.0075	U	
	39 ft	VMP-6-39-020915	2/9/2015	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0014**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0014**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-6-39-042915	4/29/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-6-39-072715	7/27/2015	<0.0058	U		<0.0093	U		<0.0092	U		**0.0034**	J		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-6-39-102915	10/29/2015	<0.018	U		<0.03	U		<0.029	U		<0.013	U		<0.016	U		<0.13	U		<0.024	U		<0.024	U	
		VMP-6-39-102915-DUP	10/29/2015	<0.019	U		<0.03	U		<0.03	U		<0.013	U		<0.016	U		<0.13	U		<0.024	U		<0.024	U	
		VMP-6-39-020116	2/1/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00065**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0011**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-6-39-042516	4/25/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		**0.14**			<0.046	U		<0.0085	U		<0.0085	U	
		VMP-6-39-072816	7/28/2016	<0.007	U		<0.011	U		<0.011	U		<0.0048	U		<0.0062	U		<0.048	U		<0.0089	U		<0.0089	U	
		VMP-6-39-102816	10/28/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-6-39-012517	1/25/2017	<12	U		<20	U		**20**			<8.4	U		**1.8**	J		<85	U		<16	U		<16	U	
		VMP-6-39-042417	4/24/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-39-042417-DUP	4/24/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-39-103117	10/31/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.0062**			<0.033	U		<0.006	U		<0.006	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.0036**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-6-39-012418	1/24/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0034**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-6-39-012418-DUP	1/24/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0022**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-6-39-042318	4/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-6-39-071918	7/19/2018	<0.0053	U		<0.0085	U		**0.0032**	J		<0.0036	U		**0.00082**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-6-39-102218	10/22/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-6-39-012219	1/22/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.0012**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-6-39-042519	4/25/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-6	31.5 ft	VMP-6-31.5-020915	2/9/2015	<0.0068	U		<0.0071	J	U	<0.0062	J	U	<0.0062	U		0.0064			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-6-31.5-042915	4/29/2015	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	U		0.0056	J		<0.0033	U		0.0048	J		**0.0018**	J	
		VMP-6-31.5-042915-DUP	4/29/2015	<0.0083	U		<0.0086	U		<0.0076	U		<0.0076	U		0.0053	J		<0.0039	U		0.0042	J		<0.0067	U	
		VMP-6-31.5-072715	7/27/2015	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-6-31.5-112515	11/25/2015	<0.013	U		0.003	J		**0.036**			**0.0059**	J		0.076			<0.006	U		0.0069	J		<0.01	U	
		VMP-6-31.5-020116	2/1/2016	<0.0072	U		0.0012	J		<0.0066	U		<0.0066	U		0.0021	J		<0.0034	U		0.0014	J		<0.0058	U	
		VMP-6-31.5-042516	4/25/2016	<0.008	U		<0.0083	U		**0.0024**	J		<0.0073	U		0.12			<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-6-31.5-072816	7/28/2016	<0.0083	U		<0.0087	U		<0.0076	J	U	<0.0076	U		0.1			<0.004	U		<0.0067	U		<0.0067	U	
		VMP-6-31.5-102816	10/28/2016	<0.011	U		<0.012	U		**0.0099**	J		<0.01	U		0.0035	J		<0.0054	U		0.56			**0.12**		
		VMP-6-31.5-012517	1/25/2017	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		0.0016	J		<0.003	U		0.0056			**0.0013**	J	
		VMP-6-31.5-042417	4/24/2017	<0.0066	U		0.0017	J		<0.006	U		<0.006	U		0.029			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-6-31.5-072117	7/21/2017	<0.0063	U		0.0017	J		<0.0058	U		<0.0058	U		0.0011	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-31.5-072117-DUP	7/21/2017	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		0.004	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-6-31.5-103117	10/31/2017	<0.0058	U		0.0016	J		<0.0053	U		<0.0053	U		0.00085	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-6-31.5-013118	1/31/2018	<0.0064	U		0.0072			**0.0092**			<0.0058	U		0.0044	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-31.5-042318	4/23/2018	<0.0064	U		0.0023	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-6-31.5-071918	7/19/2018	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-6-31.5-102218	10/22/2018	<0.0064	U		0.0019	J		<0.0059	U		<0.0059	U		0.00085	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-6-31.5-020119	2/1/2019	<0.012	U		<0.013	U		**0.074**			**0.037**			1.8			<0.0057	U		3			**1**		
		VMP-6-31.5-042519	4/25/2019	<0.007	U		<0.0073	U		**0.028**			**0.013**			1			<0.0033	U		1.5			**0.47**		
		VMP-6-31.5-072219	7/22/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0044	J		<0.0034	U		0.0067			**0.0024**	J	
		VMP-6-31.5-102519	10/25/2019	<0.0068	U		0.0044	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-6-31.5-022120	2/21/2020	<0.006	U		0.0031	J		<0.0055	U		<0.0055	U		0.0026	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-6-31.5-042720	4/27/2020	<0.0074	U		0.0038	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-6-31.5-072220	7/22/2020	<0.0073	U		0.0029	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-6-31.5-102920	10/29/2020	<0.0064	U		0.0021	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-6-31.5-012921	1/29/2021	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.0023	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-6-31.5-012921-DUP	1/29/2021	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0025	J		<0.0035	U		<0.006	U		<0.006	U	
	39 ft	VMP-6-39-020915	2/9/2015	<0.0063	U		<0.0065	J	U	<0.0057	U		<0.0057	U		0.011			<0.003	U		0.001	J		<0.005	U	
		VMP-6-39-020915-DUP	2/9/2015	<0.006	U		<0.0063	J	U	<0.0055	U		<0.0055	U		0.01			<0.0029	U		0.0011	J		<0.0049	U	
		VMP-6-39-042915	4/29/2015	<0.0064	J	U	<0.0067	U		<0.0059	J	U	<0.0059	U		<0.0056	U		<0.0031	U		0.0014	J		<0.0052	U	
		VMP-6-39-072715	7/27/2015	<0.0072	U		0.0015	J		<0.0066	U		<0.0066	U		0.0032	J		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-6-39-072715-DUP	7/27/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0029	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-6-39-102915	10/29/2015	<0.023	U		<0.024	U		<0.021	U		<0.021	U		0.7			<0.011	U		<0.019	U		<0.019	U	
		VMP-6-39-102915-DUP	10/29/2015	<0.024	U		<0.024	U		<0.022	U		<0.022	U		0.76			<0.011	U		<0.019	U		<0.019	U	
		VMP-6-39-020116	2/1/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	J	U	<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-6-39-020116-DUP	2/1/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		0.0019	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-6-39-042516	4/25/2016	<0.0084	U		<0.0087	U		**0.0033**	J		**0.0011**	J		0.29			<0.004	U		0.063			**0.019**		
		VMP-6-39-072816	7/28/2016	<0.0088	U		<0.0092	U		<0.008	U		<0.008	U		0.0048	J		<0.0042	U		<0.0071	U		<0.0071	U	
		VMP-6-39-102816	10/28/2016	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-6-39-012517	1/25/2017	<15	U		<16	U		<14	U		<14	U		610			<7.3	U		<12	U		<12	U	
		VMP-6-39-042417	4/24/2017	<0.0064	U		0.0025	J		**0.00073**	J		<0.0058	U		0.0022	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-39-042417-DUP	4/24/2017	<0.0064	U		0.0026	J		<0.0059	U		<0.0059	U		0.0019	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-6-39-103117	10/31/2017	<0.006	U		0.0023	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-6-39-103117-DUP	10/31/2017	<0.006	U		0.0023	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-6-39-012418	1/24/2018	<0.0058	U		0.0013	J		<0.0053	U		**0.00064**	J		0.019		J	<0.0028	U		0.004	J		**0.0013**	J	
		VMP-6-39-012418-DUP	1/24/2018	<0.0063	U		0.0014	J		<0.0057	U		<0.0057	U		0.0069		J	<0.003	U		<0.005	U		<0.005	U	
		VMP-6-39-042318	4/23/2018	<0.0064	U		0.0034	J		<0.0058	U		<0.0058	U		<0.0056	J	U	<0.003	U		<0.0052	U		<0.0052	U	
		VMP-6-39-071918	7/19/2018	<0.0066	U		0.0017	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-6-39-102218	10/22/2018	<0.0063	U		0.0025	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-6-39-012219	1/22/2019	<0.006	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		0.00078	J		<0.0048	U	
		VMP-6-39-042519	4/25/2019	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	**0.016**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-7-5-043015	4/30/2015	**0.01**	J		**0.0015**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0051**	J	
		VMP-7-5-072715	7/27/2015	**0.04**			<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0098**	J	
		VMP-7-5-102815	10/28/2015	**0.039**			**0.003**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.015			**0.066**		
		VMP-7-5-012716	1/27/2016	**0.018**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.005**	J	
		VMP-7-5-042916	4/29/2016	**0.0084**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-7-5-072616	7/26/2016	**0.026**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0056**	J	
		VMP-7-5-102516	10/25/2016	**0.0075**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-5-012517	1/25/2017	**0.013**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0065	J		**0.0038**	J	
		VMP-7-5-042417	4/24/2017	**0.038**			**0.0018**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.0041	J		**0.011**	J	
		VMP-7-5-072117	7/21/2017	**0.028**	J		**0.00079**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.007**	J	
		VMP-7-5-102517	10/25/2017	**0.022**	J		<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0026	J		**0.004**	J	
		VMP-7-5-012518	1/25/2018	<0.027	J	U	<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-7-5-042318	4/23/2018	**0.0086**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-5-071918	7/19/2018	**0.081**			**0.00031**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0041**	J	
		VMP-7-5-102218	10/22/2018	**0.016**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-5-012219	1/22/2019	**0.02**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		**0.0036**	J	
		VMP-7-5-042519	4/25/2019	**0.03**			<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-5-072319	7/23/2019	**0.038**			**0.0015**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-5-072319-DUP	7/23/2019	**0.03**			<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-7-5-102419	10/24/2019	<0.028	U		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-5-012720	1/27/2020	**0.013**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-5-042720	4/27/2020	**0.03**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0091**	J	
		VMP-7-5-073020	7/30/2020	**0.037**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0029**	J	
		VMP-7-5-110420	11/4/2020	**0.01**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-5-012621	1/26/2021	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	**0.009**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-7-13.5-043015	4/30/2015	**0.033**	J		<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		**0.0079**	J	
		VMP-7-13.5-072715	7/27/2015	**0.029**	J		<0.0041	J	U	<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0068**	J	
		VMP-7-13.5-102815	10/28/2015	**0.023**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0064**	J	
		VMP-7-13.5-012716	1/27/2016	**0.013**	J		**0.0008**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-13.5-042916	4/29/2016	**0.0081**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-7-13.5-072616	7/26/2016	**0.024**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-13.5-102516	10/25/2016	**0.0093**	J		**0.00069**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0041**	J	
		VMP-7-13.5-012517	1/25/2017	**0.0098**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-13.5-042417	4/24/2017	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-13.5-072117	7/21/2017	**0.018**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-7-13.5-102517	10/25/2017	**0.027**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-13.5-012518	1/25/2018	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-13.5-042318	4/23/2018	**0.006**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-7-13.5-071918	7/19/2018	**0.045**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.004**	J	
		VMP-7-13.5-102218	10/22/2018	**0.025**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0093	J		<0.014	U	
		VMP-7-13.5-020119	2/1/2019	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-13.5-042519	4/25/2019	**0.013**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-13.5-072319	7/23/2019	**0.016**	J		**0.024**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0091	J		<0.014	U	
		VMP-7-13.5-102419	10/24/2019	**0.0069**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-7-13.5-012720	1/27/2020	**0.0094**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0059	J		<0.014	U	
		VMP-7-13.5-042720	4/27/2020	**0.012**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0022**	J	
		VMP-7-13.5-073020	7/30/2020	**0.045**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0075**	J	
		VMP-7-13.5-110420	11/4/2020	**0.02**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0023**	J	
		VMP-7-13.5-012621	1/26/2021	**0.0099**	J		**0.00099**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	**0.0048**	J		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-7-5-043015	4/30/2015	<0.019	J	U	<0.0096	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0079	U	
		VMP-7-5-072715	7/27/2015	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0034**	J		<0.027	U		<0.0068	U	
		VMP-7-5-102815	10/28/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		**0.003**	J		<0.0062	U	
		VMP-7-5-012716	1/27/2016	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-7-5-042916	4/29/2016	**0.0048**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.00089**	J		<0.029	U		<0.0073	U	
		VMP-7-5-072616	7/26/2016	**0.021**			<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0066**	J		<0.03	U		<0.0076	U	
		VMP-7-5-102516	10/25/2016	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0021**	J		<0.025	U		<0.0063	U	
		VMP-7-5-012517	1/25/2017	**0.0012**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0064	U	
		VMP-7-5-042417	4/24/2017	**0.003**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-7-5-072117	7/21/2017	**0.0022**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-7-5-102517	10/25/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-7-5-012518	1/25/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-7-5-042318	4/23/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-7-5-071918	7/19/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0011**	J		**0.0025**	J		<0.0063	U	
		VMP-7-5-102218	10/22/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.0028**	J		<0.026	U		<0.0066	U	
		VMP-7-5-012219	1/22/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-7-5-042519	4/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-7-5-072319	7/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-7-5-072319-DUP	7/23/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-7-5-102419	10/24/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-7-5-012720	1/27/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U	UJ	<0.0066	U	
		VMP-7-5-042720	4/27/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-7-5-073020	7/30/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0024**	J		<0.025	U		<0.0063	U	
		VMP-7-5-110420	11/4/2020	**0.0049**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0013**	J		<0.025	U		<0.0062	U	
		VMP-7-5-012621	1/26/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-7-13.5-043015	4/30/2015	<0.02	J	U	<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0077	U		<0.033	U		<0.0082	U	
		VMP-7-13.5-072715	7/27/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0034**	J		<0.027	U		<0.0067	U	
		VMP-7-13.5-102815	10/28/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0066**	J		<0.028	U		<0.0071	U	
		VMP-7-13.5-012716	1/27/2016	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-7-13.5-042916	4/29/2016	**0.00098**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.00088**	J		<0.029	U		<0.0073	U	
		VMP-7-13.5-072616	7/26/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.007**			<0.026	U		<0.0066	U	
		VMP-7-13.5-102516	10/25/2016	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0028**	J		<0.025	U		<0.0063	U	
		VMP-7-13.5-012517	1/25/2017	**0.0013**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-7-13.5-042417	4/24/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-7-13.5-072117	7/21/2017	**0.0017**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.00093**	J		<0.025	U		<0.0062	U	
		VMP-7-13.5-102517	10/25/2017	**0.0028**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-7-13.5-012518	1/25/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-7-13.5-042318	4/23/2018	<0.014	J	U	<0.0072	U		**0.00046**	J		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-7-13.5-071918	7/19/2018	**0.0023**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0022**	J		<0.024	U		<0.0062	U	
		VMP-7-13.5-102218	10/22/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0059**	J		<0.025	U		<0.0063	U	
		VMP-7-13.5-020119	2/1/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-7-13.5-042519	4/25/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-7-13.5-072319	7/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-7-13.5-102419	10/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-7-13.5-012720	1/27/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U	UJ	<0.0063	U	
		VMP-7-13.5-042720	4/27/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-7-13.5-073020	7/30/2020	**0.0024**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0024**	J		<0.027	U		<0.0067	U	
		VMP-7-13.5-110420	11/4/2020	**0.0082**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0029**	J		<0.027	U		<0.0068	U	
		VMP-7-13.5-012621	1/26/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.00091**	J		<0.026	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		<0.0075	U		<0.0061	U		<0.0061	U	
		VMP-7-5-043015	4/30/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0023**	J		<0.0062	U		<0.0062	U	
		VMP-7-5-072715	7/27/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0019**	J		<0.0053	U		<0.0053	U	
		VMP-7-5-102815	10/28/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-7-5-012716	1/27/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0017**	J		<0.0053	U		<0.0053	U	
		VMP-7-5-042916	4/29/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.002**	J		<0.0057	U		<0.0057	U	
		VMP-7-5-072616	7/26/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.003**	J		<0.0059	U		<0.0059	U	
		VMP-7-5-102516	10/25/2016	**0.0033**	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-7-5-012517	1/25/2017	**0.0038**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-7-5-042417	4/24/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-7-5-072117	7/21/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-7-5-102517	10/25/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-7-5-012518	1/25/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-7-5-042318	4/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-7-5-071918	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0019**	J		<0.0049	U		<0.0049	U	
		VMP-7-5-102218	10/22/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0035**	J		<0.0052	U		<0.0052	U	
		VMP-7-5-012219	1/22/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0024**	J		<0.0043	U		<0.0043	U	
		VMP-7-5-042519	4/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-7-5-072319	7/23/2019	<0.0042	U		<0.0093	U		**0.0016**	J		0.002	J		**0.0022**	J		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-7-5-072319-DUP	7/23/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-7-5-102419	10/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-7-5-012720	1/27/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-7-5-042720	4/27/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0021**	J		<0.0057	U		<0.0057	U	
		VMP-7-5-073020	7/30/2020	<0.0042	U		<0.0093	U		<0.0073	U		0.00063	J		**0.0006**	J		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-7-5-110420	11/4/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-7-5-012621	1/26/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-7-13.5-043015	4/30/2015	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0024**	J		<0.0064	U		<0.0064	U	
		VMP-7-13.5-072715	7/27/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-7-13.5-102815	10/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0027**	J		<0.0056	U		<0.0056	U	
		VMP-7-13.5-012716	1/27/2016	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-7-13.5-042916	4/29/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-7-13.5-072616	7/26/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-7-13.5-102516	10/25/2016	**0.0044**			<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-7-13.5-012517	1/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-7-13.5-042417	4/24/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-7-13.5-072117	7/21/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-7-13.5-102517	10/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-7-13.5-012518	1/25/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0037**	J		<0.0047	U		<0.0047	U	
		VMP-7-13.5-042318	4/23/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-7-13.5-071918	7/19/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-7-13.5-102218	10/22/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0036**	J		<0.005	U		<0.005	U	
		VMP-7-13.5-020119	2/1/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-7-13.5-042519	4/25/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-7-13.5-072319	7/23/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-7-13.5-102419	10/24/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-7-13.5-012720	1/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0038**	J		<0.0049	U		<0.0049	U	
		VMP-7-13.5-042720	4/27/2020	<0.0048	U		<0.011	U		<0.0085	J	U	<0.0085	J	U	<0.0085	J	U	**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-7-13.5-073020	7/30/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-7-13.5-110420	11/4/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-7-13.5-012621	1/26/2021	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		**0.0076**	J	
		VMP-7-5-043015	4/30/2015	<0.006	U		0.0025	J		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-7-5-072715	7/27/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-7-5-102815	10/28/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0041**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-5-012716	1/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-7-5-042916	4/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-5-072616	7/26/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-7-5-102516	10/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-5-012517	1/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-5-042417	4/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-5-072117	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0029**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-5-102517	10/25/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-7-5-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-7-5-042318	4/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-5-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		**0.0025**	J		<0.017	U	
		VMP-7-5-102218	10/22/2018	<0.005	U		<0.005	U		<0.005	U		**0.0021**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-7-5-012219	1/22/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-7-5-042519	4/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-7-5-072319	7/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-5-072319-DUP	7/23/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-7-5-102419	10/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-5-012720	1/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-7-5-042720	4/27/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-5-073020	7/30/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-5-110420	11/4/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-5-012621	1/26/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-7-13.5-043015	4/30/2015	<0.0063	U		0.0017	J		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-7-13.5-072715	7/27/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.0031**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-7-13.5-102815	10/28/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0058**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-7-13.5-012716	1/27/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-13.5-042916	4/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-13.5-072616	7/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		**0.0053**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-7-13.5-102516	10/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0024**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-13.5-012517	1/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-13.5-042417	4/24/2017	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-7-13.5-072117	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-13.5-102517	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0039**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-13.5-012518	1/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-13.5-042318	4/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-7-13.5-071918	7/19/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-13.5-102218	10/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0022**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-13.5-020119	2/1/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-13.5-042519	4/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-13.5-072319	7/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-13.5-102419	10/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-7-13.5-012720	1/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-13.5-042720	4/27/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-13.5-073020	7/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-7-13.5-110420	11/4/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-7-13.5-012621	1/26/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		<0.0053	U	
		VMP-7-5-043015	4/30/2015	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		**0.0015**	J	
		VMP-7-5-072715	7/27/2015	<0.0099	J	U	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-7-5-102815	10/28/2015	0.011			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0017**	J		<0.051	U		<0.0042	U	
		VMP-7-5-012716	1/27/2016	0.0062	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-7-5-042916	4/29/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-7-5-072616	7/26/2016	0.0032	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		**0.0007**	J	
		VMP-7-5-102516	10/25/2016	0.006	J		**0.00066**	J		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.00078**	J	
		VMP-7-5-012517	1/25/2017	0.011			**0.0062**			<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-7-5-042417	4/24/2017	0.015			**0.042**			0.0096			<0.0094	U		<0.0085	U		**0.0023**	J		<0.052	U		**0.0026**	J	
		VMP-7-5-072117	7/21/2017	0.012			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-5-102517	10/25/2017	0.0064	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-7-5-012518	1/25/2018	0.0068	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-7-5-042318	4/23/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-5-071918	7/19/2018	<0.0091	J	U	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-5-102218	10/22/2018	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-7-5-012219	1/22/2019	0.0046	J		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-7-5-042519	4/25/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-7-5-072319	7/23/2019	<0.0091	U		**0.0015**	J		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-5-072319-DUP	7/23/2019	0.0069	J		**0.00068**	J		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-7-5-102419	10/24/2019	<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-5-012720	1/27/2020	<0.0097	ND,UJ	UJ	<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-7-5-042720	4/27/2020	0.0097	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.001**	J		<0.06	U		**0.00098**	J	
		VMP-7-5-073020	7/30/2020	0.014			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-5-110420	11/4/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-5-012621	1/26/2021	<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-7-13.5-043015	4/30/2015	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.068	U		**0.0018**	J	
		VMP-7-13.5-072715	7/27/2015	<0.0097	U		**0.0013**	J		0.0017	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-7-13.5-102815	10/28/2015	0.0077	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-7-13.5-012716	1/27/2016	0.0053	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0013**	J		<0.051	U		**0.0025**	J	
		VMP-7-13.5-042916	4/29/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-7-13.5-072616	7/26/2016	0.013			<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0032**	J		<0.055	U		**0.0014**	J	
		VMP-7-13.5-102516	10/25/2016	0.012			**0.0029**	J		<0.006	U		<0.0094	U		<0.0085	U		**0.0014**	J		<0.052	U		**0.0012**	J	
		VMP-7-13.5-012517	1/25/2017	<0.0093	J	U	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-7-13.5-042417	4/24/2017	0.012			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0019**	J	
		VMP-7-13.5-072117	7/21/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-13.5-102517	10/25/2017	0.059			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-13.5-012518	1/25/2018	0.004	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-13.5-042318	4/23/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-7-13.5-071918	7/19/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-13.5-102218	10/22/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-13.5-020119	2/1/2019	0.0059	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-13.5-042519	4/25/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-13.5-072319	7/23/2019	0.012			**0.11**			0.0052	J		<0.0093	U		<0.0084	U		**0.18**			<0.052	U		**0.16**		
		VMP-7-13.5-102419	10/24/2019	<0.0086	U	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-7-13.5-012720	1/27/2020	<0.0092	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		**0.0017**	J	
		VMP-7-13.5-042720	4/27/2020	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	J	U	<0.005	U	
		VMP-7-13.5-073020	7/30/2020	0.0074	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-7-13.5-110420	11/4/2020	0.021			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-7-13.5-012621	1/26/2021	0.0076	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.00093**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.0055	U					<0.015	J	U	<0.0074	U	
		VMP-7-5-043015	4/30/2015	<0.025	U		<0.018	U		<0.0075	U		<0.0062	J	U	<0.0055	U					**0.0024**	J		<0.0075	U	
		VMP-7-5-072715	7/27/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0047	U					<0.013	U		<0.0065	U	
		VMP-7-5-102815	10/28/2015	**0.03**		J	0.01	J		**0.0064**			<0.0049	U		<0.0043	U					**0.029**			<0.0058	U	
		VMP-7-5-012716	1/27/2016	<0.022	U		0.0064	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.012**	J		<0.0065	U	
		VMP-7-5-042916	4/29/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.0016**	J		<0.0069	U	
		VMP-7-5-072616	7/26/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.0076**	J		<0.0072	U	
		VMP-7-5-102516	10/25/2016	<0.02	U		0.0038	J		**0.00038**	J		<0.005	U		<0.017	U		<0.013	U		**0.012**			<0.0059	U	
		VMP-7-5-012517	1/25/2017	<0.02	U		0.0053	J		<0.0061	U		<0.005	U		<0.018	U					**0.0098**	J		<0.0061	U	
		VMP-7-5-042417	4/24/2017	**0.0058**	J		0.0054	J		**0.0071**			**0.0023**	J		<0.018	U					**0.013**			**0.0025**	J	
		VMP-7-5-072117	7/21/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-7-5-102517	10/25/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-7-5-012518	1/25/2018	<0.018	U		0.0031	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0021**	J		<0.0056	U	
		VMP-7-5-042318	4/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-7-5-071918	7/19/2018	<0.02	U		0.0039	J		**0.0012**	J		<0.005	U		<0.017	U					**0.013**			**0.0038**	J	
		VMP-7-5-102218	10/22/2018	<0.021	U		0.0074	J		<0.0063	U		<0.0052	U		<0.018	U					**0.0045**	J		<0.0063	U	
		VMP-7-5-012219	1/22/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0039**	J		<0.0052	U	
		VMP-7-5-042519	4/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-7-5-072319	7/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0048**	J		<0.0059	U	
		VMP-7-5-072319-DUP	7/23/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0038**	J		<0.0055	U	
		VMP-7-5-102419	10/24/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-7-5-012720	1/27/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U		<0.0063	U	
		VMP-7-5-042720	4/27/2020	**0.0025**	J		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.015**			<0.0069	U	
		VMP-7-5-073020	7/30/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0089**	J		<0.006	U	
		VMP-7-5-110420	11/4/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0071**	J		<0.0059	U	
		VMP-7-5-012621	1/26/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0073**	J		<0.0062	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					<0.013	J	U	<0.0065	U	
		VMP-7-13.5-043015	4/30/2015	**0.0016**	J		<0.019	U		<0.0078	U		<0.0065	J	U	<0.0057	U					**0.0023**	J		<0.0078	U	
		VMP-7-13.5-072715	7/27/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.0038**	J		<0.0063	U	
		VMP-7-13.5-102815	10/28/2015	<0.023	U		0.0036	J		<0.0068	U		<0.0056	U		<0.005	U					**0.0046**	J		<0.0068	U	
		VMP-7-13.5-012716	1/27/2016	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					**0.0032**	J		<0.0058	U	
		VMP-7-13.5-042916	4/29/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.017**			<0.0069	U	
		VMP-7-13.5-072616	7/26/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.024**			<0.0063	U	
		VMP-7-13.5-102516	10/25/2016	<0.02	U		0.0056	J		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.025**			<0.006	U	
		VMP-7-13.5-012517	1/25/2017	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0062**	J		<0.0061	U	
		VMP-7-13.5-042417	4/24/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0052**	J		<0.0061	U	
		VMP-7-13.5-072117	7/21/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-7-13.5-102517	10/25/2017	<0.019	U		0.0042	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-7-13.5-012518	1/25/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0032**	J		<0.0057	U	
		VMP-7-13.5-042318	4/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-7-13.5-071918	7/19/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0092**	J		<0.0058	U	
		VMP-7-13.5-102218	10/22/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-7-13.5-020119	2/1/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0035**	J		<0.0059	U	
		VMP-7-13.5-042519	4/25/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-7-13.5-072319	7/23/2019	<0.02	U		0.062			**0.0033**	J		<0.005	U		<0.017	U					<0.012	U		**0.004**	J	
		VMP-7-13.5-102419	10/24/2019	<0.019	U		0.005	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-7-13.5-012720	1/27/2020	<0.02	U		0.0029	J		<0.006	U		<0.005	U		<0.018	U					**0.0049**	J		<0.006	U	
		VMP-7-13.5-042720	4/27/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.0041**	J		<0.0069	U	
		VMP-7-13.5-073020	7/30/2020	**0.0012**	J		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0088**	J		<0.0063	U	
		VMP-7-13.5-110420	11/4/2020	<0.021	U		0.0017	J		**0.00052**	J		<0.0054	U		<0.019	U					**0.014**			**0.0019**	J	
		VMP-7-13.5-012621	1/26/2021	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.015**			<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	<0.0064	U		<0.01	U		<0.01	U		**0.0028**	J		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-7-5-043015	4/30/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-7-5-072715	7/27/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-7-5-102815	10/28/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.012**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-5-012716	1/27/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0033**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-7-5-042916	4/29/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-7-5-072616	7/26/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-7-5-102516	10/25/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0043**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-5-012517	1/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0043**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-7-5-042417	4/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.011**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-5-072117	7/21/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0012**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-7-5-102517	10/25/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-7-5-012518	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.00079**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-7-5-042318	4/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-5-071918	7/19/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-5-102218	10/22/2018	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-5-012219	1/22/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-7-5-042519	4/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-7-5-072319	7/23/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0057**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-5-072319-DUP	7/23/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.004**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-7-5-102419	10/24/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-5-012720	1/27/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-5-042720	4/27/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	J	U	<0.0077	U		<0.0077	U	
		VMP-7-5-073020	7/30/2020	<0.0083	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		**0.0012**	J		<0.0066	U		<0.0066	U	
		VMP-7-5-110420	11/4/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-5-012621	1/26/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-7-13.5-043015	4/30/2015	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		<0.006	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-7-13.5-072715	7/27/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-13.5-102815	10/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-7-13.5-012716	1/27/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-13.5-042916	4/29/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-7-13.5-072616	7/26/2016	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0011**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-13.5-102516	10/25/2016	**0.00087**	J		<0.0084	U		<0.0083	U		<0.0036	U		**0.0079**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-13.5-012517	1/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-7-13.5-042417	4/24/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-7-13.5-072117	7/21/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-13.5-102517	10/25/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0018**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-7-13.5-012518	1/25/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0026**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-7-13.5-042318	4/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-7-13.5-071918	7/19/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-13.5-102218	10/22/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-7-13.5-020119	2/1/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-13.5-042519	4/25/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-13.5-072319	7/23/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.5**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-13.5-102419	10/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-7-13.5-012720	1/27/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0039**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-13.5-042720	4/27/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	J	U	<0.0077	U		<0.0077	U	
		VMP-7-13.5-073020	7/30/2020	<0.0088	U		<0.0088	U		**0.0026**	J		<0.0038	U		**0.00099**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-13.5-110420	11/4/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00049**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-7-13.5-012621	1/26/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-7-5-020215	2/2/2015	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-7-5-043015	4/30/2015	**0.0077**	J		<0.0085	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-7-5-072715	7/27/2015	<0.0071	U		0.0016	J		<0.0065	J	U	<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-7-5-102815	10/28/2015	<0.0064	U		<0.0067	J	U	<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.0017	J		<0.0052	U	
		VMP-7-5-012716	1/27/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-7-5-042916	4/29/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-7-5-072616	7/26/2016	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	J	U	<0.0037	U		<0.0064	U		<0.0064	U	
		VMP-7-5-102516	10/25/2016	<0.0065	U		0.0013	J		<0.0059	J	U	<0.0059	U		0.0089			<0.0031	U		0.001	J		<0.0052	U	
		VMP-7-5-012517	1/25/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.018			**0.0036**	J	
		VMP-7-5-042417	4/24/2017	<0.0066	U		0.0012	J		**0.0071**			**0.0027**	J		0.0019	J		<0.0031	U		0.15			**0.041**		
		VMP-7-5-072117	7/21/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-7-5-102517	10/25/2017	<0.0062	U		0.001	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-7-5-012518	1/25/2018	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.0011	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-7-5-042318	4/23/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	J	U	<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-5-071918	7/19/2018	<0.0065	U		0.0014	J		**0.0029**	J		<0.0059	U		0.0054	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-5-102218	10/22/2018	**0.0025**	J		0.0019	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-7-5-012219	1/22/2019	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-7-5-042519	4/25/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-7-5-072319	7/23/2019	<0.0065	U		<0.0068	U		**0.0052**	J		<0.0059	U		0.0025	J		<0.0031	U		0.0058			**0.0022**	J	
		VMP-7-5-072319-DUP	7/23/2019	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		0.0017	J		<0.0029	U		0.002	J		<0.0049	U	
		VMP-7-5-102419	10/24/2019	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-5-012720	1/27/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-5-042720	4/27/2020	<0.0076	U		0.0013	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-7-5-073020	7/30/2020	<0.0065	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-7-5-110420	11/4/2020	<0.0064	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-5-012621	1/26/2021	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
	13.5 ft	VMP-7-13.5-020215	2/2/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0011	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-7-13.5-043015	4/30/2015	**0.0057**	J		<0.0089	U		<0.0078	U		<0.0078	U		0.0019	J		<0.004	U		<0.0069	U		<0.0069	U	
		VMP-7-13.5-072715	7/27/2015	<0.0069	U		<0.0072	U		**0.003**	J		**0.00097**	J		0.0055	J		<0.0033	U		0.004	J		**0.0027**	J	
		VMP-7-13.5-102815	10/28/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0026	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-7-13.5-012716	1/27/2016	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-13.5-042916	4/29/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-7-13.5-072616	7/26/2016	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		0.002	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-13.5-102516	10/25/2016	<0.0066	U		0.0013	J		<0.006	J	U	<0.006	J	U	<0.0057	U		<0.0031	U		0.0078			**0.0035**	J	
		VMP-7-13.5-012517	1/25/2017	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-7-13.5-042417	4/24/2017	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		0.0017	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-7-13.5-072117	7/21/2017	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-13.5-102517	10/25/2017	<0.0063	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-7-13.5-012518	1/25/2018	<0.0063	U		0.0015	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-7-13.5-042318	4/23/2018	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		0.002	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-7-13.5-071918	7/19/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-13.5-102218	10/22/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-7-13.5-020119	2/1/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-13.5-042519	4/25/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-13.5-072319	7/23/2019	<0.0065	U		<0.0068	U		**0.0083**			**0.0048**	J		0.45			<0.0031	U		0.4			**0.12**		
		VMP-7-13.5-102419	10/24/2019	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-7-13.5-012720	1/27/2020	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0015	J		<0.0053	U	
		VMP-7-13.5-042720	4/27/2020	<0.0076	U		<0.0079	U		**0.00084**	J		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-7-13.5-073020	7/30/2020	<0.0069	U		0.001	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-13.5-110420	11/4/2020	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-7-13.5-012621	1/26/2021	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	**0.0042**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-7-29.5-043015	4/30/2015	**0.02**	J		**0.0012**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0095**	J	
		VMP-7-29.5-072715	7/27/2015	**0.12**			<0.0044	J	U	<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.031**		
		VMP-7-29.5-102815	10/28/2015	**0.026**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0057**	J	
		VMP-7-29.5-012716	1/27/2016	**0.016**	J		**0.0012**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-7-29.5-042916	4/29/2016	**0.012**	J		**0.0018**	J		<0.017	U		<0.026	U		<0.097	U		<0.0055	U		<0.024	U		<0.029	U	
		VMP-7-29.5-072616	7/26/2016	**0.018**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-7-29.5-102516	10/25/2016	**0.011**	J		**0.00061**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0038**	J	
		VMP-7-29.5-012517	1/25/2017	**0.028**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-29.5-052217	5/22/2017	**0.017**	J		**0.00084**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0048**	J	
		VMP-7-29.5-072117	7/21/2017	**0.021**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0047**	J	
		VMP-7-29.5-102517	10/25/2017	<0.028	J	U	<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-29.5-012518	1/25/2018	**0.0094**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-29.5-042318	4/23/2018	**0.0049**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-29.5-071918	7/19/2018	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-29.5-102218	10/22/2018	**0.021**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0043**	J	
		VMP-7-29.5-020119	2/1/2019	**0.034**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0036**	J	
		VMP-7-29.5-042519	4/25/2019	**0.018**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-7-29.5-072319	7/23/2019	**0.014**	J		**0.0029**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-29.5-102419	10/24/2019	**0.0077**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.002**	J	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.027	U		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-7-29.5-012720	1/27/2020	**0.0071**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-29.5-012720-DUP	1/27/2020	**0.0076**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-29.5-042720	4/27/2020	**0.015**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0019**	J	
		VMP-7-29.5-073020	7/30/2020	**0.035**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-29.5-110420	11/4/2020	**0.097**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0018**	J	
		VMP-7-29.5-012621	1/26/2021	**0.0049**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
	38 ft	VMP-7-38-020215	2/2/2015	**0.005**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-7-38-043015	4/30/2015	**0.02**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.005**	J	
		VMP-7-38-072715	7/27/2015	**0.014**	J		<0.0043	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0046**	J	
		VMP-7-38-102815	10/28/2015	**0.035**			<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0082**	J	
		VMP-7-38-102815-DUP	10/28/2015	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0029**	J	
		VMP-7-38-012716	1/27/2016	**0.013**	J		**0.0007**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-38-012716-DUP	1/27/2016	**0.015**	J		**0.00063**	J		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-7-38-042916	4/29/2016	**0.012**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.003**	J	
		VMP-7-38-042916-DUP	4/29/2016	**0.026**	J		**0.00091**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0067**	J	
		VMP-7-38-072616	7/26/2016	**0.0091**	J		<0.005	U		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		<0.019	U	
		VMP-7-38-072616-DUP	7/26/2016	**0.014**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-7-38-102516	10/25/2016	**0.013**	J		**0.0006**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0037**	J	
		VMP-7-38-102516-Dup	10/25/2016	**0.011**	J		<0.0083	U		<0.017	U		<0.027	U		<0.1	U		<0.0057	U		<0.025	U		<0.031	U	
		VMP-7-38-012517	1/25/2017	**0.013**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0044**	J	
		VMP-7-38-012517-Dup	1/25/2017	**0.01**	J		**0.00067**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0019	J		**0.0024**	J	
		VMP-7-38-042417	4/24/2017	<0.029	J	U	**0.0013**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-7-38-102517	10/25/2017	<0.028	J	U	**0.0015**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-7-38-012518	1/25/2018	**0.0095**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-7-38-042318	4/23/2018	**0.0066**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-7-38-042318-DUP	4/23/2018	**0.012**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0033**	J	
		VMP-7-38-071918	7/19/2018	**0.018**	J		**0.00044**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-7-38-071918-DUP	7/19/2018	**0.021**	J		**0.001**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0092	J		<0.014	U	
		VMP-7-38-102218	10/22/2018	**0.01**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-7-38-012219	1/22/2019	**0.014**	J		<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-7-38-042519	4/25/2019	**0.04**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-7-38-042519-DUP	4/25/2019	**0.031**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0031**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0015**	J		<0.023	U		<0.0057	U	
		VMP-7-29.5-043015	4/30/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-7-29.5-072715	7/27/2015	**0.016**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0018**	J		**0.0053**	J		<0.0071	U	
		VMP-7-29.5-102815	10/28/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0034**	J		<0.03	U		<0.0077	U	
		VMP-7-29.5-012716	1/27/2016	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	J	U	<0.027	U		<0.0067	U	
		VMP-7-29.5-042916	4/29/2016	**0.0032**	J		<0.016	U		<0.011	U		<0.021	U		<0.026	U		<0.012	U		<0.052	U		<0.013	U	
		VMP-7-29.5-072616	7/26/2016	**0.0047**	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0022**	J		<0.027	U		<0.0067	U	
		VMP-7-29.5-102516	10/25/2016	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0031**	J		<0.025	U		<0.0063	U	
		VMP-7-29.5-012517	1/25/2017	**0.0014**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.048**			<0.026	U		<0.0064	U	
		VMP-7-29.5-052217	5/22/2017	**0.0022**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0026**	J		<0.027	U		<0.0068	U	
		VMP-7-29.5-072117	7/21/2017	**0.0017**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0033**	J		<0.025	U		<0.0062	U	
		VMP-7-29.5-102517	10/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.003**	J		<0.024	U		<0.0061	U	
		VMP-7-29.5-012518	1/25/2018	**0.0069**	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0031**	J		<0.024	U		<0.006	U	
		VMP-7-29.5-042318	4/23/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0038**	J		<0.024	U		<0.006	U	
		VMP-7-29.5-071918	7/19/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0043**	J		<0.025	U		<0.0063	U	
		VMP-7-29.5-102218	10/22/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0074**			<0.025	U		<0.0063	U	
		VMP-7-29.5-020119	2/1/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0072**			<0.024	U		<0.006	U	
		VMP-7-29.5-042519	4/25/2019	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0041**	J		<0.029	U		<0.0074	U	
		VMP-7-29.5-072319	7/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0054**	J		<0.026	U		<0.0064	U	
		VMP-7-29.5-102419	10/24/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0063**			<0.023	U		<0.0058	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0067**			<0.023	U		<0.0058	U	
		VMP-7-29.5-012720	1/27/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.005**	J		<0.025	U	UJ	<0.0064	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0045**	J		<0.026	U	UJ	<0.0065	U	
		VMP-7-29.5-042720	4/27/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.026**			<0.028	U		<0.0071	U	
		VMP-7-29.5-073020	7/30/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.021**			<0.027	U		<0.0067	U	
		VMP-7-29.5-110420	11/4/2020	**0.012**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0049**	J		<0.025	U		<0.0063	U	
		VMP-7-29.5-012621	1/26/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0035**	J		<0.026	U		<0.0064	U	
	38 ft	VMP-7-38-020215	2/2/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-7-38-043015	4/30/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-7-38-072715	7/27/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-7-38-102815	10/28/2015	**0.28**		J	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.015	J	UJ	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	J	U	<0.024	U		<0.0062	U	
		VMP-7-38-012716	1/27/2016	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-7-38-012716-DUP	1/27/2016	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-7-38-042916	4/29/2016	**0.00086**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-7-38-042916-DUP	4/29/2016	**0.00069**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-7-38-072616	7/26/2016	<0.02	U		<0.0099	U		<0.0073	U		<0.013	U		<0.017	U		<0.0077	U		<0.033	U		<0.0082	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.019	U		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-7-38-102516	10/25/2016	**0.0013**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0062	U	
		VMP-7-38-102516-Dup	10/25/2016	<0.032	U		<0.016	U		<0.012	U		<0.022	U		<0.027	U		<0.013	U		<0.054	U		<0.013	U	
		VMP-7-38-012517	1/25/2017	**0.00098**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.093**			<0.026	U		<0.0064	U	
		VMP-7-38-012517-Dup	1/25/2017	**0.00099**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.096**			<0.024	U		<0.006	U	
		VMP-7-38-042417	4/24/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.039**			<0.025	U		<0.0063	U	
		VMP-7-38-102517	10/25/2017	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0091**			<0.024	U		<0.006	U	
		VMP-7-38-012518	1/25/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.014**			<0.024	U		<0.0059	U	
		VMP-7-38-042318	4/23/2018	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.011**			<0.023	U		<0.0058	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.012**			<0.024	U		<0.006	U	
		VMP-7-38-071918	7/19/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.013**			<0.026	U		<0.0064	U	
		VMP-7-38-071918-DUP	7/19/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.013**			<0.025	U		<0.0063	U	
		VMP-7-38-102218	10/22/2018	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.012**			<0.028	U		<0.007	U	
		VMP-7-38-012219	1/22/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.013**			<0.022	U		<0.0054	U	
		VMP-7-38-042519	4/25/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.01**			<0.026	U		<0.0066	U	
		VMP-7-38-042519-DUP	4/25/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0098**			<0.024	U		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-7-29.5-043015	4/30/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0021**	J		<0.0055	U		<0.0055	U	
		VMP-7-29.5-072715	7/27/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0021**	J		<0.0055	U		<0.0055	U	
		VMP-7-29.5-102815	10/28/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0032**	J		<0.006	U		<0.006	U	
		VMP-7-29.5-012716	1/27/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0016**	J		<0.0052	U		<0.0052	U	
		VMP-7-29.5-042916	4/29/2016	<0.0086	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		**0.0027**	J		<0.01	U		<0.01	U	
		VMP-7-29.5-072616	7/26/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-7-29.5-102516	10/25/2016	**0.0046**			<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-7-29.5-012517	1/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-7-29.5-052217	5/22/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-7-29.5-072117	7/21/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0032**	J		<0.0048	U		<0.0048	U	
		VMP-7-29.5-102517	10/25/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-7-29.5-012518	1/25/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-7-29.5-042318	4/23/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		<0.0058	J	U	<0.0047	U		<0.0047	U	
		VMP-7-29.5-071918	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-7-29.5-102218	10/22/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0035**	J		<0.005	U		<0.005	U	
		VMP-7-29.5-020119	2/1/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-7-29.5-042519	4/25/2019	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-7-29.5-072319	7/23/2019	**0.0017**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-7-29.5-102419	10/24/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-7-29.5-012720	1/27/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-7-29.5-042720	4/27/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-7-29.5-073020	7/30/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0019**	J		<0.0052	U		<0.0052	U	
		VMP-7-29.5-110420	11/4/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0043**	J		<0.0049	U		<0.0049	U	
		VMP-7-29.5-012621	1/26/2021	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
	38 ft	VMP-7-38-020215	2/2/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-7-38-043015	4/30/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		**0.0016**	J		**0.0025**	J		<0.0057	U		<0.0057	U	
		VMP-7-38-072715	7/27/2015	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-7-38-102815	10/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.003**	J		<0.0056	U		<0.0056	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-7-38-012716	1/27/2016	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-7-38-012716-DUP	1/27/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0017**	J		<0.006	U		<0.006	U	
		VMP-7-38-042916	4/29/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-7-38-042916-DUP	4/29/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-7-38-072616	7/26/2016	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		<0.0078	U		<0.0064	U		<0.0064	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		<0.0075	U		<0.0061	U		<0.0061	U	
		VMP-7-38-102516	10/25/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-7-38-102516-Dup	10/25/2016	<0.0089	U		<0.02	U		<0.016	U		<0.016	U		<0.016	U		**0.0018**	J		<0.01	U		<0.01	U	
		VMP-7-38-012517	1/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-7-38-012517-Dup	1/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.002**	J		<0.0047	U		<0.0047	U	
		VMP-7-38-042417	4/24/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-7-38-102517	10/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0019**	J		<0.0047	U		<0.0047	U	
		VMP-7-38-012518	1/25/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-7-38-042318	4/23/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		<0.0055	J	U	<0.0045	U		<0.0045	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0031**	J		<0.0047	U		<0.0047	U	
		VMP-7-38-071918	7/19/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-7-38-071918-DUP	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0035**	J		<0.0049	U		<0.0049	U	
		VMP-7-38-102218	10/22/2018	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0037**	J		<0.0055	U		<0.0055	U	
		VMP-7-38-012219	1/22/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0024**	J		<0.0042	U		<0.0042	U	
		VMP-7-38-042519	4/25/2019	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0034**	J		<0.0052	U		<0.0052	U	
		VMP-7-38-042519-DUP	4/25/2019	<0.0041	U		<0.0091	U		**0.0032**	J		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-7-29.5-043015	4/30/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-7-29.5-072715	7/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0033**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-7-29.5-102815	10/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.0052**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-7-29.5-012716	1/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-7-29.5-042916	4/29/2016	<0.0099	U		<0.0099	U		<0.0099	U		<0.087	U		<0.012	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-7-29.5-072616	7/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		**0.0099**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-7-29.5-102516	10/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-29.5-012517	1/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-29.5-052217	5/22/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-7-29.5-072117	7/21/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-29.5-102517	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-29.5-012518	1/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		**0.0018**	J		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-7-29.5-042318	4/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-29.5-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-29.5-102218	10/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0019**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-29.5-020119	2/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-29.5-042519	4/25/2019	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-29.5-072319	7/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-29.5-102419	10/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-7-29.5-012720	1/27/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-7-29.5-042720	4/27/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-7-29.5-073020	7/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		**0.0012**	J	
		VMP-7-29.5-110420	11/4/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.013**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-29.5-012621	1/26/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
	38 ft	VMP-7-38-020215	2/2/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-38-043015	4/30/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-38-072715	7/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-7-38-102815	10/28/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0059**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0047**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-38-012716	1/27/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-7-38-012716-DUP	1/27/2016	<0.0059	U		<0.0059	U		<0.0059	U		**0.0048**	J		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-7-38-042916	4/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-38-042916-DUP	4/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-7-38-072616	7/26/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-7-38-102516	10/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-38-102516-Dup	10/25/2016	<0.01	U		<0.01	U		<0.01	U		<0.09	U		<0.012	U		<0.012	U		<0.012	U		<0.037	U	
		VMP-7-38-012517	1/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-38-012517-Dup	1/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-38-042417	4/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-7-38-102517	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-38-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-7-38-042318	4/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		**0.0023**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-7-38-071918	7/19/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-7-38-071918-DUP	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-7-38-102218	10/22/2018	<0.0054	U		<0.0054	U		<0.0054	U		**0.0026**	J		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-7-38-012219	1/22/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-7-38-042519	4/25/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-7-38-042519-DUP	4/25/2019	<0.0047	U		0.005			<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-7-29.5-043015	4/30/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		**0.0015**	J	
		VMP-7-29.5-072715	7/27/2015	<0.012		U	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-7-29.5-102815	10/28/2015	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-7-29.5-012716	1/27/2016	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		**0.0024**	J		<0.055	U		**0.0034**	J	
		VMP-7-29.5-042916	4/29/2016	0.018	J		<0.011	U		<0.012	U		<0.019	U		<0.017	U		**0.0072**	J		<0.11	U		**0.0021**	J	
		VMP-7-29.5-072616	7/26/2016	0.0079	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		**0.0041**	J		<0.055	U		**0.0025**	J	
		VMP-7-29.5-102516	10/25/2016	0.012			**0.0023**	J		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		**0.0012**	J	
		VMP-7-29.5-012517	1/25/2017	<0.0093	J	U	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-7-29.5-052217	5/22/2017	0.012			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-7-29.5-072117	7/21/2017	0.011			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-29.5-102517	10/25/2017	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-29.5-012518	1/25/2018	0.0069	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		**0.0019**	J		<0.049	U		**0.0014**	J	
		VMP-7-29.5-042318	4/23/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-29.5-071918	7/19/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-29.5-102218	10/22/2018	0.0065	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-29.5-020119	2/1/2019	0.0028	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-29.5-042519	4/25/2019	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-7-29.5-072319	7/23/2019	0.012			**0.0007**	J		<0.0061	U		<0.0095	U		<0.0086	U		**0.0027**	J		<0.053	U		**0.009**		
		VMP-7-29.5-102419	10/24/2019	<0.0084	U	UJ	<0.0049	U		<0.0055	J	U	<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.0084	U	UJ	<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-7-29.5-012720	1/27/2020	<0.0093	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.0094	ND,UJ	UJ	<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-7-29.5-042720	4/27/2020	0.0035	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-7-29.5-073020	7/30/2020	0.0023	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-7-29.5-110420	11/4/2020	0.046			<0.0053	U		<0.006	U		**0.0011**	J		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-29.5-012621	1/26/2021	<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
	38 ft	VMP-7-38-020215	2/2/2015	0.012			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-7-38-043015	4/30/2015	0.0052	J		<0.0061	U		0.0046	J		<0.011	U		<0.0098	U		<0.0058	U		**0.0044**	J		**0.0013**	J	
		VMP-7-38-072715	7/27/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-7-38-102815	10/28/2015	0.0061	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-38-012716	1/27/2016	0.0057	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-7-38-012716-DUP	1/27/2016	0.012			<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-7-38-042916	4/29/2016	<0.011	U		**0.002**	J		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0012**	J	
		VMP-7-38-042916-DUP	4/29/2016	<0.011	U		**0.002**	J		0.0017	J		<0.011	U		<0.0098	U		**0.0012**	J		<0.06	U		**0.0017**	J	
		VMP-7-38-072616	7/26/2016	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.067	U		<0.0056	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-7-38-102516	10/25/2016	0.0039	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0016**	J	
		VMP-7-38-102516-Dup	10/25/2016	<0.02	U		<0.011	U		<0.013	U		<0.02	U		<0.018	U		<0.011	U		<0.11	U		**0.0016**	J	
		VMP-7-38-012517	1/25/2017	<0.0093	J	U	**0.00095**	J		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.00077**	J	
		VMP-7-38-012517-Dup	1/25/2017	<0.0088	J	U	**0.0013**	J		<0.0057	U		<0.0089	U		<0.0081	U		**0.001**	J		<0.05	U		**0.002**	J	
		VMP-7-38-042417	4/24/2017	0.0095			**0.0037**	J		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-7-38-102517	10/25/2017	0.011			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-38-012518	1/25/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-7-38-042318	4/23/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-7-38-071918	7/19/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.0015**	J	
		VMP-7-38-071918-DUP	7/19/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.003**	J	
		VMP-7-38-102218	10/22/2018	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-7-38-012219	1/22/2019	0.0044	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		**0.0051**		
		VMP-7-38-042519	4/25/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-7-38-042519-DUP	4/25/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.004	U					<0.011	J	U	<0.0054	U	
		VMP-7-29.5-043015	4/30/2015	**0.0013**	J		0.0026	J		<0.0067	U		**0.0016**	J		<0.0049	U					**0.0053**	J		<0.0067	U	
		VMP-7-29.5-072715	7/27/2015	<0.022	U		<0.016	U		<0.0067	U		**0.0029**	J		<0.0049	U					**0.0074**	J		<0.0067	U	
		VMP-7-29.5-102815	10/28/2015	<0.024	U		0.0048	J		<0.0073	U		<0.0061	U		<0.0053	U					**0.0035**	J		<0.0073	U	
		VMP-7-29.5-012716	1/27/2016	<0.021	U		0.0023	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.0028**	J		<0.0064	U	
		VMP-7-29.5-042916	4/29/2016	<0.041	U		<0.029	U		<0.012	U		<0.01	U		<0.009	U					**0.012**	J		<0.012	U	
		VMP-7-29.5-072616	7/26/2016	<0.021	U		0.0056	J		<0.0064	U		<0.0053	U		<0.019	U					**0.024**			<0.0064	U	
		VMP-7-29.5-102516	10/25/2016	<0.02	U		0.0053	J		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.017**			<0.006	U	
		VMP-7-29.5-012517	1/25/2017	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0052**	J		<0.0061	U	
		VMP-7-29.5-052217	5/22/2017	<0.021	U		0.0018	J		**0.00089**	J		<0.0054	U		<0.019	U					<0.013	U		**0.0025**	J	
		VMP-7-29.5-072117	7/21/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-7-29.5-102517	10/25/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-7-29.5-012518	1/25/2018	<0.019	U		0.08			<0.0057	U		<0.0047	U		<0.017	U					**0.012**			<0.0057	U	
		VMP-7-29.5-042318	4/23/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-7-29.5-071918	7/19/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0015**	J		<0.0059	U	
		VMP-7-29.5-102218	10/22/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0029**	J		<0.006	U	
		VMP-7-29.5-020119	2/1/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0018**	J		<0.0057	U	
		VMP-7-29.5-042519	4/25/2019	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					<0.014	U		<0.007	U	
		VMP-7-29.5-072319	7/23/2019	<0.02	U		0.011	J		<0.0061	U		<0.005	U		<0.018	U					**0.0029**	J		<0.0061	U	
		VMP-7-29.5-102419	10/24/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.018	U		0.0021	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0048**	J		<0.0055	U	
		VMP-7-29.5-012720	1/27/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.02**			<0.006	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.02**			<0.0062	U	
		VMP-7-29.5-042720	4/27/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0034**	J		<0.0068	U	
		VMP-7-29.5-073020	7/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0062**	J		<0.0063	U	
		VMP-7-29.5-110420	11/4/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.38**			<0.006	U	
		VMP-7-29.5-012621	1/26/2021	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0031**	J		<0.0061	U	
	38 ft	VMP-7-38-020215	2/2/2015	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.0051	U					<0.014	J	U	<0.0069	U	
		VMP-7-38-043015	4/30/2015	**0.0014**	J		0.0014	J		<0.0069	U		<0.0058	J	U	<0.0051	U					**0.0014**	J		**0.0015**	J	
		VMP-7-38-072715	7/27/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-7-38-102815	10/28/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					**0.0048**	J		<0.0068	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					**0.0032**	J		<0.0058	U	
		VMP-7-38-012716	1/27/2016	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					**0.0051**	J		<0.0058	U	
		VMP-7-38-012716-DUP	1/27/2016	<0.024	U		0.015	J		<0.0073	U		<0.0061	U		<0.0054	U					**0.021**			<0.0073	U	
		VMP-7-38-042916	4/29/2016	<0.023	U		0.0018	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.0019**	J		**0.0029**	J	
		VMP-7-38-042916-DUP	4/29/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.0027**	J		**0.0028**	J	
		VMP-7-38-072616	7/26/2016	<0.026	U		<0.019	U		<0.0078	U		<0.0065	U		<0.023	U					**0.011**	J		<0.0078	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.022	U					**0.011**	J		<0.0074	U	
		VMP-7-38-102516	10/25/2016	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U		<0.013	U		**0.005**	J		<0.0059	U	
		VMP-7-38-102516-Dup	10/25/2016	<0.042	U		<0.031	U		<0.013	U		<0.011	U		<0.037	U		<0.027	U		**0.0064**	J		<0.013	U	
		VMP-7-38-012517	1/25/2017	**0.0017**	J		0.002	J		<0.0061	U		<0.005	U		<0.018	U					**0.0045**	J		<0.0061	U	
		VMP-7-38-012517-Dup	1/25/2017	<0.019	U		0.0019	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0038**	J		<0.0057	U	
		VMP-7-38-042417	4/24/2017	<0.02	U		0.0032	J		<0.006	U		<0.005	U		<0.018	U					**0.0049**	J		<0.006	U	
		VMP-7-38-102517	10/25/2017	<0.019	U		0.0022	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-7-38-012518	1/25/2018	<0.019	U		0.0025	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	J	U	<0.0056	U	
		VMP-7-38-042318	4/23/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-7-38-071918	7/19/2018	<0.02	U		0.003	J		<0.0061	U		<0.005	U		<0.018	U					**0.002**	J		<0.0061	U	
		VMP-7-38-071918-DUP	7/19/2018	<0.02	U		0.006	J		<0.0059	U		<0.005	U		<0.017	U					**0.0018**	J		<0.0059	U	
		VMP-7-38-102218	10/22/2018	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-7-38-012219	1/22/2019	<0.017	U		0.0054	J		<0.0052	U		<0.0043	U		<0.015	U					**0.0019**	J		<0.0052	U	
		VMP-7-38-042519	4/25/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.0064**	J		<0.0063	U	
		VMP-7-38-042519-DUP	4/25/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0057**	J		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-7-29.5-043015	4/30/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-7-29.5-072715	7/27/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-7-29.5-102815	10/28/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-7-29.5-012716	1/27/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-7-29.5-042916	4/29/2016	<0.011	U		<0.017	U		<0.017	U		<0.0074	U		**0.011**			<0.074	U		<0.014	U		<0.014	U	
		VMP-7-29.5-072616	7/26/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0018**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-7-29.5-102516	10/25/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0073**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-29.5-012517	1/25/2017	<0.0053	U		<0.0085	U		**0.061**			<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-7-29.5-052217	5/22/2017	<0.0056	U		<0.009	U		**0.027**			<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-7-29.5-072117	7/21/2017	<0.0051	U		<0.0082	U		**0.015**			<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-29.5-102517	10/25/2017	<0.005	U		<0.0081	U		**0.0081**			<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-7-29.5-012518	1/25/2018	**0.0011**	J		<0.0079	U		**0.0099**			<0.0034	U		**0.045**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-7-29.5-042318	4/23/2018	<0.005	U		<0.008	U		**0.008**			<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-7-29.5-071918	7/19/2018	<0.0052	U		<0.0083	U		**0.0088**			<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-29.5-102218	10/22/2018	<0.0052	U		<0.0084	U		**0.012**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-7-29.5-020119	2/1/2019	<0.005	U		<0.008	U		**0.012**			<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-7-29.5-042519	4/25/2019	<0.006	U		<0.0097	U		**0.0095**	J		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-7-29.5-072319	7/23/2019	<0.0053	U		<0.0085	U		**0.012**			<0.0036	U		**0.0047**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-7-29.5-102419	10/24/2019	<0.0048	U		<0.0077	U		**0.0045**	J		<0.0033	U		**0.0011**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.0048	U		<0.0077	U		**0.0042**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-7-29.5-012720	1/27/2020	<0.0052	U		<0.0084	U		**0.014**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.0053	U		<0.0086	U		**0.012**			<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-7-29.5-042720	4/27/2020	<0.0059	U		<0.0095	U		**0.005**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-7-29.5-073020	7/30/2020	<0.0088	U		<0.0088	U		**0.0099**			<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-29.5-110420	11/4/2020	<0.0052	U		<0.0083	U		**0.0093**			<0.0036	U		**0.00052**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-29.5-012621	1/26/2021	<0.0053	U		<0.0085	U		**0.016**			<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
	38 ft	VMP-7-38-020215	2/2/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-7-38-043015	4/30/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		**0.0033**	J		<0.0077	U		<0.0077	U	
		VMP-7-38-072715	7/27/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-7-38-102815	10/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		**0.0054**			<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-38-012716	1/27/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U	UJ	<0.035	U		<0.0065	U		<0.0065	U	
		VMP-7-38-012716-DUP	1/27/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.012**		J	<0.044	U		<0.0081	U		<0.0081	U	
		VMP-7-38-042916	4/29/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0031**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-7-38-042916-DUP	4/29/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0034**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-7-38-072616	7/26/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		<0.006	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-7-38-102516	10/25/2016	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-38-102516-Dup	10/25/2016	<0.011	U		<0.018	U		<0.018	U		<0.0076	U		<0.0098	U		<0.077	U		<0.014	U		<0.014	U	
		VMP-7-38-012517	1/25/2017	<0.0053	U		<0.0085	U		**0.013**			<0.0036	U		**0.0016**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-7-38-012517-Dup	1/25/2017	<0.005	U		<0.008	U		**0.012**			<0.0034	U		**0.001**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-7-38-042417	4/24/2017	<0.0052	U		<0.0083	U		**0.053**			<0.0036	U		**0.0019**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-38-102517	10/25/2017	<0.005	U		<0.008	U		**0.069**			<0.0034	U		**0.00048**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-7-38-012518	1/25/2018	<0.0049	U		<0.0079	U		**0.027**			<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-7-38-042318	4/23/2018	<0.0048	U		<0.0077	U		**0.027**			<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.005	U		<0.008	U		**0.027**			<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-7-38-071918	7/19/2018	<0.0053	U		<0.0085	U		**0.025**			<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-7-38-071918-DUP	7/19/2018	<0.0052	U		<0.0083	U		**0.024**			<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-7-38-102218	10/22/2018	<0.0058	U		<0.0093	U		**0.02**			<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-7-38-012219	1/22/2019	<0.0045	U		<0.0072	U		**0.018**			<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-7-38-042519	4/25/2019	<0.0055	U		<0.0088	U		**0.02**		J	<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-7-38-042519-DUP	4/25/2019	<0.005	U		<0.0081	U		**0.14**		J	<0.0035	U		<0.0045	U		**0.032**	J		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-7	29.5 ft	VMP-7-29.5-020215	2/2/2015	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-7-29.5-043015	4/30/2015	<0.0074	J	U	<0.0077	U		<0.0067	U		<0.0067	U		0.014			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-7-29.5-072715	7/27/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-7-29.5-102815	10/28/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-7-29.5-012716	1/27/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.013			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-29.5-042916	4/29/2016	<0.013	U		<0.014	U		<0.012	U		<0.012	U		0.0059	J		<0.0064	U		<0.011	U		<0.011	U	
		VMP-7-29.5-072616	7/26/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	J	U	<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-29.5-102516	10/25/2016	<0.0065	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0059			**0.0018**	J	
		VMP-7-29.5-012517	1/25/2017	**0.0029**	J		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-7-29.5-052217	5/22/2017	<0.007	U		<0.0074	U		<0.0064	J	U	<0.0064	U		0.012			<0.0033	U		0.0028	J		<0.0057	U	
		VMP-7-29.5-072117	7/21/2017	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-29.5-102517	10/25/2017	<0.0063	U		0.0012	J		<0.0058	U		<0.0058	U		0.0068			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-7-29.5-012518	1/25/2018	<0.0062	U		0.0016	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0021	J		<0.005	U	
		VMP-7-29.5-042318	4/23/2018	<0.0063	U		0.0018	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-7-29.5-071918	7/19/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-29.5-102218	10/22/2018	<0.0066	U		0.0022	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-7-29.5-020119	2/1/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-7-29.5-042519	4/25/2019	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-7-29.5-072319	7/23/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0065			<0.0032	U		0.0015	J		<0.0054	U	
		VMP-7-29.5-102419	10/24/2019	<0.006	U		0.0013	J		<0.0055	J	U	<0.0055	U		<0.0052	U		<0.0029	U		0.0013	J		<0.0049	U	
		VMP-7-29.5-102419-DUP	10/24/2019	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-7-29.5-012720	1/27/2020	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-7-29.5-012720-DUP	1/27/2020	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-7-29.5-042720	4/27/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-7-29.5-073020	7/30/2020	**0.0014**	J		0.0009	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-29.5-110420	11/4/2020	<0.0065	U		0.0022	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-7-29.5-012621	1/26/2021	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
	38 ft	VMP-7-38-020215	2/2/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-7-38-043015	4/30/2015	<0.0076	J	U	<0.0079	U		**0.0052**	J		**0.0027**	J		<0.0066	U		<0.0036	U		0.0027	J		**0.0019**	J	
		VMP-7-38-072715	7/27/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-7-38-102815	10/28/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-7-38-102815-DUP	10/28/2015	<0.0064	U		<0.0067	J	U	<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-38-012716	1/27/2016	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-7-38-012716-DUP	1/27/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		0.0016	J		<0.0064	U	
		VMP-7-38-042916	4/29/2016	<0.0076	U		<0.0079	U		**0.0021**	J		<0.0069	U		0.0062	J		<0.0036	U		0.0042	J		**0.0016**	J	
		VMP-7-38-042916-DUP	4/29/2016	<0.0076	U		<0.0079	U		**0.002**	J		<0.0069	U		0.0056	J		<0.0036	U		0.0043	J		**0.0012**	J	
		VMP-7-38-072616	7/26/2016	<0.0085	U		<0.0089	U		<0.0078	U		<0.0078	U		<0.0074	U		<0.004	U		<0.0069	U		<0.0069	U	
		VMP-7-38-072616-DUP	7/26/2016	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0066	U		<0.0066	U	
		VMP-7-38-102516	10/25/2016	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.001	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-38-102516-Dup	10/25/2016	<0.014	U		<0.014	U		<0.013	U		<0.013	U		<0.012	U		<0.0066	U		<0.011	U		<0.011	U	
		VMP-7-38-012517	1/25/2017	**0.0044**	J		<0.0069	U		<0.0061	U		<0.0061	U		0.00078	J		<0.0032	U		0.0033	J		<0.0054	U	
		VMP-7-38-012517-Dup	1/25/2017	**0.0038**	J		0.0013	J		<0.0057	U		<0.0057	U		0.0008	J		<0.003	U		0.0034	J		<0.005	U	
		VMP-7-38-042417	4/24/2017	**0.005**	J		0.0015	J		<0.006	U		<0.006	U		0.013			<0.0031	U		0.011			**0.0026**	J	
		VMP-7-38-102517	10/25/2017	**0.0026**	J		0.001	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-7-38-012518	1/25/2018	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		0.0009	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-7-38-042318	4/23/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-7-38-042318-DUP	4/23/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-7-38-071918	7/19/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-7-38-071918-DUP	7/19/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0014	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-7-38-102218	10/22/2018	<0.0073	U		0.0022	J		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-7-38-012219	1/22/2019	<0.0056	U		0.0012	J		<0.0052	U		<0.0052	U		0.0028	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-7-38-042519	4/25/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-7-38-042519-DUP	4/25/2019	**0.0033**	J		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	**0.0081**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-5-042715	4/27/2015	**0.0076**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-5-072815	7/28/2015	**0.031**			**0.0038**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0094	J		**0.0089**	J	
		VMP-8-5-102715	10/27/2015	<0.031	J	U	<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0067**	J	
		VMP-8-5-012716	1/27/2016	**0.018**	J		**0.00083**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0083	J		**0.005**	J	
		VMP-8-5-042916	4/29/2016	**0.0062**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.0026	J		<0.016	U	
		VMP-8-5-072916	7/29/2016	**0.04**			<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.029**		
		VMP-8-5-102516	10/25/2016	<0.03	J	U	<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-5-012317	1/23/2017	**0.015**	J		**0.00072**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0046**	J	
		VMP-8-5-042017	4/20/2017	**0.018**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0084**	J	
		VMP-8-5-071917	7/19/2017	**0.011**	J		**0.00058**	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-5-103017	10/30/2017	<0.027	J	U	<0.0037	J	U	<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-5-012218	1/22/2018	<0.027	J	U	<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-8-5-041818	4/18/2018	**0.0064**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-5-072518	7/25/2018	**0.024**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-8-5-102418	10/24/2018	**0.021**	J		**0.002**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-5-011819	1/18/2019	**0.0087**	J		<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-8-5-042419	4/24/2019	**0.01**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-5-072219	7/22/2019	**0.0099**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-8-5-101819	10/18/2019	**0.0075**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-5-012220	1/22/2020	<0.033	U		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.034	U		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-8-5-042220	4/22/2020	**0.011**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-5-072220	7/22/2020	**0.019**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0019**	J	
		VMP-8-5-102820	10/28/2020	**0.018**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-8-5-012121	1/21/2021	**0.0086**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.002**	J	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	**0.0098**	J		**0.019**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0027**	J	
		VMP-8-9.5-042715	4/27/2015	**0.016**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-9.5-072815	7/28/2015	**0.018**	J		<0.0049	J	U	<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.005**	J	
		VMP-8-9.5-102715	10/27/2015	<0.035	J	U	<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0094**	J	
		VMP-8-9.5-012716	1/27/2016	**0.01**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0052	J		<0.014	U	
		VMP-8-9.5-042916	4/29/2016	**0.014**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0035**	J	
		VMP-8-9.5-072916	7/29/2016	**0.0065**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-8-9.5-102516	10/25/2016	<0.028	J	U	<0.0038	J	U	<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	J	U
		VMP-8-9.5-012317	1/23/2017	**0.018**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0033	J		**0.0043**	J	
		VMP-8-9.5-042117	4/21/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-9.5-071917	7/19/2017	**0.01**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-9.5-103017	10/30/2017	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-8-9.5-012218	1/22/2018	<0.028	U		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-9.5-041818	4/18/2018	**0.013**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0038**	J	
		VMP-8-9.5-072518	7/25/2018	**0.04**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0065**	J	
		VMP-8-9.5-102418	10/24/2018	**0.0026**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-9.5-011819	1/18/2019	**0.008**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-8-9.5-042419	4/24/2019	**0.016**	J		**0.077**			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.14			<0.014	U	
		VMP-8-9.5-072219	7/22/2019	**0.012**	J		**0.024**			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.008	J		<0.014	U	
		VMP-8-9.5-101819	10/18/2019	**0.0058**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-9.5-012220	1/22/2020	**0.0064**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-9.5-042220	4/22/2020	**0.0077**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-9.5-072220	7/22/2020	**0.02**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0018**	J	
		VMP-8-9.5-072220-DUP	7/22/2020	**0.02**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.002**	J	
		VMP-8-9.5-102820	10/28/2020	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-9.5-012121	1/21/2021	**0.01**	J		**0.0011**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.013			<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-8-5-042715	4/27/2015	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-8-5-072815	7/28/2015	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0044**	J		<0.026	U		<0.0066	U	
		VMP-8-5-102715	10/27/2015	**0.017**			<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	J	U	<0.027	U		<0.0068	U	
		VMP-8-5-012716	1/27/2016	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-5-042916	4/29/2016	**0.0012**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-8-5-072916	7/29/2016	**0.00068**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0054**	J		<0.029	U		<0.0073	U	
		VMP-8-5-102516	10/25/2016	**0.00067**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.00097**	J		<0.026	ND,UJ	UJ	<0.0065	U	
		VMP-8-5-012317	1/23/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-8-5-042017	4/20/2017	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-8-5-071917	7/19/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0062	U	
		VMP-8-5-103017	10/30/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-8-5-012218	1/22/2018	<0.014	U	UJ	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-8-5-041818	4/18/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-8-5-072518	7/25/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0038**	J		<0.025	U		<0.0062	U	
		VMP-8-5-102418	10/24/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-8-5-011819	1/18/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-8-5-042419	4/24/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-5-072219	7/22/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0054**	J		<0.024	U		<0.0059	U	
		VMP-8-5-101819	10/18/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0063	U	
		VMP-8-5-012220	1/22/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-8-5-042220	4/22/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-8-5-072220	7/22/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0034**	J		<0.025	U		<0.0064	U	
		VMP-8-5-102820	10/28/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-8-5-012121	1/21/2021	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.00037**	J		<0.025	U		<0.0064	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-8-9.5-042715	4/27/2015	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-8-9.5-072815	7/28/2015	**0.01**	J		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0034**	J		<0.031	U		<0.0079	U	
		VMP-8-9.5-102715	10/27/2015	**0.0075**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0022**	J		<0.03	U		<0.0077	U	
		VMP-8-9.5-012716	1/27/2016	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-8-9.5-042916	4/29/2016	**0.0037**	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-8-9.5-072916	7/29/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.0011**	J		<0.029	U		<0.0072	U	
		VMP-8-9.5-102516	10/25/2016	**0.00078**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	ND,UJ	UJ	<0.0062	U	
		VMP-8-9.5-012317	1/23/2017	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-8-9.5-042117	4/21/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0009**	J		<0.025	U		<0.0062	U	
		VMP-8-9.5-071917	7/19/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0063	U	
		VMP-8-9.5-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-8-9.5-012218	1/22/2018	<0.014	U	UJ	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-9.5-041818	4/18/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-8-9.5-072518	7/25/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-8-9.5-102418	10/24/2018	**0.005**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-8-9.5-011819	1/18/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-8-9.5-042419	4/24/2019	**0.0028**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-9.5-072219	7/22/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-9.5-101819	10/18/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-8-9.5-012220	1/22/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-8-9.5-042220	4/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-8-9.5-072220	7/22/2020	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		**0.0031**	J		**0.0011**	J		<0.026	U		<0.0066	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0044**	J		<0.025	U		<0.0062	U	
		VMP-8-9.5-102820	10/28/2020	<0.016	U		<0.008	U		**0.0049**	J		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-8-9.5-012121	1/21/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0031**	J		<0.0054	U		<0.0054	U	
		VMP-8-5-042715	4/27/2015	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	J	U	<0.0069	J	U	**0.0032**	J		<0.0047	U		<0.0047	U	
		VMP-8-5-072815	7/28/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-8-5-102715	10/27/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	J	U	<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-8-5-012716	1/27/2016	**0.0017**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0029**	J		<0.0047	U		<0.0047	U	
		VMP-8-5-042916	4/29/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-8-5-072916	7/29/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-8-5-102516	10/25/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-8-5-012317	1/23/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-8-5-042017	4/20/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-8-5-071917	7/19/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-8-5-103017	10/30/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-8-5-012218	1/22/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-8-5-041818	4/18/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-8-5-072518	7/25/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-8-5-102418	10/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0017**	J		<0.0048	U		<0.0048	U	
		VMP-8-5-011819	1/18/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0027**	J		<0.0042	U		<0.0042	U	
		VMP-8-5-042419	4/24/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0032**	J		<0.0047	U		<0.0047	U	
		VMP-8-5-072219	7/22/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		<0.0057	U		<0.0046	U		<0.0046	U	
		VMP-8-5-101819	10/18/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-8-5-012220	1/22/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-8-5-042220	4/22/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-8-5-072220	7/22/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-8-5-102820	10/28/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-8-5-012121	1/21/2021	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	**0.0037**	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-8-9.5-042715	4/27/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	J	U	<0.0072	J	U	**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-072815	7/28/2015	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	J	U	**0.0024**	J		<0.0062	U		<0.0062	U	
		VMP-8-9.5-102715	10/27/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0027**	J		<0.006	U		<0.006	U	
		VMP-8-9.5-012716	1/27/2016	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-042916	4/29/2016	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.002**	J		<0.0045	U		<0.0045	U	
		VMP-8-9.5-072916	7/29/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0033**	J		<0.0056	U		<0.0056	U	
		VMP-8-9.5-102516	10/25/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-012317	1/23/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-8-9.5-042117	4/21/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-071917	7/19/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0019**	J		<0.0049	U		<0.0049	U	
		VMP-8-9.5-103017	10/30/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-8-9.5-012218	1/22/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-8-9.5-041818	4/18/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-072518	7/25/2018	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-8-9.5-102418	10/24/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-011819	1/18/2019	**0.00062**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-8-9.5-042419	4/24/2019	**0.067**			<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-8-9.5-072219	7/22/2019	**0.028**			<0.009	U		<0.007	U		<0.007	U		<0.007	U		<0.0058	U		<0.0047	U		<0.0047	U	
		VMP-8-9.5-101819	10/18/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-8-9.5-012220	1/22/2020	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-8-9.5-042220	4/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-8-9.5-072220	7/22/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-8-9.5-102820	10/28/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-8-9.5-012121	1/21/2021	**0.00084**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-5-042715	4/27/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	J	U	<0.0053	U		<0.0052	U		<0.0052	J	U	<0.017	U	
		VMP-8-5-072815	7/28/2015	<0.005	U		<0.005	U		<0.005	U		**0.0037**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-5-102715	10/27/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0024**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-8-5-012716	1/27/2016	<0.0046	U		<0.0046	U		<0.0046	U		**0.0079**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-5-042916	4/29/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-8-5-072916	7/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0024**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-8-5-102516	10/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-5-012317	1/23/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-5-042017	4/20/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-5-071917	7/19/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-5-103017	10/30/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-8-5-012218	1/22/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U	UJ	<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-8-5-041818	4/18/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-5-072518	7/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-5-102418	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-5-011819	1/18/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-8-5-042419	4/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-5-072219	7/22/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-8-5-101819	10/18/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-5-012220	1/22/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-8-5-042220	4/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-5-072220	7/22/2020	<0.0049	U		<0.0049	U		<0.0049	U		**0.0019**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-8-5-102820	10/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-8-5-012121	1/21/2021	<0.0049	U		<0.0049	U		<0.0049	U		**0.00094**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-9.5-042715	4/27/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	J	U	<0.017	U	
		VMP-8-9.5-072815	7/28/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-8-9.5-102715	10/27/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.003**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-8-9.5-012716	1/27/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-9.5-042916	4/29/2016	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-8-9.5-072916	7/29/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-8-9.5-102516	10/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-9.5-012317	1/23/2017	<0.0052	U		<0.0052	U		<0.0052	U		**0.0021**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-8-9.5-042117	4/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-9.5-071917	7/19/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-9.5-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-8-9.5-012218	1/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U	UJ	<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-9.5-041818	4/18/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-9.5-072518	7/25/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-9.5-102418	10/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-9.5-011819	1/18/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-8-9.5-042419	4/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-9.5-072219	7/22/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-9.5-101819	10/18/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-9.5-012220	1/22/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-8-9.5-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-9.5-072220	7/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		**0.00096**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.0011**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-9.5-102820	10/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-9.5-012121	1/21/2021	<0.0049	U		<0.0049	U		<0.0049	U		**0.0058**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.01	U		**0.0019**	J		0.007		J	<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-8-5-042715	4/27/2015	0.0065	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	ND,UJ	UJ	<0.0041	U	
		VMP-8-5-072815	7/28/2015	0.019			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		**0.0014**	J		<0.054	U		**0.0027**	J	
		VMP-8-5-102715	10/27/2015	0.0088	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-8-5-012716	1/27/2016	0.012			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	J	U	<0.05	U		<0.0041	J	U
		VMP-8-5-042916	4/29/2016	0.0071	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		**0.00086**	J		<0.059	U		**0.0014**	J	
		VMP-8-5-072916	7/29/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.00076**	J		<0.06	U		<0.005	U	
		VMP-8-5-102516	10/25/2016	0.013			**0.0022**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.00085**	J	
		VMP-8-5-012317	1/23/2017	0.0068	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-8-5-042017	4/20/2017	<0.01	J	U	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0016**	J	
		VMP-8-5-071917	7/19/2017	0.012			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-8-5-103017	10/30/2017	0.027			<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-8-5-012218	1/22/2018	0.0098	J0	J	<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-8-5-041818	4/18/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0012**	J		<0.05	U		**0.0022**	J	
		VMP-8-5-072518	7/25/2018	0.0067	J		**0.00097**	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.002**	J	
		VMP-8-5-102418	10/24/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0019**	J	
		VMP-8-5-011819	1/18/2019	<0.0079	U		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-8-5-042419	4/24/2019	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-8-5-072219	7/22/2019	<0.0086	ND,UJ	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-8-5-101819	10/18/2019	<0.0092	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0017**	J	
		VMP-8-5-012220	1/22/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0021**	J	
		VMP-8-5-012220-DUP	1/22/2020	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-8-5-042220	4/22/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-8-5-072220	7/22/2020	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-5-102820	10/28/2020	<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-8-5-012121	1/21/2021	0.026			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.0017**	J		<0.052	U		**0.0089**		
		VMP-8-9.5-042715	4/27/2015	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	ND,UJ	UJ	<0.0042	U	
		VMP-8-9.5-072815	7/28/2015	0.04			<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-8-9.5-102715	10/27/2015	0.12			<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-8-9.5-012716	1/27/2016	0.0057	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	J	U	<0.05	U		<0.0042	J	U
		VMP-8-9.5-042916	4/29/2016	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		**0.00074**	J	
		VMP-8-9.5-072916	7/29/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-8-9.5-102516	10/25/2016	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.00093**	J	
		VMP-8-9.5-012317	1/23/2017	0.018			<0.0057	U		0.0019	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.00092**	J	
		VMP-8-9.5-042117	4/21/2017	<0.009	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-8-9.5-071917	7/19/2017	0.011			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-9.5-103017	10/30/2017	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-8-9.5-012218	1/22/2018	0.0081	J	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-8-9.5-041818	4/18/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0015**	J	
		VMP-8-9.5-072518	7/25/2018	0.015			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-8-9.5-102418	10/24/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-8-9.5-011819	1/18/2019	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0011**	J		<0.046	U		**0.0032**	J	
		VMP-8-9.5-042419	4/24/2019	<0.0088	U		**0.2**			0.067			<0.0089	U		<0.0081	U		**0.53**			<0.05	U		**0.86**		
		VMP-8-9.5-072219	7/22/2019	0.012	J0	J	**0.12**			0.027			<0.0089	U		<0.0081	U		**0.19**			<0.05	U		**0.11**		
		VMP-8-9.5-101819	10/18/2019	<0.009	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-8-9.5-012220	1/22/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-8-9.5-042220	4/22/2020	0.0066	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-8-9.5-072220	7/22/2020	0.0076	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-8-9.5-072220-DUP	7/22/2020	0.007	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-8-9.5-102820	10/28/2020	<0.024	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-8-9.5-012121	1/21/2021	0.052			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.0033**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	U		**0.0024**	J	
		VMP-8-5-042715	4/27/2015	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.0042	U					**0.013**			<0.0057	J	U
		VMP-8-5-072815	7/28/2015	<0.021	U		0.016			<0.0062	U		**0.0016**	J		<0.0046	U					**0.032**			<0.0062	U	
		VMP-8-5-102715	10/27/2015	**0.0049**	J	J	<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0027**	J		<0.0065	U	
		VMP-8-5-012716	1/27/2016	<0.019	U		0.02			<0.0058	U		<0.0048	U		<0.0042	U					**0.031**			<0.0058	U	
		VMP-8-5-042916	4/29/2016	<0.023	U		0.0038	J		<0.0068	U		<0.0056	U		<0.005	U					**0.0083**	J		<0.0068	U	
		VMP-8-5-072916	7/29/2016	<0.023	U		0.0025	J		<0.0069	U		<0.0058	U		<0.02	U					**0.014**	J		<0.0069	U	
		VMP-8-5-102516	10/25/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.023**			<0.0062	U	
		VMP-8-5-012317	1/23/2017	**0.0016**	J		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.01**	J		<0.0059	U	
		VMP-8-5-042017	4/20/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0075**	J		<0.0066	U	
		VMP-8-5-071917	7/19/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.011**	J		<0.0059	U	
		VMP-8-5-103017	10/30/2017	<0.019	U		0.012	J		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-8-5-012218	1/22/2018	<0.018	U		0.014			<0.0056	U		<0.0046	U		<0.016	U					**0.029**			<0.0056	U	
		VMP-8-5-041818	4/18/2018	<0.019	U		0.006	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0034**	J		<0.0058	U	
		VMP-8-5-072518	7/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0039**	J		<0.0059	U	
		VMP-8-5-102418	10/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0039**	J		<0.0058	U	
		VMP-8-5-011819	1/18/2019	<0.017	U		0.0027	J		<0.0052	U		<0.0043	U		<0.015	U					**0.0016**	J		<0.0052	U	
		VMP-8-5-042419	4/24/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	ND,UJ	UJ	<0.017	U					<0.011	U		<0.0057	U	
		VMP-8-5-072219	7/22/2019	<0.019	U		0.0031	J		**0.0021**	J		<0.0047	U		<0.016	U					**0.0046**	J		**0.0068**		
		VMP-8-5-101819	10/18/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-8-5-012220	1/22/2020	<0.023	U		0.0072	J		<0.0068	U		<0.0057	U		<0.02	U					**0.03**			<0.0068	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.0067**	J		<0.007	U	
		VMP-8-5-042220	4/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0032**	J		**0.00092**	J	
		VMP-8-5-072220	7/22/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.01**	J		<0.006	U	
		VMP-8-5-102820	10/28/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0089**	J		<0.0061	U	
		VMP-8-5-012121	1/21/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0095**	J		<0.006	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	<0.02	U		0.013	J		<0.0059	U		<0.005	U		<0.0044	U					<0.012	U		<0.0059	U	
		VMP-8-9.5-042715	4/27/2015	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.0043	U					**0.006**	J		<0.0059	U	
		VMP-8-9.5-072815	7/28/2015	<0.025	U		<0.018	U		<0.0075	U		**0.002**	J		<0.0055	U					**0.0061**	J		<0.0075	U	
		VMP-8-9.5-102715	10/27/2015	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					**0.023**			<0.0073	U	
		VMP-8-9.5-012716	1/27/2016	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.0043	U					<0.012	J	U	<0.0058	U	
		VMP-8-9.5-042916	4/29/2016	**0.00091**	J		<0.013	U		<0.0055	U		<0.0046	U		<0.004	U					**0.0041**	J		<0.0055	U	
		VMP-8-9.5-072916	7/29/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-8-9.5-102516	10/25/2016	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U		<0.012	U		**0.012**			<0.0059	U	
		VMP-8-9.5-012317	1/23/2017	<0.022	U		0.008	J		<0.0065	U		<0.0054	U		<0.019	U					**0.036**			<0.0065	U	
		VMP-8-9.5-042117	4/21/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.022**			<0.0059	U	
		VMP-8-9.5-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.035**			<0.006	U	
		VMP-8-9.5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-8-9.5-012218	1/22/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0072**	J		<0.0057	U	
		VMP-8-9.5-041818	4/18/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-8-9.5-072518	7/25/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.0053**	J		<0.0063	U	
		VMP-8-9.5-102418	10/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-8-9.5-011819	1/18/2019	<0.018	U		0.008	J		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-8-9.5-042419	4/24/2019	<0.019	U		0.71			**0.0084**			<0.0048	ND,UJ	UJ	<0.017	U					<0.011	U		**0.012**		
		VMP-8-9.5-072219	7/22/2019	<0.019	U		0.039			**0.0046**	J		<0.0048	U		<0.017	U					**0.0057**	J		**0.0056**	J	
		VMP-8-9.5-101819	10/18/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-8-9.5-012220	1/22/2020	<0.022	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.049**			<0.0068	U	
		VMP-8-9.5-042220	4/22/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0037**	J		<0.0062	U	
		VMP-8-9.5-072220	7/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	J	U	<0.0063	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0051**	J		<0.0059	U	
		VMP-8-9.5-102820	10/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.044**			<0.0063	U	
		VMP-8-9.5-012121	1/21/2021	<0.02	U		0.011	J		<0.0061	U		<0.005	U		<0.018	U					**0.009**	J		<0.0061	J	U

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.0057	U		<0.0092	U		**0.0012**	J		<0.004	U		**0.0099**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-5-042715	4/27/2015	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	J	UJ	<0.0063	U		<0.0063	U	
		VMP-8-5-072815	7/28/2015	<0.0054	U		<0.0087	U		<0.0086	U		**0.0027**	J		**0.0055**			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-8-5-102715	10/27/2015	<0.0056	U		<0.0091	U		<0.009	U		**0.0028**	J		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-8-5-012716	1/27/2016	<0.005	U		<0.008	U		**0.0034**	J		<0.0034	U		**0.024**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-8-5-042916	4/29/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.001**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-8-5-072916	7/29/2016	<0.006	U		<0.0097	U		<0.0096	U		**0.0058**			**0.001**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-8-5-102516	10/25/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0012**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-8-5-012317	1/23/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-5-042017	4/20/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-5-071917	7/19/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-8-5-103017	10/30/2017	**0.00027**	J		<0.0079	U		<0.0078	U		<0.0034	U		**0.0047**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-8-5-012218	1/22/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0044**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-8-5-041818	4/18/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0014**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-5-072518	7/25/2018	<0.0051	U		<0.0083	U		**0.0018**	J		<0.0036	U		**0.0031**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-5-102418	10/24/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0014**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-8-5-011819	1/18/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.0018**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-8-5-042419	4/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U	UJ	<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-8-5-072219	7/22/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0017**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-8-5-101819	10/18/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-5-012220	1/22/2020	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-8-5-042220	4/22/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-8-5-072220	7/22/2020	<0.0052	U		<0.0084	U		**0.22**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-8-5-102820	10/28/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00038**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-8-5-012121	1/21/2021	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0061		U	<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-9.5-042715	4/27/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	ND,UJ	UJ	<0.0065	U		<0.0065	U	
		VMP-8-9.5-072815	7/28/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.0016**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-8-9.5-102715	10/27/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.002**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-8-9.5-012716	1/27/2016	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00062**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-9.5-042916	4/29/2016	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.00041**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-8-9.5-072916	7/29/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.00049**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-8-9.5-102516	10/25/2016	<0.0051	U		<0.0082	U		**0.0023**	J		<0.0035	U		**0.00096**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-8-9.5-012317	1/23/2017	**0.0061**			<0.009	U		<0.0089	U		<0.0039	U		**0.0061**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-8-9.5-042117	4/21/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-8-9.5-071917	7/19/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-9.5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0012**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-8-9.5-012218	1/22/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-8-9.5-041818	4/18/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-9.5-072518	7/25/2018	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-8-9.5-102418	10/24/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-8-9.5-011819	1/18/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0017**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-8-9.5-042419	4/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U	UJ	**0.94**			<0.034	U		<0.0064	U		<0.0064	U	
		VMP-8-9.5-072219	7/22/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.5**			<0.034	U		<0.0064	U		<0.0064	U	
		VMP-8-9.5-101819	10/18/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-9.5-012220	1/22/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0048**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-8-9.5-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-8-9.5-072220	7/22/2020	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-9.5-102820	10/28/2020	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.00023**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-8-9.5-012121	1/21/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00035**	J		<0.037	U		<0.0067	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-8-5-020915	2/9/2015	<0.0072	J	U	<0.0076	U		**0.013**			**0.0041**	J		<0.0063	U		<0.0034	U		0.0055	J		**0.0029**	J	
		VMP-8-5-042715	4/27/2015	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-8-5-072815	7/28/2015	<0.0068	U		<0.0071	U		**0.0011**	J		<0.0062	U		<0.0059	U		<0.0032	U		0.0027	J		**0.00095**	J	
		VMP-8-5-102715	10/27/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-8-5-012716	1/27/2016	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0026	J		<0.0051	U	
		VMP-8-5-042916	4/29/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-8-5-072916	7/29/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-8-5-102516	10/25/2016	<0.0068	U		<0.0071	U		<0.0062	J	U	<0.0062	U		0.0023	J		<0.0032	U		0.0055			**0.0011**	J	
		VMP-8-5-012317	1/23/2017	<0.0065	U		<0.0068	U		<0.0059	J	U	<0.0059	J	U	<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-5-042017	4/20/2017	<0.0072	U		0.0012	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-8-5-071917	7/19/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.00075	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-5-103017	10/30/2017	<0.0062	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-8-5-012218	1/22/2018	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-8-5-041818	4/18/2018	<0.0064	U		0.0019	J		**0.0006**	J		<0.0058	U		0.0084			<0.003	U		0.0014	J		<0.0051	U	
		VMP-8-5-072518	7/25/2018	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		0.0017	J		<0.0031	U		0.0024	J		**0.00089**	J	
		VMP-8-5-102418	10/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-5-011819	1/18/2019	<0.0056	U		0.0014	J		<0.0052	U		<0.0052	U		0.001	J		<0.0027	U		0.0011	J		<0.0046	U	
		VMP-8-5-042419	4/24/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.014			<0.003	U		<0.005	U		<0.005	U	
		VMP-8-5-072219	7/22/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		0.012			<0.0029	U		<0.005	U		<0.005	U	
		VMP-8-5-101819	10/18/2019	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.001	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-5-012220	1/22/2020	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-8-5-012220-DUP	1/22/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-8-5-042220	4/22/2020	<0.0069	U		<0.0072	U		**0.0083**			**0.0026**	J		<0.006	U		<0.0033	U		0.0024	J		**0.0015**	J	
		VMP-8-5-072220	7/22/2020	**0.0053**	J		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-5-102820	10/28/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-8-5-012121	1/21/2021	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
	9.5 ft	VMP-8-9.5-020915	2/9/2015	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.019			<0.0031	U		0.00066	J		<0.0052	U	
		VMP-8-9.5-042715	4/27/2015	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0028	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-8-9.5-072815	7/28/2015	<0.0082	U		<0.0086	U		**0.002**	J		<0.0075	U		<0.0071	U		<0.0039	U		0.0014	J		<0.0066	U	
		VMP-8-9.5-102715	10/27/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-8-9.5-012716	1/27/2016	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		0.00083	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-9.5-042916	4/29/2016	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0016	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-8-9.5-072916	7/29/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-8-9.5-102516	10/25/2016	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-9.5-012317	1/23/2017	<0.0071	U		<0.0074	U		<0.0065	J	U	<0.0065	J	U	0.00085	J		<0.0034	U		0.0035	J		**0.0014**	J	
		VMP-8-9.5-042117	4/21/2017	<0.0064	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-9.5-071917	7/19/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-9.5-103017	10/30/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-8-9.5-012218	1/22/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-8-9.5-041818	4/18/2018	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		0.0018	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-9.5-072518	7/25/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-8-9.5-102418	10/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-9.5-011819	1/18/2019	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		0.0048	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-8-9.5-042419	4/24/2019	<0.0063	U		<0.0065	U		**0.025**			**0.011**			1.1			<0.003	U		0.72			**0.24**		
		VMP-8-9.5-072219	7/22/2019	<0.0063	U		<0.0065	U		**0.011**			**0.0047**	J		0.51			<0.003	U		0.42			**0.14**		
		VMP-8-9.5-101819	10/18/2019	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-8-9.5-012220	1/22/2020	<0.0074	U		<0.0077	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-8-9.5-042220	4/22/2020	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-8-9.5-072220	7/22/2020	<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-8-9.5-072220-DUP	7/22/2020	<0.0065	U		0.0017	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-9.5-102820	10/28/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-8-9.5-012121	1/21/2021	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		0.001	J		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.003**	J	
		VMP-8-23.5-050515-R	5/5/2015	**0.017**	J		**0.007**			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.011**	J	
		VMP-8-23.5-072815	7/28/2015	**0.046**			**0.0063**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.015			**0.0063**	J	
		VMP-8-23.5-102715	10/27/2015	**0.034**			<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0056**	J	
		VMP-8-23.5-012716	1/27/2016	**0.0083**	J		**0.003**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-23.5-042916	4/29/2016	**0.0052**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-23.5-072916	7/29/2016	**0.02**	J		**0.0085**			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0096**	J	
		VMP-8-23.5-072916-DUP	7/29/2016	**0.01**	J		**0.0074**			<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0029**	J	
		VMP-8-23.5-102516	10/25/2016	**0.016**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0049**	J	
		VMP-8-23.5-012317	1/23/2017	**0.011**	J		<0.0043	J	U	<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-23.5-042117	4/21/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-23.5-071917	7/19/2017	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-23.5-103017	10/30/2017	<0.026	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0035**	J	
		VMP-8-23.5-012218	1/22/2018	<0.028	J	U	<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.028	J	U	<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-23.5-041818	4/18/2018	**0.026**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.01**	J	
		VMP-8-23.5-072518	7/25/2018	**0.12**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0059**	J	
		VMP-8-23.5-102418	10/24/2018	**0.012**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-8-23.5-011819	1/18/2019	**0.016**	J		**0.0025**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0061	J		**0.003**	J	
		VMP-8-23.5-022719R	2/27/2019	**0.027**			**0.0018**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0055**	J	
		VMP-8-23.5-042419	4/24/2019	**0.018**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-23.5-072219	7/22/2019	**0.0084**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-23.5-101819	10/18/2019	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-23.5-012220	1/22/2020	**0.011**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-8-23.5-042220	4/22/2020	**0.021**	J		**0.002**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.005	J		**0.0026**	J	
		VMP-8-23.5-072220	7/22/2020	**0.029**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0034**	J	
		VMP-8-23.5-102820	10/28/2020	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-23.5-012121	1/21/2021	**0.023**	J		**0.001**	J		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0016**	J	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-8-23.5-050515-R	5/5/2015	**0.0017**	J		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-8-23.5-072815	7/28/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0062	U	
		VMP-8-23.5-102715	10/27/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0035**	J		<0.028	U		<0.007	U	
		VMP-8-23.5-012716	1/27/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-8-23.5-042916	4/29/2016	**0.00065**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-8-23.5-072916	7/29/2016	**0.00056**	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0008**	J		<0.023	U		<0.0058	U	
		VMP-8-23.5-072916-DUP	7/29/2016	**0.0022**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-8-23.5-102516	10/25/2016	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-8-23.5-012317	1/23/2017	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-8-23.5-042117	4/21/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-23.5-071917	7/19/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0064	U	
		VMP-8-23.5-103017	10/30/2017	<0.014	U		<0.007	U		<0.0051	J	U	<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-8-23.5-012218	1/22/2018	<0.014	U	UJ	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.015	U	UJ	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-8-23.5-041818	4/18/2018	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-8-23.5-072518	7/25/2018	**0.0046**	J		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		**0.0036**	J		<0.0064	U	
		VMP-8-23.5-102418	10/24/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-8-23.5-011819	1/18/2019	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-23.5-022719R	2/27/2019	**0.0022**	J		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-8-23.5-042419	4/24/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-23.5-072219	7/22/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-8-23.5-101819	10/18/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-8-23.5-012220	1/22/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-8-23.5-042220	4/22/2020	**0.002**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-8-23.5-072220	7/22/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-8-23.5-102820	10/28/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-8-23.5-012121	1/21/2021	**0.0017**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0036**	J		<0.0049	U		<0.0049	U	
		VMP-8-23.5-050515-R	5/5/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0032**	J		<0.0053	U		<0.0053	U	
		VMP-8-23.5-072815	7/28/2015	**0.0013**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-8-23.5-102715	10/27/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-8-23.5-012716	1/27/2016	**0.0012**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-8-23.5-042916	4/29/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-8-23.5-072916	7/29/2016	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-8-23.5-072916-DUP	7/29/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-8-23.5-102516	10/25/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-8-23.5-012317	1/23/2017	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-8-23.5-042117	4/21/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-8-23.5-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-8-23.5-103017	10/30/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-8-23.5-012218	1/22/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0018**	J		<0.0047	U		<0.0047	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-8-23.5-041818	4/18/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-8-23.5-072518	7/25/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-8-23.5-102418	10/24/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-8-23.5-011819	1/18/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-8-23.5-022719R	2/27/2019	**0.0032**	J		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-8-23.5-042419	4/24/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0027**	J		<0.0047	U		<0.0047	U	
		VMP-8-23.5-072219	7/22/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-8-23.5-101819	10/18/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-8-23.5-012220	1/22/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-8-23.5-042220	4/22/2020	**0.0048**			<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-8-23.5-072220	7/22/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-8-23.5-102820	10/28/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-8-23.5-012121	1/21/2021	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.003**	J		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-23.5-050515-R	5/5/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-8-23.5-072815	7/28/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0054**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-23.5-102715	10/27/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.0058**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-23.5-012716	1/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-23.5-042916	4/29/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-8-23.5-072916	7/29/2016	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-8-23.5-072916-DUP	7/29/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-8-23.5-102516	10/25/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-8-23.5-012317	1/23/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-23.5-042117	4/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-23.5-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-8-23.5-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-8-23.5-012218	1/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U	UJ	<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U	UJ	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-23.5-041818	4/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-23.5-072518	7/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-8-23.5-102418	10/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-8-23.5-011819	1/18/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-23.5-022719R	2/27/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-8-23.5-042419	4/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-23.5-072219	7/22/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-23.5-101819	10/18/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-23.5-012220	1/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-8-23.5-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-23.5-072220	7/22/2020	**0.0007**	J		0.0057			<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-23.5-102820	10/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-8-23.5-012121	1/21/2021	<0.0053	U		<0.0053	U		<0.0053	U		**0.0075**	J		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-23.5-050515-R	5/5/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0012**	J	
		VMP-8-23.5-072815	7/28/2015	0.024			**0.0013**	J		<0.0059	U		<0.0092	U		<0.0084	U		**0.0026**	J		<0.051	U		**0.0044**		
		VMP-8-23.5-102715	10/27/2015	0.0043	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-8-23.5-012716	1/27/2016	0.0029	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	J	U	<0.058	U		<0.0048	J	U
		VMP-8-23.5-042916	4/29/2016	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-8-23.5-072916	7/29/2016	0.2		J	**0.0017**	J		0.003	J		<0.0086	U		<0.0078	U		**0.0018**	J		<0.048	U		<0.0039	U	
		VMP-8-23.5-072916-DUP	7/29/2016	0.017		J	**0.0018**	J		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0022**	J	
		VMP-8-23.5-102516	10/25/2016	0.0031	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-8-23.5-012317	1/23/2017	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-8-23.5-042117	4/21/2017	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-8-23.5-071917	7/19/2017	0.0082	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-23.5-103017	10/30/2017	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-8-23.5-012218	1/22/2018	0.032	J0	J	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0014**	J		<0.05	U		**0.0023**	J	
		VMP-8-23.5-012218-DUP	1/22/2018	0.053	J0	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0016**	J	
		VMP-8-23.5-041818	4/18/2018	0.012			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-23.5-072518	7/25/2018	0.0096			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-8-23.5-102418	10/24/2018	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-8-23.5-011819	1/18/2019	0.0064	J		**0.0039**	J		0.0036	J		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0022**	J	
		VMP-8-23.5-022719R	2/27/2019	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		**0.0023**	J		<0.047	U		**0.0042**		
		VMP-8-23.5-042419	4/24/2019	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-8-23.5-072219	7/22/2019	<0.0097	ND,UJ	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.002**	J		<0.055	U		**0.0051**		
		VMP-8-23.5-101819	10/18/2019	0.019		J	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-8-23.5-012220	1/22/2020	0.014			<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-8-23.5-042220	4/22/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.0065**			<0.054	U		**0.017**		
		VMP-8-23.5-072220	7/22/2020	0.0065	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-8-23.5-102820	10/28/2020	<0.023	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-23.5-012121	1/21/2021	0.031			<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.0044	U					<0.012	U		<0.0059	U	
		VMP-8-23.5-050515-R	5/5/2015	<0.022	U		0.0017	J		<0.0065	J	U	<0.0054	U		<0.0047	U					**0.025**			<0.0065	U	
		VMP-8-23.5-072815	7/28/2015	<0.02	U		0.024			<0.0059	U		<0.0049	U		<0.0043	U					**0.056**			<0.0059	U	
		VMP-8-23.5-102715	10/27/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	U		<0.0066	U	
		VMP-8-23.5-012716	1/27/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0049	U					<0.013		U	<0.0066	U	
		VMP-8-23.5-042916	4/29/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					<0.014	U		<0.0068	U	
		VMP-8-23.5-072916	7/29/2016	<0.018	U		<0.013	U		**0.001**	J		<0.0046	U		<0.016	U					**0.01**	J		**0.0038**	J	
		VMP-8-23.5-072916-DUP	7/29/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0066**	J		**0.0039**	J	
		VMP-8-23.5-102516	10/25/2016	**0.0021**	J		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		**0.0054**	J		<0.0064	U	
		VMP-8-23.5-012317	1/23/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0089**	J		<0.0066	U	
		VMP-8-23.5-042117	4/21/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0053**	J		<0.0057	U	
		VMP-8-23.5-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.039**			<0.006	U	
		VMP-8-23.5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-8-23.5-012218	1/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.019**			<0.0058	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.013**			<0.0058	U	
		VMP-8-23.5-041818	4/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.003**	J		<0.006	U	
		VMP-8-23.5-072518	7/25/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.036**			<0.0061	U	
		VMP-8-23.5-102418	10/24/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-8-23.5-011819	1/18/2019	<0.019	U		0.0036	J		<0.0058	U		<0.0048	U		<0.017	U					**0.002**	J		**0.0022**	J	
		VMP-8-23.5-022719R	2/27/2019	<0.018	U		0.0018	J		<0.0054	U		<0.0045	U		<0.016	U					**0.01**	J		<0.0054	U	
		VMP-8-23.5-042419	4/24/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	ND,UJ	UJ	<0.017	U					<0.011	U		<0.0057	U	
		VMP-8-23.5-072219	7/22/2019	<0.021	U		0.0024	J		<0.0063	U		<0.0053	U		<0.019	U					**0.019**			<0.0063	U	
		VMP-8-23.5-101819	10/18/2019	<0.021	U		<0.015	U		**0.0016**	J		<0.0052	U		<0.018	U					**0.002**	J		**0.0049**	J	
		VMP-8-23.5-012220	1/22/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.14**			<0.0065	U	
		VMP-8-23.5-042220	4/22/2020	<0.021	U		0.017			<0.0062	U		<0.0052	U		<0.018	U					**0.0037**	J		<0.0062	U	
		VMP-8-23.5-072220	7/22/2020	**0.00088**	J		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	J	U	<0.0058	U	
		VMP-8-23.5-102820	10/28/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.015**			<0.006	U	
		VMP-8-23.5-012121	1/21/2021	<0.022	U		0.0036	J		<0.0066	U		<0.0055	U		<0.019	U					**0.017**			<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.0052	U		<0.0083	U		**0.0021**	J		<0.0036	U		<0.006		U	<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-23.5-050515-R	5/5/2015	<0.0056	U		<0.009	U		**0.0012**	J		<0.0039	U		**0.0011**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-8-23.5-072815	7/28/2015	<0.0051	U		<0.0082	U		<0.0081	U		**0.0035**			**0.01**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-23.5-102715	10/27/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-23.5-012716	1/27/2016	<0.0058	U		<0.0093	U		**0.0049**	J		<0.004	U		**0.0012**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-8-23.5-042916	4/29/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-8-23.5-072916	7/29/2016	<0.0048	U		<0.0077	U		<0.0076	U		**0.0034**			**0.0015**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-8-23.5-072916-DUP	7/29/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00092**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-8-23.5-102516	10/25/2016	<0.0055	U		<0.0089	U		**0.0018**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-8-23.5-012317	1/23/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.00092**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-23.5-042117	4/21/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-8-23.5-071917	7/19/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-8-23.5-103017	10/30/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.00042**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-8-23.5-012218	1/22/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-23.5-041818	4/18/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-23.5-072518	7/25/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.00082**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-8-23.5-102418	10/24/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-8-23.5-011819	1/18/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0053**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-8-23.5-022719R	2/27/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.002**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-8-23.5-042419	4/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U	UJ	<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-8-23.5-072219	7/22/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0066**			<0.038	U		<0.007	U		<0.007	U	
		VMP-8-23.5-101819	10/18/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-8-23.5-012220	1/22/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-8-23.5-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-8-23.5-072220	7/22/2020	<0.005	U		<0.0081	U		**0.016**			<0.0035	U		<0.0044	U		<0.035	U		**0.00075**	J		<0.0064	U	
		VMP-8-23.5-102820	10/28/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-8-23.5-012121	1/21/2021	<0.0057	U		<0.0092	U		**0.0016**	J		<0.0039	U		**0.00062**	J		<0.04	U		<0.0073	U		<0.0073	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-8	23.5 ft	VMP-8-23.5-020915	2/9/2015	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0051	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-23.5-050515-R	5/5/2015	<0.0071	U		0.0012	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-8-23.5-072815	7/28/2015	<0.0064	U		0.0013	J		**0.0013**	J		<0.0059	U		0.0022	J		<0.003	U		0.004	J		**0.0017**	J	
		VMP-8-23.5-102715	10/27/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-8-23.5-012716	1/27/2016	<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		0.024			<0.0034	U		0.0019	J		<0.0059	U	
		VMP-8-23.5-042916	4/29/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-8-23.5-072916	7/29/2016	<0.006	U		0.0016	J		<0.0055	J	U	<0.0055	J	U	0.0021	J		<0.0029	U		0.004	J		**0.0015**	J	
		VMP-8-23.5-072916-DUP	7/29/2016	<0.0066	U		0.0013	J		<0.006	J	U	<0.006	U		0.0016	J		<0.0031	U		0.0045	J		**0.0017**	J	
		VMP-8-23.5-102516	10/25/2016	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-8-23.5-012317	1/23/2017	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-8-23.5-042117	4/21/2017	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-8-23.5-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.00085	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-23.5-103017	10/30/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-8-23.5-012218	1/22/2018	<0.0063	U		0.00094	J		<0.0058	U		<0.0058	U		0.0013	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-23.5-012218-DUP	1/22/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0012	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-8-23.5-041818	4/18/2018	<0.0066	U		0.0018	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-23.5-072518	7/25/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-8-23.5-102418	10/24/2018	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-8-23.5-011819	1/18/2019	<0.0063	U		<0.0066	U		**0.015**			**0.004**	J		0.0017	J		<0.003	U		0.011			**0.0046**	J	
		VMP-8-23.5-022719R	2/27/2019	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-8-23.5-042419	4/24/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-8-23.5-072219	7/22/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0031	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-8-23.5-101819	10/18/2019	<0.0068	U		0.0018	J		<0.0062	U		<0.0062	U		0.012			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-8-23.5-012220	1/22/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-8-23.5-042220	4/22/2020	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-8-23.5-072220	7/22/2020	**0.0053**	J		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.00046	J		<0.0051	U	
		VMP-8-23.5-102820	10/28/2020	<0.0066	U		0.0017	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-23.5-012121	1/21/2021	<0.0072	U		0.0013	J		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		0.0005	J		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	**0.006**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-35.5-042715	4/27/2015	**0.0047**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-35.5-072815	7/28/2015	**0.035**			<0.0046	J	U	<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0053**	J	
		VMP-8-35.5-072815-DUP	7/28/2015	**0.035**			<0.0041	J	U	<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0079**	J	
		VMP-8-35.5-012816	1/28/2016	**0.0087**	J		<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-8-35.5-012816-DUP	1/28/2016	**0.0095**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-35.5-042916	4/29/2016	**0.0089**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-35.5-080316	8/3/2016	**0.016**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-35.5-102516	10/25/2016	**0.0057**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-8-35.5-102516-Dup	10/25/2016	**0.0059**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-8-35.5-012317	1/23/2017	**0.027**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0029	J		<0.014	U	
		VMP-8-35.5-042117	4/21/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0045**	J	
		VMP-8-35.5-071917	7/19/2017	**0.042**	J		<0.007	U		<0.015	U		<0.023	U		<0.085	U		<0.0048	U		<0.021	U		**0.02**	J	
		VMP-8-35.5-071917-DUP	7/19/2017	**0.028**	J		<0.0078	U		<0.016	U		<0.025	U		<0.095	U		<0.0054	U		<0.023	U		<0.029	U	
		VMP-8-35.5-103017	10/30/2017	<0.027	J	U	<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-8-35.5-042018	4/20/2018	**0.0094**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0029**	J	
		VMP-8-35.5-072518	7/25/2018	**0.055**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.01**	J	
		VMP-8-35.5-072518-DUP	7/25/2018	**0.021**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-8-35.5-102418	10/24/2018	**0.036**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0032**	J	
		VMP-8-35.5-011819	1/18/2019	**0.0071**	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-8-35.5-042419	4/24/2019	**0.01**	J		**0.0023**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-35.5-042419-DUP	4/24/2019	**0.011**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-8-35.5-072219	7/22/2019	**0.023**	J		**0.0023**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-35.5-072219-DUP	7/22/2019	**0.0063**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-35.5-101819	10/18/2019	**0.0097**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-8-35.5-012220	1/22/2020	**0.0054**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-8-35.5-042220	4/22/2020	**0.0098**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0021	J		<0.015	U	
		VMP-8-35.5-072220	7/22/2020	**0.013**	J		**0.00084**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0024**	J	
		VMP-8-35.5-102820	10/28/2020	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-8-35.5-102820-DUP	10/28/2020	**0.012**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-8-35.5-012121	1/21/2021	**0.015**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0014**	J	
	5 ft	VMP-9-5-021115	2/11/2015	**0.01**	J		**0.00095**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0032**	J	
		VMP-9-5-050415	5/4/2015	**0.023**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-9-5-072815	7/28/2015	**0.036**			<0.0045	J	U	**0.0017**	J		<0.014	U		<0.055	U		<0.0031	U		0.041			**0.0082**	J	
		VMP-9-5-102815	10/28/2015	<0.031	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0019**	J	
		VMP-9-5-012816	1/28/2016	**0.013**	J		**0.0012**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-5-042816	4/28/2016	**0.019**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0048**	J	
		VMP-9-5-080116	8/1/2016	**0.023**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0057**	J	
		VMP-9-5-102516	10/25/2016	<0.031	J	U	<0.0042	J	U	<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	J	U
		VMP-9-5-120916	12/9/2016	**0.013**	J		**0.0012**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.012			**0.005**	J	
		VMP-9-5-012317	1/23/2017	**0.017**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0081	J		**0.0025**	J	
		VMP-9-5-042017	4/20/2017	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0021**	J	
		VMP-9-5-071917	7/19/2017	**0.012**	J		**0.00042**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-5-110117	11/1/2017	**0.0091**	J		<0.0035	J	U	<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-9-5-012218	1/22/2018	**0.0064**	J		<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-5-042618	4/26/2018	**0.0067**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-5-071918	7/19/2018	**0.038**			**0.00053**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0075**	J	
		VMP-9-5-102318	10/23/2018	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-5-012519	1/25/2019	**0.0083**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-9-5-042419	4/24/2019	**0.066**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0041**	J	
		VMP-9-5-071919	7/19/2019	**0.021**	J		**0.0012**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-5-102519	10/25/2019	<0.03	U		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-5-012220	1/22/2020	**0.006**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-9-5-042220	4/22/2020	**0.013**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-5-072220	7/22/2020	**0.02**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0026**	J	
		VMP-9-5-072220-DUP	7/22/2020	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0017**	J	
		VMP-9-5-102820	10/28/2020	**0.026**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0027**	J	
		VMP-9-5-012121	1/21/2021	**0.0095**	J		**0.00051**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.0072	J		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0014**	J		<0.028	U		<0.007	U	
		VMP-8-35.5-042715	4/27/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-8-35.5-072815	7/28/2015	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0065**	J		<0.03	U		<0.0074	U	
		VMP-8-35.5-072815-DUP	7/28/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.0058**	J		<0.026	U		<0.0066	U	
		VMP-8-35.5-012816	1/28/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-8-35.5-012816-DUP	1/28/2016	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-8-35.5-042916	4/29/2016	**0.0015**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-8-35.5-080316	8/3/2016	**0.016**			<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0015**	J		<0.026	U		<0.0065	U	
		VMP-8-35.5-102516	10/25/2016	**0.0016**	J		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-8-35.5-102516-Dup	10/25/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-8-35.5-012317	1/23/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-8-35.5-042117	4/21/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0015**	J		<0.024	U		<0.0061	U	
		VMP-8-35.5-071917	7/19/2017	**0.0035**	J		<0.014	U		<0.01	U		<0.019	U		<0.023	U		**0.01**	J		<0.045	U		<0.011	U	
		VMP-8-35.5-071917-DUP	7/19/2017	<0.03	U		<0.015	U		<0.011	U		<0.021	U		<0.026	U		**0.0093**	J		<0.05	U		<0.013	U	
		VMP-8-35.5-103017	10/30/2017	**0.0014**	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-8-35.5-042018	4/20/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-8-35.5-072518	7/25/2018	**0.0059**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0055**	J		**0.0035**	J		<0.0063	U	
		VMP-8-35.5-072518-DUP	7/25/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0052**	J		<0.025	U		<0.0062	U	
		VMP-8-35.5-102418	10/24/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-8-35.5-011819	1/18/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.0051	U		<0.021	U		<0.0054	U	
		VMP-8-35.5-042419	4/24/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-8-35.5-042419-DUP	4/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-8-35.5-072219	7/22/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0067**			<0.025	U		<0.0063	U	
		VMP-8-35.5-072219-DUP	7/22/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0058**	J		<0.025	U		<0.0063	U	
		VMP-8-35.5-101819	10/18/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-8-35.5-012220	1/22/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-8-35.5-042220	4/22/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-8-35.5-072220	7/22/2020	**0.018**			<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.015**			<0.025	U		<0.0063	U	
		VMP-8-35.5-102820	10/28/2020	**0.0022**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-8-35.5-012121	1/21/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
	5 ft	VMP-9-5-021115	2/11/2015	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-9-5-050415	5/4/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-9-5-072815	7/28/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0043**	J		**0.0033**	J		<0.0073	U	
		VMP-9-5-102815	10/28/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-9-5-012816	1/28/2016	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-9-5-042816	4/28/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-9-5-080116	8/1/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0019**	J		<0.028	U		<0.0071	U	
		VMP-9-5-102516	10/25/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-9-5-120916	12/9/2016	**0.0025**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0063	U	
		VMP-9-5-012317	1/23/2017	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-9-5-042017	4/20/2017	**0.044**			<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-9-5-071917	7/19/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.003**	J		<0.025	U		<0.0064	U	
		VMP-9-5-110117	11/1/2017	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-9-5-012218	1/22/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-9-5-042618	4/26/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-9-5-071918	7/19/2018	**0.002**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-9-5-102318	10/23/2018	**0.002**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-9-5-012519	1/25/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-9-5-042419	4/24/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-9-5-071919	7/19/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-9-5-102519	10/25/2019	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-9-5-012220	1/22/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	ND,UJ	UJ	<0.0062	U	
		VMP-9-5-042220	4/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-9-5-072220	7/22/2020	**0.004**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0011**	J		<0.027	U		<0.0068	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.00079**	J		<0.026	U		<0.0066	U	
		VMP-9-5-102820	10/28/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-9-5-012121	1/21/2021	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.00051**	J		<0.026	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0028**	J		<0.0054	U		<0.0054	U	
		VMP-8-35.5-042715	4/27/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0035**	J		<0.0051	U		<0.0051	U	
		VMP-8-35.5-072815	7/28/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.002**	J		<0.0058	U		<0.0058	U	
		VMP-8-35.5-072815-DUP	7/28/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-8-35.5-012816	1/28/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0024**	J		<0.006	U		<0.006	U	
		VMP-8-35.5-012816-DUP	1/28/2016	**0.00083**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-8-35.5-042916	4/29/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-8-35.5-080316	8/3/2016	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0033**	J		<0.0051	U		<0.0051	U	
		VMP-8-35.5-102516	10/25/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-8-35.5-102516-Dup	10/25/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-8-35.5-012317	1/23/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-8-35.5-042117	4/21/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-8-35.5-071917	7/19/2017	<0.0075	U		<0.017	U		<0.013	U		<0.013	U		<0.013	U		<0.011	U		<0.0089	U		<0.0089	U	
		VMP-8-35.5-071917-DUP	7/19/2017	<0.0084	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		**0.0031**	J		<0.0099	U		<0.0099	U	
		VMP-8-35.5-103017	10/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-8-35.5-042018	4/20/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-8-35.5-072518	7/25/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-8-35.5-072518-DUP	7/25/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-8-35.5-102418	10/24/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-8-35.5-011819	1/18/2019	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0026**	J		<0.0042	U		<0.0042	U	
		VMP-8-35.5-042419	4/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-8-35.5-042419-DUP	4/24/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-8-35.5-072219	7/22/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-8-35.5-072219-DUP	7/22/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-8-35.5-101819	10/18/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-8-35.5-012220	1/22/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0067	U		<0.0055	U		<0.0055	U	
		VMP-8-35.5-042220	4/22/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-8-35.5-072220	7/22/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-8-35.5-102820	10/28/2020	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-8-35.5-012121	1/21/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
	5 ft	VMP-9-5-021115	2/11/2015	**0.001**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0018**	J		<0.0055	U		<0.0055	U	
		VMP-9-5-050415	5/4/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.002**	J		<0.0056	U		<0.0056	U	
		VMP-9-5-072815	7/28/2015	**0.0035**	J		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-9-5-102815	10/28/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0036**	J		<0.0052	U		<0.0052	J	U
		VMP-9-5-012816	1/28/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-9-5-042816	4/28/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-9-5-080116	8/1/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-9-5-102516	10/25/2016	**0.0011**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-9-5-120916	12/9/2016	**0.00078**	J		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-9-5-012317	1/23/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-9-5-042017	4/20/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-9-5-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-9-5-110117	11/1/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		<0.0054	U		<0.0044	U		<0.0044	U	
		VMP-9-5-012218	1/22/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-9-5-042618	4/26/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-9-5-071918	7/19/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-9-5-102318	10/23/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-9-5-012519	1/25/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0044	U		<0.0044	U	
		VMP-9-5-042419	4/24/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-9-5-071919	7/19/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-9-5-102519	10/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0018**	J		<0.005	U		<0.005	U	
		VMP-9-5-012220	1/22/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-9-5-042220	4/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.002**	J		<0.0051	U		<0.0051	U	
		VMP-9-5-072220	7/22/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-9-5-102820	10/28/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-9-5-012121	1/21/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-35.5-042715	4/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-35.5-072815	7/28/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-8-35.5-072815-DUP	7/28/2015	<0.005	U		<0.005	U		<0.005	U		**0.0027**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-35.5-012816	1/28/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-8-35.5-012816-DUP	1/28/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-35.5-042916	4/29/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-35.5-080316	8/3/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-35.5-102516	10/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-8-35.5-102516-Dup	10/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-8-35.5-012317	1/23/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-35.5-042117	4/21/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-35.5-071917	7/19/2017	<0.0087	U		<0.0087	U		<0.0087	U		<0.076	U		<0.01	U		<0.0099	U		<0.0099	U		<0.032	U	
		VMP-8-35.5-071917-DUP	7/19/2017	<0.0097	U		<0.0097	U		<0.0097	U		**0.0075**	J		<0.011	U		<0.011	U		<0.011	U		<0.035	U	
		VMP-8-35.5-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-8-35.5-042018	4/20/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-8-35.5-072518	7/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-35.5-072518-DUP	7/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-35.5-102418	10/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-8-35.5-011819	1/18/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-8-35.5-042419	4/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-35.5-042419-DUP	4/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-8-35.5-072219	7/22/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-35.5-072219-DUP	7/22/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-8-35.5-101819	10/18/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-8-35.5-012220	1/22/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-8-35.5-042220	4/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-8-35.5-072220	7/22/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-35.5-102820	10/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-8-35.5-012121	1/21/2021	<0.005	U		<0.005	U		<0.005	U		**0.0011**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	5 ft	VMP-9-5-021115	2/11/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-9-5-050415	5/4/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	J	U	<0.02	U	
		VMP-9-5-072815	7/28/2015	<0.0056	U		0.0029	J		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-9-5-102815	10/28/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.0053**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-5-012816	1/28/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-5-042816	4/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-9-5-080116	8/1/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-9-5-102516	10/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-5-120916	12/9/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0029**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-9-5-012317	1/23/2017	<0.0052	U		<0.0052	U		<0.0052	U		**0.0031**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-9-5-042017	4/20/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-5-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0019**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-5-110117	11/1/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-9-5-012218	1/22/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-5-042618	4/26/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-5-071918	7/19/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-5-102318	10/23/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-5-012519	1/25/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-9-5-042419	4/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-5-071919	7/19/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-5-102519	10/25/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-5-012220	1/22/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-9-5-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-5-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.0051	U		0.0037	J		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-5-102820	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-5-012121	1/21/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-8-35.5-042715	4/27/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	ND,UJ	UJ	<0.0044	U	
		VMP-8-35.5-072815	7/28/2015	0.0097	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-8-35.5-072815-DUP	7/28/2015	0.011			<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-8-35.5-012816	1/28/2016	0.0072	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	J	U	<0.063	U		**0.0036**	J	
		VMP-8-35.5-012816-DUP	1/28/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	J	U	<0.057	U		<0.0047	J	U
		VMP-8-35.5-042916	4/29/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-8-35.5-080316	8/3/2016	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-8-35.5-102516	10/25/2016	0.017			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-8-35.5-102516-Dup	10/25/2016	0.0035	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-8-35.5-012317	1/23/2017	0.0063	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-35.5-042117	4/21/2017	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-8-35.5-071917	7/19/2017	0.02			<0.0095	U		<0.011	U		<0.017	U		<0.015	U		<0.009	U		<0.093	U		<0.0077	U	
		VMP-8-35.5-071917-DUP	7/19/2017	0.019			<0.01	U		<0.012	U		<0.019	U		<0.017	U		<0.01	U		<0.1	U		<0.0086	U	
		VMP-8-35.5-103017	10/30/2017	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-8-35.5-042018	4/20/2018	0.02			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-8-35.5-072518	7/25/2018	0.1		J	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-35.5-072518-DUP	7/25/2018	0.04		J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-8-35.5-102418	10/24/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-8-35.5-011819	1/18/2019	<0.0078	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		**0.0018**	J	
		VMP-8-35.5-042419	4/24/2019	<0.009	U		<0.0052	U		0.012		J	<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0051**		
		VMP-8-35.5-042419-DUP	4/24/2019	<0.0086	U		<0.005	U		<0.0056	U	UJ	<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-8-35.5-072219	7/22/2019	<0.0091	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.006**			<0.052	U		**0.013**		
		VMP-8-35.5-072219-DUP	7/22/2019	<0.0091	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-35.5-101819	10/18/2019	<0.0089	U	UJ	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-8-35.5-012220	1/22/2020	0.011			<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-8-35.5-042220	4/22/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-8-35.5-072220	7/22/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-35.5-102820	10/28/2020	<0.024	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.023	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-8-35.5-012121	1/21/2021	0.0072	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	5 ft	VMP-9-5-021115	2/11/2015	<0.01	J	U	**0.02**			0.011		J	<0.01	U		<0.0095	U		**0.005**	J		<0.058	U		**0.0023**	J	
		VMP-9-5-050415	5/4/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	ND,UJ	UJ	<0.0049	U	
		VMP-9-5-072815	7/28/2015	<0.011	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0039**	J		<0.06	U		**0.011**		
		VMP-9-5-102815	10/28/2015	0.0057	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-9-5-012816	1/28/2016	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	ND,UJ	UJ	<0.0045	U	
		VMP-9-5-042816	4/28/2016	<0.011	J	U	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		**0.0027**	J		<0.061	U		**0.002**	J	
		VMP-9-5-080116	8/1/2016	0.0071	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.00085**	J	
		VMP-9-5-102516	10/25/2016	0.013			**0.0046**	J		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-9-5-120916	12/9/2016	0.025			**0.00086**	J		<0.006	U		<0.0094	U		<0.0085	U		**0.004**	J		<0.052	U		**0.0035**	J	
		VMP-9-5-012317	1/23/2017	0.057			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.0023**	J		<0.056	U		**0.0022**	J	
		VMP-9-5-042017	4/20/2017	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-9-5-071917	7/19/2017	0.0086	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-5-110117	11/1/2017	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-9-5-012218	1/22/2018	0.0065	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0012**	J	
		VMP-9-5-042618	4/26/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-5-071918	7/19/2018	<0.0096	J	U	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-9-5-102318	10/23/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-5-012519	1/25/2019	0.0041	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-9-5-042419	4/24/2019	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-5-071919	7/19/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-5-102519	10/25/2019	<0.0094	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-5-012220	1/22/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-9-5-042220	4/22/2020	0.01			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-9-5-072220	7/22/2020	<0.0098	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-9-5-072220-DUP	7/22/2020	0.0064	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-9-5-102820	10/28/2020	0.015			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-9-5-012121	1/21/2021	0.0092	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	U		<0.0066	U	
		VMP-8-35.5-042715	4/27/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					**0.0042**	J		<0.0062	U	
		VMP-8-35.5-072815	7/28/2015	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.0052	U					**0.038**		J	<0.007	U	
		VMP-8-35.5-072815-DUP	7/28/2015	**0.0024**	J		0.0021	J		<0.0063	U		<0.0052	U		<0.0046	U					**0.004**	J	J	<0.0063	U	
		VMP-8-35.5-012816	1/28/2016	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					**0.032**			<0.0073	U	
		VMP-8-35.5-012816-DUP	1/28/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.042**			<0.0066	U	
		VMP-8-35.5-042916	4/29/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.002**	J		<0.0066	U	
		VMP-8-35.5-080316	8/3/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.012**			<0.0062	U	
		VMP-8-35.5-102516	10/25/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.0079**	J		<0.0065	U	
		VMP-8-35.5-102516-Dup	10/25/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U		<0.014	U		**0.011**	J		<0.0064	U	
		VMP-8-35.5-012317	1/23/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0064**	J		<0.006	U	
		VMP-8-35.5-042117	4/21/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.02**			<0.0058	U	
		VMP-8-35.5-071917	7/19/2017	<0.036	U		<0.026	U		<0.011	U		<0.009	U		<0.032	U					**0.024**			<0.011	U	
		VMP-8-35.5-071917-DUP	7/19/2017	<0.04	U		<0.029	U		<0.012	U		<0.01	U		<0.035	U					**0.027**			<0.012	U	
		VMP-8-35.5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-8-35.5-042018	4/20/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-8-35.5-072518	7/25/2018	<0.02	U		0.0045	J		<0.006	U		<0.005	U		<0.018	U					**0.0044**	J		<0.006	U	
		VMP-8-35.5-072518-DUP	7/25/2018	<0.02	U		0.004	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0027**	J		<0.0059	U	
		VMP-8-35.5-102418	10/24/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0048**	J		<0.0057	U	
		VMP-8-35.5-011819	1/18/2019	<0.017	U		0.0021	J		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-8-35.5-042419	4/24/2019	<0.019	U		0.012	J		<0.0058	U		<0.0049	ND,UJ	UJ	<0.017	U					<0.012	U		<0.0058	U	
		VMP-8-35.5-042419-DUP	4/24/2019	<0.019	U		0.0074	J		<0.0056	U		<0.0047	ND,UJ	UJ	<0.016	U					<0.011	U		<0.0056	U	
		VMP-8-35.5-072219	7/22/2019	<0.02	U		0.0062	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-8-35.5-072219-DUP	7/22/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-8-35.5-101819	10/18/2019	<0.019	U		<0.014	U		**0.001**	J		<0.0048	U		<0.017	U					**0.0013**	J		<0.0058	U	
		VMP-8-35.5-012220	1/22/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.098**			<0.0066	U	
		VMP-8-35.5-042220	4/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0028**	J		<0.0063	U	
		VMP-8-35.5-072220	7/22/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-8-35.5-102820	10/28/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.02**			<0.0062	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.03**			<0.006	U	
		VMP-8-35.5-012121	1/21/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.011**	J		<0.0062	U	
	5 ft	VMP-9-5-021115	2/11/2015	<0.022	U		0.0031	J		<0.0067	J	U	<0.0056	U		<0.0049	U					**0.0033**	J		**0.0036**	J	
		VMP-9-5-050415	5/4/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					**0.22**			<0.0068	U	
		VMP-9-5-072815	7/28/2015	<0.023	U		0.084			<0.0069	U		<0.0058	U		<0.0051	U					**0.0043**	J		<0.0069	U	
		VMP-9-5-102815	10/28/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					<0.013	J	U	<0.0063	U	
		VMP-9-5-012816	1/28/2016	<0.021	U		0.003	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.14**			<0.0062	U	
		VMP-9-5-042816	4/28/2016	<0.023	ND,UJ	UJ	<0.017	U		<0.007	U		<0.0058	U		<0.0052	U					**0.0047**	J		<0.007	U	
		VMP-9-5-080116	8/1/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.018**			<0.0068	U	
		VMP-9-5-102516	10/25/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		**0.035**			<0.0064	U	
		VMP-9-5-120916	12/9/2016	<0.02	U		0.037			<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.015**			<0.006	U	
		VMP-9-5-012317	1/23/2017	<0.022	U		0.0056	J		<0.0065	U		<0.0054	U		<0.019	U					**0.054**			<0.0065	U	
		VMP-9-5-042017	4/20/2017	<0.021	U		0.0029	J		<0.0062	U		<0.0052	U		<0.018	U					**0.007**	J		<0.0062	U	
		VMP-9-5-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-9-5-110117	11/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-9-5-012218	1/22/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.008**	J		<0.0062	U	
		VMP-9-5-042618	4/26/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-9-5-071918	7/19/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.003**	J		<0.0062	U	
		VMP-9-5-102318	10/23/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0015**	J		<0.0061	U	
		VMP-9-5-012519	1/25/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-9-5-042419	4/24/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	ND,UJ	UJ	<0.018	U					**0.008**	J		<0.006	U	
		VMP-9-5-071919	7/19/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0081**	J		<0.006	U	
		VMP-9-5-102519	10/25/2019	<0.02	U		<0.015	U		<0.0061	J	U	<0.0051	U		<0.018	U					<0.012	U		<0.0061	J	U
		VMP-9-5-012220	1/22/2020	<0.02	U		0.003	J		<0.0059	U		<0.0049	U		<0.017	U					**0.029**			<0.0059	U	
		VMP-9-5-042220	4/22/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0066**	J		<0.0062	U	
		VMP-9-5-072220	7/22/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	J	U	<0.0064	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	J	U	<0.0063	U	
		VMP-9-5-102820	10/28/2020	<0.02	U		<0.014	U		<0.0059	U		**0.0008**	J		<0.017	U					**0.029**			<0.0059	U	
		VMP-9-5-012121	1/21/2021	<0.02	U		0.014	J		<0.0061	U		<0.0051	U		<0.018	U					**0.02**			<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.006		U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-35.5-042715	4/27/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	ND,UJ	UJ	<0.0069	U		<0.0069	U	
		VMP-8-35.5-072815	7/28/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-8-35.5-072815-DUP	7/28/2015	<0.0054	U		<0.0088	U		**0.0076**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-8-35.5-012816	1/28/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0012**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-8-35.5-012816-DUP	1/28/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.00086**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-35.5-042916	4/29/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.00042**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-8-35.5-080316	8/3/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.00058**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-8-35.5-102516	10/25/2016	<0.0056	U		<0.009	U		**0.002**	J		<0.0039	U		**0.00053**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-8-35.5-102516-Dup	10/25/2016	<0.0056	U		<0.009	U		**0.0017**	J		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-8-35.5-012317	1/23/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-042117	4/21/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-8-35.5-071917	7/19/2017	<0.0093	U		<0.015	U		<0.015	U		<0.0064	U		<0.0082	U		<0.065	U		<0.012	U		<0.012	U	
		VMP-8-35.5-071917-DUP	7/19/2017	<0.01	U		<0.017	U		<0.016	U		<0.0072	U		<0.0092	U		<0.072	U		<0.013	U		<0.013	U	
		VMP-8-35.5-103017	10/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0011**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-8-35.5-042018	4/20/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0046**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-8-35.5-072518	7/25/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00088**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-072518-DUP	7/25/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-102418	10/24/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-8-35.5-011819	1/18/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-8-35.5-042419	4/24/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U	UJ	**0.0044**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-35.5-042419-DUP	4/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U	UJ	<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-8-35.5-072219	7/22/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0038**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-072219-DUP	7/22/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-101819	10/18/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-8-35.5-012220	1/22/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-8-35.5-042220	4/22/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-8-35.5-072220	7/22/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00042**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-102820	10/28/2020	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0013**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-8-35.5-012121	1/21/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
	5 ft	VMP-9-5-021115	2/11/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.018**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-9-5-050415	5/4/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		**0.0068**	J		<0.0075	U		<0.0075	U	
		VMP-9-5-072815	7/28/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-9-5-102815	10/28/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-5-012816	1/28/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	ND,UJ	UJ	<0.0069	U		<0.0069	U	
		VMP-9-5-042816	4/28/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U	U	**0.0012**	J		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-9-5-080116	8/1/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-9-5-102516	10/25/2016	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		**0.0022**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-9-5-120916	12/9/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.33**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-5-012317	1/23/2017	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0033**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-9-5-042017	4/20/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-9-5-071917	7/19/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-9-5-110117	11/1/2017	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-9-5-012218	1/22/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-9-5-042618	4/26/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-5-071918	7/19/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.00075**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-9-5-102318	10/23/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0013**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-9-5-012519	1/25/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-9-5-042419	4/24/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U	UJ	<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-9-5-071919	7/19/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0073**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-9-5-102519	10/25/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-5-012220	1/22/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-9-5-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-9-5-072220	7/22/2020	<0.0056	U		<0.009	U		**0.0043**	J		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-9-5-072220-DUP	7/22/2020	<0.0054	U		<0.0088	U		**0.057**			<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-5-102820	10/28/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-5-012121	1/21/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	35.5 ft	VMP-8-35.5-020915	2/9/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-8-35.5-042715	4/27/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.002	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-8-35.5-072815	7/28/2015	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-8-35.5-072815-DUP	7/28/2015	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-8-35.5-012816	1/28/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.00098	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-8-35.5-012816-DUP	1/28/2016	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		0.0013	J		<0.0058	U	
		VMP-8-35.5-042916	4/29/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-8-35.5-080316	8/3/2016	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		0.0014	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-8-35.5-102516	10/25/2016	<0.0071	U		0.0017	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-8-35.5-102516-Dup	10/25/2016	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-8-35.5-012317	1/23/2017	<0.0065	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-35.5-042117	4/21/2017	<0.0063	U		0.0017	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-35.5-071917	7/19/2017	<0.012	U		<0.012	U		<0.011	U		<0.011	U		0.0017	J		<0.0056	U		<0.0095	U		<0.0095	U	
		VMP-8-35.5-071917-DUP	7/19/2017	<0.013	U		<0.014	U		<0.012	U		<0.012	U		<0.011	U		<0.0062	U		<0.01	U		<0.01	U	
		VMP-8-35.5-103017	10/30/2017	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-8-35.5-042018	4/20/2018	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-8-35.5-072518	7/25/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.001	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-35.5-072518-DUP	7/25/2018	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.0017	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-35.5-102418	10/24/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-8-35.5-011819	1/18/2019	<0.0056	U		<0.0058	U		<0.0051	U		<0.0051	U		0.0013	J		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-8-35.5-042419	4/24/2019	<0.0064	U		<0.0067	U		**0.014**		J	**0.0076**			0.005	J		<0.003	U		0.016		J	**0.013**		J
		VMP-8-35.5-042419-DUP	4/24/2019	<0.0062	U		<0.0064	U		<0.0056	U	UJ	<0.0056	U		0.0018	J		<0.0029	U		<0.005	U	UJ	<0.005	U	UJ
		VMP-8-35.5-072219	7/22/2019	**0.0033**	J		<0.0068	U		<0.0059	U		<0.0059	U		0.011			<0.0031	U		0.0015	J		<0.0052	U	
		VMP-8-35.5-072219-DUP	7/22/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-8-35.5-101819	10/18/2019	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		0.0043	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-8-35.5-012220	1/22/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-8-35.5-042220	4/22/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-8-35.5-072220	7/22/2020	<0.0065	U		0.0018	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-35.5-102820	10/28/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.00073	J		<0.0055	U	
		VMP-8-35.5-102820-DUP	10/28/2020	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-8-35.5-012121	1/21/2021	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		0.00081	J		<0.0032	U		<0.0055	U		<0.0055	U	
	5 ft	VMP-9-5-021115	2/11/2015	<0.0073	U		<0.0076	U		**0.0077**			<0.0067	J	U	0.034			<0.0035	U		0.041			**0.02**		
		VMP-9-5-050415	5/4/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.001	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-9-5-072815	7/28/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0067			**0.0011**	J		<0.0061	U		<0.0061	U	
		VMP-9-5-102815	10/28/2015	<0.0069	U		<0.0072	J	U	<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-9-5-012816	1/28/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0049	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-5-042816	4/28/2016	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		0.0015	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-9-5-080116	8/1/2016	<0.0074	U		0.0015	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-9-5-102516	10/25/2016	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.013			**0.0024**	J	
		VMP-9-5-120916	12/9/2016	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		0.00051	J	J	<0.0031	U		0.0028	J		**0.001**	J	
		VMP-9-5-012317	1/23/2017	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0016	J		<0.0057	U	
		VMP-9-5-042017	4/20/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00093	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-5-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0025	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-9-5-110117	11/1/2017	<0.0059	U		0.00099	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-9-5-012218	1/22/2018	<0.0068	U		0.001	J		<0.0062	U		<0.0062	U		0.0014	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-5-042618	4/26/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-5-071918	7/19/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-5-102318	10/23/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0023	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-5-012519	1/25/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-9-5-042419	4/24/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-9-5-071919	7/19/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.002	J		<0.0053	U	
		VMP-9-5-102519	10/25/2019	**0.018**			<0.007	U		<0.0061	U		<0.0061	U		0.003	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-5-012220	1/22/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-9-5-042220	4/22/2020	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-5-072220	7/22/2020	**0.0013**	J		0.0018	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-9-5-072220-DUP	7/22/2020	**0.017**			0.0021	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-9-5-102820	10/28/2020	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-5-012121	1/21/2021	<0.0067	U		0.0016	J		<0.0061	U		<0.0061	U		0.24			<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	**0.012**	J		**0.001**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-9-11.5-050415	5/4/2015	**0.0052**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-9-11.5-072815	7/28/2015	**0.068**			<0.0043	J	U	**0.002**	J		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.014**	J	
		VMP-9-11.5-102815	10/28/2015	**0.023**	J		**0.00095**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.006**	J	
		VMP-9-11.5-012816	1/28/2016	**0.015**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-9-11.5-042816	4/28/2016	**0.012**	J		**0.0013**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-9-11.5-080116	8/1/2016	**0.033**	J		**0.0028**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-9-11.5-080116-DUP	8/1/2016	**0.036**			**0.0075**			<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-9-11.5-102516	10/25/2016	**0.038**			<0.004	J	U	**0.0012**	J		<0.013	U		<0.048	U		<0.0027	U		0.0073	J		**0.0077**	J	
		VMP-9-11.5-120916	12/9/2016	**0.0089**	J		<0.0042	U		**0.0021**	J		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-9-11.5-012317	1/23/2017	**0.042**			<0.0044	J	U	<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-9-11.5-042017	4/20/2017	<0.03	J	U	**0.00058**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-11.5-071917	7/19/2017	**0.012**	J		<0.0038	U		**0.0022**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-9-11.5-110117	11/1/2017	**0.011**	J		<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-9-11.5-012218	1/22/2018	**0.0058**	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-9-11.5-042618	4/26/2018	**0.0068**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-11.5-071918	7/19/2018	**0.022**	J		**0.00052**	J		**0.0011**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-9-11.5-102318	10/23/2018	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-11.5-013119	1/31/2019	**0.017**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-9-11.5-042419	4/24/2019	**0.084**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.013**	J	
		VMP-9-11.5-071919	7/19/2019	**0.062**			**0.048**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.015**	J	
		VMP-9-11.5-102519	10/25/2019	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-9-11.5-012220	1/22/2020	**0.0078**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-11.5-042220	4/22/2020	**0.018**	J		**0.0015**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0035**	J	
		VMP-9-11.5-072220	7/22/2020	**0.026**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0037**	J	
		VMP-9-11.5-102820	10/28/2020	**0.013**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-11.5-012121	1/21/2021	**0.0084**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0046	J		<0.015	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	**0.0073**	J		**0.0079**			<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.005	J		<0.015	U	
		VMP-9-25.5-050415	5/4/2015	**0.017**	J	J	**0.0038**	J	J	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.39		J	**0.0048**	J	J
		VMP-9-25.5-052915-R	5/29/2015	**0.014**	J		**0.0012**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0079**	J	
		VMP-9-25.5-072815	7/28/2015	**0.023**	J		<0.0041	J	U	<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0059**	J	
		VMP-9-25.5-102815	10/28/2015	<0.028	J	U	**0.0011**	J		<0.008	J	U	<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0042**	J	
		VMP-9-25.5-012816	1/28/2016	**0.029**	J		**0.00086**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0038**	J	
		VMP-9-25.5-042816	4/28/2016	**0.014**	J		**0.0013**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-25.5-080116	8/1/2016	**0.031**	J		**0.00097**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0066**	J	
		VMP-9-25.5-102516	10/25/2016	<0.03	J	U	<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	J	U
		VMP-9-25.5-120916	12/9/2016	**0.0086**	J		**0.0011**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.004	J		<0.014	U	
		VMP-9-25.5-012317	1/23/2017	**0.016**	J		**0.0023**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.0062	J		**0.0039**	J	
		VMP-9-25.5-012317-Dup	1/23/2017	**0.022**	J		**0.0024**	J		**0.0014**	J		<0.013	U		<0.05	U		<0.0028	U		0.0063	J		<0.015	U	
		VMP-9-25.5-042017	4/20/2017	<0.033	J	U	<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-9-25.5-071917	7/19/2017	**0.011**	J		**0.00076**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-25.5-110117	11/1/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-9-25.5-012218	1/22/2018	**0.0047**	J		<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0026	J		<0.014	U	
		VMP-9-25.5-042618	4/26/2018	**0.032**			**0.0028**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.018			**0.011**	J	
		VMP-9-25.5-071918	7/19/2018	**0.021**	J		**0.00034**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0034**	J	
		VMP-9-25.5-102318	10/23/2018	**0.02**	J		**0.001**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-9-25.5-011819	1/18/2019	**0.012**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-9-25.5-042419	4/24/2019	**0.015**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-9-25.5-071919	7/19/2019	**0.014**	J		**0.0015**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-25.5-071919-DUP	7/19/2019	**0.023**	J		**0.0019**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-9-25.5-102519	10/25/2019	**0.013**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-9-25.5-012220	1/22/2020	**0.0058**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-25.5-042220	4/22/2020	**0.008**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-9-25.5-042220-DUP	4/22/2020	**0.048**			**0.0036**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0059**	J	
		VMP-9-25.5-072220	7/22/2020	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-9-25.5-102820	10/28/2020	<0.029	J	U	<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-25.5-102820-DUP	10/28/2020	**0.011**	J		**0.0004**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-9-25.5-012121	1/21/2021	**0.0071**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0017**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	**0.0025**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-9-11.5-050415	5/4/2015	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.004**	J		<0.027	U		<0.0069	U	
		VMP-9-11.5-072815	7/28/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0076**			**0.0034**	J		<0.007	U	
		VMP-9-11.5-102815	10/28/2015	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0038**	J		<0.026	U		<0.0064	U	
		VMP-9-11.5-012816	1/28/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-9-11.5-042816	4/28/2016	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0014**	J		<0.027	U		<0.0067	U	
		VMP-9-11.5-080116	8/1/2016	**0.018**			<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.004**	J		<0.03	U		<0.0077	U	
		VMP-9-11.5-080116-DUP	8/1/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0035**	J		<0.03	U		<0.0077	U	
		VMP-9-11.5-102516	10/25/2016	**0.0046**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.01**			<0.026	ND,UJ	UJ	<0.0064	U	
		VMP-9-11.5-120916	12/9/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.047**			<0.027	U		<0.0067	U	
		VMP-9-11.5-012317	1/23/2017	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-9-11.5-042017	4/20/2017	**0.008**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-9-11.5-071917	7/19/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0067**			<0.024	U		<0.0061	U	
		VMP-9-11.5-110117	11/1/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-9-11.5-012218	1/22/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-9-11.5-042618	4/26/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-9-11.5-071918	7/19/2018	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0022**	J		<0.027	U		<0.0068	U	
		VMP-9-11.5-102318	10/23/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0019**	J		<0.025	U		<0.0063	U	
		VMP-9-11.5-013119	1/31/2019	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.0024**	J		<0.022	U		<0.0056	U	
		VMP-9-11.5-042419	4/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-9-11.5-071919	7/19/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-9-11.5-102519	10/25/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0032**	J		<0.027	U		<0.0068	U	
		VMP-9-11.5-012220	1/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0031**	J		<0.026	U		<0.0065	U	
		VMP-9-11.5-042220	4/22/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.003**	J		<0.027	U		<0.0068	U	
		VMP-9-11.5-072220	7/22/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0076**			<0.027	U		<0.0067	U	
		VMP-9-11.5-102820	10/28/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0012**	J		<0.026	U		<0.0065	U	
		VMP-9-11.5-012121	1/21/2021	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.002**	J		<0.027	U		<0.0067	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0054**	J		<0.026	U		<0.0064	U	
		VMP-9-25.5-050415	5/4/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0021**	J	J	<0.027	U		<0.0068	U	
		VMP-9-25.5-052915-R	5/29/2015	**0.0049**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-9-25.5-072815	7/28/2015	**0.024**			<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0025**	J		<0.027	U		<0.0067	U	
		VMP-9-25.5-102815	10/28/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.066**			<0.024	U		<0.0062	U	
		VMP-9-25.5-012816	1/28/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.034**			<0.03	U		<0.0076	U	
		VMP-9-25.5-042816	4/28/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0048**	J		<0.026	U		<0.0066	U	
		VMP-9-25.5-080116	8/1/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.028**			<0.028	U		<0.0071	U	
		VMP-9-25.5-102516	10/25/2016	**0.0018**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.032**			<0.026	ND,UJ	UJ	<0.0065	U	
		VMP-9-25.5-120916	12/9/2016	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.04**			<0.024	U		<0.0061	U	
		VMP-9-25.5-012317	1/23/2017	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0017**	J		<0.029	U		<0.0073	U	
		VMP-9-25.5-012317-Dup	1/23/2017	**0.0014**	J		**0.001**	J		<0.0059	U		<0.011	U		<0.014	U		**0.0024**	J		<0.026	U		<0.0066	U	
		VMP-9-25.5-042017	4/20/2017	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-9-25.5-071917	7/19/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-9-25.5-110117	11/1/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-9-25.5-012218	1/22/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-9-25.5-042618	4/26/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-9-25.5-071918	7/19/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0034**	J		<0.026	U		<0.0065	U	
		VMP-9-25.5-102318	10/23/2018	**0.0025**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0053**	J		<0.024	U		<0.006	U	
		VMP-9-25.5-011819	1/18/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0047**	J		<0.022	U		<0.0055	U	
		VMP-9-25.5-042419	4/24/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0022**	J		<0.023	U		<0.0058	U	
		VMP-9-25.5-071919	7/19/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-9-25.5-071919-DUP	7/19/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-9-25.5-102519	10/25/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-9-25.5-012220	1/22/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	ND,UJ	UJ	<0.0064	U	
		VMP-9-25.5-042220	4/22/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-9-25.5-042220-DUP	4/22/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-9-25.5-072220	7/22/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.003**	J		<0.026	U		<0.0066	U	
		VMP-9-25.5-102820	10/28/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0028**	J		<0.026	U		<0.0064	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0024**	J		<0.025	U		<0.0062	U	
		VMP-9-25.5-012121	1/21/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0079**			<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	**0.0027**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0021**	J		<0.0055	U		<0.0055	U	
		VMP-9-11.5-050415	5/4/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-9-11.5-072815	7/28/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-9-11.5-102815	10/28/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-9-11.5-012816	1/28/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0018**	J		<0.0058	U		<0.0058	U	
		VMP-9-11.5-042816	4/28/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-9-11.5-080116	8/1/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0026**	J		<0.006	U		<0.006	U	
		VMP-9-11.5-080116-DUP	8/1/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.003**	J		<0.006	U		<0.006	U	
		VMP-9-11.5-102516	10/25/2016	**0.0011**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-9-11.5-120916	12/9/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-9-11.5-012317	1/23/2017	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-9-11.5-042017	4/20/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-9-11.5-071917	7/19/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-9-11.5-110117	11/1/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		<0.0058	U		<0.0048	U		<0.0048	U	
		VMP-9-11.5-012218	1/22/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-9-11.5-042618	4/26/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-9-11.5-071918	7/19/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0032**	J		<0.0053	U		<0.0053	U	
		VMP-9-11.5-102318	10/23/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-9-11.5-013119	1/31/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-9-11.5-042419	4/24/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0035**	J		<0.005	U		<0.005	U	
		VMP-9-11.5-071919	7/19/2019	**0.061**			<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-9-11.5-102519	10/25/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-9-11.5-012220	1/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-9-11.5-042220	4/22/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-9-11.5-072220	7/22/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0033**	J		<0.0053	U		<0.0053	U	
		VMP-9-11.5-102820	10/28/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-9-11.5-012121	1/21/2021	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0053	U		<0.0053	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	**0.0017**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-9-25.5-050415	5/4/2015	**0.01**		J	<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J	J	<0.0053	U		<0.0053	U	
		VMP-9-25.5-052915-R	5/29/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0023**	J		<0.0057	U		<0.0057	U	
		VMP-9-25.5-072815	7/28/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-9-25.5-102815	10/28/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-9-25.5-012816	1/28/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0017**	J		<0.0059	U		<0.0059	U	
		VMP-9-25.5-042816	4/28/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-9-25.5-080116	8/1/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0031**	J		<0.0055	U		<0.0055	U	
		VMP-9-25.5-102516	10/25/2016	**0.0042**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-9-25.5-120916	12/9/2016	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-9-25.5-012317	1/23/2017	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-9-25.5-012317-Dup	1/23/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0034**	J		**0.00074**	J		**0.00054**	J	
		VMP-9-25.5-042017	4/20/2017	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-9-25.5-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-9-25.5-110117	11/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-9-25.5-012218	1/22/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-9-25.5-042618	4/26/2018	**0.0056**			<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-9-25.5-071918	7/19/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-9-25.5-102318	10/23/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		<0.0057	U		<0.0046	U		<0.0046	U	
		VMP-9-25.5-011819	1/18/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-9-25.5-042419	4/24/2019	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-9-25.5-071919	7/19/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-9-25.5-071919-DUP	7/19/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0021**	J		<0.0054	U		<0.0054	U	
		VMP-9-25.5-102519	10/25/2019	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0025**	J		<0.0055	U		<0.0055	U	
		VMP-9-25.5-012220	1/22/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-9-25.5-042220	4/22/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-9-25.5-042220-DUP	4/22/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-9-25.5-072220	7/22/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0039**	J		<0.0052	U		<0.0052	U	
		VMP-9-25.5-102820	10/28/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0033**	J		<0.005	U		<0.005	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0033**	J		<0.0049	U		<0.0049	U	
		VMP-9-25.5-012121	1/21/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		110									110			0.4			0.5			0.5			0.1		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-9-11.5-050415	5/4/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-9-11.5-072815	7/28/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-9-11.5-102815	10/28/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	J	U	<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-11.5-012816	1/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-9-11.5-042816	4/28/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-11.5-080116	8/1/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-9-11.5-080116-DUP	8/1/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-9-11.5-102516	10/25/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.0094**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-11.5-120916	12/9/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.0016**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-11.5-012317	1/23/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-9-11.5-042017	4/20/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-11.5-071917	7/19/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0025**	J		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-9-11.5-110117	11/1/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-9-11.5-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0032**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-9-11.5-042618	4/26/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0028**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-11.5-071918	7/19/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-11.5-102318	10/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-9-11.5-013119	1/31/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-9-11.5-042419	4/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-11.5-071919	7/19/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-11.5-102519	10/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-11.5-012220	1/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-11.5-042220	4/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-9-11.5-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0014**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-11.5-102820	10/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-11.5-012121	1/21/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-25.5-050415	5/4/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-9-25.5-052915-R	5/29/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-9-25.5-072815	7/28/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-25.5-102815	10/28/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	J	U	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-9-25.5-012816	1/28/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-9-25.5-042816	4/28/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-25.5-080116	8/1/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-9-25.5-102516	10/25/2016	<0.005	U		<0.005	U		<0.005	U		**0.002**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-25.5-120916	12/9/2016	<0.0047	U		<0.0047	U		<0.0047	U		**0.0028**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-9-25.5-012317	1/23/2017	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-9-25.5-012317-Dup	1/23/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-25.5-042017	4/20/2017	<0.0055	U		<0.0055	U		<0.0055	U		**0.0075**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-9-25.5-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0031**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-25.5-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0031**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-9-25.5-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-25.5-042618	4/26/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.011**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-25.5-071918	7/19/2018	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-25.5-102318	10/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0047**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-9-25.5-011819	1/18/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-9-25.5-042419	4/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-9-25.5-071919	7/19/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-9-25.5-071919-DUP	7/19/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-9-25.5-102519	10/25/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-9-25.5-012220	1/22/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-25.5-042220	4/22/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-9-25.5-042220-DUP	4/22/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-25.5-072220	7/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		**0.022**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-25.5-102820	10/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-25.5-012121	1/21/2021	<0.005	U		<0.005	U		<0.005	U		**0.0086**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	0.023			<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		**0.0011**	J	
		VMP-9-11.5-050415	5/4/2015	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	ND,UJ	UJ	<0.0047	U	
		VMP-9-11.5-072815	7/28/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-9-11.5-102815	10/28/2015	0.0084	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-11.5-012816	1/28/2016	0.0044	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	ND,UJ	UJ	<0.005	U	
		VMP-9-11.5-042816	4/28/2016	<0.0098	J	U	**0.0069**			0.0012	J		<0.0099	U		<0.009	U		**0.012**			<0.055	U		**0.014**		
		VMP-9-11.5-080116	8/1/2016	0.013			<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		**0.0031**	J		<0.063	U		**0.0026**	J	
		VMP-9-11.5-080116-DUP	8/1/2016	0.0094	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0022**	J	
		VMP-9-11.5-102516	10/25/2016	0.014			**0.0015**	J		<0.0061	U		<0.0095	U		<0.0087	U		**0.0007**	J		<0.053	U		**0.0011**	J	
		VMP-9-11.5-120916	12/9/2016	0.0085	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		**0.0012**	J		<0.055	U		**0.0014**	J	
		VMP-9-11.5-012317	1/23/2017	0.024			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-9-11.5-042017	4/20/2017	0.0044	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-9-11.5-071917	7/19/2017	0.012			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0028**	J		<0.05	U		<0.0042	U	
		VMP-9-11.5-110117	11/1/2017	0.005	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-9-11.5-012218	1/22/2018	0.0082	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0011**	J	
		VMP-9-11.5-042618	4/26/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-11.5-071918	7/19/2018	<0.0099	J	U	<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-9-11.5-102318	10/23/2018	0.0097			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-11.5-013119	1/31/2019	0.013			<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-9-11.5-042419	4/24/2019	0.013			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-11.5-071919	7/19/2019	<0.0097	U		**0.0089**			<0.0063	U		<0.0099	U		<0.009	U		**0.15**			<0.055	U		**0.033**		
		VMP-9-11.5-102519	10/25/2019	<0.0099	U	UJ	<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-9-11.5-012220	1/22/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0017**	J	
		VMP-9-11.5-042220	4/22/2020	0.0037	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0011**	J	
		VMP-9-11.5-072220	7/22/2020	0.11			<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-9-11.5-102820	10/28/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-11.5-012121	1/21/2021	0.029			<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	<0.0094	U		**0.0065**			<0.0061	J	U	<0.0095	U		<0.0087	U		**0.0065**			<0.053	U		**0.01**		
		VMP-9-25.5-050415	5/4/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	ND,UJ	UJ	**0.004**	J	J
		VMP-9-25.5-052915-R	5/29/2015	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-9-25.5-072815	7/28/2015	0.012			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-9-25.5-102815	10/28/2015	0.007	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-9-25.5-012816	1/28/2016	0.009	J		**0.0015**	J		0.0023	J		<0.011	U		<0.01	U		<0.006	U		<0.062	ND,UJ	UJ	<0.0051	U	
		VMP-9-25.5-042816	4/28/2016	<0.0096	J	U	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-9-25.5-080116	8/1/2016	0.0096	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-9-25.5-102516	10/25/2016	0.0092	J		**0.0021**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-9-25.5-120916	12/9/2016	0.047			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0015**	J	
		VMP-9-25.5-012317	1/23/2017	0.017			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0025**	J		<0.06	U		**0.0072**		
		VMP-9-25.5-012317-Dup	1/23/2017	0.019			**0.0015**	J		0.0011	J		<0.0098	U		<0.009	U		**0.0016**	J		<0.055	U		**0.0066**		
		VMP-9-25.5-042017	4/20/2017	0.033			<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-9-25.5-071917	7/19/2017	0.0082	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-25.5-110117	11/1/2017	0.005	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-9-25.5-012218	1/22/2018	0.011			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-9-25.5-042618	4/26/2018	0.024			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.002**	J		<0.052	U		**0.011**		
		VMP-9-25.5-071918	7/19/2018	<0.0094	J	U	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-25.5-102318	10/23/2018	0.0052	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0027**	J		<0.049	U		**0.0026**	J	
		VMP-9-25.5-011819	1/18/2019	<0.0081	U		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-9-25.5-042419	4/24/2019	0.012			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-9-25.5-071919	7/19/2019	0.014			**0.00089**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-9-25.5-071919-DUP	7/19/2019	0.015			**0.00068**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-9-25.5-102519	10/25/2019	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-9-25.5-012220	1/22/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-25.5-042220	4/22/2020	0.0046	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-9-25.5-042220-DUP	4/22/2020	0.0086	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-25.5-072220	7/22/2020	0.018			<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-9-25.5-102820	10/28/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0012**	J		<0.051	U		<0.0042	U	
		VMP-9-25.5-012121	1/21/2021	0.038			<0.0055	U		<0.0062	U		**0.0007**	J		<0.0088	U		<0.0052	U		<0.054	U		**0.0011**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	<0.022	U		0.0096	J		<0.0066	J	U	<0.0055	U		<0.0049	U					**0.0068**	J		<0.0066	U	
		VMP-9-11.5-050415	5/4/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.036**			<0.0065	U	
		VMP-9-11.5-072815	7/28/2015	<0.022	U		0.038			<0.0067	U		<0.0056	U		<0.0049	U					**0.004**	J		<0.0067	U	
		VMP-9-11.5-102815	10/28/2015	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					<0.012	U		<0.0061	U	
		VMP-9-11.5-012816	1/28/2016	<0.023	U		0.0024	J		<0.007	U		<0.0058	U		<0.0052	U					**0.26**			<0.007	U	
		VMP-9-11.5-042816	4/28/2016	<0.021	ND,UJ	UJ	0.0032	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.0021**	J		<0.0064	U	
		VMP-9-11.5-080116	8/1/2016	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					**0.041**			<0.0073	U	
		VMP-9-11.5-080116-DUP	8/1/2016	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					**0.032**			<0.0073	U	
		VMP-9-11.5-102516	10/25/2016	<0.02	U		0.01	J		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.012**	J		<0.0061	U	
		VMP-9-11.5-120916	12/9/2016	<0.021	U		0.005	J		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		**0.0046**	J		<0.0064	U	
		VMP-9-11.5-012317	1/23/2017	<0.022	U		0.0023	J		<0.0068	U		<0.0056	U		<0.02	U					**0.05**			<0.0068	U	
		VMP-9-11.5-042017	4/20/2017	<0.021	U		0.0025	J		<0.0062	U		<0.0052	U		<0.018	U					**0.01**	J		<0.0062	U	
		VMP-9-11.5-071917	7/19/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-9-11.5-110117	11/1/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-9-11.5-012218	1/22/2018	<0.02	U		0.0038	J		<0.0059	U		<0.0049	U		<0.017	U					**0.018**			<0.0059	U	
		VMP-9-11.5-042618	4/26/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-9-11.5-071918	7/19/2018	<0.021	U		0.0034	J		<0.0064	U		<0.0054	U		<0.019	U					**0.0032**	J		<0.0064	U	
		VMP-9-11.5-102318	10/23/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0014**	J		<0.006	U	
		VMP-9-11.5-013119	1/31/2019	<0.018	U		<0.013	U		**0.0024**	J		<0.0044	U		<0.016	U					**0.0016**	J		**0.0073**		
		VMP-9-11.5-042419	4/24/2019	<0.02	U		0.0036	J		<0.0061	U		<0.0051	ND,UJ	UJ	<0.018	U					<0.012	U		<0.0061	U	
		VMP-9-11.5-071919	7/19/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.01**	J		<0.0063	U	
		VMP-9-11.5-102519	10/25/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-9-11.5-012220	1/22/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.027**			<0.0062	U	
		VMP-9-11.5-042220	4/22/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0059**	J		<0.0065	U	
		VMP-9-11.5-072220	7/22/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.013**			<0.0064	U	
		VMP-9-11.5-102820	10/28/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.015**			<0.0061	U	
		VMP-9-11.5-012121	1/21/2021	<0.021	U		0.0063	J		<0.0064	J	U	<0.0053	U		<0.019	U					**0.0083**	J		**0.0012**	J	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	<0.02	U		0.014	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.004**	J		<0.0061	U	
		VMP-9-25.5-050415	5/4/2015	<0.022	U		1.8			<0.0065	U		<0.0054	U		<0.0048	U					**0.15**		J	<0.0065	U	
		VMP-9-25.5-052915-R	5/29/2015	<0.023	U		0.0016	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.0015**	J		<0.0069	U	
		VMP-9-25.5-072815	7/28/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					<0.013	U		<0.0063	U	
		VMP-9-25.5-102815	10/28/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					<0.012	J	U	<0.0058	U	
		VMP-9-25.5-012816	1/28/2016	<0.024	U		0.0025	J		**0.0019**	J		<0.006	U		<0.0053	U					**0.2**			**0.0053**	J	
		VMP-9-25.5-042816	4/28/2016	<0.021	ND,UJ	UJ	<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					**0.028**			<0.0063	U	
		VMP-9-25.5-080116	8/1/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.025**			<0.0067	U	
		VMP-9-25.5-102516	10/25/2016	<0.02	U		0.0048	J		<0.0062	U		<0.0051	U		<0.018	U		<0.013	U		**0.018**			<0.0062	U	
		VMP-9-25.5-120916	12/9/2016	<0.019	U		0.0027	J		<0.0058	U		<0.0048	U		<0.017	U		<0.012	U		**0.016**			<0.0058	U	
		VMP-9-25.5-012317	1/23/2017	**0.0018**	J		0.008	J		<0.0069	U		<0.0058	U		<0.02	U					**0.018**			<0.0069	U	
		VMP-9-25.5-012317-Dup	1/23/2017	**0.0011**	J		0.0048	J		<0.0063	U		**0.0014**	J		<0.018	U					**0.022**			<0.0063	U	
		VMP-9-25.5-042017	4/20/2017	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.011**	J		<0.0068	U	
		VMP-9-25.5-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.027**			<0.006	U	
		VMP-9-25.5-110117	11/1/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-9-25.5-012218	1/22/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.012**			<0.0059	U	
		VMP-9-25.5-042618	4/26/2018	<0.02	U		0.068			<0.0059	U		<0.005	U		<0.017	U					**0.0099**	J		<0.0059	U	
		VMP-9-25.5-071918	7/19/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0026**	J		<0.0061	U	
		VMP-9-25.5-102318	10/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0012**	J		<0.0056	U	
		VMP-9-25.5-011819	1/18/2019	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0017**	J		<0.0053	U	
		VMP-9-25.5-042419	4/24/2019	<0.018	U		0.0025	J		<0.0055	U		<0.0046	ND,UJ	UJ	<0.016	U					<0.011	U		<0.0055	U	
		VMP-9-25.5-071919	7/19/2019	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.0059**	J		<0.0062	J	U
		VMP-9-25.5-071919-DUP	7/19/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.009**	J		<0.0066	J	U
		VMP-9-25.5-102519	10/25/2019	**0.00086**	J		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-9-25.5-012220	1/22/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.023**			<0.0061	U	
		VMP-9-25.5-042220	4/22/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0022**	J		<0.0057	U	
		VMP-9-25.5-042220-DUP	4/22/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0072**	J		<0.0059	U	
		VMP-9-25.5-072220	7/22/2020	<0.021	U		0.007	J		<0.0063	U		<0.0052	U		<0.018	U					**0.0064**	J		<0.0063	U	
		VMP-9-25.5-102820	10/28/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0093**	J		<0.0061	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0055**	J		<0.0059	U	
		VMP-9-25.5-012121	1/21/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.024**			<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0011**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-9-11.5-050415	5/4/2015	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0016**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-9-11.5-072815	7/28/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-9-11.5-102815	10/28/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-9-11.5-012816	1/28/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.0014**	J		<0.042	ND,UJ	UJ	<0.0078	U		<0.0078	U	
		VMP-9-11.5-042816	4/28/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U	U	**0.023**			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-9-11.5-080116	8/1/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0016**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-9-11.5-080116-DUP	8/1/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.00097**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-9-11.5-102516	10/25/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0017**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-11.5-120916	12/9/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.015**			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-9-11.5-012317	1/23/2017	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.00093**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-9-11.5-042017	4/20/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.00062**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-9-11.5-071917	7/19/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-9-11.5-110117	11/1/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-9-11.5-012218	1/22/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0053**			<0.036	U		<0.0065	U		<0.0065	U	
		VMP-9-11.5-042618	4/26/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-11.5-071918	7/19/2018	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00085**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-9-11.5-102318	10/23/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-11.5-013119	1/31/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-9-11.5-042419	4/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U	UJ	**0.0015**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-11.5-071919	7/19/2019	<0.0055	U		<0.0088	U		**0.0036**	J		<0.0038	U		**0.21**			<0.038	U		<0.007	U		<0.007	U	
		VMP-9-11.5-102519	10/25/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-9-11.5-012220	1/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-9-11.5-042220	4/22/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-9-11.5-072220	7/22/2020	<0.0055	U		<0.0089	U		**0.0011**	J		<0.0038	U		**0.00098**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-9-11.5-102820	10/28/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-11.5-012121	1/21/2021	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.036**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-25.5-050415	5/4/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-9-25.5-052915-R	5/29/2015	<0.006	U		<0.0097	U		**0.0038**	J		**0.001**	J		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-9-25.5-072815	7/28/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-25.5-102815	10/28/2015	<0.0051	U		<0.0082	U		**0.003**	J		<0.0035	U		**0.0015**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-9-25.5-012816	1/28/2016	<0.0062	U		<0.01	U		**0.0033**	J		<0.0043	U		<0.0055	U		<0.043	ND,UJ	UJ	<0.008	U		<0.008	U	
		VMP-9-25.5-042816	4/28/2016	<0.0054	U		<0.0088	U		**0.002**	J		<0.0038	U	U	<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-25.5-080116	8/1/2016	<0.0058	U		<0.0094	U		**0.0046**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-9-25.5-102516	10/25/2016	<0.0053	U		<0.0086	U		**0.0057**	J		<0.0037	U		**0.0067**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-25.5-120916	12/9/2016	<0.005	U		<0.0081	U		**0.0073**	J		<0.0035	U		**0.00083**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-9-25.5-012317	1/23/2017	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.00079**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-9-25.5-012317-Dup	1/23/2017	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0016**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-25.5-042017	4/20/2017	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.00071**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-9-25.5-071917	7/19/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00062**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-9-25.5-110117	11/1/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-9-25.5-012218	1/22/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-25.5-042618	4/26/2018	**0.0015**	J		<0.0083	U		<0.0082	U		<0.0036	U		**0.029**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-25.5-071918	7/19/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-25.5-102318	10/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0022**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-9-25.5-011819	1/18/2019	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-9-25.5-042419	4/24/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U	UJ	<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-9-25.5-071919	7/19/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0079**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-25.5-071919-DUP	7/19/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.01**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-9-25.5-102519	10/25/2019	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-9-25.5-012220	1/22/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-9-25.5-042220	4/22/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-9-25.5-042220-DUP	4/22/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-25.5-072220	7/22/2020	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0022**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-25.5-102820	10/28/2020	<0.0053	U		<0.0085	U		**0.0012**	J		<0.0036	U		**0.0011**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00098**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-25.5-012121	1/21/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00082**	J		<0.037	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-9	11.5 ft	VMP-9-11.5-021115	2/11/2015	<0.0072	U		<0.0076	U		<0.0066	J	U	<0.0066	U		0.017			<0.0034	U		<0.0059	J	U	<0.0059	U	
		VMP-9-11.5-050415	5/4/2015	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.001	J		<0.0058	U	
		VMP-9-11.5-072815	7/28/2015	<0.0073	U		0.0017	J		**0.0014**	J		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-9-11.5-102815	10/28/2015	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-11.5-012816	1/28/2016	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-9-11.5-042816	4/28/2016	<0.007	U		<0.0073	U		**0.00068**	J		<0.0064	U		0.034			<0.0033	U		0.013			**0.0046**	J	
		VMP-9-11.5-080116	8/1/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0016	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-9-11.5-080116-DUP	8/1/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0016	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-9-11.5-102516	10/25/2016	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.00074	J		<0.0032	U		0.0046	J		**0.00098**	J	
		VMP-9-11.5-120916	12/9/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0012	J	J	<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-9-11.5-012317	1/23/2017	<0.0074	U		<0.0077	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		0.0017	J		<0.006	U	
		VMP-9-11.5-042017	4/20/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0035	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-11.5-071917	7/19/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-9-11.5-110117	11/1/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-9-11.5-012218	1/22/2018	<0.0064	U		0.001	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-11.5-042618	4/26/2018	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-11.5-071918	7/19/2018	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-9-11.5-102318	10/23/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.0012	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-9-11.5-013119	1/31/2019	<0.0058	U		<0.006	U		<0.0053	U		<0.0053	U		0.0038	J		<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-9-11.5-042419	4/24/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-11.5-071919	7/19/2019	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.063			<0.0033	U		0.021			**0.005**	J	
		VMP-9-11.5-102519	10/25/2019	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.0014	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-9-11.5-012220	1/22/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-9-11.5-042220	4/22/2020	<0.0071	U		0.0013	J		<0.0065	U		<0.0065	U		0.0013	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-9-11.5-072220	7/22/2020	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		0.001	J		<0.0033	U		<0.0056	J	U	<0.0056	U	
		VMP-9-11.5-102820	10/28/2020	<0.0067	U		0.0019	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-11.5-012121	1/21/2021	<0.007	U		0.0015	J		<0.0064	U		<0.0064	U		0.074			<0.0033	U		<0.0056	U		<0.0056	U	
	25.5 ft	VMP-9-25.5-021115	2/11/2015	<0.0067	U		<0.007	U		<0.0061	J	U	<0.0061	U		0.024			<0.0032	U		0.012			**0.0043**	J	
		VMP-9-25.5-050415	5/4/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		5.8			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-9-25.5-052915-R	5/29/2015	<0.0076	U		<0.0079	U		<0.0069	J	U	<0.0069	U		0.0016	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-9-25.5-072815	7/28/2015	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.001	J		<0.0056	U	
		VMP-9-25.5-102815	10/28/2015	<0.0064	U		<0.0067	J	U	<0.0058	U		<0.0058	U		0.0036	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-9-25.5-012816	1/28/2016	<0.0078	U		<0.0082	U		**0.0043**	J		**0.00078**	J		0.0035	J		<0.0037	U		0.0016	J		<0.0063	U	
		VMP-9-25.5-042816	4/28/2016	<0.0069	U		0.0012	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-9-25.5-080116	8/1/2016	<0.0073	U		0.0015	J		<0.0067	U		<0.0067	U		0.0016	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-9-25.5-102516	10/25/2016	<0.0067	U		0.0016	J		<0.0062	U		<0.0062	U		0.00073	J		<0.0032	U		0.0059			**0.0018**	J	
		VMP-9-25.5-120916	12/9/2016	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		0.0019	J	J	<0.003	U		<0.0051	U		<0.0051	U	
		VMP-9-25.5-012317	1/23/2017	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0034	J		<0.0036	U		0.0026	J		<0.0061	U	
		VMP-9-25.5-012317-Dup	1/23/2017	<0.0069	U		0.0024	J		<0.0063	J	U	<0.0063	J	U	0.0037	J		<0.0033	U		0.0033	J		**0.0014**	J	
		VMP-9-25.5-042017	4/20/2017	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-9-25.5-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0039	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-9-25.5-110117	11/1/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-9-25.5-012218	1/22/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0066			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-25.5-042618	4/26/2018	<0.0065	U		<0.0068	U		**0.00066**	J		<0.0059	U		<0.0056	U		<0.0031	U		0.0035	J		**0.0011**	J	
		VMP-9-25.5-071918	7/19/2018	<0.0067	U		0.0016	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-25.5-102318	10/23/2018	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		0.0016	J		<0.0029	U		0.0017	J		**0.00091**	J	
		VMP-9-25.5-011819	1/18/2019	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-9-25.5-042419	4/24/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-9-25.5-071919	7/19/2019	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.0043	J		<0.0032	U		0.0024	J		<0.0054	U	
		VMP-9-25.5-071919-DUP	7/19/2019	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.004	J		<0.0034	U		0.0032	J		<0.0058	U	
		VMP-9-25.5-102519	10/25/2019	<0.0073	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-9-25.5-012220	1/22/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-9-25.5-042220	4/22/2020	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-9-25.5-042220-DUP	4/22/2020	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-25.5-072220	7/22/2020	<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		0.00089	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-9-25.5-102820	10/28/2020	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.00048	J		<0.0054	U	
		VMP-9-25.5-102820-DUP	10/28/2020	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-25.5-012121	1/21/2021	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.18	U		<0.024	U		<0.05	U		<0.076	U		<0.29	U		<0.016	U		0.64		J	<0.087	U	
		VMP-9-38.5-050415-DUP	5/4/2015	**0.054**			**0.0067**			<0.006	U		<0.0093	U		<0.035	U		<0.002	U		0.023		J	**0.0058**	J	
		VMP-9-38.5-052915-R	5/29/2015	**0.023**	J		**0.0017**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.046**		
		VMP-9-38.5-072815	7/28/2015	**0.038**			**0.0044**			<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.011			**0.0076**	J	
		VMP-9-38.5-102815	10/28/2015	<0.033	J	U	<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0074**	J	
		VMP-9-38.5-012816	1/28/2016	**0.0089**	J		**0.00081**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-9-38.5-042816	4/28/2016	**0.015**	J		**0.0011**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0046**	J	
		VMP-9-38.5-072916	7/29/2016	**0.024**	J		**0.0022**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-9-38.5-102516	10/25/2016	**0.018**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	J	U
		VMP-9-38.5-120916	12/9/2016	**0.011**	J		**0.0029**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.006	J		**0.0036**	J	
		VMP-9-38.5-012317	1/23/2017	**0.0078**	J		<0.0041	J	U	<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0027	J		<0.015	U	
		VMP-9-38.5-042017	4/20/2017	**0.016**	J		**0.0011**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0048**	J	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.029	J	U	**0.0013**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0029	J		**0.0028**	J	
		VMP-9-38.5-110117	11/1/2017	**0.01**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-9-38.5-012218	1/22/2018	<0.029	U		<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-9-38.5-042618	4/26/2018	**0.011**	J		**0.00096**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-38.5-071918	7/19/2018	**0.051**			**0.0019**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0053**	J	
		VMP-9-38.5-102318	10/23/2018	**0.14**			<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0079**	J	
		VMP-9-38.5-011819	1/18/2019	**0.0081**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-9-38.5-011819-DUP	1/18/2019	**0.012**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-9-38.5-042419	4/24/2019	**0.013**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-38.5-042419-DUP	4/24/2019	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-9-38.5-012121	1/21/2021	**0.0044**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-9-38.5-012121-DUP	1/21/2021	0.0098	J		0.002	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
	5 ft	VMP-10-5-020515	2/5/2015	0.006	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-5-043015	4/30/2015	0.013	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0042	J	
		VMP-10-5-072815	7/28/2015	0.028	J		0.019			<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0096	J		0.0073	J	
		VMP-10-5-103015	10/30/2015	0.03			<0.004	J	U	<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0077	J	
		VMP-10-5-012916	1/29/2016	0.011	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0079	J		0.0038	J	
		VMP-10-5-050216	5/2/2016	<0.033	J	U	0.00072	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-10-5-082616	8/26/2016	0.041			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0065	J		0.0073	J	
		VMP-10-5-110216	11/2/2016	0.02	J		<0.0041	J	U	<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-10-5-013017	1/30/2017	0.0074	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0047	J	
		VMP-10-5-042717	4/27/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		0.0033	J	
		VMP-10-5-072717	7/27/2017	0.012	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-10-5-103017	10/30/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-10-5-013118	1/31/2018	<0.026	J	U	0.00042	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-10-5-042018	4/20/2018	0.018	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0059	J	
		VMP-10-5-072018	7/20/2018	0.064			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0052	J		0.0075	J	
		VMP-10-5-102618	10/26/2018	0.017	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-10-5-012419	1/24/2019	0.014	J		<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		0.0019	J	
		VMP-10-5-050219	5/2/2019	0.0097	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-10-5-072619	7/26/2019	0.012	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-10-5-102519	10/25/2019	0.0066	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-5-012420	1/24/2020	0.014	J	J	<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-10-5-042320	4/23/2020	0.004	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-5-073020	7/30/2020	0.013	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.002	J	
		VMP-10-5-103020	10/30/2020	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-10-5-012721	1/27/2021	0.0061	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.092	U		<0.046	U		<0.034	U		<0.063	U		<0.078	U		<0.036	U		<0.15	U		<0.038	U	
		VMP-9-38.5-050415-DUP	5/4/2015	<0.011	U		<0.0057	U		<0.0041	U		<0.0077	U		<0.0095	U		<0.0044	U		**0.0051**	J		<0.0046	U	
		VMP-9-38.5-052915-R	5/29/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0047**	J		<0.03	ND,UJ	UJ	<0.0075	U	
		VMP-9-38.5-072815	7/28/2015	**0.004**	J		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0038**	J		<0.023	U		<0.0057	U	
		VMP-9-38.5-102815	10/28/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.03**			<0.028	U		<0.0071	U	
		VMP-9-38.5-012816	1/28/2016	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.037**			<0.024	U		<0.006	U	
		VMP-9-38.5-042816	4/28/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.022**			<0.027	U		<0.0068	U	
		VMP-9-38.5-072916	7/29/2016	<0.019	U		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		**0.15**			<0.031	U		<0.0078	U	
		VMP-9-38.5-102516	10/25/2016	**0.0031**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.2**			<0.029	ND,UJ	UJ	<0.0072	U	
		VMP-9-38.5-120916	12/9/2016	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.17**			<0.023	U		<0.0058	U	
		VMP-9-38.5-012317	1/23/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.074**			<0.027	U		<0.0067	U	
		VMP-9-38.5-042017	4/20/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0096**			<0.025	U		<0.0063	U	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0096**			<0.026	U		<0.0064	U	
		VMP-9-38.5-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.013**			<0.023	U		<0.0058	U	
		VMP-9-38.5-012218	1/22/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.02**			<0.025	U		<0.0062	U	
		VMP-9-38.5-042618	4/26/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0048**	J		<0.025	U		<0.0063	U	
		VMP-9-38.5-071918	7/19/2018	**0.0021**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.011**			<0.026	U		<0.0066	U	
		VMP-9-38.5-102318	10/23/2018	**0.0025**	J		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		**0.041**			<0.023	U		<0.0057	U	
		VMP-9-38.5-011819	1/18/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.036**			<0.022	U		<0.0055	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.034**			<0.022	U		<0.0056	U	
		VMP-9-38.5-042419	4/24/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.014**			<0.025	U		<0.0063	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.014**			<0.025	U		<0.0064	U	
		VMP-9-38.5-012121	1/21/2021	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.014**			<0.027	U		<0.0068	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		0.014			<0.027	U		<0.0067	U	
	5 ft	VMP-10-5-020515	2/5/2015	<0.016	U		0.0011	J		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U	UJ	<0.0065	U	
		VMP-10-5-043015	4/30/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-10-5-072815	7/28/2015	0.0029	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-10-5-103015	10/30/2015	0.0034	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-10-5-012916	1/29/2016	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-10-5-050216	5/2/2016	0.0017	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-10-5-082616	8/26/2016	0.0023	J		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-10-5-110216	11/2/2016	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-10-5-013017	1/30/2017	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-10-5-042717	4/27/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-10-5-072717	7/27/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-10-5-103017	10/30/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-10-5-013118	1/31/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-10-5-042018	4/20/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-10-5-072018	7/20/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-10-5-102618	10/26/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-10-5-012419	1/24/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-10-5-050219	5/2/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-10-5-072619	7/26/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-10-5-102519	10/25/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-10-5-012420	1/24/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-10-5-042320	4/23/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-10-5-073020	7/30/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-10-5-103020	10/30/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-10-5-012721	1/27/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	**0.072**		J	<0.057	U		<0.044	U		<0.044	U		<0.044	U		<0.036	U		<0.03	U		<0.03	U	
		VMP-9-38.5-050415-DUP	5/4/2015	**0.0028**	J	J	<0.0069	U		<0.0054	U		<0.0054	U		<0.0054	U		**0.0018**	J		<0.0036	U		<0.0036	U	
		VMP-9-38.5-052915-R	5/29/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-9-38.5-072815	7/28/2015	**0.0021**	J		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0044	U		**0.00081**	J	
		VMP-9-38.5-102815	10/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0025**	J		<0.0056	U		<0.0056	U	
		VMP-9-38.5-012816	1/28/2016	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-9-38.5-042816	4/28/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-9-38.5-072916	7/29/2016	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0022**	J		<0.0061	U		<0.0061	U	
		VMP-9-38.5-102516	10/25/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0035**	J		<0.0056	U		<0.0056	U	
		VMP-9-38.5-120916	12/9/2016	**0.00076**	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-9-38.5-012317	1/23/2017	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-9-38.5-042017	4/20/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-9-38.5-110117	11/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-9-38.5-012218	1/22/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-9-38.5-042618	4/26/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-9-38.5-071918	7/19/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-9-38.5-102318	10/23/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		<0.0054	U		<0.0044	U		<0.0044	U	
		VMP-9-38.5-011819	1/18/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0024**	J		<0.0043	U		<0.0043	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-9-38.5-042419	4/24/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-9-38.5-012121	1/21/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0029	J		<0.0052	U		<0.0052	U	
	5 ft	VMP-10-5-020515	2/5/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0029	J		<0.005	U		<0.005	U	
		VMP-10-5-043015	4/30/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0024	J		<0.0055	U		<0.0055	U	
		VMP-10-5-072815	7/28/2015	0.005			<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0023	J		<0.0057	U		<0.0057	U	
		VMP-10-5-103015	10/30/2015	<0.0044	U		<0.0097	U		<0.0076	J	U	<0.0076	J	U	<0.0076	J	U	0.0027	J		<0.0051	U		<0.0051	U	
		VMP-10-5-012916	1/29/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0027	J		<0.0053	U		<0.0053	U	
		VMP-10-5-050216	5/2/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0026	J		<0.0057	U		<0.0057	U	
		VMP-10-5-082616	8/26/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0025	J		<0.0053	U		<0.0053	U	
		VMP-10-5-110216	11/2/2016	<0.0044	J	U	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0024	J		<0.0052	U		<0.0052	U	
		VMP-10-5-013017	1/30/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-10-5-042717	4/27/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0022	J		<0.0045	U		<0.0045	U	
		VMP-10-5-072717	7/27/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-10-5-103017	10/30/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0024	J		<0.0045	U		<0.0045	U	
		VMP-10-5-013118	1/31/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0031	J		<0.0044	U		<0.0044	U	
		VMP-10-5-042018	4/20/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0036	J		<0.0047	U		<0.0047	U	
		VMP-10-5-072018	7/20/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0027	J		<0.0051	U		<0.0051	U	
		VMP-10-5-102618	10/26/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-10-5-012419	1/24/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0026	J		<0.0042	U		<0.0042	U	
		VMP-10-5-050219	5/2/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-10-5-072619	7/26/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-10-5-102519	10/25/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0024	J		<0.0052	U		<0.0052	U	
		VMP-10-5-012420	1/24/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0039	J		<0.0058	U		<0.0058	U	
		VMP-10-5-042320	4/23/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0024	J		<0.005	U		<0.005	U	
		VMP-10-5-073020	7/30/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0027	J		<0.0051	U		<0.0051	U	
		VMP-10-5-103020	10/30/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0032	J		<0.005	U		<0.005	U	
		VMP-10-5-012721	1/27/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0026	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.029	U		<0.029	U		<0.029	U		<0.26	U		<0.034	U		<0.034	U		<0.034	U		<0.11	U	
		VMP-9-38.5-050415-DUP	5/4/2015	<0.0036	U		<0.0036	U		<0.0036	U		<0.031	U		<0.0042	U		<0.0041	U		<0.0041	U		<0.013	U	
		VMP-9-38.5-052915-R	5/29/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-9-38.5-072815	7/28/2015	<0.0044	U		<0.0044	U		<0.0044	U		**0.0041**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-9-38.5-102815	10/28/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0053**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-9-38.5-012816	1/28/2016	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-9-38.5-042816	4/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-38.5-072916	7/29/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-9-38.5-102516	10/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-9-38.5-120916	12/9/2016	<0.0044	U		<0.0044	U		<0.0044	U		**0.0023**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-9-38.5-012317	1/23/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-38.5-042017	4/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-38.5-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0056**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-9-38.5-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-38.5-042618	4/26/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-9-38.5-071918	7/19/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0049**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-9-38.5-102318	10/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-9-38.5-011819	1/18/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-9-38.5-042419	4/24/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-9-38.5-012121	1/21/2021	<0.0052	U		<0.0052	U		<0.0052	U		**0.0028**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.0051	U		<0.0051	U		<0.0051	U		0.022	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
	5 ft	VMP-10-5-020515	2/5/2015	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-5-043015	4/30/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-10-5-072815	7/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-10-5-103015	10/30/2015	<0.005	U		<0.005	U		<0.005	U		0.0052	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-5-012916	1/29/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-5-050216	5/2/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-10-5-082616	8/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-5-110216	11/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-5-013017	1/30/2017	<0.0047	U		<0.0047	U		<0.0047	U		0.0029	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-10-5-042717	4/27/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-10-5-072717	7/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-10-5-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-10-5-013118	1/31/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-10-5-042018	4/20/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-10-5-072018	7/20/2018	<0.005	U		<0.005	U		<0.005	U		0.0034	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-5-102618	10/26/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-10-5-012419	1/24/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-10-5-050219	5/2/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-10-5-072619	7/26/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-5-102519	10/25/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-5-012420	1/24/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-10-5-042320	4/23/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-5-073020	7/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-5-103020	10/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-5-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.056	U		<0.032	U		<0.036	U		<0.057	U		<0.052	U		<0.03	U		<0.32	ND,UJ	UJ	<0.026	U	
		VMP-9-38.5-050415-DUP	5/4/2015	0.033			<0.0039	U		0.0016	J		<0.0069	U		<0.0063	U		**0.0034**	J		<0.038	ND,UJ	UJ	**0.0054**		
		VMP-9-38.5-052915-R	5/29/2015	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.0021**	J	
		VMP-9-38.5-072815	7/28/2015	0.028			**0.0017**	J		0.0014	J		<0.0084	U		<0.0077	U		**0.0024**	J		<0.047	U		**0.0033**	J	
		VMP-9-38.5-102815	10/28/2015	0.012			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-9-38.5-012816	1/28/2016	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	ND,UJ	UJ	<0.0041	U	
		VMP-9-38.5-042816	4/28/2016	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-9-38.5-072916	7/29/2016	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		<0.0053	U	
		VMP-9-38.5-102516	10/25/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		**0.0021**	J		<0.059	U		**0.0027**	J	
		VMP-9-38.5-120916	12/9/2016	0.086			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0017**	J	
		VMP-9-38.5-012317	1/23/2017	<0.0097	U		<0.0056	U		0.0014	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-9-38.5-042017	4/20/2017	0.0055	J		**0.00079**	J		<0.006	U		<0.0094	U		<0.0085	U		**0.0032**	J		<0.052	U		**0.007**		
		VMP-9-38.5-042017-DUP	4/20/2017	0.0052	J		**0.00087**	J		<0.0061	U		<0.0095	U		<0.0087	U		**0.004**	J		<0.053	U		**0.0084**		
		VMP-9-38.5-110117	11/1/2017	0.0059	J		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-9-38.5-012218	1/22/2018	0.0076	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-9-38.5-042618	4/26/2018	0.0052	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-38.5-071918	7/19/2018	0.008	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		**0.0013**	J	
		VMP-9-38.5-102318	10/23/2018	0.013			**0.0016**	J		0.0021	J	J	<0.0084	U		<0.0076	U		**0.0027**	J		<0.047	U		**0.0038**		
		VMP-9-38.5-011819	1/18/2019	0.0022	J		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-9-38.5-042419	4/24/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-9-38.5-012121	1/21/2021	0.022	J		**0.0022**	J		0.0018	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-9-38.5-012121-DUP	1/21/2021	0.04			0.011			0.0038	J		<0.0099	U		<0.009	U		0.0024	J		<0.055	U		0.0032	J	
	5 ft	VMP-10-5-020515	2/5/2015	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-10-5-043015	4/30/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		0.0012	J	
		VMP-10-5-072815	7/28/2015	0.0092	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		0.0038	J		<0.06	U		0.009		
		VMP-10-5-103015	10/30/2015	0.012			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-10-5-012916	1/29/2016	0.0046	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-10-5-050216	5/2/2016	0.0048	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-10-5-082616	8/26/2016	0.013			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		0.0026	J		<0.056	U		0.0032	J	
		VMP-10-5-110216	11/2/2016	0.011			0.018			0.0026	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-10-5-013017	1/30/2017	0.0058	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-10-5-042717	4/27/2017	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-10-5-072717	7/27/2017	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-10-5-103017	10/30/2017	<0.0087		U	0.0013	J		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-10-5-013118	1/31/2018	0.0089			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-10-5-042018	4/20/2018	0.024			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-10-5-072018	7/20/2018	0.0098			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		0.0025	J		<0.054	U		0.0029	J	
		VMP-10-5-102618	10/26/2018	0.0042	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-10-5-012419	1/24/2019	0.0026	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-10-5-050219	5/2/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-10-5-072619	7/26/2019	0.0032	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-10-5-102519	10/25/2019	<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-10-5-012420	1/24/2020	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-10-5-042320	4/23/2020	<0.0094	U		<0.0054	U		0.0014	J		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		0.0014	J	
		VMP-10-5-073020	7/30/2020	0.0041	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-10-5-103020	10/30/2020	<0.023	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-10-5-012721	1/27/2021	<0.023	U	UJ	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.12	U		12		J	<0.036	U		<0.03	U		<0.027	U					**0.2**			<0.036	U	
		VMP-9-38.5-050415-DUP	5/4/2015	<0.015	U		0.39		J	<0.0044	U		<0.0037	U		<0.0032	U					**0.13**			**0.00075**	J	
		VMP-9-38.5-052915-R	5/29/2015	**0.0027**	J		0.0016	J		<0.0071	U		**0.0014**	J		<0.0052	U					**0.0036**	J		<0.0071	U	
		VMP-9-38.5-072815	7/28/2015	<0.018	U		0.035			<0.0054	J	U	<0.0045	U		<0.004	U					**0.038**			<0.0054	U	
		VMP-9-38.5-102815	10/28/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					<0.014	J	U	<0.0068	U	
		VMP-9-38.5-012816	1/28/2016	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.0042	U					**0.0091**	J		<0.0058	U	
		VMP-9-38.5-042816	4/28/2016	<0.021	ND,UJ	UJ	<0.015	U		<0.0064	U		<0.0054	U		<0.0047	U					**0.0015**	J		<0.0064	U	
		VMP-9-38.5-072916	7/29/2016	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.022	U					**0.01**	J		<0.0074	U	
		VMP-9-38.5-102516	10/25/2016	**0.0012**	J		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U		<0.014	U		**0.012**	J		<0.0068	U	
		VMP-9-38.5-120916	12/9/2016	<0.018	U		0.0057	J		**0.00072**	J		<0.0046	U		<0.016	U		<0.012	U		**0.023**			**0.0017**	J	
		VMP-9-38.5-012317	1/23/2017	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.021**			**0.0031**	J	
		VMP-9-38.5-042017	4/20/2017	<0.02	U		0.0057	J		<0.006	U		<0.005	U		<0.018	U					**0.0091**	J		<0.006	U	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.02	U		0.0059	J		<0.0061	U		<0.0051	U		<0.018	U					**0.01**	J		<0.0061	U	
		VMP-9-38.5-110117	11/1/2017	<0.018	U		0.0013	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-9-38.5-012218	1/22/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0075**	J		<0.0059	U	
		VMP-9-38.5-042618	4/26/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-9-38.5-071918	7/19/2018	<0.021	U		0.014	J		<0.0063	U		<0.0052	U		<0.018	U					**0.13**			<0.0063	U	
		VMP-9-38.5-102318	10/23/2018	<0.018	U		0.0094	J		<0.0054	U		<0.0045	U		<0.016	U					**0.018**			**0.0021**	J	
		VMP-9-38.5-011819	1/18/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.018	U		0.0024	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0044**	J		<0.0053	U	
		VMP-9-38.5-042419	4/24/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	ND,UJ	UJ	<0.018	U					<0.012	U		<0.006	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	ND,UJ	UJ	<0.018	U					<0.012	U		<0.006	U	
		VMP-9-38.5-012121	1/21/2021	<0.021	U		0.0019	J		<0.0064	U		<0.0054	U		<0.019	U					**0.008**	J		**0.00049**	J	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.021	U		0.0054	J		0.00081	J		<0.0053	U		<0.019	U					0.027			0.0011	J	
	5 ft	VMP-10-5-020515	2/5/2015	<0.02	U		0.0052	J		<0.0061	U		<0.0051	U		<0.0045	U					0.0061	J		<0.0061	U	
		VMP-10-5-043015	4/30/2015	0.0017	J		<0.016	U		<0.0067	U		0.0016	J		<0.0049	U					0.0063	J		<0.0067	U	
		VMP-10-5-072815	7/28/2015	<0.023	U		0.018			<0.0069	U		<0.0058	U		<0.0051	U					0.007	J		<0.0069	U	
		VMP-10-5-103015	10/30/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					0.0075	J		<0.0062	U	
		VMP-10-5-012916	1/29/2016	<0.022	U		0.0033	J		<0.0065	U		<0.0054	U		<0.0047	U					0.0075	J		<0.0065	U	
		VMP-10-5-050216	5/2/2016	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					0.0036	J		<0.0069	U	
		VMP-10-5-082616	8/26/2016	<0.022	U		0.0032	J		<0.0065	U		0.0013	J		<0.019	U					0.027			<0.0065	U	
		VMP-10-5-110216	11/2/2016	<0.021	U		0.005	J		<0.0064	U		0.0021	J		<0.019	U		0.01	J	J	0.015			0.0014	J	
		VMP-10-5-013017	1/30/2017	<0.019	U		0.0049	J		<0.0058	U		<0.0049	U		<0.017	U					0.0019	J		<0.0058	U	
		VMP-10-5-042717	4/27/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-10-5-072717	7/27/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.02			<0.0056	U	
		VMP-10-5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-10-5-013118	1/31/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					0.0029	J		<0.0054	U	
		VMP-10-5-042018	4/20/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-10-5-072018	7/20/2018	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					0.0085	J		<0.0062	U	
		VMP-10-5-102618	10/26/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-10-5-012419	1/24/2019	<0.017	U		0.0053	J		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-10-5-050219	5/2/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-10-5-072619	7/26/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					0.0019	J		0.00056	J	
		VMP-10-5-102519	10/25/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-10-5-012420	1/24/2020	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.021	U					0.024			<0.007	U	
		VMP-10-5-042320	4/23/2020	<0.02	U		0.0052	J		0.0024	J		<0.0051	U		<0.018	U					0.0028	J		0.0057	J	
		VMP-10-5-073020	7/30/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.0065	J		<0.0062	U	
		VMP-10-5-103020	10/30/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.008	J		<0.0061	U	
		VMP-10-5-012721	1/27/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.013			<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.032	U		<0.051	U		<0.05	U		<0.022	U		<0.028	U		<0.22	U		<0.04	U		<0.04	U	
		VMP-9-38.5-050415-DUP	5/4/2015	<0.0038	U		<0.0062	U		<0.0061	U		<0.0026	U		**0.0056**			<0.027	U		<0.0049	U		<0.0049	U	
		VMP-9-38.5-052915-R	5/29/2015	<0.0062	U		<0.0099	U		**0.0047**	J		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-9-38.5-072815	7/28/2015	**0.0013**	J		<0.0076	U		**0.0022**	J		<0.0032	U		**0.014**			<0.033	U		<0.006	U		<0.006	U	
		VMP-9-38.5-102815	10/28/2015	<0.0059	U		<0.0095	U		**0.0083**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-9-38.5-012816	1/28/2016	<0.005	U		<0.008	U		**0.0086**			<0.0034	U		<0.0044	U		<0.035	ND,UJ	UJ	<0.0064	U		<0.0064	U	
		VMP-9-38.5-042816	4/28/2016	<0.0056	U		<0.009	U		**0.016**			<0.0039	U	U	<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-9-38.5-072916	7/29/2016	<0.0064	U		<0.01	U		**0.025**			<0.0045	U		**0.0012**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-9-38.5-102516	10/25/2016	<0.0059	U		<0.0095	U		**0.025**			<0.0041	U		**0.00066**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-9-38.5-120916	12/9/2016	<0.0048	U		<0.0077	U		**0.023**			<0.0033	U		**0.0022**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-9-38.5-012317	1/23/2017	<0.0055	U		<0.0088	U		**0.0065**	J		<0.0038	U		**0.00057**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-9-38.5-042017	4/20/2017	<0.0052	U		<0.0084	U		**0.0027**	J		<0.0036	U		**0.00088**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.0053	U		<0.0085	U		**0.0019**	J		<0.0036	U		**0.0017**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-9-38.5-110117	11/1/2017	<0.0047	U		<0.0076	U		**0.0016**	J		<0.0033	U		**0.0005**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-9-38.5-012218	1/22/2018	<0.0051	U		<0.0083	U		**0.0041**	J		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-38.5-042618	4/26/2018	<0.0052	U		<0.0083	U		**0.0031**	J		<0.0036	U		**0.00078**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-38.5-071918	7/19/2018	<0.0054	U		<0.0088	U		**0.0029**	J		<0.0038	U		**0.026**			<0.038	U		<0.007	U		<0.007	U	
		VMP-9-38.5-102318	10/23/2018	<0.0047	U		<0.0075	U		**0.0029**	J		<0.0032	U		**0.0047**			<0.032	U		<0.006	U		<0.006	U	
		VMP-9-38.5-011819	1/18/2019	<0.0045	U		<0.0073	U		**0.0016**	J		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.0046	U		<0.0074	U		**0.002**	J		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-9-38.5-042419	4/24/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U	UJ	<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U	UJ	<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-9-38.5-012121	1/21/2021	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0026**	J	J	<0.039	U		<0.0071	U		<0.0071	U	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.0055	U		<0.0089	U		0.0019	J		<0.0038	U		0.023		J	<0.038	U		<0.0071	U		<0.0071	U	
	5 ft	VMP-10-5-020515	2/5/2015	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.00097	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-5-043015	4/30/2015	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		0.0021	J		<0.0074	U		<0.0074	U	
		VMP-10-5-072815	7/28/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-10-5-103015	10/30/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-10-5-012916	1/29/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-10-5-050216	5/2/2016	<0.006	U		<0.0096	U		0.0014	J		<0.0041	U		0.00072	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-10-5-082616	8/26/2016	<0.0056	U		<0.009	U		0.0034	J		<0.0039	U		<0.005	J	U	<0.039	U		<0.0072	U		<0.0072	U	
		VMP-10-5-110216	11/2/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		0.0083			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-10-5-013017	1/30/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0017	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-10-5-042717	4/27/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-10-5-072717	7/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-10-5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		0.0012	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-10-5-013118	1/31/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		0.00063	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-10-5-042018	4/20/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-10-5-072018	7/20/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0015	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-5-102618	10/26/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-10-5-012419	1/24/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-10-5-050219	5/2/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.00092	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-5-072619	7/26/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-10-5-102519	10/25/2019	<0.0055	U		<0.0088	U		0.0018	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-5-012420	1/24/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-10-5-042320	4/23/2020	0.00055	J		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-5-073020	7/30/2020	<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-10-5-103020	10/30/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-5-012721	1/27/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-9-38.5-050415	5/4/2015	<0.04	U		<0.042	U		<0.036	U		<0.036	U		0.27		J	<0.019	U		<0.032	U		<0.032	U	
		VMP-9-38.5-050415-DUP	5/4/2015	<0.0048	U		0.0014	J		**0.0017**	J		<0.0044	U		0.013		J	<0.0023	U		0.0018	J		**0.00097**	J	
		VMP-9-38.5-052915-R	5/29/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-9-38.5-072815	7/28/2015	**0.0014**	J		0.0011	J		**0.0017**	J		<0.0054	J	U	0.0016	J		<0.0028	U		0.0058			**0.0025**	J	
		VMP-9-38.5-102815	10/28/2015	<0.0074	J	U	<0.0078	U		<0.0068	U		<0.0068	U		0.0018	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-9-38.5-012816	1/28/2016	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-9-38.5-042816	4/28/2016	**0.0018**	J		<0.0074	U		<0.0064	U		<0.0064	U		0.00094	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-9-38.5-072916	7/29/2016	<0.0081	U		<0.0085	U		**0.0027**	J		<0.0074	U		0.002	J		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-9-38.5-102516	10/25/2016	**0.0018**	J		0.0018	J		<0.0068	U		<0.0068	U		0.0014	J		<0.0035	U		0.0013	J		<0.006	U	
		VMP-9-38.5-120916	12/9/2016	**0.0012**	J		0.0013	J		**0.0015**	J		<0.0055	U		0.016	J0	J	<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-9-38.5-012317	1/23/2017	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	U		0.012			<0.0033	U		0.0022	J		<0.0056	U	
		VMP-9-38.5-042017	4/20/2017	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.0049	J		<0.0031	U		0.00092	J		<0.0053	U	
		VMP-9-38.5-042017-DUP	4/20/2017	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0053	J		<0.0032	U		0.0013	J		<0.0054	U	
		VMP-9-38.5-110117	11/1/2017	<0.006	U		0.00096	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		0.0029	J		<0.0048	U	
		VMP-9-38.5-012218	1/22/2018	<0.0065	U		0.001	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-38.5-042618	4/26/2018	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		0.0047	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-9-38.5-071918	7/19/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-9-38.5-102318	10/23/2018	<0.0059	U		0.0014	J		**0.0026**	J	J	<0.0054	U		0.0053			<0.0028	U		0.0058			**0.0022**	J	
		VMP-9-38.5-011819	1/18/2019	<0.0057	U		<0.006	U		<0.0052	U		<0.0052	U		0.017			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-9-38.5-011819-DUP	1/18/2019	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		0.02			<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-9-38.5-042419	4/24/2019	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-9-38.5-042419-DUP	4/24/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-9-38.5-012121	1/21/2021	<0.007	U		0.0015	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.009		J	**0.0033**	J	
		VMP-9-38.5-012121-DUP	1/21/2021	<0.007	U		0.0014	J		<0.0064	J	U	<0.0064	U		0.0037	J		<0.0033	U		0.042		J	0.012		
	5 ft	VMP-10-5-020515	2/5/2015	<0.0067	U		0.0022	J		<0.0061	J	U	<0.0061	J	U	<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-5-043015	4/30/2015	<0.0073	J	U	<0.0077	U		<0.0067	U		<0.0067	U		0.0017	J		<0.0035	U		0.0019	J		<0.0059	U	
		VMP-10-5-072815	7/28/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.11			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-10-5-103015	10/30/2015	<0.0068	U		0.0019	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-5-012916	1/29/2016	<0.0071	U		0.0017	J		<0.0065	U		<0.0065	U		0.0021	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-10-5-050216	5/2/2016	<0.0076	U		0.0013	J		<0.0069	U		<0.0069	U		0.00087	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-10-5-082616	8/26/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-10-5-110216	11/2/2016	<0.007	U		<0.0073	U		<0.0064	J	U	<0.0064	U		<0.006	J	U	<0.0033	U		0.056			0.013		
		VMP-10-5-013017	1/30/2017	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-10-5-042717	4/27/2017	<0.006	U		0.0012	J		<0.0054	U		<0.0054	U		0.0055			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-10-5-072717	7/27/2017	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		0.0008	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-10-5-103017	10/30/2017	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		0.00094	J		<0.0029	U		0.0057			0.0014	J	
		VMP-10-5-013118	1/31/2018	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-10-5-042018	4/20/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-10-5-072018	7/20/2018	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.0031	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-5-102618	10/26/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-10-5-012419	1/24/2019	<0.0056	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-10-5-050219	5/2/2019	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0007	J		<0.0053	U	
		VMP-10-5-072619	7/26/2019	<0.007	U		0.00096	J		<0.0064	U		<0.0064	U		0.0051	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-10-5-102519	10/25/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-5-012420	1/24/2020	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-10-5-042320	4/23/2020	<0.0067	U		<0.007	U		0.0018	J		0.00071	J		0.027			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-5-073020	7/30/2020	<0.0068	U		0.0011	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-5-103020	10/30/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-5-012721	1/27/2021	<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	0.006	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-10-10-043015	4/30/2015	0.0072	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0036	J	
		VMP-10-10-072815	7/28/2015	0.027	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.0079	J	
		VMP-10-10-103015	10/30/2015	0.025	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.004	J	
		VMP-10-10-021616	2/16/2016	0.017	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		0.0026	J		0.0045	J	
		VMP-10-10-050216	5/2/2016	0.012	J		<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		<0.018	U	
		VMP-10-10-072816	7/28/2016	0.049			0.0021	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		0.058		
		VMP-10-10-110216	11/2/2016	0.012	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-10-10-013017	1/30/2017	0.016	J		<0.0039	J	U	<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.0034	J		0.0086	J	
		VMP-10-10-042717	4/27/2017	<0.029	J	U	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-10-10-072717	7/27/2017	0.0087	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-10-10-103017	10/30/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0062	J		<0.013	U	
		VMP-10-10-013118	1/31/2018	<0.027	J	U	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-10-10-042018	4/20/2018	0.01	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-10-10-072018	7/20/2018	0.087			0.00065	J		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-10-102618	10/26/2018	0.0076	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-10-10-012419	1/24/2019	0.01	J		0.0026	J		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		<0.0098	U		<0.012	U	
		VMP-10-10-050219	5/2/2019	0.2			0.0011	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.009	J	
		VMP-10-10-072619	7/26/2019	0.0079	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-10-10-102519	10/25/2019	0.013	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-10-10-012420	1/24/2020	0.0065	J	J	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-10-10-042320	4/23/2020	0.014	J		0.022			<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-10-10-073020	7/30/2020	0.028	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0067	J	
		VMP-10-10-103020	10/30/2020	<0.03	J	U	0.0009	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-10-012721	1/27/2021	0.0074	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
	20 ft	VMP-10-20-020515	2/5/2015	0.01	J		0.0054			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-10-20-043015	4/30/2015	0.0093	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		0.012	J	
		VMP-10-20-072815	7/28/2015	0.04			0.002	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.0092	J	
		VMP-10-20-072815-DUP	7/28/2015	0.049			0.0024	J		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		0.012	J	
		VMP-10-20-103015	10/30/2015	0.019	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0024	J	
		VMP-10-20-012916	1/29/2016	0.0095	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0021	J	
		VMP-10-20-050216	5/2/2016	<0.031	J	U	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-10-20-072816	7/28/2016	0.027	J		<0.0089	U		<0.019	U		<0.029	U		<0.11	U		<0.0062	U		<0.026	U		<0.033	U	
		VMP-10-20-110216	11/2/2016	0.011	J		0.031			<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-10-20-013017	1/30/2017	0.035			<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0093	J	
		VMP-10-20-042717	4/27/2017	<0.027	J	U	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0037	J	
		VMP-10-20-072717	7/27/2017	0.0047	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-10-20-103017	10/30/2017	<0.025	J	U	<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-10-20-013118	1/31/2018	<0.027	J	U	<0.0036	U		0.0046	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-10-20-042018	4/20/2018	0.012	J		<0.004	U		0.014			<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-20-072018	7/20/2018	0.03			<0.004	U		0.0052	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-10-20-102618	10/26/2018	0.029			<0.0039	U		0.0027	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-10-20-012419	1/24/2019	0.026			<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-10-20-050219	5/2/2019	0.012	J		0.0023	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-10-20-072619	7/26/2019	0.0075	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-10-20-102519	10/25/2019	0.015	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-10-20-012420	1/24/2020	0.007	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-10-20-042320	4/23/2020	0.012	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-10-20-073020	7/30/2020	0.016	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0023	J	
		VMP-10-20-103020	10/30/2020	0.016	J		0.00041	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0033	J	
		VMP-10-20-012721	1/27/2021	0.0069	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U	UJ	<0.0064	U	
		VMP-10-10-043015	4/30/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-10-10-072815	7/28/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-10-10-103015	10/30/2015	0.0035	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-10-10-021616	2/16/2016	<0.017	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-10-10-050216	5/2/2016	<0.019	U		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.0081	U	
		VMP-10-10-072816	7/28/2016	0.0081	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-10-10-110216	11/2/2016	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-10-10-013017	1/30/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-10-10-042717	4/27/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-10-10-072717	7/27/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-10-10-103017	10/30/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-10-10-013118	1/31/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-10-10-042018	4/20/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-10-10-072018	7/20/2018	<0.016	J	U	<0.008	U		0.00084	J		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-10-10-102618	10/26/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-10-10-012419	1/24/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0054	U	
		VMP-10-10-050219	5/2/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-10-10-072619	7/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-10-10-102519	10/25/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-10-10-012420	1/24/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-10-10-042320	4/23/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-10-10-073020	7/30/2020	0.0058	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-10-10-103020	10/30/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-10-10-012721	1/27/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00052	J		<0.024	U		<0.0062	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U	UJ	<0.0067	U	
		VMP-10-20-043015	4/30/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-10-20-072815	7/28/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		0.015	J		<0.0072	U	
		VMP-10-20-072815-DUP	7/28/2015	0.0056	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		0.0032	J		<0.0074	U	
		VMP-10-20-103015	10/30/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-10-20-012916	1/29/2016	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-10-20-050216	5/2/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-10-20-072816	7/28/2016	0.0063	J		<0.018	U		<0.013	U		<0.024	U		<0.03	U		<0.014	U		<0.058	U		<0.014	U	
		VMP-10-20-110216	11/2/2016	0.0078	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-10-20-013017	1/30/2017	0.022			<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-10-20-042717	4/27/2017	0.0017	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-10-20-072717	7/27/2017	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-10-20-103017	10/30/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-10-20-013118	1/31/2018	<0.014	U		0.0011	J		<0.0052	U		<0.0097	U		<0.012	U		0.11			<0.024	U		<0.0059	U	
		VMP-10-20-042018	4/20/2018	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		0.32			<0.026	U		<0.0064	U	
		VMP-10-20-072018	7/20/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.084			<0.026	U		<0.0065	U	
		VMP-10-20-102618	10/26/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.033			<0.025	U		<0.0063	U	
		VMP-10-20-012419	1/24/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		0.0067			<0.022	U		<0.0054	U	
		VMP-10-20-050219	5/2/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		0.0023	J		<0.025	U		<0.0063	U	
		VMP-10-20-072619	7/26/2019	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		0.0026	J		<0.03	U		<0.0074	ND,UJ	UJ
		VMP-10-20-102519	10/25/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		0.00093	J		<0.028	U		<0.007	U	
		VMP-10-20-012420	1/24/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-10-20-042320	4/23/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-10-20-073020	7/30/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-10-20-103020	10/30/2020	0.048			<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0011	J		<0.027	U		<0.0067	U	
		VMP-10-20-012721	1/27/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.00046	J		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0028	J		<0.005	U		<0.005	U	
		VMP-10-10-043015	4/30/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0024	J		<0.0052	U		<0.0052	U	
		VMP-10-10-072815	7/28/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0027	J		<0.0058	U		<0.0058	U	
		VMP-10-10-103015	10/30/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	J	U	0.003	J		<0.0052	U		<0.0052	U	
		VMP-10-10-021616	2/16/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0032	J		<0.0054	U		<0.0054	U	
		VMP-10-10-050216	5/2/2016	<0.0054	U		<0.012	U		<0.0094	U		<0.0094	U		<0.0094	U		0.0031	J		<0.0063	U		<0.0063	U	
		VMP-10-10-072816	7/28/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0022	J		<0.0056	U		<0.0056	U	
		VMP-10-10-110216	11/2/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0022	J		<0.0056	U		<0.0056	U	
		VMP-10-10-013017	1/30/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0049	U		<0.0049	U	
		VMP-10-10-042717	4/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0027	J		<0.0049	U		<0.0049	U	
		VMP-10-10-072717	7/27/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-10-10-103017	10/30/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0021	J		<0.0045	U		<0.0045	U	
		VMP-10-10-013118	1/31/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0034	J		<0.0046	U		<0.0046	U	
		VMP-10-10-042018	4/20/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		<0.0057	J	U	<0.0047	U		<0.0047	U	
		VMP-10-10-072018	7/20/2018	<0.0044	U		<0.0098	U		0.0015	J		0.0016	J		0.0011	J		0.0027	J		<0.0052	U		<0.0052	U	
		VMP-10-10-102618	10/26/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0023	J		<0.0047	U		<0.0047	U	
		VMP-10-10-012419	1/24/2019	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		0.0025	J		<0.0042	U		<0.0042	U	
		VMP-10-10-050219	5/2/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-10-10-072619	7/26/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.002	J		<0.005	U		<0.005	U	
		VMP-10-10-102519	10/25/2019	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-10-10-012420	1/24/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-10-10-042320	4/23/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0022	J		<0.0055	U		<0.0055	U	
		VMP-10-10-073020	7/30/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0052	U		<0.0052	U	
		VMP-10-10-103020	10/30/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0029	J		<0.0052	U		<0.0052	U	
		VMP-10-10-012721	1/27/2021	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0032	J		<0.0053	U		<0.0053	U	
		VMP-10-20-043015	4/30/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		0.0023	J		<0.006	U		<0.006	U	
		VMP-10-20-072815	7/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	J	U	<0.0083	U		0.0025	J		<0.0056	U		<0.0056	U	
		VMP-10-20-072815-DUP	7/28/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0027	J		<0.0058	U		<0.0058	U	
		VMP-10-20-103015	10/30/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-10-20-012916	1/29/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0027	J		<0.0051	U		<0.0051	U	
		VMP-10-20-050216	5/2/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0029	J		<0.0053	U		<0.0053	U	
		VMP-10-20-072816	7/28/2016	<0.0096	U		<0.021	U		<0.017	U		<0.017	U		<0.017	U		<0.014	U		<0.011	U		<0.011	U	
		VMP-10-20-110216	11/2/2016	0.0067			<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0019	J		<0.0055	U		<0.0055	U	
		VMP-10-20-013017	1/30/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0024	J		<0.0051	U		<0.0051	U	
		VMP-10-20-042717	4/27/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-10-20-072717	7/27/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-10-20-103017	10/30/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0025	J		<0.0043	U		<0.0043	U	
		VMP-10-20-013118	1/31/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0031	J		<0.0046	U		<0.0046	U	
		VMP-10-20-042018	4/20/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0031	J		<0.005	U		<0.005	U	
		VMP-10-20-072018	7/20/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0028	J		<0.0051	U		<0.0051	U	
		VMP-10-20-102618	10/26/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0022	J		<0.0049	U		<0.0049	U	
		VMP-10-20-012419	1/24/2019	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0024	J		<0.0042	U		<0.0042	U	
		VMP-10-20-050219	5/2/2019	0.0017	J		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0026	J		<0.0049	U		<0.0049	U	
		VMP-10-20-072619	7/26/2019	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0024	J		<0.0058	U		<0.0058	U	
		VMP-10-20-102519	10/25/2019	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0022	J		<0.0055	U		<0.0055	U	
		VMP-10-20-012420	1/24/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-10-20-042320	4/23/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0021	J		<0.005	U		<0.005	U	
		VMP-10-20-073020	7/30/2020	0.00052	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.002	J		<0.0051	U		<0.0051	U	
		VMP-10-20-103020	10/30/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-10-20-012721	1/27/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-10-043015	4/30/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-10-072815	7/28/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-10-10-103015	10/30/2015	<0.0051	U		<0.0051	U		<0.0051	U		0.0061	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-10-021616	2/16/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-10-050216	5/2/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.0071	U		<0.0071	U		<0.022	U	
		VMP-10-10-072816	7/28/2016	<0.0055	U		<0.0055	U		<0.0055	U		0.0053	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-10-10-110216	11/2/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-10-10-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		0.0024	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-10-10-042717	4/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-10-10-072717	7/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-10-10-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-10-10-013118	1/31/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-10-10-042018	4/20/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-10-10-072018	7/20/2018	<0.005	U		<0.005	U		<0.005	U		0.0043	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-10-102618	10/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-10-10-012419	1/24/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-10-10-050219	5/2/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		0.0062	J	
		VMP-10-10-072619	7/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-10-102519	10/25/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-10-10-012420	1/24/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-10-10-042320	4/23/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-10-10-073020	7/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-10-103020	10/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-10-012721	1/27/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	J	U	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-20-043015	4/30/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-10-20-072815	7/28/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-10-20-072815-DUP	7/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP-10-20-103015	10/30/2015	<0.0047	U		<0.0047	U		<0.0047	U		0.0049	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-10-20-012916	1/29/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-20-050216	5/2/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-20-072816	7/28/2016	<0.011	U		<0.011	U		<0.011	U		<0.097	U		<0.013	U		<0.013	U		<0.013	U		<0.04	U	
		VMP-10-20-110216	11/2/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-10-20-013017	1/30/2017	<0.005	U		<0.005	U		<0.005	U		0.0017	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-20-042717	4/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-10-20-072717	7/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-10-20-103017	10/30/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-10-20-013118	1/31/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-10-20-042018	4/20/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-20-072018	7/20/2018	<0.005	U		<0.005	U		<0.005	U		0.0058	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-20-102618	10/26/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-10-20-012419	1/24/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-10-20-050219	5/2/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-10-20-072619	7/26/2019	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-10-20-102519	10/25/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-10-20-012420	1/24/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-20-042320	4/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-20-073020	7/30/2020	<0.005	U		<0.005	U		<0.005	U		0.0027	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-20-103020	10/30/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-20-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0056	U		<0.0055	U		<0.0055	U		0.013	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-10-10-043015	4/30/2015	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		0.0011	J	
		VMP-10-10-072815	7/28/2015	0.023			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-10-10-103015	10/30/2015	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-10-10-021616	2/16/2016	0.0047	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-10-10-050216	5/2/2016	0.014			<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-10-10-072816	7/28/2016	0.17			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		0.0034	J		<0.059	U		0.0026	J	
		VMP-10-10-110216	11/2/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-10-10-013017	1/30/2017	0.11			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-10-10-042717	4/27/2017	0.0045	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-10-10-072717	7/27/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-10-10-103017	10/30/2017	<0.0084		U	<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		0.0031	J		<0.047	U		0.0038	J	
		VMP-10-10-013118	1/31/2018	0.0035	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-10-10-042018	4/20/2018	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-10-10-072018	7/20/2018	0.005	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-10-10-102618	10/26/2018	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-10-10-012419	1/24/2019	<0.0078	U		<0.0045	U		<0.0051	U		<0.0079	U		<0.0072	U		<0.0042	U		<0.044	U		<0.0036	U	
		VMP-10-10-050219	5/2/2019	0.0083	J		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-10-10-072619	7/26/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-10-10-102519	10/25/2019	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-10-10-012420	1/24/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-10-10-042320	4/23/2020	0.0062	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		0.0055	J		<0.058	U		0.014		
		VMP-10-10-073020	7/30/2020	0.0086	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-10-10-103020	10/30/2020	0.0086	J	J	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-10-10-012721	1/27/2021	0.0051	J	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		0.0028	J	
		VMP-10-20-043015	4/30/2015	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		0.0017	J	
		VMP-10-20-072815	7/28/2015	<0.01	J	U	0.0018	J		<0.0068	U		<0.011	U		<0.0097	U		0.0028	J		<0.059	U		0.0042	J	
		VMP-10-20-072815-DUP	7/28/2015	0.013			0.0023	J		<0.007	U		<0.011	U		<0.01	U		0.003	J		<0.061	U		0.0046	J	
		VMP-10-20-103015	10/30/2015	0.0082	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-10-20-012916	1/29/2016	<0.0095	U		<0.0055	U		0.0016	J	J	<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-10-20-050216	5/2/2016	0.0082	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-10-20-072816	7/28/2016	<0.021	U		<0.012	U		<0.014	U		<0.021	U		<0.02	U		<0.011	U		<0.12	U		<0.0098	U	
		VMP-10-20-110216	11/2/2016	<0.01	U		0.052			0.04			<0.01	U		<0.0095	U		0.014			<0.058	U		0.025		
		VMP-10-20-013017	1/30/2017	0.01			<0.0055	U		0.0016	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-10-20-042717	4/27/2017	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-10-20-072717	7/27/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-10-20-103017	10/30/2017	<0.008	U		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-10-20-013118	1/31/2018	0.0097			<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-10-20-042018	4/20/2018	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-10-20-072018	7/20/2018	0.015			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-10-20-102618	10/26/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-10-20-012419	1/24/2019	<0.0079	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-10-20-050219	5/2/2019	<0.0092	U		0.0015	J		<0.006	U		<0.0094	U		<0.0085	U		0.014			<0.052	U		0.025		
		VMP-10-20-072619	7/26/2019	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-10-20-102519	10/25/2019	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-10-20-012420	1/24/2020	<0.0098	ND,UJ	UJ	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		0.01	J		<0.0046	U	
		VMP-10-20-042320	4/23/2020	0.0044	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-10-20-073020	7/30/2020	0.0098			<0.0055	U		0.001	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-10-20-103020	10/30/2020	<0.024	U	UJ	<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-10-20-012721	1/27/2021	<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					0.011	J		<0.0061	U	
		VMP-10-10-043015	4/30/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	J	U	<0.0046	U					0.0063	J		<0.0063	U	
		VMP-10-10-072815	7/28/2015	<0.024	U		0.0041	J		<0.0071	U		<0.0059	U		<0.0052	U					0.0074	J		<0.0071	U	
		VMP-10-10-103015	10/30/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					0.0088	J		<0.0063	U	
		VMP-10-10-021616	2/16/2016	0.0012	J		0.0037	J		<0.0066	U		0.00079	J		<0.0048	U					0.012	J		<0.0066	U	
		VMP-10-10-050216	5/2/2016	<0.026	U		0.0036	J		<0.0077	U		<0.0064	U		<0.0056	U					0.0039	J		<0.0077	U	
		VMP-10-10-072816	7/28/2016	0.0043	J		<0.016	U		<0.0068	U		0.0064			<0.02	U					0.034			<0.0068	U	
		VMP-10-10-110216	11/2/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U		<0.015	U		<0.014	U		<0.0068	U	
		VMP-10-10-013017	1/30/2017	0.0064	J		0.0064	J		<0.006	U		<0.005	U		<0.018	U					0.0063	J		<0.006	U	
		VMP-10-10-042717	4/27/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.0038	J		<0.0059	U	
		VMP-10-10-072717	7/27/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0024	J		<0.006	U	
		VMP-10-10-103017	10/30/2017	<0.018	U		0.0024	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-10-10-013118	1/31/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-10-10-042018	4/20/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-10-10-072018	7/20/2018	<0.021	U		<0.015	U		0.00082	J		<0.0052	U		<0.018	U					0.016			0.0011	J	
		VMP-10-10-102618	10/26/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-10-10-012419	1/24/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U					0.0021	J		<0.0051	U	
		VMP-10-10-050219	5/2/2019	<0.02	U		0.0032	J		<0.0061	U		<0.0051	U		<0.018	U					0.04			<0.0061	U	
		VMP-10-10-072619	7/26/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-10-10-102519	10/25/2019	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-10-10-012420	1/24/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.025			0.0025	J	
		VMP-10-10-042320	4/23/2020	<0.022	U		0.0074	J		<0.0067	U		<0.0056	U		<0.02	U					0.0095	J		<0.0067	U	
		VMP-10-10-073020	7/30/2020	0.0019	J		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					0.0078	J		0.00055	J	
		VMP-10-10-103020	10/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					0.012			<0.0063	U	
		VMP-10-10-012721	1/27/2021	<0.019	U		0.002	J		<0.0058	U		<0.0049	U		<0.017	U					0.0056	J		<0.0058	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.021	U		0.0053	J		<0.0064	U		<0.0053	U		<0.0047	U					0.014			<0.0064	U	
		VMP-10-20-043015	4/30/2015	0.0013	J		<0.017	U		<0.0073	U		0.0043	J		<0.0053	U					0.016			<0.0073	U	
		VMP-10-20-072815	7/28/2015	<0.023	U		0.0043	J		<0.0068	U		0.0021	J		<0.005	U					0.004	J		<0.0068	U	
		VMP-10-20-072815-DUP	7/28/2015	<0.023	U		0.0037	J		<0.007	U		0.0016	J		<0.0051	U					0.0032	J		<0.007	U	
		VMP-10-20-103015	10/30/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					0.0039	J		<0.0058	U	
		VMP-10-20-012916	1/29/2016	<0.021	U		<0.015	U		0.0015	J		<0.0052	U		<0.0045	U					0.0053	J		0.0046	J	
		VMP-10-20-050216	5/2/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.0047	U					0.0011	J		<0.0064	U	
		VMP-10-20-072816	7/28/2016	<0.046	U		<0.033	U		<0.014	U		<0.011	U		<0.04	U					0.013	J		<0.014	U	
		VMP-10-20-110216	11/2/2016	<0.022	U		0.025			0.0045	J		<0.0056	U		<0.02	U		0.0036	J	J	<0.013	U		0.013		
		VMP-10-20-013017	1/30/2017	0.0024	J		<0.015	U		<0.0062	U		0.0014	J		<0.018	U					0.0055	J		<0.0062	U	
		VMP-10-20-042717	4/27/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-10-20-072717	7/27/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-10-20-103017	10/30/2017	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-10-20-013118	1/31/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					0.0016	J		<0.0056	U	
		VMP-10-20-042018	4/20/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-10-20-072018	7/20/2018	<0.02	U		0.016			<0.0062	U		<0.0051	U		<0.018	U					0.022			<0.0062	U	
		VMP-10-20-102618	10/26/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-10-20-012419	1/24/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					0.0026	J		<0.0051	U	
		VMP-10-20-050219	5/2/2019	<0.02	U		0.026			<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-10-20-072619	7/26/2019	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.021	U					0.0042	J		<0.007	U	
		VMP-10-20-102519	10/25/2019	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-10-20-012420	1/24/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-10-20-042320	4/23/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0052	J		<0.006	U	
		VMP-10-20-073020	7/30/2020	<0.021	U		<0.015	U		0.0061	J		<0.0052	U		<0.018	U					0.0097	J		0.019		
		VMP-10-20-103020	10/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					0.01	J		<0.0064	U	
		VMP-10-20-012721	1/27/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0095	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.00092	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-10-043015	4/30/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-10-072815	7/28/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-10-10-103015	10/30/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-10-021616	2/16/2016	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-10-10-050216	5/2/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		0.00093	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-10-10-072816	7/28/2016	<0.0059	U		<0.0095	U		0.0042	J		0.0062			0.003	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-10-10-110216	11/2/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	J	U	<0.041	U		<0.0076	U		<0.0076	U	
		VMP-10-10-013017	1/30/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.0017	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-10-042717	4/27/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-10-072717	7/27/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-10-103017	10/30/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-10-10-013118	1/31/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-10-10-042018	4/20/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-10-10-072018	7/20/2018	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		0.00075	J		<0.038	J	U	<0.007	U		<0.007	U	
		VMP-10-10-102618	10/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		0.0096	J		<0.0063	U		<0.0063	U	
		VMP-10-10-012419	1/24/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.003	U		<0.0039	U		<0.031	U		<0.0056	U		<0.0056	U	
		VMP-10-10-050219	5/2/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0006	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-10-072619	7/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-10-102519	10/25/2019	<0.0058	U		<0.0094	U		0.0043	J		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-10-10-012420	1/24/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-10-10-042320	4/23/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		0.0011	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-10-10-073020	7/30/2020	<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-10-10-103020	10/30/2020	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-10-012721	1/27/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-10-20-043015	4/30/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-10-20-072815	7/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.0015	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-10-20-072815-DUP	7/28/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		0.0034	J		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-10-20-103015	10/30/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-10-20-012916	1/29/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-10-20-050216	5/2/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-10-20-072816	7/28/2016	<0.012	U		<0.019	U		<0.019	U		<0.0082	U		<0.01	U		<0.083	U		<0.015	U		<0.015	U	
		VMP-10-20-110216	11/2/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		0.17			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-10-20-013017	1/30/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0018	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-10-20-042717	4/27/2017	<0.0049	U		0.002	J		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-10-20-072717	7/27/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-20-103017	10/30/2017	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-10-20-013118	1/31/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-10-20-042018	4/20/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-20-072018	7/20/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.023			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-10-20-102618	10/26/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-20-012419	1/24/2019	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-10-20-050219	5/2/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.019			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-20-072619	7/26/2019	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-10-20-102519	10/25/2019	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-10-20-012420	1/24/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-10-20-042320	4/23/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-10-20-073020	7/30/2020	<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0012	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-10-20-103020	10/30/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-10-20-012721	1/27/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.00055	J		<0.036	U		<0.0066	U		<0.0066	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-10	10 ft	VMP-10-10-020515	2/5/2015	<0.0067	U		0.002	J		<0.0061	J	U	<0.0061	U		0.00085	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-10-043015	4/30/2015	<0.0069	J	U	<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-10-072815	7/28/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-10-10-103015	10/30/2015	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.0017	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-10-021616	2/16/2016	<0.0072	U		0.0021	J		0.0013	J		<0.0066	U		0.0036	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-10-10-050216	5/2/2016	<0.0084	U		<0.0088	U		<0.0077	U		<0.0077	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-10-10-072816	7/28/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		0.0024	J		<0.006	U	
		VMP-10-10-110216	11/2/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0056	J		<0.0036	U		0.0016	J		<0.006	U	
		VMP-10-10-013017	1/30/2017	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-10-10-042717	4/27/2017	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		0.0013	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-10-10-072717	7/27/2017	<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-10-10-103017	10/30/2017	<0.006	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-10-10-013118	1/31/2018	<0.0062	U		0.0017	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-10-10-042018	4/20/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0033	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-10-10-072018	7/20/2018	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		0.00072	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-10-102618	10/26/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0022	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-10-10-012419	1/24/2019	<0.0056	U		<0.0058	U		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-10-10-050219	5/2/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.002	J		<0.0032	U		0.0008	J		<0.0054	U	
		VMP-10-10-072619	7/26/2019	<0.0067	U		0.00066	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-10-102519	10/25/2019	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-10-10-012420	1/24/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-10-10-042320	4/23/2020	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0081			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-10-10-073020	7/30/2020	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		0.0034	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-10-103020	10/30/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0011	J		0.0007	J	
		VMP-10-10-012721	1/27/2021	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
	20 ft	VMP-10-20-020515	2/5/2015	<0.007	U		0.0018	J		<0.0064	J	U	<0.0064	U		0.007			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-20-043015	4/30/2015	<0.008	J	U	<0.0083	U		<0.0073	U		<0.0073	U		0.0014	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-10-20-072815	7/28/2015	<0.0074	U		0.0015	J		0.00099	J		<0.0068	U		0.0035	J		<0.0035	U		0.0024	J		0.0011	J	
		VMP-10-20-072815-DUP	7/28/2015	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0048	J		<0.0036	U		0.0025	J		<0.0062	U	
		VMP-10-20-103015	10/30/2015	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-10-20-012916	1/29/2016	<0.0068	U		<0.0071	U		0.0041	J		<0.0062	U		0.0067			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-20-050216	5/2/2016	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-10-20-072816	7/28/2016	<0.015	U		<0.016	U		<0.014	U		<0.014	U		<0.013	U		<0.0071	U		<0.012	U		<0.012	U	
		VMP-10-20-110216	11/2/2016	<0.0073	U		<0.0076	U		0.036			0.011			0.018			<0.0035	U		0.2			0.081		
		VMP-10-20-013017	1/30/2017	<0.0068	U		0.0013	J		<0.0062	J	U	<0.0062	U		<0.0059	U		<0.0032	U		0.0019	J		<0.0055	U	
		VMP-10-20-042717	4/27/2017	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-10-20-072717	7/27/2017	<0.0066	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-10-20-103017	10/30/2017	<0.0057	U		0.0011	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-10-20-013118	1/31/2018	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-10-20-042018	4/20/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.014			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-20-072018	7/20/2018	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.00094	J		<0.0032	U		0.001	J		<0.0054	U	
		VMP-10-20-102618	10/26/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-10-20-012419	1/24/2019	<0.0056	U		<0.0059	U		<0.0051	U		<0.0051	U		0.00077	J		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-10-20-050219	5/2/2019	<0.0066	U		0.0011	J		<0.006	U		<0.006	U		0.035			<0.0031	U		0.0046	J		<0.0053	U	
		VMP-10-20-072619	7/26/2019	<0.0077	U		0.001	J		<0.007	U		<0.007	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-10-20-102519	10/25/2019	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-10-20-012420	1/24/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-20-042320	4/23/2020	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-10-20-073020	7/30/2020	<0.0068	U		0.0012	J		0.00085	J		<0.0062	U		0.028			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-20-103020	10/30/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-20-012721	1/27/2021	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00031	J		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	0.021	J		0.0032	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.031			0.0078	J	
		VMP-10-30-020515-DUP	2/5/2015	<0.03	U		0.0022	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.022			<0.015	U	
		VMP-10-30-043015	4/30/2015	0.0084	J		0.0014	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		0.0064	J	
		VMP-10-30-072815	7/28/2015	0.013	J		<0.0047	J	U	<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		0.003	J	
		VMP-10-30-103015	10/30/2015	0.026	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0057	J	
		VMP-10-30-012916-DUP	1/29/2016	0.011	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.004	J		0.0021	J	
		VMP-10-30-050216	5/2/2016	0.016	J		0.0012	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.0068	J		0.006	J	
		VMP-10-30-050216-DUP	5/2/2016	0.014	J		0.00098	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.0072	J		<0.016	U	
		VMP-10-30-072816	7/28/2016	0.015	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-10-30-110216	11/2/2016	0.0085	J		<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		<0.018	U	
		VMP-10-30-013017	1/30/2017	0.024	J		0.0024	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.016			0.0067	J	
		VMP-10-30-013017-Dup	1/30/2017	0.016	J		0.0026	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.011	J		0.0042	J	
		VMP-10-30-022717	2/27/2017	0.014	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0042	J	
		VMP-10-30-042717	4/27/2017	<0.025	J	U	<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-10-30-042717-DUP	4/27/2017	<0.025	J	U	<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-10-30-103017	10/30/2017	<0.026	J	U	<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0045	J		0.0028	J	
		VMP-10-30-103017-DUP	10/30/2017	<0.025	J	U	<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		0.012			<0.012	U	
		VMP-10-30-013118	1/31/2018	0.0081	J		0.002	J		0.014			<0.012	U		<0.045	U		<0.0026	U		0.012			<0.014	U	
		VMP-10-30-013118-DUP	1/31/2018	0.009	J		0.0021	J		0.012			<0.011	U		<0.041	U		<0.0023	U		0.012			<0.012	U	
		VMP-10-30-043018	4/30/2018	0.06			<0.0041	U		0.13			<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0039	J	
		VMP-10-30-043018-DUP	4/30/2018	0.068			<0.0039	U		0.14			<0.013	U		<0.048	U		<0.0027	U		0.004	J		0.0032	J	
		VMP-10-30-072018	7/20/2018	0.23		J	<0.0041	U		0.1			<0.013	U		<0.05	U		<0.0028	U		0.0041	J		0.0072	J	
		VMP-10-30-072018-DUP	7/20/2018	0.027	J	J	<0.0042	U		0.11			<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0036	J	
		VMP-10-30-102618	10/26/2018	0.012	J		<0.0037	U		0.099			<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-10-30-102618-DUP	10/26/2018	0.031			0.0026	J		0.098			<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-10-30-020119	2/1/2019	0.011	J		<0.0037	U		0.041			<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0024	J	
		VMP-10-30-050219	5/2/2019	0.012	J		<0.0038	U		0.012			<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-10-30-050219-DUP	5/2/2019	0.018	J		<0.0038	U		0.012			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
	5 ft	VMP-11-5-020515	2/5/2015	0.0082	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-5-043015	4/30/2015	0.0099	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		0.0069	J	
		VMP-11-5-072815	7/28/2015	0.019	J		0.018			<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0099	J		0.0081	J	
		VMP-11-5-103015	10/30/2015	0.016	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0032	J	
		VMP-11-5-012916	1/29/2016	0.013	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0034	J	
		VMP-11-5-050216	5/2/2016	0.013	J		0.001	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0051	J		<0.014	U	
		VMP-11-5-080116	8/1/2016	0.086			<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		0.015	J	
		VMP-11-5-110116	11/1/2016	0.027	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		0.0049	J	
		VMP-11-5-013017	1/30/2017	0.032			<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0066	J	
		VMP-11-5-052217	5/22/2017	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0044	J	
		VMP-11-5-072617	7/26/2017	0.014	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0035	J	
		VMP-11-5-110317	11/3/2017	0.015	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0045	J	
		VMP-11-5-012918	1/29/2018	0.0079	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-11-5-050118	5/1/2018	0.032			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-5-072618	7/26/2018	0.073			0.0074			<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.008	J	
		VMP-11-5-103018	10/30/2018	0.013	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-5-020419	2/4/2019	0.035			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0036	J	
		VMP-11-5-043019	4/30/2019	0.0069	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-5-073119	7/31/2019	0.02	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-5-102519	10/25/2019	0.0058	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-5-012920	1/29/2020	0.0099	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-11-5-042720	4/27/2020	0.057			0.26			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0048	J		0.006	J	
		VMP-11-5-102820	10/28/2020	<0.029	J	U	0.0004	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-5-012721	1/27/2021	0.0075	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0086	J		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U	UJ	<0.0069	U	
		VMP-10-30-020515-DUP	2/5/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U	UJ	<0.0066	U	
		VMP-10-30-043015	4/30/2015	<0.016	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-10-30-072815	7/28/2015	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-10-30-103015	10/30/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-10-30-050216	5/2/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-10-30-050216-DUP	5/2/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-10-30-072816	7/28/2016	<0.019	U		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-10-30-110216	11/2/2016	<0.019	U		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.0081	U	
		VMP-10-30-013017	1/30/2017	0.0012	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-10-30-013017-Dup	1/30/2017	0.0013	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-10-30-022717	2/27/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-10-30-042717	4/27/2017	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-10-30-042717-DUP	4/27/2017	0.0016	J		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-10-30-103017	10/30/2017	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		<0.0052	U		<0.022	U		<0.0056	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-10-30-013118	1/31/2018	<0.014	U		<0.0074	U		<0.0054	U		0.0024	J		<0.012	U		0.14			<0.024	U		<0.006	U	
		VMP-10-30-013118-DUP	1/31/2018	<0.013	U		<0.0066	U		<0.0048	U		0.0024	J		<0.011	U		0.13			<0.022	U		<0.0055	U	
		VMP-10-30-043018	4/30/2018	<0.016	U		0.0079	J		<0.0059	U		0.0093	J		<0.014	U		1.6			<0.027	U		<0.0067	U	
		VMP-10-30-043018-DUP	4/30/2018	<0.015	U		0.008			<0.0057	U		0.0093	J		<0.013	U		1.6			<0.026	U		<0.0064	U	
		VMP-10-30-072018	7/20/2018	<0.016	U		0.0014	J		<0.0059	U		0.0039	J		<0.014	U		1.1			0.033			<0.0066	U	
		VMP-10-30-072018-DUP	7/20/2018	<0.016	U		0.0016	J		<0.006	U		0.004	J		<0.014	U		1.2			<0.027	U		<0.0068	U	
		VMP-10-30-102618	10/26/2018	<0.014	U		<0.0074	U		<0.0054	U		0.0028	J		<0.012	U		0.55			<0.024	U		<0.006	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.014	U		<0.0072	U		<0.0053	U		0.0028	J		<0.012	U		0.52			<0.024	U		<0.0059	U	
		VMP-10-30-020119	2/1/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		0.14			<0.024	U		<0.006	U	
		VMP-10-30-050219	5/2/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		0.041			<0.025	U		<0.0062	U	
		VMP-10-30-050219-DUP	5/2/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.04			<0.024	U		<0.0061	U	
	5 ft	VMP-11-5-020515	2/5/2015	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0064	U	
		VMP-11-5-043015	4/30/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-11-5-072815	7/28/2015	0.039			<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-11-5-103015	10/30/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-11-5-012916	1/29/2016	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-11-5-050216	5/2/2016	0.0013	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-11-5-080116	8/1/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-11-5-110116	11/1/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-11-5-013017	1/30/2017	0.0046	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-11-5-052217	5/22/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-11-5-072617	7/26/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-11-5-110317	11/3/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-11-5-012918	1/29/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		0.012	J		<0.0057	U	
		VMP-11-5-050118	5/1/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-11-5-072618	7/26/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-11-5-103018	10/30/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-11-5-020419	2/4/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-11-5-043019	4/30/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-11-5-073119	7/31/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-11-5-102519	10/25/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-11-5-012920	1/29/2020	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U	UJ	<0.0073	U	
		VMP-11-5-042720	4/27/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.00075	J		<0.027	U		<0.0067	U	
		VMP-11-5-102820	10/28/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-11-5-012721	1/27/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	0.0026	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0025	J		<0.0054	U		<0.0054	U	
		VMP-10-30-020515-DUP	2/5/2015	0.0019	J		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0031	J		<0.0052	U		<0.0052	U	
		VMP-10-30-043015	4/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0021	J		<0.0054	U		<0.0054	U	
		VMP-10-30-072815	7/28/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		0.0027	J		<0.0059	U		<0.0059	U	
		VMP-10-30-103015	10/30/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0031	J		<0.0052	U		<0.0052	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0028	J		<0.0051	U		<0.0051	U	
		VMP-10-30-050216	5/2/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0028	J		<0.0054	U		<0.0054	U	
		VMP-10-30-050216-DUP	5/2/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0025	J		<0.0054	U		<0.0054	U	
		VMP-10-30-072816	7/28/2016	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		0.003	J		<0.0061	U		<0.0061	U	
		VMP-10-30-110216	11/2/2016	<0.0054	U		<0.012	U		<0.0094	U		<0.0094	U		<0.0094	U		0.0024	J		<0.0063	U		<0.0063	U	
		VMP-10-30-013017	1/30/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-10-30-013017-Dup	1/30/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0025	J		<0.0049	U		<0.0049	U	
		VMP-10-30-022717	2/27/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0027	J		<0.0051	U		<0.0051	U	
		VMP-10-30-042717	4/27/2017	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0023	J		<0.0042	U		<0.0042	U	
		VMP-10-30-042717-DUP	4/27/2017	0.0022	J		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0024	J		<0.0043	U		<0.0043	U	
		VMP-10-30-103017	10/30/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0018	J		<0.0044	U		<0.0044	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0023	J		<0.0043	U		<0.0043	U	
		VMP-10-30-013118	1/31/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0031	J		<0.0047	U		<0.0047	U	
		VMP-10-30-013118-DUP	1/31/2018	0.00067	J		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0029	J		<0.0043	U		<0.0043	U	
		VMP-10-30-043018	4/30/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0052	U		<0.0052	U	
		VMP-10-30-043018-DUP	4/30/2018	0.001	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-10-30-072018	7/20/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0028	J		<0.0052	U		<0.0052	U	
		VMP-10-30-072018-DUP	7/20/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0029	J		<0.0053	U		<0.0053	U	
		VMP-10-30-102618	10/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0022	J		<0.0047	U		<0.0047	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0024	J		<0.0046	U		<0.0046	U	
		VMP-10-30-020119	2/1/2019	0.0028	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0026	J		<0.0047	U		<0.0047	U	
		VMP-10-30-050219	5/2/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U	
		VMP-10-30-050219-DUP	5/2/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0023	J		<0.0048	U		<0.0048	U	
	5 ft	VMP-11-5-020515	2/5/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0029	J		<0.005	U		<0.005	U	
		VMP-11-5-043015	4/30/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0026	J		<0.0056	U		<0.0056	U	
		VMP-11-5-072815	7/28/2015	0.0042	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0022	J		<0.0057	U		<0.0057	U	
		VMP-11-5-103015	10/30/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0047	J		<0.0052	U		<0.0052	U	
		VMP-11-5-012916	1/29/2016	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0024	J		<0.0056	U		<0.0056	U	
		VMP-11-5-050216	5/2/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0029	J		<0.0048	U		<0.0048	U	
		VMP-11-5-080116	8/1/2016	0.023			<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0032	J		<0.0057	U		<0.0057	U	
		VMP-11-5-110116	11/1/2016	0.0016	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0024	J		<0.0054	U		<0.0054	U	
		VMP-11-5-013017	1/30/2017	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-11-5-052217	5/22/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U	
		VMP-11-5-072617	7/26/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-11-5-110317	11/3/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-11-5-012918	1/29/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		0.003	J		<0.0045	U		<0.0045	U	
		VMP-11-5-050118	5/1/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-11-5-072618	7/26/2018	0.002	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0021	J		<0.0051	U		<0.0051	U	
		VMP-11-5-103018	10/30/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0028	J		<0.0047	U		<0.0047	U	
		VMP-11-5-020419	2/4/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0027	J		<0.0048	U		<0.0048	U	
		VMP-11-5-043019	4/30/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-11-5-073119	7/31/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-11-5-102519	10/25/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0021	J		<0.0048	U		<0.0048	U	
		VMP-11-5-012920	1/29/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-11-5-042720	4/27/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.002	J		<0.0052	U		<0.0052	U	
		VMP-11-5-102820	10/28/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0049	U		<0.0049	U	
		VMP-11-5-012721	1/27/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-30-020515-DUP	2/5/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-30-043015	4/30/2015	<0.0053	U		0.0019	J		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-30-072815	7/28/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-10-30-103015	10/30/2015	<0.0051	U		<0.0051	U		<0.0051	U		0.0046	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.005	U		<0.005	U		<0.005	U		0.0031	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-30-050216	5/2/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-30-050216-DUP	5/2/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-10-30-072816	7/28/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-10-30-110216	11/2/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.0071	U		<0.0071	U		<0.022	U	
		VMP-10-30-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		0.0018	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-10-30-013017-Dup	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-10-30-022717	2/27/2017	<0.005	U		<0.005	U		<0.005	U		0.0028	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-10-30-042717	4/27/2017	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-10-30-042717-DUP	4/27/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-10-30-103017	10/30/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-10-30-013118	1/31/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-10-30-013118-DUP	1/31/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-10-30-043018	4/30/2018	<0.0051	U		<0.0051	U		<0.0051	U		0.0034	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-30-043018-DUP	4/30/2018	<0.0049	U		<0.0049	U		<0.0049	U		0.0033	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-10-30-072018	7/20/2018	<0.0051	U		<0.0051	U		<0.0051	U		0.009	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-10-30-072018-DUP	7/20/2018	<0.0052	U		<0.0052	U		<0.0052	U		0.0052	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-10-30-102618	10/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		0.0033	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-10-30-020119	2/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-10-30-050219	5/2/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		0.0025	J	
		VMP-10-30-050219-DUP	5/2/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
	5 ft	VMP-11-5-020515	2/5/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-5-043015	4/30/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-11-5-072815	7/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		0.0035	J	
		VMP-11-5-103015	10/30/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	J	U	<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-11-5-012916	1/29/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-11-5-050216	5/2/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-5-080116	8/1/2016	<0.0056	U		<0.0056	U		<0.0056	U		0.0045	J		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-11-5-110116	11/1/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-11-5-013017	1/30/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-11-5-052217	5/22/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-5-072617	7/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-5-110317	11/3/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-5-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-11-5-050118	5/1/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-5-072618	7/26/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		0.018		
		VMP-11-5-103018	10/30/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-11-5-020419	2/4/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		0.0051	J	
		VMP-11-5-043019	4/30/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-5-073119	7/31/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-11-5-102519	10/25/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-5-012920	1/29/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-11-5-042720	4/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		0.016	J	
		VMP-11-5-102820	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-11-5-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	0.022			0.0032	J		0.0013	J		<0.01	U		<0.0093	U		0.0085			<0.057	U		0.021		J
		VMP-10-30-020515-DUP	2/5/2015	0.0077	J		0.0021	J		<0.0063	U		<0.0098	U		<0.009	U		0.0049	J		<0.055	U		0.012		J
		VMP-10-30-043015	4/30/2015	<0.01	U		0.0018	J		<0.0065	U		<0.01	U		<0.0093	U		0.0016	J		0.0037	J		0.0037	J	
		VMP-10-30-072815	7/28/2015	<0.011	J	U	<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-10-30-103015	10/30/2015	0.0054	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		0.0022	J		<0.054	U		0.0022	J	
		VMP-10-30-050216	5/2/2016	0.0064	J		0.0016	J		<0.0065	U		<0.01	U		<0.0093	U		0.0029	J		<0.057	U		0.006		
		VMP-10-30-050216-DUP	5/2/2016	0.0088	J		0.0014	J		<0.0065	U		<0.01	U		<0.0093	U		0.0026	J		<0.057	U		0.0057		
		VMP-10-30-072816	7/28/2016	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		0.0014	J	
		VMP-10-30-110216	11/2/2016	<0.012	J	U	<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-10-30-013017	1/30/2017	0.024			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		0.002	J		<0.051	U		0.0027	J	
		VMP-10-30-013017-Dup	1/30/2017	0.017			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		0.0023	J	
		VMP-10-30-022717	2/27/2017	<0.0095	J	U	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-10-30-042717	4/27/2017	0.0032	J		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-10-30-042717-DUP	4/27/2017	<0.008	U		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-10-30-103017	10/30/2017	0.017			<0.0047	U		0.0013	J		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.011		U	<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		0.0065			<0.045	U		0.007		
		VMP-10-30-013118	1/31/2018	0.022			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		0.0025	J		<0.05	U		0.0048		
		VMP-10-30-013118-DUP	1/31/2018	0.02			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		0.0022	J		<0.045	U		0.0047		
		VMP-10-30-043018	4/30/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-10-30-043018-DUP	4/30/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		0.0029	J		<0.053	U		0.0024	J	
		VMP-10-30-072018	7/20/2018	0.014			<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		0.0028	J		<0.055	U		0.0044	J	
		VMP-10-30-072018-DUP	7/20/2018	0.007	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-10-30-102618	10/26/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-10-30-020119	2/1/2019	0.0027	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-10-30-050219	5/2/2019	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-10-30-050219-DUP	5/2/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
	5 ft	VMP-11-5-020515	2/5/2015	0.014			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-5-043015	4/30/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		0.0016	J	
		VMP-11-5-072815	7/28/2015	0.016			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		0.0045	J		<0.06	U		0.0088		
		VMP-11-5-103015	10/30/2015	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		0.0017	J	
		VMP-11-5-012916	1/29/2016	0.0043	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-11-5-050216	5/2/2016	0.012			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		0.0016	J	
		VMP-11-5-080116	8/1/2016	0.046			0.0022	J		<0.007	U		<0.011	U		<0.0099	U		0.0059			<0.06	U		0.0023	J	
		VMP-11-5-110116	11/1/2016	0.026			0.014			0.0019	J		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		0.0017	J	
		VMP-11-5-013017	1/30/2017	0.0048	J		0.0011	J		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-11-5-052217	5/22/2017	0.011			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-5-072617	7/26/2017	0.006	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-11-5-110317	11/3/2017	0.025			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-5-012918	1/29/2018	0.02			<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-11-5-050118	5/1/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-11-5-072618	7/26/2018	0.024			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		0.0043	J		<0.054	U		<0.0044	U	
		VMP-11-5-103018	10/30/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-11-5-020419	2/4/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-5-043019	4/30/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-11-5-073119	7/31/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-11-5-102519	10/25/2019	<0.0089	U	UJ	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		0.0015	J	
		VMP-11-5-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-11-5-042720	4/27/2020	0.01			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		0.00063	J		<0.055	U		<0.0045	U	
		VMP-11-5-102820	10/28/2020	<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-5-012721	1/27/2021	<0.023	U	UJ	<0.0052	U		<0.0059	U		0.00088	J		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	<0.022	U		0.024			<0.0065	U		<0.0054	U		<0.0048	U					0.051		J	<0.0065	U	
		VMP-10-30-020515-DUP	2/5/2015	<0.021	U		0.014	J		<0.0063	U		<0.0053	U		<0.0046	U					0.016		J	<0.0063	U	
		VMP-10-30-043015	4/30/2015	0.0012	J		0.0038	J		<0.0065	U		0.0019	J		<0.0048	U					0.011	J		<0.0065	U	
		VMP-10-30-072815	7/28/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					<0.014	U		<0.0072	U	
		VMP-10-30-103015	10/30/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					0.0025	J		<0.0063	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					0.0082	J		<0.0062	U	
		VMP-10-30-050216	5/2/2016	0.0027	J		0.0072	J		<0.0065	J	U	<0.0054	U		<0.0048	U					0.0046	J		0.0013	J	
		VMP-10-30-050216-DUP	5/2/2016	<0.022	U		0.0059	J		<0.0065	J	U	<0.0054	U		<0.0048	U					0.0021	J		0.00098	J	
		VMP-10-30-072816	7/28/2016	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.022	U					0.006	J		<0.0074	U	
		VMP-10-30-110216	11/2/2016	<0.026	U		0.016	J		<0.0077	U		<0.0064	U		<0.022	U		<0.016	U		<0.015	U		<0.0077	U	
		VMP-10-30-013017	1/30/2017	0.0014	J		0.01	J		<0.0059	U		0.0025	J		<0.017	U					0.0042	J		<0.0059	U	
		VMP-10-30-013017-Dup	1/30/2017	<0.02	U		0.0091	J		<0.006	U		0.0024	J		<0.018	U					0.0029	J		<0.006	U	
		VMP-10-30-022717	2/27/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	J	U	<0.018	U					<0.012	U		<0.0062	U	
		VMP-10-30-042717	4/27/2017	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		0.0015	J	
		VMP-10-30-042717-DUP	4/27/2017	<0.017	U		0.002	J		<0.0052	U		<0.0043	U		<0.015	U					0.0019	J		0.0014	J	
		VMP-10-30-103017	10/30/2017	<0.018	U		0.0061	J		<0.0053	U		<0.0044	U		<0.016	U					<0.01	U		<0.0053	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.017	U		0.013			<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-10-30-013118	1/31/2018	<0.019	U		0.0094	J		<0.0058	U		<0.0048	U		<0.017	U					0.0024	J		<0.0058	U	
		VMP-10-30-013118-DUP	1/31/2018	<0.017	U		0.0083	J		<0.0052	U		<0.0043	U		<0.015	U					0.0027	J		<0.0052	U	
		VMP-10-30-043018	4/30/2018	<0.021	U		0.044			<0.0063	U		<0.0053	U		<0.019	U					0.01	J		<0.0063	U	
		VMP-10-30-043018-DUP	4/30/2018	<0.02	U		0.046			<0.0061	U		<0.005	U		<0.018	U					0.012			<0.0061	U	
		VMP-10-30-072018	7/20/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					0.0084	J		<0.0063	U	
		VMP-10-30-072018-DUP	7/20/2018	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					0.0022	J		<0.0064	U	
		VMP-10-30-102618	10/26/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.0046	J		<0.0056	U	
		VMP-10-30-020119	2/1/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					0.0027	J		<0.0057	U	
		VMP-10-30-050219	5/2/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-10-30-050219-DUP	5/2/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
	5 ft	VMP-11-5-020515	2/5/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					0.013			<0.006	U	
		VMP-11-5-043015	4/30/2015	0.00093	J		<0.016	U		<0.0068	U		<0.0056	J	U	<0.005	U					0.017			<0.0068	U	
		VMP-11-5-072815	7/28/2015	0.0036	J		0.015	J		<0.0069	U		<0.0057	U		<0.005	U					0.0045	J		<0.0069	U	
		VMP-11-5-103015	10/30/2015	0.001	J		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					0.0041	J		<0.0063	U	
		VMP-11-5-012916	1/29/2016	<0.022	U		0.0026	J		<0.0068	U		<0.0056	U		<0.005	U					0.0062	J		<0.0068	U	
		VMP-11-5-050216	5/2/2016	<0.02	U		0.0057	J		<0.0059	U		<0.0049	U		<0.0043	U					0.022			<0.0059	U	
		VMP-11-5-080116	8/1/2016	<0.023	U		0.068			<0.007	U		<0.0058	U		<0.02	U					0.035			<0.007	U	
		VMP-11-5-110116	11/1/2016	<0.022	U		<0.016	U		<0.0065	U		0.0018	J		<0.019	U		0.046			0.044			0.0019	J	
		VMP-11-5-013017	1/30/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-11-5-052217	5/22/2017	<0.02	U		0.0027	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-11-5-072617	7/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.002	J		<0.0061	U	
		VMP-11-5-110317	11/3/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.0069	J		<0.0058	U	
		VMP-11-5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-11-5-050118	5/1/2018	<0.02	U		0.0071	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-11-5-072618	7/26/2018	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U	UJ	<0.0062	U	
		VMP-11-5-103018	10/30/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-11-5-020419	2/4/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.0041	J		<0.0058	U	
		VMP-11-5-043019	4/30/2019	<0.019	U		0.002	J		0.0015	J		<0.0048	U		<0.017	U					<0.012	U		0.0041	J	
		VMP-11-5-073119	7/31/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.0066	J		<0.0062	U	
		VMP-11-5-102519	10/25/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-11-5-012920	1/29/2020	<0.023	U		<0.016	U	UJ	<0.0069	U		<0.0058	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-11-5-042720	4/27/2020	0.0012	J		0.0035	J		<0.0063	U		<0.0053	U		<0.019	U					0.0074	J		<0.0063	U	
		VMP-11-5-102820	10/28/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.012	J		<0.0059	U	
		VMP-11-5-012721	1/27/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.0045	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	<0.0057	U		<0.0091	U		<0.009	U		0.0067			0.0072			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-10-30-020515-DUP	2/5/2015	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		0.0036	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-30-043015	4/30/2015	<0.0057	U		0.0056	J		0.0055	J		<0.0039	U		0.0068			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-10-30-072815	7/28/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-10-30-103015	10/30/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-10-30-050216	5/2/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		0.0025	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-10-30-050216-DUP	5/2/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		0.0023	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-10-30-072816	7/28/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-10-30-110216	11/2/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		0.0041	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-10-30-013017	1/30/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0025	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-30-013017-Dup	1/30/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.0027	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-10-30-022717	2/27/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-10-30-042717	4/27/2017	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-10-30-042717-DUP	4/27/2017	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-10-30-103017	10/30/2017	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		0.00091	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		0.004			<0.031	U		<0.0058	U		<0.0058	U	
		VMP-10-30-013118	1/31/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		0.0017	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-10-30-013118-DUP	1/31/2018	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		0.0017	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-10-30-043018	4/30/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-30-043018-DUP	4/30/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-10-30-072018	7/20/2018	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		0.0021	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-10-30-072018-DUP	7/20/2018	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-10-30-102618	10/26/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-10-30-020119	2/1/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-10-30-050219	5/2/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-10-30-050219-DUP	5/2/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.0033	J		<0.035	U		<0.0064	U		<0.0064	U	
	5 ft	VMP-11-5-020515	2/5/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.001	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-11-5-043015	4/30/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-11-5-072815	7/28/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-11-5-103015	10/30/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-11-5-012916	1/29/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-11-5-050216	5/2/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0011	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-11-5-080116	8/1/2016	0.0027	J		<0.0097	U		<0.0096	U		0.0052			0.24			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-11-5-110116	11/1/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		0.0072			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-11-5-013017	1/30/2017	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-11-5-052217	5/22/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-11-5-072617	7/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.00071	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-11-5-110317	11/3/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-5-012918	1/29/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-11-5-050118	5/1/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-11-5-072618	7/26/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.032			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-11-5-103018	10/30/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-11-5-020419	2/4/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-5-043019	4/30/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-11-5-073119	7/31/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		0.0017	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-11-5-102519	10/25/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-5-012920	1/29/2020	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-11-5-042720	4/27/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		0.0048	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-11-5-102820	10/28/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-5-012721	1/27/2021	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-10-30-020515	2/5/2015	<0.0071	U		0.0015	J		<0.0065	J	U	<0.0065	U		0.03		J	<0.0034	U		0.0045	J		0.0016	J	
		VMP-10-30-020515-DUP	2/5/2015	<0.0069	U		0.0014	J		<0.0063	J	U	<0.0063	U		0.017		J	<0.0033	U		0.0026	J		<0.0056	U	
		VMP-10-30-043015	4/30/2015	0.011			<0.0075	U		<0.0065	U		<0.0065	U		0.0059	J		<0.0034	U		0.0035	J		<0.0058	U	
		VMP-10-30-072815	7/28/2015	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-10-30-103015	10/30/2015	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-30-012916-DUP	1/29/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-30-050216	5/2/2016	<0.0071	U		<0.0075	U		0.001	J		<0.0065	U		0.01			<0.0034	U		0.0027	J		<0.0058	U	
		VMP-10-30-050216-DUP	5/2/2016	<0.0071	U		0.0013	J		<0.0065	J	U	<0.0065	U		0.0091			<0.0034	U		0.0018	J		<0.0058	U	
		VMP-10-30-072816	7/28/2016	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		0.0012	J		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-10-30-110216	11/2/2016	<0.0084	U		<0.0088	U		<0.0077	U		<0.0077	U		0.013			<0.004	U		0.0014	J		<0.0068	U	
		VMP-10-30-013017	1/30/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.00055	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-10-30-013017-Dup	1/30/2017	<0.0066	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.00074	J		<0.0053	U	
		VMP-10-30-022717	2/27/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-10-30-042717	4/27/2017	<0.0056	U		0.0016	J		0.00086	J		<0.0051	U		0.0035	J		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-10-30-042717-DUP	4/27/2017	<0.0057	U		0.0012	J		0.00079	J		<0.0052	U		0.0042	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-10-30-103017	10/30/2017	<0.0058	U		0.0009	J		0.001	J		<0.0053	U		0.0017	J		<0.0027	U		0.0016	J		<0.0047	U	
		VMP-10-30-103017-DUP	10/30/2017	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-10-30-013118	1/31/2018	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		0.0098			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-10-30-013118-DUP	1/31/2018	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		0.012			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-10-30-043018	4/30/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-10-30-043018-DUP	4/30/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.001	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-10-30-072018	7/20/2018	<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		0.0056	J		<0.0033	U		0.00096	J		<0.0056	U	
		VMP-10-30-072018-DUP	7/20/2018	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.0044	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-10-30-102618	10/26/2018	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-10-30-102618-DUP	10/26/2018	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-10-30-020119	2/1/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-10-30-050219	5/2/2019	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-10-30-050219-DUP	5/2/2019	<0.0063	U		0.001	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0021	J		<0.0051	U	
	5 ft	VMP-11-5-020515	2/5/2015	<0.0066	U		0.0016	J		<0.006	U		<0.006	U		0.00073	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-11-5-043015	4/30/2015	<0.0074	J	U	<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-11-5-072815	7/28/2015	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		0.099			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-11-5-103015	10/30/2015	<0.0069	U		0.0021	J		<0.0063	U		<0.0063	U		0.0016	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-11-5-012916	1/29/2016	<0.0074	U		<0.0077	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-11-5-050216	5/2/2016	<0.0064	U		0.0017	J		<0.0059	U		<0.0059	U		0.0019	J		<0.0031	U		0.0008	J		<0.0052	U	
		VMP-11-5-080116	8/1/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0014	J		<0.0036	U		0.0045	J		0.0022	J	
		VMP-11-5-110116	11/1/2016	<0.0071	U		<0.0075	U		0.0054	J		<0.0065	U		0.0011	J		<0.0034	U		0.044			0.0092		
		VMP-11-5-013017	1/30/2017	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		0.0017	J		<0.0056	U	
		VMP-11-5-052217	5/22/2017	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		0.0053	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-11-5-072617	7/26/2017	<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-5-110317	11/3/2017	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-11-5-012918	1/29/2018	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-11-5-050118	5/1/2018	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		0.0018	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-5-072618	7/26/2018	<0.0067	U		<0.007	U		0.00097	J		<0.0062	U		0.0025	J		<0.0032	U		0.011			0.0028	J	
		VMP-11-5-103018	10/30/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0016	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-11-5-020419	2/4/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-11-5-043019	4/30/2019	<0.0063	U		0.0011	J		<0.0058	U		<0.0058	U		0.027			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-11-5-073119	7/31/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-11-5-102519	10/25/2019	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0013	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-11-5-012920	1/29/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-11-5-042720	4/27/2020	<0.0069	U		0.0011	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0011	J		<0.0056	U	
		VMP-11-5-102820	10/28/2020	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-5-012721	1/27/2021	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	0.013	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-8-043015	4/30/2015	0.01	J		0.0012	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		0.0037	J	
		VMP-11-8-072815	7/28/2015	0.022	J		0.0018	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		0.004	J	
		VMP-11-8-103015	10/30/2015	0.02	J		0.0012	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0063	J	
		VMP-11-8-012916	1/29/2016	0.016	J		0.00077	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-11-8-050616	5/6/2016	0.012	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-11-8-080116	8/1/2016	0.028	J		0.0016	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-11-8-110116	11/1/2016	0.025	J		0.001	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0052	J	
		VMP-11-8-013017	1/30/2017	0.013	J		0.002	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.012	J		0.0072	J	
		VMP-11-8-052217	5/22/2017	0.024	J		0.0034	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.0083	J		0.0074	J	
		VMP-11-8-072617	7/26/2017	0.0057	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-8-110317	11/3/2017	0.011	J		<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-11-8-012918	1/29/2018	<0.025	J	U	<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-11-8-050118	5/1/2018	<0.029	U		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-8-072618	7/26/2018	0.017	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-11-8-103018	10/30/2018	0.0081	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-8-020419	2/4/2019	0.028	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-8-043019	4/30/2019	0.011	J		0.0032	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-11-8-073119	7/31/2019	0.035			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0032	J	
		VMP-11-8-102519	10/25/2019	0.01	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-8-012920	1/29/2020	0.0074	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-11-8-042720	4/27/2020	0.013	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0018	J	
		VMP-11-8-072720	7/27/2020	0.019	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0025	J	
		VMP-11-8-072720-DUP	7/27/2020	0.013	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-8-102820	10/28/2020	0.019	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-8-012721	1/27/2021	0.0077	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.0056	J		<0.014	U	
	29 ft	VMP-11-29-020515	2/5/2015	0.0078	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-11-29-020515-DUP	2/5/2015	0.0081	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-29-043015	4/30/2015	0.0079	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.003	J	
		VMP-11-29-072815	7/28/2015	0.04			<0.0043	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.011	J	
		VMP-11-29-110515	11/5/2015	0.26			<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		0.0074	J	
		VMP-11-29-012916	1/29/2016	0.014	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.0025	J	
		VMP-11-29-050216	5/2/2016	0.016	J		0.0013	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.004	J	
		VMP-11-29-080216	8/2/2016	0.031	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.01	J	
		VMP-11-29-110116	11/1/2016	0.018	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-11-29-013017	1/30/2017	0.0051	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-11-29-052217	5/22/2017	<0.028	J	U	0.0013	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0036	J	
		VMP-11-29-052217-DUP	5/22/2017	0.025	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0083	J	
		VMP-11-29-072617	7/26/2017	0.0085	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-29-110317	11/3/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-11-29-012918	1/29/2018	<0.025	J	U	<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-11-29-050118	5/1/2018	0.0075	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-29-072618	7/26/2018	0.042			<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0052	J	
		VMP-11-29-103018	10/30/2018	0.03			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0027	J	
		VMP-11-29-020419	2/4/2019	0.0067	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-29-043019	4/30/2019	0.016	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-29-073119	7/31/2019	0.021	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-29-102519	10/25/2019	0.0072	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-11-29-012920	1/29/2020	0.0072	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-11-29-042720	4/27/2020	0.021	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0016	J		0.0021	J	
		VMP-11-29-042720-DUP	4/27/2020	0.018	J		0.03			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0024	J	
		VMP-11-29-072720	7/27/2020	0.023	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0083	J		0.0031	J	
		VMP-11-29-102820	10/28/2020	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-29-012721	1/27/2021	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0013	J	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U	UJ	<0.0062	U	
		VMP-11-8-043015	4/30/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-11-8-072815	7/28/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-11-8-103015	10/30/2015	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-11-8-012916	1/29/2016	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-11-8-050616	5/6/2016	0.0035	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U	UJ	<0.0074	U	
		VMP-11-8-080116	8/1/2016	0.0046	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-11-8-110116	11/1/2016	0.019			<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-11-8-013017	1/30/2017	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-11-8-052217	5/22/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-11-8-072617	7/26/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		0.00063	J		<0.025	U		<0.0063	U	
		VMP-11-8-110317	11/3/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-11-8-012918	1/29/2018	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-11-8-050118	5/1/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-11-8-072618	7/26/2018	0.0028	J		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-11-8-103018	10/30/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-11-8-020419	2/4/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-11-8-043019	4/30/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-11-8-073119	7/31/2019	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-11-8-102519	10/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-11-8-012920	1/29/2020	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U	UJ	<0.0069	U	
		VMP-11-8-042720	4/27/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-11-8-072720	7/27/2020	0.0021	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0024	J		<0.026	U		<0.0065	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0022	J		<0.025	U		<0.0063	U	
		VMP-11-8-102820	10/28/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-11-8-012721	1/27/2021	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
	29 ft	VMP-11-29-020515	2/5/2015	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		0.0012	J		<0.029	U	UJ	<0.0073	U	
		VMP-11-29-020515-DUP	2/5/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.00097	J		<0.027	U	UJ	<0.0067	U	
		VMP-11-29-043015	4/30/2015	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-11-29-072815	7/28/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		0.002	J		<0.028	U		<0.007	U	
		VMP-11-29-110515	11/5/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		0.0027	J		0.0026	J		<0.0073	U	
		VMP-11-29-012916	1/29/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		0.0022	J		<0.03	U		<0.0074	U	
		VMP-11-29-050216	5/2/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		0.0013	J		<0.029	U		<0.0072	U	
		VMP-11-29-080216	8/2/2016	0.0054	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-11-29-110116	11/1/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-11-29-013017	1/30/2017	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		0.0018	J		<0.03	U		<0.0074	U	
		VMP-11-29-052217	5/22/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0015	J		<0.024	U		<0.0061	U	
		VMP-11-29-052217-DUP	5/22/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		0.0012	J		<0.025	U		<0.0062	U	
		VMP-11-29-072617	7/26/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		0.00068	J		<0.025	U		<0.0062	U	
		VMP-11-29-110317	11/3/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-11-29-012918	1/29/2018	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.0011	J		<0.022	U		<0.0055	U	
		VMP-11-29-050118	5/1/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.0014	J		<0.027	U		<0.0067	U	
		VMP-11-29-072618	7/26/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0018	J		<0.023	U		<0.0058	U	
		VMP-11-29-103018	10/30/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-11-29-020419	2/4/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.0034	J		<0.026	U		<0.0065	U	
		VMP-11-29-043019	4/30/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-11-29-073119	7/31/2019	0.004	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-11-29-102519	10/25/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		0.001	J		<0.028	U		<0.007	U	
		VMP-11-29-012920	1/29/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		0.0039	J		<0.029	U	UJ	<0.0072	U	
		VMP-11-29-042720	4/27/2020	<0.016	U		<0.0083	U		0.00062	J		<0.011	U		<0.014	U		0.00092	J		<0.027	U		<0.0068	U	
		VMP-11-29-042720-DUP	4/27/2020	0.0023	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0012	J		<0.025	U		<0.0063	U	
		VMP-11-29-072720	7/27/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.0046	J		<0.026	U		<0.0064	U	
		VMP-11-29-102820	10/28/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-11-29-012721	1/27/2021	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0034	J		<0.0048	U		<0.0048	U	
		VMP-11-8-043015	4/30/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0021	J		<0.0056	U		<0.0056	U	
		VMP-11-8-072815	7/28/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.002	J		<0.0057	U		<0.0057	U	
		VMP-11-8-103015	10/30/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0047	J		<0.005	U		<0.005	U	
		VMP-11-8-012916	1/29/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0021	J		<0.0053	U		<0.0053	U	
		VMP-11-8-050616	5/6/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0021	J		<0.0058	U		<0.0058	U	
		VMP-11-8-080116	8/1/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0031	J		<0.0056	U		<0.0056	U	
		VMP-11-8-110116	11/1/2016	0.001	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0026	J		<0.0052	U		<0.0052	U	
		VMP-11-8-013017	1/30/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-11-8-052217	5/22/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0021	J		<0.0046	U		<0.0046	U	
		VMP-11-8-072617	7/26/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.002	J		<0.005	U		<0.005	U	
		VMP-11-8-110317	11/3/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0027	J		<0.0046	U		<0.0046	U	
		VMP-11-8-012918	1/29/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0033	J		<0.0043	U		<0.0043	U	
		VMP-11-8-050118	5/1/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0023	J		<0.005	U		<0.005	U	
		VMP-11-8-072618	7/26/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0013	J		<0.0044	U		<0.0044	U	
		VMP-11-8-103018	10/30/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-11-8-020419	2/4/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-11-8-043019	4/30/2019	0.0029	J		<0.0088	U		<0.0069	U		0.0011	J		<0.0069	U		0.0026	J		<0.0046	U		<0.0046	U	
		VMP-11-8-073119	7/31/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		<0.0058	U		<0.0047	U		<0.0047	U	
		VMP-11-8-102519	10/25/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0019	J		<0.0051	U		<0.0051	U	
		VMP-11-8-012920	1/29/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-11-8-042720	4/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	J	U	<0.0073	J	U	0.0024	J		<0.0049	U		<0.0049	U	
		VMP-11-8-072720	7/27/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	J	U	0.0022	J		<0.0049	U		<0.0049	U	
		VMP-11-8-102820	10/28/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0029	J		<0.0049	U		<0.0049	U	
		VMP-11-8-012721	1/27/2021	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0027	J		<0.0046	U		<0.0046	U	
	29 ft	VMP-11-29-020515	2/5/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0033	J		<0.0057	U		<0.0057	U	
		VMP-11-29-020515-DUP	2/5/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0037	J		<0.0052	U		<0.0052	U	
		VMP-11-29-043015	4/30/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0021	J		<0.005	U		<0.005	U	
		VMP-11-29-072815	7/28/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0022	J		<0.0055	U		<0.0055	U	
		VMP-11-29-110515	11/5/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0036	J		<0.0057	U		<0.0057	U	
		VMP-11-29-012916	1/29/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0016	J		<0.0058	U		<0.0058	U	
		VMP-11-29-050216	5/2/2016	0.0016	J		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0023	J		<0.0056	U		<0.0056	U	
		VMP-11-29-080216	8/2/2016	0.00085	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0038	J		<0.0055	U		<0.0055	U	
		VMP-11-29-110116	11/1/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		0.0025	J		<0.006	U		<0.006	U	
		VMP-11-29-013017	1/30/2017	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0022	J		<0.0058	U		<0.0058	U	
		VMP-11-29-052217	5/22/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.002	J		<0.0048	U		<0.0048	U	
		VMP-11-29-052217-DUP	5/22/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0019	J		<0.0048	U		<0.0048	U	
		VMP-11-29-072617	7/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0019	J		<0.0048	U		<0.0048	U	
		VMP-11-29-110317	11/3/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0027	J		<0.0045	U		<0.0045	U	
		VMP-11-29-012918	1/29/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0031	J		<0.0043	U		<0.0043	U	
		VMP-11-29-050118	5/1/2018	0.0016	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.002	J		<0.0052	U		<0.0052	U	
		VMP-11-29-072618	7/26/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0023	J		<0.0046	U		<0.0046	U	
		VMP-11-29-103018	10/30/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U	
		VMP-11-29-020419	2/4/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0027	J		<0.0051	U		<0.0051	U	
		VMP-11-29-043019	4/30/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-11-29-073119	7/31/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0023	J		<0.0047	U		<0.0047	U	
		VMP-11-29-102519	10/25/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0021	J		<0.0055	U		<0.0055	U	
		VMP-11-29-012920	1/29/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-11-29-042720	4/27/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	J	U	<0.0079	J	U	0.0023	J		<0.0053	U		<0.0053	U	
		VMP-11-29-042720-DUP	4/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0021	J		<0.0049	U		<0.0049	U	
		VMP-11-29-072720	7/27/2020	0.0019	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U	
		VMP-11-29-102820	10/28/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0032	J		<0.005	U		<0.005	U	
		VMP-11-29-012721	1/27/2021	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0025	J		<0.0047	U		<0.0047	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-8-043015	4/30/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-11-8-072815	7/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-11-8-103015	10/30/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	J	U	<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-8-012916	1/29/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-11-8-050616	5/6/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-11-8-080116	8/1/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-11-8-110116	11/1/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-11-8-013017	1/30/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-11-8-052217	5/22/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-11-8-072617	7/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		0.0016	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-8-110317	11/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-11-8-012918	1/29/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-11-8-050118	5/1/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-8-072618	7/26/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-11-8-103018	10/30/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-8-020419	2/4/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-11-8-043019	4/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-11-8-073119	7/31/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-11-8-102519	10/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-11-8-012920	1/29/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-11-8-042720	4/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		0.0011	J	
		VMP-11-8-072720	7/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-11-8-102820	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-11-8-012721	1/27/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
	29 ft	VMP-11-29-020515	2/5/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-11-29-020515-DUP	2/5/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-11-29-043015	4/30/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-29-072815	7/28/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-11-29-110515	11/5/2015	<0.0056	U		<0.0056	U		<0.0056	U		0.0053	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-11-29-012916	1/29/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-11-29-050216	5/2/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-11-29-080216	8/2/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-11-29-110116	11/1/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-11-29-013017	1/30/2017	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-11-29-052217	5/22/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-29-052217-DUP	5/22/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-29-072617	7/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-29-110317	11/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-11-29-012918	1/29/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-11-29-050118	5/1/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-11-29-072618	7/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-11-29-103018	10/30/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-29-020419	2/4/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-11-29-043019	4/30/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-29-073119	7/31/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-11-29-102519	10/25/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-11-29-012920	1/29/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-11-29-042720	4/27/2020	<0.0052	U		0.00094	J		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		0.0014	J	
		VMP-11-29-042720-DUP	4/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		0.0033	J	
		VMP-11-29-072720	7/27/2020	<0.0049	U		0.0058			<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		0.0013	J	
		VMP-11-29-102820	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-29-012721	1/27/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	0.011			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-8-043015	4/30/2015	<0.01	U		0.0019	J		<0.0068	U		<0.01	U		<0.0096	U		0.0018	J		<0.059	U		0.0027	J	
		VMP-11-8-072815	7/28/2015	0.013			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		0.0013	J		<0.06	U		<0.005	U	
		VMP-11-8-103015	10/30/2015	0.014			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		0.0018	J		<0.052	U		0.0023	J	
		VMP-11-8-012916	1/29/2016	0.0082	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-11-8-050616	5/6/2016	<0.011	U		0.0015	J		0.0096			<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-11-8-080116	8/1/2016	0.0077	J		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		0.0012	J	
		VMP-11-8-110116	11/1/2016	0.018			0.0059			0.0053	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		0.0013	J	
		VMP-11-8-013017	1/30/2017	0.0067	J		0.018			0.0016	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-11-8-052217	5/22/2017	0.087			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		0.0012	J	
		VMP-11-8-072617	7/26/2017	0.0046	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		0.0005	J	
		VMP-11-8-110317	11/3/2017	0.055			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-11-8-012918	1/29/2018	0.012			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-11-8-050118	5/1/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-11-8-072618	7/26/2018	0.017			0.0033	J		<0.0054	U		<0.0084	U		<0.0076	U		0.0046			<0.047	U		0.0056		
		VMP-11-8-103018	10/30/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-8-020419	2/4/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-8-043019	4/30/2019	<0.0087	U		0.0075			<0.0056	U		<0.0088	U		<0.008	U		0.023			<0.049	U		0.024		
		VMP-11-8-073119	7/31/2019	<0.0088	U	UJ	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-11-8-102519	10/25/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-11-8-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-11-8-042720	4/27/2020	0.0041	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-8-072720	7/27/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-8-102820	10/28/2020	<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-8-012721	1/27/2021	<0.022	U	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
	29 ft	VMP-11-29-020515	2/5/2015	0.015			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-11-29-020515-DUP	2/5/2015	0.011			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-11-29-043015	4/30/2015	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-11-29-072815	7/28/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-11-29-110515	11/5/2015	0.0056	J		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-11-29-012916	1/29/2016	0.0046	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-11-29-050216	5/2/2016	0.0049	J		0.0064			0.0013	J		<0.011	U		<0.0097	U		0.012			<0.059	U		0.011		
		VMP-11-29-080216	8/2/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		0.0041	J		<0.058	U		0.0018	J	
		VMP-11-29-110116	11/1/2016	0.0055	J		0.0044	J		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-11-29-013017	1/30/2017	0.0051	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-11-29-052217	5/22/2017	0.029			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-11-29-052217-DUP	5/22/2017	0.011			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-29-072617	7/26/2017	0.0045	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-29-110317	11/3/2017	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-11-29-012918	1/29/2018	0.004	J		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-11-29-050118	5/1/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-11-29-072618	7/26/2018	0.021			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-11-29-103018	10/30/2018	0.0045	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.0015	J		<0.051	U		0.0021	J	
		VMP-11-29-020419	2/4/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-11-29-043019	4/30/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.00087	J		<0.051	U		<0.0042	U	
		VMP-11-29-073119	7/31/2019	<0.0087	U	UJ	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-11-29-102519	10/25/2019	<0.01	U	UJ	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-11-29-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-11-29-042720	4/27/2020	0.0045	J		0.00066	J		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		0.0013	J	
		VMP-11-29-042720-DUP	4/27/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-29-072720	7/27/2020	0.034			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-11-29-102820	10/28/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-11-29-012721	1/27/2021	0.0054	J	J	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.0043	U					0.0083	J		<0.0059	U	
		VMP-11-8-043015	4/30/2015	<0.023	U		0.0017	J		<0.0068	U		<0.0056	J	U	<0.005	U					0.013	J		<0.0068	U	
		VMP-11-8-072815	7/28/2015	<0.023	U		<0.017	U		<0.0069	J	U	<0.0058	U		<0.0051	U					0.0054	J		<0.0069	U	
		VMP-11-8-103015	10/30/2015	<0.02	U		0.0024	J		<0.006	U		<0.005	U		<0.0044	U					0.0051	J		<0.006	U	
		VMP-11-8-012916	1/29/2016	<0.022	U		<0.016	U		0.0011	J		<0.0054	U		<0.0048	U					0.0079	J		0.0032	J	
		VMP-11-8-050616	5/6/2016	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.0052	U					0.027			0.0027	J	
		VMP-11-8-080116	8/1/2016	<0.023	U		0.0037	J		<0.0068	U		<0.0057	U		<0.02	U					0.029			<0.0068	U	
		VMP-11-8-110116	11/1/2016	<0.021	U		0.0054	J		0.0041	J		<0.0053	U		<0.019	U		0.067			0.18			0.011		
		VMP-11-8-013017	1/30/2017	0.0044	J		0.0074	J		0.0016	J		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-11-8-052217	5/22/2017	<0.019	U		0.0092	J		<0.0056	U		<0.0047	U		<0.016	U					0.025			<0.0056	U	
		VMP-11-8-072617	7/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0027	J		<0.006	U	
		VMP-11-8-110317	11/3/2017	<0.019	U		0.0027	J		<0.0056	U		<0.0047	U		<0.016	U					0.0099	J		0.00094	J	
		VMP-11-8-012918	1/29/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-11-8-050118	5/1/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-11-8-072618	7/26/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U	UJ	<0.0054	U	
		VMP-11-8-103018	10/30/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-11-8-020419	2/4/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0044	J		<0.0059	U	
		VMP-11-8-043019	4/30/2019	<0.019	U		0.0055	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-11-8-073119	7/31/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.0084	J		<0.0058	U	
		VMP-11-8-102519	10/25/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-11-8-012920	1/29/2020	<0.022	U		<0.016	U	UJ	<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-11-8-042720	4/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.011	J		<0.0059	U	
		VMP-11-8-072720	7/27/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.0071	J		<0.0062	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	J	U	<0.0059	U	
		VMP-11-8-102820	10/28/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.026			<0.0059	U	
		VMP-11-8-012721	1/27/2021	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.005	J		<0.0056	U	
	29 ft	VMP-11-29-020515	2/5/2015	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					0.032			<0.0069	U	
		VMP-11-29-020515-DUP	2/5/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					0.033			<0.0063	U	
		VMP-11-29-043015	4/30/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	J	U	<0.0045	U					0.012			<0.0061	U	
		VMP-11-29-072815	7/28/2015	0.0025	J		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					0.0072	J		<0.0067	U	
		VMP-11-29-110515	11/5/2015	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					0.0052	J		<0.007	U	
		VMP-11-29-012916	1/29/2016	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.0052	U					0.0037	J		<0.007	U	
		VMP-11-29-050216	5/2/2016	0.002	J		0.0049	J		<0.0068	U		<0.0057	U		<0.005	U					0.0031	J		<0.0068	U	
		VMP-11-29-080216	8/2/2016	<0.022	U		0.0044	J		<0.0067	U		<0.0056	U		<0.02	U					0.0056	J		<0.0067	U	
		VMP-11-29-110116	11/1/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U		<0.015	U		0.021			<0.0072	U	
		VMP-11-29-013017	1/30/2017	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.021	U					<0.014	U		<0.007	U	
		VMP-11-29-052217	5/22/2017	<0.019	U		0.0055	J		<0.0058	U		<0.0048	U		<0.017	U					0.0089	J		<0.0058	U	
		VMP-11-29-052217-DUP	5/22/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-11-29-072617	7/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.0029	J		<0.0059	U	
		VMP-11-29-110317	11/3/2017	<0.018	U		0.0036	J		<0.0055	U		<0.0046	U		<0.016	U					0.0018	J		<0.0055	U	
		VMP-11-29-012918	1/29/2018	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-11-29-050118	5/1/2018	<0.021	U		0.0085	J		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-11-29-072618	7/26/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U	UJ	<0.0056	U	
		VMP-11-29-103018	10/30/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.0046	J		<0.0058	U	
		VMP-11-29-020419	2/4/2019	<0.021	U		0.0071	J		0.0038	J		<0.0052	U		<0.018	U					<0.012	U		0.014		
		VMP-11-29-043019	4/30/2019	<0.019	U		<0.014	U		0.00096	J		<0.0049	U		<0.017	U					<0.012	U		0.0026	J	
		VMP-11-29-073119	7/31/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					0.0048	J		<0.0057	U	
		VMP-11-29-102519	10/25/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-11-29-012920	1/29/2020	<0.023	U		<0.016	U	UJ	<0.0069	U		<0.0057	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-11-29-042720	4/27/2020	<0.022	U		0.0018	J		<0.0065	U		<0.0054	U		<0.019	U					0.0046	J		<0.0065	U	
		VMP-11-29-042720-DUP	4/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0032	J		<0.0059	U	
		VMP-11-29-072720	7/27/2020	<0.02	U		0.0034	J		<0.0061	U		<0.0051	U		<0.018	U					0.021			<0.0061	U	
		VMP-11-29-102820	10/28/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.009	J		<0.006	U	
		VMP-11-29-012721	1/27/2021	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.0089	J		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0014	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-11-8-043015	4/30/2015	<0.0059	U		<0.0095	U		0.0037	J		<0.0041	U		0.0074			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-11-8-072815	7/28/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		0.0023	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-11-8-103015	10/30/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.002	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-11-8-012916	1/29/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-11-8-050616	5/6/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		0.00063	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-11-8-080116	8/1/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		0.0021	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-11-8-110116	11/1/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		0.013			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-11-8-013017	1/30/2017	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		0.0097			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-11-8-052217	5/22/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.0015	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-11-8-072617	7/26/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-11-8-110317	11/3/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.001	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-11-8-012918	1/29/2018	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		0.00058	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-11-8-050118	5/1/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-11-8-072618	7/26/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		0.012			<0.032	U		<0.006	U		<0.006	U	
		VMP-11-8-103018	10/30/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-8-020419	2/4/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-8-043019	4/30/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.039			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-11-8-073119	7/31/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-11-8-102519	10/25/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-11-8-012920	1/29/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-11-8-042720	4/27/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		0.0013	J		<0.0066	U		<0.0066	U	
		VMP-11-8-072720	7/27/2020	<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0082	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-8-102820	10/28/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-8-012721	1/27/2021	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
	29 ft	VMP-11-29-020515	2/5/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		0.0013	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-11-29-020515-DUP	2/5/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		0.0012	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-11-29-043015	4/30/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-11-29-072815	7/28/2015	0.00074	J		<0.0093	U		<0.0092	U		<0.004	U		0.0029	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-11-29-110515	11/5/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-11-29-012916	1/29/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-11-29-050216	5/2/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.021			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-11-29-080216	8/2/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-11-29-110116	11/1/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		0.0025	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-11-29-013017	1/30/2017	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-11-29-052217	5/22/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.00095	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-29-052217-DUP	5/22/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-29-072617	7/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00033	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-11-29-110317	11/3/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-11-29-012918	1/29/2018	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		0.00063	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-11-29-050118	5/1/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-11-29-072618	7/26/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-11-29-103018	10/30/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.002	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-29-020419	2/4/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-11-29-043019	4/30/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.002	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-29-073119	7/31/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-11-29-102519	10/25/2019	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-11-29-012920	1/29/2020	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-11-29-042720	4/27/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		0.0044	J		0.0013	J		<0.0072	U		<0.0072	U	
		VMP-11-29-042720-DUP	4/27/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0022	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-29-072720	7/27/2020	<0.0084	U		<0.0085	U		0.0038	J		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-11-29-102820	10/28/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.00037	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-11-29-012721	1/27/2021	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-11	8 ft	VMP-11-8-020515	2/5/2015	<0.0064	U		0.0013	J		<0.0059	J	U	<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-8-043015	4/30/2015	<0.0074	J	U	<0.0078	U		<0.0068	U		<0.0068	U		0.0068			<0.0035	U		0.0038	J		<0.006	U	
		VMP-11-8-072815	7/28/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		0.0052	J		0.00086	J	
		VMP-11-8-103015	10/30/2015	<0.0066	U		0.0024	J		<0.006	U		<0.006	U		0.0014	J		<0.0031	U		0.0016	J		<0.0053	U	
		VMP-11-8-012916	1/29/2016	<0.0071	U		<0.0074	U		0.0026	J		<0.0065	U		0.0032	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-11-8-050616	5/6/2016	<0.0077	U		<0.0081	U		0.018			0.004	J		<0.0067	U		<0.0037	U		0.0059	J		0.0033	J	
		VMP-11-8-080116	8/1/2016	<0.0075	U		0.0013	J		<0.0068	U		<0.0068	U		0.0015	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-11-8-110116	11/1/2016	<0.007	U		<0.0073	U		0.011			<0.0064	U		0.0069			<0.0033	U		0.02			0.006		
		VMP-11-8-013017	1/30/2017	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.052			0.009		
		VMP-11-8-052217	5/22/2017	<0.0062	U		0.001	J		<0.0056	J	U	<0.0056	U		0.0016	J		<0.0029	U		0.0026	J		<0.005	U	
		VMP-11-8-072617	7/26/2017	<0.0066	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-11-8-110317	11/3/2017	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		0.0085			<0.0029	U		<0.005	U		<0.005	U	
		VMP-11-8-012918	1/29/2018	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-11-8-050118	5/1/2018	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		0.0014	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-8-072618	7/26/2018	<0.0059	U		<0.0062	U		0.0014	J		<0.0054	U		0.0093			<0.0028	U		0.009			0.0026	J	
		VMP-11-8-103018	10/30/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-11-8-020419	2/4/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-8-043019	4/30/2019	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		0.058			<0.0029	U		0.024			0.008		
		VMP-11-8-073119	7/31/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-11-8-102519	10/25/2019	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-11-8-012920	1/29/2020	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-11-8-042720	4/27/2020	<0.0065	U		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-8-072720	7/27/2020	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-11-8-072720-DUP	7/27/2020	<0.0065	U		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-8-102820	10/28/2020	<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-8-012721	1/27/2021	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
	29 ft	VMP-11-29-020515	2/5/2015	<0.0076	U		0.0014	J		<0.0069	U		<0.0069	U		0.0079			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-11-29-020515-DUP	2/5/2015	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.0069			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-11-29-043015	4/30/2015	<0.0067	J	U	<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-29-072815	7/28/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		0.0018	J		<0.0059	U	
		VMP-11-29-110515	11/5/2015	<0.0076	U		0.002	J		<0.007	U		<0.007	U		0.0011	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-11-29-012916	1/29/2016	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		0.0034	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-11-29-050216	5/2/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.031			<0.0035	U		0.013			0.0044	J	
		VMP-11-29-080216	8/2/2016	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0024	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-11-29-110116	11/1/2016	<0.0079	U		<0.0083	U		<0.0072	U		<0.0072	U		0.0011	J		<0.0038	U		0.012			0.0026	J	
		VMP-11-29-013017	1/30/2017	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		0.00069	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-11-29-052217	5/22/2017	<0.0064	U		0.001	J		<0.0058	J	U	<0.0058	U		0.0037	J		<0.003	U		0.0019	J		<0.0051	U	
		VMP-11-29-052217-DUP	5/22/2017	<0.0064	U		0.0012	J		<0.0059	J	U	<0.0059	U		0.0033	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-11-29-072617	7/26/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-29-110317	11/3/2017	<0.006	U		0.001	J		<0.0055	U		<0.0055	U		0.0048	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-11-29-012918	1/29/2018	<0.0058	U		0.0012	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-11-29-050118	5/1/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.003	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-11-29-072618	7/26/2018	<0.0061	U		0.0017	J		<0.0056	U		<0.0056	U		0.0017	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-11-29-103018	10/30/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0018	J		<0.003	U		0.0012	J		<0.0052	U	
		VMP-11-29-020419	2/4/2019	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		0.029			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-11-29-043019	4/30/2019	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		0.015			<0.003	U		0.0014	J		<0.0052	U	
		VMP-11-29-073119	7/31/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-11-29-102519	10/25/2019	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-11-29-012920	1/29/2020	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-11-29-042720	4/27/2020	0.00087	J		0.0013	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0027	J		0.00094	J	
		VMP-11-29-042720-DUP	4/27/2020	<0.0065	U		0.001	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-29-072720	7/27/2020	0.018			0.001	J		<0.0061	U		<0.0061	U		<0.0058	U		0.018			<0.0054	U		<0.0054	U	
		VMP-11-29-102820	10/28/2020	<0.0066	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0015	J		<0.0053	U	
		VMP-11-29-012721	1/27/2021	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	0.0092	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-38-043015	4/30/2015	0.014	J		0.0013	J		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		0.0056	J	
		VMP-11-38-072815	7/28/2015	0.012	J		<0.0044	J	U	<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0023	J	
		VMP-11-38-103015	10/30/2015	0.017	J		0.00099	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		0.011	J		0.0063	J	
		VMP-11-38-103015-DUP	10/30/2015	0.018	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0047	J	
		VMP-11-38-012916	1/29/2016	0.015	J		0.00048	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0027	J	
		VMP-11-38-050216	5/2/2016	<0.031	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-38-080216	8/2/2016	0.017	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-11-38-110216	11/2/2016	0.02	J		<0.0047	J	U	<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		0.021		
		VMP-11-38-013017	1/30/2017	<0.032	J	U	<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-11-38-072617	7/26/2017	0.028			<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0041	J		0.0062	J	
		VMP-11-38-110317	11/3/2017	<0.029	J	U	0.0011	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-11-38-110317-DUP	11/3/2017	0.012	J		<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-11-38-012918	1/29/2018	<0.026	J	U	0.00051	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		0.0095	J		<0.013	U	
		VMP-11-38-050118	5/1/2018	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-11-38-072618	7/26/2018	0.048			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0051	J	
		VMP-11-38-072618-DUP	7/26/2018	0.044			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0043	J	
		VMP-11-38-103018	10/30/2018	0.011	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-38-020119	2/1/2019	0.012	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.0033	J	
		VMP-11-38-020119-DUP	2/1/2019	0.012	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0021	J	
		VMP-11-38-043019	4/30/2019	0.011	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-11-38-043019-Dup	4/30/2019	0.044			<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-11-38-073119	7/31/2019	0.017	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-11-38-102519	10/25/2019	0.0055	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-11-38-012920	1/29/2020	0.0052	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-11-38-042720	4/27/2020	0.017	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0013	J	
		VMP-11-38-072720	7/27/2020	0.039			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0079	J	
		VMP-11-38-102820	10/28/2020	0.071			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.009	J		0.0034	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-11-38-020515	2/5/2015	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0086			<0.024	U	UJ	<0.0062	U	
		VMP-11-38-043015	4/30/2015	<0.019	J	U	<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		0.0086			<0.031	U		<0.0078	U	
		VMP-11-38-072815	7/28/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		0.0096			<0.028	U		<0.0071	U	
		VMP-11-38-103015	10/30/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0088			0.0038	J		<0.0065	U	
		VMP-11-38-103015-DUP	10/30/2015	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		0.0096			0.0016	J		<0.0059	U	
		VMP-11-38-012916	1/29/2016	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		0.0061	J		<0.027	U		<0.0068	U	
		VMP-11-38-050216	5/2/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.0073			<0.027	U		<0.0067	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0066			<0.026	U		<0.0065	U	
		VMP-11-38-080216	8/2/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		0.0084			<0.03	U		<0.0075	U	
		VMP-11-38-110216	11/2/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		0.011			<0.03	U		<0.0076	U	
		VMP-11-38-013017	1/30/2017	<0.016	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		0.0022	J		<0.027	U		<0.0069	U	
		VMP-11-38-072617	7/26/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-11-38-110317	11/3/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0014	J		<0.025	U		<0.0063	U	
		VMP-11-38-110317-DUP	11/3/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		0.0012	J		<0.023	U		<0.0057	U	
	38 ft	VMP-11-38-012918	1/29/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-11-38-050118	5/1/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-11-38-072618	7/26/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0016	J		<0.024	U		<0.0061	U	
		VMP-11-38-072618-DUP	7/26/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		0.0015	J		<0.024	U		<0.006	U	
		VMP-11-38-103018	10/30/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		0.0011	J		<0.024	U		<0.006	U	
		VMP-11-38-020119	2/1/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		0.00071	J		<0.023	U		<0.0058	U	
		VMP-11-38-020119-DUP	2/1/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00066	J		<0.024	U		<0.0062	U	
		VMP-11-38-043019	4/30/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-11-38-073119	7/31/2019	0.0041	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-11-38-102519	10/25/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-11-38-012920	1/29/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-11-38-042720	4/27/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-11-38-072720	7/27/2020	0.0021	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.0022	J		<0.026	U		<0.0064	U	
		VMP-11-38-102820	10/28/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0033	J		<0.0048	U		<0.0048	U	
		VMP-11-38-043015	4/30/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		0.002	J		<0.0061	U		<0.0061	U	
		VMP-11-38-072815	7/28/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0024	J		<0.0055	U		<0.0055	U	
		VMP-11-38-103015	10/30/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0032	J		<0.005	U		<0.005	U	
		VMP-11-38-103015-DUP	10/30/2015	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0032	J		<0.0046	U		<0.0046	U	
		VMP-11-38-012916	1/29/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0022	J		<0.0053	U		<0.0053	U	
		VMP-11-38-050216	5/2/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0024	J		<0.0052	U		<0.0052	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0028	J		<0.005	U		<0.005	U	
		VMP-11-38-080216	8/2/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0037	J		<0.0058	U		<0.0058	U	
		VMP-11-38-110216	11/2/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		0.0028	J		<0.006	U		<0.006	U	
		VMP-11-38-013017	1/30/2017	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-11-38-072617	7/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-11-38-110317	11/3/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-11-38-110317-DUP	11/3/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0023	J		<0.0044	U		<0.0044	U	
		VMP-11-38-012918	1/29/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.003	J		<0.0044	U		<0.0044	U	
		VMP-11-38-050118	5/1/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0026	J		<0.0051	U		<0.0051	U	
		VMP-11-38-072618	7/26/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0017	J		<0.0048	U		<0.0048	U	
		VMP-11-38-072618-DUP	7/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0014	J		<0.0047	U		<0.0047	U	
		VMP-11-38-103018	10/30/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0029	J		<0.0047	U		<0.0047	U	
		VMP-11-38-020119	2/1/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0023	J		<0.0045	U		<0.0045	U	
		VMP-11-38-020119-DUP	2/1/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-11-38-043019	4/30/2019	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0024	J		<0.0046	U		<0.0046	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0026	J		<0.0046	U		<0.0046	U	
		VMP-11-38-073119	7/31/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-11-38-102519	10/25/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0049	U		<0.0049	U	
		VMP-11-38-012920	1/29/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-11-38-042720	4/27/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-11-38-072720	7/27/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-11-38-102820	10/28/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0031	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-38-043015	4/30/2015	<0.0059	U		<0.0059	U		<0.0059	U		0.0026	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-11-38-072815	7/28/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-11-38-103015	10/30/2015	<0.005	U		<0.005	U		<0.005	U		0.0086	J		<0.0058	U		<0.0057	U		<0.0057	U		0.0026	J	
		VMP-11-38-103015-DUP	10/30/2015	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	J	U	<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-11-38-012916	1/29/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-11-38-050216	5/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-11-38-080216	8/2/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-11-38-110216	11/2/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-11-38-013017	1/30/2017	<0.0053	U		<0.0053	U		<0.0053	U		0.0037	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-11-38-072617	7/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-38-110317	11/3/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-11-38-110317-DUP	11/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		0.0055	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-11-38-012918	1/29/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-11-38-050118	5/1/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-11-38-072618	7/26/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-38-072618-DUP	7/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-11-38-103018	10/30/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-11-38-020119	2/1/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-11-38-020119-DUP	2/1/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-38-043019	4/30/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-11-38-073119	7/31/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-11-38-102519	10/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-11-38-012920	1/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-11-38-042720	4/27/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		0.0017	J	
		VMP-11-38-072720	7/27/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-11-38-102820	10/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	0.016			0.002	J		0.0012	J		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		0.0017	J	
		VMP-11-38-043015	4/30/2015	<0.011	U		<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		0.0012	J	
		VMP-11-38-072815	7/28/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-11-38-103015	10/30/2015	0.0083	J		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		0.0015	J		<0.053	U		<0.0044	U	
		VMP-11-38-103015-DUP	10/30/2015	0.0081	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-11-38-012916	1/29/2016	0.046			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-11-38-050216	5/2/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		0.00084	J	
		VMP-11-38-080216	8/2/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-11-38-110216	11/2/2016	<0.011	J	U	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-11-38-013017	1/30/2017	0.0057	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-11-38-072617	7/26/2017	0.007	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		0.0011	J	
		VMP-11-38-110317	11/3/2017	0.0041	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		0.0024	J	
		VMP-11-38-110317-DUP	11/3/2017	0.017			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		0.0024	J	
		VMP-11-38-012918	1/29/2018	0.023			<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		0.0022	J		<0.046	U		<0.0038	U	
		VMP-11-38-050118	5/1/2018	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-11-38-072618	7/26/2018	0.0081	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-11-38-072618-DUP	7/26/2018	0.0088			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-11-38-103018	10/30/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		0.00098	J	
		VMP-11-38-020119	2/1/2019	0.0036	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		0.0019	J	
		VMP-11-38-020119-DUP	2/1/2019	0.0039	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		0.0023	J	
		VMP-11-38-043019	4/30/2019	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		0.00094	J		<0.049	U		<0.004	U	
		VMP-11-38-073119	7/31/2019	<0.009	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-38-102519	10/25/2019	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-38-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-11-38-042720	4/27/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-11-38-072720	7/27/2020	0.0067	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-11-38-102820	10/28/2020	0.013			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	<0.019	U		0.007	J		<0.0058	U		<0.0049	U		<0.0043	U					0.032			0.0013	J	
		VMP-11-38-043015	4/30/2015	<0.024	U		<0.018	U		<0.0074	U		0.0017	J		0.0024	J					0.012	J		<0.0074	U	
		VMP-11-38-072815	7/28/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-11-38-103015	10/30/2015	<0.02	U		0.0034	J		<0.0061	U		<0.0051	J	U	<0.0045	U					0.0032	J		<0.0061	U	
		VMP-11-38-103015-DUP	10/30/2015	0.001	J		<0.013	U		<0.0056	U		<0.0046	U		0.0011	J					0.0029	J		<0.0056	U	
		VMP-11-38-012916	1/29/2016	<0.022	U		<0.016	U		<0.0065	U		0.0013	J		0.00098	J					0.0057	J		<0.0065	U	
		VMP-11-38-050216	5/2/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					0.0014	J		<0.0063	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					0.0022	J		<0.0061	U	
		VMP-11-38-080216	8/2/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					0.0067	J		<0.0071	U	
		VMP-11-38-110216	11/2/2016	0.0035	J		<0.017	U		0.0012	J		<0.006	U		<0.021	U		0.0012	J	J	0.019			<0.0072	U	
		VMP-11-38-013017	1/30/2017	<0.022	U		0.0023	J		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-11-38-072617	7/26/2017	<0.02	U		0.0018	J		<0.0059	U		<0.0049	U		<0.017	U					0.0021	J		<0.0059	U	
		VMP-11-38-110317	11/3/2017	<0.02	U		0.0046	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-11-38-110317-DUP	11/3/2017	<0.018	U		0.011	J		<0.0054	U		<0.0045	U		<0.016	U					0.0041	J		<0.0054	U	
		VMP-11-38-012918	1/29/2018	<0.018	U		0.012	J		<0.0054	U		<0.0045	U		<0.016	U					0.004	J		<0.0054	U	
		VMP-11-38-050118	5/1/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.012	J		<0.0062	U	
		VMP-11-38-072618	7/26/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U	UJ	<0.0058	U	
		VMP-11-38-072618-DUP	7/26/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U	UJ	<0.0057	U	
		VMP-11-38-103018	10/30/2018	<0.019	U		0.0044	J		<0.0057	U		<0.0048	U		<0.017	U					0.0026	J		<0.0057	U	
		VMP-11-38-020119	2/1/2019	<0.018	U		0.0024	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-11-38-020119-DUP	2/1/2019	<0.019	U		0.0027	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-11-38-043019	4/30/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.0059	J		<0.0056	U	
		VMP-11-38-073119	7/31/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-11-38-102519	10/25/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		0.0016	J	
		VMP-11-38-012920	1/29/2020	<0.022	U		<0.016	U	UJ	<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-11-38-042720	4/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.0062	J		<0.0058	U	
		VMP-11-38-072720	7/27/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					0.0064	J		<0.0061	U	
		VMP-11-38-102820	10/28/2020	<0.02	U		0.0073	J		<0.0061	U		0.0012	J		<0.018	U					0.047			<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0035	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-38-043015	4/30/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-11-38-072815	7/28/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-11-38-103015	10/30/2015	<0.0053	U		<0.0086	U		0.0034	J		<0.0037	U		0.0021	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-11-38-103015-DUP	10/30/2015	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-11-38-012916	1/29/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-11-38-050216	5/2/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	
		VMP-11-38-080216	8/2/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-11-38-110216	11/2/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		0.0036	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-11-38-013017	1/30/2017	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-11-38-072617	7/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00071	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-11-38-110317	11/3/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-38-110317-DUP	11/3/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		0.0056			<0.033	U		<0.006	U		<0.006	U	
		VMP-11-38-012918	1/29/2018	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		0.003	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-11-38-050118	5/1/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0013	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-11-38-072618	7/26/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-11-38-072618-DUP	7/26/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-11-38-103018	10/30/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		0.0049			<0.034	U		<0.0064	U		<0.0064	U	
		VMP-11-38-020119	2/1/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-11-38-020119-DUP	2/1/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-38-043019	4/30/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.0017	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-11-38-073119	7/31/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-11-38-102519	10/25/2019	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-11-38-012920	1/29/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-11-38-042720	4/27/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-11-38-072720	7/27/2020	<0.0084	U		<0.0085	U		0.0013	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-11-38-102820	10/28/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-11-38-020515	2/5/2015	<0.0064	U		0.0016	J		<0.0058	J	U	<0.0058	U		0.025			<0.003	U		0.0015	J		<0.0052	U	
		VMP-11-38-043015	4/30/2015	<0.0081	J	U	<0.0084	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-11-38-072815	7/28/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-11-38-103015	10/30/2015	<0.0067	U		0.0022	J		<0.0061	U		<0.0061	U		0.00098	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-38-103015-DUP	10/30/2015	<0.0061	U		0.0019	J		<0.0056	U		<0.0056	U		0.00092	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-11-38-012916	1/29/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-11-38-050216	5/2/2016	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-11-38-050216-DUP	5/2/2016	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-38-080216	8/2/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.001	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-11-38-110216	11/2/2016	<0.0079	U		0.0014	J		<0.0072	U		<0.0072	U		<0.0069	J	U	<0.0038	U		0.0032	J		<0.0064	U	
		VMP-11-38-013017	1/30/2017	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-11-38-072617	7/26/2017	<0.0064	U		0.0013	J		<0.0059	U		<0.0059	U		0.00087	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-38-110317	11/3/2017	0.00085	J		<0.0068	U		<0.0059	U		<0.0059	U		0.0065			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-38-110317-DUP	11/3/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0074			<0.0028	U		0.00077	J		<0.0048	U	
		VMP-11-38-012918	1/29/2018	<0.0058	U		0.0016	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-11-38-050118	5/1/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-11-38-072618	7/26/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-11-38-072618-DUP	7/26/2018	0.0027	J		<0.0065	U		<0.0057	U		<0.0057	U		0.00089	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-11-38-103018	10/30/2018	<0.0063	U		0.0015	J		<0.0057	U		<0.0057	U		0.0041	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-11-38-020119	2/1/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0011	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-11-38-020119-DUP	2/1/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.001	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-11-38-043019	4/30/2019	<0.006	U		0.001	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-11-38-043019-Dup	4/30/2019	<0.0062	U		0.0011	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-11-38-073119	7/31/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0038	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-38-102519	10/25/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0022	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-11-38-012920	1/29/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-11-38-042720	4/27/2020	<0.0064	U		0.001	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-11-38-072720	7/27/2020	<0.0066	U		0.0011	J		<0.0061	U		<0.0061	U		0.0022	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-11-38-102820	10/28/2020	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	0.011	J		0.00082	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0075	J		0.0026	J	
		VMP-12-5-050715	5/7/2015	0.048			0.0057			<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.0046	J		0.07		
		VMP-12-5-073115	7/31/2015	0.18			0.0048			<0.009	U		<0.014	U		<0.052	U		<0.003	U	UJ	0.006	J	J	0.06		
		VMP-12-5-110415	11/4/2015	0.048			0.004	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.029		
		VMP-12-5-020316	2/3/2016	<0.033	J	U	<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.0084	J		<0.017	U	
		VMP-12-5-050416	5/4/2016	0.014	J		0.00085	J		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		0.01	J	
		VMP-12-5-080316	8/3/2016	0.039			0.0011	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0086	J	
		VMP-12-5-103116	10/31/2016	0.028	J		0.0024	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.013			0.0071	J	
		VMP-12-5-020217	2/2/2017	0.017	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0082	J	
		VMP-12-5-050217	5/2/2017	0.015	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0052	J	
		VMP-12-5-072817	7/28/2017	0.027	J		0.0023	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0045	J		0.0065	J	
		VMP-12-5-110217	11/2/2017	0.015	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.004	J	
		VMP-12-5-013018	1/30/2018	<0.026	J	U	0.00035	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-12-5-043018	4/30/2018	0.015	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0065	J	
		VMP-12-5-072718	7/27/2018	0.028	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0054	J	
		VMP-12-5-103118	10/31/2018	0.014	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-12-5-012819	1/28/2019	0.0084	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-12-5-012819-DUP	1/28/2019	0.014	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0023	J	
		VMP-12-5-050319	5/3/2019	0.009	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-12-5-072419	7/24/2019	0.016	J		0.0047			<0.0089	U		<0.014	U		<0.051	U	UJ	<0.0029	U		<0.012	U		<0.016	U	
		VMP-12-5-102219	10/22/2019	<0.034	U		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-12-5-102219-DUP	10/22/2019	0.0085	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-12-5-012920	1/29/2020	<0.032	U		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-12-5-042920	4/29/2020	0.013	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-12-5-072920	7/29/2020	0.02	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0033	J	
		VMP-12-5-110420	11/4/2020	0.014	J		0.00082	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.11			0.0016	J	
		VMP-12-5-012821	1/28/2021	0.011	J		0.00033	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0056	J		0.0025	J	
		VMP-12-5-012821-DUP	1/28/2021	0.011	J		0.00046	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0026	J	
	5 ft	VMP-13-5-020515	2/5/2015	0.018	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.012	J	
		VMP-13-5-043015	4/30/2015	0.0077	J		0.0019	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		0.0048	J	
		VMP-13-5-072715	7/27/2015	0.03	J		0.0017	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.017		
		VMP-13-5-110215	11/2/2015	0.018	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0026	J	
		VMP-13-5-012616	1/26/2016	0.0071	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0028	J		<0.014	J	U
		VMP-13-5-050316	5/3/2016	0.0058	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.0026	J	
		VMP-13-5-072916	7/29/2016	0.033			0.001	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		0.0085	J	
		VMP-13-5-110216	11/2/2016	0.027	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0054	J	
		VMP-13-5-013017	1/30/2017	0.0071	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0024	J	
		VMP-13-5-042817	4/28/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-13-5-072717	7/27/2017	0.02	J		0.0008	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0055	J	
		VMP-13-5-103017	10/30/2017	0.014	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0055	J	
		VMP-13-5-012918	1/29/2018	0.0067	J		0.00032	J		<0.0068	U		<0.01	U		<0.039	U		<0.0022	U		<0.0096	U		<0.012	U	
		VMP-13-5-033018	3/30/2018	0.0084	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0028	J		0.002	J	
		VMP-13-5-041018	4/10/2018	0.0078	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-13-5-072418	7/24/2018	0.022	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0059	J		0.0033	J	
		VMP-13-5-102918	10/29/2018	0.014	J		0.0037	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.02			<0.014	U	
		VMP-13-5-012919	1/29/2019	0.007	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-13-5-050119	5/1/2019	0.029	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.0046	J		<0.015	U	
		VMP-13-5-073119	7/31/2019	0.045			0.0018	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		0.003	J	
		VMP-13-5-102819	10/28/2019	<0.031	U		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-13-5-012420	1/24/2020	<0.034	ND,UJ	UJ	<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-13-5-012420-DUP	1/24/2020	0.0094	J	J	<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.0043	J		<0.017	U	
		VMP-13-5-042320	4/23/2020	0.027	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0069	J	
		VMP-13-5-073020	7/30/2020	0.026	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.011	J		0.004	J	
		VMP-13-5-110220	11/2/2020	0.019	J		0.00033	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0018	J	
		VMP-13-5-012721	1/27/2021	0.0062	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-12-5-050715	5/7/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-12-5-073115	7/31/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		0.0079	J		<0.007	U	
		VMP-12-5-110415	11/4/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-12-5-020316	2/3/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-12-5-050416	5/4/2016	<0.02	U		<0.0099	U		<0.0073	U		<0.013	U		<0.017	U		<0.0077	U		<0.033	U	UJ	<0.0082	U	
		VMP-12-5-080316	8/3/2016	0.012	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-12-5-103116	10/31/2016	0.0033	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-12-5-020217	2/2/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	ND,UJ		<0.0066	U	
		VMP-12-5-050217	5/2/2017	0.0015	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		0.0013	J		<0.027	U		<0.0067	U	
		VMP-12-5-072817	7/28/2017	<0.015	U		0.00074	J		0.00068	J		<0.01	U		<0.012	U		0.0018	J		<0.024	U		<0.0062	U	
		VMP-12-5-110217	11/2/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-12-5-013018	1/30/2018	0.0064	J		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-12-5-043018	4/30/2018	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-12-5-072718	7/27/2018	0.004	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-12-5-103118	10/31/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-12-5-012819	1/28/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-12-5-012819-DUP	1/28/2019	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-12-5-050319	5/3/2019	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-12-5-072419	7/24/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		0.0032	J		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-12-5-102219	10/22/2019	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-12-5-102219-DUP	10/22/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-12-5-012920	1/29/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-12-5-042920	4/29/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-12-5-072920	7/29/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		0.0024	J		<0.025	U		<0.0063	U	
		VMP-12-5-110420	11/4/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-12-5-012821	1/28/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
	5 ft	VMP-13-5-020515	2/5/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-13-5-043015	4/30/2015	<0.016	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-13-5-072715	7/27/2015	0.0091	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		0.0029	J		<0.029	U		<0.0073	U	
		VMP-13-5-110215	11/2/2015	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		0.0018	J		<0.024	U		<0.0059	U	
		VMP-13-5-012616	1/26/2016	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-13-5-050316	5/3/2016	0.00068	J		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		0.0015	J		<0.028	U	UJ	<0.0069	U	
		VMP-13-5-072916	7/29/2016	0.0086	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		0.015			<0.029	U		<0.0073	U	
		VMP-13-5-110216	11/2/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0011	J		<0.026	U		<0.0065	U	
		VMP-13-5-013017	1/30/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.00062	J		<0.023	U		<0.0058	U	
		VMP-13-5-042817	4/28/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.001	J		<0.024	U		<0.006	U	
		VMP-13-5-072717	7/27/2017	0.0025	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0048	J		<0.023	U		<0.0058	U	
		VMP-13-5-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0017	J		<0.023	U		<0.0058	U	
		VMP-13-5-012918	1/29/2018	<0.013	U		<0.0064	U		<0.0047	U		<0.0086	U		<0.011	U		<0.005	U		<0.021	U		<0.0052	U	
		VMP-13-5-033018	3/30/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-13-5-041018	4/10/2018	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-13-5-072418	7/24/2018	0.002	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0027	J		<0.023	U		<0.0058	U	
		VMP-13-5-102918	10/29/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		0.0016	J		<0.025	U		<0.0064	U	
		VMP-13-5-012919	1/29/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-13-5-050119	5/1/2019	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-13-5-073119	7/31/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-13-5-102819	10/28/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0018	J		<0.027	U		<0.0067	U	
		VMP-13-5-012420	1/24/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-13-5-042320	4/23/2020	0.0019	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-13-5-073020	7/30/2020	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		0.0025	J		<0.027	U		<0.0069	U	
		VMP-13-5-110220	11/2/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.00038	J		<0.026	U		<0.0064	U	
		VMP-13-5-012721	1/27/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U	UJ	<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.002	J		<0.0051	U		<0.0051	U	
		VMP-12-5-050715	5/7/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0018	J		<0.0056	U		<0.0056	U	
		VMP-12-5-073115	7/31/2015	0.0041	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0026	J		<0.0055	U		<0.0055	U	
		VMP-12-5-110415	11/4/2015	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0044	J		<0.0055	U		<0.0055	U	
		VMP-12-5-020316	2/3/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0032	J		<0.0057	U		<0.0057	U	
		VMP-12-5-050416	5/4/2016	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		0.0025	J		<0.0064	U		<0.0064	U	
		VMP-12-5-080316	8/3/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0032	J		<0.0055	U		<0.0055	U	
		VMP-12-5-103116	10/31/2016	0.0017	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0022	J		<0.0053	U		<0.0053	U	
		VMP-12-5-020217	2/2/2017	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0024	J		<0.0051	U		<0.0051	U	
		VMP-12-5-050217	5/2/2017	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0052	U		<0.0052	U	
		VMP-12-5-072817	7/28/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0029	J		<0.0048	U		<0.0048	U	
		VMP-12-5-110217	11/2/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-12-5-013018	1/30/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.003	J		<0.0044	U		<0.0044	U	
		VMP-12-5-043018	4/30/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0023	J		<0.0046	U		<0.0046	U	
		VMP-12-5-072718	7/27/2018	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0024	J		<0.0051	U		<0.0051	U	
		VMP-12-5-103118	10/31/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-12-5-012819	1/28/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-12-5-012819-DUP	1/28/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0027	J		<0.0047	U		<0.0047	U	
		VMP-12-5-050319	5/3/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-12-5-072419	7/24/2019	0.0022	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0023	J		<0.0054	U		<0.0054	U	
		VMP-12-5-102219	10/22/2019	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0031	J		<0.0058	U		0.0034	J	
		VMP-12-5-102219-DUP	10/22/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.003	J		<0.0051	U		0.0023	J	
		VMP-12-5-012920	1/29/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-12-5-042920	4/29/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-12-5-072920	7/29/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-12-5-110420	11/4/2020	0.014			<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0026	J		<0.0051	U		<0.0051	U	
		VMP-12-5-012821	1/28/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0049	U		<0.0049	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0028	J		<0.0048	U		<0.0048	U	
	5 ft	VMP-13-5-020515	2/5/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0025	J		<0.0055	U		<0.0055	U	
		VMP-13-5-043015	4/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0022	J		<0.0054	U		<0.0054	U	
		VMP-13-5-072715	7/27/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0026	J		<0.0057	U		<0.0057	U	
		VMP-13-5-110215	11/2/2015	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0018	J		<0.0046	U		<0.0046	U	
		VMP-13-5-012616	1/26/2016	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.004	J		<0.0047	U		<0.0047	U	
		VMP-13-5-050316	5/3/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-13-5-072916	7/29/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.002	J		<0.0057	U		<0.0057	U	
		VMP-13-5-110216	11/2/2016	0.00096	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0029	J		<0.0051	U		<0.0051	U	
		VMP-13-5-013017	1/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0027	J		<0.0046	U		<0.0046	U	
		VMP-13-5-042817	4/28/2017	0.00072	J		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-13-5-072717	7/27/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0032	J		<0.0046	U		<0.0046	U	
		VMP-13-5-103017	10/30/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0029	J		<0.0046	U		<0.0046	U	
		VMP-13-5-012918	1/29/2018	<0.0035	U		<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		0.0031	J		<0.0041	U		<0.0041	U	
		VMP-13-5-033018	3/30/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0023	J		<0.0047	U		<0.0047	U	
		VMP-13-5-041018	4/10/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0022	J		<0.0045	U		<0.0045	U	
		VMP-13-5-072418	7/24/2018	0.0015	J		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0024	J		<0.0046	U		<0.0046	U	
		VMP-13-5-102918	10/29/2018	0.0019	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0021	J		<0.005	U		<0.005	U	
		VMP-13-5-012919	1/29/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0025	J		<0.0044	U		<0.0044	U	
		VMP-13-5-050119	5/1/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0023	J		<0.005	U		<0.005	U	
		VMP-13-5-073119	7/31/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		0.0044	J	
		VMP-13-5-102819	10/28/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-13-5-012420	1/24/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-13-5-042320	4/23/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-13-5-073020	7/30/2020	0.0008	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0024	J		<0.0054	U		<0.0054	U	
		VMP-13-5-110220	11/2/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.003	J		<0.005	U		<0.005	U	
		VMP-13-5-012721	1/27/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0027	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-12-5-050715	5/7/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-12-5-073115	7/31/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-12-5-110415	11/4/2015	<0.0054	U		<0.0054	U		<0.0054	U		0.01	J		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-12-5-020316	2/3/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-12-5-050416	5/4/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-12-5-080316	8/3/2016	<0.0054	U		<0.0054	U		<0.0054	U		0.0058	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-12-5-103116	10/31/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-12-5-020217	2/2/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-12-5-050217	5/2/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-12-5-072817	7/28/2017	<0.0047	U		<0.0047	U		<0.0047	U		0.0029	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-12-5-110217	11/2/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-12-5-013018	1/30/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-12-5-043018	4/30/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-12-5-072718	7/27/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-12-5-103118	10/31/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-12-5-012819	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-12-5-012819-DUP	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-12-5-050319	5/3/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-12-5-072419	7/24/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-12-5-102219	10/22/2019	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-12-5-102219-DUP	10/22/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-12-5-012920	1/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-12-5-042920	4/29/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-12-5-072920	7/29/2020	<0.0048	U		0.0022	J		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		0.0022	J	
		VMP-12-5-110420	11/4/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-12-5-012821	1/28/2021	<0.0048	U		<0.0048	U		<0.0048	U		0.001	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		0.0016	J	
	5 ft	VMP-13-5-020515	2/5/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-13-5-043015	4/30/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-13-5-072715	7/27/2015	<0.0056	U		<0.0056	U		<0.0056	U		0.0029	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-13-5-110215	11/2/2015	<0.0045	U		<0.0045	U		<0.0045	U		0.0028	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-5-012616	1/26/2016	<0.0046	U		<0.0046	U		<0.0046	U		0.002	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-13-5-050316	5/3/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-13-5-072916	7/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-13-5-110216	11/2/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-13-5-013017	1/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		0.0017	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-5-042817	4/28/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-5-072717	7/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-5-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-5-012918	1/29/2018	<0.004	U		<0.004	U		<0.004	U		<0.035	U		<0.0047	U		<0.0046	U		<0.0046	U		<0.015	U	
		VMP-13-5-033018	3/30/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-13-5-041018	4/10/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-5-072418	7/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-5-102918	10/29/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-5-012919	1/29/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-13-5-050119	5/1/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-5-073119	7/31/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-5-102819	10/28/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	ND,UJ	UJ	<0.0059	U		<0.0059	U		<0.019	U	
		VMP-13-5-012420	1/24/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-13-5-042320	4/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-13-5-073020	7/30/2020	<0.0053	U		<0.0053	U		<0.0053	U		0.0079	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-13-5-110220	11/2/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		0.0059	J	
		VMP-13-5-012721	1/27/2021	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		0.0028	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.0095	U		0.0045	J		0.04		J	<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		0.0013	J	
		VMP-12-5-050715	5/7/2015	0.0047	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		0.0016	J	
		VMP-12-5-073115	7/31/2015	0.0098	J		0.02			0.016			<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		0.0038	J	
		VMP-12-5-110415	11/4/2015	0.023			0.15			0.29			<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		0.0088		
		VMP-12-5-020316	2/3/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-12-5-050416	5/4/2016	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.067	U		<0.0056	U	
		VMP-12-5-080316	8/3/2016	<0.01	U		0.0024	J		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-12-5-103116	10/31/2016	0.014			0.11			0.0091			<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		0.0014	J	
		VMP-12-5-020217	2/2/2017	0.23			0.0013	J		0.0016	J		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-12-5-050217	5/2/2017	0.0083	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-12-5-072817	7/28/2017	0.0094			0.011			0.0033	J		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		0.0015	J	
		VMP-12-5-110217	11/2/2017	0.011			0.02			0.007		J	<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-12-5-013018	1/30/2018	<0.0083	U		0.0018	J		0.0062			<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-12-5-043018	4/30/2018	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-12-5-072718	7/27/2018	0.017			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-12-5-103118	10/31/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	ND,UJ	UJ	<0.0043	U	
		VMP-12-5-012819	1/28/2019	0.0059	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-12-5-012819-DUP	1/28/2019	0.0068	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-12-5-050319	5/3/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	ND,UJ		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-12-5-072419	7/24/2019	0.003	J		0.018			0.0028	J		<0.01	U		<0.0093	U		0.021			<0.056	U		0.017		
		VMP-12-5-102219	10/22/2019	0.013	J0	J	<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-12-5-102219-DUP	10/22/2019	0.01			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-12-5-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-12-5-042920	4/29/2020	0.0091			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-12-5-072920	7/29/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-12-5-110420	11/4/2020	<0.0095	U		<0.0055	U		0.0022	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-12-5-012821	1/28/2021	0.0051	J	J	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.022	U	UJ	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
	5 ft	VMP-13-5-020515	2/5/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-13-5-043015	4/30/2015	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-13-5-072715	7/27/2015	<0.01	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-13-5-110215	11/2/2015	0.0061	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-5-012616	1/26/2016	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		0.0015	J	
		VMP-13-5-050316	5/3/2016	0.0046	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-13-5-072916	7/29/2016	0.046			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		0.00076	J	
		VMP-13-5-110216	11/2/2016	0.012			0.023			0.0036	J		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		0.0012	J	
		VMP-13-5-013017	1/30/2017	0.0054	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-13-5-042817	4/28/2017	0.0037	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-5-072717	7/27/2017	0.018			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-13-5-103017	10/30/2017	0.014			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-13-5-012918	1/29/2018	0.016			<0.0044	U		<0.005	U		<0.0078	U		<0.0071	U		<0.0042	U		<0.043	U		<0.0036	U	
		VMP-13-5-033018	3/30/2018	0.014			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		0.002	J		<0.05	U		0.0021	J	
		VMP-13-5-041018	4/10/2018	0.006	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		0.00063	J	
		VMP-13-5-072418	7/24/2018	0.0039	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		0.0014	J		<0.048	U		0.0054		
		VMP-13-5-102918	10/29/2018	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		0.0017	J		<0.052	U		0.0092		
		VMP-13-5-012919	1/29/2019	<0.0082	U		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-13-5-050119	5/1/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U	UJ	<0.0087	U		<0.0051	U		<0.053	U		0.0042	J	
		VMP-13-5-073119	7/31/2019	0.019		J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-13-5-102819	10/28/2019	<0.0098	U	UJ	<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-13-5-012420	1/24/2020	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-13-5-042320	4/23/2020	0.0064	J	J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-13-5-073020	7/30/2020	0.02			<0.0058	U		0.001	J		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-13-5-110220	11/2/2020	0.01			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-13-5-012721	1/27/2021	<0.024	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.021	U		0.0038	J		<0.0062	J	U	<0.0052	U		<0.0045	U					0.01	J		<0.0062	J	U
		VMP-12-5-050715	5/7/2015	0.0087	J		0.011	J		0.0033	J		<0.0056	J	U	<0.005	U					0.043			<0.0068	U	
		VMP-12-5-073115	7/31/2015	0.0095	J		0.014	J		0.02			0.0073			<0.0049	U					0.009	J		0.028		
		VMP-12-5-110415	11/4/2015	<0.022	U		0.072			0.37			<0.0056	U		<0.0049	U					0.02			1.1		
		VMP-12-5-020316	2/3/2016	<0.023	U		0.0028	J		<0.0069	U		<0.0058	U		<0.0051	U					0.0068	J		<0.0069	U	
		VMP-12-5-050416	5/4/2016	<0.026	U		0.0045	J		0.005	J		<0.0065	U		<0.0057	U					0.0069	J		<0.0078	U	
		VMP-12-5-080316	8/3/2016	0.0032	J		0.0062	J		0.0025	J		0.0021	J		<0.02	U					0.027			0.0017	J	
		VMP-12-5-103116	10/31/2016	<0.022	U		0.0066	J		0.0036	J		0.0065			<0.019	U		<0.014	U		0.12			0.0018	J	
		VMP-12-5-020217	2/2/2017	<0.021	U		<0.015	U		0.002	J		<0.0052	U		<0.018	U					0.019			0.0037	J	
		VMP-12-5-050217	5/2/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-12-5-072817	7/28/2017	0.0039	J		0.0093	J		0.0023	J		0.0018	J		<0.017	U					0.01	J		0.0012	J	
		VMP-12-5-110217	11/2/2017	<0.019	U		0.0018	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		0.0011	J	
		VMP-12-5-013018	1/30/2018	<0.018	U		<0.013	U		0.0063			<0.0045	U		<0.016	U					<0.011	U		0.02		
		VMP-12-5-043018	4/30/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-12-5-072718	7/27/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-12-5-103118	10/31/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-12-5-012819	1/28/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.0021	J		<0.0058	U	
		VMP-12-5-012819-DUP	1/28/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.0028	J		<0.0058	U	
		VMP-12-5-050319	5/3/2019	<0.02	U		0.0043	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-12-5-072419	7/24/2019	<0.022	U		0.0077	J		0.00069	J		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-12-5-102219	10/22/2019	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					<0.014	U		<0.0071	U	
		VMP-12-5-102219-DUP	10/22/2019	<0.021	U		0.0074	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-12-5-012920	1/29/2020	<0.022	U		<0.016	U	UJ	<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-12-5-042920	4/29/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.022			0.00091	J	
		VMP-12-5-072920	7/29/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0027	J		<0.006	U	
		VMP-12-5-110420	11/4/2020	<0.021	U		0.9			0.016			<0.0052	U		<0.018	U					0.009	J		0.042		
		VMP-12-5-012821	1/28/2021	<0.02	U		0.0044	J		0.0012	J		<0.005	U		<0.018	U					0.01	J		<0.006	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.019	U		0.0038	J		0.0012	J		<0.0048	U		<0.017	U					0.0087	J		<0.0058	U	
	5 ft	VMP-13-5-020515	2/5/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					0.011	J		<0.0067	U	
		VMP-13-5-043015	4/30/2015	0.0012	J		<0.016	U		<0.0065	U		0.0019	J		<0.0048	U					0.0024	J		<0.0065	U	
		VMP-13-5-072715	7/27/2015	<0.023	U		<0.016	U		0.0011	J		0.0028	J		<0.0051	U					0.025			<0.0069	U	
		VMP-13-5-110215	11/2/2015	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.0041	U					0.03			<0.0056	U	
		VMP-13-5-012616	1/26/2016	<0.019	U		<0.014	U		<0.0057	U		<0.0048	J	U	<0.0042	U					0.0028	J		<0.0057	U	
		VMP-13-5-050316	5/3/2016	<0.022	U		0.004	J		<0.0066	U		<0.0055	U		<0.0048	U					0.01	J		<0.0066	U	
		VMP-13-5-072916	7/29/2016	<0.023	U		<0.017	U		<0.0069	U		0.0018	J		<0.02	U					0.029			<0.0069	U	
		VMP-13-5-110216	11/2/2016	<0.02	U		<0.015	U		0.0013	J		0.0025	J		<0.018	U		0.024			0.099			0.0027	J	
		VMP-13-5-013017	1/30/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					0.0034	J		<0.0056	U	
		VMP-13-5-042817	4/28/2017	<0.019	U		0.0034	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-13-5-072717	7/27/2017	<0.018	U		0.004	J		<0.0056	U		<0.0046	U		<0.016	U					0.012			<0.0056	U	
		VMP-13-5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-13-5-012918	1/29/2018	<0.017	U		<0.012	U		<0.005	U		<0.0042	U		<0.015	U					0.0016	J		<0.005	U	
		VMP-13-5-033018	3/30/2018	<0.019	U		0.002	J		<0.0057	U		<0.0048	U		<0.017	U		0.00091	J		0.0028	J		0.00048	J	
		VMP-13-5-041018	4/10/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		0.00028	J		0.0074	J		<0.0055	U	
		VMP-13-5-072418	7/24/2018	<0.018	U		0.024			<0.0056	U		<0.0046	U		<0.016	U					0.0022	J		<0.0056	U	
		VMP-13-5-102918	10/29/2018	<0.02	U		0.012	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-13-5-012919	1/29/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-13-5-050119	5/1/2019	<0.02	U		0.014	J		<0.0061	U		<0.0051	U		<0.018	U					0.0052	J		<0.0061	U	
		VMP-13-5-073119	7/31/2019	<0.02	U		0.0054	J		<0.0059	U		<0.0049	U		<0.017	U					0.037			<0.0059	U	
		VMP-13-5-102819	10/28/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-13-5-012420	1/24/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.021	U					<0.014	U		<0.007	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.021	U					0.0057	J		<0.007	U	
		VMP-13-5-042320	4/23/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0044	J	J	<0.0059	U	
		VMP-13-5-073020	7/30/2020	<0.022	U		0.0064	J		0.0042	J		<0.0054	U		<0.019	U					0.015			0.012		
		VMP-13-5-110220	11/2/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.013			<0.0061	U	
		VMP-13-5-012721	1/27/2021	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.0081	J		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0042	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-12-5-050715	5/7/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.0031	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-12-5-073115	7/31/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		0.0037	J		<0.04	U	UJ	<0.0074	U		<0.0074	U	
		VMP-12-5-110415	11/4/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		0.0093			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-12-5-020316	2/3/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		0.0011	J		<0.042	U	UJ	<0.0077	U		<0.0077	U	
		VMP-12-5-050416	5/4/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		0.0015	J		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-12-5-080316	8/3/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		0.0033	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-12-5-103116	10/31/2016	<0.0056	U		<0.0091	U		0.003	J		<0.0039	U		0.035			<0.039	U	U	<0.0072	U		<0.0072	U	
		VMP-12-5-020217	2/2/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		0.0022	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-12-5-050217	5/2/2017	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-12-5-072817	7/28/2017	0.002	J		<0.0082	U		<0.0081	U		<0.0035	U		0.0052			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-12-5-110217	11/2/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0054			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-12-5-013018	1/30/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		0.00098	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-12-5-043018	4/30/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		0.00089	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-12-5-072718	7/27/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-12-5-103118	10/31/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	ND,UJ	UJ	<0.0066	U		<0.0066	U	
		VMP-12-5-012819	1/28/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-12-5-012819-DUP	1/28/2019	<0.005	U		<0.008	U		0.0026	J		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-12-5-050319	5/3/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		0.0017	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-12-5-072419	7/24/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		0.075			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-12-5-102219	10/22/2019	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-12-5-102219-DUP	10/22/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		0.00076	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-12-5-012920	1/29/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-12-5-042920	4/29/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-12-5-072920	7/29/2020	<0.0083	U		<0.0084	U		0.025			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-12-5-110420	11/4/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-12-5-012821	1/28/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0041	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.0012	J		<0.035	U		<0.0064	U		<0.0064	U	
	5 ft	VMP-13-5-020515	2/5/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-13-5-043015	4/30/2015	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-5-072715	7/27/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		0.0022	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-13-5-110215	11/2/2015	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-5-012616	1/26/2016	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-13-5-050316	5/3/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		0.001	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-13-5-072916	7/29/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		0.001	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-13-5-110216	11/2/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0093			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-13-5-013017	1/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.00045	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-5-042817	4/28/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.00086	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-13-5-072717	7/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.0014	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		0.0013	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-5-012918	1/29/2018	<0.0043	U		<0.007	U		<0.0069	U		<0.003	U		0.002	J		<0.03	U		<0.0055	U		<0.0055	U	
		VMP-13-5-033018	3/30/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-13-5-041018	4/10/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-5-072418	7/24/2018	<0.0048	U		<0.0078	U		0.0012	J		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-5-102918	10/29/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.0012	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-13-5-012919	1/29/2019	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		0.00085	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-13-5-050119	5/1/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		0.0017	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-13-5-073119	7/31/2019	<0.0051	U		<0.0082	U		0.0048	J		<0.0035	U		0.0045			<0.036	U		<0.0065	U		<0.0065	U	
		VMP-13-5-102819	10/28/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-13-5-012420	1/24/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-13-5-042320	4/23/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-5-073020	7/30/2020	<0.0091	U		<0.0091	U		0.0069	J		<0.0039	U		0.0036	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-5-110220	11/2/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-13-5-012721	1/27/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-12	5 ft	VMP-12-5-021115	2/11/2015	<0.0068	U		<0.0071	U		0.06			0.019			0.0037	J		<0.0032	U		0.03			0.014		
		VMP-12-5-050715	5/7/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-12-5-073115	7/31/2015	<0.0072	U		<0.0076	U		0.034			0.0062	J		0.34			<0.0034	U		0.012			0.0017	J	
		VMP-12-5-110415	11/4/2015	<0.0073	U		0.0026	J		0.82			0.044			1.7			<0.0035	U		0.058			0.0031	J	
		VMP-12-5-020316	2/3/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-12-5-050416	5/4/2016	<0.0085	U		<0.0089	U		<0.0078	U		<0.0078	U		<0.0074	U		<0.004	U		<0.0069	U		<0.0069	U	
		VMP-12-5-080316	8/3/2016	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0065			<0.0035	U		0.0013	J		<0.0059	U	
		VMP-12-5-103116	10/31/2016	0.0042	J		0.0012	J		0.0061	J		<0.0065	U		0.0028	J		<0.0034	U		0.37			0.08		
		VMP-12-5-020217	2/2/2017	<0.0068	U		<0.0071	U		0.0058	J		<0.0062	U		0.001	J		<0.0032	U		0.0031	J		<0.0055	U	
		VMP-12-5-050217	5/2/2017	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-12-5-072817	7/28/2017	<0.0064	U		0.0017	J		0.0041	J		0.002	J		0.0011	J		<0.003	U		0.041			0.012		
		VMP-12-5-110217	11/2/2017	<0.0064	U		0.0011	J		0.0098			0.0035	J		0.0015	J		<0.003	U		0.082			0.027		
		VMP-12-5-013018	1/30/2018	<0.0059	U		<0.0062	U		0.02			0.0024	J		0.046			<0.0028	U		0.0044	J		0.0013	J	
		VMP-12-5-043018	4/30/2018	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-12-5-072718	7/27/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-12-5-103118	10/31/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-12-5-012819	1/28/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.00093	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-12-5-012819-DUP	1/28/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0011	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-12-5-050319	5/3/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0078	J0	J	<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-12-5-072419	7/24/2019	<0.0071	U		0.00083	J		0.0014	J		<0.0065	U		0.065			<0.0034	U		0.06			0.021		
		VMP-12-5-102219	10/22/2019	<0.0078	U		0.002	J		<0.0071	U		<0.0071	U		0.0028	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-12-5-102219-DUP	10/22/2019	<0.0068	U		0.0018	J		<0.0062	U		<0.0062	U		0.0059			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-12-5-012920	1/29/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-12-5-042920	4/29/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-12-5-072920	7/29/2020	0.0073			0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-12-5-110420	11/4/2020	<0.0068	U		0.0015	J		0.0012	J		<0.0062	U		0.63			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-12-5-012821	1/28/2021	<0.0065	U		0.0017	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	J	U	<0.0053	U	
		VMP-12-5-012821-DUP	1/28/2021	<0.0063	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	J	U	<0.0051	U	
	5 ft	VMP-13-5-020515	2/5/2015	<0.0074	U		0.0015	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-13-5-043015	4/30/2015	<0.0071	J	U	<0.0075	U		0.0011	J		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-13-5-072715	7/27/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		0.0014	J		<0.0061	U	
		VMP-13-5-110215	11/2/2015	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-13-5-012616	1/26/2016	<0.0062	U		0.0021	J		<0.0057	U		<0.0057	U		0.0021	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-13-5-050316	5/3/2016	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-13-5-072916	7/29/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-13-5-110216	11/2/2016	<0.0067	U		<0.007	U		0.0059	J		<0.0062	U		0.0011	J		<0.0032	U		0.076			0.019		
		VMP-13-5-013017	1/30/2017	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0021	J		<0.0049	U	
		VMP-13-5-042817	4/28/2017	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-13-5-072717	7/27/2017	<0.0061	U		0.0016	J		<0.0056	U		<0.0056	U		0.0048	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-5-103017	10/30/2017	<0.006	U		0.0011	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-5-012918	1/29/2018	<0.0054	U		0.0015	J		<0.005	U		<0.005	U		<0.0047	U		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-13-5-033018	3/30/2018	<0.0063	U		0.0012	J		0.00064	J		<0.0057	U		0.0034	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-13-5-041018	4/10/2018	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-5-072418	7/24/2018	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		0.0043	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-5-102918	10/29/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-13-5-012919	1/29/2019	<0.0058	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		0.00082	J		<0.0047	U	
		VMP-13-5-050119	5/1/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.012	J0	J	<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-13-5-073119	7/31/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0045	J		<0.0052	U	
		VMP-13-5-102819	10/28/2019	0.0027	J		0.0016	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-5-012420	1/24/2020	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-13-5-012420-DUP	1/24/2020	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-13-5-042320	4/23/2020	<0.0065	U		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-13-5-073020	7/30/2020	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		0.027			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-13-5-110220	11/2/2020	<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-13-5-012721	1/27/2021	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	0.01	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-13-10.5-043015	4/30/2015	0.0087	J		0.0028	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		0.0061	J	
		VMP-13-10.5-072715	7/27/2015	0.031	J		0.012			<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.012	J	
		VMP-13-10.5-110215	11/2/2015	0.039			0.0013	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.018		
		VMP-13-10.5-012616	1/26/2016	0.019	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0034	J		0.0043	J	
		VMP-13-10.5-050316	5/3/2016	0.012	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0037	J	
		VMP-13-10.5-072916	7/29/2016	0.026	J		0.0049			<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0061	J		<0.017	U	
		VMP-13-10.5-110216	11/2/2016	0.029	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.008	J	
		VMP-13-10.5-013017	1/30/2017	<0.027	J	U	<0.0037	J	U	<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-13-10.5-042817	4/28/2017	<0.029	J	U	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0025	J	
		VMP-13-10.5-072717	7/27/2017	0.021	J		0.0013	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0085	J		0.0053	J	
		VMP-13-10.5-103017	10/30/2017	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-13-10.5-012918	1/29/2018	0.011	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-13-10.5-033018	3/30/2018	0.0076	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0017	J	
		VMP-13-10.5-041018	4/10/2018	0.012	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0023	J	
		VMP-13-10.5-072418	7/24/2018	0.036			0.00052	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		0.006	J	
		VMP-13-10.5-102918	10/29/2018	0.02	J		<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-13-10.5-012919	1/29/2019	0.022	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		0.0022	J	
		VMP-13-10.5-050119	5/1/2019	0.017	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-13-10.5-073119	7/31/2019	0.015	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-13-10.5-102819	10/28/2019	<0.03	U		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-13-10.5-012420	1/24/2020	<0.035	ND,UJ	UJ	<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-13-10.5-042320	4/23/2020	0.054		J	0.0012	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0022	J		0.003	J	
		VMP-13-10.5-073020	7/30/2020	0.02	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0032	J	
		VMP-13-10.5-110220	11/2/2020	0.015	J		0.00034	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-13-10.5-012721	1/27/2021	0.018	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.002	J	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.033	U		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-13-21.5-043015	4/30/2015	0.018	J		0.0016	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		0.017	J	
		VMP-13-21.5-072715	7/27/2015	0.021	J		0.0021	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.0065	J	
		VMP-13-21.5-112515	11/25/2015	0.013	J		0.001	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0086	J		0.0022	J	
		VMP-13-21.5-012616	1/26/2016	0.021	J		0.0018	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0059	J		0.0048	J	
		VMP-13-21.5-050316	5/3/2016	0.018	J		0.00061	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.0034	J	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.034	J	U	0.00064	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.0024	J	
		VMP-13-21.5-072916	7/29/2016	0.02	J		0.0012	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-13-21.5-110216	11/2/2016	0.1			0.0022	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.016			0.024		
		VMP-13-21.5-013017	1/30/2017	0.0091	J		<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0024	J	
		VMP-13-21.5-042817	4/28/2017	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-13-21.5-072717	7/27/2017	0.0091	J		0.00097	J		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-13-21.5-103017	10/30/2017	0.011	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-13-21.5-012918	1/29/2018	0.0096	J		0.00063	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-13-21.5-033018	3/30/2018	0.0094	J		0.00055	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0034	J		0.0018	J	
		VMP-13-21.5-041018	4/10/2018	0.0085	J		0.0006	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.005	J		0.002	J	
		VMP-13-21.5-072418	7/24/2018	0.039			0.00071	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0064	J	
		VMP-13-21.5-102918	10/29/2018	0.036			0.0015	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.01	J		0.0068	J	
		VMP-13-21.5-020419	2/4/2019	0.035			0.0031	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-13-21.5-050119	5/1/2019	0.025	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0047	J		0.0044	J	
		VMP-13-21.5-073119	7/31/2019	0.0093	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-13-21.5-102819	10/28/2019	<0.032	U		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-13-21.5-012420	1/24/2020	0.0053	J	J	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-13-21.5-042320	4/23/2020	0.0058	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-13-21.5-073020	7/30/2020	0.0079	J		0.0012	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-13-21.5-110220	11/2/2020	0.014	J		0.0005	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0026	J	
		VMP-13-21.5-110220-DUP	11/2/2020	0.016	J		0.00041	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-13-21.5-012721	1/27/2021	0.029			<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U	UJ	<0.0068	U	
		VMP-13-10.5-043015	4/30/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-13-10.5-072715	7/27/2015	<0.018	J	U	<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		0.0025	J		<0.029	U		<0.0073	U	
		VMP-13-10.5-110215	11/2/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0031	J		<0.024	U		<0.0062	U	
		VMP-13-10.5-012616	1/26/2016	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.0029	J		<0.026	U		<0.0066	U	
		VMP-13-10.5-050316	5/3/2016	0.00066	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		0.0012	J		<0.028	U	UJ	<0.0071	U	
		VMP-13-10.5-072916	7/29/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		0.0026	J		<0.03	U		<0.0075	U	
		VMP-13-10.5-110216	11/2/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		0.0038	J		<0.03	U		<0.0075	U	
		VMP-13-10.5-013017	1/30/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.0018	J		<0.024	U		<0.006	U	
		VMP-13-10.5-042817	4/28/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0013	J		<0.025	U		<0.0063	U	
		VMP-13-10.5-072717	7/27/2017	0.0049	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.00091	J		<0.024	U		<0.0059	U	
		VMP-13-10.5-103017	10/30/2017	0.0053	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0022	J		<0.023	U		<0.0058	U	
		VMP-13-10.5-012918	1/29/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		0.00096	J		<0.023	U		<0.0057	U	
		VMP-13-10.5-033018	3/30/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-13-10.5-041018	4/10/2018	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-13-10.5-072418	7/24/2018	0.0019	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		0.0013	J		<0.025	U		<0.0063	U	
		VMP-13-10.5-102918	10/29/2018	0.00088	J		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		0.0019	J		<0.022	U		<0.0054	U	
		VMP-13-10.5-012919	1/29/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		0.001	J		<0.023	U		<0.0057	U	
		VMP-13-10.5-050119	5/1/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-13-10.5-073119	7/31/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-13-10.5-102819	10/28/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		0.0022	J		<0.026	U		<0.0066	U	
		VMP-13-10.5-012420	1/24/2020	<0.018	U		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-13-10.5-042320	4/23/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-13-10.5-073020	7/30/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-13-10.5-110220	11/2/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0011	J		<0.024	U		<0.0062	U	
		VMP-13-10.5-012721	1/27/2021	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.00052	J		<0.022	U	UJ	<0.0055	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		0.0016	J		<0.029	U	UJ	<0.0073	U	
		VMP-13-21.5-043015	4/30/2015	<0.019	J	U	<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		<0.0075	U		<0.032	U		<0.0079	U	
		VMP-13-21.5-072715	7/27/2015	0.0035	J		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-13-21.5-112515	11/25/2015	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-13-21.5-012616	1/26/2016	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0048	J		<0.026	U		<0.0065	U	
		VMP-13-21.5-050316	5/3/2016	0.00098	J		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		0.0014	J		<0.03	U	UJ	<0.0075	U	
		VMP-13-21.5-050316-DUP	5/3/2016	0.0018	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		0.0014	J		<0.03	U	UJ	<0.0074	U	
		VMP-13-21.5-072916	7/29/2016	0.0036	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		0.0018	J		<0.03	U		<0.0075	U	
		VMP-13-21.5-110216	11/2/2016	0.0032	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0019	J		<0.026	U		<0.0065	U	
		VMP-13-21.5-013017	1/30/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.0032	J		<0.024	U		<0.0059	U	
		VMP-13-21.5-042817	4/28/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		0.0028	J		<0.025	U		<0.0064	U	
		VMP-13-21.5-072717	7/27/2017	0.0049	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		0.0012	J		<0.024	U		<0.006	U	
		VMP-13-21.5-103017	10/30/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		0.0031	J		<0.023	U		<0.0058	U	
		VMP-13-21.5-012918	1/29/2018	0.0018	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.0011	J		<0.022	U		<0.0055	U	
		VMP-13-21.5-033018	3/30/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00089	J		<0.024	U		<0.0062	U	
		VMP-13-21.5-041018	4/10/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00067	J		<0.024	U		<0.0062	U	
		VMP-13-21.5-072418	7/24/2018	0.002	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-13-21.5-102918	10/29/2018	0.0013	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		0.0015	J		<0.025	U		<0.0062	U	
		VMP-13-21.5-020419	2/4/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.0021	J		<0.024	U		<0.0059	U	
		VMP-13-21.5-050119	5/1/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-13-21.5-073119	7/31/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-13-21.5-102819	10/28/2019	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-13-21.5-012420	1/24/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-13-21.5-042320	4/23/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-13-21.5-073020	7/30/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		0.00063	J		<0.026	U		<0.0064	U	
		VMP-13-21.5-110220	11/2/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		0.00096	J		<0.026	U		<0.0066	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.001	J		<0.026	U		<0.0066	U	
		VMP-13-21.5-012721	1/27/2021	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.001	J		<0.023	U	UJ	<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0034	J		<0.0053	U		<0.0053	U	
		VMP-13-10.5-043015	4/30/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0023	J		<0.0057	U		<0.0057	U	
		VMP-13-10.5-072715	7/27/2015	0.0024	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0023	J		<0.0057	U		<0.0057	U	
		VMP-13-10.5-110215	11/2/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0029	J		<0.0048	U		<0.0048	U	
		VMP-13-10.5-012616	1/26/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0038	J		<0.0051	U		<0.0051	U	
		VMP-13-10.5-050316	5/3/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-13-10.5-072916	7/29/2016	0.0026	J		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0041	J		<0.0058	U		<0.0058	U	
		VMP-13-10.5-110216	11/2/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0022	J		<0.0058	U		<0.0058	U	
		VMP-13-10.5-013017	1/30/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-13-10.5-042817	4/28/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U	
		VMP-13-10.5-072717	7/27/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0031	J		<0.0046	U		<0.0046	U	
		VMP-13-10.5-103017	10/30/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0024	J		<0.0046	U		<0.0046	U	
		VMP-13-10.5-012918	1/29/2018	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0029	J		<0.0045	U		<0.0045	U	
		VMP-13-10.5-033018	3/30/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-13-10.5-041018	4/10/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-13-10.5-072418	7/24/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0029	J		<0.0049	U		<0.0049	U	
		VMP-13-10.5-102918	10/29/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0025	J		<0.0042	U		<0.0042	U	
		VMP-13-10.5-012919	1/29/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0023	J		<0.0044	U		<0.0044	U	
		VMP-13-10.5-050119	5/1/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-13-10.5-073119	7/31/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-13-10.5-102819	10/28/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0039	J		<0.0052	U		<0.0052	U	
		VMP-13-10.5-012420	1/24/2020	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0073	U		<0.006	U		<0.0059	U	
		VMP-13-10.5-042320	4/23/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-13-10.5-073020	7/30/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0019	J		<0.0052	U		<0.0052	U	
		VMP-13-10.5-110220	11/2/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0027	J		<0.0048	U		<0.0048	U	
		VMP-13-10.5-012721	1/27/2021	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0023	J		<0.0043	U		<0.0043	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.003	J		<0.0057	U		<0.0057	U	
		VMP-13-21.5-043015	4/30/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		0.0021	J		<0.0062	U		<0.0062	U	
		VMP-13-21.5-072715	7/27/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0025	J		<0.0059	U		<0.0059	U	
		VMP-13-21.5-112515	11/25/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0037	J		<0.005	U		<0.005	U	
		VMP-13-21.5-012616	1/26/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0038	J		<0.0051	U		<0.0051	U	
		VMP-13-21.5-050316	5/3/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-13-21.5-072916	7/29/2016	0.0012	J		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.003	J		<0.0058	U		<0.0058	U	
		VMP-13-21.5-110216	11/2/2016	0.0033	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-13-21.5-013017	1/30/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0026	J		<0.0046	U		<0.0046	U	
		VMP-13-21.5-042817	4/28/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-13-21.5-072717	7/27/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0024	J		<0.0047	U		<0.0047	U	
		VMP-13-21.5-103017	10/30/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0027	J		<0.0045	U		<0.0045	U	
		VMP-13-21.5-012918	1/29/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0031	J		<0.0043	U		<0.0043	U	
		VMP-13-21.5-033018	3/30/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-13-21.5-041018	4/10/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-13-21.5-072418	7/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.003	J		<0.005	U		<0.005	U	
		VMP-13-21.5-102918	10/29/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-13-21.5-020419	2/4/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-13-21.5-050119	5/1/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0053	U		<0.0053	U	
		VMP-13-21.5-073119	7/31/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-13-21.5-102819	10/28/2019	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0032	J		<0.0054	U		<0.0054	U	
		VMP-13-21.5-012420	1/24/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-13-21.5-042320	4/23/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0022	J		<0.0047	U		<0.0047	U	
		VMP-13-21.5-073020	7/30/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0023	J		<0.005	U		<0.005	U	
		VMP-13-21.5-110220	11/2/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0027	J		<0.0052	U		<0.0052	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0026	J		<0.0051	U		<0.0051	U	
		VMP-13-21.5-012721	1/27/2021	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0027	J		<0.0046	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-13-10.5-043015	4/30/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-13-10.5-072715	7/27/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-13-10.5-110215	11/2/2015	<0.0047	U		<0.0047	U		<0.0047	U		0.0034	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-10.5-012616	1/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-13-10.5-050316	5/3/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-13-10.5-072916	7/29/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-13-10.5-110216	11/2/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-13-10.5-013017	1/30/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-10.5-042817	4/28/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-13-10.5-072717	7/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		0.0045	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-10.5-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-10.5-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-13-10.5-033018	3/30/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-10.5-041018	4/10/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-13-10.5-072418	7/24/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-13-10.5-102918	10/29/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-13-10.5-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-13-10.5-050119	5/1/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-13-10.5-073119	7/31/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-10.5-102819	10/28/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	ND,UJ	UJ	<0.0058	U		<0.0058	U		<0.018	U	
		VMP-13-10.5-012420	1/24/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-13-10.5-042320	4/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-10.5-073020	7/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-13-10.5-110220	11/2/2020	0.0012	J		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-10.5-012721	1/27/2021	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-13-21.5-043015	4/30/2015	<0.0061	U		<0.0061	U		<0.0061	U		<0.053	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-13-21.5-072715	7/27/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-13-21.5-112515	11/25/2015	<0.0049	U		<0.0049	U		<0.0049	U		0.0034	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-21.5-012616	1/26/2016	<0.005	U		<0.005	U		<0.005	U		0.0047	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-13-21.5-050316	5/3/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-13-21.5-072916	7/29/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-13-21.5-110216	11/2/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-13-21.5-013017	1/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		0.0017	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-21.5-042817	4/28/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-21.5-072717	7/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		0.0062	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-13-21.5-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-21.5-012918	1/29/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-13-21.5-033018	3/30/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-21.5-041018	4/10/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-21.5-072418	7/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-21.5-102918	10/29/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-21.5-020419	2/4/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-21.5-050119	5/1/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-13-21.5-073119	7/31/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-13-21.5-102819	10/28/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	ND,UJ	UJ	<0.006	U		<0.006	U		<0.019	U	
		VMP-13-21.5-012420	1/24/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-13-21.5-042320	4/23/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-13-21.5-073020	7/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-13-21.5-110220	11/2/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-13-21.5-012721	1/27/2021	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.0099	ND,UJ	UJ	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-13-10.5-043015	4/30/2015	<0.011	U		<0.0061	U		0.0019	J		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-13-10.5-072715	7/27/2015	0.0092	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		0.002	J		<0.06	U		0.0049	J	
		VMP-13-10.5-110215	11/2/2015	0.18			0.0012	J		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-13-10.5-012616	1/26/2016	0.0056	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		0.0011	J	
		VMP-13-10.5-050316	5/3/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-13-10.5-072916	7/29/2016	0.0095	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		0.004	J		<0.062	U		0.0096		
		VMP-13-10.5-110216	11/2/2016	0.009	J		0.013			0.0023	J		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-13-10.5-013017	1/30/2017	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-10.5-042817	4/28/2017	0.0038	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-13-10.5-072717	7/27/2017	0.023			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-10.5-103017	10/30/2017	0.015			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-13-10.5-012918	1/29/2018	0.028			<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-13-10.5-033018	3/30/2018	0.0058	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.00077	J		<0.051	U		<0.0042	U	
		VMP-13-10.5-041018	4/10/2018	0.01			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		0.001	J		<0.056	U		0.00061	J	
		VMP-13-10.5-072418	7/24/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		0.003	J		<0.052	U		<0.0043	U	
		VMP-13-10.5-102918	10/29/2018	0.0047	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-13-10.5-012919	1/29/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		0.0055		
		VMP-13-10.5-050119	5/1/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U	UJ	<0.0088	U		<0.0052	U		<0.054	U		0.0025	J	
		VMP-13-10.5-073119	7/31/2019	<0.0093	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-13-10.5-102819	10/28/2019	<0.0096	U	UJ	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-13-10.5-012420	1/24/2020	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-13-10.5-042320	4/23/2020	0.0075	J	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		0.00073	J	
		VMP-13-10.5-073020	7/30/2020	0.0071	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-13-10.5-110220	11/2/2020	0.012			<0.0052	U		<0.0058	U		0.0029	J		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-13-10.5-012721	1/27/2021	0.021			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.01	ND,UJ	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-13-21.5-043015	4/30/2015	<0.012	U		<0.0067	U		<0.0075	U		<0.012	U		<0.011	U		<0.0063	U		<0.065	U		0.0013	J	
		VMP-13-21.5-072715	7/27/2015	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-13-21.5-112515	11/25/2015	0.012			0.0032	J		0.0057	J		<0.0094	U		<0.0086	U		0.0019	J		<0.052	U		0.0028	J	
		VMP-13-21.5-012616	1/26/2016	0.008	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		0.0016	J	
		VMP-13-21.5-050316	5/3/2016	<0.011	U		<0.0063	U		0.0011	J		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.011	U		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-13-21.5-072916	7/29/2016	0.01	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		0.0031	J	
		VMP-13-21.5-110216	11/2/2016	0.027			0.23			0.023			<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		0.0026	J	
		VMP-13-21.5-013017	1/30/2017	0.0068	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-21.5-042817	4/28/2017	0.0051	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		0.0014	J		<0.052	U		<0.0043	U	
		VMP-13-21.5-072717	7/27/2017	0.0064	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		0.0018	J	
		VMP-13-21.5-103017	10/30/2017	0.0068	J		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-13-21.5-012918	1/29/2018	0.015			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-13-21.5-033018	3/30/2018	0.023			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.0022	J		<0.051	U		0.0028	J	
		VMP-13-21.5-041018	4/10/2018	0.012			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.0016	J		<0.051	U		0.0022	J	
		VMP-13-21.5-072418	7/24/2018	0.02			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-13-21.5-102918	10/29/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		0.0024	J	
		VMP-13-21.5-020419	2/4/2019	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-21.5-050119	5/1/2019	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U	UJ	<0.0091	U		<0.0053	U		<0.055	U		0.0047		
		VMP-13-21.5-073119	7/31/2019	<0.0092	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-13-21.5-102819	10/28/2019	<0.01	U	UJ	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-13-21.5-012420	1/24/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-13-21.5-042320	4/23/2020	<0.0088	ND,UJ	UJ	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-13-21.5-073020	7/30/2020	0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-13-21.5-110220	11/2/2020	0.014			<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-13-21.5-012721	1/27/2021	<0.021	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					0.0079	J		<0.0065	U	
		VMP-13-10.5-043015	4/30/2015	0.0016	J		<0.017	U		<0.0069	U		0.0022	J		<0.0051	U					0.0027	J		<0.0069	U	
		VMP-13-10.5-072715	7/27/2015	0.0034	J		0.0086	J		<0.0069	U		0.0023	J		<0.0051	U					0.015			<0.0069	U	
		VMP-13-10.5-110215	11/2/2015	0.0029	J	J	0.0024	J		<0.0058	U		0.0032	J		<0.0043	U					0.044			<0.0058	U	
		VMP-13-10.5-012616	1/26/2016	<0.021	U		0.0012	J		<0.0062	U		<0.0052	U		<0.0046	U					0.0053	J		<0.0062	U	
		VMP-13-10.5-050316	5/3/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					0.0027	J		<0.0067	U	
		VMP-13-10.5-072916	7/29/2016	<0.024	U		0.018			<0.0071	U		<0.0059	U		<0.021	U					0.0094	J		<0.0071	U	
		VMP-13-10.5-110216	11/2/2016	<0.024	U		<0.017	U		<0.0071	U		0.0021	J		<0.021	U		<0.015	U		0.019			<0.0071	U	
		VMP-13-10.5-013017	1/30/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-13-10.5-042817	4/28/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-13-10.5-072717	7/27/2017	<0.019	U		0.0054	J		<0.0056	U		<0.0047	U		<0.016	U					0.017			<0.0056	U	
		VMP-13-10.5-103017	10/30/2017	<0.018	U		0.0053	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-13-10.5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					0.0046	J		<0.0054	U	
		VMP-13-10.5-033018	3/30/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U		<0.012	U		0.0015	J		<0.0058	U	
		VMP-13-10.5-041018	4/10/2018	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		0.011	J		<0.0065	U	
		VMP-13-10.5-072418	7/24/2018	<0.02	U		0.0031	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-13-10.5-102918	10/29/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-13-10.5-012919	1/29/2019	<0.018	U		0.0046	J		<0.0054	U		<0.0045	U		<0.016	U					0.006	J		<0.0054	U	
		VMP-13-10.5-050119	5/1/2019	<0.021	U		0.013	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-13-10.5-073119	7/31/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0075	J		<0.006	U	
		VMP-13-10.5-102819	10/28/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-13-10.5-012420	1/24/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					0.028			<0.0072	U	
		VMP-13-10.5-042320	4/23/2020	<0.019	U		0.0034	J		<0.0058	U		<0.0049	U		<0.017	U					0.0059	J	J	<0.0058	U	
		VMP-13-10.5-073020	7/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					0.0062	J		<0.0064	U	
		VMP-13-10.5-110220	11/2/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.019			0.00058	J	
		VMP-13-10.5-012721	1/27/2021	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					0.007	J		<0.0053	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					0.0063	J		<0.0069	U	
		VMP-13-21.5-043015	4/30/2015	0.0016	J		0.0014	J		<0.0075	U		0.0031	J		<0.0055	U					0.0015	J		<0.0075	U	
		VMP-13-21.5-072715	7/27/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0052	U					0.016			<0.0072	U	
		VMP-13-21.5-112515	11/25/2015	<0.02	U		0.005	J		0.0045	J		<0.005	U		<0.0044	U					0.005	J		0.013		
		VMP-13-21.5-012616	1/26/2016	<0.021	U		0.0019	J		<0.0062	U		<0.0052	U		<0.0045	U					0.012	J		<0.0062	U	
		VMP-13-21.5-050316	5/3/2016	<0.024	U		0.0032	J		<0.0071	U		<0.0059	U		<0.0052	U					0.0032	J		<0.0071	U	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.024	U		0.002	J		<0.0071	U		<0.0059	U		<0.0052	U					0.0033	J		<0.0071	U	
		VMP-13-21.5-072916	7/29/2016	<0.024	U		<0.017	U		0.0015	J		<0.0059	U		<0.021	U					0.015			<0.0071	U	
		VMP-13-21.5-110216	11/2/2016	0.0037	J		0.013	J		0.013			0.015			<0.018	U		0.025			0.036			0.014		
		VMP-13-21.5-013017	1/30/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.0015	J		<0.0056	U	
		VMP-13-21.5-042817	4/28/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-13-21.5-072717	7/27/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					0.0028	J		<0.0057	U	
		VMP-13-21.5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-13-21.5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					0.0039	J		<0.0053	U	
		VMP-13-21.5-033018	3/30/2018	<0.019	U		0.0013	J		<0.0058	U		<0.0049	U		<0.017	U		<0.012	U		0.0064	J		<0.0058	U	
		VMP-13-21.5-041018	4/10/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U		<0.012	U		0.021			<0.0058	U	
		VMP-13-21.5-072418	7/24/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-13-21.5-102918	10/29/2018	<0.02	U		0.0064	J		<0.0059	U		<0.0049	U		<0.017	U					0.0032	J		<0.0059	U	
		VMP-13-21.5-020419	2/4/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.0039	J		<0.0056	U	
		VMP-13-21.5-050119	5/1/2019	<0.021	U		0.016			<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-13-21.5-073119	7/31/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0058	J		<0.006	U	
		VMP-13-21.5-102819	10/28/2019	<0.022	U		0.017			<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-13-21.5-012420	1/24/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					0.024			<0.0067	U	
		VMP-13-21.5-042320	4/23/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					0.0031	J	J	<0.0057	U	
		VMP-13-21.5-073020	7/30/2020	<0.02	U		0.002	J		<0.0061	U		<0.0051	U		<0.018	U					0.0056	J		<0.0061	U	
		VMP-13-21.5-110220	11/2/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					0.0068	J		<0.0063	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.0098	J		<0.0062	U	
		VMP-13-21.5-012721	1/27/2021	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					0.009	J		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		0.001	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-10.5-043015	4/30/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-13-10.5-072715	7/27/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-13-10.5-110215	11/2/2015	<0.0051	U		<0.0082	U		<0.0081	U		0.0055			0.0039	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-10.5-012616	1/26/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-13-10.5-050316	5/3/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		0.00047	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-13-10.5-072916	7/29/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		0.0065			<0.043	U		<0.0079	U		<0.0079	U	
		VMP-13-10.5-110216	11/2/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		0.0045	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-13-10.5-013017	1/30/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.00082	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-13-10.5-042817	4/28/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-10.5-072717	7/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.0011	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-10.5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		0.0028	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-10.5-012918	1/29/2018	<0.0047	U		<0.0076	U		0.0025	J		<0.0032	U		0.00075	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-13-10.5-033018	3/30/2018	<0.0051	U		<0.0082	U		0.0021	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-10.5-041018	4/10/2018	<0.0056	U		<0.009	U		0.00095	J		<0.0039	U		0.00034	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-10.5-072418	7/24/2018	<0.0052	U		<0.0084	U		<0.0083	U		0.0042			<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-10.5-102918	10/29/2018	<0.0045	U		<0.0072	U		0.0017	J		<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-13-10.5-012919	1/29/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-13-10.5-050119	5/1/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-13-10.5-073119	7/31/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-13-10.5-102819	10/28/2019	<0.0054	U		<0.0088	U		0.0026	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-13-10.5-012420	1/24/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-13-10.5-042320	4/23/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-10.5-073020	7/30/2020	<0.0088	U		<0.0089	U		0.0013	J		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-13-10.5-110220	11/2/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00045	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-10.5-012721	1/27/2021	<0.0046	U		<0.0073	U		0.0027	J		<0.0032	U		0.00087	J		<0.032	U		<0.0058	U		<0.0058	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-13-21.5-043015	4/30/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-13-21.5-072715	7/27/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-13-21.5-112515	11/25/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-13-21.5-012616	1/26/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-13-21.5-050316	5/3/2016	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		0.0013	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		0.00078	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-13-21.5-072916	7/29/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-13-21.5-110216	11/2/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		0.066			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-13-21.5-013017	1/30/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-21.5-042817	4/28/2017	<0.0052	U		<0.0084	U		0.0014	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-13-21.5-072717	7/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-13-21.5-103017	10/30/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		0.0014	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-21.5-012918	1/29/2018	<0.0046	U		<0.0073	U		0.0018	J		<0.0032	U		0.00071	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-13-21.5-033018	3/30/2018	<0.0051	U		<0.0082	U		0.002	J		<0.0035	U		0.001	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-21.5-041018	4/10/2018	<0.0051	U		<0.0082	U		0.0015	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-21.5-072418	7/24/2018	<0.0052	U		<0.0084	U		0.0024	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-13-21.5-102918	10/29/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00086	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-13-21.5-020419	2/4/2019	<0.0049	U		<0.0079	U		0.0015	J		<0.0034	U		0.0011	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-21.5-050119	5/1/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		0.0022	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-13-21.5-073119	7/31/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-21.5-102819	10/28/2019	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-21.5-012420	1/24/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-13-21.5-042320	4/23/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-13-21.5-073020	7/30/2020	<0.0085	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-13-21.5-110220	11/2/2020	<0.0054	U		<0.0088	U		0.0029	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0054	U		<0.0087	U		0.0031	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-13-21.5-012721	1/27/2021	<0.0048	U		<0.0078	U		0.006	J		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-13	10.5 ft	VMP-13-10.5-020515	2/5/2015	<0.0071	U		0.0015	J		<0.0065	J	U	<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-13-10.5-043015	4/30/2015	<0.0076	J	U	<0.0079	U		0.0021	J		<0.0069	U		0.0022	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-13-10.5-072715	7/27/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.048			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-13-10.5-110215	11/2/2015	<0.0064	U		0.0016	J		0.0011	J		<0.0058	U		0.003	J		<0.003	U		0.0034	J		0.0008	J	
		VMP-13-10.5-012616	1/26/2016	<0.0068	U		0.002	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-13-10.5-050316	5/3/2016	<0.0073	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-13-10.5-072916	7/29/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.022			<0.0037	U		0.0035	J		<0.0063	U	
		VMP-13-10.5-110216	11/2/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.018			<0.0037	U		0.047			0.012		
		VMP-13-10.5-013017	1/30/2017	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		0.0019	J		<0.005	U	
		VMP-13-10.5-042817	4/28/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-13-10.5-072717	7/27/2017	<0.0062	U		0.002	J		<0.0056	U		<0.0056	U		0.024			<0.0029	U		0.002	J		<0.005	U	
		VMP-13-10.5-103017	10/30/2017	<0.006	U		0.0017	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-10.5-012918	1/29/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-13-10.5-033018	3/30/2018	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		0.00098	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-13-10.5-041018	4/10/2018	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-13-10.5-072418	7/24/2018	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-13-10.5-102918	10/29/2018	<0.0056	U		0.0013	J		<0.0052	U		<0.0052	U		0.0071			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-13-10.5-012919	1/29/2019	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0022	J		<0.0028	U		0.0008	J		<0.0048	U	
		VMP-13-10.5-050119	5/1/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-13-10.5-073119	7/31/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-13-10.5-102819	10/28/2019	<0.0069	U		0.0018	J		<0.0063	U		<0.0063	U		0.0015	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-10.5-012420	1/24/2020	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-13-10.5-042320	4/23/2020	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-13-10.5-073020	7/30/2020	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-10.5-110220	11/2/2020	0.0013	J		0.0016	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-13-10.5-012721	1/27/2021	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
	21.5 ft	VMP-13-21.5-020515	2/5/2015	<0.0076	U		0.0014	J		<0.0069	J	U	<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-13-21.5-043015	4/30/2015	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		0.007	J		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-13-21.5-072715	7/27/2015	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		0.0017	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-13-21.5-112515	11/25/2015	<0.0066	U		0.0017	J		0.014			<0.006	J	U	0.031			<0.0031	U		0.0015	J		<0.0053	U	
		VMP-13-21.5-012616	1/26/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0036	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-13-21.5-050316	5/3/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.00067	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-13-21.5-050316-DUP	5/3/2016	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		0.00065	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-13-21.5-072916	7/29/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0017	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-13-21.5-110216	11/2/2016	<0.0068	U		0.0013	J		0.022			0.0067			0.033			<0.0032	U		0.76			0.16		
		VMP-13-21.5-013017	1/30/2017	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-13-21.5-042817	4/28/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.00097	J		<0.0053	U	
		VMP-13-21.5-072717	7/27/2017	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0011	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-13-21.5-103017	10/30/2017	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-13-21.5-012918	1/29/2018	<0.0058	U		0.0013	J		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-13-21.5-033018	3/30/2018	<0.0064	U		0.001	J		<0.0058	U		<0.0058	U		0.0038	J		<0.003	U		0.00071	J		0.00025	J	
		VMP-13-21.5-041018	4/10/2018	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		0.00065	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-13-21.5-072418	7/24/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0019	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-13-21.5-102918	10/29/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.016			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-13-21.5-020419	2/4/2019	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-13-21.5-050119	5/1/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0033	J	J	<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-21.5-073119	7/31/2019	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-13-21.5-102819	10/28/2019	<0.0071	U		0.0018	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-13-21.5-012420	1/24/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-13-21.5-042320	4/23/2020	<0.0063	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-13-21.5-073020	7/30/2020	<0.0067	U		0.00087	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-13-21.5-110220	11/2/2020	<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-21.5-110220-DUP	11/2/2020	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-13-21.5-012721	1/27/2021	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.00068	J		<0.0029	U		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	0.0068	J		0.0034	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-13-29.5-043015	4/30/2015	0.022	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		0.02		
		VMP-13-29.5-072715	7/27/2015	0.041			<0.0049	J	U	<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		0.0087	J	
		VMP-13-29.5-072715-DUP	7/27/2015	0.021	J		0.0028	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		0.0058	J		0.0066	J	
		VMP-13-29.5-110215	11/2/2015	0.021	J		<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.0054	J	
		VMP-13-29.5-110215-DUP	11/2/2015	0.02	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.0069	J		0.0056	J	
		VMP-13-29.5-012616	1/26/2016	0.033			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0056	J		0.0082	J	
		VMP-13-29.5-050316	5/3/2016	0.012	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0051	J	
		VMP-13-29.5-082616-R	8/29/2016	0.042			0.0042			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0059	J		0.0044	J	
		VMP-13-29.5-110216	11/2/2016	0.021	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-13-29.5-110216-Dup	11/2/2016	0.022	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0049	J	
		VMP-13-29.5-013017	1/30/2017	0.01	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0029	J	
		VMP-13-29.5-042817	4/28/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0032	J	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.026	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.0019	J	
		VMP-13-29.5-072717	7/27/2017	0.0082	J		0.83			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-13-29.5-103017	10/30/2017	<0.028	J	U	0.0081			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.03			<0.014	U	
		VMP-13-29.5-012918	1/29/2018	0.012	J		0.00032	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0058	J		<0.013	U	
		VMP-13-29.5-012918-DUP	1/29/2018	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-13-29.5-033018	3/30/2018	0.0086	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0018	J	
		VMP-13-29.5-033018-DUP	3/30/2018	0.0097	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0029	J	
		VMP-13-29.5-041018	4/10/2018	0.002	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-13-29.5-072418	7/24/2018	0.019	J		0.00067	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0036	J	
		VMP-13-29.5-102918	10/29/2018	0.0096	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-13-29.5-102918-DUP	10/29/2018	0.011	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-13-29.5-012919	1/29/2019	0.0062	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-13-29.5-050119	5/1/2019	0.019	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-13-29.5-102819	10/28/2019	0.02	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		0.01	J	
		VMP-13-29.5-042320	4/23/2020	0.01	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-13-29.5-073020	7/30/2020	0.023	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0016	J	
		VMP-13-29.5-012721	1/27/2021	0.0099	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.001	J		<0.025	U	UJ	<0.0063	U	
		VMP-13-29.5-043015	4/30/2015	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-13-29.5-072715	7/27/2015	0.003	J		<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		0.0033	J		<0.032	U		<0.0079	U	
		VMP-13-29.5-072715-DUP	7/27/2015	<0.019	J	U	<0.0097	U		<0.0071	U		<0.013	U		<0.016	U		0.0028	J		<0.032	U		<0.008	U	
		VMP-13-29.5-110215	11/2/2015	<0.013	J	U	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.0035	J		<0.022	U		<0.0055	U	
		VMP-13-29.5-110215-DUP	11/2/2015	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0034	J		<0.023	U		<0.0058	U	
		VMP-13-29.5-012616	1/26/2016	<0.014	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0029	J		<0.024	U		<0.006	U	
		VMP-13-29.5-050316	5/3/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		0.0009	J		<0.027	U	UJ	<0.0068	U	
		VMP-13-29.5-082616-R	8/29/2016	0.0052	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		0.0022	J		<0.023	U		<0.0058	U	
		VMP-13-29.5-110216	11/2/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		0.0035	J		<0.028	U		<0.007	U	
		VMP-13-29.5-110216-Dup	11/2/2016	0.0074	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		0.0032	J		<0.027	U		<0.0067	U	
		VMP-13-29.5-013017	1/30/2017	0.00088	J		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		0.0027	J		<0.023	ND,UJ	UJ	<0.0059	U	
		VMP-13-29.5-042817	4/28/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0019	J		<0.024	U		<0.0061	U	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.014	J	U	<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		0.0018	J		<0.023	U		<0.0058	U	
		VMP-13-29.5-072717	7/27/2017	0.002	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0018	J		<0.027	U		<0.0067	U	
		VMP-13-29.5-103017	10/30/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		0.0042	J		<0.025	U		<0.0062	U	
		VMP-13-29.5-012918	1/29/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		0.0018	J		<0.023	U		<0.0057	U	
		VMP-13-29.5-012918-DUP	1/29/2018	0.0018	J		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		0.0024	J		<0.024	U		<0.0059	U	
		VMP-13-29.5-033018	3/30/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		0.0011	J		<0.024	U		<0.006	U	
		VMP-13-29.5-033018-DUP	3/30/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.00084	J		<0.025	U		<0.0063	U	
		VMP-13-29.5-041018	4/10/2018	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.0009	J		<0.026	U		<0.0065	U	
		VMP-13-29.5-072418	7/24/2018	0.021			<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0016	J		<0.024	U		<0.0062	U	
		VMP-13-29.5-102918	10/29/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0028	J		<0.024	U		<0.0061	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.0031	J		<0.026	U		<0.0065	U	
		VMP-13-29.5-012919	1/29/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		0.0021	J		<0.022	U		<0.0056	U	
		VMP-13-29.5-050119	5/1/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-13-29.5-102819	10/28/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		0.0021	J		<0.025	U		<0.0062	U	
		VMP-13-29.5-042320	4/23/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-13-29.5-073020	7/30/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-13-29.5-012721	1/27/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U	UJ	<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0026	J		<0.0049	U		<0.0049	U	
		VMP-13-29.5-043015	4/30/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		0.0022	J		<0.0059	U		<0.0059	U	
		VMP-13-29.5-072715	7/27/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		0.0029	J		<0.0062	U		<0.0062	U	
		VMP-13-29.5-072715-DUP	7/27/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		0.0021	J		<0.0062	U		<0.0062	U	
		VMP-13-29.5-110215	11/2/2015	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0032	J		<0.0043	U		<0.0043	U	
		VMP-13-29.5-110215-DUP	11/2/2015	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0027	J		<0.0046	U		<0.0046	U	
		VMP-13-29.5-012616	1/26/2016	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.004	J		<0.0047	U		<0.0047	U	
		VMP-13-29.5-050316	5/3/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0019	J		<0.0053	U		<0.0053	U	
		VMP-13-29.5-082616-R	8/29/2016	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0028	J		<0.0045	U		<0.0045	U	
		VMP-13-29.5-110216	11/2/2016	0.0011	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0024	J		<0.0054	U		<0.0054	U	
		VMP-13-29.5-110216-Dup	11/2/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0026	J		<0.0052	U		<0.0052	U	
		VMP-13-29.5-013017	1/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-13-29.5-042817	4/28/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0023	J		<0.0045	U		<0.0045	U	
		VMP-13-29.5-072717	7/27/2017	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0028	J		<0.0053	U		<0.0053	U	
		VMP-13-29.5-103017	10/30/2017	0.013			<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.003	J		<0.0048	U		<0.0048	U	
		VMP-13-29.5-012918	1/29/2018	0.0017	J		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0042	J		<0.0045	U		<0.0045	U	
		VMP-13-29.5-012918-DUP	1/29/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0029	J		<0.0046	U		<0.0046	U	
		VMP-13-29.5-033018	3/30/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0025	J		<0.0047	U		<0.0047	U	
		VMP-13-29.5-033018-DUP	3/30/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0022	J		<0.0049	U		<0.0049	U	
		VMP-13-29.5-041018	4/10/2018	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.003	J		<0.0051	U		<0.0051	U	
		VMP-13-29.5-072418	7/24/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0027	J		<0.0048	U		<0.0048	U	
		VMP-13-29.5-102918	10/29/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0027	J		<0.0048	U		<0.0048	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0024	J		<0.0051	U		<0.0051	U	
		VMP-13-29.5-012919	1/29/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0026	J		<0.0044	U		<0.0044	U	
		VMP-13-29.5-050119	5/1/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0053	U		<0.0053	U	
		VMP-13-29.5-102819	10/28/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.004	J		<0.0049	U		<0.0049	U	
		VMP-13-29.5-042320	4/23/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0027	J		<0.0053	U		<0.0053	U	
		VMP-13-29.5-073020	7/30/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0053	U		<0.0053	U	
		VMP-13-29.5-012721	1/27/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-13-29.5-043015	4/30/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-13-29.5-072715	7/27/2015	<0.0061	U		<0.0061	U		<0.0061	U		0.0032	J		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-13-29.5-072715-DUP	7/27/2015	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-13-29.5-110215	11/2/2015	<0.0042	U		<0.0042	U		<0.0042	U		0.0039	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-13-29.5-110215-DUP	11/2/2015	<0.0045	U		<0.0045	U		<0.0045	U		0.0044	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-29.5-012616	1/26/2016	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-13-29.5-050316	5/3/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-13-29.5-082616-R	8/29/2016	<0.0044	U		<0.0044	U		<0.0044	U		0.0029	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-29.5-110216	11/2/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-13-29.5-110216-Dup	11/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-13-29.5-013017	1/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-29.5-042817	4/28/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-13-29.5-072717	7/27/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-13-29.5-103017	10/30/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-29.5-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-13-29.5-012918-DUP	1/29/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-13-29.5-033018	3/30/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-13-29.5-033018-DUP	3/30/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-13-29.5-041018	4/10/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-13-29.5-072418	7/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-13-29.5-102918	10/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-13-29.5-012919	1/29/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-13-29.5-050119	5/1/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-13-29.5-102819	10/28/2019	<0.0048	U		0.013			<0.0048	U		<0.042	U		<0.0056	ND,UJ	UJ	<0.0055	U		<0.0055	U		<0.017	U	
		VMP-13-29.5-042320	4/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-13-29.5-073020	7/30/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-13-29.5-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		0.0033	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.0092	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		0.0017	J	
		VMP-13-29.5-043015	4/30/2015	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-13-29.5-072715	7/27/2015	<0.012	J	U	<0.0067	U		<0.0075	U		<0.012	U		<0.011	U		0.0017	J		<0.065	U		<0.0054	U	UJ
		VMP-13-29.5-072715-DUP	7/27/2015	0.0093	J		0.0026	J		<0.0076	U		<0.012	U		<0.011	U		0.006	J		<0.066	U		0.011		J
		VMP-13-29.5-110215	11/2/2015	<0.0081	U		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		0.0011	J		<0.046	U		<0.0038	U	
		VMP-13-29.5-110215-DUP	11/2/2015	0.0067	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-13-29.5-012616	1/26/2016	0.22			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		0.0033	J		<0.05	J	U	0.0038	J	
		VMP-13-29.5-050316	5/3/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-13-29.5-082616-R	8/29/2016	0.016			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		0.0014	J		<0.048	U		0.0019	J	
		VMP-13-29.5-110216	11/2/2016	0.0091	J		0.007			0.0017	J		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		0.00092	J	
		VMP-13-29.5-110216-Dup	11/2/2016	0.014			0.0068			0.0016	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		0.00094	J	
		VMP-13-29.5-013017	1/30/2017	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		0.00088	J		<0.048	U		0.0012	J	
		VMP-13-29.5-042817	4/28/2017	0.0084	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		0.0015	J	
		VMP-13-29.5-042817-DUP	4/28/2017	0.0092			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-13-29.5-072717	7/27/2017	0.014			<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-13-29.5-103017	10/30/2017	<0.009	U		0.0029	J		0.0016	J		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-13-29.5-012918	1/29/2018	0.011			<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		0.0018	J		<0.047	U		<0.0039	U	
		VMP-13-29.5-012918-DUP	1/29/2018	0.0062	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-13-29.5-033018	3/30/2018	0.0087	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		0.0012	J		<0.05	U		0.0016	J	
		VMP-13-29.5-033018-DUP	3/30/2018	0.011			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		0.0014	J		<0.052	U		0.0015	J	
		VMP-13-29.5-041018	4/10/2018	0.0055	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		0.0016	J	
		VMP-13-29.5-072418	7/24/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-13-29.5-102918	10/29/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-13-29.5-012919	1/29/2019	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-13-29.5-050119	5/1/2019	<0.0098	U		<0.0057	U		<0.0064	U		<0.01	U	UJ	<0.0091	U		<0.0053	U		<0.056	U		0.0025	J	
		VMP-13-29.5-102819	10/28/2019	0.02		J	0.0015	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-13-29.5-042320	4/23/2020	0.004	J	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-13-29.5-073020	7/30/2020	0.0056	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-13-29.5-012721	1/27/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					0.0067	J		<0.006	U	
		VMP-13-29.5-043015	4/30/2015	0.0028	J		<0.017	U		<0.0072	U		0.0037	J		<0.0053	U					0.0053	J		<0.0072	U	
		VMP-13-29.5-072715	7/27/2015	<0.025	U		<0.018	U		<0.0075	U		<0.0063	U		<0.0055	U					0.011	J		<0.0075	U	
		VMP-13-29.5-072715-DUP	7/27/2015	<0.025	U		0.0056	J		<0.0076	U		<0.0063	U		<0.0056	U					0.0062	J		<0.0076	U	
		VMP-13-29.5-110215	11/2/2015	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.0038	U					0.0044	J		<0.0053	U	
		VMP-13-29.5-110215-DUP	11/2/2015	<0.018	U		0.0021	J		<0.0055	U		<0.0046	U		<0.004	U					0.0057	J		<0.0055	U	
		VMP-13-29.5-012616	1/26/2016	<0.019	U		0.0019	J		<0.0058	U		0.0027	J		<0.0042	U					0.0056	J		<0.0058	U	
		VMP-13-29.5-050316	5/3/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					0.0087	J		<0.0065	U	
		VMP-13-29.5-082616-R	8/29/2016	<0.018	U		0.013	J		<0.0055	J	U	0.001	J		<0.016	U					0.05			<0.0055	U	
		VMP-13-29.5-110216	11/2/2016	<0.022	U		<0.016	U		0.0016	J		<0.0055	U		0.0038	J		0.018			0.016			0.0044	J	
		VMP-13-29.5-110216-Dup	11/2/2016	<0.021	U		<0.015	U		0.0014	J		<0.0053	U		0.0031	J		0.014			0.016			0.0044	J	
		VMP-13-29.5-013017	1/30/2017	<0.018	U		0.0023	J		<0.0056	U		<0.0046	U		0.0012	J					0.0038	J		<0.0056	U	
		VMP-13-29.5-042817	4/28/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.018	U		0.0019	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-13-29.5-072717	7/27/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-13-29.5-103017	10/30/2017	<0.02	U		0.01	J		<0.0059	U		<0.0049	U		0.022						<0.012	U		<0.0059	U	
		VMP-13-29.5-012918	1/29/2018	<0.018	U		0.014			<0.0054	U		<0.0045	U		0.0072	J					0.0051	J		<0.0054	U	
		VMP-13-29.5-012918-DUP	1/29/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		0.0087	J					0.0014	J		<0.0056	U	
		VMP-13-29.5-033018	3/30/2018	<0.019	U		0.0011	J		<0.0057	U		<0.0048	U		0.0027	J		<0.012	U		0.0028	J		<0.0057	U	
		VMP-13-29.5-033018-DUP	3/30/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		0.0027	J		<0.013	U		0.0046	J		<0.0059	U	
		VMP-13-29.5-041018	4/10/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		0.0053	J		<0.013	U		0.01	J		<0.0062	U	
		VMP-13-29.5-072418	7/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-13-29.5-102918	10/29/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-13-29.5-012919	1/29/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		0.0015	J	
		VMP-13-29.5-050119	5/1/2019	<0.021	U		0.0085	J		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-13-29.5-102819	10/28/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.0027	J		<0.0059	U	
		VMP-13-29.5-042320	4/23/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.004	J	J	0.0012	J	
		VMP-13-29.5-073020	7/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					0.0065	J		<0.0064	U	
		VMP-13-29.5-012721	1/27/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.006	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-29.5-043015	4/30/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-13-29.5-072715	7/27/2015	<0.0065	U		<0.01	U		0.0027	J		<0.0045	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-13-29.5-072715-DUP	7/27/2015	<0.0066	U		<0.01	U		<0.01	U		<0.0045	U		0.0016	J		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-13-29.5-110215	11/2/2015	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-13-29.5-110215-DUP	11/2/2015	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-29.5-012616	1/26/2016	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	J	U	<0.0064	U		<0.0064	U	
		VMP-13-29.5-050316	5/3/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-29.5-082616-R	8/29/2016	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		0.01			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-29.5-110216	11/2/2016	<0.0057	U		0.0069	J		<0.0091	U		<0.004	U		0.0031	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-13-29.5-110216-Dup	11/2/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		0.0031	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-13-29.5-013017	1/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.00041	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-29.5-042817	4/28/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-13-29.5-072717	7/27/2017	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		0.0025	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-13-29.5-103017	10/30/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0012	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-29.5-012918	1/29/2018	<0.0047	U		<0.0076	U		0.002	J		<0.0032	U		0.0029	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-13-29.5-012918-DUP	1/29/2018	<0.0048	U		<0.0078	U		0.002	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-13-29.5-033018	3/30/2018	<0.005	U		<0.008	U		0.0019	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-13-29.5-033018-DUP	3/30/2018	<0.0052	U		<0.0083	U		0.0016	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-29.5-041018	4/10/2018	<0.0054	U		<0.0087	U		0.00077	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-13-29.5-072418	7/24/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00077	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-13-29.5-102918	10/29/2018	<0.005	U		<0.0081	U		0.0019	J		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-13-29.5-012919	1/29/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-13-29.5-050119	5/1/2019	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-13-29.5-102819	10/28/2019	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0058			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-13-29.5-042320	4/23/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.0013	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-13-29.5-073020	7/30/2020	<0.0088	U		<0.0089	U		0.0014	J		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-13-29.5-012721	1/27/2021	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		0.00048	J		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	29.5 ft	VMP-13-29.5-020515	2/5/2015	<0.0065	U		0.0022	J		<0.006	J	U	<0.006	U		0.0035	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-13-29.5-043015	4/30/2015	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-13-29.5-072715	7/27/2015	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		0.002	J		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-13-29.5-072715-DUP	7/27/2015	<0.0083	U		<0.0086	U		<0.0076	U		<0.0076	U		0.0096			<0.0039	U		0.0028	J		<0.0067	U	
		VMP-13-29.5-110215	11/2/2015	<0.0058	U		0.0015	J		0.001	J		<0.0053	U		0.0012	J		<0.0027	U		0.00099	J		<0.0046	U	
		VMP-13-29.5-110215-DUP	11/2/2015	<0.006	U		0.002	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-29.5-012616	1/26/2016	<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		0.0013	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-13-29.5-050316	5/3/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0019	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-13-29.5-082616-R	8/29/2016	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		0.0024	J		<0.0028	U		<0.0048	J	U	<0.0048	U	
		VMP-13-29.5-110216	11/2/2016	0.0038	J		<0.0076	U		0.0042	J		<0.0066	U		0.011			<0.0034	U		0.023			0.0058		
		VMP-13-29.5-110216-Dup	11/2/2016	<0.0069	U		<0.0072	U		0.0042	J		<0.0063	U		0.01			<0.0033	U		0.018			0.0044	J	
		VMP-13-29.5-013017	1/30/2017	<0.0061	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-13-29.5-042817	4/28/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	J	U	<0.003	U		<0.0051	U		<0.0051	U	
		VMP-13-29.5-042817-DUP	4/28/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	J	U	<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-13-29.5-072717	7/27/2017	<0.007	U		0.0017	J		<0.0064	U		<0.0064	U		0.0029	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-29.5-103017	10/30/2017	<0.0064	U		0.0017	J		<0.0059	U		<0.0059	U		<0.0056	J	U	<0.003	U		0.0025	J		<0.0052	U	
		VMP-13-29.5-012918	1/29/2018	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0016	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-13-29.5-012918-DUP	1/29/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0018	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-13-29.5-033018	3/30/2018	<0.0063	U		0.00094	J		<0.0057	U		<0.0057	U		0.0028	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-13-29.5-033018-DUP	3/30/2018	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		0.0028	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-13-29.5-041018	4/10/2018	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		0.00051	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-13-29.5-072418	7/24/2018	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-13-29.5-102918	10/29/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-13-29.5-102918-DUP	10/29/2018	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-13-29.5-012919	1/29/2019	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		0.0012	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-13-29.5-050119	5/1/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-13-29.5-102819	10/28/2019	0.13			0.0019	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0052			0.0022	J	
		VMP-13-29.5-042320	4/23/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0012	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-13-29.5-073020	7/30/2020	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-13-29.5-012721	1/27/2021	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	0.0088	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-14-5-043015	4/30/2015	0.02	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.024		
		VMP-14-5-072915	7/29/2015	0.074			<0.004	J	U	<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.012	J	
		VMP-14-5-110215	11/2/2015	0.023	J		<0.004	J	U	<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.0065	J	
		VMP-14-5-012616	1/26/2016	0.0096	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0019	J	
		VMP-14-5-050316	5/3/2016	0.01	J		<0.0046	U		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		0.0034	J	
		VMP14-5-072916	7/29/2016	0.039			<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.0052	J	
		VMP-14-5-110216	11/2/2016	0.023	J		0.0018	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-14-5-013017	1/30/2017	0.02	J		<0.0043	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.0027	J		0.0069	J	
		VMP-14-5-050117	5/1/2017	<0.027	J	U	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0053	J		<0.014	U	
		VMP-14-5-071917	7/19/2017	0.031			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0054	J		0.0048	J	
		VMP-14-5-103017	10/30/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-14-5-012518	1/25/2018	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.008	J		<0.014	U	
		VMP-14-5-041718	4/17/2018	0.03	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0048	J	
		VMP-14-5-072518	7/25/2018	0.069			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0078	J	
		VMP-14-5-102918	10/29/2018	0.01	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-5-012919	1/29/2019	0.012	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0071	J		0.0021	J	
		VMP-14-5-012919-DUP	1/29/2019	0.02	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.004	J	
		VMP-14-5-050119	5/1/2019	0.046			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.003	J	
		VMP-14-5-073019	7/30/2019	0.13			0.0017	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0086	J	
		VMP-14-5-073019-DUP	7/30/2019	0.02	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-5-102819	10/28/2019	<0.031	U		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-5-012820	1/28/2020	<0.034	ND,UJ	UJ	<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-14-5-042320	4/23/2020	0.0099	J	J	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-14-5-073020	7/30/2020	0.016	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0015	J	
		VMP-14-5-110220	11/2/2020	0.014	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0022	J	
		VMP-14-5-012721	1/27/2021	0.018	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		0.0032	J	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	0.0078	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-14-11.5-043015	4/30/2015	0.016	J		<0.0048	J	U	<0.01	U		<0.016	U		<0.059	U		<0.0033	U		<0.014	U		0.024		
		VMP-14-11.5-072915	7/29/2015	0.082			0.0028	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.005	J		0.015	J	
		VMP-14-11.5-110215	11/2/2015	0.04			<0.0041	J	U	<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.0042	J	
		VMP-14-11.5-012616	1/26/2016	0.013	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.0023	J	
		VMP-14-11.5-050316	5/3/2016	0.012	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		0.0027	J	
		VMP-14-11.5-072916	7/29/2016	0.02	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		0.0037	J	
		VMP-14-11.5-110216	11/2/2016	0.012	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.01	J		<0.017	U	
		VMP-14-11.5-013017	1/30/2017	0.031			<0.0039	J	U	<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0025	J		0.002	J	
		VMP-14-11.5-050117	5/1/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0056	J		0.0057	J	
		VMP-14-11.5-071917	7/19/2017	0.02	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-11.5-103017	10/30/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-14-11.5-012518	1/25/2018	0.015	J		0.00096	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.0062	J		0.004	J	
		VMP-14-11.5-041718	4/17/2018	0.026	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.01	J	
		VMP-14-11.5-072518	7/25/2018	0.052			<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.014	J	
		VMP-14-11.5-102918	10/29/2018	0.014	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-14-11.5-012919	1/29/2019	0.025	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-14-11.5-050119	5/1/2019	0.014	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0034	J	
		VMP-14-11.5-073019	7/30/2019	0.022	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-11.5-102819	10/28/2019	<0.033	U		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-14-11.5-012820	1/28/2020	0.0071	J	J	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-11.5-042320	4/23/2020	0.016	J	J	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-14-11.5-073020	7/30/2020	0.0072	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0021	J		<0.015	U	
		VMP-14-11.5-073020-DUP	7/30/2020	0.02	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		0.0026	J	
		VMP-14-11.5-110220	11/2/2020	0.037			<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.0046	J	
		VMP-14-11.5-012721	1/27/2021	0.016	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U	UJ	<0.0068	U	
		VMP-14-5-043015	4/30/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-14-5-072915	7/29/2015	0.0054	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	J	U	0.004	J		<0.0064	U	
		VMP-14-5-110215	11/2/2015	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-14-5-012616	1/26/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-14-5-050316	5/3/2016	0.00068	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.029	U	UJ	<0.0074	U	
		VMP14-5-072916	7/29/2016	0.0026	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-14-5-110216	11/2/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-14-5-013017	1/30/2017	0.0047	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	ND,UJ	UJ	<0.007	U	
		VMP-14-5-050117	5/1/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-14-5-071917	7/19/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-14-5-103017	10/30/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-14-5-012518	1/25/2018	0.002	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-14-5-041718	4/17/2018	0.0072	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-5-072518	7/25/2018	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-14-5-102918	10/29/2018	0.0012	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-14-5-012919	1/29/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-14-5-012919-DUP	1/29/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-14-5-050119	5/1/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-14-5-073019	7/30/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-14-5-073019-DUP	7/30/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-14-5-102819	10/28/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-5-012820	1/28/2020	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-14-5-042320	4/23/2020	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-14-5-073020	7/30/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.00097	J		<0.026	U		<0.0066	U	
		VMP-14-5-110220	11/2/2020	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-14-5-012721	1/27/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U	UJ	<0.0062	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0064	U	
		VMP-14-11.5-043015	4/30/2015	<0.019	J	U	<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-14-11.5-072915	7/29/2015	0.005	J		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		0.0045	J		<0.0076	U	
		VMP-14-11.5-110215	11/2/2015	<0.016	J	U	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-11.5-012616	1/26/2016	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-14-11.5-050316	5/3/2016	0.00075	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-14-11.5-072916	7/29/2016	0.0011	J		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-14-11.5-110216	11/2/2016	0.0055	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-14-11.5-013017	1/30/2017	0.00062	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-14-11.5-050117	5/1/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-14-11.5-071917	7/19/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-14-11.5-103017	10/30/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-14-11.5-012518	1/25/2018	0.0069	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-14-11.5-041718	4/17/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-11.5-072518	7/25/2018	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-11.5-102918	10/29/2018	0.0012	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-14-11.5-012919	1/29/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-14-11.5-050119	5/1/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-11.5-073019	7/30/2019	0.0074	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-14-11.5-102819	10/28/2019	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-14-11.5-012820	1/28/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-14-11.5-042320	4/23/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-14-11.5-073020	7/30/2020	0.0047	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		0.00095	J		<0.029	U		<0.0073	U	
		VMP-14-11.5-110220	11/2/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-14-11.5-012721	1/27/2021	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0029	J		<0.0054	U		<0.0054	U	
		VMP-14-5-043015	4/30/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0024	J		<0.0053	U		<0.0053	U	
		VMP-14-5-072915	7/29/2015	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U	
		VMP-14-5-110215	11/2/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0028	J		<0.005	U		<0.005	U	
		VMP-14-5-012616	1/26/2016	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0025	J		<0.0055	U		<0.0055	U	
		VMP-14-5-050316	5/3/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.007	U		<0.0058	U		<0.0058	U	
		VMP14-5-072916	7/29/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-14-5-110216	11/2/2016	0.0027	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0026	J		<0.0056	U		<0.0056	U	
		VMP-14-5-013017	1/30/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0022	J		<0.0055	U		<0.0055	U	
		VMP-14-5-050117	5/1/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0023	J		<0.0046	U		<0.0046	U	
		VMP-14-5-071917	7/19/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0023	J		<0.0051	U		<0.0051	U	
		VMP-14-5-103017	10/30/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0016	J		<0.0045	U		<0.0045	U	
		VMP-14-5-012518	1/25/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0028	J		<0.0048	U		<0.0048	U	
		VMP-14-5-041718	4/17/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0031	J		<0.0052	U		<0.0052	U	
		VMP-14-5-072518	7/25/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0026	J		<0.0053	U		<0.0053	U	
		VMP-14-5-102918	10/29/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0028	J		<0.005	U		<0.005	U	
		VMP-14-5-012919	1/29/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0028	J		<0.0045	U		<0.0045	U	
		VMP-14-5-012919-DUP	1/29/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0024	J		<0.0045	U		<0.0045	U	
		VMP-14-5-050119	5/1/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.006	U		<0.005	U		<0.005	U	
		VMP-14-5-073019	7/30/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0023	J		<0.0051	U		<0.0051	U	
		VMP-14-5-073019-DUP	7/30/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0022	J		<0.005	U		<0.005	U	
		VMP-14-5-102819	10/28/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0038	J		<0.0052	U		<0.0052	U	
		VMP-14-5-012820	1/28/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-14-5-042320	4/23/2020	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0024	J		<0.0046	U		<0.0046	U	
		VMP-14-5-073020	7/30/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0023	J		<0.0051	U		<0.0051	U	
		VMP-14-5-110220	11/2/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-14-5-012721	1/27/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0032	J		<0.005	U		<0.005	U	
		VMP-14-11.5-043015	4/30/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		0.0021	J		<0.0061	U		<0.0061	U	
		VMP-14-11.5-072915	7/29/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		0.0022	J		<0.006	U		<0.0059	U	
		VMP-14-11.5-110215	11/2/2015	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0026	J		<0.0052	U		<0.0052	U	
		VMP-14-11.5-012616	1/26/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0017	J		<0.005	U		<0.005	U	
		VMP-14-11.5-050316	5/3/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-14-11.5-072916	7/29/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		0.0025	J		<0.006	U		<0.006	U	
		VMP-14-11.5-110216	11/2/2016	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0026	J		<0.0058	U		<0.0058	U	
		VMP-14-11.5-013017	1/30/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0031	J		<0.005	U		<0.005	U	
		VMP-14-11.5-050117	5/1/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0021	J		<0.0044	U		<0.0044	U	
		VMP-14-11.5-071917	7/19/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-14-11.5-103017	10/30/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0029	J		<0.0046	U		<0.0046	U	
		VMP-14-11.5-012518	1/25/2018	0.00096	J		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.003	J		<0.0046	U		<0.0046	U	
		VMP-14-11.5-041718	4/17/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0031	J		<0.0052	U		<0.0052	U	
		VMP-14-11.5-072518	7/25/2018	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0028	J		<0.0053	U		<0.0053	U	
		VMP-14-11.5-102918	10/29/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0028	J		<0.0047	U		<0.0047	U	
		VMP-14-11.5-012919	1/29/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-14-11.5-050119	5/1/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-14-11.5-073019	7/30/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0024	J		<0.005	U		<0.005	U	
		VMP-14-11.5-102819	10/28/2019	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0023	J		<0.0057	U		<0.0057	U	
		VMP-14-11.5-012820	1/28/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-14-11.5-042320	4/23/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0021	J		<0.0048	U		<0.0048	U	
		VMP-14-11.5-073020	7/30/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0023	J		<0.0057	U		<0.0057	U	
		VMP-14-11.5-110220	11/2/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0027	J		<0.005	U		<0.005	U	
		VMP-14-11.5-012721	1/27/2021	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0021	J		<0.005	U		<0.005	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-14-5-043015	4/30/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-14-5-072915	7/29/2015	<0.0049	U		<0.0049	U		<0.0049	U		0.0044	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-5-110215	11/2/2015	<0.0049	U		<0.0049	U		<0.0049	U		0.0057	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-5-012616	1/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-14-5-050316	5/3/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP14-5-072916	7/29/2016	<0.0055	U		<0.0055	U		<0.0055	U		0.0018	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-14-5-110216	11/2/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-14-5-013017	1/30/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-14-5-050117	5/1/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-5-071917	7/19/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-5-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-14-5-012518	1/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-14-5-041718	4/17/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-5-072518	7/25/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-14-5-102918	10/29/2018	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-5-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-14-5-012919-DUP	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-14-5-050119	5/1/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-5-073019	7/30/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		0.0049	J	
		VMP-14-5-073019-DUP	7/30/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-5-102819	10/28/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	ND,UJ	UJ	<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-5-012820	1/28/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-14-5-042320	4/23/2020	<0.0046	U		<0.0046	U		<0.0046	U		0.0016	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-5-073020	7/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-5-110220	11/2/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-14-5-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-11.5-043015	4/30/2015	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-14-11.5-072915	7/29/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-14-11.5-110215	11/2/2015	<0.0051	U		<0.0051	U		<0.0051	U		0.0057	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-14-11.5-012616	1/26/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-11.5-050316	5/3/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-14-11.5-072916	7/29/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-14-11.5-110216	11/2/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-14-11.5-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-11.5-050117	5/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-14-11.5-071917	7/19/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-11.5-103017	10/30/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-11.5-012518	1/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		0.0016	J		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-11.5-041718	4/17/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-11.5-072518	7/25/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-14-11.5-102918	10/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		0.0037	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-14-11.5-012919	1/29/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-11.5-050119	5/1/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-14-11.5-073019	7/30/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-11.5-102819	10/28/2019	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	ND,UJ	UJ	<0.0064	U		<0.0064	U		<0.02	U	
		VMP-14-11.5-012820	1/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-11.5-042320	4/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		0.021	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-14-11.5-073020	7/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		0.0027	J		<0.0057	U		<0.0056	U		<0.0056	U		0.0029	J	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-14-11.5-110220	11/2/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-11.5-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		0.0058	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	0.0073	J	J	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-14-5-043015	4/30/2015	0.0064	J		<0.0057	U		<0.0064	U		<0.01	J	U	<0.0092	U		<0.0054	U		<0.056	U		0.0016	J	
		VMP-14-5-072915	7/29/2015	0.012			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-5-110215	11/2/2015	0.028			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-5-012616	1/26/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-14-5-050316	5/3/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0058	U		<0.061	U		<0.005	U	
		VMP14-5-072916	7/29/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-14-5-110216	11/2/2016	0.013			0.018			0.0033	J		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		0.0017	J	
		VMP-14-5-013017	1/30/2017	0.007	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		0.001	J	
		VMP-14-5-050117	5/1/2017	0.026			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-14-5-071917	7/19/2017	0.013			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-14-5-103017	10/30/2017	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-14-5-012518	1/25/2018	0.0031	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-14-5-041718	4/17/2018	0.0091	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-14-5-072518	7/25/2018	0.0097	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-14-5-102918	10/29/2018	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-5-012919	1/29/2019	0.0096			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-14-5-012919-DUP	1/29/2019	0.0077	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-14-5-050119	5/1/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U	UJ	<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-5-073019	7/30/2019	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-14-5-073019-DUP	7/30/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-5-102819	10/28/2019	<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-14-5-012820	1/28/2020	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-14-5-042320	4/23/2020	0.0047	J	J	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-14-5-073020	7/30/2020	0.011			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-14-5-110220	11/2/2020	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	J	U	<0.0042	U	
		VMP-14-5-012721	1/27/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.0093	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-11.5-043015	4/30/2015	0.0044	J		<0.0066	U		<0.0074	U		<0.012	J	U	<0.01	U		<0.0062	U		<0.064	U		0.0015	J	
		VMP-14-11.5-072915	7/29/2015	0.016			0.0014	J		<0.0072	U		<0.011	U		<0.01	U		0.0019	J		<0.063	U		<0.0052	U	
		VMP-14-11.5-110215	11/2/2015	0.0052	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-14-11.5-012616	1/26/2016	0.0042	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		0.0013	J		<0.052	U		<0.0043	U	
		VMP-14-11.5-050316	5/3/2016	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-14-11.5-072916	7/29/2016	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-14-11.5-110216	11/2/2016	0.0066	J		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		0.001	J	
		VMP-14-11.5-013017	1/30/2017	0.0046	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-11.5-050117	5/1/2017	0.045			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-14-11.5-071917	7/19/2017	0.023			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-14-11.5-103017	10/30/2017	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-14-11.5-012518	1/25/2018	0.028			0.00099	J		<0.0056	U		<0.0088	U		<0.008	U		0.0038	J		<0.049	U		<0.004	U	
		VMP-14-11.5-041718	4/17/2018	0.021			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-14-11.5-072518	7/25/2018	0.0076	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-14-11.5-102918	10/29/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-14-11.5-012919	1/29/2019	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-14-11.5-050119	5/1/2019	0.017			<0.0053	U		<0.006	U		<0.0093	U	UJ	<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-11.5-073019	7/30/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-11.5-102819	10/28/2019	<0.01	U	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-14-11.5-012820	1/28/2020	<0.0097	U		0.0043	J		<0.0063	U		<0.0098	U		<0.009	U		0.0084			<0.055	U		0.0071		
		VMP-14-11.5-042320	4/23/2020	0.015	J0	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-14-11.5-073020	7/30/2020	0.011			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-11.5-073020-DUP	7/30/2020	0.01	J		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-14-11.5-110220	11/2/2020	0.013			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-11.5-012721	1/27/2021	<0.023	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					0.081			<0.0065	U	
		VMP-14-5-043015	4/30/2015	0.0036	J		<0.015	U		<0.0064	U		0.0037	J		<0.0047	J	U				0.0088	J		<0.0064	U	
		VMP-14-5-072915	7/29/2015	0.0045	J		0.0036	J		<0.0061	U		<0.0051	U		<0.0045	U					0.01	J		<0.0061	U	
		VMP-14-5-110215	11/2/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					0.012	J		<0.0061	U	
		VMP-14-5-012616	1/26/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-14-5-050316	5/3/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					0.0064	J		<0.007	U	
		VMP14-5-072916	7/29/2016	<0.023	U		0.0053	J		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-14-5-110216	11/2/2016	<0.023	U		0.0046	J		<0.0068	U		0.0026	J		<0.02	U		0.00074	J		0.034			<0.0068	U	
		VMP-14-5-013017	1/30/2017	0.0012	J		0.0018	J		<0.0067	U		<0.0056	U		<0.02	U					0.003	J		<0.0067	U	
		VMP-14-5-050117	5/1/2017	<0.019	U		0.0028	J		<0.0056	U		<0.0047	U		<0.016	U					0.0054	J		<0.0056	U	
		VMP-14-5-071917	7/19/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.017			<0.0062	U	
		VMP-14-5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-14-5-012518	1/25/2018	<0.019	U		0.0062	J		<0.0058	U		<0.0048	U		<0.017	U					0.0016	J		<0.0058	U	
		VMP-14-5-041718	4/17/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-14-5-072518	7/25/2018	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.0062	J		<0.0065	U	
		VMP-14-5-102918	10/29/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-14-5-012919	1/29/2019	<0.018	U		0.0048	J		<0.0055	U		<0.0046	U		<0.016	U					0.0028	J		<0.0055	U	
		VMP-14-5-012919-DUP	1/29/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					0.0029	J		<0.0055	U	
		VMP-14-5-050119	5/1/2019	<0.02	U		0.0037	J		<0.006	U		<0.005	U		<0.018	U					0.014			<0.006	U	
		VMP-14-5-073019	7/30/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.02			<0.0062	U	
		VMP-14-5-073019-DUP	7/30/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.0096	J		<0.0061	U	
		VMP-14-5-102819	10/28/2019	<0.021	U		0.009	J		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-14-5-012820	1/28/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					<0.014	U		<0.0071	U	
		VMP-14-5-042320	4/23/2020	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.012		J	<0.0056	U	
		VMP-14-5-073020	7/30/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.0048	J		0.00071	J	
		VMP-14-5-110220	11/2/2020	<0.019	U		<0.014	U		<0.0058	U		0.00086	J		<0.017	U					0.0052	J		<0.0058	J	U
		VMP-14-5-012721	1/27/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					0.01	J		<0.0059	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					0.0092	J		<0.006	U	
		VMP-14-11.5-043015	4/30/2015	0.0022	J		0.0013	J		<0.0074	U		0.0048	J		<0.0054	U					0.0058	J		<0.0074	U	
		VMP-14-11.5-072915	7/29/2015	0.0033	J		0.0059	J		<0.0072	U		0.0021	J		<0.0053	U					0.019			<0.0072	U	
		VMP-14-11.5-110215	11/2/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.0047	U					0.0084	J		<0.0064	U	
		VMP-14-11.5-012616	1/26/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					0.0048	J		<0.006	U	
		VMP-14-11.5-050316	5/3/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					0.0017	J		<0.0068	U	
		VMP-14-11.5-072916	7/29/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					0.0049	J		<0.0072	U	
		VMP-14-11.5-110216	11/2/2016	<0.024	U		0.0052	J		<0.0071	U		<0.0059	U		<0.021	U		<0.015	U		0.038			<0.0071	U	
		VMP-14-11.5-013017	1/30/2017	<0.02	U		0.0033	J		<0.006	U		<0.005	U		<0.018	U					0.0031	J		<0.006	U	
		VMP-14-11.5-050117	5/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					0.0027	J		<0.0054	U	
		VMP-14-11.5-071917	7/19/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.034			<0.0062	U	
		VMP-14-11.5-103017	10/30/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-14-11.5-012518	1/25/2018	<0.019	U		0.062			<0.0056	U		<0.0047	U		<0.016	U					0.021			<0.0056	U	
		VMP-14-11.5-041718	4/17/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-14-11.5-072518	7/25/2018	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					0.0056	J		<0.0064	U	
		VMP-14-11.5-102918	10/29/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-14-11.5-012919	1/29/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.0029	J		<0.0056	U	
		VMP-14-11.5-050119	5/1/2019	<0.02	U		0.0041	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-14-11.5-073019	7/30/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.0074	J		<0.0061	U	
		VMP-14-11.5-102819	10/28/2019	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-14-11.5-012820	1/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U		<0.0063	U	
		VMP-14-11.5-042320	4/23/2020	<0.019	U		0.003	J		<0.0058	U		<0.0049	U		<0.017	U					0.0095	J	J	<0.0058	U	
		VMP-14-11.5-073020	7/30/2020	<0.02	U		0.0021	J		<0.0061	U		<0.0051	U		<0.018	U					0.0089	J		<0.0061	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					0.012	J		<0.007	U	
		VMP-14-11.5-110220	11/2/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.026			<0.0061	U	
		VMP-14-11.5-012721	1/27/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0053	J		0.0027	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-14-5-043015	4/30/2015	<0.0056	U		<0.009	U		0.0034	J		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-14-5-072915	7/29/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.0013	J		<0.037	U	UJ	<0.0068	U		<0.0068	U	
		VMP-14-5-110215	11/2/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		0.0014	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-5-012616	1/26/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-14-5-050316	5/3/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP14-5-072916	7/29/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		0.0018	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-14-5-110216	11/2/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.01			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-14-5-013017	1/30/2017	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		0.0007	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-14-5-050117	5/1/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-14-5-071917	7/19/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-14-5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-14-5-012518	1/25/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.0014	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-14-5-041718	4/17/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U		<0.007	U		<0.007	U	
		VMP-14-5-072518	7/25/2018	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-14-5-102918	10/29/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-5-012919	1/29/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		0.001	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-14-5-012919-DUP	1/29/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-14-5-050119	5/1/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-14-5-073019	7/30/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		0.0041	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-14-5-073019-DUP	7/30/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-5-102819	10/28/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-14-5-012820	1/28/2020	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-14-5-042320	4/23/2020	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-14-5-073020	7/30/2020	<0.0086	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-14-5-110220	11/2/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-14-5-012721	1/27/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-14-11.5-043015	4/30/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-14-11.5-072915	7/29/2015	<0.0063	U		<0.01	U		<0.01	U		0.0024	J		0.0047	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-14-11.5-110215	11/2/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-14-11.5-012616	1/26/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-14-11.5-050316	5/3/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-14-11.5-072916	7/29/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0056	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-14-11.5-110216	11/2/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		0.0029	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-14-11.5-013017	1/30/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.00078	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-14-11.5-050117	5/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		0.0013	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-14-11.5-071917	7/19/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-14-11.5-103017	10/30/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-14-11.5-012518	1/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.049			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-14-11.5-041718	4/17/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-14-11.5-072518	7/25/2018	<0.0055	U		<0.0089	U		0.0086	J		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-14-11.5-102918	10/29/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-14-11.5-012919	1/29/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-14-11.5-050119	5/1/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-11.5-073019	7/30/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-11.5-102819	10/28/2019	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-14-11.5-012820	1/28/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		0.017			<0.038	U		<0.007	U		<0.007	U	
		VMP-14-11.5-042320	4/23/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.0066			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-14-11.5-073020	7/30/2020	<0.0084	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0096	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-14-11.5-110220	11/2/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-11.5-012721	1/27/2021	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-14	5 ft	VMP-14-5-020615	2/6/2015	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-14-5-043015	4/30/2015	<0.007	J	U	<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-14-5-072915	7/29/2015	<0.0067	U		<0.007	U		0.0018	J		<0.0061	U		<0.0058	U		<0.0032	U		0.0023	J		<0.0054	U	
		VMP-14-5-110215	11/2/2015	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0025	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-5-012616	1/26/2016	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-14-5-050316	5/3/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP14-5-072916	7/29/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-14-5-110216	11/2/2016	<0.0075	U		<0.0078	U		0.0027	J		<0.0068	U		0.0055	J		<0.0036	U		0.056			0.014		
		VMP-14-5-013017	1/30/2017	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-14-5-050117	5/1/2017	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		0.0018	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-14-5-071917	7/19/2017	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		0.0063			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-14-5-103017	10/30/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-5-012518	1/25/2018	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-14-5-041718	4/17/2018	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.0028	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-5-072518	7/25/2018	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-14-5-102918	10/29/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0008	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-5-012919	1/29/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-5-012919-DUP	1/29/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-5-050119	5/1/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-5-073019	7/30/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0017	J		<0.0055	U	
		VMP-14-5-073019-DUP	7/30/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-5-102819	10/28/2019	<0.0069	U		0.0017	J		<0.0063	U		<0.0063	U		0.0017	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-5-012820	1/28/2020	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-14-5-042320	4/23/2020	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-14-5-073020	7/30/2020	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		0.00049	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-14-5-110220	11/2/2020	<0.0064	U		0.0011	J		<0.0058	J	U	<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-14-5-012721	1/27/2021	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
	11.5 ft	VMP-14-11.5-020615	2/6/2015	<0.0066	U		0.0017	J		<0.006	J	U	<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-11.5-043015	4/30/2015	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0066	U		<0.0066	U	
		VMP-14-11.5-072915	7/29/2015	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		0.0029	J		<0.0064	U	
		VMP-14-11.5-110215	11/2/2015	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-11.5-012616	1/26/2016	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-11.5-050316	5/3/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0055	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-14-11.5-072916	7/29/2016	0.002	J		<0.0083	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-14-11.5-110216	11/2/2016	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0094			<0.0037	U		0.0026	J		<0.0062	U	
		VMP-14-11.5-013017	1/30/2017	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0026	J		<0.0053	U	
		VMP-14-11.5-050117	5/1/2017	<0.0059	U		0.0011	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-14-11.5-071917	7/19/2017	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-14-11.5-103017	10/30/2017	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-14-11.5-012518	1/25/2018	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		0.0027	J		0.0013	J	
		VMP-14-11.5-041718	4/17/2018	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.002	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-11.5-072518	7/25/2018	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-11.5-102918	10/29/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-14-11.5-012919	1/29/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-14-11.5-050119	5/1/2019	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-11.5-073019	7/30/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-11.5-102819	10/28/2019	<0.0076	U		0.0029	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-14-11.5-012820	1/28/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.011			<0.0033	U		0.016			0.006		
		VMP-14-11.5-042320	4/23/2020	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-14-11.5-073020	7/30/2020	<0.0067	U		0.00091	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-11.5-073020-DUP	7/30/2020	<0.0076	U		0.0012	J		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-14-11.5-110220	11/2/2020	<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-11.5-012721	1/27/2021	<0.0066	U		<0.0069	U		0.0011	J		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	0.0074	J		0.0083			<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-14-20-043015	4/30/2015	0.023	J		0.0022	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.01	J	
		VMP-14-20-072915	7/29/2015	0.04			0.003	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.01	J	
		VMP-14-20-110215	11/2/2015	0.026	J		0.0061			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0042	J		0.0056	J	
		VMP-14-20-012616	1/26/2016	0.016	J		0.0024	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.003	J	
		VMP-14-20-050416	5/4/2016	0.028	J		0.00085	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0082	J	
		VMP-14-20-072916	7/29/2016	0.027	J		0.0015	J		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		0.0045	J	
		VMP-14-20-022717	2/27/2017	0.85			0.029	J		<0.18	U		<0.28	U		<0.42	U		<0.06	U		<0.26	U		0.21	J	
		VMP-14-20-050117	5/1/2017	0.14			0.038			<0.074	U		<0.11	U		<0.17	U		<0.024	U		<0.1	U		0.047	J	
		VMP-14-20-071917	7/19/2017	0.06	J		0.017	J		<0.086	U		<0.13	U		<0.2	U		<0.028	U		<0.12	U		<0.15	U	
		VMP-14-20-103017	10/30/2017	<0.027		U	0.01			<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0032	J		0.0077	J	
		VMP-14-20-012518	1/25/2018	0.026	J		0.0044			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0052	J	
		VMP-14-20-041718	4/17/2018	0.022	J		0.0055			<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.0061	J	
		VMP-14-20-072518	7/25/2018	0.037			0.0027	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0051	J	
		VMP-14-20-102918	10/29/2018	0.014	J		0.0045			<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.005	J		<0.013	U	
		VMP-14-20-020419	2/4/2019	0.028	J		0.0045			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0039	J	
		VMP-14-20-050119	5/1/2019	0.038			0.0016	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0063	J	
		VMP-14-20-073019	7/30/2019	0.016	J		0.0016	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-20-102819	10/28/2019	<0.032	U		0.0015	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-14-20-042320	4/23/2020	0.015	J	J	0.0037	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0049	J		<0.016	U	
		VMP-14-20-073020	7/30/2020	0.016	J		0.0014	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-14-20-110220	11/2/2020	0.019	J		0.0011	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0067	J		0.0016	J	
		VMP-14-20-012721	1/27/2021	0.0061	J		0.00086	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0038	J		<0.014	U	
	29 ft	VMP-14-29-020615	2/6/2015	0.0083	J		0.064			<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-14-29-043015	4/30/2015	0.045			0.032			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0076	J		0.019		
		VMP-14-29-043015-DUP	4/30/2015	0.032			0.038			<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		0.0072	J		0.014		
		VMP-14-29-072915	7/29/2015	0.05			0.0051			<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		0.0067	J	
		VMP-14-29-110215	11/2/2015	0.043			0.0018	J		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		0.01	J		0.0062	J	
		VMP-14-29-012616	1/26/2016	0.012	J		0.002	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.31			<0.015	U	
		VMP-14-29-012616-DUP	1/26/2016	0.015	J		0.002	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.3			<0.014	U	
		VMP-14-29-050316	5/3/2016	0.013	J		0.0013	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-14-29-072916	7/29/2016	0.032	J		<0.0048	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		0.0072	J	
		VMP-14-29-072916-DUP	7/29/2016	0.071			0.00087	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0025	J		0.0075	J	
		VMP-14-29-110216	11/2/2016	0.019	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-14-29-022717	2/27/2017	0.017	J		0.0036	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.01	J		0.0052	J	
		VMP-14-29-022717-Dup	2/27/2017	0.015	J		0.004			<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.011	J		0.0045	J	
		VMP-14-29-050117	5/1/2017	0.025	J		0.0034	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0064	J	
		VMP-14-29-103017	10/30/2017	<0.027	J	U	0.0023	J		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.022			<0.013	U	
		VMP-14-29-012518	1/25/2018	0.024	J		0.0012	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.014			0.0058	J	
		VMP-14-29-042718	4/27/2018	0.015	J		0.0012	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.016			0.0048	J	
		VMP-14-29-072518	7/25/2018	0.044			0.0022	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.005	J		0.0053	J	
		VMP-14-29-072518-DUP	7/25/2018	0.035			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0054	J		0.0033	J	
		VMP-14-29-102918	10/29/2018	0.0066	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-14-29-102918-DUP	10/29/2018	0.02	J		0.001	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0065	J		0.0038	J	
		VMP-14-29-020419	2/4/2019	0.019	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-14-29-050119	5/1/2019	0.018	J		0.0015	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0031	J	
		VMP-14-29-012721	1/27/2021	0.0093	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.015			<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		0.0041	J	J	<0.0071	U	
		VMP-14-20-043015	4/30/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-20-072915	7/29/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		0.00099	J		<0.029	U		<0.0072	U	
		VMP-14-20-110215	11/2/2015	0.0045	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-14-20-012616	1/26/2016	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-14-20-050416	5/4/2016	0.0075	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-14-20-072916	7/29/2016	0.0011	J		<0.0099	U		<0.0072	U		<0.013	U		<0.016	U		<0.0077	U		<0.032	U		<0.0081	U	
		VMP-14-20-022717	2/27/2017	0.059	J		<0.17	U		<0.12	U		<0.23	U		<0.28	U		<0.13	U		<0.22	U		<0.14	U	
		VMP-14-20-050117	5/1/2017	<0.14	U		<0.069	U		<0.051	U		<0.094	U		<0.12	U		<0.054	U		<0.091	U		<0.057	U	
		VMP-14-20-071917	7/19/2017	<0.16	U		<0.081	U		<0.059	U		<0.11	U		<0.14	U		<0.063	U		<0.11	U		<0.066	U	
		VMP-14-20-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-14-20-012518	1/25/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-20-041718	4/17/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-14-20-072518	7/25/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-20-102918	10/29/2018	0.002	J		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-14-20-020419	2/4/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-20-050119	5/1/2019	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-14-20-073019	7/30/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-14-20-102819	10/28/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-14-20-042320	4/23/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-14-20-073020	7/30/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-20-110220	11/2/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-20-012721	1/27/2021	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U	UJ	<0.006	U	
	29 ft	VMP-14-29-020615	2/6/2015	0.0052	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		0.0051	J		<0.027	U	UJ	<0.0069	U	
		VMP-14-29-043015	4/30/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	J	U	<0.025	U		<0.0063	U	
		VMP-14-29-043015-DUP	4/30/2015	<0.013	J	U	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.0032	J		<0.022	U		<0.0055	U	
		VMP-14-29-072915	7/29/2015	<0.018	J	U	<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		0.0039	J		<0.031	U		<0.0077	U	
		VMP-14-29-110215	11/2/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.013	U		0.0064			<0.026	U		<0.0066	U	
		VMP-14-29-012616	1/26/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	J	U	<0.026	U		<0.0065	U	
		VMP-14-29-012616-DUP	1/26/2016	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	J	U	<0.025	U		<0.0064	U	
		VMP-14-29-050316	5/3/2016	0.00083	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U	UJ	<0.0074	U	
		VMP-14-29-072916	7/29/2016	0.0084	J		<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0077	U	
		VMP-14-29-072916-DUP	7/29/2016	0.016			<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-14-29-110216	11/2/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-14-29-022717	2/27/2017	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-14-29-022717-Dup	2/27/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-14-29-050117	5/1/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-14-29-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-14-29-012518	1/25/2018	0.009	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-14-29-042718	4/27/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-14-29-072518	7/25/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-29-072518-DUP	7/25/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-14-29-102918	10/29/2018	0.0011	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-14-29-102918-DUP	10/29/2018	0.0045	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-14-29-020419	2/4/2019	<0.015	U		<0.0075	U		0.00088	J		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		0.0011	J	J
		VMP-14-29-050119	5/1/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-14-29-012721	1/27/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U	UJ	<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0031	J		<0.0055	U		<0.0055	U	
		VMP-14-20-043015	4/30/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0021	J		<0.0053	U		<0.0053	U	
		VMP-14-20-072915	7/29/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0026	J		<0.0056	U		<0.0056	U	
		VMP-14-20-110215	11/2/2015	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-14-20-012616	1/26/2016	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.002	J		<0.005	U		<0.005	U	
		VMP-14-20-050416	5/4/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0017	J		<0.0055	U		<0.0055	U	
		VMP-14-20-072916	7/29/2016	<0.0054	U		<0.012	U		<0.0094	U		<0.0094	U		<0.0094	U		<0.0078	U		<0.0064	U		<0.0064	U	
		VMP-14-20-022717	2/27/2017	<0.093	U		<0.21	U		<0.16	U		<0.16	U		<0.16	U		<0.13	U		<0.11	U		<0.11	U	
		VMP-14-20-050117	5/1/2017	<0.038	U		<0.084	U		<0.066	U		<0.066	U		<0.066	U		<0.054	U		<0.044	U		<0.044	U	
		VMP-14-20-071917	7/19/2017	<0.044	U		<0.099	U		<0.077	U		<0.077	U		<0.077	U		<0.064	U		<0.052	U		<0.052	U	
		VMP-14-20-103017	10/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-14-20-012518	1/25/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0029	J		<0.0049	U		<0.0049	U	
		VMP-14-20-041718	4/17/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-14-20-072518	7/25/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0029	J		<0.0049	U		<0.0049	U	
		VMP-14-20-102918	10/29/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-14-20-020419	2/4/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-14-20-050119	5/1/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0028	J		<0.0053	U		<0.0053	U	
		VMP-14-20-073019	7/30/2019	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0031	J		<0.0052	U		<0.0052	U	
		VMP-14-20-102819	10/28/2019	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0025	J		<0.0055	U		<0.0055	U	
		VMP-14-20-042320	4/23/2020	0.0017	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-14-20-073020	7/30/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0052	U		<0.0052	U	
		VMP-14-20-110220	11/2/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U	
		VMP-14-20-012721	1/27/2021	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0021	J		<0.0047	U		<0.0047	U	
	29 ft	VMP-14-29-020615	2/6/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0031	J		<0.0054	U		<0.0054	U	
		VMP-14-29-043015	4/30/2015	0.0026	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-14-29-043015-DUP	4/30/2015	0.0016	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0024	J		<0.0043	U		<0.0043	U	
		VMP-14-29-072915	7/29/2015	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		0.0024	J		<0.006	U		<0.006	U	
		VMP-14-29-110215	11/2/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.003	J		<0.0052	U		<0.0052	U	
		VMP-14-29-012616	1/26/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0016	J		<0.0051	U		<0.0051	U	
		VMP-14-29-012616-DUP	1/26/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0017	J		<0.005	U		<0.005	U	
		VMP-14-29-050316	5/3/2016	0.0017	J		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0034	J		<0.0058	U		<0.0058	U	
		VMP-14-29-072916	7/29/2016	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		0.0022	J		<0.006	U		<0.006	U	
		VMP-14-29-072916-DUP	7/29/2016	0.00068	J		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-14-29-110216	11/2/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0025	J		<0.0056	U		<0.0056	U	
		VMP-14-29-022717	2/27/2017	0.0013	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-14-29-022717-Dup	2/27/2017	0.00075	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0022	J		<0.0051	U		<0.0051	U	
		VMP-14-29-050117	5/1/2017	0.0017	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0023	J		<0.0047	U		<0.0047	U	
		VMP-14-29-103017	10/30/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0031	J		<0.0046	U		<0.0046	U	
		VMP-14-29-012518	1/25/2018	0.0013	J		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U	
		VMP-14-29-042718	4/27/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0052	U		<0.0052	U	
		VMP-14-29-072518	7/25/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0029	J		<0.0049	U		<0.0049	U	
		VMP-14-29-072518-DUP	7/25/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0033	J		<0.0052	U		<0.0052	U	
		VMP-14-29-102918	10/29/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0018	J		<0.005	U		<0.005	U	
		VMP-14-29-102918-DUP	10/29/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0027	J		<0.0045	U		<0.0045	U	
		VMP-14-29-020419	2/4/2019	<0.0041	U		<0.0091	U		<0.0072	U		0.0013	J		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-14-29-050119	5/1/2019	0.024			<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-14-29-012721	1/27/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0022	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-14-20-043015	4/30/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-14-20-072915	7/29/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-14-20-110215	11/2/2015	<0.0049	U		<0.0049	U		<0.0049	U		0.0032	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-20-012616	1/26/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-20-050416	5/4/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-14-20-072916	7/29/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-14-20-022717	2/27/2017	<0.11	U		<0.11	U		<0.11	U		<0.38	U		<0.12	U		<0.12	U		<0.12	U		<0.39	U	
		VMP-14-20-050117	5/1/2017	<0.044	U		<0.044	U		<0.044	U		<0.15	U		<0.051	U		<0.05	U		<0.05	U		<0.16	U	
		VMP-14-20-071917	7/19/2017	<0.051	U		<0.051	U		<0.051	U		<0.18	U		<0.059	U		<0.058	U		<0.058	U		<0.18	ND,UJ	UJ
		VMP-14-20-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-14-20-012518	1/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-14-20-041718	4/17/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-20-072518	7/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-14-20-102918	10/29/2018	<0.0045	U		<0.0045	U		<0.0045	U		0.0046	J		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-20-020419	2/4/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-14-20-050119	5/1/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-14-20-073019	7/30/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-20-102819	10/28/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	ND,UJ	UJ	<0.0062	U		<0.0062	U		<0.02	U	
		VMP-14-20-042320	4/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-14-20-073020	7/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		0.0027	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-20-110220	11/2/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-14-20-012721	1/27/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
	29 ft	VMP-14-29-020615	2/6/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-14-29-043015	4/30/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	J	U
		VMP-14-29-043015-DUP	4/30/2015	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-14-29-072915	7/29/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-14-29-110215	11/2/2015	<0.005	U		<0.005	U		<0.005	U		0.0045	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-29-012616	1/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-29-012616-DUP	1/26/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-29-050316	5/3/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-14-29-072916	7/29/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-14-29-072916-DUP	7/29/2016	<0.0045	U		<0.0045	U		<0.0045	U		0.0059	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-14-29-110216	11/2/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-14-29-022717	2/27/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-14-29-022717-Dup	2/27/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-14-29-050117	5/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-14-29-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-14-29-012518	1/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-14-29-042718	4/27/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-29-072518	7/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		0.0045	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-14-29-072518-DUP	7/25/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-14-29-102918	10/29/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-14-29-102918-DUP	10/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		0.0027	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-14-29-020419	2/4/2019	<0.0047	U		<0.0047	U		0.0019	J		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-14-29-050119	5/1/2019	<0.0048	U		<0.0048	U		<0.0048	U		0.0077	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-14-29-012721	1/27/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	0.014	J0	J	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		0.0016	J		<0.058	U		0.003	J	
		VMP-14-20-043015	4/30/2015	<0.0098	U		<0.0056	U		0.0018	J		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		0.0015	J	
		VMP-14-20-072915	7/29/2015	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-14-20-110215	11/2/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-20-012616	1/26/2016	0.0041	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-14-20-050416	5/4/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-14-20-072916	7/29/2016	<0.012	U		<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		<0.0055	U	
		VMP-14-20-022717	2/27/2017	<0.2	U		<0.12	U		<0.13	U		<0.21	U		<0.19	U		<0.11	U		<1.2	U		<0.095	U	
		VMP-14-20-050117	5/1/2017	<0.083	U		<0.048	U		<0.054	U		<0.084	U		<0.077	U		<0.045	U		<0.47	U		<0.039	U	
		VMP-14-20-071917	7/19/2017	<0.097	U		<0.056	U		<0.063	U		<0.098	U		<0.09	U		<0.053	U		<0.55	U		<0.045	U	
		VMP-14-20-103017	10/30/2017	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-14-20-012518	1/25/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		0.0024	J		<0.052	U		0.0027	J	
		VMP-14-20-041718	4/17/2018	0.014			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-14-20-072518	7/25/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-20-102918	10/29/2018	0.0034	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-14-20-020419	2/4/2019	0.0099			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-20-050119	5/1/2019	0.014			<0.0057	U		<0.0065	U		<0.01	U	UJ	<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-14-20-073019	7/30/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-14-20-102819	10/28/2019	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-14-20-042320	4/23/2020	<0.0099	ND,UJ	UJ	0.0013	J		<0.0065	U		<0.01	U		<0.0092	U		0.0062			<0.056	U		<0.0046	U	
		VMP-14-20-073020	7/30/2020	0.0085	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-14-20-110220	11/2/2020	0.0097			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-20-012721	1/27/2021	<0.022	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
	29 ft	VMP-14-29-020615	2/6/2015	<0.01	ND,UJ	UJ	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		0.0016	J	
		VMP-14-29-043015	4/30/2015	0.011			0.039		J	0.094		J	<0.0093	U		<0.0085	U		0.0048	J		<0.052	J	U	0.0078		
		VMP-14-29-043015-DUP	4/30/2015	<0.008	U		0.008		J	0.0083		J	0.0015	J		<0.0074	U		0.0038	J		0.0028	J		0.0065		
		VMP-14-29-072915	7/29/2015	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-14-29-110215	11/2/2015	0.0054	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-14-29-012616	1/26/2016	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		0.0028	J		<0.054	U		0.0093		
		VMP-14-29-012616-DUP	1/26/2016	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		0.0028	J		<0.052	U		0.0072		
		VMP-14-29-050316	5/3/2016	<0.011	U		0.0089			0.0012	J		<0.011	U		<0.01	U		0.015			<0.061	U		0.011		
		VMP-14-29-072916	7/29/2016	<0.011	U	UJ	<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-14-29-072916-DUP	7/29/2016	0.043		J	<0.005	U		0.0012	J		<0.0088	U		<0.008	U		0.0016	J		<0.049	U		<0.004	U	
		VMP-14-29-110216	11/2/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-14-29-022717	2/27/2017	<0.0099	J	U	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-14-29-022717-Dup	2/27/2017	<0.0094	J	U	<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		0.0012	J	
		VMP-14-29-050117	5/1/2017	0.039			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		0.0029	J	
		VMP-14-29-103017	10/30/2017	0.0094			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-14-29-012518	1/25/2018	0.0076	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.0022	J		<0.051	U		<0.0042	U	
		VMP-14-29-042718	4/27/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		0.0015	J		<0.055	U		<0.0045	U	
		VMP-14-29-072518	7/25/2018	0.031		J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		0.0028	J		<0.052	U		0.0033	J	
		VMP-14-29-072518-DUP	7/25/2018	0.01		J	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		0.0034	J	
		VMP-14-29-102918	10/29/2018	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-14-29-102918-DUP	10/29/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-14-29-020419	2/4/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-14-29-050119	5/1/2019	<0.0092	U		0.014			<0.006	U		<0.0093	U	UJ	<0.0085	U		0.004	J		<0.052	U		<0.0043	U	
		VMP-14-29-012721	1/27/2021	<0.024	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	<0.022	U		0.004	J		0.0026	J		<0.0056	U		<0.0049	U					0.025			<0.0067	U	
		VMP-14-20-043015	4/30/2015	0.0014	J		0.0014	J		<0.0064	U		<0.0053	J	U	<0.0047	U					0.0045	J		<0.0064	U	
		VMP-14-20-072915	7/29/2015	<0.023	U		0.0047	J		0.0066	J		<0.0057	U		<0.005	U					0.01	J		<0.0068	U	
		VMP-14-20-110215	11/2/2015	<0.02	U		0.014	J		0.028			<0.0051	U		<0.0045	U					0.0084	J		<0.0061	U	
		VMP-14-20-012616	1/26/2016	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					0.0043	J		<0.0061	U	
		VMP-14-20-050416	5/4/2016	<0.022	U		0.005	J		0.027			<0.0056	U		<0.0049	U					<0.013	U		0.038		
		VMP-14-20-072916	7/29/2016	<0.026	U		<0.018	U		<0.0077	U		<0.0064	U		<0.023	U					<0.015	U		<0.0077	U	
		VMP-14-20-022717	2/27/2017	<0.44	U		<0.32	U		0.39			<0.11	U		<0.097	U					<0.26	U		<0.13	U	
		VMP-14-20-050117	5/1/2017	<0.18	U		0.16			0.33			<0.045	U		<0.04	U					<0.11	U		<0.054	U	
		VMP-14-20-071917	7/19/2017	<0.21	U		0.037	J		0.24			<0.053	U		<0.046	U					<0.13	U		<0.063	U	
		VMP-14-20-103017	10/30/2017	<0.018	U		0.005	J		0.083			<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-14-20-012518	1/25/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.002	J		<0.006	U	
		VMP-14-20-041718	4/17/2018	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					0.008	J		<0.0062	U	
		VMP-14-20-072518	7/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-14-20-102918	10/29/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					0.0034	J		<0.0056	U	
		VMP-14-20-020419	2/4/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0031	J		<0.0059	U	
		VMP-14-20-050119	5/1/2019	<0.022	U		0.0065	J		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-14-20-073019	7/30/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					0.0076	J		<0.0063	U	
		VMP-14-20-102819	10/28/2019	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-14-20-042320	4/23/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.0053	J	J	0.0019	J	
		VMP-14-20-073020	7/30/2020	<0.021	U		0.0024	J		<0.0063	U		<0.0053	U		<0.019	U					0.0059	J		<0.0063	U	
		VMP-14-20-110220	11/2/2020	<0.02	U		0.0015	J		<0.006	U		<0.005	U		<0.018	U					0.01	J		0.001	J	
		VMP-14-20-012721	1/27/2021	<0.019	U		0.0013	J		<0.0057	U		<0.0048	U		<0.017	U					0.005	J		<0.0057	U	
	29 ft	VMP-14-29-020615	2/6/2015	<0.022	U		0.0056	J		<0.0065	U		<0.0054	U		<0.0048	U					0.0086	J		<0.0065	U	
		VMP-14-29-043015	4/30/2015	0.0012	J		0.0094	J		0.0035	J		<0.005	J	U	<0.0044	J	U				0.01	J		0.014		J
		VMP-14-29-043015-DUP	4/30/2015	0.0016	J		0.0054	J		<0.0052	U		0.0024	J		0.0008	J					0.0067	J		0.0018	J	J
		VMP-14-29-072915	7/29/2015	<0.024	U		0.0027	J		<0.0073	U		<0.0061	U		<0.0054	U					0.0038	J		<0.0073	U	
		VMP-14-29-110215	11/2/2015	<0.021	U		0.0029	J		<0.0063	U		<0.0052	U		<0.0046	U					0.0072	J		<0.0063	U	
		VMP-14-29-012616	1/26/2016	<0.021	U		0.25			<0.0062	U		<0.0052	U		<0.0045	U					0.0045	J		<0.0062	U	
		VMP-14-29-012616-DUP	1/26/2016	<0.02	U		0.25			<0.006	U		<0.005	U		<0.0044	U					0.0036	J		<0.006	U	
		VMP-14-29-050316	5/3/2016	<0.023	U		0.0032	J		<0.007	U		<0.0058	U		<0.0052	U					<0.014	U		<0.007	U	
		VMP-14-29-072916	7/29/2016	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.021	U					<0.015	U	UJ	<0.0073	U	
		VMP-14-29-072916-DUP	7/29/2016	<0.019	U		0.013	J		<0.0056	U		0.0026	J		<0.016	U					0.059		J	<0.0056	U	
		VMP-14-29-110216	11/2/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U		<0.014	U		0.0078	J		<0.0068	U	
		VMP-14-29-022717	2/27/2017	<0.022	U		0.0055	J		<0.0065	U		<0.0054	J	U	<0.019	U					<0.013	U		<0.0065	U	
		VMP-14-29-022717-Dup	2/27/2017	<0.02	U		0.0047	J		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-14-29-050117	5/1/2017	<0.019	U		0.017			<0.0057	U		<0.0048	U		<0.017	U					0.0042	J		<0.0057	U	
		VMP-14-29-103017	10/30/2017	<0.018	U		0.0099	J		<0.0055	U		<0.0046	U		<0.016	U					0.0087	J		<0.0055	U	
		VMP-14-29-012518	1/25/2018	<0.019	U		0.082			<0.0058	U		<0.0049	U		<0.017	U					0.012			<0.0058	U	
		VMP-14-29-042718	4/27/2018	<0.021	U		0.0091	J		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-14-29-072518	7/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.005	J		<0.0059	U	
		VMP-14-29-072518-DUP	7/25/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					0.0047	J		<0.0063	U	
		VMP-14-29-102918	10/29/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-14-29-102918-DUP	10/29/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					0.0034	J		<0.0055	U	
		VMP-14-29-020419	2/4/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		0.0009	J	
		VMP-14-29-050119	5/1/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-14-29-012721	1/27/2021	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					0.012			<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		0.0035	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-14-20-043015	4/30/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-14-20-072915	7/29/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.0022	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-14-20-110215	11/2/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.0016	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-20-012616	1/26/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.0013	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-14-20-050416	5/4/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		0.00067	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-14-20-072916	7/29/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		0.00072	J		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-14-20-022717	2/27/2017	<0.12	U		<0.18	U		<0.18	U		<0.08	U		<0.1	U		<0.8	U		<0.15	U		<0.15	U	
		VMP-14-20-050117	5/1/2017	<0.047	U		<0.076	U		<0.075	U		<0.032	U		0.01	J		<0.33	U		<0.06	U		<0.06	U	
		VMP-14-20-071917	7/19/2017	<0.055	U		<0.088	U		<0.087	U		<0.038	U		0.0071	J		<0.38	U		<0.07	U		<0.07	U	
		VMP-14-20-103017	10/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.00094	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-14-20-012518	1/25/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-20-041718	4/17/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-20-072518	7/25/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-20-102918	10/29/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-14-20-020419	2/4/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-20-050119	5/1/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-14-20-073019	7/30/2019	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-14-20-102819	10/28/2019	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-14-20-042320	4/23/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-14-20-073020	7/30/2020	<0.0088	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-14-20-110220	11/2/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-20-012721	1/27/2021	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
	29 ft	VMP-14-29-020615	2/6/2015	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		0.00095	J		0.016	J		<0.0072	U		<0.0072	U	
		VMP-14-29-043015	4/30/2015	<0.0052	U		<0.0083	U		0.0035	J		<0.0036	U		0.068			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-29-043015-DUP	4/30/2015	0.0011	J		<0.0073	U		0.0028	J		<0.0031	U		0.07			<0.032	U		<0.0058	U		<0.0058	U	
		VMP-14-29-072915	7/29/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-14-29-110215	11/2/2015	<0.0054	U		<0.0088	U		0.0021	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-14-29-012616	1/26/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-14-29-012616-DUP	1/26/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-14-29-050316	5/3/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		0.03			<0.042	U		<0.0078	U		<0.0078	U	
		VMP-14-29-072916	7/29/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-14-29-072916-DUP	7/29/2016	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.0066			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-14-29-110216	11/2/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-14-29-022717	2/27/2017	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		0.0013	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-14-29-022717-Dup	2/27/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0016	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-14-29-050117	5/1/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		0.0014	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-14-29-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-14-29-012518	1/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.046			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-14-29-042718	4/27/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	J	U	<0.007	U		<0.007	U	
		VMP-14-29-072518	7/25/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0013	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-29-072518-DUP	7/25/2018	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-14-29-102918	10/29/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-14-29-102918-DUP	10/29/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-14-29-020419	2/4/2019	<0.0051	U		<0.0082	U		0.0014	J		<0.0035	U		0.00075	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-14-29-050119	5/1/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.27			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-14-29-012721	1/27/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-14-20-020615	2/6/2015	<0.0074	U		0.0012	J		<0.0067	J	U	<0.0067	U		0.18			<0.0035	U		0.00089	J		<0.0059	U	
		VMP-14-20-043015	4/30/2015	<0.007	U		<0.0073	U		<0.0064	J	U	<0.0064	U		0.0045	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-20-072915	7/29/2015	<0.0075	U		<0.0078	U		0.0011	J		<0.0068	U		0.018			<0.0036	U		0.0019	J		0.0014	J	
		VMP-14-20-110215	11/2/2015	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		0.15			<0.0032	U		0.002	J		0.0015	J	
		VMP-14-20-012616	1/26/2016	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.021			<0.0032	U		0.0013	J		<0.0054	U	
		VMP-14-20-050416	5/4/2016	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.097			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-14-20-072916	7/29/2016	<0.0084	U		<0.0088	U		<0.0077	U		<0.0077	U		0.013			<0.004	U		<0.0068	U		<0.0068	U	
		VMP-14-20-022717	2/27/2017	<0.14	U		<0.15	U		<0.13	U		<0.13	U		0.092	J		<0.069	U		<0.12	U		<0.12	U	
		VMP-14-20-050117	5/1/2017	<0.059	U		<0.062	U		0.012	J		<0.054	U		0.074			<0.028	U		<0.048	U		<0.048	U	
		VMP-14-20-071917	7/19/2017	<0.069	U		<0.072	U		<0.063	U		<0.063	U		0.021	J		<0.033	U		<0.056	U		<0.056	U	
		VMP-14-20-103017	10/30/2017	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.0044	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-20-012518	1/25/2018	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-20-041718	4/17/2018	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0013	J		<0.0054	U	
		VMP-14-20-072518	7/25/2018	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-14-20-102918	10/29/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-20-020419	2/4/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-14-20-050119	5/1/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-14-20-073019	7/30/2019	<0.0069	U		0.0019	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-20-102819	10/28/2019	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-14-20-042320	4/23/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0016	J		<0.0034	U		0.0061			0.0015	J	
		VMP-14-20-073020	7/30/2020	<0.0069	U		0.0011	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-20-110220	11/2/2020	<0.0065	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-20-012721	1/27/2021	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
	29 ft	VMP-14-29-020615	2/6/2015	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		0.0016	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-14-29-043015	4/30/2015	<0.0065	J	U	<0.0068	J	U	0.17		J	0.041		J	0.0084			<0.0031	U		0.42		J	0.2		J
		VMP-14-29-043015-DUP	4/30/2015	0.0019	J		0.0015	J		0.01		J	0.0031	J	J	0.007			<0.0027	U		0.036		J	0.016		J
		VMP-14-29-072915	7/29/2015	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-14-29-110215	11/2/2015	<0.0068	U		<0.0072	U		0.0016	J		0.00083	J		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-14-29-012616	1/26/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0063			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-14-29-012616-DUP	1/26/2016	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0064			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-29-050316	5/3/2016	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		0.036			<0.0036	U		0.018			0.0056	J	
		VMP-14-29-072916	7/29/2016	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-14-29-072916-DUP	7/29/2016	<0.0062	U		<0.0064	U		<0.0056	J	U	0.00096	J		0.00084	J		<0.0029	U		0.0024	J		0.0012	J	
		VMP-14-29-110216	11/2/2016	<0.0074	U		0.0014	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-14-29-022717	2/27/2017	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0017	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-14-29-022717-Dup	2/27/2017	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-14-29-050117	5/1/2017	<0.0063	U		0.001	J		<0.0057	U		<0.0057	U		0.0021	J		<0.003	U		0.0028	J		<0.005	U	
		VMP-14-29-103017	10/30/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	J	U	<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-29-012518	1/25/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.0012	J		<0.0052	U	
		VMP-14-29-042718	4/27/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.002	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-29-072518	7/25/2018	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		0.0019	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-14-29-072518-DUP	7/25/2018	<0.0069	U		0.002	J		<0.0063	U		<0.0063	U		0.0013	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-14-29-102918	10/29/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0014	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-14-29-102918-DUP	10/29/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-14-29-020419	2/4/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-14-29-050119	5/1/2019	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.052			0.0065		
		VMP-14-29-012721	1/27/2021	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.029	U		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-17-5-050115	5/1/2015	0.013	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0074	J	
		VMP-17-5-072815	7/28/2015	0.016	J		<0.0048	J	U	<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		0.0036	J	
		VMP-17-5-102915	10/29/2015	0.014	J		0.0014	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.007	J	
		VMP-17-5-020216	2/2/2016	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0099	J		<0.014	U	
		VMP-17-5-050216	5/2/2016	0.006	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-17-5-072516	7/25/2016	0.017	J		0.0015	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		0.0049	J	
		VMP-17-5-103116	10/31/2016	0.016	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		0.0047	J	
		VMP-17-5-012417	1/24/2017	0.013	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-17-5-050217	5/2/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-17-5-071917	7/19/2017	0.013	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-17-5-110217	11/2/2017	<0.029	J	U	0.0044			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0082	J		<0.014	U	
		VMP-17-5-012418	1/24/2018	<0.028	J	U	0.00073	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0046	J		<0.014	U	
		VMP-17-5-042418	4/24/2018	0.0061	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-17-5-042418-DUP	4/24/2018	0.0037	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-17-5-071818	7/18/2018	0.032			0.014			<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.054			0.0027	J	
		VMP-17-5-103018	10/30/2018	0.046			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0096	J		<0.015	U	
		VMP-17-5-012419	1/24/2019	0.021	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.0034	J	
		VMP-17-5-042519	4/25/2019	0.0066	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-17-5-073119	7/31/2019	0.018	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-17-5-102119	10/21/2019	0.055			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.012	J	
		VMP-17-5-012220	1/22/2020	0.0087	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-17-5-042820	4/28/2020	0.023	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-17-5-072220	7/22/2020	0.014	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-17-5-110320	11/3/2020	0.018	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-17-5-012821	1/28/2021	0.0067	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	**0.0078**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-18-8.5-050115	5/1/2015	**0.01**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0028**	J	
		VMP-18-8.5-050115-DUP	5/1/2015	**0.0089**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0029**	J	
		VMP-18-8.5-072815	7/28/2015	**0.018**	J		<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		**0.0072**	J	
		VMP-18-8.5-102915	10/29/2015	**0.022**	J		**0.0011**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0059**	J	
		VMP-18-8.5-020216	2/2/2016	**0.024**	J		**0.00091**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.02			**0.0067**	J	
		VMP-18-8.5-050516	5/5/2016	**0.014**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0035**	J	
		VMP-18-8.5-072516	7/25/2016	**0.02**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-18-8.5-102516	10/25/2016	**0.018**	J		<0.008	U		<0.017	U		<0.026	U		<0.098	U		<0.0056	U		<0.024	U		<0.03	U	
		VMP-18-8.5-013117	1/31/2017	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.033**		
		VMP-18-8.5-050317	5/3/2017	<0.026	J	U	<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-18-8.5-072717	7/27/2017	**0.021**	J		**0.00084**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-18-8.5-110317	11/3/2017	**0.0097**	J		**0.0012**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.025	J	U	**0.0011**	J		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-18-8.5-012418	1/24/2018	**0.0095**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-18-8.5-033018	3/30/2018	**0.003**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-18-8.5-041018	4/10/2018	**0.0085**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-18-8.5-080718	8/7/2018	**0.069**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0056**	J	
		VMP-18-8.5-102618	10/26/2018	**0.009**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-18-8.5-012519	1/25/2019	**0.047**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-18-8.5-043019	4/30/2019	**0.015**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-18-8.5-072619	7/26/2019	**0.019**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-18-8.5-072619-DUP	7/26/2019	**0.023**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-18-8.5-102319	10/23/2019	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-18-8.5-102319-DUP	10/23/2019	**0.016**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-18-8.5-012420	1/24/2020	**0.0099**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-18-8.5-042920	4/29/2020	**0.0091**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-18-8.5-042920-DUP	4/29/2020	**0.018**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-18-8.5-112420	11/24/2020	**0.019**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-18-8.5-012621	1/26/2021	**0.0064**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-17-5-050115	5/1/2015	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-17-5-072815	7/28/2015	<0.019	J	U	<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-17-5-102915	10/29/2015	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-17-5-020216	2/2/2016	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-17-5-050216	5/2/2016	0.00067	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U	UJ	<0.0067	U	
		VMP-17-5-072516	7/25/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-17-5-103116	10/31/2016	0.0043	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-17-5-012417	1/24/2017	0.0012	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-17-5-050217	5/2/2017	0.0014	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-17-5-071917	7/19/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-17-5-110217	11/2/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-17-5-012418	1/24/2018	0.002	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-17-5-042418	4/24/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-17-5-071818	7/18/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-17-5-103018	10/30/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-17-5-012419	1/24/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-17-5-042519	4/25/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-17-5-073119	7/31/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-17-5-102119	10/21/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		0.0031	J		<0.0067	U	
		VMP-17-5-012220	1/22/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-17-5-042820	4/28/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-17-5-072220	7/22/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-17-5-110320	11/3/2020	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-17-5-012821	1/28/2021	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-18-8.5-050115	5/1/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-18-8.5-072815	7/28/2015	<0.019	J	U	<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.0027**	J		<0.031	U		<0.0078	U	
		VMP-18-8.5-102915	10/29/2015	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-18-8.5-020216	2/2/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-18-8.5-050516	5/5/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U	UJ	<0.0064	U	
		VMP-18-8.5-072516	7/25/2016	<0.018	U		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		**0.0019**	J		<0.03	U		<0.0076	U	
		VMP-18-8.5-102516	10/25/2016	<0.031	U		<0.016	U		<0.012	U		<0.021	U		<0.026	U		<0.012	U		<0.052	U		<0.013	U	
		VMP-18-8.5-013117	1/31/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	ND,UJ	UJ	<0.0067	U	
		VMP-18-8.5-050317	5/3/2017	<0.014	J	U	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-18-8.5-072717	7/27/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0011**	J		<0.025	U		<0.0063	U	
		VMP-18-8.5-110317	11/3/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-18-8.5-012418	1/24/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-18-8.5-033018	3/30/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-18-8.5-041018	4/10/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-18-8.5-080718	8/7/2018	<0.014	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-18-8.5-102618	10/26/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-18-8.5-012519	1/25/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-18-8.5-043019	4/30/2019	**0.0028**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-18-8.5-072619	7/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-18-8.5-072619-DUP	7/26/2019	**0.0064**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.001**	J		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-18-8.5-102319	10/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-18-8.5-102319-DUP	10/23/2019	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-18-8.5-012420	1/24/2020	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-18-8.5-042920	4/29/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-18-8.5-042920-DUP	4/29/2020	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-18-8.5-112420	11/24/2020	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-18-8.5-012621	1/26/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0031	J		<0.0049	U		<0.0049	U	
		VMP-17-5-050115	5/1/2015	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-17-5-072815	7/28/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		0.0022	J		<0.0061	U		<0.0061	U	
		VMP-17-5-102915	10/29/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.004	J		<0.0051	U		<0.0051	U	
		VMP-17-5-020216	2/2/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-17-5-050216	5/2/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0021	J		<0.0052	U		<0.0052	U	
		VMP-17-5-072516	7/25/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0025	J		<0.0057	U		<0.0057	U	
		VMP-17-5-103116	10/31/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0024	J		<0.0057	U		<0.0057	U	
		VMP-17-5-012417	1/24/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.002	J		<0.005	U		<0.005	U	
		VMP-17-5-050217	5/2/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0019	J		<0.0047	U		<0.0047	U	
		VMP-17-5-071917	7/19/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-17-5-110217	11/2/2017	0.0084			<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-17-5-012418	1/24/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0031	J		<0.0047	U		<0.0047	U	
		VMP-17-5-042418	4/24/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0034	J		<0.0048	U		<0.0048	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0034	J		<0.0048	U		<0.0048	U	
		VMP-17-5-071818	7/18/2018	0.0078			<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-17-5-103018	10/30/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0023	J		<0.0051	U		<0.0051	U	
		VMP-17-5-012419	1/24/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0027	J		<0.0044	U		<0.0044	U	
		VMP-17-5-042519	4/25/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0027	J		<0.0052	U		<0.0052	U	
		VMP-17-5-073119	7/31/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-17-5-102119	10/21/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0052	U		<0.0052	U	
		VMP-17-5-012220	1/22/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-17-5-042820	4/28/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0024	J		<0.0057	U		<0.0057	U	
		VMP-17-5-072220	7/22/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.003	J		<0.0055	U		<0.0055	U	
		VMP-17-5-110320	11/3/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0027	J		<0.0053	U		<0.0053	U	
		VMP-17-5-012821	1/28/2021	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0028	J		<0.0044	U		<0.0044	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-18-8.5-050115	5/1/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.002**	J		<0.0056	U		<0.0056	U	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-18-8.5-072815	7/28/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.002**	J		<0.0061	U		<0.0061	U	
		VMP-18-8.5-102915	10/29/2015	**0.0018**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0041**	J		<0.005	U		<0.005	U	
		VMP-18-8.5-020216	2/2/2016	**0.0021**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-18-8.5-050516	5/5/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-18-8.5-072516	7/25/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0049**	J		<0.006	U		<0.0059	U	
		VMP-18-8.5-102516	10/25/2016	**0.0018**	J		<0.019	U		<0.015	U		<0.015	U		<0.015	U		<0.012	U		<0.01	U		<0.01	U	
		VMP-18-8.5-013117	1/31/2017	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-18-8.5-050317	5/3/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0021**	J		<0.0044	U		<0.0044	U	
		VMP-18-8.5-072717	7/27/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-18-8.5-110317	11/3/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0024**	J		<0.0042	U		<0.0042	U	
		VMP-18-8.5-012418	1/24/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0034**	J		<0.0047	U		<0.0047	U	
		VMP-18-8.5-033018	3/30/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-18-8.5-041018	4/10/2018	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-18-8.5-080718	8/7/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-18-8.5-102618	10/26/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-18-8.5-012519	1/25/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-18-8.5-043019	4/30/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-18-8.5-072619	7/26/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-18-8.5-072619-DUP	7/26/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-18-8.5-102319	10/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J	J	<0.0051	U		<0.0051	U	
		VMP-18-8.5-102319-DUP	10/23/2019	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J	J	<0.0052	U		<0.0052	U	
		VMP-18-8.5-012420	1/24/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-18-8.5-042920	4/29/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-18-8.5-042920-DUP	4/29/2020	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0021**	J		<0.0045	U		<0.0045	U	
		VMP-18-8.5-112420	11/24/2020	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0024**	J		<0.0045	U		<0.0045	U	
		VMP-18-8.5-012621	1/26/2021	<0.0044	U		<0.0099	U		<0.0078	J	U	<0.0078	J	U	<0.0078	J	U	**0.0027**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-17-5-050115	5/1/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-17-5-072815	7/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-17-5-102915	10/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-17-5-020216	2/2/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-17-5-050216	5/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-17-5-072516	7/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-17-5-103116	10/31/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-17-5-012417	1/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-17-5-050217	5/2/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-17-5-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-17-5-110217	11/2/2017	<0.0049	U		<0.0049	U		<0.0049	U		0.0042	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-17-5-012418	1/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-17-5-042418	4/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-17-5-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-17-5-103018	10/30/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-17-5-012419	1/24/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-17-5-042519	4/25/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-17-5-073119	7/31/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-17-5-102119	10/21/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-17-5-012220	1/22/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-17-5-042820	4/28/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-17-5-072220	7/22/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-17-5-110320	11/3/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-17-5-012821	1/28/2021	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-18-8.5-050115	5/1/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-18-8.5-072815	7/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.0055**	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-18-8.5-102915	10/29/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	J	U	<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-18-8.5-020216	2/2/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-18-8.5-050516	5/5/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-18-8.5-072516	7/25/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-18-8.5-102516	10/25/2016	<0.01	U		<0.01	U		<0.01	U		<0.087	U		<0.012	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-18-8.5-013117	1/31/2017	<0.0051	U		<0.0051	U		<0.0051	U		**0.0086**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-18-8.5-050317	5/3/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-18-8.5-072717	7/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-18-8.5-110317	11/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-18-8.5-012418	1/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-18-8.5-033018	3/30/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-18-8.5-041018	4/10/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-18-8.5-080718	8/7/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-18-8.5-102618	10/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-18-8.5-012519	1/25/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-18-8.5-043019	4/30/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-18-8.5-072619	7/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-18-8.5-072619-DUP	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-18-8.5-102319	10/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U	UJ	<0.0057	U		<0.0057	U		<0.018	U	
		VMP-18-8.5-102319-DUP	10/23/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U	UJ	<0.0059	U		<0.0059	U		<0.019	U	
		VMP-18-8.5-012420	1/24/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-18-8.5-042920	4/29/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-18-8.5-042920-DUP	4/29/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-18-8.5-112420	11/24/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-18-8.5-012621	1/26/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	0.0078	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-17-5-050115	5/1/2015	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		0.0011	J	
		VMP-17-5-072815	7/28/2015	<0.011	U		<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-17-5-102915	10/29/2015	0.0042	J		<0.0055	U		0.0043	J		<0.0097	U		<0.0089	U		0.0023	J		<0.054	U		0.0019	J	
		VMP-17-5-020216	2/2/2016	<0.009	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	J	U	<0.051	U		0.0016	J	
		VMP-17-5-050216	5/2/2016	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-17-5-072516	7/25/2016	<0.011	U		0.0034	J		<0.007	U		<0.011	U		<0.0099	U		0.0052	J		<0.06	U		0.0036	J	
		VMP-17-5-103116	10/31/2016	<0.011	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-17-5-012417	1/24/2017	0.13			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-17-5-050217	5/2/2017	0.0057	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-17-5-071917	7/19/2017	0.01			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-17-5-110217	11/2/2017	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		0.0076			<0.053	U		0.018		
		VMP-17-5-012418	1/24/2018	0.0062	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		0.0031	J		<0.049	U		0.003	J	
		VMP-17-5-042418	4/24/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-17-5-071818	7/18/2018	0.0082	J		0.018			0.0066			<0.0092	U		<0.0084	U		0.039			<0.051	U		0.12		
		VMP-17-5-103018	10/30/2018	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		0.0055			<0.054	U		0.0076		
		VMP-17-5-012419	1/24/2019	0.0026	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-17-5-042519	4/25/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-17-5-073119	7/31/2019	<0.0092	U	UJ	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-17-5-102119	10/21/2019	0.0092	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-17-5-012220	1/22/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-17-5-042820	4/28/2020	0.0086	J	J	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-17-5-072220	7/22/2020	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-17-5-110320	11/3/2020	0.016			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-17-5-012821	1/28/2021	0.0039	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	0.0058	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-18-8.5-050115	5/1/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0022**	J	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		**0.0021**	J	
		VMP-18-8.5-072815	7/28/2015	<0.011	J	U	<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-18-8.5-102915	10/29/2015	0.0044	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-18-8.5-020216	2/2/2016	0.0057	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0094**			<0.053	U		**0.0036**	J	
		VMP-18-8.5-050516	5/5/2016	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-18-8.5-072516	7/25/2016	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		**0.0013**	J	
		VMP-18-8.5-102516	10/25/2016	0.016	J		<0.011	U		<0.012	U		<0.019	U		<0.018	U		<0.01	U		<0.11	U		<0.0089	J	U
		VMP-18-8.5-013117	1/31/2017	0.02			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0011**	J	
		VMP-18-8.5-050317	5/3/2017	0.0048	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0014**	J		<0.046	U		<0.0038	U	
		VMP-18-8.5-072717	7/27/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-18-8.5-110317	11/3/2017	0.013			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0018**	J	
		VMP-18-8.5-110317-DUP	11/3/2017	0.013			<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		**0.0016**	J	
		VMP-18-8.5-012418	1/24/2018	0.012			<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		**0.0016**	J		<0.049	U		<0.0041	U	
		VMP-18-8.5-033018	3/30/2018	0.0085	J		<0.0052	U		0.0024	J		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.00055**	J	
		VMP-18-8.5-041018	4/10/2018	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-18-8.5-080718	8/7/2018	0.038			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-18-8.5-102618	10/26/2018	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-18-8.5-012519	1/25/2019	0.003	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-18-8.5-043019	4/30/2019	0.0034	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-18-8.5-072619	7/26/2019	0.0046	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-18-8.5-072619-DUP	7/26/2019	0.0057	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-18-8.5-102319	10/23/2019	<0.0095	ND,UJ	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0077**		
		VMP-18-8.5-102319-DUP	10/23/2019	<0.0098	ND,UJ	UJ	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-18-8.5-012420	1/24/2020	<0.011	ND,UJ	UJ	<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-18-8.5-042920	4/29/2020	0.0072	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-18-8.5-042920-DUP	4/29/2020	0.029			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-18-8.5-112420	11/24/2020	<0.021	U	UJ	<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-18-8.5-012621	1/26/2021	0.003	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.0044	U					0.0044	J		<0.0059	U	
		VMP-17-5-050115	5/1/2015	0.0011	J		<0.014	U		<0.0058	U		<0.0048	J	U	<0.0042	U					0.0032	J		<0.0058	U	
		VMP-17-5-072815	7/28/2015	<0.024	U		<0.018	U		<0.0074	U		<0.0061	U		<0.0054	U					0.0039	J		<0.0074	U	
		VMP-17-5-102915	10/29/2015	<0.021	U		0.0042	J		<0.0062	U		<0.0052	U		<0.0046	U					0.0022	J		<0.0062	U	
		VMP-17-5-020216	2/2/2016	<0.02	U		0.0073	J		<0.0059	U		<0.0049	U		<0.0043	U					0.028			<0.0059	U	
		VMP-17-5-050216	5/2/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.0047	U					<0.013	U		<0.0064	U	
		VMP-17-5-072516	7/25/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					0.022			<0.007	U	
		VMP-17-5-103116	10/31/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U		0.00076	J	J	0.0054	J		<0.0069	U	
		VMP-17-5-012417	1/24/2017	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					0.0077	J		<0.0061	U	
		VMP-17-5-050217	5/2/2017	<0.019	U		<0.014	U		0.00093	J		<0.0048	U		<0.017	U					<0.012	U		0.0029	J	
		VMP-17-5-071917	7/19/2017	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					0.021			<0.0061	U	
		VMP-17-5-110217	11/2/2017	<0.02	U		0.014	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-17-5-012418	1/24/2018	<0.019	U		0.0081	J		<0.0057	U		<0.0048	U		<0.017	U					0.0052	J		<0.0057	U	
		VMP-17-5-042418	4/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-17-5-071818	7/18/2018	<0.02	U		0.26			0.00093	J		<0.0049	U		<0.017	U					0.0046	J		0.0019	J	
		VMP-17-5-103018	10/30/2018	<0.021	U		0.0066	J		<0.0062	U		<0.0052	U		<0.018	U					0.0062	J		<0.0062	U	
		VMP-17-5-012419	1/24/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					0.0019	J		<0.0053	U	
		VMP-17-5-042519	4/25/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-17-5-073119	7/31/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-17-5-102119	10/21/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-17-5-012220	1/22/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					0.03			<0.0068	U	
		VMP-17-5-042820	4/28/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					0.0053	J		<0.0069	U	
		VMP-17-5-072220	7/22/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	J	U	<0.0066	U	
		VMP-17-5-110320	11/3/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.012	J		<0.0065	U	
		VMP-17-5-012821	1/28/2021	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					0.004	J		<0.0053	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					<0.012	U		<0.0061	U	
		VMP-18-8.5-050115	5/1/2015	<0.023	U		0.0016	J		<0.0068	U		<0.0056	J	U	<0.005	U					**0.0015**	J		<0.0068	U	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.022	U		0.0017	J		<0.0067	U		<0.0056	J	U	<0.0049	U					**0.0027**	J		<0.0067	U	
		VMP-18-8.5-072815	7/28/2015	<0.024	U		<0.018	U		<0.0074	U		<0.0061	U		<0.0054	U					**0.0036**	J		<0.0074	U	
		VMP-18-8.5-102915	10/29/2015	**0.00088**	J		0.0011	J		<0.006	U		<0.005	J	U	<0.0044	U					**0.0045**	J		<0.006	U	
		VMP-18-8.5-020216	2/2/2016	<0.02	U		0.01	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.048**			<0.0061	U	
		VMP-18-8.5-050516	5/5/2016	<0.02	U		<0.015	U		**0.0021**	J		<0.0051	U		<0.0045	U					**0.0056**	J		**0.0032**	J	
		VMP-18-8.5-072516	7/25/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.012**	J		<0.0072	U	
		VMP-18-8.5-102516	10/25/2016	<0.041	U		<0.03	U		<0.012	U		<0.01	U		<0.036	U		<0.026	U		**0.026**			<0.012	U	
		VMP-18-8.5-013117	1/31/2017	<0.021	U		0.029			<0.0063	U		<0.0053	U		<0.019	U					**0.0028**	J		<0.0063	U	
		VMP-18-8.5-050317	5/3/2017	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		**0.00099**	J	
		VMP-18-8.5-072717	7/27/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.027**			<0.0059	U	
		VMP-18-8.5-110317	11/3/2017	<0.019	U		0.006	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0044**	J		<0.0056	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.017	U		0.0052	J		<0.0051	U		<0.0043	U		<0.015	U					**0.0035**	J		<0.0051	U	
		VMP-18-8.5-012418	1/24/2018	<0.019	U		0.0049	J		<0.0057	U		<0.0047	U		<0.017	U					**0.0048**	J		<0.0057	U	
		VMP-18-8.5-033018	3/30/2018	<0.02	U		<0.014	U		**0.0019**	J		<0.005	U		<0.017	U		**0.014**			**0.0015**	J		**0.012**		
		VMP-18-8.5-041018	4/10/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		<0.012	U		**0.0085**	J		<0.0055	U	
		VMP-18-8.5-080718	8/7/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.013**			<0.0058	U	
		VMP-18-8.5-102618	10/26/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-18-8.5-012519	1/25/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.01**	J		<0.0058	U	
		VMP-18-8.5-043019	4/30/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-18-8.5-072619	7/26/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0095**	J		<0.0061	U	
		VMP-18-8.5-072619-DUP	7/26/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.009**	J		<0.0062	U	
		VMP-18-8.5-102319	10/23/2019	<0.021	U		0.007	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-18-8.5-102319-DUP	10/23/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-18-8.5-012420	1/24/2020	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					<0.014	U		<0.0073	U	
		VMP-18-8.5-042920	4/29/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.068**		J	<0.0058	U	
		VMP-18-8.5-042920-DUP	4/29/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.56**		J	<0.0055	U	
		VMP-18-8.5-112420	11/24/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.007**	J		<0.0055	U	
		VMP-18-8.5-012621	1/26/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0082**	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-17-5-050115	5/1/2015	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-17-5-072815	7/28/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-17-5-102915	10/29/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		0.0016	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-17-5-020216	2/2/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.003	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-17-5-050216	5/2/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-17-5-072516	7/25/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		0.0084			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-17-5-103116	10/31/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-17-5-012417	1/24/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-17-5-050217	5/2/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-17-5-071917	7/19/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-17-5-110217	11/2/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.0042	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-17-5-012418	1/24/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		0.0047			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-17-5-042418	4/24/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	J	U	<0.035	U		<0.0064	U		<0.0064	U	
		VMP-17-5-071818	7/18/2018	<0.0051	U		0.002	J		<0.0081	U		<0.0035	U		0.092			<0.036	U		<0.0065	U		<0.0065	U	
		VMP-17-5-103018	10/30/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-17-5-012419	1/24/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-17-5-042519	4/25/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-17-5-073119	7/31/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-17-5-102119	10/21/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-17-5-012220	1/22/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.001	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-17-5-042820	4/28/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-17-5-072220	7/22/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-17-5-110320	11/3/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-17-5-012821	1/28/2021	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-18-8.5-050115	5/1/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-18-8.5-072815	7/28/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-18-8.5-102915	10/29/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0015**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-18-8.5-020216	2/2/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0035**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-18-8.5-050516	5/5/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-18-8.5-072516	7/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-18-8.5-102516	10/25/2016	<0.011	U		<0.017	U		<0.017	U		<0.0074	U		**0.0044**	J		<0.075	U		<0.014	U		<0.014	U	
		VMP-18-8.5-013117	1/31/2017	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.012**			<0.038	U		<0.007	U		<0.007	U	
		VMP-18-8.5-050317	5/3/2017	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-18-8.5-072717	7/27/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00088**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-18-8.5-110317	11/3/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.00041**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-18-8.5-012418	1/24/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0035**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-18-8.5-033018	3/30/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00044**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-18-8.5-041018	4/10/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-18-8.5-080718	8/7/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-18-8.5-102618	10/26/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-18-8.5-012519	1/25/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-18-8.5-043019	4/30/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0011**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-18-8.5-072619	7/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-18-8.5-072619-DUP	7/26/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-18-8.5-102319	10/23/2019	<0.0054	U		<0.0086	U	UJ	<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-18-8.5-102319-DUP	10/23/2019	<0.0055	U		<0.0089	U	UJ	<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-18-8.5-012420	1/24/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-18-8.5-042920	4/29/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-18-8.5-042920-DUP	4/29/2020	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-18-8.5-112420	11/24/2020	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-18-8.5-012621	1/26/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-17	5 ft	VMP-17-5-020415	2/4/2015	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-17-5-050115	5/1/2015	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0078			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-17-5-072815	7/28/2015	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		0.003	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-17-5-102915	10/29/2015	<0.0068	U		0.0024	J		0.0083			<0.0062	U		0.0011	J		<0.0032	U		0.0098			0.0052	J	
		VMP-17-5-020216	2/2/2016	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0029	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-17-5-050216	5/2/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-17-5-072516	7/25/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0086			<0.0036	U		0.0045	J		0.0015	J	
		VMP-17-5-103116	10/31/2016	<0.0076	U		0.0013	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		0.0013	J		<0.0061	U	
		VMP-17-5-012417	1/24/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-17-5-050217	5/2/2017	<0.0063	U		<0.0066	U		0.0027	J		<0.0058	U		0.028			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-17-5-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-17-5-110217	11/2/2017	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-17-5-012418	1/24/2018	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-17-5-042418	4/24/2018	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-17-5-042418-DUP	4/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-17-5-071818	7/18/2018	<0.0064	U		0.0013	J		0.0051	J		0.002	J		0.088			<0.0031	U		0.042			0.014		
		VMP-17-5-103018	10/30/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0047	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-17-5-012419	1/24/2019	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-17-5-042519	4/25/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-17-5-073119	7/31/2019	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-17-5-102119	10/21/2019	<0.0069	U		0.0011	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-17-5-012220	1/22/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-17-5-042820	4/28/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-17-5-072220	7/22/2020	<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-17-5-110320	11/3/2020	<0.0071	U		0.0018	J		<0.0065	U		<0.0065	U		0.0012	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-17-5-012821	1/28/2021	<0.0058	U		0.0018	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
VMP-18	8.5 ft	VMP-18-8.5-020415	2/4/2015	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0016	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-18-8.5-050115	5/1/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-18-8.5-050115-DUP	5/1/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0012	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-18-8.5-072815	7/28/2015	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-18-8.5-102915	10/29/2015	<0.0066	U		0.0028	J		<0.006	U		<0.006	U		0.0035	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-18-8.5-020216	2/2/2016	<0.0067	U		0.0015	J		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-18-8.5-050516	5/5/2016	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0052	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-18-8.5-072516	7/25/2016	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-18-8.5-102516	10/25/2016	<0.014	U		<0.014	U		<0.012	U		<0.012	U		<0.012	J	U	<0.0064	U		<0.011	U		<0.011	U	
		VMP-18-8.5-013117	1/31/2017	**0.0024**	J		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0014	J		**0.00082**	J	
		VMP-18-8.5-050317	5/3/2017	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		<0.0051	J	U	<0.0028	U		0.001	J		<0.0047	U	
		VMP-18-8.5-072717	7/27/2017	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		0.0055	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-18-8.5-110317	11/3/2017	<0.0062	U		0.0011	J		<0.0056	U		<0.0056	U		0.025			<0.0029	U		<0.005	U		<0.005	U	
		VMP-18-8.5-110317-DUP	11/3/2017	<0.0056	U		0.0012	J		<0.0051	U		<0.0051	U		0.021			<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-18-8.5-012418	1/24/2018	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-18-8.5-033018	3/30/2018	<0.0065	U		0.0012	J		**0.01**			<0.0059	U		0.011			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-18-8.5-041018	4/10/2018	<0.006	U		0.0016	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-18-8.5-080718	8/7/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-18-8.5-102618	10/26/2018	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-18-8.5-012519	1/25/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-18-8.5-043019	4/30/2019	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-18-8.5-072619	7/26/2019	<0.0067	U		0.00095	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-18-8.5-072619-DUP	7/26/2019	<0.0068	U		0.00094	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-18-8.5-102319	10/23/2019	<0.0068	U		0.0026	J	J	<0.0062	U		<0.0062	U		0.0028	J		<0.0032	U		0.0023	J		<0.0055	U	
		VMP-18-8.5-102319-DUP	10/23/2019	<0.007	U		0.002	J	J	<0.0064	U		<0.0064	U		0.0014	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-18-8.5-012420	1/24/2020	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-18-8.5-042920	4/29/2020	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-18-8.5-042920-DUP	4/29/2020	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-18-8.5-112420	11/24/2020	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-18-8.5-012621	1/26/2021	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	**0.01**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-19-5-050115	5/1/2015	**0.017**	J		**0.001**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0068**	J	
		VMP-19-5-072815	7/28/2015	**0.022**	J		**0.0013**	J		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		0.051			**0.0081**	J	
		VMP-19-5-102615	10/26/2015	**0.031**	J		<0.0044	J	U	<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.016**	J	
		VMP-19-5-020216	2/2/2016	**0.016**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.012	J		<0.016	U	
		VMP-19-5-050616	5/6/2016	**0.021**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0035**	J	
		VMP-19-5-072816	7/28/2016	**0.023**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0032**	J	
		VMP-19-5-102516	10/25/2016	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-19-5-013117	1/31/2017	**0.0037**	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-19-5-022717	2/27/2017	**0.013**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0048**	J	
		VMP-19-5-042017	4/20/2017	<0.032	J	U	**0.00045**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		0.017			<0.016	U	
		VMP-19-5-072717	7/27/2017	**0.024**	J		**0.0032**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.01	J		**0.0062**	J	
		VMP-19-5-102517	10/25/2017	<0.027	J	U	**0.00074**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-19-5-012518	1/25/2018	**0.012**	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0099	J		**0.0039**	J	
		VMP-19-5-042618	4/26/2018	**0.019**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0029**	J	
		VMP-19-5-073018	7/30/2018	**0.021**	J		**0.00066**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-19-5-073018-DUP	7/30/2018	**0.044**			**0.00064**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-19-5-103118	10/31/2018	**0.01**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-19-5-103118-DUP	10/31/2018	**0.0072**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-19-5-012219	1/22/2019	**0.026**			<0.0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		<0.0098	U		**0.0037**	J	
		VMP-19-5-043019	4/30/2019	**0.033**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.005**	J	
		VMP-19-5-043019-Dup	4/30/2019	**0.026**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-19-5-073119	7/31/2019	**0.22**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.032**		
		VMP-19-5-111519R	11/15/2019	**0.0076**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-19-5-022120	2/21/2020	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-19-5-043020	4/30/2020	**0.0077**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-19-5-043020-DUP	4/30/2020	**0.0067**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-19-5-072720	7/27/2020	**0.023**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0018	J		**0.0026**	J	
		VMP-19-5-110420	11/4/2020	**0.036**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0056**	J	
		VMP-19-5-012621	1/26/2021	**0.0062**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0062	J		<0.014	U	
	5 ft	VMP-20-5-012715	1/27/2015	**0.0092**	J		**0.00086**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-5-042715	4/27/2015	**0.011**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-5-072015	7/20/2015	**0.015**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.0029	J		**0.0043**	J	
		VMP-20-5-102015	10/20/2015	<0.029	J	U	**0.0018**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.009	J		**0.0013**	J	
		VMP-20-5-021616	2/16/2016	**0.02**	J		<0.0052	U		<0.011	U		<0.017	U		<0.063	U		<0.0036	U		<0.015	U		**0.0042**	J	
		VMP-20-5-042516	4/25/2016	<0.033	J	U	**0.0017**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-20-5-072216	7/22/2016	**0.021**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0099**	J	
		VMP-20-5-102616	10/26/2016	**0.0084**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-20-5-012617	1/26/2017	**0.0096**	J		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-5-042617	4/26/2017	**0.017**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0042**	J	
		VMP-20-5-072417	7/24/2017	**0.0094**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.004**	J	
		VMP-20-5-103117	10/31/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-20-5-012218	1/22/2018	<0.028	U		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-5-041218	4/12/2018	**0.0077**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-5-071818	7/18/2018	**0.024**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-20-5-102418	10/24/2018	**0.0032**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-20-5-012119	1/21/2019	**0.51**	J		**0.057**	J		<0.34	U		<0.53	U		<2	U		<0.11	U		<0.49	U	UJ	<0.61	U	
		VMP-20-5-042619	4/26/2019	**0.024**	J		**0.0026**	J		<0.016	U		<0.024	U		<0.092	U		<0.0052	U		<0.022	U		<0.028	U	
		VMP-20-5-072219	7/22/2019	**0.014**	J		**0.0059**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-5-102319	10/23/2019	**0.014**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-5-012420	1/24/2020	**0.0081**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0044	J		<0.016	U	
		VMP-20-5-022120	2/21/2020	**0.0088**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-5-042420	4/24/2020	**0.019**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-5-072320	7/23/2020	**0.012**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0027**	J	
		VMP-20-5-112420	11/24/2020	**0.08**			**0.00094**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0044**	J	
		VMP-20-5-012521	1/25/2021	<0.028	U		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-19-5-050115	5/1/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-19-5-072815	7/28/2015	<0.019	J	U	<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.0022**	J		<0.031	U		<0.0078	U	
		VMP-19-5-102615	10/26/2015	**0.022**			<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-19-5-020216	2/2/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-19-5-050616	5/6/2016	**0.00084**	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0041**	J		<0.029	U	UJ	<0.0072	U	
		VMP-19-5-072816	7/28/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0034**	J		<0.03	U		<0.0075	U	
		VMP-19-5-102516	10/25/2016	**0.0051**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-19-5-013117	1/31/2017	**0.0015**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-19-5-022717	2/27/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-19-5-042017	4/20/2017	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0015**	J		<0.028	U		<0.0071	U	
		VMP-19-5-072717	7/27/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0069**			<0.025	U		<0.0063	U	
		VMP-19-5-102517	10/25/2017	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-19-5-012518	1/25/2018	**0.011**	J		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-19-5-042618	4/26/2018	**0.0046**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-19-5-073018	7/30/2018	**0.0018**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0016**	J		<0.024	U		<0.006	U	
		VMP-19-5-073018-DUP	7/30/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0014**	J		<0.023	U		<0.0058	U	
		VMP-19-5-103118	10/31/2018	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-19-5-012219	1/22/2019	<0.013	U		<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U	
		VMP-19-5-043019	4/30/2019	**0.0024**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-19-5-073119	7/31/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0035**	J		<0.026	U		<0.0064	U	
		VMP-19-5-111519R	11/15/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-19-5-022120	2/21/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-19-5-043020	4/30/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-19-5-043020-DUP	4/30/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		**0.0022**	J		<0.0062	U	
		VMP-19-5-072720	7/27/2020	**0.002**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0035**	J		<0.025	U		<0.0062	U	
		VMP-19-5-110420	11/4/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0068	U	
		VMP-19-5-012621	1/26/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
	5 ft	VMP-20-5-012715	1/27/2015	<0.016	U		<0.0079	U		<0.0058	J	U	<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-20-5-042715	4/27/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-20-5-072015	7/20/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-20-5-102015	10/20/2015	**0.0035**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-20-5-021616	2/16/2016	<0.02	J	U	<0.01	U		<0.0075	U		<0.014	U		<0.017	U		<0.008	U		<0.034	U		<0.0084	U	
		VMP-20-5-042516	4/25/2016	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-20-5-072216	7/22/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-20-5-102616	10/26/2016	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-20-5-012617	1/26/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-20-5-042617	4/26/2017	**0.0022**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-20-5-072417	7/24/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-20-5-103117	10/31/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-20-5-012218	1/22/2018	<0.014	U	UJ	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-20-5-041218	4/12/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-20-5-071818	7/18/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-20-5-102418	10/24/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-20-5-012119	1/21/2019	<0.64	U		<0.32	U		<0.24	U		<0.44	U		<0.54	U		<0.25	U		<1.1	U		<0.27	U	
		VMP-20-5-042619	4/26/2019	<0.03	U		<0.015	U		<0.011	U		<0.02	U		<0.025	U		<0.012	U		<0.049	U		<0.012	U	
		VMP-20-5-072219	7/22/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-20-5-102319	10/23/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-20-5-012420	1/24/2020	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-20-5-022120	2/21/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-20-5-042420	4/24/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-20-5-072320	7/23/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0008**	J		<0.025	U		<0.0063	U	
		VMP-20-5-112420	11/24/2020	**0.013**	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-20-5-012521	1/25/2021	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-19-5-050115	5/1/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-19-5-072815	7/28/2015	**0.0047**	J		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0029**	J		<0.0061	U		<0.0061	U	
		VMP-19-5-102615	10/26/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-19-5-020216	2/2/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0028**	J		<0.0056	U		<0.0056	U	
		VMP-19-5-050616	5/6/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-19-5-072816	7/28/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0022**	J		<0.0059	U		<0.0059	U	
		VMP-19-5-102516	10/25/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-19-5-013117	1/31/2017	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0021**	J		<0.0054	U		<0.0054	U	
		VMP-19-5-022717	2/27/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-19-5-042017	4/20/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0022**	J		<0.0055	U		<0.0055	U	
		VMP-19-5-072717	7/27/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-19-5-102517	10/25/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-19-5-012518	1/25/2018	**0.0019**	J		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-19-5-042618	4/26/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-19-5-073018	7/30/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-19-5-073018-DUP	7/30/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-19-5-103118	10/31/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-19-5-012219	1/22/2019	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0026**	J		<0.0042	U		<0.0042	U	
		VMP-19-5-043019	4/30/2019	<0.0043	U		<0.0095	U		<0.0074	U		0.0052	J		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-19-5-073119	7/31/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-19-5-111519R	11/15/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-19-5-022120	2/21/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-19-5-043020	4/30/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-19-5-043020-DUP	4/30/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-19-5-072720	7/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-19-5-110420	11/4/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-19-5-012621	1/26/2021	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
	5 ft	VMP-20-5-012715	1/27/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-20-5-042715	4/27/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-20-5-072015	7/20/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0032**	J		<0.0057	U		<0.0057	U	
		VMP-20-5-102015	10/20/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0037**	J		<0.0049	U		<0.0049	U	
		VMP-20-5-021616	2/16/2016	<0.0056	U		<0.012	U		<0.0098	U		<0.0098	U		<0.0098	U		**0.0036**	J		<0.0066	U		<0.0066	U	
		VMP-20-5-042516	4/25/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-20-5-072216	7/22/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-20-5-102616	10/26/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-20-5-012617	1/26/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-20-5-042617	4/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0019**	J		<0.0048	U		<0.0048	U	
		VMP-20-5-072417	7/24/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-20-5-103117	10/31/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-20-5-012218	1/22/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.002**	J		<0.0047	U		<0.0047	U	
		VMP-20-5-041218	4/12/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-20-5-071818	7/18/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-20-5-102418	10/24/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-20-5-012119	1/21/2019	**1.5**			<0.4	U		<0.31	U		<0.31	U		<0.31	U		<0.25	U		<0.21	U		<0.21	U	
		VMP-20-5-042619	4/26/2019	<0.0082	U		<0.018	U		<0.014	U		<0.014	U		<0.014	U		**0.0025**	J		<0.0096	U		<0.0096	U	
		VMP-20-5-072219	7/22/2019	**0.0025**	J		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-20-5-102319	10/23/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0031**	J	J	<0.0047	U		<0.0047	U	
		VMP-20-5-012420	1/24/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-20-5-022120	2/21/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-20-5-042420	4/24/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-20-5-072320	7/23/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-20-5-112420	11/24/2020	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-20-5-012521	1/25/2021	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-19-5-050115	5/1/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-19-5-072815	7/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.0042**	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-19-5-102615	10/26/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	J	U	<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-19-5-020216	2/2/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-19-5-050616	5/6/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-19-5-072816	7/28/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-19-5-102516	10/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-19-5-013117	1/31/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-19-5-022717	2/27/2017	<0.005	U		<0.005	U		<0.005	U		**0.0021**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-19-5-042017	4/20/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-19-5-072717	7/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-19-5-102517	10/25/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-19-5-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		**0.0016**	J		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-19-5-042618	4/26/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-19-5-073018	7/30/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-19-5-073018-DUP	7/30/2018	<0.0044	U		<0.0044	U		<0.0044	U		**0.0033**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-19-5-103118	10/31/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-19-5-012219	1/22/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-19-5-043019	4/30/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-19-5-073119	7/31/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-19-5-111519R	11/15/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-19-5-022120	2/21/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-19-5-043020	4/30/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-19-5-043020-DUP	4/30/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-19-5-072720	7/27/2020	<0.0048	U		0.0017	J		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		**0.0028**	J	
		VMP-19-5-110420	11/4/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-19-5-012621	1/26/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
	5 ft	VMP-20-5-012715	1/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-20-5-042715	4/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-20-5-072015	7/20/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-20-5-102015	10/20/2015	<0.0048	U		0.0016	J		<0.0048	U		<0.042	J	U	<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-20-5-021616	2/16/2016	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0075	U		<0.0074	U		<0.0074	U		<0.023	U	
		VMP-20-5-042516	4/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-20-5-072216	7/22/2016	<0.0051	U		<0.0051	U		<0.0051	U		**0.029**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-5-102616	10/26/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-5-012617	1/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-5-042617	4/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-5-072417	7/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0042**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-20-5-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0071**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-20-5-012218	1/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U	UJ	<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-5-041218	4/12/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-5-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-20-5-102418	10/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		**0.0021**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-20-5-012119	1/21/2019	<0.2	U		<0.2	U		<0.2	U		**0.2**	J		<0.24	U		<0.23	U		<0.23	U		<0.74	U	
		VMP-20-5-042619	4/26/2019	<0.0094	U		<0.0094	U		<0.0094	U		<0.082	U		<0.011	U		<0.011	U		<0.011	U		<0.034	U	
		VMP-20-5-072219	7/22/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-5-102319	10/23/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U	UJ	<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-5-012420	1/24/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-20-5-022120	2/21/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-5-042420	4/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-5-072320	7/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-20-5-112420	11/24/2020	<0.0043	U		<0.0043	U		<0.0043	U		**0.0017**	J	J	<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-20-5-012521	1/25/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.0097	U		**0.0012**	J		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.00094**	J	
		VMP-19-5-050115	5/1/2015	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0011**	J	
		VMP-19-5-072815	7/28/2015	<0.011	J	U	<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		**0.0062**			<0.064	U		**0.019**		
		VMP-19-5-102615	10/26/2015	0.012			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-19-5-020216	2/2/2016	0.0056	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		**0.0042**	J		<0.059	U		**0.0033**	J	
		VMP-19-5-050616	5/6/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-19-5-072816	7/28/2016	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-19-5-102516	10/25/2016	<0.0095	J	U	**0.0023**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0017**	J	
		VMP-19-5-013117	1/31/2017	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-19-5-022717	2/27/2017	<0.0094	J	U	<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-19-5-042017	4/20/2017	0.026			<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-19-5-072717	7/27/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		**0.002**	J		<0.052	U		**0.0046**		
		VMP-19-5-102517	10/25/2017	0.0059	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-19-5-012518	1/25/2018	0.0084	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		**0.0029**	J		<0.049	U		<0.004	U	
		VMP-19-5-042618	4/26/2018	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-19-5-073018	7/30/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0016**	J		<0.05	U		**0.0046**		
		VMP-19-5-073018-DUP	7/30/2018	0.011			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0022**	J		<0.048	U		**0.0052**		
		VMP-19-5-103118	10/31/2018	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-19-5-012219	1/22/2019	<0.0078	U		<0.0045	U		<0.0051	U		<0.0079	U		<0.0072	U		<0.0042	U		<0.044	U		<0.0036	U	
		VMP-19-5-043019	4/30/2019	0.0054	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-19-5-073119	7/31/2019	0.013		J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-19-5-111519R	11/15/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-19-5-022120	2/21/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-19-5-043020	4/30/2020	0.0067	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-19-5-043020-DUP	4/30/2020	0.0072	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-19-5-072720	7/27/2020	0.0045	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-19-5-110420	11/4/2020	0.019			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-19-5-012621	1/26/2021	<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
	5 ft	VMP-20-5-012715	1/27/2015	0.01	J		**0.0018**	J		0.0048	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-20-5-042715	4/27/2015	0.0021	J		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	ND,UJ	UJ	<0.0044	U	
		VMP-20-5-072015	7/20/2015	0.016			**0.02**			0.046			<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0013**	J	
		VMP-20-5-102015	10/20/2015	0.0048	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0014**	J		<0.051	ND,UJ	UJ	**0.0025**	J	
		VMP-20-5-021616	2/16/2016	0.0081	J		<0.0071	U		<0.008	U		<0.012	U		<0.011	U		<0.0067	U		<0.07	U		<0.0057	U	
		VMP-20-5-042516	4/25/2016	0.018			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	J	U	<0.06	U		<0.005	J	U
		VMP-20-5-072216	7/22/2016	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.004**	J		<0.055	U		**0.0019**	J	
		VMP-20-5-102616	10/26/2016	<0.0093	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0014**	J	
		VMP-20-5-012617	1/26/2017	0.011			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.002**	J	
		VMP-20-5-042617	4/26/2017	0.012			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-5-072417	7/24/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-20-5-103117	10/31/2017	0.023			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0011**	J		<0.048	U		<0.0039	U	
		VMP-20-5-012218	1/22/2018	0.01	J0	J	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-20-5-041218	4/12/2018	0.0053	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-20-5-071818	7/18/2018	0.0053	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-20-5-102418	10/24/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0014**	J		<0.048	U		**0.0014**	J	
		VMP-20-5-012119	1/21/2019	0.22	J		<0.22	U		<0.25	U		<0.39	U		<0.36	U		<0.21	U		<2.2	U		**0.63**		
		VMP-20-5-042619	4/26/2019	<0.018	U		<0.01	U		<0.012	U		<0.018	U		<0.017	U		<0.0097	U		<0.1	U		<0.0084	U	
		VMP-20-5-072219	7/22/2019	0.0072	J	J	**0.0025**	J		<0.0058	U		<0.0091	U		<0.0083	U		**0.0092**			<0.051	U		<0.0042	U	
		VMP-20-5-102319	10/23/2019	<0.0087	ND,UJ	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-20-5-012420	1/24/2020	<0.01	ND,UJ	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-20-5-022120	2/21/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-5-042420	4/24/2020	0.016		J	<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-20-5-072320	7/23/2020	0.0065	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-20-5-112420	11/24/2020	0.01	J	J	<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-20-5-012521	1/25/2021	<0.022	J	U	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0016**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					<0.013	U		**0.0012**	J	
		VMP-19-5-050115	5/1/2015	**0.00086**	J		0.005	J		<0.006	U		<0.005	J	U	<0.0044	U					**0.0045**	J		<0.006	U	
		VMP-19-5-072815	7/28/2015	<0.024	U		0.062			<0.0074	U		<0.0061	U		<0.0054	U					**0.0081**	J		<0.0074	U	
		VMP-19-5-102615	10/26/2015	<0.023	U		0.0036	J		<0.0068	U		**0.0017**	J		<0.005	U					**0.016**		J	<0.0068	U	
		VMP-19-5-020216	2/2/2016	<0.023	U		0.0085	J		<0.0068	U		<0.0056	U		<0.005	U					**0.047**			<0.0068	U	
		VMP-19-5-050616	5/6/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.0038**	J		<0.0068	U	
		VMP-19-5-072816	7/28/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					<0.014	U		<0.0072	U	
		VMP-19-5-102516	10/25/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		**0.0016**	J	J	**0.026**			**0.00083**	J	
		VMP-19-5-013117	1/31/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-19-5-022717	2/27/2017	<0.02	U		0.004	J		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-19-5-042017	4/20/2017	<0.022	U		0.069			<0.0067	U		<0.0056	U		<0.02	U					**0.016**			<0.0067	U	
		VMP-19-5-072717	7/27/2017	**0.0034**	J		0.026			<0.006	U		<0.005	U		<0.018	U					**0.0063**	J		<0.006	U	
		VMP-19-5-102517	10/25/2017	<0.019	U		0.0053	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-19-5-012518	1/25/2018	<0.019	U		0.091			<0.0056	U		<0.0047	U		<0.016	U					**0.018**			<0.0056	U	
		VMP-19-5-042618	4/26/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-19-5-073018	7/30/2018	<0.019	U		0.0036	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0022**	J		<0.0058	U	
		VMP-19-5-073018-DUP	7/30/2018	<0.018	U		0.0046	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0042**	J		<0.0055	U	
		VMP-19-5-103118	10/31/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-19-5-012219	1/22/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0042	U		<0.015	U					**0.0021**	J		**0.0025**	J	
		VMP-19-5-043019	4/30/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-19-5-073119	7/31/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-19-5-111519R	11/15/2019	<0.021	U		0.0031	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-19-5-022120	2/21/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0041**	J		<0.0059	U	
		VMP-19-5-043020	4/30/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.01**	J		<0.0058	U	
		VMP-19-5-043020-DUP	4/30/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.013**			<0.0058	U	
		VMP-19-5-072720	7/27/2020	<0.02	U		0.0024	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	J	U	<0.0059	U	
		VMP-19-5-110420	11/4/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.013**	J		<0.0065	U	
		VMP-19-5-012621	1/26/2021	<0.02	U		0.0052	J		<0.0061	U		<0.005	U		<0.018	U					**0.0051**	J		<0.0061	U	
	5 ft	VMP-20-5-012715	1/27/2015	<0.021	U		<0.015	U		**0.0014**	J		<0.0052	U		<0.0045	U					**0.0046**	J		**0.0046**	J	
		VMP-20-5-042715	4/27/2015	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.0045	U					**0.014**			<0.0062	J	U
		VMP-20-5-072015	7/20/2015	**0.00086**	J		0.0037	J		**0.0026**	J		<0.0058	J	U	<0.0051	U					**0.0039**	J		**0.0074**		
		VMP-20-5-102015	10/20/2015	<0.02	U		0.0046	J		<0.0059	U		<0.0049	U		<0.0043	U					**0.0041**	J		<0.0059	U	
		VMP-20-5-021616	2/16/2016	<0.027	U		<0.019	U		<0.008	U		**0.0011**	J		<0.0059	U					**0.035**			<0.008	U	
		VMP-20-5-042516	4/25/2016	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.02**			<0.0069	U	
		VMP-20-5-072216	7/22/2016	<0.021	U		0.0076	J		<0.0063	U		<0.0052	U		<0.018	U					**0.026**			<0.0063	U	
		VMP-20-5-102616	10/26/2016	<0.02	U		0.0091	J		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.0084**	J		<0.006	U	
		VMP-20-5-012617	1/26/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.068**			<0.0057	U	
		VMP-20-5-042617	4/26/2017	<0.02	U		0.02			<0.0059	U		<0.0049	U		<0.017	U					**0.0051**	J		<0.0059	U	
		VMP-20-5-072417	7/24/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-20-5-103117	10/31/2017	<0.018	U		0.013	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-20-5-012218	1/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.006**	J		<0.0058	U	
		VMP-20-5-041218	4/12/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0092**	J		<0.0058	U	
		VMP-20-5-071818	7/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.018**			<0.006	U	
		VMP-20-5-102418	10/24/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-20-5-012119	1/21/2019	<0.84	U		1.1			<0.25	U		<0.21	U		<0.74	U					**0.17**	J		<0.25	U	
		VMP-20-5-042619	4/26/2019	<0.039	U		0.011	J		<0.012	U		<0.0097	U		<0.034	U					<0.023	U		<0.012	U	
		VMP-20-5-072219	7/22/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.004**	J		<0.0058	U	
		VMP-20-5-102319	10/23/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-20-5-012420	1/24/2020	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-20-5-022120	2/21/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-20-5-042420	4/24/2020	<0.021	U		<0.015	U		**0.0011**	J		<0.0052	U		<0.018	U					**0.011**	J		<0.0063	U	
		VMP-20-5-072320	7/23/2020	<0.02	U		0.0019	J		**0.0006**	J		<0.005	U		<0.018	U					<0.012	J	U	**0.0016**	J	
		VMP-20-5-112420	11/24/2020	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.018**		J	<0.0053	U	
		VMP-20-5-012521	1/25/2021	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0037**	J		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-19-5-050115	5/1/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-19-5-072815	7/28/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-19-5-102615	10/26/2015	<0.0059	U		<0.0095	U		**0.0045**	J		<0.0041	U		**0.0023**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-19-5-020216	2/2/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0031**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-19-5-050616	5/6/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-19-5-072816	7/28/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-19-5-102516	10/25/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0069	U		<0.0069	U	
		VMP-19-5-013117	1/31/2017	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-19-5-022717	2/27/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-19-5-042017	4/20/2017	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0008**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-19-5-072717	7/27/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-19-5-102517	10/25/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-19-5-012518	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.061**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-19-5-042618	4/26/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-19-5-073018	7/30/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00058**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-19-5-073018-DUP	7/30/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.00099**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-19-5-103118	10/31/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-19-5-012219	1/22/2019	<0.0044	U		<0.0071	U		**0.0018**	J		<0.003	U		<0.0039	U		<0.03	U		<0.0056	U		<0.0056	U	
		VMP-19-5-043019	4/30/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-19-5-073119	7/31/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-19-5-111519R	11/15/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-19-5-022120	2/21/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-19-5-043020	4/30/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-19-5-043020-DUP	4/30/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-19-5-072720	7/27/2020	<0.0082	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-19-5-110420	11/4/2020	<0.0056	U		<0.0091	U		**0.002**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-19-5-012621	1/26/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0017**	J		<0.037	U		<0.0067	U		<0.0067	U	
	5 ft	VMP-20-5-012715	1/27/2015	<0.0054	U		<0.0086	U		**0.0017**	J		<0.0037	U		**0.0037**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-20-5-042715	4/27/2015	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0011**	J		<0.037	ND,UJ	UJ	<0.0068	U		<0.0068	U	
		VMP-20-5-072015	7/20/2015	<0.006	U		<0.0097	U		**0.004**	J		<0.0042	U		**0.027**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-20-5-102015	10/20/2015	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0016**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-5-021616	2/16/2016	<0.0069	U		<0.011	U		<0.011	U		<0.0048	U		<0.0061	U		<0.048	U		<0.0089	U		<0.0089	U	
		VMP-20-5-042516	4/25/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0041**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-20-5-072216	7/22/2016	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0016**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-20-5-102616	10/26/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0017**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-20-5-012617	1/26/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	J	U	<0.034	U		<0.0064	U		<0.0064	U	
		VMP-20-5-042617	4/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0021**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-5-072417	7/24/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-5-103117	10/31/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.011**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-20-5-012218	1/22/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-20-5-041218	4/12/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-20-5-071818	7/18/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-5-102418	10/24/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-20-5-012119	1/21/2019	<0.22	U		<0.35	U		<0.35	U		**0.12**	J		**0.59**			<1.5	U		<0.28	U		**0.26**	J	
		VMP-20-5-042619	4/26/2019	<0.01	U		<0.016	U		<0.016	U		<0.007	U		<0.0089	U		<0.07	U		<0.013	U		<0.013	U	
		VMP-20-5-072219	7/22/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.045**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-5-102319	10/23/2019	<0.0049	U		<0.008	U	UJ	<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-20-5-012420	1/24/2020	<0.006	U		<0.0096	U		**0.0074**	J		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-20-5-022120	2/21/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-5-042420	4/24/2020	<0.0054	U		<0.0088	U		**0.0053**	J		<0.0038	U		**0.0021**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-20-5-072320	7/23/2020	<0.0083	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00092**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-5-112420	11/24/2020	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-20-5-012521	1/25/2021	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-19	5 ft	VMP-19-5-020415	2/4/2015	<0.0069	U		<0.0072	U		**0.0012**	J		<0.0063	U		0.032			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-19-5-050115	5/1/2015	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-19-5-072815	7/28/2015	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		0.012			<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-19-5-102615	10/26/2015	<0.0074	U		<0.0078	J	U	<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-19-5-020216	2/2/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0014	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-19-5-050616	5/6/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-19-5-072816	7/28/2016	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-19-5-102516	10/25/2016	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		0.016			<0.0032	U		0.01			**0.004**	J	
		VMP-19-5-013117	1/31/2017	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		0.00064	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-19-5-022717	2/27/2017	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-19-5-042017	4/20/2017	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.034			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-19-5-072717	7/27/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.011			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-19-5-102517	10/25/2017	<0.0061	U		0.0011	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-19-5-012518	1/25/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-19-5-042618	4/26/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-19-5-073018	7/30/2018	<0.0063	U		0.0019	J		<0.0058	U		<0.0058	U		0.0017	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-19-5-073018-DUP	7/30/2018	<0.006	U		0.0016	J		<0.0055	U		<0.0055	U		0.0016	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-19-5-103118	10/31/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-19-5-103118-DUP	10/31/2018	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-19-5-012219	1/22/2019	<0.0055	U		0.0014	J		<0.0051	U		<0.0051	U		0.0037	J		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-19-5-043019	4/30/2019	<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-19-5-043019-Dup	4/30/2019	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-19-5-073119	7/31/2019	<0.007	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-19-5-111519R	11/15/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-19-5-022120	2/21/2020	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-19-5-043020	4/30/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-19-5-043020-DUP	4/30/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-19-5-072720	7/27/2020	**0.0032**	J		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-19-5-110420	11/4/2020	<0.0071	U		0.0013	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-19-5-012621	1/26/2021	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U		<0.0054	U	
	5 ft	VMP-20-5-012715	1/27/2015	<0.0068	J	U	<0.0071	U		**0.013**			**0.0028**	J		0.01			<0.0032	U		0.0048	J		**0.0015**	J	
		VMP-20-5-042715	4/27/2015	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.021			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-20-5-072015	7/20/2015	<0.0076	U		<0.0079	J	U	**0.046**			**0.018**			0.015			<0.0036	U		0.11			**0.042**		
		VMP-20-5-102015	10/20/2015	<0.0065	U		0.002	J		<0.0059	U		<0.0059	U		0.012			<0.0031	U		0.0014	J		<0.0052	U	
		VMP-20-5-021616	2/16/2016	<0.0088	U		<0.0092	U		<0.008	U		<0.008	U		<0.0076	U		<0.0042	U		<0.0071	U		<0.0071	U	
		VMP-20-5-042516	4/25/2016	<0.0076	U		0.0014	J		<0.0069	U		<0.0069	U		<0.0066	J	U	<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-20-5-072216	7/22/2016	<0.0069	U		0.0018	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-20-5-102616	10/26/2016	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		0.12			<0.0031	U		0.0043	J		<0.0053	U	
		VMP-20-5-012617	1/26/2017	<0.0063	U		0.0017	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-20-5-042617	4/26/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-20-5-072417	7/24/2017	<0.0065	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-5-103117	10/31/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-20-5-012218	1/22/2018	<0.0063	U		0.0044	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-20-5-041218	4/12/2018	<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-20-5-071818	7/18/2018	<0.0066	U		0.0013	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-5-102418	10/24/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-20-5-012119	1/21/2019	<0.28	U		<0.29	U		<0.25	U		<0.25	U		71			<0.13	U		0.045	J		**0.17**	J	
		VMP-20-5-042619	4/26/2019	<0.013	U		<0.013	U		<0.012	U		<0.012	U		4.1			<0.0061	U		<0.01	U		<0.01	U	
		VMP-20-5-072219	7/22/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0035	J		<0.003	U		0.0062			<0.0052	U	
		VMP-20-5-102319	10/23/2019	<0.0062	U		0.002	J	J	<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-20-5-012420	1/24/2020	<0.0076	U		0.0032	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-20-5-022120	2/21/2020	<0.0064	U		0.0022	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-20-5-042420	4/24/2020	**0.0021**	J		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-20-5-072320	7/23/2020	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		0.0098			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-5-112420	11/24/2020	<0.0058	U		0.0054	J		<0.0053	U		<0.0053	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-20-5-012521	1/25/2021	<0.0063	U		0.0027	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	**0.014**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0047**	J	
		VMP-20-10-012715-DUP	1/27/2015	**0.01**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.003**	J	
		VMP-20-10-042715	4/27/2015	**0.0038**	J		**0.00096**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.004**	J	
		VMP-20-10-072015	7/20/2015	**0.01**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0028**	J	
		VMP-20-10-102015	10/20/2015	**0.018**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0068**	J	
		VMP-20-10-102015-DUP	10/20/2015	<0.033	J	U	**0.0013**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0036**	J	
		VMP-20-10-021616	2/16/2016	**0.018**	J		**0.0024**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0071	J		**0.0044**	J	
		VMP-20-10-042516	4/25/2016	**0.014**	J		**0.002**	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.018			<0.017	U	
		VMP-20-10-072216	7/22/2016	**0.028**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-20-10-102616	10/26/2016	**0.022**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0082**	J	
		VMP-20-10-012617	1/26/2017	<0.029	J	U	<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-20-10-042617	4/26/2017	<0.029	J	U	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-20-10-072417	7/24/2017	**0.0099**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0044**	J	
		VMP-20-10-103117	10/31/2017	<0.026	J	U	<0.0035	J	U	<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-20-10-012218	1/22/2018	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-10-041218	4/12/2018	**0.011**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-10-071818	7/18/2018	**0.097**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0046**	J	
		VMP-20-10-102418	10/24/2018	**0.017**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-20-10-012119	1/21/2019	<0.33	U		**0.013**	J		<0.094	U		<0.14	U		<0.54	U		<0.031	U		<0.13	U	UJ	<0.16	U	
		VMP-20-10-042619	4/26/2019	**0.01**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-20-10-072219	7/22/2019	**0.0043**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-10-102319	10/23/2019	<0.028	U		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-10-012420	1/24/2020	**0.018**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-10-042420	4/24/2020	**0.014**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-10-072320	7/23/2020	**0.0096**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0015**	J	
		VMP-20-10-110220	11/2/2020	**0.0079**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-10-012521	1/25/2021	**0.0068**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
	25 ft	VMP-20-25-012715	1/27/2015	**0.01**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0054**	J	
		VMP-20-25-042715	4/27/2015	**0.0081**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0054**	J	
		VMP-20-25-072015	7/20/2015	**0.013**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.054			**0.0024**	J	
		VMP-20-25-102015	10/20/2015	**0.022**	J		**0.0013**	J		<0.0079	U		<0.012	U		**0.0022**	J		<0.0026	U		0.021			**0.0065**	J	
		VMP-20-25-020216	2/2/2016	**0.012**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-20-25-042516	4/25/2016	<0.033	J	U	**0.0022**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-20-25-072216	7/22/2016	**0.027**	J		<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.0075**	J	
		VMP-20-25-102616	10/26/2016	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-25-012617	1/26/2017	**0.011**	J		<0.004	J	U	<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-25-012617-Dup	1/26/2017	**0.014**	J		<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0057	J		**0.0029**	J	
		VMP-20-25-042617	4/26/2017	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-20-25-072417	7/24/2017	**0.0078**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-20-25-103117	10/31/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-20-25-012218	1/22/2018	<0.027	U		<0.0037	J	U	<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-20-25-041218	4/12/2018	**0.007**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-25-071818	7/18/2018	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-20-25-102418	10/24/2018	**0.0086**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-20-25-012119	1/21/2019	**0.0061**	J		**0.0012**	J		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U	UJ	<0.012	U	
		VMP-20-25-012119-DUP	1/21/2019	**0.012**	J		**0.00084**	J		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U	UJ	<0.012	U	
		VMP-20-25-042619	4/26/2019	**0.019**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-25-072619	7/26/2019	**0.017**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-20-25-102319	10/23/2019	<0.029	U		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-20-25-102319-DUP	10/23/2019	**0.014**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U	UJ	<0.014	U	
		VMP-20-25-012420	1/24/2020	**0.014**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-20-25-042420	4/24/2020	**0.011**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-20-25-072320	7/23/2020	**0.024**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0066**	J	
		VMP-20-25-110220	11/2/2020	**0.022**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-20-25-012521	1/25/2021	**0.039**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-20-10-012715-DUP	1/27/2015	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-20-10-042715	4/27/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-20-10-072015	7/20/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-20-10-102015	10/20/2015	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-20-10-102015-DUP	10/20/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-20-10-021616	2/16/2016	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-20-10-042516	4/25/2016	**0.0075**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-20-10-072216	7/22/2016	**0.0079**	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		**0.0017**	J		<0.029	U		<0.0073	U	
		VMP-20-10-102616	10/26/2016	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-20-10-012617	1/26/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-20-10-042617	4/26/2017	**0.0018**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-20-10-072417	7/24/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-20-10-103117	10/31/2017	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-20-10-012218	1/22/2018	<0.015	U	UJ	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-20-10-041218	4/12/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-20-10-071818	7/18/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-20-10-102418	10/24/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-20-10-012119	1/21/2019	<0.18	U		<0.088	U		<0.065	U		<0.12	U		<0.15	U		<0.069	U		<0.29	U		<0.073	U	
		VMP-20-10-042619	4/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-20-10-072219	7/22/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-20-10-102319	10/23/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-20-10-012420	1/24/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-20-10-042420	4/24/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-20-10-072320	7/23/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-20-10-110220	11/2/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-20-10-012521	1/25/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
	25 ft	VMP-20-25-012715	1/27/2015	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-20-25-042715	4/27/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-20-25-072015	7/20/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	ND,UJ	UJ	<0.007	U	
		VMP-20-25-102015	10/20/2015	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		**0.0017**	J	
		VMP-20-25-020216	2/2/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-20-25-042516	4/25/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-20-25-072216	7/22/2016	**0.072**			<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-20-25-102616	10/26/2016	**0.0027**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-20-25-012617	1/26/2017	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-20-25-012617-Dup	1/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-20-25-042617	4/26/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-20-25-072417	7/24/2017	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-20-25-103117	10/31/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-20-25-012218	1/22/2018	<0.014	U	UJ	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-20-25-041218	4/12/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-20-25-071818	7/18/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-20-25-102418	10/24/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-20-25-012119	1/21/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-20-25-012119-DUP	1/21/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-20-25-042619	4/26/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		**0.0033**	J		<0.0062	U	
		VMP-20-25-072619	7/26/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-20-25-102319	10/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-20-25-102319-DUP	10/23/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-20-25-012420	1/24/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-20-25-042420	4/24/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-20-25-072320	7/23/2020	**0.0033**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-20-25-110220	11/2/2020	**0.0092**	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-20-25-012521	1/25/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-20-10-012715-DUP	1/27/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-20-10-042715	4/27/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-20-10-072015	7/20/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0036**	J		<0.0053	U		<0.0053	U	
		VMP-20-10-102015	10/20/2015	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0037**	J		<0.0045	U		<0.0045	U	
		VMP-20-10-102015-DUP	10/20/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0043**	J		<0.0056	U		<0.0056	U	
		VMP-20-10-021616	2/16/2016	**0.002**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-20-10-042516	4/25/2016	**0.0028**	J		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0034**	J		<0.0058	U		<0.0058	U	
		VMP-20-10-072216	7/22/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0031**	J		<0.0057	U		<0.0057	U	
		VMP-20-10-102616	10/26/2016	**0.0012**	J		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-20-10-012617	1/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-20-10-042617	4/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-20-10-072417	7/24/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-20-10-103117	10/31/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.002**	J		<0.0044	U		<0.0044	U	
		VMP-20-10-012218	1/22/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-20-10-041218	4/12/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-20-10-071818	7/18/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-20-10-102418	10/24/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-20-10-012119	1/21/2019	**0.073**			<0.11	U		<0.084	U		<0.084	U		<0.084	U		<0.069	U		<0.057	U		<0.057	U	
		VMP-20-10-042619	4/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-20-10-072219	7/22/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-20-10-102319	10/23/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0027**	J	J	<0.0047	U		<0.0047	U	
		VMP-20-10-012420	1/24/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-20-10-042420	4/24/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-20-10-072320	7/23/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	J	U	**0.002**	J		<0.005	U		<0.005	U	
		VMP-20-10-110220	11/2/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-20-10-012521	1/25/2021	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
	25 ft	VMP-20-25-012715	1/27/2015	<0.0044	U		<0.01	U		**0.0035**	J		0.0022	J		**0.0033**	J		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-20-25-042715	4/27/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-20-25-072015	7/20/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0031**	J		<0.0054	U		<0.0054	U	
		VMP-20-25-102015	10/20/2015	<0.004	U		**0.0026**	J		**0.0046**	J		0.004	J		**0.0045**	J		**0.0038**	J		<0.0048	U		<0.0048	U	
		VMP-20-25-020216	2/2/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-20-25-042516	4/25/2016	<0.0048	J	U	<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0028**	J		<0.0056	U		<0.0056	U	
		VMP-20-25-072216	7/22/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0022**	J		<0.006	U		<0.006	U	
		VMP-20-25-102616	10/26/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-20-25-012617	1/26/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-20-25-012617-Dup	1/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-20-25-042617	4/26/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-20-25-072417	7/24/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-20-25-103117	10/31/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-20-25-012218	1/22/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-20-25-041218	4/12/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0059**			<0.0048	U		<0.0048	U	
		VMP-20-25-071818	7/18/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-20-25-102418	10/24/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0034**	J		<0.0045	U		<0.0045	U	
		VMP-20-25-012119	1/21/2019	**0.00057**	J		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0026**	J		<0.0042	U		<0.0042	U	
		VMP-20-25-012119-DUP	1/21/2019	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0022**	J		<0.0042	U		<0.0042	U	
		VMP-20-25-042619	4/26/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-20-25-072619	7/26/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0063	U		<0.0051	U		<0.0051	U	
		VMP-20-25-102319	10/23/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J	J	<0.005	U		<0.005	U	
		VMP-20-25-102319-DUP	10/23/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-20-25-012420	1/24/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-20-25-042420	4/24/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-20-25-072320	7/23/2020	**0.0038**	J		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-20-25-110220	11/2/2020	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-20-25-012521	1/25/2021	<0.0042	U		<0.0093	U		<0.0073	U		0.006	J		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-10-012715-DUP	1/27/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-20-10-042715	4/27/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-20-10-072015	7/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-20-10-102015	10/20/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	J	U	<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-20-10-102015-DUP	10/20/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	J	U	<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-20-10-021616	2/16/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-10-042516	4/25/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-20-10-072216	7/22/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-20-10-102616	10/26/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-20-10-012617	1/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-20-10-042617	4/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-20-10-072417	7/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-20-10-103117	10/31/2017	<0.0043	U		<0.0043	U		<0.0043	U		**0.0073**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-20-10-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U	UJ	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-10-041218	4/12/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-10-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-20-10-102418	10/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0021**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-20-10-012119	1/21/2019	<0.056	U		<0.056	U		<0.056	U		<0.49	U		<0.065	U		<0.064	U		<0.064	U		<0.2	U	
		VMP-20-10-042619	4/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-10-072219	7/22/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-10-102319	10/23/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U	UJ	<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-10-012420	1/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-10-042420	4/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-10-072320	7/23/2020	<0.005	U		<0.005	U		<0.005	U		**0.0027**	J		<0.0058	U		<0.0057	U		<0.0057	U		**0.0028**	J	
		VMP-20-10-110220	11/2/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-10-012521	1/25/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
	25 ft	VMP-20-25-012715	1/27/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-20-25-042715	4/27/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-25-072015	7/20/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-20-25-102015	10/20/2015	<0.0046	U		0.0012	J		0.00092	J		<0.041	J	U	<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-20-25-020216	2/2/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-20-25-042516	4/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-20-25-072216	7/22/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-20-25-102616	10/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-20-25-012617	1/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-25-012617-Dup	1/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0038**	J		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-25-042617	4/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-25-072417	7/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-25-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		**0.00034**	J		<0.016	U	
		VMP-20-25-012218	1/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U	UJ	<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-20-25-041218	4/12/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-25-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-20-25-102418	10/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-20-25-012119	1/21/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-20-25-012119-DUP	1/21/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-20-25-042619	4/26/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-25-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-25-102319	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U	UJ	<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-25-102319-DUP	10/23/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-20-25-012420	1/24/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-20-25-042420	4/24/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-20-25-072320	7/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		**0.0015**	J		<0.0054	U		<0.0054	U		<0.0054	U		**0.0016**	J	
		VMP-20-25-110220	11/2/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-20-25-012521	1/25/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	0.0073	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-20-10-012715-DUP	1/27/2015	0.0077	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-20-10-042715	4/27/2015	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	ND,UJ	UJ	**0.0016**	J	
		VMP-20-10-072015	7/20/2015	0.036			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-20-10-102015	10/20/2015	0.0039	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	ND,UJ	UJ	<0.0039	U	
		VMP-20-10-102015-DUP	10/20/2015	0.0088	J		<0.006	U		<0.0068	U		**0.0023**	J		<0.0098	U		<0.0057	U		<0.06	ND,UJ	UJ	**0.0022**	J	
		VMP-20-10-021616	2/16/2016	0.016			**0.021**			0.011			<0.0094	U		<0.0086	U		**0.0082**			<0.052	U		**0.012**		
		VMP-20-10-042516	4/25/2016	0.007	J		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	J	U	<0.061	U		**0.0031**	J	
		VMP-20-10-072216	7/22/2016	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-20-10-102616	10/26/2016	0.0077	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0017**	J	
		VMP-20-10-012617	1/26/2017	0.0042	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-10-042617	4/26/2017	<0.0091	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-10-072417	7/24/2017	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-20-10-103117	10/31/2017	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-20-10-012218	1/22/2018	0.01	J0	J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-10-041218	4/12/2018	0.0071	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.002**	J		<0.05	U		**0.0018**	J	
		VMP-20-10-071818	7/18/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.0049**		
		VMP-20-10-102418	10/24/2018	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-20-10-012119	1/21/2019	<0.1	U		<0.061	U		<0.069	U		<0.11	U		<0.098	U		<0.058	U		<0.6	U		<0.05	U	
		VMP-20-10-042619	4/26/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-20-10-072219	7/22/2019	<0.009	ND,UJ	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-10-102319	10/23/2019	0.013	J0	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-20-10-012420	1/24/2020	<0.0096	ND,UJ	UJ	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-20-10-042420	4/24/2020	<0.0096	U	UJ	<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-20-10-072320	7/23/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-20-10-110220	11/2/2020	0.0081	J	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-20-10-012521	1/25/2021	<0.022	J	U	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0017**	J	
	25 ft	VMP-20-25-012715	1/27/2015	0.005	J		<0.0056	U		0.0012	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-20-25-042715	4/27/2015	0.013			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	ND,UJ	UJ	<0.0045	U	
		VMP-20-25-072015	7/20/2015	0.015			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.002**	J	
		VMP-20-25-102015	10/20/2015	0.0088			<0.0051	U		0.0038	J		**0.002**	J		<0.0082	U		**0.0018**	J		**0.03**	J	J	**0.0024**	J	
		VMP-20-25-020216	2/2/2016	0.0088	J		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-20-25-042516	4/25/2016	0.0091	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	J	U	<0.059	U		<0.0049	J	U
		VMP-20-25-072216	7/22/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0027**	J	
		VMP-20-25-102616	10/26/2016	<0.0095	J	U	**0.0037**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	J	U
		VMP-20-25-012617	1/26/2017	0.0061	J		**0.0017**	J		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0014**	J	
		VMP-20-25-012617-Dup	1/26/2017	0.016			**0.0017**	J		<0.0058	U		<0.009	U		<0.0082	U		**0.0018**	J		<0.05	U		**0.0015**	J	
		VMP-20-25-042617	4/26/2017	<0.0093	J	U	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-20-25-072417	7/24/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-20-25-103117	10/31/2017	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-20-25-012218	1/22/2018	0.1	J0	J	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0014**	J		<0.049	U		**0.0015**	J	
		VMP-20-25-041218	4/12/2018	0.011			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-20-25-071818	7/18/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-20-25-102418	10/24/2018	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-20-25-012119	1/21/2019	<0.0079	U		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		**0.0022**	J		<0.045	U		**0.0071**		
		VMP-20-25-012119-DUP	1/21/2019	<0.0079	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		**0.0017**	J		<0.044	U		**0.0063**		
		VMP-20-25-042619	4/26/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-20-25-072619	7/26/2019	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-20-25-102319	10/23/2019	0.017	J0	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-20-25-102319-DUP	10/23/2019	0.007	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.00078**	J	
		VMP-20-25-012420	1/24/2020	<0.01	ND,UJ	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-20-25-042420	4/24/2020	0.0055	J	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-20-25-072320	7/23/2020	0.0065	J		**0.0045**	J		0.0031	J		<0.009	U		<0.0082	U		**0.0099**			<0.05	U		**0.0054**		
		VMP-20-25-110220	11/2/2020	0.015	J	J	<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-20-25-012521	1/25/2021	<0.023	J	U	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.001**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	<0.021	U		<0.015	U		<0.0062	U		**0.0011**	J		<0.0046	U					**0.019**			<0.0062	U	
		VMP-20-10-012715-DUP	1/27/2015	<0.022	U		<0.016	U		<0.0065	U		**0.0014**	J		<0.0048	U					**0.028**			<0.0065	U	
		VMP-20-10-042715	4/27/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0016**	J		<0.006	U	
		VMP-20-10-072015	7/20/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	J	U	<0.0048	U					<0.013	J	U	<0.0065	U	
		VMP-20-10-102015	10/20/2015	**0.001**	J		0.002	J		<0.0055	U		**0.0014**	J		<0.004	U					**0.0024**	J		<0.0055	U	
		VMP-20-10-102015-DUP	10/20/2015	<0.023	U		<0.016	U		<0.0068	U		**0.0013**	J		<0.005	U					**0.0034**	J		<0.0068	U	
		VMP-20-10-021616	2/16/2016	<0.02	U		0.013	J		<0.006	U		**0.0007**	J		<0.0044	U					**0.084**			**0.002**	J	
		VMP-20-10-042516	4/25/2016	<0.024	U		0.03			**0.0022**	J		<0.0059	U		<0.0052	U					**0.014**	J		**0.0024**	J	
		VMP-20-10-072216	7/22/2016	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.02	U					**0.024**			<0.0069	U	
		VMP-20-10-102616	10/26/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.013**			<0.006	U	
		VMP-20-10-012617	1/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0014**	J		<0.0059	U	
		VMP-20-10-042617	4/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0029**	J		<0.0059	U	
		VMP-20-10-072417	7/24/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-20-10-103117	10/31/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-20-10-012218	1/22/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.008**	J		<0.0059	U	
		VMP-20-10-041218	4/12/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0094**	J		<0.0058	U	
		VMP-20-10-071818	7/18/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.036**			<0.0059	U	
		VMP-20-10-102418	10/24/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-20-10-012119	1/21/2019	<0.23	U		0.13	J		<0.069	U		<0.058	U		<0.2	U					<0.14	U		<0.069	U	
		VMP-20-10-042619	4/26/2019	<0.02	U		0.0032	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-20-10-072219	7/22/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0044**	J		<0.0058	U	
		VMP-20-10-102319	10/23/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-20-10-012420	1/24/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.026**			<0.0062	U	
		VMP-20-10-042420	4/24/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0016**	J		<0.0063	U	
		VMP-20-10-072320	7/23/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	J	U	<0.0061	U	
		VMP-20-10-110220	11/2/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0086**	J		<0.0057	U	
		VMP-20-10-012521	1/25/2021	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0034**	J		<0.0058	U	
	25 ft	VMP-20-25-012715	1/27/2015	<0.021	U		<0.015	U		**0.00092**	J		**0.0012**	J		<0.0047	U					**0.0041**	J		**0.002**	J	
		VMP-20-25-042715	4/27/2015	<0.021	U		0.015			<0.0063	U		<0.0053	U		<0.0046	U					**0.017**			<0.0063	U	
		VMP-20-25-072015	7/20/2015	<0.022	U		0.03			<0.0066	U		<0.0055	J	U	<0.0048	U					<0.013	J	U	<0.0066	U	
		VMP-20-25-102015	10/20/2015	**0.0013**	J		0.0082	J		**0.0015**	J		**0.00095**	J		<0.0042	U					**0.0036**	J		**0.0025**	J	
		VMP-20-25-020216	2/2/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					**0.0036**	J		<0.0072	U	
		VMP-20-25-042516	4/25/2016	<0.023	U		0.0072	J		<0.0068	U		<0.0057	U		<0.005	U					**0.021**			**0.0016**	J	
		VMP-20-25-072216	7/22/2016	<0.024	U		0.0076	J		<0.0073	U		<0.0061	U		<0.021	U					**0.011**	J		<0.0073	U	
		VMP-20-25-102616	10/26/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.012**			<0.0062	U	
		VMP-20-25-012617	1/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0064**	J		<0.0061	U	
		VMP-20-25-012617-Dup	1/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.03**			<0.0058	U	
		VMP-20-25-042617	4/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0058**	J		<0.0061	U	
		VMP-20-25-072417	7/24/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-20-25-103117	10/31/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-20-25-012218	1/22/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.011**	J		<0.0056	U	
		VMP-20-25-041218	4/12/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-20-25-071818	7/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.21**			<0.006	U	
		VMP-20-25-102418	10/24/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-20-25-012119	1/21/2019	<0.017	U		0.0055	J		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-20-25-012119-DUP	1/21/2019	<0.017	U		0.0051	J		<0.0051	U		<0.0043	U		<0.015	U					**0.0015**	J		<0.0051	U	
		VMP-20-25-042619	4/26/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0017**	J		<0.0058	U	
		VMP-20-25-072619	7/26/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-20-25-102319	10/23/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-20-25-102319-DUP	10/23/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0018**	J		<0.0058	U	
		VMP-20-25-012420	1/24/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.027**			<0.0067	U	
		VMP-20-25-042420	4/24/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0054**	J		<0.0065	U	
		VMP-20-25-072320	7/23/2020	**0.0033**	J		0.0038	J		**0.0046**	J		<0.0048	U		<0.017	U					**0.0056**	J		**0.0076**		
		VMP-20-25-110220	11/2/2020	<0.018	U		0.0038	J		<0.0056	U		<0.0046	U		<0.016	U					**0.016**			<0.0056	U	
		VMP-20-25-012521	1/25/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.038**			<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-20-10-012715-DUP	1/27/2015	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-20-10-042715	4/27/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	ND,UJ	UJ	<0.0066	U		<0.0066	U	
		VMP-20-10-072015	7/20/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-20-10-102015	10/20/2015	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-20-10-102015-DUP	10/20/2015	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-20-10-021616	2/16/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.04**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-20-10-042516	4/25/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		**0.002**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-20-10-072216	7/22/2016	<0.006	U		<0.0096	U		<0.0095	U		**0.057**			<0.0053	U		**0.0079**	J		<0.0077	U		<0.0077	U	
		VMP-20-10-102616	10/26/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0023**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-10-012617	1/26/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-10-042617	4/26/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-10-072417	7/24/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-20-10-103117	10/31/2017	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-20-10-012218	1/22/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-20-10-041218	4/12/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-20-10-071818	7/18/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-10-102418	10/24/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-20-10-012119	1/21/2019	<0.06	U		<0.096	U		<0.095	U		<0.041	U		<0.053	U		<0.42	U		<0.077	U		<0.077	U	
		VMP-20-10-042619	4/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-20-10-072219	7/22/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.012**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-10-102319	10/23/2019	<0.005	U		<0.008	U	UJ	<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-20-10-012420	1/24/2020	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-20-10-042420	4/24/2020	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-20-10-072320	7/23/2020	<0.0085	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	J	U	<0.0068	U		<0.0068	U	
		VMP-20-10-110220	11/2/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-20-10-012521	1/25/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		**0.006**	J	J	<0.0065	U		<0.0065	U	
	25 ft	VMP-20-25-012715	1/27/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-20-25-042715	4/27/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0016**	J		<0.038	ND,UJ	UJ	<0.007	U		<0.007	U	
		VMP-20-25-072015	7/20/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-20-25-102015	10/20/2015	**0.0016**	J		**0.0023**	J		**0.0031**	J		**0.0024**	J		**0.0021**	J		**0.016**	J		<0.0064	U		<0.0064	U	
		VMP-20-25-020216	2/2/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	J	UJ	<0.008	U		<0.008	U	
		VMP-20-25-042516	4/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0019**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-20-25-072216	7/22/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0016**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-20-25-102616	10/26/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0069	U		<0.0069	U	
		VMP-20-25-012617	1/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0012**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-20-25-012617-Dup	1/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0023**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-20-25-042617	4/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-20-25-072417	7/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-20-25-103117	10/31/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0011**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-20-25-012218	1/22/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-20-25-041218	4/12/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-25-071818	7/18/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-20-25-102418	10/24/2018	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-20-25-012119	1/21/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-20-25-012119-DUP	1/21/2019	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-20-25-042619	4/26/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-25-072619	7/26/2019	<0.0054	U		<0.0087	U		**0.29**			<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-20-25-102319	10/23/2019	<0.0053	U		<0.0085	U	UJ	<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-20-25-102319-DUP	10/23/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-20-25-012420	1/24/2020	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-20-25-042420	4/24/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-20-25-072320	7/23/2020	<0.008	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00093**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-20-25-110220	11/2/2020	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-20-25-012521	1/25/2021	<0.0052	U		<0.0083	U		**0.0028**	J		<0.0036	U		**0.0021**	J		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-20	10 ft	VMP-20-10-012715	1/27/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.064			<0.0032	U		<0.0055	J	U	<0.0055	U	
		VMP-20-10-012715-DUP	1/27/2015	<0.0071	J	U	<0.0075	U		<0.0065	J	U	<0.0065	U		0.055			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-20-10-042715	4/27/2015	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.0015	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-10-072015	7/20/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-20-10-102015	10/20/2015	<0.006	U		0.0023	J		<0.0055	U		<0.0055	U		0.001	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-20-10-102015-DUP	10/20/2015	<0.0075	U		0.0017	J		<0.0068	U		<0.0068	U		0.0015	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-20-10-021616	2/16/2016	<0.0066	U		<0.0069	U		**0.016**			**0.0054**	J		0.016			<0.0031	U		0.064			**0.019**		
		VMP-20-10-042516	4/25/2016	<0.0077	U		0.0015	J		<0.0071	U		<0.0071	U		0.1			<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-20-10-072216	7/22/2016	<0.0076	U		0.0026	J		<0.0069	U		<0.0069	U		0.0024	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-20-10-102616	10/26/2016	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		0.0016	J		<0.0031	U		0.0016	J		<0.0053	U	
		VMP-20-10-012617	1/26/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-20-10-042617	4/26/2017	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-20-10-072417	7/24/2017	<0.0062	U		0.0015	J		<0.0057	U		<0.0057	U		0.0041	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-20-10-103117	10/31/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-20-10-012218	1/22/2018	<0.0064	U		0.0043	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-20-10-041218	4/12/2018	<0.0063	U		0.0025	J		<0.0058	U		<0.0058	U		0.0018	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-20-10-071818	7/18/2018	<0.0065	U		0.002	J		<0.0059	U		<0.0059	U		0.0034	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-20-10-102418	10/24/2018	<0.0061	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-20-10-012119	1/21/2019	<0.076	U		<0.079	U		<0.069	U		**0.03**	J		21			<0.036	U		<0.061	U		**0.048**	J	
		VMP-20-10-042619	4/26/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-20-10-072219	7/22/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.002	J		<0.003	U		0.0051	J		<0.0052	U	
		VMP-20-10-102319	10/23/2019	<0.0063	U		0.0014	J	J	<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-20-10-012420	1/24/2020	<0.0068	U		0.0053	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-20-10-042420	4/24/2020	<0.0068	U		0.0017	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-20-10-072320	7/23/2020	<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-20-10-110220	11/2/2020	<0.0063	U		0.0046	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-20-10-012521	1/25/2021	<0.0064	U		0.0027	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
	25 ft	VMP-20-25-012715	1/27/2015	<0.007	U		<0.0073	U		**0.0044**	J		**0.00083**	J		0.0085			<0.0033	U		<0.0056	J	U	<0.0056	U	
		VMP-20-25-042715	4/27/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.038			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-20-25-072015	7/20/2015	<0.0072	U		<0.0076	J	U	<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-20-25-102015	10/20/2015	<0.0063	U		0.003	J		**0.012**			**0.0091**			0.0025	J		<0.003	U		0.0028	J		**0.002**	J	
		VMP-20-25-020216	2/2/2016	<0.0078	U		0.0077	J		<0.0072	J	U	<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-20-25-042516	4/25/2016	<0.0074	U		0.0015	J		<0.0068	U		<0.0068	U		<0.0065	J	U	<0.0035	U		<0.006	U		<0.006	U	
		VMP-20-25-072216	7/22/2016	<0.008	U		0.0052	J		<0.0073	U		<0.0073	U		0.0043	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-20-25-102616	10/26/2016	<0.0068	U		0.015			<0.0062	U		<0.0062	U		0.00092	J		<0.0032	U		0.012			**0.0032**	J	
		VMP-20-25-012617	1/26/2017	<0.0067	U		0.0054	J		**0.00064**	J		<0.0061	U		<0.0058	U		<0.0032	U		0.0053	J		**0.0012**	J	
		VMP-20-25-012617-Dup	1/26/2017	<0.0063	U		0.0047	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0069			**0.0018**	J	
		VMP-20-25-042617	4/26/2017	<0.0067	U		0.0033	J		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-20-25-072417	7/24/2017	<0.0066	U		0.0061	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-25-103117	10/31/2017	<0.006	U		0.0052	J		<0.0055	U		<0.0055	U		0.0012	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-20-25-012218	1/22/2018	<0.0062	U		0.026			<0.0056	U		<0.0056	U		0.0055			<0.0029	U		<0.005	U		<0.005	U	
		VMP-20-25-041218	4/12/2018	<0.0064	U		0.01			<0.0058	U		<0.0058	U		0.0032	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-20-25-071818	7/18/2018	<0.0065	U		0.002	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-25-102418	10/24/2018	<0.006	U		0.0054	J		<0.0055	U		<0.0055	U		0.0013	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-20-25-012119	1/21/2019	<0.0056	U		0.0027	J		<0.0052	U		<0.0052	U		0.0046	J		<0.0027	U		0.00081	J		<0.0046	U	
		VMP-20-25-012119-DUP	1/21/2019	<0.0056	U		0.0028	J		<0.0051	U		<0.0051	U		0.0039	J		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-20-25-042619	4/26/2019	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		0.0012	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-20-25-072619	7/26/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-20-25-102319	10/23/2019	<0.0067	U		0.0061	J	J	<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-20-25-102319-DUP	10/23/2019	<0.0064	U		0.0041	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-20-25-012420	1/24/2020	<0.0073	U		0.046			<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-20-25-042420	4/24/2020	<0.0071	U		0.0074			<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-20-25-072320	7/23/2020	<0.0063	U		0.011			**0.0012**	J		**0.0056**	J		0.034			<0.003	U		0.0065			**0.0022**	J	
		VMP-20-25-110220	11/2/2020	<0.0061	U		0.02			<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-20-25-012521	1/25/2021	<0.0065	U		0.0085			<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	**0.0064**	J		**0.001**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-20-39.5-042715	4/27/2015	**0.0083**	J		**0.0024**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U	UJ	0.0061	J		**0.0066**	J	
		VMP-20-39.5-042715-DUP	4/27/2015	**0.01**	J		**0.0025**	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U	UJ	0.0096	J		**0.0062**	J	
		VMP-20-39.5-072015	7/20/2015	**0.013**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0061	J		**0.0024**	J	
		VMP-20-39.5-072015-DUP	7/20/2015	**0.016**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0068	J		**0.0024**	J	
		VMP-20-39.5-102015	10/20/2015	**0.03**			**0.0015**	J		<0.0084	U		<0.013	U		**0.0021**	J		<0.0028	U		0.0094	J		**0.0099**	J	
		VMP-20-39.5-020216	2/2/2016	<0.03	J	U	**0.0019**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.015			<0.015	U	
		VMP-20-39.5-020216-DUP	2/2/2016	<0.029	J	U	**0.0021**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0098	J		<0.015	U	
		VMP-20-39.5-041218	4/12/2018	**0.0063**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-20-39.5-071818	7/18/2018	**0.031**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0042**	J	
		VMP-20-39.5-071818-DUP	7/18/2018	**0.021**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0031**	J	
		VMP-20-39.5-102418	10/24/2018	**0.016**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-20-39.5-020519	2/5/2019	**0.13**			**0.0023**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0067**	J	
		VMP-20-39.5-042619	4/26/2019	**0.021**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
	5 ft	VMP-21-5-012715	1/27/2015	**0.0073**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-5-042715	4/27/2015	**0.0084**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U	UJ	<0.014	U		**0.0034**	J	
		VMP-21-5-072015	7/20/2015	**0.02**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0049**	J	
		VMP-21-5-102315	10/23/2015	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0033**	J	
		VMP-21-5-012616	1/26/2016	**0.013**	J		**0.0066**			<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-21-5-042716	4/27/2016	**0.0073**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-21-5-072616	7/26/2016	**0.014**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-21-5-102416	10/24/2016	**0.022**	J		**0.00073**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.0051**	J	
		VMP-21-5-012717	1/27/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0091**	J	
		VMP-21-5-042417	4/24/2017	<0.028	J	U	**0.00086**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-5-072017	7/20/2017	**0.031**			<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		**0.0028**	J	
		VMP-21-5-103117	10/31/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-21-5-012318	1/23/2018	**0.012**	J		<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0031**	J	
		VMP-21-5-041318	4/13/2018	**0.0059**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-5-072318	7/23/2018	**0.082**			<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0061**	J	
		VMP-21-5-102318	10/23/2018	**0.0094**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-21-5-012119	1/21/2019	**0.015**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U	UJ	<0.013	U	
		VMP-21-5-042619	4/26/2019	**0.033**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-5-072919	7/29/2019	**0.026**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-5-102319	10/23/2019	**0.016**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-21-5-012220	1/22/2020	**0.0058**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-21-5-042320	4/23/2020	**0.024**	J	J	**0.0026**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		**0.0033**	J	
		VMP-21-5-072420	7/24/2020	**0.018**	J		**0.00038**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-5-102920	10/29/2020	<0.029	J	U	<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0018**	J	
		VMP-21-5-012521	1/25/2021	**0.0058**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-20-39.5-042715	4/27/2015	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-20-39.5-042715-DUP	4/27/2015	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	ND,UJ	UJ
		VMP-20-39.5-072015	7/20/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-20-39.5-072015-DUP	7/20/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	ND,UJ	UJ	<0.007	U	
		VMP-20-39.5-102015	10/20/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-20-39.5-020216	2/2/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-20-39.5-020216-DUP	2/2/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-20-39.5-041218	4/12/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-20-39.5-071818	7/18/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-20-39.5-102418	10/24/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-20-39.5-020519	2/5/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-20-39.5-042619	4/26/2019	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-21-5-042715	4/27/2015	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	ND,UJ	UJ
		VMP-21-5-072015	7/20/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	ND,UJ	UJ	<0.0071	U	
		VMP-21-5-102315	10/23/2015	**0.0015**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-21-5-012616	1/26/2016	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-21-5-042716	4/27/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-21-5-072616	7/26/2016	**0.0037**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-21-5-102416	10/24/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-21-5-012717	1/27/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-21-5-042417	4/24/2017	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-21-5-072017	7/20/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-21-5-103117	10/31/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-21-5-012318	1/23/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-21-5-041318	4/13/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-21-5-072318	7/23/2018	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-21-5-102318	10/23/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-21-5-012119	1/21/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-21-5-042619	4/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-21-5-072919	7/29/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-21-5-102319	10/23/2019	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-21-5-012220	1/22/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-21-5-042320	4/23/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-21-5-072420	7/24/2020	**0.0066**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-21-5-102920	10/29/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.00071**	J		<0.026	U		<0.0064	U	
		VMP-21-5-012521	1/25/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0033**	J		<0.0059	U		<0.0059	U	
		VMP-20-39.5-042715	4/27/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-20-39.5-042715-DUP	4/27/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-20-39.5-072015	7/20/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0032**	J		<0.0053	U		<0.0053	U	
		VMP-20-39.5-072015-DUP	7/20/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0037**	J		<0.0054	U		<0.0054	U	
		VMP-20-39.5-102015	10/20/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-20-39.5-020216	2/2/2016	**0.0027**	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-20-39.5-020216-DUP	2/2/2016	**0.0024**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-20-39.5-041218	4/12/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-20-39.5-071818	7/18/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0039**	J		<0.005	U		<0.005	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0035**	J		<0.0052	U		**0.0016**	J	
		VMP-20-39.5-102418	10/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-20-39.5-020519	2/5/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-20-39.5-042619	4/26/2019	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.011**			<0.0046	U		<0.0046	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-21-5-042715	4/27/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0021**	J		<0.0058	U		<0.0058	U	
		VMP-21-5-072015	7/20/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0032**	J		<0.0056	U		<0.0056	U	
		VMP-21-5-102315	10/23/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-21-5-012616	1/26/2016	**0.0017**	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.002**	J		<0.0056	U		<0.0056	U	
		VMP-21-5-042716	4/27/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-21-5-072616	7/26/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-21-5-102416	10/24/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0019**	J		<0.0054	U		<0.0054	U	
		VMP-21-5-012717	1/27/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-21-5-042417	4/24/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-21-5-072017	7/20/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-21-5-103117	10/31/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0024**	J		<0.0045	U		<0.0045	U	
		VMP-21-5-012318	1/23/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-21-5-041318	4/13/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-21-5-072318	7/23/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0016**	J		<0.0048	U		<0.0048	U	
		VMP-21-5-102318	10/23/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0032**	J		<0.0046	U		<0.0046	U	
		VMP-21-5-012119	1/21/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0021**	J		<0.0044	U		<0.0044	U	
		VMP-21-5-042619	4/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-21-5-072919	7/29/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-21-5-102319	10/23/2019	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-21-5-012220	1/22/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-21-5-042320	4/23/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0031**	J		<0.0057	U		<0.0057	U	
		VMP-21-5-072420	7/24/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-21-5-102920	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-21-5-012521	1/25/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-20-39.5-042715	4/27/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-39.5-042715-DUP	4/27/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-20-39.5-072015	7/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-20-39.5-072015-DUP	7/20/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.0021**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-20-39.5-102015	10/20/2015	<0.005	U		<0.005	U		<0.005	U		<0.043	J	U	<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-20-39.5-020216	2/2/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-20-39.5-020216-DUP	2/2/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-39.5-041218	4/12/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-20-39.5-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-20-39.5-102418	10/24/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-39.5-020519	2/5/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-20-39.5-042619	4/26/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-21-5-042715	4/27/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0027**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-21-5-072015	7/20/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-21-5-102315	10/23/2015	<0.005	U		<0.005	U		<0.005	U		**0.0028**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-5-012616	1/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-21-5-042716	4/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-21-5-072616	7/26/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-5-102416	10/24/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-5-012717	1/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-5-042417	4/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-5-072017	7/20/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-5-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0031**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-21-5-012318	1/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-21-5-041318	4/13/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-5-072318	7/23/2018	<0.0048	U		0.0041	J		<0.0048	U		**0.0034**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-5-102318	10/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-5-012119	1/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-21-5-042619	4/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-21-5-072919	7/29/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-5-102319	10/23/2019	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-21-5-012220	1/22/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-21-5-042320	4/23/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-21-5-072420	7/24/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-21-5-102920	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-21-5-012521	1/25/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	0.0081	J		**0.0022**	J		0.0025	J		<0.011	U		<0.01	U		<0.006	U		<0.062	U		**0.0021**	J	
		VMP-20-39.5-042715	4/27/2015	0.0047	J		**0.0034**	J		0.0026	J		<0.0095	U		<0.0086	U		**0.0051**			**0.0024**	J	J	**0.013**		
		VMP-20-39.5-042715-DUP	4/27/2015	<0.011	U		**0.0036**	J		0.0023	J		<0.011	U		<0.01	U		**0.0068**			<0.061	U	UJ	**0.016**		
		VMP-20-39.5-072015	7/20/2015	0.031			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-20-39.5-072015-DUP	7/20/2015	0.028			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0019**	J	
		VMP-20-39.5-102015	10/20/2015	0.012			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	ND,UJ	UJ	<0.0044	J	U
		VMP-20-39.5-020216	2/2/2016	<0.0095	U		**0.007**			0.0049	J		<0.0096	U		<0.0088	U		**0.0096**			<0.054	U		**0.017**		
		VMP-20-39.5-020216-DUP	2/2/2016	<0.0093	U		**0.0064**			0.0049	J		<0.0095	U		<0.0087	U		**0.0094**			<0.053	U		**0.018**		
		VMP-20-39.5-041218	4/12/2018	0.0072	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-20-39.5-071818	7/18/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-20-39.5-102418	10/24/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0015**	J	
		VMP-20-39.5-020519	2/5/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-20-39.5-042619	4/26/2019	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.024	U		<0.0055	U		0.0021	J		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-21-5-042715	4/27/2015	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U	UJ	<0.005	U	
		VMP-21-5-072015	7/20/2015	0.006	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0014**	J	
		VMP-21-5-102315	10/23/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0011**	J	
		VMP-21-5-012616	1/26/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		**0.0016**	J		<0.06	ND,UJ	UJ	<0.0049	U	
		VMP-21-5-042716	4/27/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		**0.0011**	J	
		VMP-21-5-072616	7/26/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-21-5-102416	10/24/2016	0.0052	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-21-5-012717	1/27/2017	0.0068	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.00082**	J	
		VMP-21-5-042417	4/24/2017	<0.0088	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0016**	J	
		VMP-21-5-072017	7/20/2017	0.0096			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-21-5-103117	10/31/2017	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-21-5-012318	1/23/2018	0.055			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-21-5-041318	4/13/2018	0.0069	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-21-5-072318	7/23/2018	0.0055	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0016**	J	
		VMP-21-5-102318	10/23/2018	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-21-5-012119	1/21/2019	0.0023	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-21-5-042619	4/26/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-21-5-072919	7/29/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-21-5-102319	10/23/2019	0.011			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-21-5-012220	1/22/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-21-5-042320	4/23/2020	0.033	J0	J	<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-21-5-072420	7/24/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-21-5-102920	10/29/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-21-5-012521	1/25/2021	<0.024	J	U	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
Remediation Objective				**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	<0.024	U		<0.017	U		**0.0022**	J		**0.0013**	J		<0.0053	U					**0.018**			**0.0041**	J	
		VMP-20-39.5-042715	4/27/2015	<0.02	U	UJ	0.0092	J		<0.0061	U		**0.0015**	J	J	<0.0044	U					**0.0036**	J	J	<0.0061	U	
		VMP-20-39.5-042715-DUP	4/27/2015	<0.024	U	UJ	0.011	J		<0.007	U		<0.0059	J	UJ	<0.0052	U					**0.0039**	J	J	<0.007	U	
		VMP-20-39.5-072015	7/20/2015	<0.022	U		0.0022	J		<0.0065	U		<0.0054	J	U	<0.0048	U					<0.013	J	U	<0.0065	U	
		VMP-20-39.5-072015-DUP	7/20/2015	<0.022	U		0.0064	J		<0.0066	U		<0.0055	J	U	<0.0048	U					<0.013	J	U	<0.0066	U	
		VMP-20-39.5-102015	10/20/2015	<0.02	U		0.002	J		<0.0061	U		**0.003**	J		<0.0045	U					**0.0069**	J		<0.0061	U	
		VMP-20-39.5-020216	2/2/2016	<0.021	U		0.013	J		**0.00089**	J		<0.0052	U		<0.0045	U					**0.0088**	J		<0.0062	J	U
		VMP-20-39.5-020216-DUP	2/2/2016	<0.02	U		0.013	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.0065**	J		<0.0061	J	U
		VMP-20-39.5-041218	4/12/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-20-39.5-071818	7/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.045**			<0.006	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.036**			<0.0063	U	
		VMP-20-39.5-102418	10/24/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0029**	J		<0.006	U	
		VMP-20-39.5-020519	2/5/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.017**			<0.0061	U	
		VMP-20-39.5-042619	4/26/2019	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.021	U		<0.015	U		**0.00086**	J		**0.0011**	J		<0.0046	U					<0.012	U		**0.003**	J	
		VMP-21-5-042715	4/27/2015	<0.023	U	UJ	0.0042	J		<0.007	U		<0.0058	J	UJ	<0.0052	U					**0.0012**	J	J	<0.007	U	
		VMP-21-5-072015	7/20/2015	<0.023	U		0.003	J		<0.0068	U		<0.0056	J	U	<0.005	U					**0.0047**	J		<0.0068	U	
		VMP-21-5-102315	10/23/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					**0.0028**	J		<0.0062	U	
		VMP-21-5-012616	1/26/2016	<0.023	U		0.004	J		<0.0068	U		<0.0057	U		<0.005	U					**0.0038**	J		<0.0068	U	
		VMP-21-5-042716	4/27/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	J	U	<0.0067	U	
		VMP-21-5-072616	7/26/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0021**	J		<0.0065	U	
		VMP-21-5-102416	10/24/2016	**0.0015**	J		<0.016	U		<0.0065	U		<0.0054	J	U	<0.019	U		<0.014	U		**0.0045**	J		<0.0065	U	
		VMP-21-5-012717	1/27/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0016**	J		<0.0057	U	
		VMP-21-5-042417	4/24/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0044**	J		<0.0058	U	
		VMP-21-5-072017	7/20/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.019**			**0.00077**	J	
		VMP-21-5-103117	10/31/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-21-5-012318	1/23/2018	<0.018	U		0.0046	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0046**	J		<0.0053	U	
		VMP-21-5-041318	4/13/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-21-5-072318	7/23/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0052**	J		<0.0059	U	
		VMP-21-5-102318	10/23/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-21-5-012119	1/21/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0021**	J		**0.0018**	J	
		VMP-21-5-042619	4/26/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.003**	J		**0.0024**	J	
		VMP-21-5-072919	7/29/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-21-5-102319	10/23/2019	<0.024	U		<0.017	U		**0.001**	J		<0.0059	U		<0.021	U					<0.014	U		**0.0037**	J	
		VMP-21-5-012220	1/22/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.026**			<0.0067	U	
		VMP-21-5-042320	4/23/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.044**		J	<0.007	U	
		VMP-21-5-072420	7/24/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.01**	J		<0.0063	U	
		VMP-21-5-102920	10/29/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0044**	J		<0.0061	U	
		VMP-21-5-012521	1/25/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0043**	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-20-39.5-042715	4/27/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0098**			**0.002**	J		<0.0067	U		<0.0067	U	
		VMP-20-39.5-042715-DUP	4/27/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.011**			<0.043	U		<0.0078	U		<0.0078	U	
		VMP-20-39.5-072015	7/20/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-20-39.5-072015-DUP	7/20/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-20-39.5-102015	10/20/2015	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0021**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-20-39.5-020216	2/2/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.017**			<0.037	J	UJ	<0.0069	U		<0.0069	U	
		VMP-20-39.5-020216-DUP	2/2/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.018**			<0.037	U	UJ	<0.0068	U		<0.0068	U	
		VMP-20-39.5-041218	4/12/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-20-39.5-071818	7/18/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.0055	U		<0.0088	U		**0.004**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-20-39.5-102418	10/24/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-20-39.5-020519	2/5/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0099**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-20-39.5-042619	4/26/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-21-5-042715	4/27/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-21-5-072015	7/20/2015	<0.0059	U		<0.0095	U		**0.019**			<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-21-5-102315	10/23/2015	<0.0054	U		<0.0086	U		**0.011**			<0.0037	U		**0.0013**	J		<0.037	U	U	<0.0069	U		<0.0069	U	
		VMP-21-5-012616	1/26/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	ND,UJ	UJ	<0.0076	U		<0.0076	U	
		VMP-21-5-042716	4/27/2016	<0.0058	U		<0.0093	U		**0.0022**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-21-5-072616	7/26/2016	<0.0057	U		<0.0091	U		**0.0081**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-5-102416	10/24/2016	<0.0057	U		<0.0091	U		**0.0021**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-5-012717	1/27/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0021**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-21-5-042417	4/24/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-21-5-072017	7/20/2017	<0.0049	U		<0.0079	U		**0.0041**	J		<0.0034	U		**0.00044**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-5-103117	10/31/2017	<0.0048	U		<0.0077	U		**0.002**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-21-5-012318	1/23/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0031**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-21-5-041318	4/13/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0006**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-21-5-072318	7/23/2018	<0.0051	U		<0.0082	U		**0.0034**	J		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-21-5-102318	10/23/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-21-5-012119	1/21/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-21-5-042619	4/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-21-5-072919	7/29/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-21-5-102319	10/23/2019	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-21-5-012220	1/22/2020	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-21-5-042320	4/23/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0028**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-21-5-072420	7/24/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-21-5-102920	10/29/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-21-5-012521	1/25/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	39.5 ft	VMP-20-39.5-012715	1/27/2015	<0.0078	U		<0.0082	U		**0.0061**	J		**0.0013**	J		0.021			<0.0037	U		0.0018	J		<0.0063	U	
		VMP-20-39.5-042715	4/27/2015	<0.0066	U		<0.0069	U		**0.0025**	J		**0.0012**	J		0.015			<0.0032	U		0.0061			**0.0026**	J	
		VMP-20-39.5-042715-DUP	4/27/2015	<0.0077	U		<0.0081	U		**0.0021**	J		<0.007	U		0.018			<0.0037	U		0.0067			**0.0027**	J	
		VMP-20-39.5-072015	7/20/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-20-39.5-072015-DUP	7/20/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-20-39.5-102015	10/20/2015	<0.0067	U		0.0075			<0.0061	U		<0.0061	U		0.0063			<0.0032	U		0.002	J		<0.0054	U	
		VMP-20-39.5-020216	2/2/2016	<0.0068	U		0.0026	J		<0.0062	J	U	<0.0062	J	U	0.019			<0.0032	U		0.016			**0.006**		
		VMP-20-39.5-020216-DUP	2/2/2016	<0.0067	U		0.0027	J		<0.0061	J	U	<0.0061	J	U	0.021			<0.0032	U		0.015			**0.0059**		
		VMP-20-39.5-041218	4/12/2018	<0.0062	U		0.013			<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-20-39.5-071818	7/18/2018	<0.0066	U		0.0094			<0.006	U		<0.006	U		0.0012	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-39.5-071818-DUP	7/18/2018	<0.0069	U		0.01			<0.0063	U		<0.0063	U		0.0011	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-20-39.5-102418	10/24/2018	<0.0066	U		0.012			<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-20-39.5-020519	2/5/2019	<0.0066	U		0.011			<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0039	J		<0.0054	J	U
		VMP-20-39.5-042619	4/26/2019	<0.0061	U		0.0086			<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
	5 ft	VMP-21-5-012715	1/27/2015	<0.0068	U		<0.0072	U		**0.0056**	J		**0.0011**	J		0.01			<0.0032	U		<0.0055	J	U	<0.0055	U	
		VMP-21-5-042715	4/27/2015	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		0.038			<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-21-5-072015	7/20/2015	<0.0074	U		<0.0078	J	U	<0.0068	U		<0.0068	U		0.0078			<0.0035	U		<0.006	U		<0.006	U	
		VMP-21-5-102315	10/23/2015	<0.0068	U		<0.0071	U		<0.0062	U	U	<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-21-5-012616	1/26/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.046			<0.0036	U		<0.006	U		<0.006	U	
		VMP-21-5-042716	4/27/2016	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		0.0012	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-21-5-072616	7/26/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		0.0014	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-21-5-102416	10/24/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.00092	J		<0.0058	U	
		VMP-21-5-012717	1/27/2017	<0.0063	U		0.0015	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0009	J		<0.005	U	
		VMP-21-5-042417	4/24/2017	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-21-5-072017	7/20/2017	<0.0062	U		0.0011	J		<0.0056	U		<0.0056	U		0.0081			<0.0029	U		<0.005	U		<0.005	U	
		VMP-21-5-103117	10/31/2017	<0.006	U		0.001	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-21-5-012318	1/23/2018	<0.0058	U		0.0014	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-21-5-041318	4/13/2018	<0.0063	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-21-5-072318	7/23/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-21-5-102318	10/23/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-21-5-012119	1/21/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0096			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-21-5-042619	4/26/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.031			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-21-5-072919	7/29/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-21-5-102319	10/23/2019	<0.0078	U		0.0015	J		<0.0071	U		<0.0071	U		0.0056	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-21-5-012220	1/22/2020	<0.0073	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-21-5-042320	4/23/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-21-5-072420	7/24/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-21-5-102920	10/29/2020	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-21-5-012521	1/25/2021	<0.0069	U		0.0018	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	**0.0073**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-21-10-042715	4/27/2015	**0.016**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U	UJ	<0.014	U		**0.0055**	J	
		VMP-21-10-072015	7/20/2015	**0.018**	J		**0.024**			<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0052**	J	
		VMP-21-10-102315	10/23/2015	**0.015**	J		**0.0016**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0079	J		**0.003**	J	
		VMP-21-10-012616	1/26/2016	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-10-042716	4/27/2016	**0.0059**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-21-10-072616	7/26/2016	**0.014**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-21-10-102416	10/24/2016	<0.059	U		<0.0079	U		<0.016	U		<0.026	U		<0.096	U		<0.0055	U		<0.023	U		<0.029	U	
		VMP-21-10-012717	1/27/2017	**0.009**	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0092**	J	
		VMP-21-10-042417	4/24/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-10-072017	7/20/2017	**0.0082**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0017**	J	
		VMP-21-10-103117	10/31/2017	**0.018**	J		<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-21-10-012318	1/23/2018	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-21-10-041318	4/13/2018	**0.0092**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-21-10-072318	7/23/2018	**0.02**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0027**	J	
		VMP-21-10-102318	10/23/2018	**0.02**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		**0.0039**	J	
		VMP-21-10-012119	1/21/2019	**0.013**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U	UJ	<0.014	U	
		VMP-21-10-042619	4/26/2019	**0.16**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.009**	J	
		VMP-21-10-072919	7/29/2019	**0.019**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0045**	J	
		VMP-21-10-072919-DUP	7/29/2019	**0.022**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-10-102319	10/23/2019	**0.0095**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-10-102319-DUP	10/23/2019	**0.0067**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-10-012220	1/22/2020	<0.033	U		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-21-10-042320	4/23/2020	**0.01**	J	J	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-10-072420	7/24/2020	**0.013**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-21-10-102920	10/29/2020	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0041	J		<0.015	U	
		VMP-21-10-012521	1/25/2021	**0.017**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-21-10-012521-DUP	1/25/2021	**0.0094**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
	25 ft	VMP-21-25-012715	1/27/2015	**0.0054**	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-21-25-042715	4/27/2015	**0.0075**	J		**0.0016**	J		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U	UJ	<0.012	U		**0.0034**	J	
		VMP-21-25-072015	7/20/2015	**0.025**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.43			**0.0046**	J	
		VMP-21-25-102315	10/23/2015	**0.015**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0046**	J	
		VMP-21-25-012616	1/26/2016	**0.011**	J		**0.00092**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0026**	J	
		VMP-21-25-042716	4/27/2016	**0.011**	J		**0.0022**	J		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-21-25-072616	7/26/2016	<0.031	J	U	<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-21-25-102416	10/24/2016	**0.0092**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-25-012717	1/27/2017	**0.0095**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0088**	J	
		VMP-21-25-042417	4/24/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-25-072017	7/20/2017	**0.011**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0023**	J	
		VMP-21-25-103117	10/31/2017	<0.027	J	U	<0.0037	J	U	<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-25-012318	1/23/2018	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-21-25-041318	4/13/2018	**0.008**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-25-072318	7/23/2018	**0.053**			**0.0047**			<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.017			**0.0051**	J	
		VMP-21-25-102318	10/23/2018	**0.027**			<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.011			**0.0023**	J	
		VMP-21-25-012119	1/21/2019	**0.0089**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U	UJ	<0.014	U	
		VMP-21-25-042619	4/26/2019	**0.031**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.004**	J	
		VMP-21-25-072919	7/29/2019	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-25-102319	10/23/2019	**0.0096**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-25-012220	1/22/2020	**0.0063**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-21-25-042320	4/23/2020	<0.033	U	UJ	<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-21-25-072420	7/24/2020	**0.028**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-21-25-102920	10/29/2020	**0.029**	J		<0.0041	U		**0.0037**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0052**	J	
		VMP-21-25-012521	1/25/2021	**0.011**	J		**0.0012**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-21-10-042715	4/27/2015	<0.018	J	U	<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	ND,UJ	UJ
		VMP-21-10-072015	7/20/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	ND,UJ	UJ	<0.007	U	
		VMP-21-10-102315	10/23/2015	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-21-10-012616	1/26/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-21-10-042716	4/27/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-21-10-072616	7/26/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-21-10-102416	10/24/2016	<0.031	U		<0.016	U		<0.011	U		<0.021	U		<0.026	U		<0.012	U		<0.051	U		<0.013	U	
		VMP-21-10-012717	1/27/2017	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-21-10-042417	4/24/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-21-10-072017	7/20/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-21-10-103117	10/31/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-21-10-012318	1/23/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-21-10-041318	4/13/2018	**0.0019**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-21-10-072318	7/23/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-21-10-102318	10/23/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-21-10-012119	1/21/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-21-10-042619	4/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-21-10-072919	7/29/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-21-10-102319	10/23/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-21-10-102319-DUP	10/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-21-10-012220	1/22/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-21-10-042320	4/23/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-21-10-072420	7/24/2020	**0.04**			<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-21-10-102920	10/29/2020	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.00074**	J		<0.026	U		<0.0065	U	
		VMP-21-10-012521	1/25/2021	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.017	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.0015**	J		<0.028	U		<0.0069	U	
		VMP-21-25-042715	4/27/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-21-25-072015	7/20/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	ND,UJ	UJ	<0.007	U	
		VMP-21-25-102315	10/23/2015	**0.001**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-21-25-012616	1/26/2016	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-21-25-042716	4/27/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0068	U	
		VMP-21-25-072616	7/26/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0017**	J		<0.027	U		<0.0068	U	
		VMP-21-25-102416	10/24/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.00089**	J		<0.026	U		<0.0065	U	
		VMP-21-25-012717	1/27/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0011**	J		<0.025	U		<0.0062	U	
		VMP-21-25-042417	4/24/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0029**	J		<0.024	U		<0.0061	U	
		VMP-21-25-072017	7/20/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0062	U	
		VMP-21-25-103117	10/31/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0015**	J		<0.024	U		<0.006	U	
		VMP-21-25-012318	1/23/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	J	U	<0.023	U		<0.0058	U	
		VMP-21-25-041318	4/13/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0063	U	
		VMP-21-25-072318	7/23/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-21-25-102318	10/23/2018	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.00085**	J		<0.022	U		<0.0056	U	
		VMP-21-25-012119	1/21/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-21-25-042619	4/26/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.00083**	J		<0.025	U		<0.0063	U	
		VMP-21-25-072919	7/29/2019	**0.0042**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-21-25-102319	10/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0011**	J		<0.025	U		<0.0063	U	
		VMP-21-25-012220	1/22/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-21-25-042320	4/23/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-21-25-072420	7/24/2020	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-21-25-102920	10/29/2020	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0096**			<0.027	U		<0.0067	U	
		VMP-21-25-012521	1/25/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-21-10-042715	4/27/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0022**	J		<0.0059	U		<0.0059	U	
		VMP-21-10-072015	7/20/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0028**	J		<0.0054	U		<0.0054	U	
		VMP-21-10-102315	10/23/2015	**0.0021**	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-21-10-012616	1/26/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-21-10-042716	4/27/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0019**	J		<0.0058	U		<0.0058	U	
		VMP-21-10-072616	7/26/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-21-10-102416	10/24/2016	<0.0085	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		**0.0019**	J		<0.01	U		<0.01	U	
		VMP-21-10-012717	1/27/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-21-10-042417	4/24/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-21-10-072017	7/20/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-21-10-103117	10/31/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-21-10-012318	1/23/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-21-10-041318	4/13/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-21-10-072318	7/23/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0018**	J		<0.0048	U		<0.0048	U	
		VMP-21-10-102318	10/23/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0034**	J		<0.0046	U		<0.0046	U	
		VMP-21-10-012119	1/21/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-21-10-042619	4/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-21-10-072919	7/29/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-21-10-102319	10/23/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-21-10-102319-DUP	10/23/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-21-10-012220	1/22/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-21-10-042320	4/23/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-21-10-072420	7/24/2020	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-21-10-102920	10/29/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-21-10-012521	1/25/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0032**	J		<0.0052	U		<0.0052	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-21-25-042715	4/27/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0021**	J		<0.0054	U		<0.0054	U	
		VMP-21-25-072015	7/20/2015	**0.002**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0046**	J		<0.0055	U		<0.0055	U	
		VMP-21-25-102315	10/23/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-21-25-012616	1/26/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0018**	J		<0.0054	U		<0.0054	U	
		VMP-21-25-042716	4/27/2016	**0.0031**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-21-25-072616	7/26/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-21-25-102416	10/24/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-21-25-012717	1/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-21-25-042417	4/24/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-21-25-072017	7/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-21-25-103117	10/31/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-21-25-012318	1/23/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0035**	J		<0.0045	U		<0.0045	U	
		VMP-21-25-041318	4/13/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-21-25-072318	7/23/2018	**0.0045**			<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-21-25-102318	10/23/2018	**0.0031**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-21-25-012119	1/21/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-21-25-042619	4/26/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-21-25-072919	7/29/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-21-25-102319	10/23/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-21-25-012220	1/22/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-21-25-042320	4/23/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-21-25-072420	7/24/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-21-25-102920	10/29/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-21-25-012521	1/25/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0035**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-10-042715	4/27/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-21-10-072015	7/20/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-21-10-102315	10/23/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.005**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-21-10-012616	1/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-10-042716	4/27/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-21-10-072616	7/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-21-10-102416	10/24/2016	<0.0098	U		<0.0098	U		<0.0098	U		<0.086	U		<0.011	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-21-10-012717	1/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.002**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-10-042417	4/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-10-072017	7/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0023**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-21-10-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0075**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-21-10-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-21-10-041318	4/13/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-21-10-072318	7/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-10-102318	10/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-10-012119	1/21/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-10-042619	4/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-21-10-072919	7/29/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-21-10-102319	10/23/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-10-102319-DUP	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-21-10-012220	1/22/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-21-10-042320	4/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-21-10-072420	7/24/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-10-102920	10/29/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-10-012521	1/25/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-25-042715	4/27/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-25-072015	7/20/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-21-25-102315	10/23/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0032**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-25-012616	1/26/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-21-25-042716	4/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-25-072616	7/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.0024**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-25-102416	10/24/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-25-012717	1/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-21-25-042417	4/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.027**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-25-072017	7/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.059**			<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-25-103117	10/31/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0028**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-21-25-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-21-25-041318	4/13/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-21-25-072318	7/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0043**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-21-25-102318	10/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		**0.0051**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-21-25-012119	1/21/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-25-042619	4/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-21-25-072919	7/29/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-21-25-102319	10/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-21-25-012220	1/22/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-21-25-042320	4/23/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-21-25-072420	7/24/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-25-102920	10/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-21-25-012521	1/25/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	0.015	J		**0.0037**	J		0.0013	J		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-21-10-042715	4/27/2015	0.004	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U	UJ	<0.0051	U	
		VMP-21-10-072015	7/20/2015	0.015			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-21-10-102315	10/23/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		**0.0042**	J		<0.06	U		**0.014**		
		VMP-21-10-012616	1/26/2016	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-21-10-042716	4/27/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		**0.0027**	J		<0.061	U		**0.0015**	J	
		VMP-21-10-072616	7/26/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-21-10-102416	10/24/2016	<0.019	U		<0.011	U		<0.012	U		<0.019	U		<0.017	U		<0.01	U		<0.1	U		<0.0087	U	
		VMP-21-10-012717	1/27/2017	0.13			**0.00072**	J		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		**0.00073**	J	
		VMP-21-10-042417	4/24/2017	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0026**	J	
		VMP-21-10-072017	7/20/2017	0.01			<0.0053	U		0.0012	J		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-10-103117	10/31/2017	0.038			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-21-10-012318	1/23/2018	<0.0083	J	U	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-21-10-041318	4/13/2018	<0.0091	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-21-10-072318	7/23/2018	0.0034	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-21-10-102318	10/23/2018	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-21-10-012119	1/21/2019	0.0046	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-21-10-042619	4/26/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-21-10-072919	7/29/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-10-102319	10/23/2019	0.0089	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-21-10-102319-DUP	10/23/2019	0.0035	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-21-10-012220	1/22/2020	<0.01	U		**0.0082**			0.0016	J		<0.011	U		<0.0098	U		**0.015**			<0.06	U		**0.019**		
		VMP-21-10-042320	4/23/2020	<0.0092	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-10-072420	7/24/2020	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-21-10-102920	10/29/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-21-10-012521	1/25/2021	0.0077	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.024	J	U	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.025	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-21-25-042715	4/27/2015	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U	UJ	**0.0013**	J	
		VMP-21-25-072015	7/20/2015	0.0052	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		**0.012**		
		VMP-21-25-102315	10/23/2015	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0012**	J	
		VMP-21-25-012616	1/26/2016	0.0048	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	ND,UJ	UJ	<0.0047	U	
		VMP-21-25-042716	4/27/2016	0.0034	J		**0.0082**			<0.0065	U		<0.01	U		<0.0093	U		**0.017**			<0.056	U		**0.025**		
		VMP-21-25-072616	7/26/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-21-25-102416	10/24/2016	<0.0095	U		**0.00068**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0011**	J	
		VMP-21-25-012717	1/27/2017	0.0091			**0.00082**	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-21-25-042417	4/24/2017	<0.0088	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0019**	J		<0.05	U		**0.0017**	J	
		VMP-21-25-072017	7/20/2017	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-21-25-103117	10/31/2017	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-21-25-012318	1/23/2018	0.033			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-21-25-041318	4/13/2018	0.0074	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-25-072318	7/23/2018	0.0077	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		**0.0063**			<0.049	U		**0.025**		
		VMP-21-25-102318	10/23/2018	0.025			<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		**0.0046**			<0.046	U		**0.0042**		
		VMP-21-25-012119	1/21/2019	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-21-25-042619	4/26/2019	0.0068	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-25-072919	7/29/2019	<0.0097	U	UJ	<0.0056	U		0.0017	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-21-25-102319	10/23/2019	0.012			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-25-012220	1/22/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-21-25-042320	4/23/2020	<0.01	ND,UJ	UJ	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-21-25-072420	7/24/2020	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-21-25-102920	10/29/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-21-25-012521	1/25/2021	<0.024	J	U	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	<0.022	U		<0.016	U		**0.0015**	J		<0.0054	U		<0.0048	U					<0.013	U		**0.0025**	J	
		VMP-21-10-042715	4/27/2015	<0.024	U	UJ	<0.017	U		<0.0071	U		<0.0059	J	UJ	<0.0052	U					**0.0016**	J	J	<0.0071	U	
		VMP-21-10-072015	7/20/2015	**0.00092**	J		0.0031	J		<0.0066	U		<0.0055	J	U	<0.0048	U					**0.0052**	J		<0.0066	U	
		VMP-21-10-102315	10/23/2015	<0.023	U		0.052			<0.0068	U		<0.0057	U		<0.005	U					<0.014	U		<0.0068	U	
		VMP-21-10-012616	1/26/2016	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.0045	U					**0.0026**	J		<0.0062	U	
		VMP-21-10-042716	4/27/2016	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.0052	U					<0.014	J	U	<0.007	U	
		VMP-21-10-072616	7/26/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.011**	J		<0.0068	U	
		VMP-21-10-102416	10/24/2016	<0.04	U		<0.029	U		<0.012	U		<0.01	U		<0.036	U		<0.026	U		**0.018**	J		<0.012	U	
		VMP-21-10-012717	1/27/2017	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0028**	J		<0.0056	U	
		VMP-21-10-042417	4/24/2017	<0.019	U		0.0017	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0051**	J		<0.0058	U	
		VMP-21-10-072017	7/20/2017	<0.02	U		<0.014	U		**0.0015**	J		<0.005	U		<0.018	U					**0.014**			**0.004**	J	
		VMP-21-10-103117	10/31/2017	<0.018	U		0.023			<0.0054	U		<0.0045	U		<0.016	U					**0.0046**	J		<0.0054	U	
		VMP-21-10-012318	1/23/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-21-10-041318	4/13/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0024**	J		<0.0059	U	
		VMP-21-10-072318	7/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-21-10-102318	10/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0027**	J		<0.0056	U	
		VMP-21-10-012119	1/21/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-21-10-042619	4/26/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.028**			<0.0061	U	
		VMP-21-10-072919	7/29/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0078**	J		<0.0062	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0085**	J		<0.0059	U	
		VMP-21-10-102319	10/23/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-21-10-102319-DUP	10/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-21-10-012220	1/22/2020	<0.023	U		0.017			<0.0069	U		<0.0057	U		<0.02	U					**0.03**			<0.0069	U	
		VMP-21-10-042320	4/23/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.006**	J	J	<0.006	U	
		VMP-21-10-072420	7/24/2020	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.02**			**0.0015**	J	
		VMP-21-10-102920	10/29/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0055**	J		<0.0062	U	
		VMP-21-10-012521	1/25/2021	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0099**	J		<0.0065	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0054**	J		<0.0063	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.022	U		<0.016	U		<0.0066	U		**0.0012**	J		<0.0048	U					<0.013	U		**0.0012**	J	
		VMP-21-25-042715	4/27/2015	<0.022	U	UJ	0.0013	J		<0.0065	U		<0.0054	J	UJ	<0.0048	U					**0.0012**	J	J	<0.0065	U	
		VMP-21-25-072015	7/20/2015	**0.00089**	J		0.32			<0.0066	U		<0.0055	J	U	<0.0049	U					<0.013	J	U	<0.0066	U	
		VMP-21-25-102315	10/23/2015	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.0043	U					<0.012	U		<0.0059	U	
		VMP-21-25-012616	1/26/2016	<0.022	U		0.0024	J		<0.0066	U		<0.0055	U		<0.0048	U					**0.0076**	J		<0.0066	U	
		VMP-21-25-042716	4/27/2016	<0.022	U		0.014	J		<0.0065	U		<0.0054	U		<0.0048	U					<0.013	J	U	**0.00093**	J	
		VMP-21-25-072616	7/26/2016	<0.022	U		0.0023	J		<0.0065	U		<0.0054	U		<0.019	U					**0.0043**	J		<0.0065	U	
		VMP-21-25-102416	10/24/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.0026**	J		<0.0062	U	
		VMP-21-25-012717	1/27/2017	<0.02	U		0.0033	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0022**	J		<0.0059	U	
		VMP-21-25-042417	4/24/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0054**	J		<0.0058	U	
		VMP-21-25-072017	7/20/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-21-25-103117	10/31/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-21-25-012318	1/23/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0037**	J		<0.0055	U	
		VMP-21-25-041318	4/13/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0015**	J		<0.006	U	
		VMP-21-25-072318	7/23/2018	<0.019	U		0.039			<0.0057	U		<0.0047	U		<0.017	U					**0.0044**	J		<0.0057	U	
		VMP-21-25-102318	10/23/2018	<0.018	U		0.068			<0.0053	U		<0.0044	U		<0.016	U					**0.022**			<0.0053	U	
		VMP-21-25-012119	1/21/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-21-25-042619	4/26/2019	<0.02	U		0.004	J		<0.0059	U		<0.005	U		<0.017	U					**0.0099**	J		<0.0059	U	
		VMP-21-25-072919	7/29/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0045**	J		<0.0063	U	
		VMP-21-25-102319	10/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0052**	J		<0.0059	U	
		VMP-21-25-012220	1/22/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.031**			<0.0068	U	
		VMP-21-25-042320	4/23/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U	UJ	<0.0068	U	
		VMP-21-25-072420	7/24/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.012**	J		**0.0031**	J	
		VMP-21-25-102920	10/29/2020	<0.021	U		<0.015	U		<0.0063	U		**0.0011**	J		<0.019	U					**0.0058**	J		<0.0063	U	
		VMP-21-25-012521	1/25/2021	<0.021	U		<0.015	U		**0.0011**	J		<0.0052	U		<0.018	U					**0.0082**	J		**0.0038**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	<0.0057	U		<0.0091	U		**0.0018**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-10-042715	4/27/2015	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-21-10-072015	7/20/2015	<0.0057	U		<0.0092	U		**0.016**			<0.004	U		**0.0039**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-21-10-102315	10/23/2015	<0.0059	U		<0.0096	U		**0.024**			<0.0041	U		**0.0016**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-21-10-012616	1/26/2016	<0.0053	U		<0.0086	U		**0.003**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-21-10-042716	4/27/2016	<0.0061	U		<0.0098	U		**0.0028**	J		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-21-10-072616	7/26/2016	<0.0059	U		<0.0095	U		**0.0084**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-21-10-102416	10/24/2016	<0.01	U		<0.017	U		**0.0073**	J		<0.0073	U		**0.0016**	J		<0.073	U		<0.013	U		<0.013	U	
		VMP-21-10-012717	1/27/2017	<0.0048	U		<0.0078	U		**0.0025**	J		<0.0034	U		**0.0035**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-21-10-042417	4/24/2017	<0.005	U		<0.0081	U		**0.0026**	J		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-21-10-072017	7/20/2017	<0.0052	U		<0.0083	U		**0.0043**	J		<0.0036	U		**0.0006**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-10-103117	10/31/2017	<0.0047	U		<0.0076	U		**0.0059**	J		<0.0032	U		**0.0094**			<0.033	U		<0.006	U		<0.006	U	
		VMP-21-10-012318	1/23/2018	<0.0047	U		<0.0076	U		**0.0026**	J		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-21-10-041318	4/13/2018	<0.0051	U		<0.0083	U		**0.0018**	J		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-10-072318	7/23/2018	<0.005	U		<0.0081	U		**0.0036**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-21-10-102318	10/23/2018	<0.0049	U		<0.0079	U		**0.0068**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-10-012119	1/21/2019	<0.005	U		<0.008	U		**0.0016**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-21-10-042619	4/26/2019	<0.0053	U		<0.0085	U		**0.0012**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-21-10-072919	7/29/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-10-102319	10/23/2019	<0.0051	U		<0.0082	U		**0.0041**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-21-10-102319-DUP	10/23/2019	<0.0053	U		<0.0085	U		**0.0042**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-21-10-012220	1/22/2020	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.037**			<0.042	U		<0.0076	U		<0.0076	U	
		VMP-21-10-042320	4/23/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-21-10-072420	7/24/2020	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-10-102920	10/29/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-21-10-012521	1/25/2021	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.001**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.0057	U		<0.0092	U		**0.0032**	J		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-21-25-042715	4/27/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-25-072015	7/20/2015	<0.0058	U		<0.0093	U		**0.0041**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-21-25-102315	10/23/2015	<0.0051	U		<0.0082	U		**0.0052**	J		<0.0035	U		**0.00098**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-21-25-012616	1/26/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	ND,UJ	UJ	<0.0073	U		<0.0073	U	
		VMP-21-25-042716	4/27/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.028**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-25-072616	7/26/2016	<0.0056	U		<0.0091	U		**0.002**	J		<0.0039	U		**0.0015**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-25-102416	10/24/2016	<0.0054	U		<0.0086	U		**0.0023**	J		<0.0037	U		**0.00052**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-21-25-012717	1/27/2017	<0.0051	U		<0.0083	U		**0.0018**	J		<0.0036	U		**0.0034**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-25-042417	4/24/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-21-25-072017	7/20/2017	<0.0051	U		<0.0082	U		**0.0014**	J		<0.0035	U		**0.00036**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-21-25-103117	10/31/2017	<0.0049	U		<0.0079	U		**0.0032**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-25-012318	1/23/2018	<0.0048	U		<0.0077	U		**0.0036**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-21-25-041318	4/13/2018	<0.0052	U		<0.0083	U		**0.0019**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-25-072318	7/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0014**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-25-102318	10/23/2018	<0.0046	U		<0.0074	U		**0.003**	J		<0.0032	U		**0.085**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-21-25-012119	1/21/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-25-042619	4/26/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0019**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-25-072919	7/29/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0038**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-21-25-102319	10/23/2019	<0.0052	U		<0.0083	U		**0.0014**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-25-012220	1/22/2020	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-21-25-042320	4/23/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-21-25-072420	7/24/2020	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-25-102920	10/29/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-21-25-012521	1/25/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-21	10 ft	VMP-21-10-012715	1/27/2015	<0.0071	U		<0.0075	U		**0.0017**	J		<0.0065	U		0.062			<0.0034	U		<0.0058	J	U	<0.0058	U	
		VMP-21-10-042715	4/27/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0038	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-21-10-072015	7/20/2015	<0.0072	U		<0.0076	U		<0.0066	J	U	<0.0066	U		0.043			<0.0034	U		0.0031	J		**0.0015**	J	
		VMP-21-10-102315	10/23/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.015			<0.0036	U		<0.006	U		<0.006	U	
		VMP-21-10-012616	1/26/2016	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-21-10-042716	4/27/2016	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		0.00095	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-21-10-072616	7/26/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-21-10-102416	10/24/2016	<0.013	U		<0.014	U		<0.012	U		<0.012	U		<0.012	U		<0.0063	U		<0.011	U		<0.011	U	
		VMP-21-10-012717	1/27/2017	<0.0061	U		0.0011	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0028	J		**0.00098**	J	
		VMP-21-10-042417	4/24/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0022	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-21-10-072017	7/20/2017	<0.0065	U		0.00081	J		**0.0027**	J		<0.006	U		0.015			<0.0031	U		0.00053	J		<0.0053	U	
		VMP-21-10-103117	10/31/2017	<0.0059	U		0.0011	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-21-10-012318	1/23/2018	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0026	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-21-10-041318	4/13/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-21-10-072318	7/23/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-21-10-102318	10/23/2018	<0.0062	U		0.0018	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-21-10-012119	1/21/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-21-10-042619	4/26/2019	<0.0066	U		0.001	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-21-10-072919	7/29/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-21-10-072919-DUP	7/29/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-21-10-102319	10/23/2019	<0.0064	U		0.0025	J		<0.0058	U		<0.0058	U		0.0022	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-21-10-102319-DUP	10/23/2019	<0.0066	U		0.0012	J		<0.0061	U		<0.0061	U		0.0017	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-21-10-012220	1/22/2020	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		0.03			<0.0036	U		0.032			**0.011**		
		VMP-21-10-042320	4/23/2020	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		0.00081	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-21-10-072420	7/24/2020	<0.0062	U		0.0017	J		<0.0056	U		<0.0056	U		0.0039	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-21-10-102920	10/29/2020	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		0.0025	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-21-10-012521	1/25/2021	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-21-10-012521-DUP	1/25/2021	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
	25 ft	VMP-21-25-012715	1/27/2015	<0.0072	U		<0.0075	U		**0.0024**	J		<0.0066	U		0.0054	J		<0.0034	U		<0.0058	J	U	<0.0058	U	
		VMP-21-25-042715	4/27/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0012	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-21-25-072015	7/20/2015	<0.0072	U		<0.0076	J	U	<0.0066	U		<0.0066	U		0.0038	J		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-21-25-102315	10/23/2015	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		0.0012	J		<0.0052	U	
		VMP-21-25-012616	1/26/2016	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-21-25-042716	4/27/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.047			<0.0034	U		0.018			**0.0053**	J	
		VMP-21-25-072616	7/26/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0011	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-21-25-102416	10/24/2016	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0028	J		<0.0055	U	
		VMP-21-25-012717	1/27/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.001	J		<0.0031	U		0.0022	J		<0.0052	U	
		VMP-21-25-042417	4/24/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0012	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-21-25-072017	7/20/2017	<0.0064	U		0.0011	J		<0.0059	U		<0.0059	U		0.00075	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-21-25-103117	10/31/2017	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-21-25-012318	1/23/2018	<0.006	U		0.0014	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-21-25-041318	4/13/2018	<0.0065	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-21-25-072318	7/23/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.00055	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-21-25-102318	10/23/2018	<0.0058	U		0.0022	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0027	U		0.0013	J		<0.0047	U	
		VMP-21-25-012119	1/21/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-21-25-042619	4/26/2019	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-21-25-072919	7/29/2019	<0.0069	U		<0.0072	U		**0.0034**	J		<0.0063	U		<0.006	U		<0.0033	U		0.0042	J		<0.0056	U	
		VMP-21-25-102319	10/23/2019	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-21-25-012220	1/22/2020	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-21-25-042320	4/23/2020	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.00097	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-21-25-072420	7/24/2020	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		0.008			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-21-25-102920	10/29/2020	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-21-25-012521	1/25/2021	<0.0068	U		0.0011	J		<0.0062	U		<0.0062	U		0.0024	J		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	**0.0088**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.004**	J	
		VMP-21-33-072015	7/20/2015	**0.03**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0056**	J	
		VMP-21-33-102315	10/23/2015	**0.014**	J		**0.0016**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0045**	J	
		VMP-21-33-102315-DUP	10/23/2015	**0.05**	J		<0.0091	U		<0.019	U		<0.03	U		<0.11	U		<0.0063	U		0.008	J		**0.012**	J	
		VMP-21-33-042716	4/27/2016	**0.011**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-21-33-072616	7/26/2016	**0.012**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-21-33-102416	10/24/2016	**0.0085**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-21-33-012717	1/27/2017	**0.012**	J		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.024**		
		VMP-21-33-012717-Dup	1/27/2017	**0.0093**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0078**	J	
		VMP-21-33-042417	4/24/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.0041	J		<0.014	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0045	J		<0.014	U	
		VMP-21-33-072017	7/20/2017	**0.017**	J		**0.00084**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0028**	J	
		VMP-21-33-072017-DUP	7/20/2017	**0.012**	J		**0.00071**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0019**	J	
		VMP-21-33-103117	10/31/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-21-33-012318	1/23/2018	<0.026	J	U	<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.026	J	U	<0.0035	J	U	<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-21-33-041318	4/13/2018	**0.0068**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-21-33-072318	7/23/2018	**0.022**	J		**0.0038**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.013			**0.0034**	J	
		VMP-21-33-102318	10/23/2018	**0.023**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0058**	J	
		VMP-21-33-102318-DUP	10/23/2018	**0.011**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-21-33-012119	1/21/2019	**0.0097**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U	UJ	**0.0028**	J	
		VMP-21-33-012119-DUP	1/21/2019	**0.024**			**0.001**	J		<0.0069	U		<0.01	U		<0.04	U		<0.0023	U		0.005	J	J	**0.0036**	J	
		VMP-21-33-042619	4/26/2019	**0.017**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-33-072919	7/29/2019	**0.024**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0033**	J	
		VMP-21-33-102319	10/23/2019	**0.0086**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-21-33-012220	1/22/2020	**0.0063**	J		<0.0046	U		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-21-33-042320	4/23/2020	**0.01**	J	J	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0048	J		<0.014	U	
		VMP-21-33-072420	7/24/2020	**0.027**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0039**	J	
		VMP-21-33-102920	10/29/2020	**0.01**	J		**0.00042**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-21-33-012521	1/25/2021	**0.013**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	5 ft	VMP-22-5-012715	1/27/2015	**0.013**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0046**	J	
		VMP-22-5-042715	4/27/2015	**0.0085**	J		**0.0043**	J		<0.017	U		<0.026	U		<0.098	U		<0.0056	U	UJ	<0.024	U		**0.0028**	J	
		VMP-22-5-072015	7/20/2015	**0.013**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0025**	J	
		VMP-22-5-012616	1/26/2016	**0.014**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0059	J		<0.016	J	U
		VMP-22-5-042616	4/26/2016	**0.012**	J		**0.0039**	J		<0.012	U		<0.018	U		<0.067	U		<0.0038	U		<0.016	U		<0.02	U	
		VMP-22-5-072216	7/22/2016	**0.032**	J		<0.0049	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-22-5-102716	10/27/2016	**0.03**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.012**	J	
		VMP-22-5-012417	1/24/2017	**0.045**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-22-5-042617	4/26/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-22-5-072617	7/26/2017	**0.036**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0047**	J	
		VMP-22-5-102617	10/26/2017	**0.012**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0022**	J	
		VMP-22-5-013018	1/30/2018	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0034	J		<0.013	U	
		VMP-22-5-041318	4/13/2018	**0.0058**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-22-5-071818	7/18/2018	**0.073**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.005**	J	
		VMP-22-5-101918	10/19/2018	**0.011**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-22-5-012819	1/28/2019	**0.0096**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0018**	J	
		VMP-22-5-043019	4/30/2019	**0.0074**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-22-5-072419	7/24/2019	**0.028**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U	UJ	<0.0029	U		<0.012	U		<0.015	U	
		VMP-22-5-102319	10/23/2019	<0.029	U		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-5-012320	1/23/2020	**0.0088**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-5-042820	4/28/2020	**0.015**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-22-5-072320	7/23/2020	**0.04**			<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0068**	J	
		VMP-22-5-110520	11/5/2020	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-5-012621	1/26/2021	**0.0042**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-21-33-072015	7/20/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-21-33-102315	10/23/2015	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-21-33-102315-DUP	10/23/2015	<0.036	J	U	<0.018	U		<0.013	U		<0.024	U		<0.03	U		<0.014	U		<0.059	U		<0.015	U	
		VMP-21-33-042716	4/27/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-21-33-072616	7/26/2016	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-21-33-102416	10/24/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-21-33-012717	1/27/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-21-33-012717-Dup	1/27/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-21-33-042417	4/24/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0014**	J		<0.024	U		<0.006	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0015**	J		<0.024	U		<0.006	U	
		VMP-21-33-072017	7/20/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0015**	J		<0.023	U		<0.0059	U	
		VMP-21-33-072017-DUP	7/20/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0015**	J		<0.025	U		<0.0063	U	
		VMP-21-33-103117	10/31/2017	**0.002**	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-21-33-012318	1/23/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	J	U	<0.022	U		<0.0056	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-21-33-041318	4/13/2018	**0.0039**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-21-33-072318	7/23/2018	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-21-33-102318	10/23/2018	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		<0.0052	U		<0.022	U		<0.0056	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-21-33-012119	1/21/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-21-33-012119-DUP	1/21/2019	<0.013	U		<0.0064	U		<0.0047	U		<0.0087	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U	
		VMP-21-33-042619	4/26/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-21-33-072919	7/29/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-21-33-102319	10/23/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-21-33-012220	1/22/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.029	U		<0.0074	U	
		VMP-21-33-042320	4/23/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-21-33-072420	7/24/2020	**0.0021**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-21-33-102920	10/29/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.00074**	J		<0.026	U		<0.0064	U	
		VMP-21-33-012521	1/25/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
	5 ft	VMP-22-5-012715	1/27/2015	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-22-5-042715	4/27/2015	<0.031	J	U	<0.016	U		<0.012	U		<0.022	U		<0.027	U		<0.012	U		<0.052	U		<0.013	ND,UJ	UJ
		VMP-22-5-072015	7/20/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-22-5-012616	1/26/2016	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-22-5-042616	4/26/2016	**0.0011**	J		<0.011	U		<0.008	U		<0.015	U		<0.018	U		<0.0084	U		<0.036	U		<0.009	U	
		VMP-22-5-072216	7/22/2016	<0.019	U		<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		**0.0022**	J		<0.032	U		<0.0079	U	
		VMP-22-5-102716	10/27/2016	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-22-5-012417	1/24/2017	**0.0015**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-22-5-042617	4/26/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-22-5-072617	7/26/2017	**0.0035**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0028**	J		<0.025	U		<0.0064	U	
		VMP-22-5-102617	10/26/2017	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0012**	J		<0.023	U		<0.0057	U	
		VMP-22-5-013018	1/30/2018	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-22-5-041318	4/13/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-22-5-071818	7/18/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0021**	J		<0.025	U		<0.0064	U	
		VMP-22-5-101918	10/19/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0013**	J		<0.023	U		<0.0058	U	
		VMP-22-5-012819	1/28/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0006**	J		<0.024	U		<0.006	U	
		VMP-22-5-043019	4/30/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-22-5-072419	7/24/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0087**			<0.027	U		<0.0068	ND,UJ	UJ
		VMP-22-5-102319	10/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0013**	J		<0.025	U		<0.0063	U	
		VMP-22-5-012320	1/23/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-22-5-042820	4/28/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-22-5-072320	7/23/2020	**0.005**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.01**			<0.027	U		<0.0067	U	
		VMP-22-5-110520	11/5/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0005**	J		<0.025	U		<0.0063	U	
		VMP-22-5-012621	1/26/2021	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-21-33-072015	7/20/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0039**	J		<0.0057	U		<0.0057	U	
		VMP-21-33-102315	10/23/2015	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-21-33-102315-DUP	10/23/2015	<0.0098	U		<0.022	U		<0.017	U		<0.017	U		<0.017	U		**0.0035**	J		<0.012	U		<0.012	U	
		VMP-21-33-042716	4/27/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-21-33-072616	7/26/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-21-33-102416	10/24/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0037**	J		<0.0054	U		<0.0054	U	
		VMP-21-33-012717	1/27/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-21-33-012717-Dup	1/27/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-21-33-042417	4/24/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0031**	J		<0.0047	U		<0.0047	U	
		VMP-21-33-072017	7/20/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-21-33-072017-DUP	7/20/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-21-33-103117	10/31/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-21-33-012318	1/23/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0036**	J		<0.0044	U		<0.0044	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0038**	J		<0.0044	U		<0.0044	U	
		VMP-21-33-041318	4/13/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-21-33-072318	7/23/2018	**0.0015**	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-21-33-102318	10/23/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0036**	J		<0.0044	U		<0.0044	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-21-33-012119	1/21/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-21-33-012119-DUP	1/21/2019	**0.00067**	J		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0025**	J		<0.0041	U		<0.0041	U	
		VMP-21-33-042619	4/26/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-21-33-072919	7/29/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-21-33-102319	10/23/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0032**	J		<0.0047	U		<0.0047	U	
		VMP-21-33-012220	1/22/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.007	U		<0.0058	U		<0.0058	U	
		VMP-21-33-042320	4/23/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-21-33-072420	7/24/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0032**	J		<0.0053	U		<0.0053	U	
		VMP-21-33-102920	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-21-33-012521	1/25/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
	5 ft	VMP-22-5-012715	1/27/2015	**0.0034**	J		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-22-5-042715	4/27/2015	<0.0087	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		<0.012	U		<0.01	U		<0.01	U	
		VMP-22-5-072015	7/20/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-22-5-012616	1/26/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0033**	J		<0.0056	U		<0.0056	U	
		VMP-22-5-042616	4/26/2016	<0.006	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		<0.0086	U		<0.007	U		<0.007	U	
		VMP-22-5-072216	7/22/2016	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0056**	J		<0.0062	U		<0.0062	U	
		VMP-22-5-102716	10/27/2016	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-22-5-012417	1/24/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-22-5-042617	4/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-22-5-072617	7/26/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-22-5-102617	10/26/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-22-5-013018	1/30/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-22-5-041318	4/13/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-22-5-071818	7/18/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-22-5-101918	10/19/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-22-5-012819	1/28/2019	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-22-5-043019	4/30/2019	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-22-5-072419	7/24/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.002**	J		<0.0053	U		<0.0053	U	
		VMP-22-5-102319	10/23/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J	J	<0.0049	U		<0.0049	U	
		VMP-22-5-012320	1/23/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-22-5-042820	4/28/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-22-5-072320	7/23/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.002**	J		<0.0053	U		<0.0053	U	
		VMP-22-5-110520	11/5/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-22-5-012621	1/26/2021	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0029**	J		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-33-072015	7/20/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-21-33-102315	10/23/2015	<0.0045	U		<0.0045	U		<0.0045	U		**0.0035**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-21-33-102315-DUP	10/23/2015	<0.011	U		<0.011	U		<0.011	U		**0.0087**	J		<0.013	U		<0.013	U		<0.013	U		<0.041	U	
		VMP-21-33-042716	4/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-21-33-072616	7/26/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-21-33-102416	10/24/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-33-012717	1/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-33-012717-Dup	1/27/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-21-33-042417	4/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0025**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0027**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-33-072017	7/20/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0083**	J		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-21-33-072017-DUP	7/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0068**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-21-33-103117	10/31/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0043**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-21-33-012318	1/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-21-33-041318	4/13/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-21-33-072318	7/23/2018	<0.005	U		<0.005	U		<0.005	U		**0.0044**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-21-33-102318	10/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		**0.0031**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-21-33-012119	1/21/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-33-012119-DUP	1/21/2019	<0.0041	U		<0.0041	U		<0.0041	U		**0.0024**	J		<0.0047	U		<0.0046	U		<0.0046	U		**0.0018**	J	
		VMP-21-33-042619	4/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-21-33-072919	7/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-33-102319	10/23/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-21-33-012220	1/22/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP-21-33-042320	4/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-21-33-072420	7/24/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0081**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-21-33-102920	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-21-33-012521	1/25/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
	5 ft	VMP-22-5-012715	1/27/2015	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-22-5-042715	4/27/2015	<0.01	U		<0.01	U		<0.01	U		<0.088	U		<0.012	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-22-5-072015	7/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-22-5-012616	1/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-22-5-042616	4/26/2016	<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.008	U		<0.0078	U		<0.0078	U		<0.025	U	
		VMP-22-5-072216	7/22/2016	<0.0061	U		<0.0061	U		<0.0061	U		**0.15**			<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-22-5-102716	10/27/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-22-5-012417	1/24/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-22-5-042617	4/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-5-072617	7/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-5-102617	10/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-22-5-013018	1/30/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-22-5-041318	4/13/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-5-071818	7/18/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-5-101918	10/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-22-5-012819	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-22-5-043019	4/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-22-5-072419	7/24/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-5-102319	10/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U	UJ	<0.0055	U		<0.0055	U		<0.017	U	
		VMP-22-5-012320	1/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-22-5-042820	4/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-5-072320	7/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0027**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-5-110520	11/5/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-22-5-012621	1/26/2021	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	0.011	J		**0.0035**	J		0.0037	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-21-33-072015	7/20/2015	0.0067	J		<0.0061	U		0.0017	J		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-21-33-102315	10/23/2015	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		**0.0032**	J		<0.048	U		**0.0055**		
		VMP-21-33-102315-DUP	10/23/2015	0.011	J		<0.012	U		<0.014	U		**0.0041**	J		<0.02	U		**0.0064**	J		<0.12	U		**0.011**		
		VMP-21-33-042716	4/27/2016	0.0048	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0017**	J	
		VMP-21-33-072616	7/26/2016	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0016**	J	
		VMP-21-33-102416	10/24/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-21-33-012717	1/27/2017	0.0081	J		**0.0012**	J		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		**0.0018**	J	
		VMP-21-33-012717-Dup	1/27/2017	0.0058	J		**0.0013**	J		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		**0.0014**	J	
		VMP-21-33-042417	4/24/2017	0.04			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0021**	J	
		VMP-21-33-042417-DUP	4/24/2017	0.053			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.002**	J	
		VMP-21-33-072017	7/20/2017	0.0066	J		**0.00097**	J		<0.0056	U		<0.0087	U		<0.0079	U		**0.0015**	J		<0.048	U		**0.0025**	J	
		VMP-21-33-072017-DUP	7/20/2017	0.0054	J		**0.00098**	J		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0026**	J	
		VMP-21-33-103117	10/31/2017	0.014			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-21-33-012318	1/23/2018	0.013			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0028**	J		<0.046	U		**0.0036**	J	
		VMP-21-33-012318-DUP	1/23/2018	0.018			<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		**0.0016**	J		<0.047	U		**0.0029**	J	
		VMP-21-33-041318	4/13/2018	<0.0097	J	U	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-21-33-072318	7/23/2018	0.022			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		**0.0013**	J		<0.054	U		**0.0075**		
		VMP-21-33-102318	10/23/2018	0.011			<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-21-33-012119	1/21/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-21-33-012119-DUP	1/21/2019	0.012			<0.0044	U		<0.005	U		<0.0078	U		<0.0072	U		<0.0042	U		<0.044	U		**0.0017**	J	
		VMP-21-33-042619	4/26/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-21-33-072919	7/29/2019	<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-21-33-102319	10/23/2019	0.012			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-21-33-012220	1/22/2020	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0058	U		<0.061	U		<0.005	U	
		VMP-21-33-042320	4/23/2020	<0.009	ND,UJ	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0026**	J		<0.051	U		**0.0036**	J	
		VMP-21-33-072420	7/24/2020	0.014			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-21-33-102920	10/29/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-21-33-012521	1/25/2021	<0.023	J	U	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.0014**	J		<0.052	U		**0.0021**	J	
	5 ft	VMP-22-5-012715	1/27/2015	0.0081	J		**0.0026**	J		0.0051	J		<0.0087	U		<0.0079	U		**0.002**	J		<0.048	U		**0.0024**	J	
		VMP-22-5-042715	4/27/2015	<0.019	U		<0.011	U		<0.012	U		<0.019	U		<0.018	U		**0.0033**	J		<0.11	U	UJ	<0.0089	U	
		VMP-22-5-072015	7/20/2015	0.0098	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-22-5-012616	1/26/2016	0.005	J		**0.0049**	J		0.0057	J		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0014**	J	
		VMP-22-5-042616	4/26/2016	0.017			<0.0075	U		<0.0085	U		<0.013	U		<0.012	U		<0.0071	U		<0.074	U		<0.0061	U	
		VMP-22-5-072216	7/22/2016	0.016			<0.0067	U		<0.0075	U		<0.012	U		<0.011	U		**0.009**			<0.065	U		**0.004**	J	
		VMP-22-5-102716	10/27/2016	<0.0092	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-5-012417	1/24/2017	0.026			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0011**	J	
		VMP-22-5-042617	4/26/2017	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-22-5-072617	7/26/2017	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-5-102617	10/26/2017	<0.0083	J	U	<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-22-5-013018	1/30/2018	0.0053	J		<0.0049	U		0.017			<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0014**	J	
		VMP-22-5-041318	4/13/2018	<0.009	J	U	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-22-5-071818	7/18/2018	0.014			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0018**	J	
		VMP-22-5-101918	10/19/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-22-5-012819	1/28/2019	0.021			<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-22-5-043019	4/30/2019	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		**0.031**	J		<0.004	U	
		VMP-22-5-072419	7/24/2019	0.0037	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-22-5-102319	10/23/2019	<0.0091	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-5-012320	1/23/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-5-042820	4/28/2020	0.011	J0	J	<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-22-5-072320	7/23/2020	0.0033	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-22-5-110520	11/5/2020	0.0092			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-5-012621	1/26/2021	<0.026	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	<0.021	U		<0.015	U		**0.003**	J		<0.0052	U		<0.0045	U					**0.0071**	J		**0.0052**	J	
		VMP-21-33-072015	7/20/2015	<0.023	U		0.0016	J		<0.0069	U		<0.0058	J	U	<0.0051	U					<0.014	J	U	<0.0069	U	
		VMP-21-33-102315	10/23/2015	**0.0015**	J		<0.013	U		<0.0056	U		<0.0046	U		<0.0041	U					**0.0022**	J		<0.0056	U	
		VMP-21-33-102315-DUP	10/23/2015	**0.002**	J		0.0086	J		<0.014	U		<0.012	J	U	<0.01	U					<0.028	U		<0.014	U	
		VMP-21-33-042716	4/27/2016	<0.023	U		0.0046	J		<0.0069	U		<0.0058	U		<0.0051	U					<0.014	J	U	<0.0069	U	
		VMP-21-33-072616	7/26/2016	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.02	U					**0.015**			<0.0069	U	
		VMP-21-33-102416	10/24/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.0056**	J		<0.0065	U	
		VMP-21-33-012717	1/27/2017	**0.0018**	J		0.0033	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0019**	J		<0.0057	U	
		VMP-21-33-012717-Dup	1/27/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0024**	J		<0.0054	U	
		VMP-21-33-042417	4/24/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0047**	J		<0.0056	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.004**	J		<0.0057	U	
		VMP-21-33-072017	7/20/2017	<0.018	U		0.0017	J		<0.0056	U		<0.0046	U		<0.016	U					**0.014**			<0.0056	U	
		VMP-21-33-072017-DUP	7/20/2017	<0.02	U		0.0016	J		<0.006	U		<0.005	U		<0.018	U					**0.011**	J		<0.006	U	
		VMP-21-33-103117	10/31/2017	<0.018	U		0.0076	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-21-33-012318	1/23/2018	<0.018	U		0.0034	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0075**	J		<0.0053	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.018	U		0.0025	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0069**	J		<0.0054	U	
		VMP-21-33-041318	4/13/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0015**	J		<0.0063	U	
		VMP-21-33-072318	7/23/2018	<0.021	U		0.016			<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-21-33-102318	10/23/2018	<0.018	U		0.0051	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0036**	J		<0.0053	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-21-33-012119	1/21/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-21-33-012119-DUP	1/21/2019	<0.017	U		0.012			<0.005	U		<0.0042	U		<0.015	U					**0.0074**	J		<0.005	U	
		VMP-21-33-042619	4/26/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-21-33-072919	7/29/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0097**	J		**0.0052**	J	
		VMP-21-33-102319	10/23/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-21-33-012220	1/22/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.047**			<0.007	U	
		VMP-21-33-042320	4/23/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U	UJ	<0.0058	U	
		VMP-21-33-072420	7/24/2020	<0.022	U		0.0091	J		<0.0065	U		<0.0054	U		<0.019	U					**0.013**			<0.0065	U	
		VMP-21-33-102920	10/29/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0084**	J		**0.0018**	J	
		VMP-21-33-012521	1/25/2021	<0.02	U		0.0025	J		<0.0059	U		<0.005	U		<0.017	U					**0.0081**	J		**0.00089**	J	
	5 ft	VMP-22-5-012715	1/27/2015	<0.018	U		0.0061	J		<0.0056	U		<0.0046	U		<0.0041	U					**0.034**			**0.0016**	J	
		VMP-22-5-042715	4/27/2015	<0.041	U	UJ	0.0058	J		<0.012	U		**0.0015**	J	J	<0.0091	U					**0.012**	J	J	<0.012	U	
		VMP-22-5-072015	7/20/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	J	U	<0.0048	U					<0.013	J	U	<0.0065	U	
		VMP-22-5-012616	1/26/2016	<0.023	U		0.0028	J		**0.0054**	J		<0.0057	U		<0.005	U					**0.0061**	J		**0.014**		
		VMP-22-5-042616	4/26/2016	<0.028	U		0.0046	J		<0.0085	U		<0.0071	U		<0.0062	U					**0.053**			<0.0085	U	
		VMP-22-5-072216	7/22/2016	<0.025	U		0.032			<0.0075	U		<0.0063	U		<0.022	U					**0.062**			<0.0075	U	
		VMP-22-5-102716	10/27/2016	**0.0031**	J		<0.014	U		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.0083**	J		<0.006	U	
		VMP-22-5-012417	1/24/2017	<0.022	U		0.0044	J		<0.0065	U		<0.0054	U		<0.019	U					**0.0096**	J		<0.0065	U	
		VMP-22-5-042617	4/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-22-5-072617	7/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.017**			<0.006	U	
		VMP-22-5-102617	10/26/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0029**	J	J	<0.0054	U	
		VMP-22-5-013018	1/30/2018	<0.018	U		0.0082	J		**0.016**			<0.0046	U		<0.016	U					**0.0014**	J		**0.087**		
		VMP-22-5-041318	4/13/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0021**	J		<0.0058	U	
		VMP-22-5-071818	7/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.01**	J		<0.006	U	
		VMP-22-5-101918	10/19/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-22-5-012819	1/28/2019	<0.019	U		0.0028	J		<0.0057	U		<0.0047	U		<0.017	U					**0.013**			<0.0057	U	
		VMP-22-5-043019	4/30/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-22-5-072419	7/24/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.002**	J		<0.0064	U	
		VMP-22-5-102319	10/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-22-5-012320	1/23/2020	<0.02	U		0.002	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-22-5-042820	4/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.022**			<0.0063	U	
		VMP-22-5-072320	7/23/2020	**0.0019**	J		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0092**	J		<0.0064	U	
		VMP-22-5-110520	11/5/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0077**	J		<0.0059	U	
		VMP-22-5-012621	1/26/2021	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0083**	J		<0.0067	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	<0.0054	U		<0.0086	U		**0.02**			<0.0037	U		**0.0026**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-21-33-072015	7/20/2015	<0.006	U		<0.0097	U		**0.02**			<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-21-33-102315	10/23/2015	<0.0048	U		<0.0078	U		**0.014**			<0.0033	U		**0.0012**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-21-33-102315-DUP	10/23/2015	<0.012	U		<0.02	U		**0.018**	J		<0.0084	U		<0.011	U		<0.085	U		<0.016	U		<0.016	U	
		VMP-21-33-042716	4/27/2016	<0.006	U		<0.0097	U		**0.012**			<0.0042	U		**0.00066**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-21-33-072616	7/26/2016	<0.006	U		<0.0096	U		**0.011**			<0.0041	U		**0.0012**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-21-33-102416	10/24/2016	<0.0057	U		<0.0091	U		**0.0077**	J		<0.0039	U		**0.00061**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-33-012717	1/27/2017	<0.0049	U		<0.008	U		**0.0084**			<0.0034	U		**0.0025**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-33-012717-Dup	1/27/2017	<0.0047	U		<0.0076	U		**0.0082**			<0.0032	U		**0.0023**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-21-33-042417	4/24/2017	<0.0049	U		<0.0079	U		**0.0077**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.005	U		<0.008	U		**0.0076**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-21-33-072017	7/20/2017	<0.0048	U		<0.0078	U		**0.0084**			<0.0033	U		**0.0012**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-21-33-072017-DUP	7/20/2017	<0.0052	U		<0.0084	U		**0.0083**			<0.0036	U		**0.0013**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-33-103117	10/31/2017	<0.0048	U		<0.0077	U		**0.008**			<0.0033	U		**0.0034**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-21-33-012318	1/23/2018	<0.0046	U		<0.0074	U		**0.0084**			<0.0032	U		**0.00053**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.0047	U		<0.0075	U		**0.008**			<0.0032	U		**0.00063**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-21-33-041318	4/13/2018	<0.0055	U		<0.0088	U		**0.008**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-21-33-072318	7/23/2018	<0.0054	U		<0.0087	U		**0.0056**	J		<0.0037	U		**0.001**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-21-33-102318	10/23/2018	<0.0046	U		<0.0074	U		**0.0045**	J		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.0046	U		<0.0074	U		**0.0055**	J		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-21-33-012119	1/21/2019	<0.0051	U		<0.0082	U		**0.0051**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-21-33-012119-DUP	1/21/2019	<0.0044	U		**0.0038**	J		**0.0086**			<0.003	U		**0.0015**	J		<0.03	U		<0.0056	U		<0.0056	U	
		VMP-21-33-042619	4/26/2019	<0.0052	U		<0.0083	U		**0.0074**	J		<0.0036	U		**0.0025**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-21-33-072919	7/29/2019	<0.0051	U		<0.0082	U		**0.0034**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-21-33-102319	10/23/2019	<0.005	U		<0.008	U		**0.0024**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-21-33-012220	1/22/2020	<0.0061	U		<0.0098	U		**0.0032**	J		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-21-33-042320	4/23/2020	<0.0051	U		<0.0082	U		**0.0045**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-21-33-072420	7/24/2020	<0.0056	U		<0.0091	U		**0.0037**	J		<0.0039	U		**0.0021**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-21-33-102920	10/29/2020	<0.0053	U		<0.0085	U		**0.0021**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-21-33-012521	1/25/2021	<0.0052	U		<0.0083	U		**0.0042**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	5 ft	VMP-22-5-012715	1/27/2015	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0058**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-22-5-042715	4/27/2015	<0.011	U		<0.017	U		<0.017	U		<0.0074	U		**0.022**			<0.075	U		<0.014	U		<0.014	U	
		VMP-22-5-072015	7/20/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-22-5-012616	1/26/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-22-5-042616	4/26/2016	<0.0074	U		<0.012	U		<0.012	U		<0.0051	U		**0.0022**	J		<0.051	U		<0.0094	U		<0.0094	U	
		VMP-22-5-072216	7/22/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.0061**			<0.046	U		<0.0084	U		<0.0084	U	
		VMP-22-5-102716	10/27/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	J	U	<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-5-012417	1/24/2017	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0011**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-22-5-042617	4/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-22-5-072617	7/26/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-22-5-102617	10/26/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-22-5-013018	1/30/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.00079**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-22-5-041318	4/13/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-22-5-071818	7/18/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00088**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-22-5-101918	10/19/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-22-5-012819	1/28/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-5-043019	4/30/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-5-072419	7/24/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0011**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-22-5-102319	10/23/2019	<0.0052	U		<0.0083	U	UJ	<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-5-012320	1/23/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-5-042820	4/28/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-22-5-072320	7/23/2020	<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-22-5-110520	11/5/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00046**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-5-012621	1/26/2021	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	33 ft	VMP-21-33-012715	1/27/2015	<0.0068	J	U	<0.0071	U		**0.01**			**0.0032**	J		0.029			<0.0032	U		0.0035	J		<0.0055	U	
		VMP-21-33-072015	7/20/2015	<0.0076	U		<0.0079	J	U	<0.0069	J	U	<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-21-33-102315	10/23/2015	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.005	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-21-33-102315-DUP	10/23/2015	<0.015	U		<0.016	U		<0.014	U		<0.014	U		0.0081	J		<0.0073	U		<0.012	U		<0.012	U	
		VMP-21-33-042716	4/27/2016	<0.0076	U		0.0014	J		<0.0069	U		<0.0069	U		0.001	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-21-33-072616	7/26/2016	**0.0035**	J		<0.0079	U		<0.0069	U		<0.0069	U		0.0012	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-21-33-102416	10/24/2016	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0023	J		<0.0058	U	
		VMP-21-33-012717	1/27/2017	<0.0062	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0043	J		**0.0011**	J	
		VMP-21-33-012717-Dup	1/27/2017	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0007	J		<0.0028	U		0.0048			**0.0012**	J	
		VMP-21-33-042417	4/24/2017	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-21-33-042417-DUP	4/24/2017	<0.0063	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-21-33-072017	7/20/2017	<0.0061	U		0.001	J		**0.00023**	J		<0.0056	U		0.0024	J		<0.0029	U		0.0018	J		<0.0049	U	
		VMP-21-33-072017-DUP	7/20/2017	<0.0066	U		0.00071	J		<0.006	U		<0.006	U		0.0025	J		<0.0031	U		0.0016	J		<0.0053	U	
		VMP-21-33-103117	10/31/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-21-33-012318	1/23/2018	<0.0058	U		0.0016	J		<0.0053	U		<0.0053	U		0.004	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-21-33-012318-DUP	1/23/2018	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0036	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-21-33-041318	4/13/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-21-33-072318	7/23/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0034	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-21-33-102318	10/23/2018	<0.0058	U		0.0018	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-21-33-102318-DUP	10/23/2018	<0.0058	U		0.002	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-21-33-012119	1/21/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0024	J	J	<0.003	U		<0.0052	U		<0.0052	U	
		VMP-21-33-012119-DUP	1/21/2019	<0.0055	U		<0.0058	U		<0.005	U		<0.005	U		0.12		J	<0.0026	U		0.00081	J		<0.0044	U	
		VMP-21-33-042619	4/26/2019	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		0.0021	J		<0.0031	U		0.0015	J		<0.0052	U	
		VMP-21-33-072919	7/29/2019	<0.0064	U		<0.0067	U		**0.0021**	J		<0.0058	U		0.0073			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-21-33-102319	10/23/2019	<0.0063	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-21-33-012220	1/22/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.005	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-21-33-042320	4/23/2020	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-21-33-072420	7/24/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-21-33-102920	10/29/2020	<0.0066	U		0.0016	J		<0.0061	U		<0.0061	U		0.0081			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-21-33-012521	1/25/2021	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		0.0038	J		<0.0031	U		<0.0052	U		<0.0052	U	
	5 ft	VMP-22-5-012715	1/27/2015	<0.0061	U		<0.0063	U		**0.0083**			**0.0021**	J		0.0035	J		<0.0029	U		0.0079			<0.0049	U	
		VMP-22-5-042715	4/27/2015	<0.014	U		<0.014	U		<0.012	U		<0.012	U		0.003	J		<0.0064	U		0.0032	J		<0.011	U	
		VMP-22-5-072015	7/20/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-22-5-012616	1/26/2016	<0.0075	U		<0.0078	U		**0.013**			<0.0068	J	U	0.039			<0.0036	U		0.0019	J		<0.006	U	
		VMP-22-5-042616	4/26/2016	<0.0093	U		<0.0097	U		<0.0085	U		<0.0085	U		0.0011	J		<0.0044	U		<0.0075	U		<0.0075	U	
		VMP-22-5-072216	7/22/2016	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		0.0039	J		<0.0039	U		0.0013	J		<0.0067	U	
		VMP-22-5-102716	10/27/2016	<0.0066	U		0.0013	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0016	J		<0.0053	U	
		VMP-22-5-012417	1/24/2017	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-22-5-042617	4/26/2017	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		0.007			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-22-5-072617	7/26/2017	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-22-5-102617	10/26/2017	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	J	U	<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-22-5-013018	1/30/2018	<0.006	U		0.0019	J		**0.073**			**0.0021**	J		0.02			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-22-5-041318	4/13/2018	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-22-5-071818	7/18/2018	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-22-5-101918	10/19/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-22-5-012819	1/28/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-22-5-043019	4/30/2019	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-22-5-072419	7/24/2019	<0.007	U		0.0012	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.0011	J		<0.0057	U	
		VMP-22-5-102319	10/23/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-5-012320	1/23/2020	<0.0065	U		0.0022	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-5-042820	4/28/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-5-072320	7/23/2020	<0.007	U		0.001	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-5-110520	11/5/2020	<0.0065	U		0.0017	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-5-012621	1/26/2021	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	**0.011**	J		**0.0012**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.0056	J		<0.017	U	
		VMP-22-10-042715	4/27/2015	**0.0054**	J		**0.0032**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U	UJ	0.0083	J		**0.0014**	J	
		VMP-22-10-072015	7/20/2015	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0028	J		**0.0015**	J	
		VMP-22-10-102315	10/23/2015	**0.015**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0044**	J	
		VMP-22-10-012616	1/26/2016	**0.019**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0051	J		**0.0037**	J	
		VMP-22-10-042616	4/26/2016	**0.016**	J		**0.0038**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0031**	J	
		VMP-22-10-072216	7/22/2016	**0.014**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-22-10-102716	10/27/2016	**0.026**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.0089**	J	
		VMP-22-10-012417	1/24/2017	**0.043**			<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-22-10-042717	4/27/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-22-10-072617	7/26/2017	**0.031**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.013			**0.0047**	J	
		VMP-22-10-102617	10/26/2017	**0.017**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0036	J		**0.0046**	J	
		VMP-22-10-013018	1/30/2018	<0.025	J	U	**0.0012**	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.011			<0.013	U	
		VMP-22-10-050118	5/1/2018	**0.021**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0036	J		**0.0041**	J	
		VMP-22-10-071818	7/18/2018	**0.024**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0058**	J	
		VMP-22-10-101918	10/19/2018	**0.02**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0052**	J	
		VMP-22-10-012819	1/28/2019	**0.006**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-22-10-072419	7/24/2019	**0.012**	J		**0.0014**	J		<0.0083	U		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-10-102319	10/23/2019	**0.011**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-22-10-012320	1/23/2020	**0.005**	J		**0.0021**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0042	J		<0.016	U	
		VMP-22-10-042820	4/28/2020	**0.013**	J		**0.0011**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.0075	J		<0.014	U	
		VMP-22-10-072320	7/23/2020	**0.054**			**0.0022**	J		**0.0043**	J		<0.013	U		<0.048	U		<0.0027	U		0.008	J		**0.0042**	J	
		VMP-22-10-110520	11/5/2020	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0073	J		**0.003**	J	
		VMP-22-10-012621	1/26/2021	**0.01**	J		**0.00054**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0084	J		<0.015	U	
	18 ft	VMP-22-18-012715	1/27/2015	**0.011**	J		**0.00092**	J		**0.0056**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0029**	J	
		VMP-22-18-012715-DUP	1/27/2015	**0.0049**	J		<0.004	U		**0.0052**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-22-18-042715	4/27/2015	**0.008**	J		**0.001**	J		**0.01**			<0.013	U		<0.047	U		<0.0027	U	UJ	<0.012	U		**0.0019**	J	
		VMP-22-18-072015	7/20/2015	**0.017**	J		**0.003**	J		**0.027**			<0.017	U		<0.065	U		<0.0037	U		<0.016	U		**0.0031**	J	
		VMP-22-18-102315	10/23/2015	**0.014**	J		<0.0042	U		**0.014**			<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.01**	J	
		VMP-22-18-012616	1/26/2016	**0.012**	J		**0.0013**	J		**0.0097**			<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	J	U
		VMP-22-18-042616	4/26/2016	**0.025**	J		**0.0051**			**0.0069**	J		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0046**	J	
		VMP-22-18-072216	7/22/2016	**0.017**	J		<0.0043	U		**0.0088**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-22-18-102716	10/27/2016	**0.02**	J		<0.0044	U		**0.0063**	J		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-22-18-012417	1/24/2017	**0.0079**	J		<0.0043	U		**0.0016**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-22-18-042717	4/27/2017	<0.03	J	U	<0.0041	U		**0.0041**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-22-18-072617	7/26/2017	**0.016**	J		<0.0044	U		**0.0058**	J		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0048**	J	
		VMP-22-18-102617	10/26/2017	**0.012**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0021**	J	
		VMP-22-18-013018	1/30/2018	<0.025	J	U	**0.0052**			<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		0.0084	J		<0.012	U	
		VMP-22-18-041318	4/13/2018	**0.0075**	J		<0.0042	U		**0.0026**	J		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-22-18-041318-DUP	4/13/2018	**0.0047**	J		<0.0039	U		**0.0027**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-18-071818	7/18/2018	**0.027**	J		<0.004	U		**0.0085**			<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0032**	J	
		VMP-22-18-101918	10/19/2018	**0.0064**	J		<0.0035	U		**0.012**			<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-22-18-012819	1/28/2019	**0.015**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0063	J		**0.0018**	J	
		VMP-22-18-043019	4/30/2019	**0.0084**	J		<0.0037	U		**0.0039**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-22-18-072419	7/24/2019	**0.025**	J		<0.0042	U		**0.0077**	J		<0.013	U		<0.05	U	UJ	<0.0029	U		<0.012	U		<0.015	U	
		VMP-22-18-102319	10/23/2019	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-18-012320	1/23/2020	**0.0086**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-22-18-042820	4/28/2020	**0.018**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0046	J		**0.0075**	J	
		VMP-22-18-072320	7/23/2020	**0.024**	J		<0.0044	U		**0.0096**			<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0023**	J	
		VMP-22-18-110520	11/5/2020	**0.011**	J		**0.00063**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0052	J		<0.014	U	
		VMP-22-18-012621	1/26/2021	**0.0087**	J		**0.00043**	J		**0.0015**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-22-10-042715	4/27/2015	**0.011**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	ND,UJ	UJ
		VMP-22-10-072015	7/20/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	ND,UJ	UJ	<0.0067	U	
		VMP-22-10-102315	10/23/2015	**0.0013**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-22-10-012616	1/26/2016	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-22-10-042616	4/26/2016	**0.0008**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-22-10-072216	7/22/2016	**0.0092**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0014**	J		<0.028	U		<0.0071	U	
		VMP-22-10-102716	10/27/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-22-10-012417	1/24/2017	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0013**	J		<0.028	U		<0.007	U	
		VMP-22-10-042717	4/27/2017	**0.0046**	J		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-22-10-072617	7/26/2017	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0059**	J		<0.025	U		<0.0063	U	
		VMP-22-10-102617	10/26/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-22-10-013018	1/30/2018	**0.011**	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-22-10-050118	5/1/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-22-10-071818	7/18/2018	**0.0014**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0063	U	
		VMP-22-10-101918	10/19/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-22-10-012819	1/28/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.00098**	J		<0.024	U		<0.006	U	
		VMP-22-10-072419	7/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.046**			<0.026	U		<0.0064	ND,UJ	UJ
		VMP-22-10-102319	10/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0028**	J		<0.026	U		<0.0064	U	
		VMP-22-10-012320	1/23/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-22-10-042820	4/28/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-22-10-072320	7/23/2020	**0.0032**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.1**			<0.026	U		<0.0064	U	
		VMP-22-10-110520	11/5/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0014**	J		<0.026	U		<0.0065	U	
		VMP-22-10-012621	1/26/2021	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
	18 ft	VMP-22-18-012715	1/27/2015	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.017**			<0.025	U		<0.0064	U	
		VMP-22-18-012715-DUP	1/27/2015	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.018**			<0.026	U		<0.0064	U	
		VMP-22-18-042715	4/27/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.059**			<0.025	U		<0.0063	ND,UJ	UJ
		VMP-22-18-072015	7/20/2015	<0.021	J	U	<0.011	U		<0.0078	U		<0.014	U		<0.018	U		**0.07**			<0.035	ND,UJ	UJ	<0.0087	U	
		VMP-22-18-102315	10/23/2015	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.029**			<0.027	U		<0.0068	U	
		VMP-22-18-012616	1/26/2016	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.029**			<0.028	U		<0.007	U	
		VMP-22-18-042616	4/26/2016	**0.0014**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.018**			<0.028	U		<0.0071	U	
		VMP-22-18-072216	7/22/2016	**0.0033**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.027**			<0.028	U		<0.007	U	
		VMP-22-18-102716	10/27/2016	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.025**			<0.029	U		<0.0072	U	
		VMP-22-18-012417	1/24/2017	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0081**			<0.028	U		<0.007	U	
		VMP-22-18-042717	4/27/2017	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.022**			<0.026	U		<0.0066	U	
		VMP-22-18-072617	7/26/2017	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.019**			<0.028	U		<0.0071	U	
		VMP-22-18-102617	10/26/2017	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0016**	J		<0.024	U		<0.006	U	
		VMP-22-18-013018	1/30/2018	**0.0062**	J		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-22-18-041318	4/13/2018	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.021**			<0.027	U		<0.0068	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.02**			<0.025	U		<0.0063	U	
		VMP-22-18-071818	7/18/2018	**0.0014**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.03**			<0.026	U		<0.0064	U	
		VMP-22-18-101918	10/19/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.018**			<0.023	U		<0.0057	U	
		VMP-22-18-012819	1/28/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.00096**	J		<0.023	U		<0.0057	U	
		VMP-22-18-043019	4/30/2019	**0.0023**	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.019**			<0.024	U		<0.006	U	
		VMP-22-18-072419	7/24/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.023**			<0.027	U		<0.0067	ND,UJ	UJ
		VMP-22-18-102319	10/23/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.006**			<0.025	U		<0.0064	U	
		VMP-22-18-012320	1/23/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-22-18-042820	4/28/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0035**	J		**0.0021**	J		<0.0066	U	
		VMP-22-18-072320	7/23/2020	**0.0025**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.035**			<0.028	U		<0.0071	U	
		VMP-22-18-110520	11/5/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0047**	J		<0.025	U		<0.0063	U	
		VMP-22-18-012621	1/26/2021	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0048**	J		<0.027	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0027**	J		<0.0059	U		<0.0059	U	
		VMP-22-10-042715	4/27/2015	**0.0017**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-22-10-072015	7/20/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-22-10-102315	10/23/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0032**	J		<0.0056	U		<0.0056	U	
		VMP-22-10-012616	1/26/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0036**	J		<0.0048	U		<0.0048	U	
		VMP-22-10-042616	4/26/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0026**	J		<0.006	U		<0.006	U	
		VMP-22-10-072216	7/22/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-22-10-102716	10/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0021**	J		<0.0054	U		<0.0054	U	
		VMP-22-10-012417	1/24/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-22-10-042717	4/27/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-22-10-072617	7/26/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-22-10-102617	10/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-22-10-013018	1/30/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0033**	J		<0.0043	U		<0.0043	U	
		VMP-22-10-050118	5/1/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-22-10-071818	7/18/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-22-10-101918	10/19/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		<0.0058	U		<0.0047	U		<0.0047	U	
		VMP-22-10-012819	1/28/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-22-10-072419	7/24/2019	**0.0011**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0018**	J		<0.005	U		<0.005	U	
		VMP-22-10-102319	10/23/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0036**	J	J	<0.005	U		<0.005	U	
		VMP-22-10-012320	1/23/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-22-10-042820	4/28/2020	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-22-10-072320	7/23/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-22-10-110520	11/5/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-22-10-012621	1/26/2021	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0027**	J		<0.0052	U		<0.0052	U	
	18 ft	VMP-22-18-012715	1/27/2015	**0.0014**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-22-18-012715-DUP	1/27/2015	**0.00083**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-22-18-042715	4/27/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-22-18-072015	7/20/2015	<0.0058	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0027**	J		<0.0068	U		<0.0068	U	
		VMP-22-18-102315	10/23/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-22-18-012616	1/26/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-22-18-042616	4/26/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0019**	J		<0.0056	U		<0.0056	U	
		VMP-22-18-072216	7/22/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0039**	J		<0.0055	U		<0.0055	U	
		VMP-22-18-102716	10/27/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-22-18-012417	1/24/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-22-18-042717	4/27/2017	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-22-18-072617	7/26/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-22-18-102617	10/26/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0047	U		<0.0047	U	
		VMP-22-18-013018	1/30/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0027**	J		<0.0043	U		<0.0043	U	
		VMP-22-18-041318	4/13/2018	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-22-18-071818	7/18/2018	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-22-18-101918	10/19/2018	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-22-18-012819	1/28/2019	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-22-18-043019	4/30/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-22-18-072419	7/24/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0019**	J		<0.0053	U		<0.0053	U	
		VMP-22-18-102319	10/23/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J	J	<0.005	U		<0.005	U	
		VMP-22-18-012320	1/23/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-22-18-042820	4/28/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-22-18-072320	7/23/2020	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-22-18-110520	11/5/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-22-18-012621	1/26/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-22-10-042715	4/27/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		**0.0018**	J	
		VMP-22-10-072015	7/20/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.0029**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-10-102315	10/23/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-22-10-012616	1/26/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.002**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-10-042616	4/26/2016	<0.0059	U		<0.0059	U		<0.0059	U		**0.0046**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-22-10-072216	7/22/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-22-10-102716	10/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-22-10-012417	1/24/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-10-042717	4/27/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-22-10-072617	7/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0069**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-22-10-102617	10/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-10-013018	1/30/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-22-10-050118	5/1/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-22-10-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0027**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-22-10-101918	10/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-22-10-012819	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-22-10-072419	7/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-10-102319	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U	UJ	<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-10-012320	1/23/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-10-042820	4/28/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-22-10-072320	7/23/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		**0.001**	J	
		VMP-22-10-110520	11/5/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-22-10-012621	1/26/2021	<0.0051	U		<0.0051	U		<0.0051	U		**0.0011**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
	18 ft	VMP-22-18-012715	1/27/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-18-012715-DUP	1/27/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-18-042715	4/27/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-22-18-072015	7/20/2015	<0.0067	U		<0.0067	U		<0.0067	U		<0.058	U		<0.0078	U		<0.0076	U		<0.0076	U		<0.024	U	
		VMP-22-18-102315	10/23/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0032**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-18-012616	1/26/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-18-042616	4/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-22-18-072216	7/22/2016	<0.0054	U		<0.0054	U		<0.0054	U		**0.006**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-18-102716	10/27/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-22-18-012417	1/24/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-18-042717	4/27/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-18-072617	7/26/2017	<0.0054	U		<0.0054	U		<0.0054	U		**0.0032**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-22-18-102617	10/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0017**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-22-18-013018	1/30/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-22-18-041318	4/13/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-22-18-071818	7/18/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-18-101918	10/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-22-18-012819	1/28/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-22-18-043019	4/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-22-18-072419	7/24/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-18-102319	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U	UJ	<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-18-012320	1/23/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-18-042820	4/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-18-072320	7/23/2020	<0.0054	U		<0.0054	U		<0.0054	U		**0.0034**	J		<0.0064	U		<0.0062	U		<0.0062	U		**0.0018**	J	
		VMP-22-18-110520	11/5/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-22-18-012621	1/26/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	0.017	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0052	U	
		VMP-22-10-042715	4/27/2015	<0.0093	U		**0.0018**	J		<0.006	U		<0.0094	U		<0.0086	U		**0.0046**	J		<0.052	U	UJ	**0.014**		
		VMP-22-10-072015	7/20/2015	0.014			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.0019**	J		<0.055	U		**0.0028**	J	
		VMP-22-10-102315	10/23/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		**0.0019**	J	
		VMP-22-10-012616	1/26/2016	0.0079	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0012**	J	
		VMP-22-10-042616	4/26/2016	0.016			<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-22-10-072216	7/22/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		**0.0014**	J	
		VMP-22-10-102716	10/27/2016	<0.01	J	U	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.00076**	J	
		VMP-22-10-012417	1/24/2017	0.023			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.00045**	J	
		VMP-22-10-042717	4/27/2017	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		**0.0021**	J	
		VMP-22-10-072617	7/26/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		**0.0025**	J		<0.052	U		**0.002**	J	
		VMP-22-10-102617	10/26/2017	<0.009	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0012**	J		<0.051	U		<0.0042	U	
		VMP-22-10-013018	1/30/2018	0.003	J		<0.0046	U		0.0016	J		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		**0.0022**	J	
		VMP-22-10-050118	5/1/2018	0.007	J		<0.0055	U		0.0022	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-22-10-071818	7/18/2018	0.0089	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-10-101918	10/19/2018	0.0039	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-22-10-012819	1/28/2019	0.0026	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-22-10-072419	7/24/2019	0.0089	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0033**	J		<0.053	U		<0.0044	U	
		VMP-22-10-102319	10/23/2019	<0.0093	ND,UJ	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-22-10-012320	1/23/2020	<0.01	U		**0.0068**			0.0017	J		<0.01	U		<0.0094	U		**0.011**			<0.057	U		**0.015**		
		VMP-22-10-042820	4/28/2020	0.0046	J	J	<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-22-10-072320	7/23/2020	0.0016	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0034**	J	
		VMP-22-10-110520	11/5/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-22-10-012621	1/26/2021	<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0011**	J		<0.055	U		**0.0021**	J	
	18 ft	VMP-22-18-012715	1/27/2015	0.0066	J		**0.0025**	J		0.0062			<0.0094	U		<0.0086	U		**0.0071**			<0.052	U		**0.0082**		
		VMP-22-18-012715-DUP	1/27/2015	<0.023	U		**0.002**	J		0.0064			<0.0095	U		<0.0087	U		**0.0048**	J		<0.053	U		**0.0046**		
		VMP-22-18-042715	4/27/2015	<0.0092	U		**0.0072**			0.004	J		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U	UJ	**0.0011**	J	
		VMP-22-18-072015	7/20/2015	0.02			**0.0026**	J		<0.0083	U		<0.013	J	U	<0.012	U		**0.0021**	J		<0.072	U		**0.0026**	J	
		VMP-22-18-102315	10/23/2015	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0017**	J	
		VMP-22-18-012616	1/26/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-22-18-042616	4/26/2016	0.01	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0012**	J	
		VMP-22-18-072216	7/22/2016	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-22-18-102716	10/27/2016	0.0083	J		**0.0027**	J		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.00069**	J	
		VMP-22-18-012417	1/24/2017	0.014			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-22-18-042717	4/27/2017	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-22-18-072617	7/26/2017	0.0083	J		<0.0059	U		<0.0067	U		**0.012**			<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-22-18-102617	10/26/2017	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-22-18-013018	1/30/2018	0.0058	J		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-22-18-041318	4/13/2018	<0.0098	J	U	<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.0091	J	U	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-18-071818	7/18/2018	0.0064	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-22-18-101918	10/19/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-22-18-012819	1/28/2019	0.0025	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-22-18-043019	4/30/2019	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-22-18-072419	7/24/2019	0.0035	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-22-18-102319	10/23/2019	0.0076	J	J	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-18-012320	1/23/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-22-18-042820	4/28/2020	0.012	J0	J	<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-22-18-072320	7/23/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-22-18-110520	11/5/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-22-18-012621	1/26/2021	<0.025	U	UJ	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.00069**	J		<0.056	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	<0.024	U		0.0036	J		<0.0072	U		<0.006	U		<0.0053	U					**0.031**			<0.0072	U	
		VMP-22-10-042715	4/27/2015	<0.02	U	UJ	0.026			<0.006	U		<0.005	J	UJ	<0.0044	U					**0.0015**	J	J	<0.006	U	
		VMP-22-10-072015	7/20/2015	<0.021	U		0.0038	J		<0.0063	U		<0.0053	J	U	<0.0046	U					**0.0079**	J		<0.0063	U	
		VMP-22-10-102315	10/23/2015	<0.023	U		<0.016	U		<0.0068	U		**0.0034**	J		<0.005	U					<0.014	U		<0.0068	U	
		VMP-22-10-012616	1/26/2016	<0.02	U		0.0012	J		<0.0059	U		<0.0049	U		<0.0043	U					**0.0058**	J		<0.0059	U	
		VMP-22-10-042616	4/26/2016	**0.0018**	J		0.0034	J		<0.0073	U		<0.0061	U		<0.0053	U					**0.043**			<0.0073	U	
		VMP-22-10-072216	7/22/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.013**	J		<0.0067	U	
		VMP-22-10-102716	10/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.0059**	J		<0.0065	U	
		VMP-22-10-012417	1/24/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.02**			<0.0066	U	
		VMP-22-10-042717	4/27/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-22-10-072617	7/26/2017	<0.02	U		0.0061	J		<0.006	U		<0.005	U		<0.018	U					**0.024**			<0.006	U	
		VMP-22-10-102617	10/26/2017	<0.02	U		0.0022	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-22-10-013018	1/30/2018	<0.018	U		0.0087	J		**0.0016**	J		<0.0044	U		<0.015	U					<0.01	U		**0.0048**	J	
		VMP-22-10-050118	5/1/2018	<0.021	U		0.0054	J		**0.0048**	J		<0.0052	U		<0.018	U					**0.0044**	J		**0.015**		
		VMP-22-10-071818	7/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-22-10-101918	10/19/2018	<0.019	U		0.0039	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-22-10-012819	1/28/2019	<0.019	U		0.0025	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-22-10-072419	7/24/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-22-10-102319	10/23/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-22-10-012320	1/23/2020	<0.022	U		0.011	J		<0.0066	U		<0.0055	U		<0.019	U					**0.0061**	J		<0.0066	U	
		VMP-22-10-042820	4/28/2020	<0.019	U		0.0029	J		<0.0057	U		<0.0047	U		<0.017	U					**0.0034**	J		<0.0057	U	
		VMP-22-10-072320	7/23/2020	<0.02	U		0.0096	J		<0.0061	U		<0.0051	U		<0.018	U					**0.009**	J		<0.0061	U	
		VMP-22-10-110520	11/5/2020	<0.021	U		0.0048	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0052**	J		<0.0062	U	
		VMP-22-10-012621	1/26/2021	<0.021	U		0.0039	J		<0.0063	U		<0.0052	U		<0.018	U					**0.012**	J		<0.0063	U	
	18 ft	VMP-22-18-012715	1/27/2015	<0.02	U		0.0066	J		<0.006	U		<0.005	U		<0.0044	U					**0.0061**	J		**0.0012**	J	
		VMP-22-18-012715-DUP	1/27/2015	<0.02	U		0.0027	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.0068**	J		**0.0012**	J	
		VMP-22-18-042715	4/27/2015	<0.02	U	UJ	0.0011	J		<0.006	U		<0.005	U	UJ	<0.0044	U					<0.012	U	UJ	**0.0012**	J	
		VMP-22-18-072015	7/20/2015	<0.028	U		0.0065	J		<0.0083	U		<0.0069	J	U	<0.0061	U					**0.006**	J		<0.0083	U	
		VMP-22-18-102315	10/23/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.0047	U					**0.0063**	J		<0.0064	U	
		VMP-22-18-012616	1/26/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	J	U	<0.0048	U					**0.0045**	J		<0.0066	U	
		VMP-22-18-042616	4/26/2016	**0.0016**	J		0.0048	J		<0.0068	U		<0.0056	U		<0.005	U					**0.024**			<0.0068	U	
		VMP-22-18-072216	7/22/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.033**			<0.0066	U	
		VMP-22-18-102716	10/27/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U		<0.015	U		**0.0037**	J		<0.0068	U	
		VMP-22-18-012417	1/24/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.011**	J		<0.0066	U	
		VMP-22-18-042717	4/27/2017	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-22-18-072617	7/26/2017	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0062**	J		<0.0067	U	
		VMP-22-18-102617	10/26/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-22-18-013018	1/30/2018	<0.017	U		0.0068	J		<0.0052	U		<0.0043	U		<0.015	U					**0.0013**	J		<0.0052	U	
		VMP-22-18-041318	4/13/2018	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-22-18-071818	7/18/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-22-18-101918	10/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-22-18-012819	1/28/2019	<0.018	U		0.0029	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-22-18-043019	4/30/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-22-18-072419	7/24/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-22-18-102319	10/23/2019	<0.02	U		0.0096	J		<0.006	U		<0.005	U		<0.018	U					**0.0025**	J		<0.006	U	
		VMP-22-18-012320	1/23/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.04**			**0.0022**	J	
		VMP-22-18-042820	4/28/2020	<0.021	U		0.0028	J		<0.0063	U		<0.0053	U		<0.018	U					**0.0057**	J		<0.0063	U	
		VMP-22-18-072320	7/23/2020	<0.022	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0021**	J		<0.0068	U	
		VMP-22-18-110520	11/5/2020	<0.02	U		0.0027	J		<0.0059	U		<0.005	U		<0.017	U					**0.0053**	J		<0.0059	U	
		VMP-22-18-012621	1/26/2021	<0.022	U		0.0024	J		<0.0065	U		<0.0054	J	U	<0.019	U					**0.0031**	J		<0.0065	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.0021**	J		<0.043	U		<0.008	U		<0.008	U	
		VMP-22-10-042715	4/27/2015	<0.0052	U		<0.0084	U		<0.0083	U		**0.0012**	J		**0.01**			**0.0017**	J		<0.0067	U		<0.0067	U	
		VMP-22-10-072015	7/20/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0038**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-22-10-102315	10/23/2015	<0.0059	U		<0.0095	U		<0.0094	J	U	<0.0041	U		**0.0016**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-22-10-012616	1/26/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-22-10-042616	4/26/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0023**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-22-10-072216	7/22/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0024**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-22-10-102716	10/27/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	J	U	<0.039	U		<0.0072	U		<0.0072	U	
		VMP-22-10-012417	1/24/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0024**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-22-10-042717	4/27/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-22-10-072617	7/26/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0013**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-10-102617	10/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-22-10-013018	1/30/2018	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		**0.0009**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-22-10-050118	5/1/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-22-10-071818	7/18/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-10-101918	10/19/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-22-10-012819	1/28/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-10-072419	7/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.014**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-22-10-102319	10/23/2019	<0.0053	U		<0.0085	U	UJ	<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-22-10-012320	1/23/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.032**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-22-10-042820	4/28/2020	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-10-072320	7/23/2020	<0.0084	U		<0.0085	U		**0.014**			<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-22-10-110520	11/5/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-22-10-012621	1/26/2021	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	J	U	<0.038	U		<0.007	U		<0.007	U	
	18 ft	VMP-22-18-012715	1/27/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0059**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-22-18-012715-DUP	1/27/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0043**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-22-18-042715	4/27/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0066**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-18-072015	7/20/2015	<0.0072	U		<0.012	U		<0.011	U		<0.005	U		**0.0084**			<0.05	U		<0.0092	U		<0.0092	U	
		VMP-22-18-102315	10/23/2015	<0.0056	U		<0.009	U		**0.0051**	J		<0.0039	U		**0.0017**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-22-18-012616	1/26/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-22-18-042616	4/26/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0019**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-22-18-072216	7/22/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.00096**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-22-18-102716	10/27/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0018**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-22-18-012417	1/24/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0024**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-22-18-042717	4/27/2017	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-22-18-072617	7/26/2017	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-22-18-102617	10/26/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-18-013018	1/30/2018	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		**0.00053**	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-22-18-041318	4/13/2018	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-18-071818	7/18/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-22-18-101918	10/19/2018	<0.0047	U		<0.0076	U		**0.0029**	J		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-22-18-012819	1/28/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-22-18-043019	4/30/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-18-072419	7/24/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-22-18-102319	10/23/2019	<0.0052	U		<0.0084	U	UJ	<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-22-18-012320	1/23/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-22-18-042820	4/28/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-22-18-072320	7/23/2020	<0.0094	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-22-18-110520	11/5/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-22-18-012621	1/26/2021	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	J	U	<0.039	U		<0.0072	U		<0.0072	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-22	10 ft	VMP-22-10-012715	1/27/2015	<0.0079	U		<0.0082	U		<0.0072	J	U	<0.0072	U		0.0022	J		<0.0037	U		<0.0064	J	U	<0.0064	U	
		VMP-22-10-042715	4/27/2015	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.014			<0.0031	U		0.0032	J		<0.0053	U	
		VMP-22-10-072015	7/20/2015	<0.0069	U		<0.0072	J	U	<0.0063	U		<0.0063	U		0.002	J		<0.0033	U		0.0024	J		<0.0056	U	
		VMP-22-10-102315	10/23/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.00097	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-22-10-012616	1/26/2016	<0.0064	U		0.0022	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-10-042616	4/26/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.00061	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-22-10-072216	7/22/2016	<0.0074	U		0.0015	J		<0.0067	U		<0.0067	U		0.0028	J		<0.0035	U		0.0024	J		**0.0017**	J	
		VMP-22-10-102716	10/27/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	J	U	<0.0034	U		0.0031	J		<0.0058	U	
		VMP-22-10-012417	1/24/2017	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-22-10-042717	4/27/2017	<0.006	U		0.0013	J		<0.0054	U		<0.0054	U		0.0023	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-22-10-072617	7/26/2017	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		0.00086	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-22-10-102617	10/26/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0016	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-10-013018	1/30/2018	<0.0058	U		0.0014	J		**0.0036**	J		<0.0053	J	U	0.0027	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-22-10-050118	5/1/2018	<0.0068	U		<0.0071	U		**0.0084**			<0.0062	U		0.017			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-22-10-071818	7/18/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.0007	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-22-10-101918	10/19/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0037	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-22-10-012819	1/28/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-22-10-072419	7/24/2019	<0.0066	U		0.00097	J		<0.0061	U		<0.0061	U		0.0037	J		<0.0032	U		0.0019	J		<0.0054	U	
		VMP-22-10-102319	10/23/2019	<0.0067	U		0.0023	J	J	<0.0061	U		<0.0061	U		0.0041	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-22-10-012320	1/23/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.018			<0.0034	U		0.022			**0.0066**		
		VMP-22-10-042820	4/28/2020	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-22-10-072320	7/23/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-22-10-110520	11/5/2020	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-22-10-012621	1/26/2021	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.00094	J		<0.0033	U		<0.0056	J	U	<0.0056	U	
	18 ft	VMP-22-18-012715	1/27/2015	<0.0066	U		<0.0069	U		**0.012**			**0.0031**	J		0.0089			<0.0031	U		0.006			**0.0026**	J	
		VMP-22-18-012715-DUP	1/27/2015	<0.0067	U		<0.007	U		**0.013**			**0.0029**	J		0.0032	J		<0.0032	U		0.0042	J		**0.0018**	J	
		VMP-22-18-042715	4/27/2015	<0.0066	U		<0.0068	U		**0.0026**	J		<0.006	U		0.012			<0.0031	U		0.016			**0.0071**		
		VMP-22-18-072015	7/20/2015	<0.009	U		<0.0095	U		<0.0083	J	U	<0.0083	U		0.012			<0.0043	U		0.0053	J		<0.0073	U	
		VMP-22-18-102315	10/23/2015	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.0018	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-22-18-012616	1/26/2016	<0.0072	U		0.002	J		<0.0066	U		<0.0066	U		0.0069			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-22-18-042616	4/26/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-22-18-072216	7/22/2016	<0.0072	U		0.0019	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-22-18-102716	10/27/2016	<0.0075	U		0.0014	J		<0.0068	U		<0.0068	U		<0.0065	J	U	<0.0036	U		0.0078			**0.0018**	J	
		VMP-22-18-012417	1/24/2017	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.0011	J		<0.0058	U	
		VMP-22-18-042717	4/27/2017	<0.0068	U		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-22-18-072617	7/26/2017	<0.0073	U		0.002	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-22-18-102617	10/26/2017	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-22-18-013018	1/30/2018	<0.0057	U		<0.0059	U		<0.0052	U		<0.0052	U		0.0041	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-22-18-041318	4/13/2018	<0.007	U		0.0015	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-22-18-041318-DUP	4/13/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-18-071818	7/18/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.015			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-22-18-101918	10/19/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0014	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-22-18-012819	1/28/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0048	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-22-18-043019	4/30/2019	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-22-18-072419	7/24/2019	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-18-102319	10/23/2019	<0.0066	U		0.0021	J	J	<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-22-18-012320	1/23/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0018	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-22-18-042820	4/28/2020	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-18-072320	7/23/2020	<0.0074	U		0.001	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-22-18-110520	11/5/2020	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-22-18-012621	1/26/2021	<0.0071	U		0.0013	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	J	U	<0.0057	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	**0.0079**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0029**	J	
		VMP-22-38-042715	4/27/2015	**0.0064**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U	UJ	<0.011	U		**0.0012**	J	
		VMP-22-38-042715-DUP	4/27/2015	**0.0067**	J		<0.0041	U		<0.0086	U		**0.0042**	J		<0.05	U		<0.0028	U	UJ	<0.012	U		**0.0016**	J	
		VMP-22-38-072015	7/20/2015	**0.0097**	J		**0.0029**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.007	J		**0.0016**	J	
		VMP-22-38-072015-DUP	7/20/2015	**0.012**	J		**0.0021**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.0075	J		**0.0013**	J	
		VMP-22-38-102315	10/23/2015	**0.013**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.003**	J	
		VMP-22-38-012616-DUP	1/26/2016	**0.011**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.005	J		<0.015	J	U
		VMP-22-38-042616	4/26/2016	**0.0075**	J		**0.002**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		<0.018	U	
		VMP-22-38-072216	7/22/2016	**0.032**	J		**0.0017**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0092**	J	
		VMP-22-38-072216-DUP	7/22/2016	**0.013**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-22-38-102716	10/27/2016	**0.017**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0084**	J	
		VMP-22-38-102716-Dup	10/27/2016	**0.0065**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-22-38-012417	1/24/2017	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0029**	J	
		VMP-22-38-042717	4/27/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0045	J		<0.014	U	
		VMP-22-38-072617	7/26/2017	**0.03**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0049	J		**0.0057**	J	
		VMP-22-38-072617-DUP	7/26/2017	**0.027**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.006**	J	
		VMP-22-38-102617	10/26/2017	**0.014**	J		**0.00047**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0025**	J	
		VMP-22-38-013018	1/30/2018	<0.027	J	U	**0.001**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.01	J		<0.013	U	
		VMP-22-38-050118	5/1/2018	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0059	J		**0.0033**	J	
		VMP-22-38-071818	7/18/2018	**0.069**		J	**0.018**		J	<0.011	U		<0.017	U		<0.066	U		<0.0037	U		0.036		J	**0.0098**	J	
		VMP-22-38-071818-DUP	7/18/2018	**0.1**		J	**0.00067**	J	J	<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U	UJ	**0.0069**	J	
		VMP-22-38-101918	10/19/2018	**0.0051**	J		**0.02**			<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		0.043			<0.013	U	
		VMP-22-38-012819	1/28/2019	**0.012**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0068	J		<0.014	U	
		VMP-22-38-012819-DUP	1/28/2019	**0.017**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.0055	J		<0.015	U	
		VMP-22-38-043019	4/30/2019	**0.028**			**0.0048**			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.003	J		**0.0043**	J	
		VMP-22-38-072419	7/24/2019	**0.046**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U	UJ	<0.0028	U		<0.012	U		<0.015	U	
		VMP-22-38-102319	10/23/2019	**0.01**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.031			<0.014	U	
		VMP-22-38-012320	1/23/2020	**0.0073**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-22-38-042820	4/28/2020	**0.038**		J	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0065	J		**0.0034**	J	
		VMP-22-38-042820-DUP	4/28/2020	**0.0068**	J	J	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.005	J		<0.015	U	
		VMP-22-38-110520	11/5/2020	**0.013**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0098	J		<0.015	U	
		VMP-22-38-012621	1/26/2021	**0.0065**	J		**0.00042**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0068	J		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0066	U	
		VMP-22-38-042715	4/27/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0021**	J		<0.024	U		<0.0062	ND,UJ	UJ
		VMP-22-38-042715-DUP	4/27/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0022**	J		<0.026	U		**0.0028**	J	J
		VMP-22-38-072015	7/20/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0036**	J		<0.03	ND,UJ	UJ	<0.0075	U	
		VMP-22-38-072015-DUP	7/20/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0038**	J		<0.028	ND,UJ	UJ	<0.0071	U	
		VMP-22-38-102315	10/23/2015	**0.0012**	J		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		**0.0056**	J		<0.028	U		<0.0069	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.011**			<0.027	U		<0.0067	U	
		VMP-22-38-042616	4/26/2016	<0.019	U		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		**0.0047**	J		<0.032	U		<0.008	U	
		VMP-22-38-072216	7/22/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.0039**	J		<0.029	U		<0.0072	U	
		VMP-22-38-072216-DUP	7/22/2016	**0.0034**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.003**	J		<0.028	U		<0.0071	U	
		VMP-22-38-102716	10/27/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0024**	J		<0.028	U		<0.007	U	
		VMP-22-38-102716-Dup	10/27/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.002**	J		<0.026	U		<0.0065	U	
		VMP-22-38-012417	1/24/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.002**	J		<0.027	U		<0.0067	U	
		VMP-22-38-042717	4/27/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0018**	J		<0.024	U		<0.0061	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0015**	J		<0.025	U		<0.0062	U	
		VMP-22-38-072617	7/26/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0061**			<0.024	U		<0.0062	U	
		VMP-22-38-072617-DUP	7/26/2017	**0.0018**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0056**	J		<0.024	U		<0.0061	U	
		VMP-22-38-102617	10/26/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-22-38-013018	1/30/2018	**0.009**	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-22-38-050118	5/1/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-22-38-071818	7/18/2018	**0.0019**	J		<0.011	U		<0.0078	U		<0.014	U		<0.018	U		<0.0082	U		<0.035	U		<0.0087	U	
		VMP-22-38-071818-DUP	7/18/2018	**0.0014**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0016**	J		<0.026	U		<0.0064	U	
		VMP-22-38-101918	10/19/2018	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		**0.0012**	J		<0.023	U		<0.0057	U	
		VMP-22-38-012819	1/28/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-22-38-012819-DUP	1/28/2019	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-22-38-043019	4/30/2019	**0.0026**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		**0.0019**	J		<0.006	U	
		VMP-22-38-072419	7/24/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.028**			<0.026	U		<0.0066	ND,UJ	UJ
		VMP-22-38-102319	10/23/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0015**	J		<0.024	U		<0.0061	U	
		VMP-22-38-012320	1/23/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-22-38-042820	4/28/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.00087**	J		<0.026	U		<0.0065	U	
		VMP-22-38-042820-DUP	4/28/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.00093**	J		<0.027	U		<0.0068	U	
		VMP-22-38-110520	11/5/2020	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0013**	J		<0.026	U		<0.0065	U	
		VMP-22-38-012621	1/26/2021	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-22-38-042715	4/27/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-22-38-042715-DUP	4/27/2015	<0.0044	U		<0.0098	U		**0.0043**	J		0.0044	J		**0.0044**	J		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-22-38-072015	7/20/2015	**0.002**	J		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-22-38-072015-DUP	7/20/2015	**0.0018**	J		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0033**	J		<0.0056	U		<0.0056	U	
		VMP-22-38-102315	10/23/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0029**	J		<0.0054	U		<0.0054	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0038**	J		<0.0053	U		<0.0053	U	
		VMP-22-38-042616	4/26/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0021**	J		<0.0063	U		<0.0063	U	
		VMP-22-38-072216	7/22/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-22-38-072216-DUP	7/22/2016	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0031**	J		<0.0056	U		<0.0056	U	
		VMP-22-38-102716	10/27/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0055	U		<0.0055	U	
		VMP-22-38-102716-Dup	10/27/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-22-38-012417	1/24/2017	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-22-38-042717	4/27/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-22-38-072617	7/26/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-22-38-072617-DUP	7/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-22-38-102617	10/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0032**	J		<0.0048	U		<0.0048	U	
		VMP-22-38-013018	1/30/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-22-38-050118	5/1/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-22-38-071818	7/18/2018	**0.16**		J	<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0022**	J		<0.0068	U		<0.0068	U	
		VMP-22-38-071818-DUP	7/18/2018	**0.0014**	J	J	<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-22-38-101918	10/19/2018	**0.028**			<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		<0.0054	U		<0.0044	U		<0.0044	U	
		VMP-22-38-012819	1/28/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-22-38-012819-DUP	1/28/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-22-38-043019	4/30/2019	**0.0095**			<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0027**	J		<0.0047	U		<0.0047	U	
		VMP-22-38-072419	7/24/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-22-38-102319	10/23/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0034**	J	J	<0.0048	U		<0.0048	U	
		VMP-22-38-012320	1/23/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-22-38-042820	4/28/2020	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-22-38-042820-DUP	4/28/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-22-38-110520	11/5/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-22-38-012621	1/26/2021	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0031**	J		<0.0057	U		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-38-042715	4/27/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-38-042715-DUP	4/27/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-38-072015	7/20/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-22-38-072015-DUP	7/20/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-22-38-102315	10/23/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.004**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-38-042616	4/26/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-22-38-072216	7/22/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-22-38-072216-DUP	7/22/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-22-38-102716	10/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-22-38-102716-Dup	10/27/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-22-38-012417	1/24/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-38-042717	4/27/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-38-072617	7/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-38-072617-DUP	7/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-38-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-22-38-013018	1/30/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-22-38-050118	5/1/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-22-38-071818	7/18/2018	<0.0067	U		<0.0067	U		<0.0067	U		<0.059	U		<0.0078	U		<0.0077	U		<0.0077	U		<0.024	U	
		VMP-22-38-071818-DUP	7/18/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-38-101918	10/19/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-22-38-012819	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-22-38-012819-DUP	1/28/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-22-38-043019	4/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-22-38-072419	7/24/2019	<0.0051	U		0.0012	J		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-22-38-102319	10/23/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U	UJ	<0.0053	U		<0.0053	U		<0.017	U	
		VMP-22-38-012320	1/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-22-38-042820	4/28/2020	<0.005	U		<0.005	U		<0.005	U		**0.0022**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-22-38-042820-DUP	4/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-22-38-110520	11/5/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		**0.012**	J	
		VMP-22-38-012621	1/26/2021	<0.0056	U		<0.0056	U		<0.0056	U		**0.00089**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	0.0062	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-22-38-042715	4/27/2015	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U	UJ	<0.0042	U	
		VMP-22-38-042715-DUP	4/27/2015	<0.0096	U		<0.0056	U		0.0023	J		<0.0098	U		<0.0089	U		<0.0052	U		**0.025**	J	J	<0.0045	U	
		VMP-22-38-072015	7/20/2015	0.011			**0.0028**	J		<0.0071	U		<0.011	U		<0.01	U		**0.0077**			<0.062	U		**0.018**		
		VMP-22-38-072015-DUP	7/20/2015	0.01	J		**0.0021**	J		<0.0068	U		<0.01	U		<0.0096	U		**0.0072**			<0.059	U		**0.017**		
		VMP-22-38-102315	10/23/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-22-38-042616	4/26/2016	<0.012	U		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-22-38-072216	7/22/2016	<0.01	U		**0.0017**	J		<0.0068	U		<0.011	U		<0.0097	U		**0.0064**			<0.059	U		**0.011**		
		VMP-22-38-072216-DUP	7/22/2016	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		**0.0065**			<0.059	U		**0.0084**		
		VMP-22-38-102716	10/27/2016	<0.01	J	U	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		**0.0025**	J	
		VMP-22-38-102716-Dup	10/27/2016	<0.0094	J	U	<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.0025**	J	
		VMP-22-38-012417	1/24/2017	0.0092	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-22-38-042717	4/27/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0019**	J	
		VMP-22-38-072617	7/26/2017	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0016**	J	
		VMP-22-38-072617-DUP	7/26/2017	0.0058	J		<0.0051	U		<0.0058	U		**0.003**	J		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-22-38-102617	10/26/2017	0.0087	J	J	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-22-38-013018	1/30/2018	0.004	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0018**	J	
		VMP-22-38-050118	5/1/2018	0.02			<0.0055	U		0.0014	J		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0029**	J	
		VMP-22-38-071818	7/18/2018	0.0089	J		**0.016**		J	0.013			<0.013	U		<0.012	U		**0.29**		J	<0.072	U		**0.32**		
		VMP-22-38-071818-DUP	7/18/2018	0.0072	J		<0.0054	U	UJ	<0.0061	U		<0.0095	U		<0.0086	U		**0.0037**	J	J	<0.053	U		**0.004**	J	
		VMP-22-38-101918	10/19/2018	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		**0.042**			<0.047	U		**0.19**		
		VMP-22-38-012819	1/28/2019	0.0022	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		**0.0019**	J	
		VMP-22-38-012819-DUP	1/28/2019	0.0024	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-22-38-043019	4/30/2019	<0.0088	U		**0.013**			0.012			<0.009	U		<0.0082	U		**0.033**			<0.05	U		**0.0075**		
		VMP-22-38-072419	7/24/2019	0.0058	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-22-38-102319	10/23/2019	<0.0088	ND,UJ	UJ	**0.00082**	J		<0.0058	U		<0.009	U		<0.0082	U		**0.0034**	J		<0.05	U		**0.0093**		
		VMP-22-38-012320	1/23/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-22-38-042820	4/28/2020	0.035	J0	J	<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		**0.0024**	J		<0.054	U		<0.0044	U	
		VMP-22-38-042820-DUP	4/28/2020	0.0061	J	J	<0.0057	U		0.0036	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-22-38-110520	11/5/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.001**	J		<0.054	U		<0.0044	U	
		VMP-22-38-012621	1/26/2021	<0.026	U	UJ	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0071**	J		<0.0062	U	
		VMP-22-38-042715	4/27/2015	<0.019	U	UJ	<0.014	U		<0.0058	U		<0.0049	U	UJ	<0.0043	U					**0.0056**	J	J	<0.0058	U	
		VMP-22-38-042715-DUP	4/27/2015	<0.021	U	UJ	0.0011	J		**0.0015**	J		<0.0052	J	UJ	<0.0046	U					**0.0041**	J	J	**0.002**	J	
		VMP-22-38-072015	7/20/2015	<0.024	U		0.013	J		<0.0071	U		<0.0059	J	U	<0.0052	U					<0.014	J	U	<0.0071	U	
		VMP-22-38-072015-DUP	7/20/2015	<0.023	U		0.012	J		<0.0068	U		<0.0056	J	U	<0.005	U					<0.014	J	U	<0.0068	U	
		VMP-22-38-102315	10/23/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	U		<0.0066	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.021	U		0.002	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.0085**	J		<0.0064	U	
		VMP-22-38-042616	4/26/2016	<0.025	U		<0.018	U		<0.0076	U		<0.0064	U		<0.0056	U					**0.0031**	J		<0.0076	U	
		VMP-22-38-072216	7/22/2016	<0.023	U		0.0071	J		<0.0068	U		<0.0057	U		<0.02	U					**0.014**			<0.0068	U	
		VMP-22-38-072216-DUP	7/22/2016	<0.022	U		0.005	J		<0.0068	U		<0.0056	U		<0.02	U					**0.01**	J		<0.0068	U	
		VMP-22-38-102716	10/27/2016	<0.022	U		0.0041	J		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.0062**	J		<0.0066	U	
		VMP-22-38-102716-Dup	10/27/2016	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U		**0.00093**	J	J	**0.0043**	J		<0.0062	U	
		VMP-22-38-012417	1/24/2017	**0.0012**	J		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0025**	J		<0.0063	U	
		VMP-22-38-042717	4/27/2017	<0.019	U		0.0022	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.02	U		0.0019	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-22-38-072617	7/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0065**	J		<0.0058	U	
		VMP-22-38-072617-DUP	7/26/2017	<0.019	U		0.003	J		<0.0058	U		<0.0048	U		<0.017	U					**0.019**			<0.0058	U	
		VMP-22-38-102617	10/26/2017	<0.019	U		0.0018	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0089**	J	J	<0.0058	U	
		VMP-22-38-013018	1/30/2018	<0.018	U		0.0071	J		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-22-38-050118	5/1/2018	<0.021	U		0.012	J		**0.0017**	J		<0.0052	U		<0.018	U					**0.0088**	J		**0.004**	J	
		VMP-22-38-071818	7/18/2018	<0.028	U		0.22		J	**0.0019**	J		<0.0069	U		<0.024	U					<0.017	U		**0.0039**	J	
		VMP-22-38-071818-DUP	7/18/2018	<0.02	U		0.0081	J	J	<0.0061	U		<0.005	U		<0.018	U					**0.01**	J		<0.0061	U	
		VMP-22-38-101918	10/19/2018	<0.018	U		0.15			<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-22-38-012819	1/28/2019	<0.019	U		0.0034	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-22-38-012819-DUP	1/28/2019	<0.02	U		0.0032	J		<0.0061	U		<0.0051	U		<0.018	U					**0.002**	J		<0.0061	U	
		VMP-22-38-043019	4/30/2019	<0.019	U		0.0099	J		**0.0021**	J		<0.0048	U		<0.017	U					<0.012	U		**0.0042**	J	
		VMP-22-38-072419	7/24/2019	<0.021	U		0.0041	J		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-22-38-102319	10/23/2019	<0.019	U		0.02			<0.0058	U		<0.0048	U		<0.017	U					**0.0033**	J		<0.0058	U	
		VMP-22-38-012320	1/23/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0068**	J		<0.0065	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-22-38-042820	4/28/2020	<0.021	U		0.0078	J		<0.0062	U		<0.0052	U		<0.018	U					**0.034**		J	<0.0062	U	
		VMP-22-38-042820-DUP	4/28/2020	<0.021	U		0.0027	J		<0.0064	U		<0.0054	U		<0.019	U					**0.0061**	J	J	<0.0064	U	
		VMP-22-38-110520	11/5/2020	<0.021	U		0.0071	J		<0.0062	U		<0.0052	U		<0.018	U					**0.004**	J		<0.0062	U	
		VMP-22-38-012621	1/26/2021	<0.023	U		0.0027	J		<0.0069	U		<0.0057	U		<0.02	U					**0.0054**	J		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-22-38-042715	4/27/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-22-38-042715-DUP	4/27/2015	**0.0013**	J		**0.0029**	J		<0.0087	U		<0.0038	U		<0.0048	U		**0.018**	J		<0.007	U		<0.007	U	
		VMP-22-38-072015	7/20/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-22-38-072015-DUP	7/20/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-22-38-102315	10/23/2015	<0.0057	U		<0.0092	U		<0.0091	J	U	<0.004	U		**0.001**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-22-38-042616	4/26/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		<0.0058	U		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-22-38-072216	7/22/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0016**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-22-38-072216-DUP	7/22/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0016**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-22-38-102716	10/27/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	J	U	<0.04	U		<0.0074	U		<0.0074	U	
		VMP-22-38-102716-Dup	10/27/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	
		VMP-22-38-012417	1/24/2017	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-22-38-042717	4/27/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-22-38-072617	7/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-22-38-072617-DUP	7/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-22-38-102617	10/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-22-38-013018	1/30/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.00081**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-22-38-050118	5/1/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0018**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-22-38-071818	7/18/2018	<0.0072	U		<0.012	U		<0.011	U		<0.005	U		**0.013**		J	<0.05	U		<0.0092	U		<0.0092	U	
		VMP-22-38-071818-DUP	7/18/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U	UJ	<0.037	U		<0.0067	U		<0.0067	U	
		VMP-22-38-101918	10/19/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.0072**			<0.032	U		<0.006	U		<0.006	U	
		VMP-22-38-012819	1/28/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-22-38-012819-DUP	1/28/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-22-38-043019	4/30/2019	<0.005	U		<0.008	U		**0.01**			<0.0034	U		**0.063**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-22-38-072419	7/24/2019	<0.0054	U		**0.0015**	J		<0.0087	U		<0.0038	U		**0.00049**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-22-38-102319	10/23/2019	<0.005	U		<0.0081	U	UJ	<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-22-38-012320	1/23/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-22-38-042820	4/28/2020	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.018**			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-22-38-042820-DUP	4/28/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-22-38-110520	11/5/2020	<0.0054	U		<0.0086	U		**0.14**			<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-22-38-012621	1/26/2021	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	J	U	<0.042	U		<0.0076	U		<0.0076	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38 ft	VMP-22-38-012715	1/27/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0015	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-22-38-042715	4/27/2015	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0019	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-22-38-042715-DUP	4/27/2015	<0.0069	U		<0.0072	U		**0.0025**	J		**0.0024**	J		0.0027	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-38-072015	7/20/2015	<0.0078	U		<0.0081	J	U	<0.0071	U		<0.0071	U		0.017			<0.0037	U		0.0026	J		<0.0063	U	
		VMP-22-38-072015-DUP	7/20/2015	<0.0074	U		<0.0078	J	U	<0.0068	U		<0.0068	U		0.016			<0.0035	U		0.0019	J		<0.006	U	
		VMP-22-38-102315	10/23/2015	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		0.0005	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-22-38-012616-DUP	1/26/2016	<0.007	U		0.0018	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-38-042616	4/26/2016	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-22-38-072216	7/22/2016	<0.0075	U		0.0015	J		<0.0068	U		<0.0068	U		0.0096			<0.0036	U		0.0025	J		<0.006	U	
		VMP-22-38-072216-DUP	7/22/2016	<0.0074	U		<0.0077	U		<0.0068	U		<0.0068	U		0.0083			<0.0035	U		0.0012	J		<0.006	U	
		VMP-22-38-102716	10/27/2016	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		0.0023	J		<0.0034	U		0.0018	J		<0.0059	U	
		VMP-22-38-102716-Dup	10/27/2016	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.0024	J		<0.0032	U		0.0022	J		<0.0054	U	
		VMP-22-38-012417	1/24/2017	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-38-042717	4/27/2017	<0.0063	U		0.0011	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-22-38-042717-DUP	4/27/2017	<0.0064	U		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-22-38-072617	7/26/2017	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-22-38-072617-DUP	7/26/2017	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-22-38-102617	10/26/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	J	U	<0.003	U		<0.0051	U		<0.0051	U	
		VMP-22-38-013018	1/30/2018	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.0012	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-22-38-050118	5/1/2018	<0.0068	U		0.0013	J		**0.0025**	J		<0.0062	U		0.053			<0.0032	U		0.00098	J		<0.0055	U	
		VMP-22-38-071818	7/18/2018	<0.0091	U		<0.0095	U		**0.021**		J	**0.012**			0.013			<0.0043	U		0.031		J	**0.0073**		
		VMP-22-38-071818-DUP	7/18/2018	<0.0066	U		<0.0069	U		<0.0061	U	UJ	<0.0061	U		0.00057	J		<0.0032	U		<0.0054	U	UJ	<0.0054	U	
		VMP-22-38-101918	10/19/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0014	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-22-38-012819	1/28/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0013	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-22-38-012819-DUP	1/28/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-22-38-043019	4/30/2019	<0.0063	U		0.0012	J		**0.017**			**0.0053**	J		0.02			<0.003	U		0.038			**0.012**		
		VMP-22-38-072419	7/24/2019	**0.006**	J		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-22-38-102319	10/23/2019	<0.0063	U		0.0026	J	J	<0.0058	U		<0.0058	U		0.0062			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-22-38-012320	1/23/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-22-38-012320-DUP	1/23/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-22-38-042820	4/28/2020	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-22-38-042820-DUP	4/28/2020	<0.007	U		0.0014	J		**0.0041**	J		**0.0019**	J		<0.0061	U		<0.0033	U		0.0034	J		**0.0016**	J	
		VMP-22-38-110520	11/5/2020	**0.005**	J		0.0012	J		**0.002**	J		<0.0062	U		0.0026	J		<0.0032	U		0.0018	J		<0.0055	U	
		VMP-22-38-012621	1/26/2021	<0.0075	U		0.0016	J		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	**0.0098**	J		<0.0049	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		<0.018	U	
		VMP-23-5-042715	4/27/2015	**0.015**	J		**0.0074**			**0.0026**	J		<0.014	U		<0.051	U		<0.0029	U	UJ	0.0072	J		**0.0033**	J	
		VMP-23-5-072015	7/20/2015	**0.019**	J		**0.012**			**0.0024**	J		<0.014	U		<0.051	U		<0.0029	U		0.037			**0.0038**	J	
		VMP-23-5-102615	10/26/2015	**0.005**	J		**0.0017**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.002**	J	
		VMP-23-5-012516	1/25/2016	**0.0086**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-23-5-062816	6/28/2016	**0.024**	J		<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.014	U		<0.015	U		**0.0043**	J	
		VMP-23-5-072216	7/22/2016	**0.017**	J		**0.002**	J		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-23-5-101916	10/19/2016	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-23-5-012617	1/26/2017	<0.028	J	U	<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-5-042517	4/25/2017	<0.03	J	U	<0.004	U		**0.0016**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0022**	J	
		VMP-23-5-072017	7/20/2017	**0.022**	J		<0.0038	U		**0.00072**	J		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.005**	J	
		VMP-23-5-102517	10/25/2017	**0.011**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-5-012318	1/23/2018	**0.011**	J		<0.0041	J	U	<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0066	J		<0.015	U	
		VMP-23-5-041618	4/16/2018	**0.0096**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-23-5-071718	7/17/2018	**0.0064**	J		<0.0042	U		**0.0011**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-23-5-101918	10/19/2018	**0.013**	J		**0.0035**			<0.0072	U		**0.0015**	J		<0.042	U		<0.0024	U		0.0065	J		<0.013	U	
		VMP-23-5-012319	1/23/2019	**0.0081**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-23-5-042919	4/29/2019	**0.031**			**0.005**			<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.01	J		<0.014	U	
		VMP-23-5-072419	7/24/2019	**0.011**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U	UJ	<0.0029	U		<0.012	U		<0.015	U	
		VMP-23-5-102419	10/24/2019	**0.013**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-5-012820	1/28/2020	**0.0052**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-5-042820	4/28/2020	**0.024**	J		<0.004	U		**0.0033**	J		<0.013	U		<0.048	U		<0.0028	U		0.0032	J		**0.004**	J	
		VMP-23-5-072320	7/23/2020	**0.042**			**0.033**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.036			**0.011**	J	
		VMP-23-5-102920	10/29/2020	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-23-5-012121	1/21/2021	**0.0077**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
	10 ft	VMP-23-10-012715	1/27/2015	**0.015**	J		**0.0018**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0076	J		**0.0025**	J	
		VMP-23-10-042715	4/27/2015	**0.013**	J		<0.0045	U		**0.0028**	J		<0.015	U		<0.055	U		<0.0031	U	UJ	<0.014	U		**0.002**	J	
		VMP-23-10-072015	7/20/2015	**0.018**	J		<0.0042	U		**0.0042**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0043**	J	
		VMP-23-10-102615	10/26/2015	**0.094**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-23-10-012516	1/25/2016	**0.024**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0021	J		**0.0052**	J	
		VMP-23-10-062816	6/28/2016	**0.016**	J		**0.00077**	J		**0.0019**	J		<0.016	U		<0.059	U		<0.013	U		<0.014	U		**0.0042**	J	
		VMP-23-10-072216	7/22/2016	**0.016**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-23-10-101916	10/19/2016	**0.044**			**0.0033**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.022			**0.0051**	J	
		VMP-23-10-012617	1/26/2017	<0.027	J	U	<0.0036	J	U	**0.0013**	J		<0.012	U		<0.043	U		<0.0025	U		0.015			**0.0047**	J	
		VMP-23-10-042517	4/25/2017	<0.03	J	U	<0.0041	U		**0.0046**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0024**	J	
		VMP-23-10-072017	7/20/2017	**0.014**	J		<0.0038	U		**0.0016**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-10-102517	10/25/2017	<0.028	J	U	**0.0011**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0056	J		<0.014	U	
		VMP-23-10-012318	1/23/2018	**0.012**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0036**	J	
		VMP-23-10-041618	4/16/2018	**0.02**	J		<0.0037	U		**0.0024**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0035**	J	
		VMP-23-10-071718	7/17/2018	**0.023**	J		**0.00046**	J		**0.0028**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-23-10-101918	10/19/2018	**0.026**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-10-012319	1/23/2019	**0.014**	J		**0.0028**	J		**0.004**	J		<0.011	U		<0.042	U		<0.0024	U		0.021			<0.013	U	
		VMP-23-10-042919	4/29/2019	**0.022**	J		<0.0038	U		**0.0043**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-10-072419	7/24/2019	**0.0092**	J		<0.0039	U		**0.0022**	J		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-10-102419	10/24/2019	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-10-012820	1/28/2020	<0.029	U		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-23-10-042820	4/28/2020	**0.017**	J		<0.004	U		**0.0092**			<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-23-10-072320	7/23/2020	**0.012**	J		<0.0043	U		**0.0034**	J		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0026**	J	
		VMP-23-10-102920	10/29/2020	**0.049**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0017**	J	
		VMP-23-10-102920-DUP	10/29/2020	**0.029**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-10-012121	1/21/2021	**0.0055**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	**0.0078**	J		<0.0097	U		<0.0071	U		<0.013	U		<0.016	U		<0.0075	U		<0.032	U		<0.008	U	
		VMP-23-5-042715	4/27/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0027**	J		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-23-5-072015	7/20/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0067**			<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-23-5-102615	10/26/2015	**0.0012**	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-23-5-012516	1/25/2016	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-23-5-062816	6/28/2016	<0.02	U		<0.01	U		<0.0073	U		<0.014	U		<0.017	U		**0.008**			<0.033	U		<0.0082	U	
		VMP-23-5-072216	7/22/2016	**0.008**	J		<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		**0.0023**	J		<0.031	U		<0.0077	U	
		VMP-23-5-101916	10/19/2016	**0.0017**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.003**	J		<0.026	U		<0.0066	U	
		VMP-23-5-012617	1/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0019**	J		<0.024	U		<0.0061	U	
		VMP-23-5-042517	4/25/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.014**			<0.026	U		<0.0065	U	
		VMP-23-5-072017	7/20/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0074**			<0.025	U		<0.0062	U	
		VMP-23-5-102517	10/25/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-23-5-012318	1/23/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-23-5-041618	4/16/2018	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0024**	J		<0.024	U		<0.0059	U	
		VMP-23-5-071718	7/17/2018	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.003**	J		<0.027	U		<0.0068	U	
		VMP-23-5-101918	10/19/2018	<0.013	J	U	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.00092**	J		<0.022	U		<0.0055	U	
		VMP-23-5-012319	1/23/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0042**	J		<0.023	U		<0.0058	U	
		VMP-23-5-042919	4/29/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0051**	J		<0.025	U		<0.0063	U	
		VMP-23-5-072419	7/24/2019	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0022**	J		<0.027	U		<0.0067	ND,UJ	UJ
		VMP-23-5-102419	10/24/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-23-5-012820	1/28/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0038**	J		<0.026	U		<0.0064	U	
		VMP-23-5-042820	4/28/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.007**			<0.026	U		<0.0064	U	
		VMP-23-5-072320	7/23/2020	**0.0019**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0029**	J		<0.026	U		<0.0066	U	
		VMP-23-5-102920	10/29/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0036**	J		<0.026	U		<0.0065	U	
		VMP-23-5-012121	1/21/2021	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.00045**	J		<0.027	U		<0.0068	U	
	10 ft	VMP-23-10-012715	1/27/2015	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0033**	J		<0.024	U		<0.0062	U	
		VMP-23-10-042715	4/27/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0046**	J		<0.029	U		<0.0074	ND,UJ	UJ
		VMP-23-10-072015	7/20/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.015**			<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-23-10-102615	10/26/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0031**	J		<0.027	U		<0.0068	U	
		VMP-23-10-012516	1/25/2016	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0021**	J		<0.025	U		<0.0063	U	
		VMP-23-10-062816	6/28/2016	<0.019	U		**0.0049**	J		<0.007	U		<0.013	U		<0.016	U		**0.027**			<0.031	U		<0.0079	U	
		VMP-23-10-072216	7/22/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0017**	J		<0.03	U		<0.0076	U	
		VMP-23-10-101916	10/19/2016	**0.0018**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-23-10-012617	1/26/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.015**			<0.023	U		<0.0058	U	
		VMP-23-10-042517	4/25/2017	**0.0029**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.017**			<0.026	U		<0.0066	U	
		VMP-23-10-072017	7/20/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0084**			<0.024	U		<0.0061	U	
		VMP-23-10-102517	10/25/2017	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-23-10-012318	1/23/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-23-10-041618	4/16/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0059**			<0.024	U		<0.006	U	
		VMP-23-10-071718	7/17/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0063**			<0.026	U		<0.0065	U	
		VMP-23-10-101918	10/19/2018	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0032**	J		<0.025	U		<0.0064	U	
		VMP-23-10-012319	1/23/2019	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		**0.012**			<0.023	U		<0.0057	U	
		VMP-23-10-042919	4/29/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.01**			<0.024	U		<0.0061	U	
		VMP-23-10-072419	7/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0059**	J		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-23-10-102419	10/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0064	U	
		VMP-23-10-012820	1/28/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0088**			<0.025	U		<0.0062	U	
		VMP-23-10-042820	4/28/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.019**			<0.026	U		<0.0064	U	
		VMP-23-10-072320	7/23/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.016**			<0.028	U		<0.007	U	
		VMP-23-10-102920	10/29/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0062**			<0.026	U		<0.0064	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0058**	J		<0.026	U		<0.0064	U	
		VMP-23-10-012121	1/21/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0029**	J		<0.027	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	<0.0053	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0022**	J		<0.0062	U		<0.0062	U	
		VMP-23-5-042715	4/27/2015	**0.0042**	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-23-5-072015	7/20/2015	**0.0029**	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-23-5-102615	10/26/2015	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0033**	J		<0.0045	U		<0.0045	U	
		VMP-23-5-012516	1/25/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0044**	J		<0.0056	U		<0.0056	U	
		VMP-23-5-062816	6/28/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		<0.0079	U		<0.0064	U		<0.0064	U	
		VMP-23-5-072216	7/22/2016	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0031**	J		<0.006	U		<0.006	U	
		VMP-23-5-101916	10/19/2016	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-23-5-012617	1/26/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-23-5-042517	4/25/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-23-5-072017	7/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-23-5-102517	10/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-23-5-012318	1/23/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0037**	J		<0.0052	U		<0.0052	U	
		VMP-23-5-041618	4/16/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0038**	J		<0.0046	U		<0.0046	U	
		VMP-23-5-071718	7/17/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0051**	J		<0.0053	U		<0.0053	U	
		VMP-23-5-101918	10/19/2018	**0.0047**			<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0032**	J		<0.0043	U		<0.0043	U	
		VMP-23-5-012319	1/23/2019	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-23-5-042919	4/29/2019	**0.0019**	J		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0036**	J		<0.0049	U		<0.0049	U	
		VMP-23-5-072419	7/24/2019	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-23-5-102419	10/24/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-23-5-012820	1/28/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-23-5-042820	4/28/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-23-5-072320	7/23/2020	**0.027**			<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-23-5-102920	10/29/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-23-5-012121	1/21/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
	10 ft	VMP-23-10-012715	1/27/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-23-10-042715	4/27/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-23-10-072015	7/20/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0037**	J		<0.0053	U		<0.0053	U	
		VMP-23-10-102615	10/26/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0034**	J		<0.0053	U		<0.0053	U	
		VMP-23-10-012516	1/25/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0038**	J		<0.005	U		<0.005	U	
		VMP-23-10-062816	6/28/2016	**0.0026**	J		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0032**	J		<0.0062	U		<0.0062	U	
		VMP-23-10-072216	7/22/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0034**	J		<0.0059	U		<0.0059	U	
		VMP-23-10-101916	10/19/2016	**0.0015**	J		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-23-10-012617	1/26/2017	**0.0014**	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-23-10-042517	4/25/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-23-10-072017	7/20/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-23-10-102517	10/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-23-10-012318	1/23/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0032**	J		<0.0045	U		<0.0045	U	
		VMP-23-10-041618	4/16/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.004**	J		<0.0047	U		<0.0047	U	
		VMP-23-10-071718	7/17/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-23-10-101918	10/19/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-23-10-012319	1/23/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0032**	J		<0.0044	U		<0.0044	U	
		VMP-23-10-042919	4/29/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-23-10-072419	7/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-23-10-102419	10/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-23-10-012820	1/28/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-23-10-042820	4/28/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-23-10-072320	7/23/2020	**0.00036**	J		<0.01	U		<0.0082	U		<0.0082	J	U	<0.0082	J	U	**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-23-10-102920	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0033**	J		<0.005	U		<0.005	U	
		VMP-23-10-012121	1/21/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0031**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-23-5-042715	4/27/2015	<0.0052	U		0.0011	J		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-23-5-072015	7/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-23-5-102615	10/26/2015	<0.0044	U		<0.0044	U		<0.0044	U		**0.006**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-5-012516	1/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		**0.0022**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-23-5-062816	6/28/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		**0.0018**	J	
		VMP-23-5-072216	7/22/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-23-5-101916	10/19/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-23-5-012617	1/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-5-042517	4/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-23-5-072017	7/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0016**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-5-102517	10/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-5-012318	1/23/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-23-5-041618	4/16/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-23-5-071718	7/17/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-23-5-101918	10/19/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-23-5-012319	1/23/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-5-042919	4/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-23-5-072419	7/24/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-23-5-102419	10/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-5-012820	1/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-5-042820	4/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-5-072320	7/23/2020	<0.0051	U		<0.0051	U		<0.0051	U		**0.12**			<0.0059	U		<0.0058	U		<0.0058	U		**0.0074**	J	
		VMP-23-5-102920	10/29/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-23-5-012121	1/21/2021	<0.0052	U		<0.0052	U		<0.0052	U		**0.0021**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
	10 ft	VMP-23-10-012715	1/27/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-10-042715	4/27/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-23-10-072015	7/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0021**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-23-10-102615	10/26/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-23-10-012516	1/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0019**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-062816	6/28/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-23-10-072216	7/22/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-23-10-101916	10/19/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0051**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-23-10-012617	1/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0022**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-10-042517	4/25/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-23-10-072017	7/20/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0056**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-10-102517	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-10-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-10-041618	4/16/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-10-071718	7/17/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-23-10-101918	10/19/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-10-042919	4/29/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-10-072419	7/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-102419	10/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-012820	1/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-23-10-042820	4/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-072320	7/23/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-23-10-102920	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-10-012121	1/21/2021	<0.0051	U		<0.0051	U		<0.0051	U		**0.0067**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	<0.012	U		<0.0067	U		<0.0076	U		<0.012	U		<0.011	U		<0.0063	U		<0.066	U		<0.0054	U	
		VMP-23-5-042715	4/27/2015	<0.0099	U		**0.0024**	J		<0.0065	U		**0.0021**	J		<0.0092	U		**0.009**			<0.056	U	UJ	**0.027**		
		VMP-23-5-072015	7/20/2015	0.014			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.0019**	J		<0.056	U		**0.0059**		
		VMP-23-5-102615	10/26/2015	0.0049	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0018**	J		<0.048	U		**0.0024**	J	
		VMP-23-5-012516	1/25/2016	0.006	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	J	U	**0.0014**	J	
		VMP-23-5-062816	6/28/2016	0.015			<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.068	U		<0.0056	U	
		VMP-23-5-072216	7/22/2016	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-23-5-101916	10/19/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-23-5-012617	1/26/2017	0.0037	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-23-5-042517	4/25/2017	0.0077	J		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-23-5-072017	7/20/2017	0.0078	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0012**	J		<0.051	U		**0.0016**	J	
		VMP-23-5-102517	10/25/2017	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-23-5-012318	1/23/2018	<0.0097	J	U	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-23-5-041618	4/16/2018	0.0037	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-23-5-071718	7/17/2018	0.005	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-23-5-101918	10/19/2018	<0.0081	U		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		**0.011**			<0.046	U		**0.03**		
		VMP-23-5-012319	1/23/2019	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-23-5-042919	4/29/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0052**		
		VMP-23-5-072419	7/24/2019	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0019**	J	
		VMP-23-5-102419	10/24/2019	<0.0088	U	UJ	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-23-5-012820	1/28/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-5-042820	4/28/2020	0.015	J0	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-5-072320	7/23/2020	0.034			**0.001**	J		0.00098	J		<0.0098	U		<0.0089	U		**0.042**			<0.055	U		**0.087**		
		VMP-23-5-102920	10/29/2020	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-23-5-012121	1/21/2021	0.028			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
	10 ft	VMP-23-10-012715	1/27/2015	0.0088	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0014**	J	
		VMP-23-10-042715	4/27/2015	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U	UJ	<0.005	U	
		VMP-23-10-072015	7/20/2015	0.0058	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-23-10-102615	10/26/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-23-10-012516	1/25/2016	0.0076	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-23-10-062816	6/28/2016	0.011	J		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		**0.0019**	J	
		VMP-23-10-072216	7/22/2016	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-23-10-101916	10/19/2016	0.017			**0.0018**	J		0.0016	J		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0028**	J	
		VMP-23-10-012617	1/26/2017	0.005	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0025**	J	
		VMP-23-10-042517	4/25/2017	0.0056	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-23-10-072017	7/20/2017	0.019			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.00071**	J	
		VMP-23-10-102517	10/25/2017	0.038			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-23-10-012318	1/23/2018	0.037			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0017**	J		<0.048	U		<0.0039	U	
		VMP-23-10-041618	4/16/2018	0.009			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-23-10-071718	7/17/2018	0.0068	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-23-10-101918	10/19/2018	0.0044	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-23-10-012319	1/23/2019	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		**0.0059**		
		VMP-23-10-042919	4/29/2019	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-23-10-072419	7/24/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-10-102419	10/24/2019	<0.0093	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-10-012820	1/28/2020	<0.0091	U		**0.0039**	J		<0.0059	U		<0.0092	U		<0.0084	U		**0.0056**			<0.051	U		**0.0058**		
		VMP-23-10-042820	4/28/2020	0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-10-072320	7/23/2020	0.0039	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.00065**	J		<0.058	U		<0.0048	U	
		VMP-23-10-102920	10/29/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-10-012121	1/21/2021	0.01	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	<0.025	U		<0.018	U		<0.0076	U		<0.0063	U		<0.0056	U					**0.0047**	J		<0.0076	U	
		VMP-23-5-042715	4/27/2015	<0.022	U	UJ	0.03			<0.0065	U		<0.0054	J	UJ	<0.0048	U					**0.011**	J	J	<0.0065	U	
		VMP-23-5-072015	7/20/2015	<0.022	U		0.04			<0.0065	U		<0.0054	J	U	<0.0048	U					**0.0086**	J		<0.0065	U	
		VMP-23-5-102615	10/26/2015	<0.018	U		0.0059	J		<0.0055	U		<0.0046	U		<0.004	U					**0.0044**	J		<0.0055	U	
		VMP-23-5-012516	1/25/2016	<0.023	U		0.0018	J		<0.0068	U		<0.0057	J	U	<0.005	U					**0.0031**	J		<0.0068	U	
		VMP-23-5-062816	6/28/2016	**0.0023**	J		<0.019	U		<0.0078	U		**0.0012**	J		<0.0057	U					**0.0033**	J		<0.0078	U	
		VMP-23-5-072216	7/22/2016	<0.024	U		0.0057	J		<0.0073	U		<0.0061	U		<0.021	U					**0.025**			<0.0073	U	
		VMP-23-5-101916	10/19/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U		<0.013	U		<0.013	U		<0.0063	U	
		VMP-23-5-012617	1/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0012**	J		<0.0058	U	
		VMP-23-5-042517	4/25/2017	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-23-5-072017	7/20/2017	<0.02	U		0.0014	J		<0.0059	U		<0.0049	U		<0.017	U					**0.015**			<0.0059	U	
		VMP-23-5-102517	10/25/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-23-5-012318	1/23/2018	<0.021	U		0.0037	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0042**	J		<0.0063	U	
		VMP-23-5-041618	4/16/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-23-5-071718	7/17/2018	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-23-5-101918	10/19/2018	<0.018	U		0.02			<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-23-5-012319	1/23/2019	<0.018	U		0.0042	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-23-5-042919	4/29/2019	<0.02	U		0.017			<0.006	U		<0.005	ND,UJ	UJ	<0.018	U					**0.015**			<0.006	U	
		VMP-23-5-072419	7/24/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-23-5-102419	10/24/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.002**	J		<0.0057	U	
		VMP-23-5-012820	1/28/2020	<0.02	U		<0.014	U		<0.0061	U		**0.0073**			<0.018	U					<0.012	U		<0.0061	U	
		VMP-23-5-042820	4/28/2020	<0.02	U		0.0026	J		<0.0061	U		<0.0051	U		<0.018	U					**0.014**			<0.0061	U	
		VMP-23-5-072320	7/23/2020	**0.0024**	J		0.097			**0.0013**	J		<0.0052	U		<0.018	U					**0.023**			**0.003**	J	
		VMP-23-5-102920	10/29/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0046**	J		<0.0062	U	
		VMP-23-5-012121	1/21/2021	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0079**	J		<0.0065	U	
	10 ft	VMP-23-10-012715	1/27/2015	<0.019	U		0.0076	J		<0.0058	U		<0.0049	U		<0.0043	U					**0.057**			<0.0058	U	
		VMP-23-10-042715	4/27/2015	<0.023	U	UJ	<0.017	U		<0.007	U		<0.0058	U	UJ	<0.0051	U					**0.0031**	J	J	<0.007	U	
		VMP-23-10-072015	7/20/2015	**0.00082**	J		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.013**			<0.0065	U	
		VMP-23-10-102615	10/26/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0033**	J		<0.0065	U	
		VMP-23-10-012516	1/25/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.17**			<0.006	U	
		VMP-23-10-062816	6/28/2016	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.0055	U					**0.0058**	J		<0.0075	U	
		VMP-23-10-072216	7/22/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.035**			<0.0072	U	
		VMP-23-10-101916	10/19/2016	<0.02	U		0.032			**0.00087**	J		<0.005	U		<0.018	U		<0.013	U		**0.082**			<0.006	U	
		VMP-23-10-012617	1/26/2017	<0.018	U		0.035			<0.0055	U		<0.0046	U		<0.016	U					**0.0018**	J		<0.0055	U	
		VMP-23-10-042517	4/25/2017	**0.0015**	J		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U		<0.0063	U	
		VMP-23-10-072017	7/20/2017	<0.019	U		0.0094	J		<0.0058	U		<0.0048	U		<0.017	U					**0.018**			<0.0058	U	
		VMP-23-10-102517	10/25/2017	<0.019	U		0.0034	J		<0.0058	U		<0.0048	U		<0.017	U					**0.011**	J		<0.0058	U	
		VMP-23-10-012318	1/23/2018	<0.018	U		0.0026	J		<0.0055	U		<0.0046	U		<0.016	U					**0.063**			<0.0055	U	
		VMP-23-10-041618	4/16/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-23-10-071718	7/17/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-23-10-101918	10/19/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-23-10-012319	1/23/2019	<0.018	U		0.014			<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-23-10-042919	4/29/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	ND,UJ	UJ	<0.017	U					<0.012	U		<0.0058	U	
		VMP-23-10-072419	7/24/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		**0.0016**	J	
		VMP-23-10-102419	10/24/2019	<0.02	U		0.0052	J		<0.0061	U		<0.005	U		<0.018	U					**0.0032**	J		<0.0061	U	
		VMP-23-10-012820	1/28/2020	<0.02	U		0.0028	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-23-10-042820	4/28/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0046**	J		<0.0061	U	
		VMP-23-10-072320	7/23/2020	<0.022	U		0.0023	J		**0.00078**	J		<0.0056	U		<0.02	U					<0.013	J	U	**0.0019**	J	
		VMP-23-10-102920	10/29/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	J	U	<0.018	U					**0.014**			<0.0061	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.012**			<0.0061	U	
		VMP-23-10-012121	1/21/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0087**	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-23-5-042715	4/27/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.021**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-23-5-072015	7/20/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0021**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-23-5-102615	10/26/2015	<0.0048	U		<0.0077	U		<0.0076	J	U	<0.0033	U		**0.0069**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-23-5-012516	1/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		**0.0038**	J	J	<0.0076	U		<0.0076	U	
		VMP-23-5-062816	6/28/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		**0.00098**	J		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-23-5-072216	7/22/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0009**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-23-5-101916	10/19/2016	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.00062**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-23-5-012617	1/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-23-5-042517	4/25/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-23-5-072017	7/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00052**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-23-5-102517	10/25/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-23-5-012318	1/23/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0012**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-23-5-041618	4/16/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-23-5-071718	7/17/2018	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-23-5-101918	10/19/2018	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		**0.0028**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-23-5-012319	1/23/2019	<0.0048	U		<0.0077	U		**0.005**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-23-5-042919	4/29/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	ND,UJ	UJ	**0.0035**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-5-072419	7/24/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.00096**	J		<0.038	U		**0.0016**	J		<0.0071	U	
		VMP-23-5-102419	10/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-23-5-012820	1/28/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-23-5-042820	4/28/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0015**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-23-5-072320	7/23/2020	<0.0087	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.034**			<0.038	U		<0.007	U		<0.007	U	
		VMP-23-5-102920	10/29/2020	<0.0054	U		<0.0086	U		**0.00098**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-23-5-012121	1/21/2021	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
	10 ft	VMP-23-10-012715	1/27/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0026**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-23-10-042715	4/27/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-23-10-072015	7/20/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-23-10-102615	10/26/2015	<0.0056	U		<0.0091	U		<0.009	J	U	<0.0039	U		**0.00095**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-23-10-012516	1/25/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-23-10-062816	6/28/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.0021**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-23-10-072216	7/22/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-23-10-101916	10/19/2016	**0.00072**	J		<0.0084	U		<0.0083	U		<0.0036	U		**0.01**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-10-012617	1/26/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0021**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-23-10-042517	4/25/2017	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-23-10-072017	7/20/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0033**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-23-10-102517	10/25/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00085**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-23-10-012318	1/23/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.001**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-23-10-041618	4/16/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-23-10-071718	7/17/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-23-10-101918	10/19/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0021**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-23-10-012319	1/23/2019	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-23-10-042919	4/29/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	ND,UJ	UJ	<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-23-10-072419	7/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00078**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-23-10-102419	10/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-23-10-012820	1/28/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.014**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-10-042820	4/28/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-23-10-072320	7/23/2020	<0.0093	U		<0.0093	U		**0.0022**	J		<0.004	U		<0.0051	U		<0.04	J	U	<0.0074	U		<0.0074	U	
		VMP-23-10-102920	10/29/2020	<0.0053	U		<0.0085	U		**0.002**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-23-10-012121	1/21/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-23	5 ft	VMP-23-5-012715	1/27/2015	<0.0083	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0072	U		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-23-5-042715	4/27/2015	**0.0024**	J		0.002	J		<0.0065	U		<0.0065	U		0.026			<0.0034	U		0.0042	J		**0.0016**	J	
		VMP-23-5-072015	7/20/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		0.06			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-23-5-102615	10/26/2015	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0011	J		<0.0029	U		0.0053			**0.0016**	J	
		VMP-23-5-012516	1/25/2016	<0.0074	U		0.0022	J		<0.0068	J	U	<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-23-5-062816	6/28/2016	<0.0085	U		0.0015	J		**0.00083**	J		<0.0078	U		0.013			<0.0041	U		<0.0069	U		<0.0069	U	
		VMP-23-5-072216	7/22/2016	<0.008	U		0.0018	J		<0.0073	U		<0.0073	U		0.024			<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-23-5-101916	10/19/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.00078	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-23-5-012617	1/26/2017	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		0.0017	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-23-5-042517	4/25/2017	<0.0067	U		0.0013	J		<0.0062	U		<0.0062	U		0.00093	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-5-072017	7/20/2017	<0.0064	U		0.00079	J		<0.0059	U		<0.0059	U		0.00074	J		<0.0031	U		0.00065	J		<0.0052	U	
		VMP-23-5-102517	10/25/2017	<0.0064	U		0.001	J		<0.0059	U		<0.0059	U		0.00096	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-23-5-012318	1/23/2018	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.0021	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-23-5-041618	4/16/2018	<0.0061	U		0.0017	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-23-5-071718	7/17/2018	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-23-5-101918	10/19/2018	**0.0014**	J		0.002	J		<0.0052	U		<0.0053	J	U	<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-23-5-012319	1/23/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-23-5-042919	4/29/2019	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-5-072419	7/24/2019	<0.007	U		0.0012	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		0.0013	J		<0.0056	U	
		VMP-23-5-102419	10/24/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-23-5-012820	1/28/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-5-042820	4/28/2020	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-5-072320	7/23/2020	**0.00093**	J		0.0009	J		**0.0013**	J		<0.0063	U		0.0084			<0.0033	U		0.0068			**0.0029**	J	
		VMP-23-5-102920	10/29/2020	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-23-5-012121	1/21/2021	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
	10 ft	VMP-23-10-012715	1/27/2015	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		0.00073	J		<0.0052	U	
		VMP-23-10-042715	4/27/2015	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0011	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-23-10-072015	7/20/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-23-10-102615	10/26/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0059	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-23-10-012516	1/25/2016	<0.0066	U		0.0022	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-10-062816	6/28/2016	<0.0082	U		0.0023	J		<0.0075	U		<0.0075	U		0.00093	J		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-23-10-072216	7/22/2016	<0.0078	U		0.0015	J		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-23-10-101916	10/19/2016	<0.0066	U		0.0016	J		**0.0015**	J		<0.006	U		0.0011	J		<0.0031	U		0.0048	J		**0.0016**	J	
		VMP-23-10-012617	1/26/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0042	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-23-10-042517	4/25/2017	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.001	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-23-10-072017	7/20/2017	<0.0064	U		0.001	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.00064	J		<0.0051	U	
		VMP-23-10-102517	10/25/2017	<0.0063	U		0.001	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-23-10-012318	1/23/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-23-10-041618	4/16/2018	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		0.00052	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-23-10-071718	7/17/2018	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0019	J		<0.0055	U	
		VMP-23-10-101918	10/19/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-10-012319	1/23/2019	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-10-042919	4/29/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-23-10-072419	7/24/2019	<0.0066	U		0.0012	J		**0.00076**	J		<0.0061	U		0.0013	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-10-102419	10/24/2019	<0.0066	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-10-012820	1/28/2020	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0082			<0.0031	U		0.011			**0.0036**	J	
		VMP-23-10-042820	4/28/2020	<0.0067	U		0.0016	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-10-072320	7/23/2020	<0.0073	U		0.0015	J		<0.0067	U		<0.0067	U		0.015			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-23-10-102920	10/29/2020	<0.0066	U		0.0019	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-10-102920-DUP	10/29/2020	<0.0066	U		0.0018	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-10-012121	1/21/2021	<0.0069	U		0.0012	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	**0.012**	J		<0.0039	U		**0.0025**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0026**	J	
		VMP-23-25-042715	4/27/2015	**0.011**	J		<0.0044	U		**0.0057**	J		<0.014	U		<0.054	U		<0.0031	U	UJ	<0.013	U		**0.0014**	J	
		VMP-23-25-072015	7/20/2015	**0.013**	J		<0.0044	U		**0.0087**	J		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0025**	J	
		VMP-23-25-102615	10/26/2015	**0.011**	J		<0.0043	U		**0.0049**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0032**	J	
		VMP-23-25-012516	1/25/2016	**0.015**	J		**0.0014**	J		**0.005**	J		<0.014	U		<0.054	U		<0.0031	U		0.0026	J		<0.016	J	U
		VMP-23-25-062816	6/28/2016	**0.013**	J		<0.0047	U		**0.0043**	J		<0.015	U		<0.057	U		<0.013	U		<0.014	U		<0.017	U	
		VMP-23-25-072216	7/22/2016	**0.02**	J		<0.0047	U		**0.003**	J		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-23-25-101916	10/19/2016	**0.013**	J		<0.0045	U		**0.002**	J		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0041**	J	
		VMP-23-25-012617	1/26/2017	**0.03**			<0.0036	U		**0.0015**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-23-25-042517	4/25/2017	<0.029	J	U	**0.00071**	J		**0.0028**	J		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0035**	J	
		VMP-23-25-072017	7/20/2017	**0.0084**	J		<0.0036	U		**0.0034**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-23-25-102517	10/25/2017	**0.021**	J		<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-25-012318	1/23/2018	**0.015**	J		<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-25-041618	4/16/2018	**0.0072**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-23-25-071718	7/17/2018	**0.0077**	J		<0.0039	U		**0.0024**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-25-101918	10/19/2018	**0.015**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-25-012319	1/23/2019	**0.012**	J		<0.0036	U		**0.0024**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-23-25-042919	4/29/2019	**0.01**	J		<0.0038	U		**0.0054**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-25-072419	7/24/2019	**0.01**	J		<0.0039	U		**0.0041**	J		<0.012	U		<0.047	U	UJ	<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-25-102419	10/24/2019	**0.02**	J		<0.0041	U		**0.001**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0022**	J	
		VMP-23-25-012820	1/28/2020	**0.0044**	J	J	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-25-012820-DUP	1/28/2020	**0.0047**	J	J	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-25-042820	4/28/2020	**0.012**	J		<0.0042	U		**0.0044**	J		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-23-25-042820-DUP	4/28/2020	**0.058**			**0.0046**			**0.0036**	J		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-23-25-072320	7/23/2020	**0.012**	J		**0.0015**	J		**0.01**			<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0025**	J	
		VMP-23-25-102920	10/29/2020	**0.011**	J		<0.0039	U		**0.0035**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-25-012121	1/21/2021	**0.013**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0019**	J	
	40 ft	VMP-23-40-012715	1/27/2015	**0.0064**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-23-40-042715	4/27/2015	**0.0061**	J		<0.0049	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-23-40-072015	7/20/2015	**0.023**	J		**0.035**			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.059			**0.0023**	J	
		VMP-23-40-102615	10/26/2015	**0.01**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0034**	J	
		VMP-23-40-102615-DUP	10/26/2015	**0.0091**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0029**	J	
		VMP-23-40-012516	1/25/2016	**0.01**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0055	J		**0.0032**	J	
		VMP-23-40-072216	7/22/2016	**0.0067**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-23-40-012318	1/23/2018	<0.028	U		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-23-40-041618	4/16/2018	**0.0098**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-40-071718	7/17/2018	**0.087**		J	<0.004	U		**0.0025**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-23-40-071718-DUP	7/17/2018	**0.012**	J	J	**0.00039**	J		**0.0022**	J		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-23-40-101918	10/19/2018	**0.0062**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-40-101918-DUP	10/19/2018	**0.0096**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-40-012319	1/23/2019	**0.011**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-23-40-012319-DUP	1/23/2019	**0.018**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		0.012			**0.0036**	J	
		VMP-23-40-042919	4/29/2019	**0.019**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-23-40-042919-DUP	4/29/2019	**0.025**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.011**			<0.025	U		<0.0063	U	
		VMP-23-25-042715	4/27/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.019**			<0.029	U		<0.0072	ND,UJ	UJ
		VMP-23-25-072015	7/20/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.027**			<0.028	ND,UJ	UJ	<0.0071	U	
		VMP-23-25-102615	10/26/2015	**0.0012**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.018**			<0.028	U		<0.007	U	
		VMP-23-25-012516	1/25/2016	<0.018	J	U	<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		**0.015**			<0.029	U		<0.0073	U	
		VMP-23-25-062816	6/28/2016	<0.018	U		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		**0.011**			<0.03	U		<0.0076	U	
		VMP-23-25-072216	7/22/2016	**0.0052**	J		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		**0.0045**	J		<0.03	U		<0.0076	U	
		VMP-23-25-101916	10/19/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.015**			**0.0048**	J		<0.0073	U	
		VMP-23-25-012617	1/26/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0053**	J		<0.023	U		<0.0058	U	
		VMP-23-25-042517	4/25/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.024**			<0.025	U		<0.0063	U	
		VMP-23-25-072017	7/20/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.024**			<0.024	U		<0.0059	U	
		VMP-23-25-102517	10/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0041**	J		<0.024	U		<0.0061	U	
		VMP-23-25-012318	1/23/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0022**	J		<0.023	U		<0.0057	U	
		VMP-23-25-041618	4/16/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0045**	J		<0.023	U		<0.0058	U	
		VMP-23-25-071718	7/17/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0057**	J		<0.025	U		<0.0063	U	
		VMP-23-25-101918	10/19/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0041**	J		<0.024	U		<0.006	U	
		VMP-23-25-012319	1/23/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.012**			<0.023	U		<0.0058	U	
		VMP-23-25-042919	4/29/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.018**			<0.024	U		<0.0061	U	
		VMP-23-25-072419	7/24/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0078**			<0.025	U		<0.0063	ND,UJ	UJ
		VMP-23-25-102419	10/24/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0029**	J		<0.027	U		<0.0067	U	
		VMP-23-25-012820	1/28/2020	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0042**	J		<0.023	U		<0.0057	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0026**	J		<0.023	U		<0.0057	U	
		VMP-23-25-042820	4/28/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.023**			<0.027	U		<0.0067	U	
		VMP-23-25-042820-DUP	4/28/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.022**			<0.025	U		<0.0062	U	
		VMP-23-25-072320	7/23/2020	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		**0.017**			<0.028	U		<0.0069	U	
		VMP-23-25-102920	10/29/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.008**			<0.026	U		<0.0064	U	
		VMP-23-25-012121	1/21/2021	**0.037**			<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0023**	J		<0.026	U		<0.0066	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0032**	J		<0.028	U		<0.0071	U	
		VMP-23-40-042715	4/27/2015	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0033**	J		<0.031	U		<0.0079	U	
		VMP-23-40-072015	7/20/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0032**	J		**0.0038**	J	J	<0.0068	U	
		VMP-23-40-102615	10/26/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0024**	J		<0.026	U		<0.0065	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0029**	J		<0.027	U		<0.0068	U	
		VMP-23-40-012516	1/25/2016	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0033**	J		<0.024	U		<0.0061	U	
		VMP-23-40-072216	7/22/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0019**	J		<0.028	U		<0.0071	U	
		VMP-23-40-012318	1/23/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0056**	J		<0.024	U		<0.006	U	
		VMP-23-40-041618	4/16/2018	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0014**	J		<0.023	U		<0.0057	U	
		VMP-23-40-071718	7/17/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0062**			<0.026	U		<0.0064	U	
		VMP-23-40-071718-DUP	7/17/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0055**	J		<0.025	U		<0.0063	U	
		VMP-23-40-101918	10/19/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0015**	J		<0.023	U		<0.0057	U	
		VMP-23-40-101918-DUP	10/19/2018	<0.014	J	U	<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		**0.00086**	J		<0.022	U		<0.0056	U	
		VMP-23-40-012319	1/23/2019	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.0015**	J		<0.022	U		<0.0056	U	
		VMP-23-40-012319-DUP	1/23/2019	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-23-40-042919	4/29/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-23-25-042715	4/27/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0027**	J		<0.0056	U		<0.0056	U	
		VMP-23-25-072015	7/20/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0035**	J		<0.0056	U		<0.0056	U	
		VMP-23-25-102615	10/26/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0031**	J		<0.0054	U		<0.0054	U	
		VMP-23-25-012516	1/25/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0036**	J		<0.0057	U		<0.0057	U	
		VMP-23-25-062816	6/28/2016	**0.00089**	J		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0029**	J		<0.006	U		<0.0059	U	
		VMP-23-25-072216	7/22/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0028**	J		<0.006	U		<0.006	U	
		VMP-23-25-101916	10/19/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-23-25-012617	1/26/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-23-25-042517	4/25/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-23-25-072017	7/20/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-23-25-102517	10/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-23-25-012318	1/23/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0033**	J		<0.0044	U		<0.0044	U	
		VMP-23-25-041618	4/16/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0044**	J		<0.0046	U		<0.0046	U	
		VMP-23-25-071718	7/17/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0043**	J		<0.0049	U		<0.0049	U	
		VMP-23-25-101918	10/19/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-23-25-012319	1/23/2019	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-23-25-042919	4/29/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0035**	J		<0.0048	U		<0.0048	U	
		VMP-23-25-072419	7/24/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-23-25-102419	10/24/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-23-25-012820	1/28/2020	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0034**	J		<0.0045	U		<0.0045	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0036**	J		<0.0045	U		<0.0045	U	
		VMP-23-25-042820	4/28/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-23-25-042820-DUP	4/28/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-23-25-072320	7/23/2020	**0.0014**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0022**	J		<0.0054	U		<0.0054	U	
		VMP-23-25-102920	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0033**	J		<0.005	U		<0.005	U	
		VMP-23-25-012121	1/21/2021	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-23-40-042715	4/27/2015	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	J	U	**0.0031**	J		<0.0062	U		<0.0062	U	
		VMP-23-40-072015	7/20/2015	**0.0079**			<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0047**	J		<0.0053	U		<0.0053	U	
		VMP-23-40-102615	10/26/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0036**	J		<0.0051	U		<0.0051	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0031**	J		<0.0053	U		<0.0053	U	
		VMP-23-40-012516	1/25/2016	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0049**	J		<0.0048	U		<0.0048	U	
		VMP-23-40-072216	7/22/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0035**	J		<0.0055	U		<0.0055	U	
		VMP-23-40-012318	1/23/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0035**	J		<0.0047	U		<0.0047	U	
		VMP-23-40-041618	4/16/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0046**	J		<0.0044	U		<0.0044	U	
		VMP-23-40-071718	7/17/2018	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.004**	J		<0.005	U		<0.005	U	
		VMP-23-40-071718-DUP	7/17/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-23-40-101918	10/19/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-23-40-101918-DUP	10/19/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0032**	J		<0.0044	U		<0.0044	U	
		VMP-23-40-012319	1/23/2019	<0.0037	U	UJ	<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0029**	J		<0.0044	U		<0.0044	U	
		VMP-23-40-012319-DUP	1/23/2019	**0.01**		J	<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-23-40-042919	4/29/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0031**	J		<0.0053	U		<0.0053	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0036**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-25-042715	4/27/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-23-25-072015	7/20/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-23-25-102615	10/26/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.0039**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-23-25-012516	1/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0022**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-23-25-062816	6/28/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-23-25-072216	7/22/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-23-25-101916	10/19/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	J	U	<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-23-25-012617	1/26/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-25-042517	4/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-23-25-072017	7/20/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-23-25-102517	10/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-25-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-25-041618	4/16/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-25-071718	7/17/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-23-25-101918	10/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-25-012319	1/23/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-23-25-042919	4/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-25-072419	7/24/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-23-25-102419	10/24/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-23-25-012820	1/28/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-25-042820	4/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-23-25-042820-DUP	4/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-23-25-072320	7/23/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-23-25-102920	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-25-012121	1/21/2021	<0.005	U		<0.005	U		<0.005	U		**0.0038**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-23-40-042715	4/27/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-23-40-072015	7/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		**0.0017**	J	
		VMP-23-40-102615	10/26/2015	<0.005	U		<0.005	U		<0.005	U		**0.0035**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.003**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-23-40-012516	1/25/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-23-40-072216	7/22/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-23-40-012318	1/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-23-40-041618	4/16/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-40-071718	7/17/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-23-40-071718-DUP	7/17/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0036**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-23-40-101918	10/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-40-101918-DUP	10/19/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-23-40-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-23-40-012319-DUP	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-23-40-042919	4/29/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-23-25-042715	4/27/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U	UJ	<0.0049	U	
		VMP-23-25-072015	7/20/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.002**	J	
		VMP-23-25-102615	10/26/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-23-25-012516	1/25/2016	0.0045	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0014**	J	
		VMP-23-25-062816	6/28/2016	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-23-25-072216	7/22/2016	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-23-25-101916	10/19/2016	<0.011	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-23-25-012617	1/26/2017	0.0038	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.001**	J	
		VMP-23-25-042517	4/25/2017	0.0057	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		**0.0012**	J		<0.052	U		<0.0043	U	
		VMP-23-25-072017	7/20/2017	0.0038	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-23-25-102517	10/25/2017	0.013			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-23-25-012318	1/23/2018	<0.0083	J	U	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		**0.00096**	J	
		VMP-23-25-041618	4/16/2018	0.0049	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-23-25-071718	7/17/2018	0.0045	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-23-25-101918	10/19/2018	0.0033	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		**0.001**	J	
		VMP-23-25-012319	1/23/2019	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-23-25-042919	4/29/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-23-25-072419	7/24/2019	0.005	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-23-25-102419	10/24/2019	0.0025	J	J	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-23-25-012820	1/28/2020	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-23-25-042820	4/28/2020	0.016	J0	J	<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-23-25-042820-DUP	4/28/2020	0.011	J0	J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0015**	J		<0.051	U		**0.0014**	J	
		VMP-23-25-072320	7/23/2020	0.0048	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-23-25-102920	10/29/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-25-012121	1/21/2021	0.032			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-23-40-042715	4/27/2015	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	ND,UJ	UJ	<0.0054	U	
		VMP-23-40-072015	7/20/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.0084**			<0.056	U		**0.022**		
		VMP-23-40-102615	10/26/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	J	U	<0.0046	U	
		VMP-23-40-012516	1/25/2016	0.0035	J		**0.0045**	J		0.0071			<0.0091	U		<0.0083	U		**0.0022**	J		<0.05	U		**0.0032**	J	
		VMP-23-40-072216	7/22/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-23-40-012318	1/23/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-23-40-041618	4/16/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-23-40-071718	7/17/2018	0.0032	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-23-40-071718-DUP	7/17/2018	0.0064	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-23-40-101918	10/19/2018	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		**0.0024**	J	
		VMP-23-40-101918-DUP	10/19/2018	<0.0082	U		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		**0.0016**	J		<0.046	U		**0.0049**		
		VMP-23-40-012319	1/23/2019	<0.0081	U		<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-23-40-012319-DUP	1/23/2019	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		**0.004**		
		VMP-23-40-042919	4/29/2019	<0.0098	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0044**	J		<0.006	U	
		VMP-23-25-042715	4/27/2015	<0.023	U	UJ	<0.016	U		<0.0068	U		<0.0057	U	UJ	<0.005	U					**0.0038**	J	J	<0.0068	U	
		VMP-23-25-072015	7/20/2015	<0.023	U		0.002	J		<0.0068	U		<0.0056	J	U	<0.005	U					<0.014	J	U	<0.0068	U	
		VMP-23-25-102615	10/26/2015	**0.0015**	J		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	U		<0.0066	U	
		VMP-23-25-012516	1/25/2016	<0.023	U		0.0014	J		<0.0069	U		<0.0058	J	U	<0.0051	U					**0.0076**	J		<0.0069	U	
		VMP-23-25-062816	6/28/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					<0.014	U		<0.0072	U	
		VMP-23-25-072216	7/22/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.021**			<0.0072	U	
		VMP-23-25-101916	10/19/2016	<0.023	U		0.0069	J		<0.0069	U		<0.0058	U		<0.02	U		<0.015	U		**0.0086**	J		<0.0069	U	
		VMP-23-25-012617	1/26/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0034**	J		<0.0056	U	
		VMP-23-25-042517	4/25/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-23-25-072017	7/20/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-23-25-102517	10/25/2017	<0.019	U		0.0031	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-23-25-012318	1/23/2018	<0.018	U		0.0044	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0042**	J		<0.0054	U	
		VMP-23-25-041618	4/16/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-23-25-071718	7/17/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-23-25-101918	10/19/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-23-25-012319	1/23/2019	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0031**	J		<0.0056	U	
		VMP-23-25-042919	4/29/2019	<0.019	U		0.0056	J		<0.0058	U		<0.0048	ND,UJ	UJ	<0.017	U					<0.012	U		<0.0058	U	
		VMP-23-25-072419	7/24/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0047**	J		<0.0059	U	
		VMP-23-25-102419	10/24/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0024**	J		<0.0063	U	
		VMP-23-25-012820	1/28/2020	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-23-25-042820	4/28/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0037**	J	J	<0.0064	U	
		VMP-23-25-042820-DUP	4/28/2020	<0.02	U		0.0033	J		<0.0059	U		<0.0049	U		<0.017	U					**0.18**		J	<0.0059	U	
		VMP-23-25-072320	7/23/2020	<0.022	U		0.0082	J		**0.017**			<0.0055	U		<0.019	U					<0.013	J	U	**0.052**		
		VMP-23-25-102920	10/29/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0069**	J		<0.0061	U	
		VMP-23-25-012121	1/21/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.029**			<0.0062	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.023	U		0.0026	J		<0.0068	U		<0.0056	U		<0.005	U					<0.014	J	U	<0.0068	U	
		VMP-23-40-042715	4/27/2015	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.0055	U					**0.007**	J		<0.0075	U	
		VMP-23-40-072015	7/20/2015	<0.022	U		0.11			<0.0065	U		<0.0054	J	U	<0.0048	U					<0.013	J	U	<0.0065	U	
		VMP-23-40-102615	10/26/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					**0.0027**	J		<0.0062	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0044**	J		<0.0065	J	U
		VMP-23-40-012516	1/25/2016	<0.019	U		0.0018	J		**0.0067**			<0.0048	U		<0.0043	U					**0.0042**	J		**0.018**		
		VMP-23-40-072216	7/22/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0056**	J		<0.0067	U	
		VMP-23-40-012318	1/23/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0022**	J		<0.0057	U	
		VMP-23-40-041618	4/16/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-23-40-071718	7/17/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.016**			<0.0061	U	
		VMP-23-40-071718-DUP	7/17/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-23-40-101918	10/19/2018	<0.018	U		0.0028	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-23-40-101918-DUP	10/19/2018	<0.018	U		0.0038	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-23-40-012319	1/23/2019	<0.018	U		<0.013	U	UJ	<0.0053	U		<0.0044	U		<0.016	U					<0.01	U		<0.0053	U	
		VMP-23-40-012319-DUP	1/23/2019	<0.018	U		0.11		J	<0.0054	U		<0.0045	U		<0.016	U					**0.0028**	J		<0.0054	U	
		VMP-23-40-042919	4/29/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	ND,UJ	UJ	<0.019	U					**0.015**			<0.0064	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	ND,UJ	UJ	<0.018	U					**0.0082**	J		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-23-25-042715	4/27/2015	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-23-25-072015	7/20/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0019**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-23-25-102615	10/26/2015	<0.0057	U		<0.0092	U		<0.0091	J	U	<0.004	U		**0.001**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-23-25-012516	1/25/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-23-25-062816	6/28/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		**0.00084**	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-23-25-072216	7/22/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0056	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-23-25-101916	10/19/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-23-25-012617	1/26/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-23-25-042517	4/25/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-25-072017	7/20/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-23-25-102517	10/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00065**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-23-25-012318	1/23/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0033**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-23-25-041618	4/16/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-23-25-071718	7/17/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-25-101918	10/19/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	J	U	<0.034	U		<0.0063	U		<0.0063	U	
		VMP-23-25-012319	1/23/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-23-25-042919	4/29/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	ND,UJ	UJ	<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-23-25-072419	7/24/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0012**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-25-102419	10/24/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-23-25-012820	1/28/2020	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-23-25-042820	4/28/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-23-25-042820-DUP	4/28/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0017**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-25-072320	7/23/2020	<0.0091	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-23-25-102920	10/29/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-23-25-012121	1/21/2021	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	J	U	<0.038	U		<0.0069	U		<0.0069	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.0059	U		<0.0095	U		<0.0094	U		**0.018**			<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-23-40-042715	4/27/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	J	U	<0.0083	U		<0.0083	U	
		VMP-23-40-072015	7/20/2015	<0.0056	U		<0.0091	U		**0.0033**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-23-40-102615	10/26/2015	<0.0054	U		<0.0086	U		<0.0085	J	U	<0.0037	U		**0.0014**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.0056	U		<0.0091	U		<0.009	J	U	<0.0039	U		<0.005	J	U	<0.039	J	U	<0.0072	U		<0.0072	U	
		VMP-23-40-012516	1/25/2016	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-23-40-072216	7/22/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-23-40-012318	1/23/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-23-40-041618	4/16/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-23-40-071718	7/17/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-23-40-071718-DUP	7/17/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-23-40-101918	10/19/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-23-40-101918-DUP	10/19/2018	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-23-40-012319	1/23/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-23-40-012319-DUP	1/23/2019	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-23-40-042919	4/29/2019	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	ND,UJ	UJ	<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	ND,UJ	UJ	<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	25 ft	VMP-23-25-012715	1/27/2015	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-25-042715	4/27/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-23-25-072015	7/20/2015	<0.0074	U		<0.0078	J	U	<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-23-25-102615	10/26/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.00058	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-23-25-012516	1/25/2016	<0.0076	U		0.0019	J		<0.0069	U		<0.0069	U		0.0061	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-23-25-062816	6/28/2016	<0.0079	U		0.0018	J		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-23-25-072216	7/22/2016	<0.0079	U		<0.0083	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-23-25-101916	10/19/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0014	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-23-25-012617	1/26/2017	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		0.0032	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-23-25-042517	4/25/2017	<0.0066	U		0.0013	J		<0.006	U		<0.006	U		0.00061	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-25-072017	7/20/2017	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-23-25-102517	10/25/2017	<0.0064	U		0.0011	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-23-25-012318	1/23/2018	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-25-041618	4/16/2018	<0.0061	U		0.0012	J		<0.0056	U		<0.0056	U		0.00053	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-23-25-071718	7/17/2018	<0.0065	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-25-101918	10/19/2018	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-23-25-012319	1/23/2019	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-23-25-042919	4/29/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-23-25-072419	7/24/2019	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0013	J		<0.0052	U	
		VMP-23-25-102419	10/24/2019	<0.0069	U		0.0012	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-23-25-012820	1/28/2020	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-25-012820-DUP	1/28/2020	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-25-042820	4/28/2020	<0.007	U		0.0016	J		<0.0064	U		<0.0064	U		0.001	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-23-25-042820-DUP	4/28/2020	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		0.0058			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-23-25-072320	7/23/2020	<0.0072	U		0.0012	J		**0.0026**	J		<0.0066	U		0.082			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-23-25-102920	10/29/2020	<0.0066	U		0.0022	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-25-012121	1/21/2021	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
	40 ft	VMP-23-40-012715	1/27/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-23-40-042715	4/27/2015	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-23-40-072015	7/20/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		0.17			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-23-40-102615	10/26/2015	<0.0068	U		0.0023	J		<0.0062	U		<0.0062	U		0.0016	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-23-40-102615-DUP	10/26/2015	<0.0071	U		<0.0074	U		<0.0065	J	U	<0.0065	U		0.0016	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-23-40-012516	1/25/2016	<0.0064	U		0.002	J		**0.016**			<0.0058	J	U	0.017			<0.003	U		0.0025	J		<0.0051	U	
		VMP-23-40-072216	7/22/2016	<0.0074	U		0.002	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-23-40-012318	1/23/2018	<0.0063	U		0.0016	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-23-40-041618	4/16/2018	<0.0059	U		0.0016	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-40-071718	7/17/2018	<0.0067	U		0.002	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-23-40-071718-DUP	7/17/2018	<0.0066	U		0.0017	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-23-40-101918	10/19/2018	<0.006	U		0.0013	J		<0.0054	U		<0.0054	U		0.002	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-40-101918-DUP	10/19/2018	<0.0058	U		0.0014	J		<0.0054	U		<0.0054	U		0.0031	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-23-40-012319	1/23/2019	<0.0058	U		0.0017	J		<0.0053	U		<0.0053	U		0.0037	J	J	<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-23-40-012319-DUP	1/23/2019	<0.0059	U		0.0019	J		<0.0054	U		<0.0054	U		0.96		J	<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-23-40-042919	4/29/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-23-40-042919-DUP	4/29/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	**0.0083**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-24-5-042715	4/27/2015	**0.012**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0064**	J	
		VMP-24-5-072115	7/21/2015	**0.03**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.022			**0.009**	J	
		VMP-24-5-102915	10/29/2015	**0.022**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.011	J		**0.0042**	J	
		VMP-24-5-012716	1/27/2016	**0.017**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0043	J		**0.0033**	J	
		VMP-24-5-042916	4/29/2016	**0.021**	J		**0.00073**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.005**	J	
		VMP-24-5-072716	7/27/2016	**0.045**			<0.0048	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.003**	J	
		VMP-24-5-102816	10/28/2016	**0.016**	J		**0.00091**	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0048	J		<0.013	U	
		VMP-24-5-012417	1/24/2017	**0.013**	J		<0.004	J	U	<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0031	J		<0.015	U	
		VMP-24-5-042117	4/21/2017	<0.032	J	U	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-24-5-072117	7/21/2017	**0.14**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.026**		
		VMP-24-5-102517	10/25/2017	**0.012**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-5-012418	1/24/2018	**0.017**	J		**0.00032**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.014			<0.013	U	
		VMP-24-5-042518	4/25/2018	**0.0076**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-24-5-072018	7/20/2018	**0.062**			**0.0027**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0048**	J	
		VMP-24-5-102518	10/25/2018	**0.018**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0037**	J	
		VMP-24-5-012419	1/24/2019	**0.012**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-5-012419-DUP	1/24/2019	**0.0075**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-24-5-042419	4/24/2019	**0.02**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-24-5-102219	10/22/2019	**0.0062**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-24-5-012320	1/23/2020	**0.0074**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-24-5-012320-DUP	1/23/2020	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-24-5-042220	4/22/2020	**0.011**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-24-5-072220	7/22/2020	**0.019**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0022**	J	
		VMP-24-5-102920	10/29/2020	**0.012**	J		**0.0005**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0086	J		**0.0017**	J	
		VMP-24-5-012121	1/21/2021	**0.0098**	J		**0.00036**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
	10 ft	VMP-24-10-020215	2/2/2015	**0.0042**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-24-10-042715	4/27/2015	**0.016**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-24-10-072115	7/21/2015	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0067	J		**0.0052**	J	
		VMP-24-10-102915	10/29/2015	**0.034**			<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0082**	J	
		VMP-24-10-012716	1/27/2016	**0.014**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0038**	J	
		VMP-24-10-042916	4/29/2016	**0.024**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0063**	J	
		VMP-24-10-072716	7/27/2016	**0.03**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.003**	J	
		VMP-24-10-102816	10/28/2016	**0.013**	J		**0.0012**	J		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		0.0094	J		<0.012	U	
		VMP-24-10-012417	1/24/2017	**0.022**	J		<0.0047	J	U	<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-24-10-042117	4/21/2017	<0.027	J	U	**0.0019**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-10-072117	7/21/2017	**0.025**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0038**	J	
		VMP-24-10-102517	10/25/2017	<0.026	J	U	<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-10-012418	1/24/2018	<0.026	J	U	**0.00053**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-10-042518	4/25/2018	**0.027**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0034**	J	
		VMP-24-10-072018	7/20/2018	**0.027**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-10-102518	10/25/2018	**0.018**	J		**0.018**			<0.014	U		<0.021	U		<0.08	U		<0.0046	U		<0.02	U		<0.024	U	
		VMP-24-10-012419	1/24/2019	**0.0057**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-10-042419	4/24/2019	**0.015**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-24-10-102219	10/22/2019	**0.018**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-24-10-012320	1/23/2020	**0.0061**	J		<0.0048	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-24-10-042220	4/22/2020	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-24-10-072220	7/22/2020	**0.013**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0031**	J	
		VMP-24-10-102920	10/29/2020	**0.0089**	J		**0.00035**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0046	J		<0.014	U	
		VMP-24-10-022521	2/25/2021	**0.0064**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0044	J		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-5-042715	4/27/2015	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-24-5-072115	7/21/2015	**0.017**			<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		**0.0032**	J		<0.0068	U	
		VMP-24-5-102915	10/29/2015	**0.034**			<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-24-5-012716	1/27/2016	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-5-042916	4/29/2016	**0.0014**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-24-5-072716	7/27/2016	<0.018	J	U	<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	ND,UJ	UJ	<0.0077	U	
		VMP-24-5-102816	10/28/2016	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0013**	J		<0.022	U		<0.0056	U	
		VMP-24-5-012417	1/24/2017	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-24-5-042117	4/21/2017	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-24-5-072117	7/21/2017	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		**0.0057**	J		<0.0064	U	
		VMP-24-5-102517	10/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-24-5-012418	1/24/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-24-5-042518	4/25/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-5-072018	7/20/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		**0.013**	J		<0.0061	U	
		VMP-24-5-102518	10/25/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-24-5-012419	1/24/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-24-5-042419	4/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-5-102219	10/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-5-012320	1/23/2020	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-24-5-042220	4/22/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-5-072220	7/22/2020	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-24-5-102920	10/29/2020	**0.0078**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.00068**	J		<0.027	U		<0.0067	U	
		VMP-24-5-012121	1/21/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-24-10-042715	4/27/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-24-10-072115	7/21/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-24-10-102915	10/29/2015	**0.0053**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-24-10-012716	1/27/2016	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-10-042916	4/29/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-24-10-072716	7/27/2016	**0.0042**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	ND,UJ	UJ	<0.0072	U	
		VMP-24-10-102816	10/28/2016	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0054	U	
		VMP-24-10-012417	1/24/2017	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-24-10-042117	4/21/2017	**0.0084**	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-24-10-072117	7/21/2017	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-24-10-102517	10/25/2017	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-24-10-012418	1/24/2018	**0.0018**	J		**0.00089**	J		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		**0.00074**	J	
		VMP-24-10-042518	4/25/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		**0.0028**	J		<0.0062	U	
		VMP-24-10-072018	7/20/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-24-10-102518	10/25/2018	<0.026	U		<0.013	U		<0.0095	U		<0.018	U		<0.022	U		<0.01	U		<0.043	U		<0.011	U	
		VMP-24-10-012419	1/24/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-24-10-042419	4/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-10-102219	10/22/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-24-10-012320	1/23/2020	<0.018	U		<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0077	U	
		VMP-24-10-042220	4/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-24-10-072220	7/22/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.00034**	J		<0.026	U		<0.0064	U	
		VMP-24-10-102920	10/29/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-24-10-022521	2/25/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-24-5-042715	4/27/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	J	U	<0.0088	U		**0.002**	J		<0.0059	U		<0.0059	U	
		VMP-24-5-072115	7/21/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	J	U	<0.0053	U		<0.0053	U	
		VMP-24-5-102915	10/29/2015	**0.0018**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-24-5-012716	1/27/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-24-5-042916	4/29/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0028**	J		<0.0054	U		<0.0054	U	
		VMP-24-5-072716	7/27/2016	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0029**	J		<0.006	U		<0.006	U	
		VMP-24-5-102816	10/28/2016	**0.0014**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-24-5-012417	1/24/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-24-5-042117	4/21/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-24-5-072117	7/21/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-24-5-102517	10/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-24-5-012418	1/24/2018	**0.00074**	J		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-24-5-042518	4/25/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-24-5-072018	7/20/2018	**0.0017**	J		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-24-5-102518	10/25/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-24-5-012419	1/24/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-24-5-042419	4/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-24-5-102219	10/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-24-5-012320	1/23/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-24-5-042220	4/22/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-24-5-072220	7/22/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-24-5-102920	10/29/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-24-5-012121	1/21/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0049	U		<0.0049	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-24-10-042715	4/27/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-24-10-072115	7/21/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	J	U	<0.0052	U		<0.0052	U	
		VMP-24-10-102915	10/29/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-24-10-012716	1/27/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0035**	J		<0.0053	U		<0.0053	U	
		VMP-24-10-042916	4/29/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0026**	J		<0.0058	U		<0.0058	U	
		VMP-24-10-072716	7/27/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-24-10-102816	10/28/2016	**0.0019**	J		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0025**	J		<0.0042	U		<0.0042	U	
		VMP-24-10-012417	1/24/2017	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0027**	J		<0.0059	U		<0.0059	U	
		VMP-24-10-042117	4/21/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-24-10-072117	7/21/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-24-10-102517	10/25/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-24-10-012418	1/24/2018	<0.0038	U		**0.001**	J		<0.0066	U		<0.0066	U		<0.0066	U		**0.004**	J		<0.0044	U		<0.0044	U	
		VMP-24-10-042518	4/25/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-24-10-072018	7/20/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-24-10-102518	10/25/2018	**0.015**			<0.016	U		<0.012	U		<0.012	U		<0.012	U		<0.01	U		<0.0084	U		<0.0084	U	
		VMP-24-10-012419	1/24/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-24-10-042419	4/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-24-10-102219	10/22/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-24-10-012320	1/23/2020	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0031**	J		<0.006	U		<0.006	U	
		VMP-24-10-042220	4/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-24-10-072220	7/22/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-24-10-102920	10/29/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-24-10-022521	2/25/2021	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-042715	4/27/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	J	U	<0.021	U	
		VMP-24-5-072115	7/21/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-5-102915	10/29/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0038**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-24-5-012716	1/27/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-042916	4/29/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-5-072716	7/27/2016	<0.0059	U		0.0012	J		<0.0059	U		**0.0022**	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-24-5-102816	10/28/2016	<0.0043	U		<0.0043	U		<0.0043	U		**0.0053**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-24-5-012417	1/24/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-24-5-042117	4/21/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-24-5-072117	7/21/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0037**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-102517	10/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-5-012418	1/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-5-042518	4/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-072018	7/20/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-5-102518	10/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-5-012419	1/24/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-5-042419	4/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-102219	10/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-012320	1/23/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-5-042220	4/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-5-072220	7/22/2020	<0.0049	U		<0.0049	U		<0.0049	U		**0.0078**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-5-102920	10/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-5-012121	1/21/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-24-10-042715	4/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	J	U	<0.02	U	
		VMP-24-10-072115	7/21/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	J	U	<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-10-102915	10/29/2015	<0.005	U		<0.005	U		<0.005	U		**0.0043**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-10-012716	1/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-10-042916	4/29/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-24-10-072716	7/27/2016	<0.0055	U		<0.0055	U		<0.0055	U		**0.0019**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-24-10-102816	10/28/2016	<0.0041	U		<0.0041	U		<0.0041	U		**0.0033**	J		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-24-10-012417	1/24/2017	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-24-10-042117	4/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-24-10-072117	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-24-10-102517	10/25/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-10-012418	1/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-10-042518	4/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-10-072018	7/20/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.003**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-24-10-102518	10/25/2018	<0.0082	U		<0.0082	U		<0.0082	U		<0.072	U		<0.0095	U		<0.0094	U		<0.0094	U		<0.03	U	
		VMP-24-10-012419	1/24/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-24-10-042419	4/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-10-102219	10/22/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-10-012320	1/23/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-24-10-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-24-10-072220	7/22/2020	<0.0049	U		<0.0049	U		<0.0049	U		**0.0019**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-10-102920	10/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-24-10-022521	2/25/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-5-042715	4/27/2015	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	ND,UJ	UJ	<0.0051	U	
		VMP-24-5-072115	7/21/2015	0.029		J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-5-102915	10/29/2015	0.032			<0.0059	U		0.0017	J		<0.01	U		<0.0094	U		**0.0057**			<0.058	U		**0.0051**		
		VMP-24-5-012716	1/27/2016	0.0096			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-5-042916	4/29/2016	0.006	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-24-5-072716	7/27/2016	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-24-5-102816	10/28/2016	0.033			**0.0028**	J		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		**0.0011**	J	
		VMP-24-5-012417	1/24/2017	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-24-5-042117	4/21/2017	<0.01	J	U	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-24-5-072117	7/21/2017	0.019			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-5-102517	10/25/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-24-5-012418	1/24/2018	0.006	J		**0.0011**	J		<0.0056	U		<0.0087	U		<0.0079	U		**0.004**	J		<0.048	U		**0.0047**		
		VMP-24-5-042518	4/25/2018	0.011			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-5-072018	7/20/2018	0.0093			**0.00092**	J		<0.0058	U		<0.009	U		<0.0082	U		**0.0061**			<0.05	U		**0.019**		
		VMP-24-5-102518	10/25/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-24-5-012419	1/24/2019	<0.0082	U		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-24-5-042419	4/24/2019	<0.0093	U		<0.0054	U		0.002	J		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-5-102219	10/22/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.0014**	J	
		VMP-24-5-012320	1/23/2020	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-24-5-042220	4/22/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-5-072220	7/22/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-5-102920	10/29/2020	0.012		J	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.00095**	J		<0.055	U		**0.0026**	J	
		VMP-24-5-012121	1/21/2021	0.79			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-24-10-042715	4/27/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	ND,UJ	UJ	<0.0048	U	
		VMP-24-10-072115	7/21/2015	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-24-10-102915	10/29/2015	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-24-10-012716	1/27/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-10-042916	4/29/2016	0.005	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-24-10-072716	7/27/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-24-10-102816	10/28/2016	0.01			**0.0021**	J		<0.0051	U		<0.0079	U		<0.0072	U		**0.0022**	J		<0.044	U		**0.0015**	J	
		VMP-24-10-012417	1/24/2017	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-24-10-042117	4/21/2017	<0.0087	J	U	<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-24-10-072117	7/21/2017	0.014			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-24-10-102517	10/25/2017	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-24-10-012418	1/24/2018	0.0026	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		**0.0013**	J		<0.047	U		<0.0038	U	
		VMP-24-10-042518	4/25/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-24-10-072018	7/20/2018	0.006	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-24-10-102518	10/25/2018	<0.016	U		**0.021**			0.0076	J		<0.016	U		<0.014	U		**0.047**			<0.088	U		**0.031**		
		VMP-24-10-012419	1/24/2019	<0.0082	U		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-24-10-042419	4/24/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-10-102219	10/22/2019	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-24-10-012320	1/23/2020	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-24-10-042220	4/22/2020	0.0062	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-24-10-072220	7/22/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-24-10-102920	10/29/2020	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.0013**	J	
		VMP-24-10-022521	2/25/2021	0.0072	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.02	U		0.0015	J		<0.0061	U		<0.005	U		<0.0044	U					<0.012	J	U	<0.0061	U	
		VMP-24-5-042715	4/27/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					<0.014	U		<0.0072	U	
		VMP-24-5-072115	7/21/2015	<0.022	U		0.019			<0.0065	U		<0.0054	U		<0.0048	U					**0.018**			<0.0065	U	
		VMP-24-5-102915	10/29/2015	<0.022	U		0.013	J		<0.0066	U		<0.0055	U		<0.0049	U					**0.0068**	J		<0.0066	U	
		VMP-24-5-012716	1/27/2016	**0.0013**	J		0.0027	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.0035**	J		<0.0061	U	
		VMP-24-5-042916	4/29/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0017**	J		<0.0065	U	
		VMP-24-5-072716	7/27/2016	<0.024	U		0.0025	J		<0.0073	U		<0.0061	U		<0.021	U					**0.07**			<0.0073	U	
		VMP-24-5-102816	10/28/2016	<0.018	U		0.023			<0.0053	U		<0.0044	U		<0.016	U		**0.00058**	J	J	**0.11**			<0.0053	U	
		VMP-24-5-012417	1/24/2017	<0.021	U		0.0053	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0024**	J		<0.0062	U	
		VMP-24-5-042117	4/21/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.029**			<0.0066	U	
		VMP-24-5-072117	7/21/2017	<0.02	U		0.004	J		<0.0061	U		<0.0051	U		<0.018	U					**0.028**			**0.0016**	J	
		VMP-24-5-102517	10/25/2017	<0.019	U		0.0019	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-24-5-012418	1/24/2018	<0.018	U		0.011	J		<0.0056	U		<0.0046	U		<0.016	U					**0.004**	J		<0.0056	U	
		VMP-24-5-042518	4/25/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-24-5-072018	7/20/2018	<0.019	U		0.02			<0.0058	U		<0.0048	U		<0.017	U					**0.0044**	J		<0.0058	U	
		VMP-24-5-102518	10/25/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-24-5-012419	1/24/2019	<0.018	U		0.0074	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-24-5-042419	4/24/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	ND,UJ	UJ	<0.018	U					<0.012	U		<0.0061	U	
		VMP-24-5-102219	10/22/2019	<0.02	U		<0.014	U		**0.00091**	J		<0.005	U		<0.018	U					<0.012	U		**0.0023**	J	
		VMP-24-5-012320	1/23/2020	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					**0.023**			<0.0073	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.032**			<0.0063	U	
		VMP-24-5-042220	4/22/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0031**	J		<0.0065	U	
		VMP-24-5-072220	7/22/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	J	U	<0.0061	U	
		VMP-24-5-102920	10/29/2020	<0.021	U		0.007	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0088**	J		<0.0063	U	
		VMP-24-5-012121	1/21/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.021**			<0.0059	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.004	U					<0.011	J	U	<0.0055	U	
		VMP-24-10-042715	4/27/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-24-10-072115	7/21/2015	**0.0013**	J	J	0.0059	J		<0.0063	U		<0.0053	U		<0.0046	U					**0.011**	J		<0.0063	U	
		VMP-24-10-102915	10/29/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0041**	J		<0.0062	U	
		VMP-24-10-012716	1/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0024**	J		<0.0065	U	
		VMP-24-10-042916	4/29/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0052	U					**0.0014**	J		<0.007	U	
		VMP-24-10-072716	7/27/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.0053**	J		<0.0068	U	
		VMP-24-10-102816	10/28/2016	<0.017	U		0.01	J		<0.0051	U		<0.0042	U		<0.015	U		<0.011	U		**0.062**			<0.0051	U	
		VMP-24-10-012417	1/24/2017	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.0031**	J		<0.0072	U	
		VMP-24-10-042117	4/21/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					**0.038**			<0.0057	U	
		VMP-24-10-072117	7/21/2017	<0.02	U		0.0019	J		<0.006	U		<0.005	U		<0.018	U					**0.014**			<0.006	U	
		VMP-24-10-102517	10/25/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-24-10-012418	1/24/2018	<0.018	U		0.003	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-24-10-042518	4/25/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-24-10-072018	7/20/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0026**	J		**0.00062**	J	
		VMP-24-10-102518	10/25/2018	<0.034	U		<0.024	U		**0.0015**	J		<0.0084	U		<0.03	U					<0.02	U		**0.0057**	J	
		VMP-24-10-012419	1/24/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0016**	J		<0.0054	U	
		VMP-24-10-042419	4/24/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	ND,UJ	UJ	<0.018	U					<0.012	U		<0.0061	U	
		VMP-24-10-102219	10/22/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-24-10-012320	1/23/2020	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.021	U					**0.012**	J		**0.0049**	J	
		VMP-24-10-042220	4/22/2020	<0.021	U		0.0054	J		**0.0011**	J		<0.0052	U		<0.018	U					**0.0042**	J		**0.004**	J	
		VMP-24-10-072220	7/22/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-24-10-102920	10/29/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0073**	J		<0.0059	U	
		VMP-24-10-022521	2/25/2021	<0.02	U		0.0045	J		<0.0061	U		<0.005	U		<0.018	U					**0.0046**	J		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-5-042715	4/27/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-24-5-072115	7/21/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0012**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-5-102915	10/29/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-24-5-012716	1/27/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0017**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-24-5-042916	4/29/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00078**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-5-072716	7/27/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.002**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-24-5-102816	10/28/2016	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0053**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-24-5-012417	1/24/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-24-5-042117	4/21/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-24-5-072117	7/21/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-24-5-102517	10/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00054**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-24-5-012418	1/24/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.003**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-24-5-042518	4/25/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-5-072018	7/20/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.01**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-24-5-102518	10/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-24-5-012419	1/24/2019	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-24-5-042419	4/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U	UJ	**0.0029**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-5-102219	10/22/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-5-012320	1/23/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-5-042220	4/22/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-5-072220	7/22/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0008**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-24-5-102920	10/29/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-5-012121	1/21/2021	<0.0051	U		<0.0083	U		**0.0016**	J		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-24-10-042715	4/27/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-24-10-072115	7/21/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-10-102915	10/29/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-24-10-012716	1/27/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-10-042916	4/29/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.00091**	J		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-24-10-072716	7/27/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-24-10-102816	10/28/2016	<0.0044	U		<0.0071	U		**0.0032**	J		<0.003	U		**0.0052**			<0.031	U		<0.0056	U		<0.0056	U	
		VMP-24-10-012417	1/24/2017	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-24-10-042117	4/21/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-24-10-072117	7/21/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-10-102517	10/25/2017	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-24-10-012418	1/24/2018	<0.0047	U		**0.0011**	J		<0.0074	U		<0.0032	U		**0.00051**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-24-10-042518	4/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-24-10-072018	7/20/2018	<0.005	U		<0.0081	U		**0.012**			<0.0035	U		**0.0012**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-24-10-102518	10/25/2018	<0.0088	U		<0.014	U		<0.014	U		<0.0061	U		<0.0078	U		<0.061	U		<0.011	U		<0.011	U	
		VMP-24-10-012419	1/24/2019	<0.0046	U		<0.0075	U		**0.0021**	J		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-24-10-042419	4/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U	UJ	<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-10-102219	10/22/2019	<0.0049	U		<0.0079	U		<0.0078	U		**0.003**	J		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-24-10-012320	1/23/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-24-10-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-24-10-072220	7/22/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-10-102920	10/29/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-10-022521	2/25/2021	<0.0053	U		<0.0085	U		**0.0084**			<0.0036	U		**0.00035**	J		<0.037	U		<0.0067	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-24-5-020215	2/2/2015	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0038	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-5-042715	4/27/2015	<0.0078	U		<0.0082	U		**0.0028**	J		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-24-5-072115	7/21/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.001	J		<0.0057	U	
		VMP-24-5-102915	10/29/2015	<0.0072	U		0.0015	J		**0.0034**	J	J	**0.001**	J	J	<0.0063	U		<0.0034	U		0.0011	J		<0.0059	U	
		VMP-24-5-012716	1/27/2016	<0.0067	U		0.0015	J		<0.0061	U		<0.0061	U		0.0015	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-5-042916	4/29/2016	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		0.0012	J		<0.0034	U		0.00095	J		<0.0058	U	
		VMP-24-5-072716	7/27/2016	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-24-5-102816	10/28/2016	<0.0058	U		0.0012	J		<0.0053	U		<0.0053	U		<0.005	J	U	<0.0028	U		0.008			**0.0021**	J	
		VMP-24-5-012417	1/24/2017	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0009	J		<0.0055	U	
		VMP-24-5-042117	4/21/2017	<0.0072	U		0.0012	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-24-5-072117	7/21/2017	<0.0067	U		0.0013	J		**0.0012**	J		<0.0061	U		0.0047	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-5-102517	10/25/2017	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0026	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-24-5-012418	1/24/2018	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		0.0019	J		<0.0029	U		0.0034	J		**0.001**	J	
		VMP-24-5-042518	4/25/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-5-072018	7/20/2018	<0.0063	U		0.0012	J		<0.0058	U		<0.0058	U		0.015			<0.003	U		0.0023	J		<0.0051	U	
		VMP-24-5-102518	10/25/2018	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-24-5-012419	1/24/2019	<0.0058	U		<0.0061	U		<0.0054	U		<0.0054	U		0.0077			<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-24-5-012419-DUP	1/24/2019	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		0.0026	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-24-5-042419	4/24/2019	**0.003**	J		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0042	J		<0.0054	U	
		VMP-24-5-102219	10/22/2019	<0.0066	U		0.0011	J		**0.00085**	J		<0.0061	U		0.0051	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-5-012320	1/23/2020	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-24-5-012320-DUP	1/23/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-5-042220	4/22/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-24-5-072220	7/22/2020	<0.0067	U		0.0024	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-5-102920	10/29/2020	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-5-012121	1/21/2021	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
	10 ft	VMP-24-10-020215	2/2/2015	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-24-10-042715	4/27/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0012	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-24-10-072115	7/21/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0059	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-10-102915	10/29/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0026	J	J	<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-24-10-012716	1/27/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-24-10-042916	4/29/2016	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-24-10-072716	7/27/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-24-10-102816	10/28/2016	<0.0056	U		0.0011	J		<0.0051	U		<0.0051	U		0.0034	J		<0.0026	U		0.0069			**0.0024**	J	
		VMP-24-10-012417	1/24/2017	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-24-10-042117	4/21/2017	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-24-10-072117	7/21/2017	<0.0066	U		0.0011	J		<0.006	U		<0.006	U		0.0014	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-24-10-102517	10/25/2017	<0.0059	U		0.0011	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-24-10-012418	1/24/2018	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-24-10-042518	4/25/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-24-10-072018	7/20/2018	<0.0063	U		0.0015	J		<0.0058	U		<0.0058	U		0.013			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-24-10-102518	10/25/2018	<0.011	U		<0.012	U		**0.027**			**0.0052**	J		0.028			<0.0053	U		0.024			<0.009	U	
		VMP-24-10-012419	1/24/2019	<0.0058	U		<0.0061	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-24-10-042419	4/24/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-10-102219	10/22/2019	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		0.0037	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-24-10-012320	1/23/2020	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		0.0028	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-24-10-042220	4/22/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.028			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-24-10-072220	7/22/2020	<0.0066	U		0.0019	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-24-10-102920	10/29/2020	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-24-10-022521	2/25/2021	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	**0.0074**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-24-22-042715	4/27/2015	**0.014**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-24-22-072115	7/21/2015	**0.027**	J	J	<0.0042	U	UJ	<0.0088	U	UJ	<0.014	U	UJ	<0.051	U	UJ	<0.0029	U	UJ	<0.012	U	UJ	**0.0052**	J	J
		VMP-24-22-082415	8/24/2015	**0.016**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-24-22-082415-DUP	8/24/2015	**0.016**	J		<0.0049	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-24-22-102915	10/29/2015	**0.021**	J		<0.0046	J	U	<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.0046	J		**0.0053**	J	
		VMP-24-22-012716	1/27/2016	**0.015**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0033	J		**0.0021**	J	
		VMP-24-22-042916	4/29/2016	**0.017**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.0066	J		<0.017	U	
		VMP-24-22-072716	7/27/2016	**0.027**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0059**	J	
		VMP-24-22-102816	10/28/2016	**0.02**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0056**	J	
		VMP-24-22-012417	1/24/2017	**0.016**	J		**0.0015**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.004	J		<0.015	U	
		VMP-24-22-042117	4/21/2017	**0.019**	J		**0.0013**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0033**	J	
		VMP-24-22-072117	7/21/2017	**0.014**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0059**	J	
		VMP-24-22-102517	10/25/2017	**0.011**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-22-013118	1/31/2018	<0.027	J	U	**0.00038**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-24-22-042518	4/25/2018	**0.007**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-24-22-072018	7/20/2018	**0.03**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0046**	J	
		VMP-24-22-102518	10/25/2018	**0.012**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.011			<0.013	U	
		VMP-24-22-012419	1/24/2019	**0.017**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0021**	J	
		VMP-24-22-042419	4/24/2019	**0.023**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-22-102219	10/22/2019	<0.028	U		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-22-012320	1/23/2020	**0.011**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-24-22-042220	4/22/2020	**0.097**		J	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0032**	J	
		VMP-24-22-042220-DUP	4/22/2020	**0.033**		J	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-24-22-072220	7/22/2020	**0.02**	J		**0.00037**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0037	J		**0.0017**	J	
		VMP-24-22-102920	10/29/2020	**0.008**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-22-012121	1/21/2021	**0.0072**	J		**0.00038**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-22-042715	4/27/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-24-22-072115	7/21/2015	<0.016	J	UJ	<0.0083	U	UJ	<0.0061	U	UJ	<0.011	U	UJ	<0.014	U	UJ	<0.0064	U	UJ	<0.027	U	UJ	<0.0068	U	UJ
		VMP-24-22-082415	8/24/2015	<0.018	J	U	<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-24-22-082415-DUP	8/24/2015	**0.0061**	J		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0079	U	
		VMP-24-22-102915	10/29/2015	**0.012**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-24-22-012716	1/27/2016	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-24-22-042916	4/29/2016	**0.0018**	J		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-24-22-072716	7/27/2016	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	ND,UJ	UJ	<0.0075	U	
		VMP-24-22-102816	10/28/2016	**0.0047**	J		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-24-22-012417	1/24/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-24-22-042117	4/21/2017	**0.0018**	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-24-22-072117	7/21/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-24-22-102517	10/25/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-24-22-013118	1/31/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-24-22-042518	4/25/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-24-22-072018	7/20/2018	**0.018**			<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-24-22-102518	10/25/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-24-22-012419	1/24/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-24-22-042419	4/24/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-24-22-102219	10/22/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-24-22-012320	1/23/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-24-22-042220	4/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-24-22-042220-DUP	4/22/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-22-072220	7/22/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0018**	J		<0.024	U		<0.0061	U	
		VMP-24-22-102920	10/29/2020	**0.0037**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-24-22-012121	1/21/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-24-22-042715	4/27/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-24-22-072115	7/21/2015	<0.0045	U	UJ	<0.01	U	UJ	<0.0079	U	UJ	<0.0079	U	UJ	<0.0079	U	UJ	<0.0065	J	UJ	<0.0053	U	UJ	<0.0053	U	UJ
		VMP-24-22-082415	8/24/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-24-22-082415-DUP	8/24/2015	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		<0.0075	U		<0.0062	U		<0.0062	U	
		VMP-24-22-102915	10/29/2015	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0028**	J		<0.0058	U		<0.0058	U	
		VMP-24-22-012716	1/27/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0033**	J		<0.0052	U		<0.0052	U	
		VMP-24-22-042916	4/29/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0025**	J		<0.0059	U		<0.0059	U	
		VMP-24-22-072716	7/27/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0046**	J		<0.0058	U		<0.0058	U	
		VMP-24-22-102816	10/28/2016	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-24-22-012417	1/24/2017	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-24-22-042117	4/21/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0035**	J		<0.0047	U		<0.0047	U	
		VMP-24-22-072117	7/21/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-24-22-102517	10/25/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-24-22-013118	1/31/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0032**	J		<0.0046	U		<0.0046	U	
		VMP-24-22-042518	4/25/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		**0.00085**	J		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-24-22-072018	7/20/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-24-22-102518	10/25/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0024**	J		<0.0045	U		<0.0045	U	
		VMP-24-22-012419	1/24/2019	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-24-22-042419	4/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-24-22-102219	10/22/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-24-22-012320	1/23/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-24-22-042220	4/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-24-22-042220-DUP	4/22/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-24-22-072220	7/22/2020	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-24-22-102920	10/29/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-24-22-012121	1/21/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-22-042715	4/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-24-22-072115	7/21/2015	<0.0052	U	UJ	<0.0052	U	UJ	<0.0052	U	UJ	<0.046	J	UJ	<0.0061	U	UJ	<0.006	U	UJ	<0.006	U	UJ	<0.019	U	UJ
		VMP-24-22-082415	8/24/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-24-22-082415-DUP	8/24/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-24-22-102915	10/29/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0056**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-24-22-012716	1/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-22-042916	4/29/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-24-22-072716	7/27/2016	<0.0057	U		<0.0057	U		<0.0057	U		**0.0025**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-24-22-102816	10/28/2016	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-22-012417	1/24/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-22-042117	4/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0026**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-24-22-072117	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-22-102517	10/25/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0031**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-22-013118	1/31/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-22-042518	4/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-22-072018	7/20/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0031**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-24-22-102518	10/25/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-24-22-012419	1/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-24-22-042419	4/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-22-102219	10/22/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-24-22-012320	1/23/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-24-22-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-24-22-042220-DUP	4/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-22-072220	7/22/2020	<0.0046	U		<0.0046	U		<0.0046	U		**0.004**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-24-22-102920	10/29/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-22-012121	1/21/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-22-042715	4/27/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	ND,UJ	UJ	<0.0048	U	
		VMP-24-22-072115	7/21/2015	<0.0099	U	UJ	<0.0057	U	UJ	<0.0065	U	UJ	<0.01	U	UJ	<0.0092	U	UJ	<0.0054	U	UJ	<0.056	U	UJ	**0.0013**	J	J
		VMP-24-22-082415	8/24/2015	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-24-22-082415-DUP	8/24/2015	<0.011	U		**0.0018**	J		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-24-22-102915	10/29/2015	<0.011	U		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		**0.0022**	J		<0.061	U		<0.0051	U	
		VMP-24-22-012716	1/27/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0015**	J	
		VMP-24-22-042916	4/29/2016	0.012			<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		**0.0017**	J	
		VMP-24-22-072716	7/27/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-24-22-102816	10/28/2016	0.014			<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-24-22-012417	1/24/2017	0.0034	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-24-22-042117	4/21/2017	<0.0087	J	U	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-24-22-072117	7/21/2017	0.013			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-24-22-102517	10/25/2017	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-24-22-013118	1/31/2018	0.0048	J		**0.0017**	J		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-24-22-042518	4/25/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-24-22-072018	7/20/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-24-22-102518	10/25/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0026**	J	
		VMP-24-22-012419	1/24/2019	0.0036	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-24-22-042419	4/24/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-24-22-102219	10/22/2019	0.0093	J0	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-24-22-012320	1/23/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-24-22-042220	4/22/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-24-22-042220-DUP	4/22/2020	0.0088	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-22-072220	7/22/2020	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-24-22-102920	10/29/2020	<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0011**	J	
		VMP-24-22-012121	1/21/2021	<0.022	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.022	U		0.0017	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.005**	J		<0.0065	U	
		VMP-24-22-042715	4/27/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-24-22-072115	7/21/2015	<0.022	U	UJ	<0.016	J	UJ	<0.0065	U	UJ	<0.0054	U	UJ	<0.0048	U	UJ				**0.013**		J	<0.0065	U	UJ
		VMP-24-22-082415	8/24/2015	<0.024	U		0.0036	J		<0.0071	U		<0.0059	U		<0.0052	U					<0.014	U		<0.0071	U	
		VMP-24-22-082415-DUP	8/24/2015	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.0055	U					<0.015	U		**0.0018**	J	
		VMP-24-22-102915	10/29/2015	<0.024	U		0.0038	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.003**	J		<0.0071	U	
		VMP-24-22-012716	1/27/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	J	U	<0.0046	U					**0.0043**	J		<0.0063	U	
		VMP-24-22-042916	4/29/2016	<0.024	U		0.0074	J		<0.0072	U		<0.006	U		<0.0053	U					**0.008**	J		<0.0072	U	
		VMP-24-22-072716	7/27/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.012**	J		<0.0071	U	
		VMP-24-22-102816	10/28/2016	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U		<0.011	U		**0.05**			<0.0054	U	
		VMP-24-22-012417	1/24/2017	<0.021	U		0.0035	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0026**	J		<0.0063	U	
		VMP-24-22-042117	4/21/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.012**			<0.0057	U	
		VMP-24-22-072117	7/21/2017	<0.02	U		0.005	J		<0.0059	U		<0.0049	U		<0.017	U					**0.013**			<0.0059	U	
		VMP-24-22-102517	10/25/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-24-22-013118	1/31/2018	<0.018	U		0.0042	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0046**	J		<0.0056	U	
		VMP-24-22-042518	4/25/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-24-22-072018	7/20/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0044**	J		<0.0057	U	
		VMP-24-22-102518	10/25/2018	<0.018	U		0.0073	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-24-22-012419	1/24/2019	<0.018	U		0.0034	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0028**	J		<0.0056	U	
		VMP-24-22-042419	4/24/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	ND,UJ	UJ	<0.017	U					<0.012	U		<0.0058	U	
		VMP-24-22-102219	10/22/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-24-22-012320	1/23/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.03**			<0.0067	U	
		VMP-24-22-042220	4/22/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.013**			<0.0062	U	
		VMP-24-22-042220-DUP	4/22/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0076**	J		<0.0065	U	
		VMP-24-22-072220	7/22/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-24-22-102920	10/29/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.005**	J		<0.0058	U	
		VMP-24-22-012121	1/21/2021	<0.02	U		0.0028	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0047**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-22-042715	4/27/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-24-22-072115	7/21/2015	<0.0056	U	UJ	<0.0091	U	UJ	<0.009	U	UJ	<0.0039	U	UJ	<0.005	U	UJ	<0.039	U	UJ	<0.0072	U	UJ	<0.0072	U	UJ
		VMP-24-22-082415	8/24/2015	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-24-22-082415-DUP	8/24/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-24-22-102915	10/29/2015	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		**0.0012**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-24-22-012716	1/27/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-22-042916	4/29/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.0018**	J		<0.043	U		<0.008	U		<0.008	U	
		VMP-24-22-072716	7/27/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-24-22-102816	10/28/2016	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	J	U	<0.032	U		<0.006	U		<0.006	U	
		VMP-24-22-012417	1/24/2017	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-22-042117	4/21/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-24-22-072117	7/21/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-24-22-102517	10/25/2017	<0.0047	U		<0.0076	U		<0.0075	U		**0.0043**			**0.00041**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-24-22-013118	1/31/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0013**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-24-22-042518	4/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	J	U	<0.0062	U		<0.0062	U	
		VMP-24-22-072018	7/20/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-24-22-102518	10/25/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-24-22-012419	1/24/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-24-22-042419	4/24/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U	UJ	<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-24-22-102219	10/22/2019	<0.005	U		<0.008	U		**0.0032**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-24-22-012320	1/23/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-24-22-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-24-22-042220-DUP	4/22/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-22-072220	7/22/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0014**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-24-22-102920	10/29/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-24-22-012121	1/21/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-24	22 ft	VMP-24-22-020215	2/2/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-24-22-042715	4/27/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-24-22-072115	7/21/2015	<0.0071	U	UJ	<0.0074	U	UJ	<0.0065	U	UJ	<0.0065	U	UJ	<0.0062	U	UJ	<0.0034	U	UJ	<0.0057	U	UJ	<0.0057	U	UJ
		VMP-24-22-082415	8/24/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-24-22-082415-DUP	8/24/2015	**0.0059**	J		<0.0086	U		**0.0013**	J		<0.0075	U		0.0045	J		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-24-22-102915	10/29/2015	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-24-22-012716	1/27/2016	<0.0069	U		0.0017	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-22-042916	4/29/2016	**0.0024**	J		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0064	U		<0.0064	U	
		VMP-24-22-072716	7/27/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-24-22-102816	10/28/2016	<0.0059	U		0.0011	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		0.0016	J		<0.0048	U	
		VMP-24-22-012417	1/24/2017	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-22-042117	4/21/2017	<0.0062	U		0.0019	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-24-22-072117	7/21/2017	<0.0064	U		0.0013	J		<0.0059	U		<0.0059	U		0.00097	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-24-22-102517	10/25/2017	<0.006	U		0.00098	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-24-22-013118	1/31/2018	<0.0061	U		0.0017	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0044	J		**0.001**	J	
		VMP-24-22-042518	4/25/2018	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-24-22-072018	7/20/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0012	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-24-22-102518	10/25/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-24-22-012419	1/24/2019	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-24-22-042419	4/24/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-24-22-102219	10/22/2019	<0.0063	U		0.0018	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-24-22-012320	1/23/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-24-22-042220	4/22/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-24-22-042220-DUP	4/22/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-24-22-072220	7/22/2020	<0.0063	U		0.0025	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-24-22-102920	10/29/2020	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-24-22-012121	1/21/2021	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0025**	J	
		VMP-24-34-020215-DUP	2/2/2015	**0.0086**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-34-042715	4/27/2015	**0.012**	J		<0.0056	U		<0.012	U		<0.018	U		<0.068	U		<0.0039	U		<0.017	U		**0.0082**	J	
		VMP-24-34-072115	7/21/2015	**0.024**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0057**	J	
		VMP-24-34-072115-DUP	7/21/2015	**0.015**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0031**	J	
		VMP-24-34-102915	10/29/2015	**0.016**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0086**	J	
		VMP-24-34-012716	1/27/2016	**0.1**			<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		0.0059	J		**0.021**		
		VMP-24-34-042916	4/29/2016	**0.03**	J		**0.0013**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0066**	J	
		VMP-24-34-072716	7/27/2016	**0.026**	J		**0.00048**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0032**	J	
		VMP-24-34-072716-DUP	7/27/2016	**0.013**	J		**0.0018**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0021**	J	
		VMP-24-34-102816	10/28/2016	**0.01**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-24-34-102816-Dup	10/28/2016	**0.026**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0098**	J	
		VMP-24-34-012417	1/24/2017	**0.02**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0029**	J	
		VMP-24-34-042117	4/21/2017	**0.026**	J		**0.00091**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.006	J		**0.0059**	J	
		VMP-24-34-042117-DUP	4/21/2017	<0.028	J	U	**0.00092**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0044	J		**0.0046**	J	
		VMP-24-34-072117	7/21/2017	**0.02**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-34-072117-DUP	7/21/2017	**0.018**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.005**	J	
		VMP-24-34-102517	10/25/2017	**0.013**	J		<0.0037	J	U	<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-34-012418	1/24/2018	<0.025	J	U	**0.00038**	J		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		0.0056	J		<0.012	U	
		VMP-24-34-042518	4/25/2018	**0.01**	J		**0.0013**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-24-34-042518-DUP	4/25/2018	**0.0062**	J		**0.001**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-24-34-072018	7/20/2018	**0.07**			<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0087**	J	
		VMP-24-34-072018-DUP	7/20/2018	**0.11**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.007**	J	
		VMP-24-34-102518	10/25/2018	**0.0082**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-24-34-102518-DUP	10/25/2018	**0.013**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-34-012419	1/24/2019	**0.01**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-24-34-042419	4/24/2019	**0.021**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-24-34-102219	10/22/2019	**0.012**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-24-34-012320	1/23/2020	**0.01**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-24-34-042220	4/22/2020	**0.015**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-24-34-072220	7/22/2020	**0.024**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0028**	J	
		VMP-24-34-102920	10/29/2020	**0.015**	J		**0.0008**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0058	J		<0.015	U	
		VMP-24-34-102920-DUP	10/29/2020	**0.009**	J		**0.00033**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-24-34-012121	1/21/2021	**0.014**	J		**0.00038**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0024**	J	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-24-34-042715	4/27/2015	<0.022	U		<0.011	U		<0.0081	U		<0.015	U		<0.018	U		<0.0086	U		<0.036	U		<0.0091	U	
		VMP-24-34-072115	7/21/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-24-34-102915	10/29/2015	**0.0055**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-34-012716	1/27/2016	<0.019	J	U	<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-24-34-042916	4/29/2016	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-34-072716	7/27/2016	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	ND,UJ	UJ	<0.007	U	
		VMP-24-34-072716-DUP	7/27/2016	**0.0063**	J		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	ND,UJ	UJ	<0.0057	U	
		VMP-24-34-102816	10/28/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-24-34-102816-Dup	10/28/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-24-34-012417	1/24/2017	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-24-34-042117	4/21/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-24-34-042117-DUP	4/21/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-24-34-072117	7/21/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-24-34-072117-DUP	7/21/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-24-34-102517	10/25/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-24-34-012418	1/24/2018	**0.004**	J		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-24-34-042518	4/25/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-24-34-042518-DUP	4/25/2018	**0.0067**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-24-34-072018	7/20/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		**0.0044**	J		<0.0062	U	
		VMP-24-34-072018-DUP	7/20/2018	**0.0071**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		**0.0032**	J		<0.0063	U	
		VMP-24-34-102518	10/25/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-24-34-102518-DUP	10/25/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-24-34-012419	1/24/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-24-34-042419	4/24/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-24-34-102219	10/22/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-24-34-012320	1/23/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-24-34-042220	4/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-24-34-072220	7/22/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-24-34-102920	10/29/2020	**0.0024**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-24-34-102920-DUP	10/29/2020	**0.0025**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.00043**	J		<0.027	U		<0.0067	U	
		VMP-24-34-012121	1/21/2021	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-24-34-042715	4/27/2015	<0.006	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0023**	J		<0.0071	U		<0.0071	U	
		VMP-24-34-072115	7/21/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	J	U	<0.0054	U		<0.0054	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	J	U	<0.0058	U		<0.0058	U	
		VMP-24-34-102915	10/29/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-24-34-012716	1/27/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0033**	J		<0.0061	U		<0.0061	U	
		VMP-24-34-042916	4/29/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-24-34-072716	7/27/2016	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0032**	J		<0.0055	U		<0.0055	U	
		VMP-24-34-072716-DUP	7/27/2016	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-24-34-102816	10/28/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0023**	J		<0.0058	U		<0.0058	U	
		VMP-24-34-102816-Dup	10/28/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-24-34-012417	1/24/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-24-34-042117	4/21/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-24-34-042117-DUP	4/21/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-24-34-072117	7/21/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-24-34-072117-DUP	7/21/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0033**	J		<0.0049	U		<0.0049	U	
		VMP-24-34-102517	10/25/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-24-34-012418	1/24/2018	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0039**	J		<0.0043	U		<0.0043	U	
		VMP-24-34-042518	4/25/2018	**0.00089**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-24-34-042518-DUP	4/25/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-24-34-072018	7/20/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0032**	J		<0.0049	U		<0.0049	U	
		VMP-24-34-072018-DUP	7/20/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-24-34-102518	10/25/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-24-34-102518-DUP	10/25/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-24-34-012419	1/24/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-24-34-042419	4/24/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-24-34-102219	10/22/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-24-34-012320	1/23/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-24-34-042220	4/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-24-34-072220	7/22/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0036**	J		<0.0053	U		<0.0053	U	
		VMP-24-34-102920	10/29/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-24-34-012121	1/21/2021	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0072**			<0.0054	U		<0.0054	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-24-34-042715	4/27/2015	<0.007	U		<0.007	U		<0.007	U		<0.061	U		<0.0081	U		<0.008	U		<0.008	U		<0.025	U	
		VMP-24-34-072115	7/21/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	J	U	<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-24-34-102915	10/29/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0049**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-24-34-012716	1/27/2016	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-24-34-042916	4/29/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-24-34-072716	7/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-24-34-072716-DUP	7/27/2016	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-34-102816	10/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-24-34-102816-Dup	10/28/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-24-34-012417	1/24/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-24-34-042117	4/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-24-34-042117-DUP	4/21/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-34-072117	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-34-072117-DUP	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-24-34-102517	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-24-34-012418	1/24/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-24-34-042518	4/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-24-34-042518-DUP	4/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-24-34-072018	7/20/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0048**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-24-34-072018-DUP	7/20/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-24-34-102518	10/25/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-24-34-102518-DUP	10/25/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-34-012419	1/24/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-24-34-042419	4/24/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-24-34-102219	10/22/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-24-34-012320	1/23/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-24-34-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-24-34-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0025**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-24-34-102920	10/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-24-34-012121	1/21/2021	<0.0053	U		<0.0053	U		<0.0053	U		**0.011**	J		<0.0062	U		<0.0061	U		<0.0061	U		**0.011**	J	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.0091	U		<0.0052	U		<0.0059	J	U	<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.0088	U		<0.005	U		<0.0057	J	U	<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0009**	J	
		VMP-24-34-042715	4/27/2015	<0.013	U		<0.0076	U		<0.0086	U		<0.013	U		<0.012	U		<0.0072	U		<0.075	ND,UJ	UJ	<0.0062	U	
		VMP-24-34-072115	7/21/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-24-34-102915	10/29/2015	0.12			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-34-012716	1/27/2016	0.027			<0.0065	U		<0.0074	U		<0.012	U		<0.01	U		**0.0048**	J		<0.064	U		**0.0032**	J	
		VMP-24-34-042916	4/29/2016	0.01			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.00099**	J	
		VMP-24-34-072716	7/27/2016	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.00068**	J		<0.058	U		**0.0011**	J	
		VMP-24-34-072716-DUP	7/27/2016	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		**0.0011**	J	
		VMP-24-34-102816	10/28/2016	<0.011	J	U	**0.0016**	J		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.0021**	J	
		VMP-24-34-102816-Dup	10/28/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0018**	J	
		VMP-24-34-012417	1/24/2017	0.0033	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-24-34-042117	4/21/2017	<0.0087	J	U	<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		**0.0051**			<0.049	U		**0.008**		
		VMP-24-34-042117-DUP	4/21/2017	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0042**	J		<0.05	U		**0.0062**		
		VMP-24-34-072117	7/21/2017	0.0084	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-24-34-072117-DUP	7/21/2017	0.011			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-24-34-102517	10/25/2017	0.016			<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-24-34-012418	1/24/2018	0.003	J		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		**0.0028**	J		<0.045	U		**0.0031**	J	
		VMP-24-34-042518	4/25/2018	0.0062	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0076**			<0.053	U		**0.016**		
		VMP-24-34-042518-DUP	4/25/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.005**			<0.051	U		**0.0087**		
		VMP-24-34-072018	7/20/2018	0.02			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-24-34-072018-DUP	7/20/2018	0.0084	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-24-34-102518	10/25/2018	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0011**	J	
		VMP-24-34-102518-DUP	10/25/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-24-34-012419	1/24/2019	<0.008	U		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-24-34-042419	4/24/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-24-34-102219	10/22/2019	0.0082	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-24-34-012320	1/23/2020	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-24-34-042220	4/22/2020	0.0086	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-24-34-072220	7/22/2020	0.0064	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-24-34-102920	10/29/2020	0.017		J	**0.00073**	J		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0018**	J	
		VMP-24-34-102920-DUP	10/29/2020	<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.00071**	J		<0.055	U		<0.0045	U	
		VMP-24-34-012121	1/21/2021	<0.025	U		<0.0058	U		<0.0066	U		**0.002**	J		<0.0094	U		**0.00072**	J		<0.057	U		**0.0016**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.0044	U					**0.0053**	J		<0.0059	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.019	U		0.0014	J		<0.0057	U		<0.0048	U		<0.0042	U					**0.0061**	J		<0.0057	U	
		VMP-24-34-042715	4/27/2015	<0.029	U		<0.021	U		<0.0086	U		<0.0072	U		<0.0063	U					<0.017	U		<0.0086	U	
		VMP-24-34-072115	7/21/2015	**0.0022**	J	J	<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.012**	J		<0.0066	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.0094**	J		<0.0071	U	
		VMP-24-34-102915	10/29/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.0047	U					**0.024**			<0.0064	U	
		VMP-24-34-012716	1/27/2016	**0.0048**	J		<0.018	U		<0.0074	U		**0.0036**	J		<0.0054	U					**0.016**			<0.0074	U	
		VMP-24-34-042916	4/29/2016	<0.022	U		0.0053	J		<0.0065	U		<0.0054	U		<0.0047	U					**0.0058**	J		<0.0065	U	
		VMP-24-34-072716	7/27/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0026**	J		<0.0067	U	
		VMP-24-34-072716-DUP	7/27/2016	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.013**			<0.0054	U	
		VMP-24-34-102816	10/28/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U		<0.015	U		**0.016**			<0.0071	U	
		VMP-24-34-102816-Dup	10/28/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U		<0.014	U		**0.0072**	J		<0.0068	U	
		VMP-24-34-012417	1/24/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0026**	J		<0.0064	U	
		VMP-24-34-042117	4/21/2017	<0.019	U		0.0062	J		<0.0057	U		<0.0047	U		<0.017	U					**0.032**			<0.0057	U	
		VMP-24-34-042117-DUP	4/21/2017	<0.019	U		0.005	J		<0.0058	U		<0.0048	U		<0.017	U					**0.024**			<0.0058	U	
		VMP-24-34-072117	7/21/2017	<0.02	U		0.0033	J		<0.0059	U		<0.0049	U		<0.017	U					**0.011**	J		<0.0059	U	
		VMP-24-34-072117-DUP	7/21/2017	<0.02	U		0.0026	J		<0.006	U		<0.005	U		<0.018	U					**0.014**			<0.006	U	
		VMP-24-34-102517	10/25/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-24-34-012418	1/24/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.0032**	J		<0.0052	U	
		VMP-24-34-042518	4/25/2018	<0.02	U		0.0071	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-24-34-042518-DUP	4/25/2018	<0.019	U		0.006	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-24-34-072018	7/20/2018	<0.02	U		0.0092	J		<0.0059	U		<0.0049	U		<0.017	U					**0.012**			<0.0059	U	
		VMP-24-34-072018-DUP	7/20/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.011**	J		<0.006	U	
		VMP-24-34-102518	10/25/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-24-34-102518-DUP	10/25/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-24-34-012419	1/24/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-24-34-042419	4/24/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	ND,UJ	UJ	<0.017	U					**0.014**			<0.0059	U	
		VMP-24-34-102219	10/22/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0016**	J		<0.0054	U	
		VMP-24-34-012320	1/23/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.013**	J		<0.0069	U	
		VMP-24-34-042220	4/22/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0077**	J		<0.0062	U	
		VMP-24-34-072220	7/22/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	J	U	<0.0064	U	
		VMP-24-34-102920	10/29/2020	<0.021	U		0.0041	J		<0.0063	U		<0.0053	U		<0.019	U					**0.027**			<0.0063	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.021	U		0.003	J		<0.0063	U		<0.0053	U		<0.019	U					**0.012**	J		<0.0063	U	
		VMP-24-34-012121	1/21/2021	<0.022	U		0.0033	J		<0.0066	U		<0.0055	U		<0.019	U					**0.0082**	J		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0015**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0018**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-24-34-042715	4/27/2015	<0.0075	U		<0.012	U		<0.012	U		<0.0052	U		<0.0066	U		<0.052	U		<0.0096	U		<0.0096	U	
		VMP-24-34-072115	7/21/2015	<0.0057	U		<0.0092	U		**0.0015**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-24-34-102915	10/29/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0023**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-24-34-012716	1/27/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-24-34-042916	4/29/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0011**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-24-34-072716	7/27/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.00096**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-24-34-072716-DUP	7/27/2016	<0.0047	U		<0.0076	U		**0.0035**	J		<0.0033	U		**0.00098**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-24-34-102816	10/28/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	J	U	<0.043	U		<0.0079	U		<0.0079	U	
		VMP-24-34-102816-Dup	10/28/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	J	U	<0.041	U		<0.0075	U		<0.0075	U	
		VMP-24-34-012417	1/24/2017	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00049**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-24-34-042117	4/21/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-24-34-042117-DUP	4/21/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-24-34-072117	7/21/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-24-34-072117-DUP	7/21/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00086**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-34-102517	10/25/2017	<0.0049	U		<0.0079	U		<0.0078	U		**0.0021**	J		**0.00085**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-24-34-012418	1/24/2018	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-24-34-042518	4/25/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0011**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-24-34-042518-DUP	4/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-24-34-072018	7/20/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.012**		J	<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-34-072018-DUP	7/20/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.002**	J	J	<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-34-102518	10/25/2018	<0.0047	U		<0.0076	U		**0.0011**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-24-34-102518-DUP	10/25/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-24-34-012419	1/24/2019	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-24-34-042419	4/24/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U	UJ	<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-24-34-102219	10/22/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-24-34-012320	1/23/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-24-34-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-24-34-072220	7/22/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-24-34-102920	10/29/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.00048**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-24-34-012121	1/21/2021	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	34 ft	VMP-24-34-020215	2/2/2015	<0.0065	U		<0.0068	U		<0.0059	J	U	<0.0059	U		<0.0056	U		<0.0031	U		0.0017	J		<0.0052	U	
		VMP-24-34-020215-DUP	2/2/2015	<0.0063	U		<0.0065	U		<0.0057	J	U	<0.0057	U		0.00073	J		<0.003	U		0.0021	J		<0.005	U	
		VMP-24-34-042715	4/27/2015	<0.0094	U		<0.0099	U		<0.0086	U		<0.0086	U		<0.0082	U		<0.0045	U		<0.0076	U		<0.0076	U	
		VMP-24-34-072115	7/21/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0006	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-24-34-072115-DUP	7/21/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-24-34-102915	10/29/2015	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-24-34-012716	1/27/2016	<0.0081	U		0.0018	J		<0.0074	U		<0.0074	U		0.0026	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-24-34-042916	4/29/2016	<0.0071	U		0.0012	J		<0.0065	U		<0.0065	U		0.0068			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-24-34-072716	7/27/2016	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.00082	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-24-34-072716-DUP	7/27/2016	<0.006	U		0.0012	J		<0.0054	U		<0.0054	U		0.0013	J		<0.0028	U		0.00087	J		<0.0048	U	
		VMP-24-34-102816	10/28/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0021	J		<0.0037	U		0.0046	J		<0.0063	U	
		VMP-24-34-102816-Dup	10/28/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.002	J		<0.0035	U		0.0039	J		<0.006	U	
		VMP-24-34-012417	1/24/2017	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.00088	J		<0.0057	U	
		VMP-24-34-042117	4/21/2017	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		0.0054			<0.003	U		<0.005	U		<0.005	U	
		VMP-24-34-042117-DUP	4/21/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0047	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-24-34-072117	7/21/2017	<0.0064	U		0.0016	J		<0.0059	U		<0.0059	U		0.002	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-24-34-072117-DUP	7/21/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.0023	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-24-34-102517	10/25/2017	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-24-34-012418	1/24/2018	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-24-34-042518	4/25/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.011			<0.0032	U		0.0012	J		<0.0054	U	
		VMP-24-34-042518-DUP	4/25/2018	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		0.0071			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-24-34-072018	7/20/2018	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.001	J		<0.0052	U	
		VMP-24-34-072018-DUP	7/20/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-24-34-102518	10/25/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-24-34-102518-DUP	10/25/2018	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		0.00085	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-24-34-012419	1/24/2019	<0.0057	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-24-34-042419	4/24/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-24-34-102219	10/22/2019	<0.0059	U		0.001	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-24-34-012320	1/23/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-24-34-042220	4/22/2020	<0.0068	U		0.0014	J		**0.0097**			**0.0025**	J		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-24-34-072220	7/22/2020	<0.007	U		0.0018	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-34-102920	10/29/2020	<0.0069	U		0.0017	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.00072	J		<0.0056	U	
		VMP-24-34-102920-DUP	10/29/2020	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-24-34-012121	1/21/2021	<0.0072	U		0.0018	J		<0.0066	U		<0.0066	U		0.001	J		<0.0034	U		<0.0058	U		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	0.015	J		0.15			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.029		
		VMP-29-10-050615	5/6/2015	0.1			0.011			<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.37		
		VMP-29-10-072715	7/27/2015	0.094			0.007			<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.013			0.29		
		VMP-29-10-103015	10/30/2015	0.043			0.0049			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.059			0.052		
		VMP-29-10-012716	1/27/2016	0.044			0.04			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0051	J		0.019		
		VMP-29-10-050216	5/2/2016	0.094			0.003	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0057	J		0.11		
		VMP-29-10-072816	7/28/2016	0.17			0.029			<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.98		
		VMP-29-10-120916	12/9/2016	0.015	J		0.0054			<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0077	J		0.026		
		VMP-29-10-013117	1/31/2017	0.0081	J		0.0037	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.015			0.0087	J	
		VMP-29-10-050217	5/2/2017	0.033			0.0014	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.027		
		VMP-29-10-072717	7/27/2017	0.048	J		<0.0076	U		<0.016	U		<0.024	U		<0.092	U		<0.0052	U		<0.022	U		0.17		
		VMP-29-10-102717	10/27/2017	0.01	J		0.00095	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0068	J	
		VMP-29-10-012518	1/25/2018	0.015	J		0.0088			<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.018		
		VMP-29-10-041718	4/17/2018	0.03			0.0019	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0076	J	
		VMP-29-10-072418	7/24/2018	0.021	J		0.0014	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.026		
		VMP-29-10-102618	10/26/2018	0.013	J		0.0025	J		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.0077	J		0.0042	J	
		VMP-29-10-050219	5/2/2019	0.034			0.0013	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0036	J		0.0068	J	
		VMP-29-10-073119	7/31/2019	0.024	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-29-10-102519	10/25/2019	0.0081	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-29-10-012420	1/24/2020	<0.032	U		0.0051			<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-29-10-042320	4/23/2020	0.013	J	J	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-29-10-072720	7/27/2020	0.11			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.39		
		VMP-29-10-110220	11/2/2020	0.017	J		0.00048	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.023			0.002	J	
		VMP-29-10-012721	1/27/2021	0.007	J		0.00055	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0089	J		0.0016	J	
	18 ft	VMP-29-20-020515	2/5/2015	0.16			0.11			<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.45		
		VMP-29-20-050615	5/6/2015	0.21			0.013			<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.76		
		VMP-29-20-072715	7/27/2015	0.13			0.0052	J		<0.012	U		<0.018	U		<0.069	U		<0.0039	U		0.0079	J		0.59		
		VMP-29-20-103015	10/30/2015	0.035			0.0077			<0.0089	U		<0.014	U		<0.052	U		<0.003	U		0.018			0.085		
		VMP-29-20-020416-R	2/4/2016	0.16			0.16			<0.01	U		<0.016	U		<0.06	U		<0.0034	U		0.0049	J		0.39		
		VMP-29-20-050216	5/2/2016	0.37			0.014			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0054	J		1.2		
		VMP-29-20-072816	7/28/2016	0.71			0.053			<0.019	U		<0.029	U		<0.11	U		<0.0062	U		<0.027	U		3.3		
		VMP-29-18-110316	11/3/2016	0.81			0.025			<0.018	U		<0.027	U		<0.1	U		<0.0058	U		<0.025	U		2.8		
		VMP-29-18-013117	1/31/2017	0.023	J		0.0042			<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.009	J		0.035		
		VMP-29-18-050217	5/2/2017	0.044			0.005			<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		0.12		
		VMP-29-18-072717	7/27/2017	0.48			0.0098			<0.017	U		<0.026	U		<0.096	U		<0.0055	U		0.011	J		2		
		VMP-29-18-102717	10/27/2017	0.032			0.00091	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.088		
		VMP-29-18-012518	1/25/2018	0.1			0.044			<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0065	J		0.28		
		VMP-29-18-041718	4/17/2018	0.026			0.0016	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.058		
		VMP-29-18-072418	7/24/2018	0.38			0.0019	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		1.8		
		VMP-29-18-102618	10/26/2018	0.16			0.011			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0086	J		0.5		
		VMP-29-18-012519	1/25/2019	0.043			0.0048			<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		0.01			0.063		
		VMP-29-18-050219	5/2/2019	0.12			0.0047			<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.27		
		VMP-29-18-073119	7/31/2019	0.32			0.0037	J		<0.014	U		<0.022	U		<0.082	U		<0.0047	U		<0.02	U		1.3		
		VMP-29-18-102519	10/25/2019	0.3			0.0012	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.51		
		VMP-29-18-012420	1/24/2020	0.061			<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		0.1		
		VMP-29-18-042320	4/23/2020	0.038		J	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.093		
		VMP-29-18-072720	7/27/2020	0.33			0.007			<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		1		
		VMP-29-18-110220	11/2/2020	0.1			0.00088	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.016			0.17		
		VMP-29-18-012721	1/27/2021	0.037			0.00086	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0088	J		0.072		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	0.0044	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-29-10-050615	5/6/2015	0.012	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		0.0022	J	J	<0.0074	U	
		VMP-29-10-072715	7/27/2015	0.017			<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-29-10-103015	10/30/2015	0.0069	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-29-10-012716	1/27/2016	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-29-10-050216	5/2/2016	0.01	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-29-10-072816	7/28/2016	0.058			<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-29-10-120916	12/9/2016	0.0087	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-29-10-013117	1/31/2017	0.0027	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-29-10-050217	5/2/2017	0.0066	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-29-10-072717	7/27/2017	0.018	J		<0.015	U		<0.011	U		<0.02	U		<0.025	U		<0.012	U		<0.049	U		<0.012	U	
		VMP-29-10-102717	10/27/2017	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-29-10-012518	1/25/2018	0.0036	J		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-29-10-041718	4/17/2018	0.0046	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-29-10-072418	7/24/2018	0.0056	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-29-10-102618	10/26/2018	0.0052	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-29-10-050219	5/2/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-29-10-073119	7/31/2019	0.036			<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		0.0017	J		<0.025	U		<0.0063	U	
		VMP-29-10-102519	10/25/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-29-10-012420	1/24/2020	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-29-10-042320	4/23/2020	0.0026	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-29-10-072720	7/27/2020	0.023			<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.00083	J		<0.025	U		<0.0063	U	
		VMP-29-10-110220	11/2/2020	<0.015	U		<0.0076	U		0.0022	J		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-29-10-012721	1/27/2021	0.0015	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
	18 ft	VMP-29-20-020515	2/5/2015	0.0071	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-29-20-050615	5/6/2015	0.011	J		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-29-20-072715	7/27/2015	0.0096	J		<0.011	U		<0.0082	U		<0.015	U		<0.019	U		<0.0087	U		<0.037	U		<0.0092	U	
		VMP-29-20-103015	10/30/2015	<0.017	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-29-20-020416-R	2/4/2016	0.0095	J		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-29-20-050216	5/2/2016	0.022			<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		0.0048	J		<0.0068	U	
		VMP-29-20-072816	7/28/2016	0.081			<0.018	U		<0.013	U		<0.024	U		<0.03	U		<0.014	U		<0.058	U		<0.014	U	
		VMP-29-18-110316	11/3/2016	0.086			<0.016	U		<0.012	U		<0.022	U		<0.028	U		<0.013	U		<0.054	U		<0.014	U	
		VMP-29-18-013117	1/31/2017	0.0025	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-29-18-050217	5/2/2017	0.0047	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-29-18-072717	7/27/2017	0.046			<0.016	U		<0.011	U		<0.021	U		<0.026	U		<0.012	U		<0.051	U		<0.013	U	
		VMP-29-18-102717	10/27/2017	0.0044	J		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-29-18-012518	1/25/2018	0.016			<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-29-18-041718	4/17/2018	0.0042	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		0.0033	J		<0.0058	U	
		VMP-29-18-072418	7/24/2018	0.032			<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-29-18-102618	10/26/2018	0.013	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-29-18-012519	1/25/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		<0.0052	U		0.0023	J		<0.0055	U	
		VMP-29-18-050219	5/2/2019	0.0055	J		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-29-18-073119	7/31/2019	0.032			<0.013	U		<0.0097	U		<0.018	U		<0.022	U		<0.01	U		<0.044	U		<0.011	U	
		VMP-29-18-102519	10/25/2019	0.02			<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-29-18-012420	1/24/2020	0.0038	J		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-29-18-042320	4/23/2020	0.0033	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-29-18-072720	7/27/2020	0.027			<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.00074	J		<0.026	U		<0.0065	U	
		VMP-29-18-110220	11/2/2020	0.0049	J		<0.0074	U		0.00051	J		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-29-18-012721	1/27/2021	0.0025	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0029	J		<0.0053	U		<0.0053	U	
		VMP-29-10-050615	5/6/2015	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0035	J		<0.0058	U		<0.0058	U	
		VMP-29-10-072715	7/27/2015	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0022	J		<0.0055	U		<0.0055	U	
		VMP-29-10-103015	10/30/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0053	J		<0.0053	U		<0.0053	U	
		VMP-29-10-012716	1/27/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0037	J		<0.0052	U		<0.0052	U	
		VMP-29-10-050216	5/2/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.003	J		<0.0055	U		<0.0055	U	
		VMP-29-10-072816	7/28/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0016	J		<0.0058	U		<0.0058	U	
		VMP-29-10-120916	12/9/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-29-10-013117	1/31/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0021	J		<0.0048	U		<0.0048	U	
		VMP-29-10-050217	5/2/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-29-10-072717	7/27/2017	<0.0081	U		<0.018	U		<0.014	U		<0.014	U		<0.014	U		0.0032	J		<0.0096	U		<0.0096	U	
		VMP-29-10-102717	10/27/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0027	J		<0.0046	U		<0.0046	U	
		VMP-29-10-012518	1/25/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0031	J		<0.005	U		<0.005	U	
		VMP-29-10-041718	4/17/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0032	J		<0.0047	U		<0.0047	U	
		VMP-29-10-072418	7/24/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0029	J		<0.0046	U		<0.0046	U	
		VMP-29-10-102618	10/26/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0024	J		<0.0047	U		<0.0047	U	
		VMP-29-10-050219	5/2/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-29-10-073119	7/31/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-29-10-102519	10/25/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0018	J		<0.0053	U		<0.0053	U	
		VMP-29-10-012420	1/24/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-29-10-042320	4/23/2020	<0.004	U		<0.009	U		0.0019	J		<0.007	J	U	0.0022	J		0.0027	J		<0.0047	U		<0.0047	U	
		VMP-29-10-072720	7/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-29-10-110220	11/2/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U	
		VMP-29-10-012721	1/27/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0031	J		<0.0049	U		<0.0049	U	
	18 ft	VMP-29-20-020515	2/5/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0027	J		<0.0054	U		<0.0054	U	
		VMP-29-20-050615	5/6/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0026	J		<0.0059	U		<0.0059	U	
		VMP-29-20-072715	7/27/2015	<0.0061	U		<0.014	U		<0.011	U		<0.011	U		<0.011	U		0.0027	J		<0.0072	U		<0.0072	U	
		VMP-29-20-103015	10/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0038	J		<0.0054	U		<0.0054	U	
		VMP-29-20-020416-R	2/4/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	U		<0.0063	U		<0.0063	U	
		VMP-29-20-050216	5/2/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-29-20-072816	7/28/2016	<0.0097	U		<0.022	U		<0.017	U		<0.017	U		<0.017	U		<0.014	U		<0.011	U		<0.011	U	
		VMP-29-18-110316	11/3/2016	<0.009	U		<0.02	U		<0.016	U		<0.016	U		<0.016	U		<0.013	U		<0.011	U		<0.011	U	
		VMP-29-18-013117	1/31/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0021	J		<0.0048	U		<0.0048	U	
		VMP-29-18-050217	5/2/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-29-18-072717	7/27/2017	<0.0085	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		<0.012	U		<0.01	U		<0.01	U	
		VMP-29-18-102717	10/27/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0026	J		<0.0046	U		<0.0046	U	
		VMP-29-18-012518	1/25/2018	0.0011	J		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.003	J		<0.0048	U		<0.0048	U	
		VMP-29-18-041718	4/17/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0032	J		<0.0045	U		<0.0045	U	
		VMP-29-18-072418	7/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-29-18-102618	10/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0021	J		<0.0047	U		<0.0047	U	
		VMP-29-18-012519	1/25/2019	0.0018	J		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0027	J		<0.0043	U		<0.0043	U	
		VMP-29-18-050219	5/2/2019	0.0013	J		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0027	J		<0.0052	U		<0.0052	U	
		VMP-29-18-073119	7/31/2019	<0.0073	U		<0.016	U		<0.013	U		<0.013	U		<0.013	U		<0.01	U		<0.0085	U		<0.0085	U	
		VMP-29-18-102519	10/25/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0022	J		<0.0053	U		<0.0053	U	
		VMP-29-18-012420	1/24/2020	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		<0.0075	U		<0.0061	U		<0.0061	U	
		VMP-29-18-042320	4/23/2020	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0023	J		<0.0045	U		<0.0045	U	
		VMP-29-18-072720	7/27/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0024	J		<0.0051	U		<0.0051	U	
		VMP-29-18-110220	11/2/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0027	J		<0.0048	U		<0.0048	U	
		VMP-29-18-012721	1/27/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-29-10-050615	5/6/2015	<0.0057	U		<0.0057	U		<0.0057	U		0.0028	J	J	<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-29-10-072715	7/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		0.0029	J		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-29-10-103015	10/30/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-29-10-012716	1/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-29-10-050216	5/2/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-29-10-072816	7/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-29-10-120916	12/9/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-29-10-013117	1/31/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-10-050217	5/2/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-29-10-072717	7/27/2017	<0.0094	U		<0.0094	U		<0.0094	U		<0.082	U		<0.011	U		<0.011	U		<0.011	U		<0.034	U	
		VMP-29-10-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-29-10-012518	1/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-29-10-041718	4/17/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-29-10-072418	7/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-29-10-102618	10/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-29-10-050219	5/2/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-29-10-073119	7/31/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-29-10-102519	10/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-29-10-012420	1/24/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-29-10-042320	4/23/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-29-10-072720	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-29-10-110220	11/2/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-29-10-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		0.0016	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
	18 ft	VMP-29-20-020515	2/5/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-29-20-050615	5/6/2015	<0.0057	U		<0.0057	U		<0.0057	U		0.0047	J	J	<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-29-20-072715	7/27/2015	<0.007	U		<0.007	U		<0.007	U		<0.062	U		<0.0082	U		<0.0081	U		<0.0081	U		<0.026	U	
		VMP-29-20-103015	10/30/2015	<0.0053	U		<0.0053	U		<0.0053	U		0.0075	J		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-29-20-020416-R	2/4/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-29-20-050216	5/2/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-29-20-072816	7/28/2016	<0.011	U		<0.011	U		<0.011	U		<0.098	U		<0.013	U		<0.013	U		<0.013	U		<0.041	U	
		VMP-29-18-110316	11/3/2016	<0.01	U		<0.01	U		<0.01	U		<0.091	U		<0.012	U		<0.012	U		<0.012	U		<0.038	U	
		VMP-29-18-013117	1/31/2017	<0.0047	U		<0.0047	U		<0.0047	U		0.0018	J		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-18-050217	5/2/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-29-18-072717	7/27/2017	<0.0098	U		<0.0098	U		<0.0098	U		<0.086	U		<0.011	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-29-18-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-29-18-012518	1/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-18-041718	4/17/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-29-18-072418	7/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-18-102618	10/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-29-18-012519	1/25/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-29-18-050219	5/2/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		0.0027	J	
		VMP-29-18-073119	7/31/2019	<0.0084	U		<0.0084	U		<0.0084	U		<0.073	U		<0.0098	U		<0.0096	U		<0.0096	U		<0.03	U	
		VMP-29-18-102519	10/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-29-18-012420	1/24/2020	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-29-18-042320	4/23/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-29-18-072720	7/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-29-18-110220	11/2/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-18-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	0.014			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		0.0021	J	
		VMP-29-10-050615	5/6/2015	<0.011	J	U	<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-29-10-072715	7/27/2015	0.014			<0.0059	U		0.0019	J		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-29-10-103015	10/30/2015	0.011			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		0.0022	J		<0.056	U		0.0064		
		VMP-29-10-012716	1/27/2016	0.0097			<0.0056	U		0.0017	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-29-10-050216	5/2/2016	0.027			0.00093	J		0.0018	J		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		0.0012	J	
		VMP-29-10-072816	7/28/2016	0.0071	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-29-10-120916	12/9/2016	0.014			0.0024	J		<0.006	U		<0.0094	U		<0.0086	U		0.0011	J		<0.052	U		0.0017	J	
		VMP-29-10-013117	1/31/2017	0.015			0.0034	J		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-29-10-050217	5/2/2017	0.015			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-29-10-072717	7/27/2017	<0.018	U		<0.01	U		<0.012	U		<0.018	U		<0.016	U		<0.0097	U		<0.1	U		<0.0083	U	
		VMP-29-10-102717	10/27/2017	<0.0086	U		0.014			0.0056			<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-29-10-012518	1/25/2018	0.005	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-29-10-041718	4/17/2018	0.021			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-29-10-072418	7/24/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-29-10-102618	10/26/2018	0.0064	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		0.0015	J	
		VMP-29-10-050219	5/2/2019	0.0035	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-29-10-073119	7/31/2019	<0.0092	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-10-102519	10/25/2019	0.012		J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-29-10-012420	1/24/2020	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-29-10-042320	4/23/2020	<0.0088	ND,UJ	UJ	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-29-10-072720	7/27/2020	0.0041	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-10-110220	11/2/2020	0.015			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-10-012721	1/27/2021	0.0048	J	J	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
	18 ft	VMP-29-20-020515	2/5/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-29-20-050615	5/6/2015	0.0093	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		0.0039	J	
		VMP-29-20-072715	7/27/2015	<0.013	J	U	<0.0077	U		0.0025	J		<0.014	U		<0.012	U		0.0029	J		<0.076	U		0.0045	J	
		VMP-29-20-103015	10/30/2015	0.014			<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		0.0032	J		<0.057	U		0.0047		
		VMP-29-20-020416-R	2/4/2016	0.0082	J		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-29-20-050216	5/2/2016	0.62			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		0.00098	J	
		VMP-29-20-072816	7/28/2016	0.016	J		<0.012	U		<0.014	U		<0.022	U		<0.02	U		<0.012	U		<0.12	U		<0.0099	U	
		VMP-29-18-110316	11/3/2016	0.012	J		<0.011	U		<0.013	U		<0.02	U		<0.018	U		<0.011	U		<0.11	U		<0.0093	U	
		VMP-29-18-013117	1/31/2017	0.0087	J		0.0049	J		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-29-18-050217	5/2/2017	0.03			0.0019	J		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-18-072717	7/27/2017	0.096			0.017			0.0087	J		<0.019	U		<0.017	U		<0.01	U		<0.1	U		0.004	J	
		VMP-29-18-102717	10/27/2017	0.01			0.022			0.0082			<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-29-18-012518	1/25/2018	0.0071	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		0.0016	J		<0.05	U		<0.0042	U	
		VMP-29-18-041718	4/17/2018	0.0077	J		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-29-18-072418	7/24/2018	0.0061	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		0.0021	J		<0.05	U		0.0015	J	
		VMP-29-18-102618	10/26/2018	0.0054	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		0.0013	J	
		VMP-29-18-012519	1/25/2019	0.022			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		0.002	J		<0.045	U		0.0053		
		VMP-29-18-050219	5/2/2019	0.0047	J		0.005	J		0.015			<0.0098	U		<0.0089	U		0.004	J		<0.054	U		0.0067		
		VMP-29-18-073119	7/31/2019	<0.016	U	UJ	<0.0092	U		<0.01	U		<0.016	U		<0.015	U		<0.0086	U		<0.09	U		<0.0074	U	
		VMP-29-18-102519	10/25/2019	0.01		J	<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-29-18-012420	1/24/2020	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		<0.0053	U	
		VMP-29-18-042320	4/23/2020	0.0046	J	J	<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-29-18-072720	7/27/2020	0.013			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-29-18-110220	11/2/2020	0.026			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		0.0027	J	
		VMP-29-18-012721	1/27/2021	0.0077	J	J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					0.17			<0.0065	U	
		VMP-29-10-050615	5/6/2015	0.0054	J		0.016	J	J	<0.0071	U		0.0047	J		<0.0052	U					0.016		J	<0.0071	U	
		VMP-29-10-072715	7/27/2015	0.0093	J		0.04			0.0036	J		0.0042	J		<0.0049	U					0.015			<0.0067	U	
		VMP-29-10-103015	10/30/2015	0.007	J		0.088			<0.0064	U		<0.0054	J	U	0.0042	J					0.014			<0.0064	U	
		VMP-29-10-012716	1/27/2016	<0.021	U		0.0026	J		<0.0063	U		<0.0053	J	U	<0.0046	U					0.013	J		<0.0063	U	
		VMP-29-10-050216	5/2/2016	0.0032	J		0.0078	J		0.0024	J		0.0022	J		<0.0049	U					0.015			<0.0066	U	
		VMP-29-10-072816	7/28/2016	<0.024	U		0.0047	J		<0.0071	U		<0.0059	U		<0.021	U					0.011	J		<0.0071	U	
		VMP-29-10-120916	12/9/2016	<0.02	U		0.0052	J		<0.006	U		0.0016	J		<0.018	U		<0.013	U		0.013			<0.006	U	
		VMP-29-10-013117	1/31/2017	<0.019	U		0.0093	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-29-10-050217	5/2/2017	0.0037	J		0.0043	J		0.0025	J		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-29-10-072717	7/27/2017	<0.039	U		<0.028	U		<0.012	U		<0.0097	U		<0.034	U					<0.023	U		<0.012	U	
		VMP-29-10-102717	10/27/2017	<0.019	U		0.0025	J		0.00081	J		0.0018	J		<0.016	U					0.0029	J		0.0013	J	
		VMP-29-10-012518	1/25/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.0034	J		<0.0061	U	
		VMP-29-10-041718	4/17/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					0.0038	J		<0.0057	U	
		VMP-29-10-072418	7/24/2018	<0.019	U		0.003	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-29-10-102618	10/26/2018	0.0028	J		0.0074	J		0.0028	J		<0.0047	U		<0.017	U					0.0031	J		<0.0057	U	
		VMP-29-10-050219	5/2/2019	<0.02	U		0.0042	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-29-10-073119	7/31/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-29-10-102519	10/25/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.0017	J		<0.0065	U	
		VMP-29-10-012420	1/24/2020	<0.022	U		<0.016	U		<0.0065	U		0.0064			<0.019	U					<0.013	U		<0.0065	U	
		VMP-29-10-042320	4/23/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U	UJ	0.00095	J	
		VMP-29-10-072720	7/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.015			0.0009	J	
		VMP-29-10-110220	11/2/2020	<0.02	U		0.0074	J		0.0005	J		<0.005	U		<0.018	U					0.026			0.00043	J	
		VMP-29-10-012721	1/27/2021	<0.02	U		0.0038	J		0.0009	J		<0.005	U		<0.018	U					0.0047	J		<0.006	U	
	18 ft	VMP-29-20-020515	2/5/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					0.044			<0.0066	U	
		VMP-29-20-050615	5/6/2015	0.011	J		0.018		J	<0.0071	J	U	0.012			<0.0052	U					0.015		J	<0.0071	U	
		VMP-29-20-072715	7/27/2015	0.013	J		0.031			0.012			0.0075			<0.0064	U					0.014	J		<0.0088	U	
		VMP-29-20-103015	10/30/2015	0.017	J		0.016			0.0063	J		<0.0055	J	U	<0.0048	U					0.053			<0.0066	U	
		VMP-29-20-020416-R	2/4/2016	<0.025	U		0.0053	J		0.0009	J		<0.0064	U		<0.0056	U					0.0089	J		<0.0076	U	
		VMP-29-20-050216	5/2/2016	<0.021	U		0.0066	J		<0.0064	U		0.0026	J		<0.0047	U					0.0075	J		<0.0064	U	
		VMP-29-20-072816	7/28/2016	<0.046	U		0.014	J		0.0029	J		0.0058	J		<0.041	U					0.049			<0.014	U	
		VMP-29-18-110316	11/3/2016	<0.043	U		<0.031	U		<0.013	U		0.0048	J		<0.038	U		<0.028	U		0.016	J		<0.013	U	
		VMP-29-18-013117	1/31/2017	<0.019	U		0.0063	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-29-18-050217	5/2/2017	0.0059	J		0.0046	J		0.0062			<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-29-18-072717	7/27/2017	<0.041	U		0.015	J		0.0023	J		0.0037	J		<0.036	U					0.014	J		<0.012	U	
		VMP-29-18-102717	10/27/2017	<0.019	U		0.0028	J		0.0012	J		0.003	J		<0.016	U					0.007	J		0.0015	J	
		VMP-29-18-012518	1/25/2018	<0.019	U		0.052			<0.0058	U		<0.0048	U		<0.017	U					0.012			<0.0058	U	
		VMP-29-18-041718	4/17/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-29-18-072418	7/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.0045	J		<0.0058	U	
		VMP-29-18-102618	10/26/2018	0.0036	J		0.0074	J		0.003	J		<0.0048	U		<0.017	U					0.0076	J		<0.0057	U	
		VMP-29-18-012519	1/25/2019	<0.017	U		0.017			<0.0052	U		<0.0043	U		<0.015	U					0.0051	J		<0.0052	U	
		VMP-29-18-050219	5/2/2019	<0.021	U		0.012	J		0.00089	J		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-29-18-073119	7/31/2019	<0.034	U		<0.025	U		<0.01	U		<0.0086	U		<0.03	U					<0.021	U		<0.01	U	
		VMP-29-18-102519	10/25/2019	<0.021	U		0.0044	J		<0.0064	U		<0.0054	U		<0.019	U					0.0056	J		<0.0064	U	
		VMP-29-18-012420	1/24/2020	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.022	U					<0.015	U		<0.0074	U	
		VMP-29-18-042320	4/23/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					0.0029	J	J	<0.0055	U	
		VMP-29-18-072720	7/27/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					0.014			<0.0062	U	
		VMP-29-18-110220	11/2/2020	<0.019	U		0.0082	J		0.0013	J		<0.0048	U		<0.017	U					0.022			<0.0058	U	
		VMP-29-18-012721	1/27/2021	<0.02	U		0.0034	J		0.0024	J		<0.0049	U		<0.017	U					0.0084	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	<0.0056	U		<0.0091	U		<0.009	U		0.018			<0.0058		U	<0.039	U		<0.0072	U		<0.0072	U	
		VMP-29-10-050615	5/6/2015	<0.0061	U		<0.0099	U		<0.0098	U		0.33		J	0.0014	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-29-10-072715	7/27/2015	<0.0058	U		<0.0093	U		<0.0092	U		0.2			0.0059			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-29-10-103015	10/30/2015	<0.0056	U		<0.009	U		0.0033	J		0.05			0.017			<0.039	U		<0.0071	U		<0.0071	U	
		VMP-29-10-012716	1/27/2016	<0.0055	U		<0.0088	U		<0.0088	U		0.02			<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-29-10-050216	5/2/2016	<0.0058	U		<0.0093	U		<0.0092	U		0.1			0.0049	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-29-10-072816	7/28/2016	<0.0062	U		<0.0099	U		<0.0098	U		0.92			0.00098	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-29-10-120916	12/9/2016	<0.0052	U		<0.0084	U		<0.0083	U		0.055	J0	J	0.0016	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-29-10-013117	1/31/2017	<0.005	U		<0.0081	U		<0.008	U		0.0057			0.0033	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-29-10-050217	5/2/2017	<0.0054	U		<0.0086	U		<0.0085	U		0.024			0.0012	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-29-10-072717	7/27/2017	<0.01	U		<0.016	U		<0.016	U		0.14			<0.0089	U		<0.07	U		<0.013	U		<0.013	U	
		VMP-29-10-102717	10/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		0.0066			0.0059			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-29-10-012518	1/25/2018	<0.0053	U		<0.0085	U		<0.0084	U		0.02			0.00067	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-29-10-041718	4/17/2018	<0.005	U		<0.008	U		<0.0079	U		0.019			0.0012	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-29-10-072418	7/24/2018	<0.0049	U		<0.0079	U		<0.0078	U		0.026			<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-29-10-102618	10/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.0011	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-29-10-050219	5/2/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-29-10-073119	7/31/2019	<0.0052	U		<0.0084	U		<0.0083	U		0.01			0.0021	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-10-102519	10/25/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-29-10-012420	1/24/2020	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-29-10-042320	4/23/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		0.0012	J		0.0059	J		<0.0064	U		<0.0064	U	
		VMP-29-10-072720	7/27/2020	<0.0082	U		<0.0083	U		0.0027	J		0.27			<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-10-110220	11/2/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.001	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-10-012721	1/27/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0014	J		<0.036	U		<0.0066	U		<0.0066	U	
	18 ft	VMP-29-20-020515	2/5/2015	<0.0057	U		<0.0092	U		<0.0091	U		0.14			<0.0055		U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-29-20-050615	5/6/2015	<0.0062	U		<0.01	U		<0.0098	U		0.34		J	0.0019	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-29-20-072715	7/27/2015	<0.0076	U		<0.012	U		<0.012	U		0.23			0.0068			<0.053	U		<0.0097	U		<0.0097	U	
		VMP-29-20-103015	10/30/2015	<0.0057	U		<0.0092	U		<0.009	U		0.004			0.014			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-29-20-020416-R	2/4/2016	<0.0066	U		<0.011	U		<0.01	U		0.17			0.0024	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-29-20-050216	5/2/2016	<0.0056	U		<0.009	U		<0.0089	U		0.89			0.00097	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-29-20-072816	7/28/2016	<0.012	U		<0.019	U		0.0092	J		2.1			0.0045	J		<0.084	U		<0.015	U		<0.015	U	
		VMP-29-18-110316	11/3/2016	<0.011	U		<0.018	U		<0.018	U		1.7			<0.0099	J	U	<0.078	U		<0.014	U		<0.014	U	
		VMP-29-18-013117	1/31/2017	<0.005	U		<0.0081	U		<0.008	U		0.011			0.0022	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-29-18-050217	5/2/2017	<0.0052	U		<0.0084	U		<0.0083	U		0.05			0.0018	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-18-072717	7/27/2017	<0.01	U		<0.017	U		<0.017	U		1.3			0.0069	J		<0.074	U		<0.014	U		<0.014	U	
		VMP-29-18-102717	10/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		0.036			0.0066			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-29-18-012518	1/25/2018	<0.005	U		<0.0081	U		<0.008	U		0.11			0.035			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-29-18-041718	4/17/2018	<0.0047	U		<0.0076	U		<0.0076	U		0.027			0.0021	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-29-18-072418	7/24/2018	<0.005	U		<0.0081	U		<0.008	U		0.93			0.00074	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-29-18-102618	10/26/2018	<0.005	U		<0.008	U		<0.0079	U		0.16			0.0024	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-29-18-012519	1/25/2019	<0.0045	U		<0.0073	U		<0.0072	U		0.018			0.0016	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-29-18-050219	5/2/2019	<0.0054	U		<0.0088	U		<0.0086	U		0.11			0.013			<0.038	U		<0.007	U		<0.007	U	
		VMP-29-18-073119	7/31/2019	<0.009	U		<0.014	U		<0.014	U		0.64			<0.008	U		<0.063	U		<0.012	U		<0.012	U	
		VMP-29-18-102519	10/25/2019	<0.0056	U		<0.009	U		<0.0089	U		0.33			0.00069	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-29-18-012420	1/24/2020	<0.0064	U		<0.01	U		<0.01	U		0.063			<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-29-18-042320	4/23/2020	<0.0047	U		<0.0076	U		<0.0076	U		0.039			<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-29-18-072720	7/27/2020	<0.0086	U		<0.0086	U		<0.0085	U		0.84			<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-29-18-110220	11/2/2020	<0.005	U		<0.0081	U		<0.008	U		0.092			0.0022	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-29-18-012721	1/27/2021	<0.0051	U		<0.0082	U		<0.0081	U		0.04			0.0024	J		<0.036	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-29	10 ft	VMP-29-10-020515	2/5/2015	<0.0071	U		<0.0074	U		<0.0065	J	U	<0.0065	U		0.0062			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-29-10-050615	5/6/2015	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		0.005	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-29-10-072715	7/27/2015	<0.0073	U		<0.0076	U		0.0019	J		0.0012	J		0.0074			<0.0035	U		0.0034	J		0.0012	J	
		VMP-29-10-103015	10/30/2015	<0.007	U		0.0018	J		<0.0064	U		<0.0064	U		0.0014	J		0.002	J		0.003	J		<0.0057	U	
		VMP-29-10-012716	1/27/2016	<0.0069	U		0.0018	J		<0.0063	U		<0.0063	U		0.0032	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-29-10-050216	5/2/2016	<0.0072	U		<0.0076	U		0.0019	J		0.0006	J		<0.0063	U		<0.0034	U		0.0048	J		0.002	J	
		VMP-29-10-072816	7/28/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-29-10-120916	12/9/2016	<0.0066	U		<0.0069	U		0.00082	J		<0.006	U		0.001	J	J	<0.0031	U		0.01			0.0048	J	
		VMP-29-10-013117	1/31/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.00097	J		<0.003	U		0.012			0.0032	J	
		VMP-29-10-050217	5/2/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0011	J		<0.0032	U		0.0018	J		<0.0055	U	
		VMP-29-10-072717	7/27/2017	<0.013	U		<0.013	U		<0.012	U		<0.012	U		<0.011	U		<0.006	U		<0.01	U		<0.01	U	
		VMP-29-10-102717	10/27/2017	<0.0061	U		0.0014	J		0.0077			0.0034	J		0.0023	J		<0.0029	U		0.063			0.023		
		VMP-29-10-012518	1/25/2018	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-29-10-041718	4/17/2018	<0.0063	U		0.0014	J		0.00049	J		<0.0057	U		0.00057	J		<0.003	U		0.0021	J		0.00061	J	
		VMP-29-10-072418	7/24/2018	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-29-10-102618	10/26/2018	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	J	U	<0.003	U		<0.005	U		<0.005	U	
		VMP-29-10-050219	5/2/2019	<0.0067	U		0.0011	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-29-10-073119	7/31/2019	0.0098			<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-29-10-102519	10/25/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-29-10-012420	1/24/2020	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-29-10-042320	4/23/2020	<0.0063	U		0.0016	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-29-10-072720	7/27/2020	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0021	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-29-10-110220	11/2/2020	<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.00077	J		<0.0053	U	
		VMP-29-10-012721	1/27/2021	<0.0065	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
	18 ft	VMP-29-20-020515	2/5/2015	<0.0072	U		<0.0076	U		<0.0066	J	U	<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-29-20-050615	5/6/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		0.0026	J		<0.0063	U	
		VMP-29-20-072715	7/27/2015	<0.0096	U		<0.01	U		<0.0088	J	U	0.0012	J		0.019			<0.0046	U		0.0061	J		0.0021	J	
		VMP-29-20-103015	10/30/2015	<0.0072	U		0.0026	J		0.0011	J		<0.0066	U		0.0017	J		<0.0034	U		0.0024	J		<0.0058	U	
		VMP-29-20-020416-R	2/4/2016	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-29-20-050216	5/2/2016	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.0079			<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-29-20-072816	7/28/2016	<0.015	U		<0.016	U		<0.014	U		<0.014	U		<0.013	U		<0.0072	U		<0.012	U		<0.012	U	
		VMP-29-18-110316	11/3/2016	<0.014	U		<0.015	U		<0.013	U		<0.013	U		<0.012	U		<0.0067	U		<0.011	U		<0.011	U	
		VMP-29-18-013117	1/31/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.00068	J		<0.003	U		0.016			0.0045	J	
		VMP-29-18-050217	5/2/2017	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.00068	J		<0.0031	U		0.0072			0.0019	J	
		VMP-29-18-072717	7/27/2017	<0.013	U		<0.014	U		0.0086	J		0.0028	J		0.0046	J		<0.0063	U		0.072			0.025		
		VMP-29-18-102717	10/27/2017	<0.0061	U		0.0015	J		0.0099			0.0042	J		<0.0053	U		<0.0029	U		0.086			0.029		
		VMP-29-18-012518	1/25/2018	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-29-18-041718	4/17/2018	<0.006	U		0.0014	J		<0.0055	J	U	<0.0055	U		<0.0052	U		<0.0028	U		0.0043	J		<0.0048	J	U
		VMP-29-18-072418	7/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0012	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-29-18-102618	10/26/2018	<0.0063	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-29-18-012519	1/25/2019	<0.0057	U		<0.006	U		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-29-18-050219	5/2/2019	<0.0068	U		0.001	J		0.025			0.0062	J		0.021			<0.0032	U		0.021			0.011		
		VMP-29-18-073119	7/31/2019	<0.011	U		<0.012	U		<0.01	U		<0.01	U		<0.0098	U		<0.0054	U		<0.0092	U		<0.0092	U	
		VMP-29-18-102519	10/25/2019	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-29-18-012420	1/24/2020	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-29-18-042320	4/23/2020	<0.006	U		0.0011	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-29-18-072720	7/27/2020	<0.0068	U		0.00099	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-29-18-110220	11/2/2020	<0.0063	U		0.0016	J		0.0009	J		<0.0058	U		<0.0055	U		<0.003	U		0.0011	J		<0.0051	U	
		VMP-29-18-012721	1/27/2021	<0.0064	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0011	J		<0.0052	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	0.0097	J		0.017			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.0045	J	
		VMP-29-30-050615	5/6/2015	0.03	J		0.0042	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.013	J		0.052		
		VMP-29-30-050615-DUP	5/6/2015	0.053			0.0042	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.028			0.06		
		VMP-29-30-080315	8/3/2015	0.16			0.0065			<0.01	U		<0.015	U		<0.058	U		<0.0033	U	UJ	<0.014	U	UJ	0.33		
		VMP-29-30-103015	10/30/2015	0.074			0.0025	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.043		
		VMP-29-30-012716	1/27/2016	0.047			0.0034	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.053		
		VMP-29-30-050216	5/2/2016	0.049	J		<0.015	U		<0.032	U		<0.05	U		<0.19	U		<0.011	U		<0.046	U		0.016	J	
		VMP-29-30-072816	7/28/2016	1.8			0.02			<0.022	U		<0.034	U		<0.13	U		<0.0072	U		<0.031	U		3.4		
		VMP-29-26-110316	11/3/2016	0.051			0.0072			<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		0.024		
		VMP-29-26-110316-Dup	11/3/2016	0.041			0.0071			<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.019		
		VMP-29-26-013117	1/31/2017	0.0092	J		0.02			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0028	J		0.003	J	
		VMP-29-26-013117-Dup	1/31/2017	<0.028	J	U	0.018			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0079	J		<0.014	U	
		VMP-29-26-050317	5/3/2017	<0.026	J	U	0.00091	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.007	J	
		VMP-29-26-072717	7/27/2017	1.4			0.014	J		<0.052	U		<0.081	U		<0.3	U		<0.017	U		0.032	J		3.9		
		VMP-29-26-072717-DUP	7/27/2017	1.4			0.011	J		<0.049	U		<0.076	U		<0.28	U		<0.016	U		<0.07	U		4		
		VMP-29-26-102717	10/27/2017	0.014	J		0.0024	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0056	J		0.0098	J	
		VMP-29-26-102717-DUP	10/27/2017	0.014	J		0.0017	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.0082	J	
		VMP-29-26-012518	1/25/2018	0.019	J		0.02			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.03		
		VMP-29-26-041718	4/17/2018	0.014	J		0.0016	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		0.011	J	
		VMP-29-26-041718-DUP	4/17/2018	0.016	J		0.0015	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.011	J	
		VMP-29-26-072418	7/24/2018	0.67			0.0031	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.007	J		0.56		
		VMP-29-26-102618	10/26/2018	0.042			0.0059			<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		0.0092	J		0.029		
		VMP-29-26-102618-DUP	10/26/2018	0.04			0.0046			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0064	J		0.03		
		VMP-29-26-012519	1/25/2019	0.0093	J		0.0018	J		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		0.004	J	
		VMP-29-26-012519-DUP	1/25/2019	0.0072	J		0.0012	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0018	J	
		VMP-29-26-050219	5/2/2019	0.1			0.017			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.04		
		VMP-29-26-073119	7/31/2019	0.82			0.0069	J		<0.033	U		<0.051	U		<0.19	U		<0.011	U		<0.047	U		0.88		
		VMP-29-26-102519	10/25/2019	0.017	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.012	J	
		VMP-29-26-012420	1/24/2020	0.013	J		<0.0046	U		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		0.015	J	
		VMP-29-26-042320	4/23/2020	0.007	J	J	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.0043	J	
		VMP-29-26-042320-DUP	4/23/2020	0.012	J	J	<0.0039	U		<0.0081	U		0.0022	J		<0.047	U		<0.0027	U		<0.012	U		0.004	J	
		VMP-29-26-072720	7/27/2020	0.19			0.016			<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.73		
		VMP-29-26-110220	11/2/2020	0.02	J		0.00075	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.011	J	
		VMP-29-26-012721	1/27/2021	0.018	J		0.00028	J		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		<0.0098	U		0.012		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	0.0058	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-29-30-050615	5/6/2015	0.0078	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-29-30-050615-DUP	5/6/2015	0.003	J		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-29-30-080315	8/3/2015	0.011	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0077	U	
		VMP-29-30-103015	10/30/2015	0.0039	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.002	J		0.0032	J		<0.0062	U	
		VMP-29-30-012716	1/27/2016	0.014	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-29-30-050216	5/2/2016	0.017	J		<0.03	U		<0.022	U		<0.041	U		<0.051	U		<0.024	U		<0.1	U		<0.025	U	
		VMP-29-30-072816	7/28/2016	0.069			<0.021	U		<0.015	U		<0.028	U		<0.034	U		<0.016	U		<0.068	U		<0.017	U	
		VMP-29-26-110316	11/3/2016	0.05			<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-29-26-110316-Dup	11/3/2016	0.049			<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-29-26-013117	1/31/2017	0.0085	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-29-26-013117-Dup	1/31/2017	0.0081	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-29-26-050317	5/3/2017	0.0056	J		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-29-26-072717	7/27/2017	0.13			<0.049	U		<0.036	U		<0.066	U		<0.082	U		<0.038	U		<0.16	U		<0.04	U	
		VMP-29-26-072717-DUP	7/27/2017	0.14			<0.046	U		<0.034	U		<0.063	U		<0.078	U		<0.036	U		<0.15	U		<0.038	U	
		VMP-29-26-102717	10/27/2017	0.0048	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-29-26-102717-DUP	10/27/2017	0.0046	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-29-26-012518	1/25/2018	0.01	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		0.0018	J		<0.024	U		<0.006	U	
		VMP-29-26-041718	4/17/2018	0.0047	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-29-26-041718-DUP	4/17/2018	0.0043	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-29-26-072418	7/24/2018	0.15			<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00092	J		<0.024	U		<0.0062	U	
		VMP-29-26-102618	10/26/2018	0.027			<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-29-26-102618-DUP	10/26/2018	0.023			<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-29-26-012519	1/25/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		0.006			<0.022	U		<0.0055	U	
		VMP-29-26-012519-DUP	1/25/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.0062			<0.024	U		<0.0059	U	
		VMP-29-26-050219	5/2/2019	0.015	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		0.0022	J		<0.0064	U	
		VMP-29-26-073119	7/31/2019	0.2			<0.031	U		<0.023	U		<0.042	U		<0.052	U		<0.024	U		<0.1	U		<0.026	U	
		VMP-29-26-102519	10/25/2019	0.078			<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		0.00098	J		<0.028	U		<0.0069	U	
		VMP-29-26-012420	1/24/2020	0.01	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		0.014			<0.029	U		<0.0074	U	
		VMP-29-26-042320	4/23/2020	0.0043	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.002	J		<0.025	U		<0.0063	U	
		VMP-29-26-042320-DUP	4/23/2020	0.0058	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0026	J		<0.025	U		0.00082	J	
		VMP-29-26-072720	7/27/2020	0.058			<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		0.00067	J		<0.024	U		<0.0059	U	
		VMP-29-26-110220	11/2/2020	0.049			<0.0075	U		0.00057	J		<0.01	U		<0.012	U		0.002	J		<0.024	U		<0.0062	U	
		VMP-29-26-012721	1/27/2021	0.011	J		<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		0.0035	J		<0.021	U		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0052	U		<0.0052	U	
		VMP-29-30-050615	5/6/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.002	J		<0.0056	U		<0.0056	U	
		VMP-29-30-050615-DUP	5/6/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0026	J		<0.0054	U		<0.0054	U	
		VMP-29-30-080315	8/3/2015	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		0.0029	J		<0.006	U		<0.006	U	
		VMP-29-30-103015	10/30/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.005	J		<0.0048	U		<0.0048	U	
		VMP-29-30-012716	1/27/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0026	J		<0.0057	U		<0.0057	U	
		VMP-29-30-050216	5/2/2016	<0.017	U		<0.037	U		<0.029	U		<0.029	U		<0.029	U		<0.024	U		<0.02	U		<0.02	U	
		VMP-29-30-072816	7/28/2016	<0.011	U		<0.025	U		<0.02	U		<0.02	U		<0.02	U		<0.016	U		<0.013	U		<0.013	U	
		VMP-29-26-110316	11/3/2016	<0.0045	J	U	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0053	U		<0.0053	U	
		VMP-29-26-110316-Dup	11/3/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0026	J		<0.0051	U		<0.0051	U	
		VMP-29-26-013117	1/31/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0024	J		<0.0047	U		<0.0047	U	
		VMP-29-26-013117-Dup	1/31/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.002	J		<0.0047	U		<0.0047	U	
		VMP-29-26-050317	5/3/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0028	J		<0.0044	U		<0.0044	U	
		VMP-29-26-072717	7/27/2017	<0.027	U		<0.06	U		<0.047	U		<0.047	U		<0.047	U		<0.038	U		<0.032	U		<0.032	U	
		VMP-29-26-072717-DUP	7/27/2017	<0.025	U		<0.056	U		<0.044	U		<0.044	U		<0.044	U		<0.036	U		<0.03	U		<0.03	U	
		VMP-29-26-102717	10/27/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0028	J		<0.0045	U		<0.0045	U	
		VMP-29-26-102717-DUP	10/27/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0029	J		<0.0044	U		<0.0044	U	
		VMP-29-26-012518	1/25/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0032	J		<0.0047	U		<0.0047	U	
		VMP-29-26-041718	4/17/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0034	J		<0.0049	U		<0.0049	U	
		VMP-29-26-041718-DUP	4/17/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0028	J		<0.0045	U		<0.0045	U	
		VMP-29-26-072418	7/24/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.002	J		<0.0048	U		<0.0048	U	
		VMP-29-26-102618	10/26/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		0.0023	J		<0.0052	U		<0.0052	U	
		VMP-29-26-102618-DUP	10/26/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0019	J		<0.0045	U		<0.0045	U	
		VMP-29-26-012519	1/25/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.0026	J		<0.0043	U		<0.0043	U	
		VMP-29-26-012519-DUP	1/25/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0027	J		<0.0046	U		<0.0046	U	
		VMP-29-26-050219	5/2/2019	0.0047			<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0025	J		<0.005	U		<0.005	U	
		VMP-29-26-073119	7/31/2019	<0.017	U		<0.038	U		<0.03	U		<0.03	U		<0.03	U		<0.024	U		<0.02	U		<0.02	U	
		VMP-29-26-102519	10/25/2019	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0021	J		<0.0054	U		<0.0054	U	
		VMP-29-26-012420	1/24/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.007	U		<0.0058	U		<0.0058	U	
		VMP-29-26-042320	4/23/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0021	J		<0.0049	U		<0.0049	U	
		VMP-29-26-042320-DUP	4/23/2020	<0.0042	U		<0.0093	U		0.0018	J		<0.0073	J	U	0.0016	J		0.0028	J		<0.0049	U		<0.0049	U	
		VMP-29-26-072720	7/27/2020	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0023	J		<0.0046	U		<0.0046	U	
		VMP-29-26-110220	11/2/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-29-26-012721	1/27/2021	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		0.0022	J		<0.0042	U		<0.0042	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-29-30-050615	5/6/2015	<0.0055	U		<0.0055	U		<0.0055	U		0.0019	J	J	<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-29-30-050615-DUP	5/6/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-29-30-080315	8/3/2015	<0.0059	U		<0.0059	U		<0.0059	U		0.0053	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-29-30-103015	10/30/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	J	U	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-30-012716	1/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-29-30-050216	5/2/2016	<0.019	U		<0.019	U		<0.019	U		<0.17	U		<0.022	U		<0.022	U		<0.022	U		<0.07	U	
		VMP-29-30-072816	7/28/2016	<0.013	U		<0.013	U		<0.013	U		<0.11	U		<0.015	U		<0.015	U		<0.015	U		<0.047	U	
		VMP-29-26-110316	11/3/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-29-26-110316-Dup	11/3/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-29-26-013117	1/31/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-29-26-013117-Dup	1/31/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-29-26-050317	5/3/2017	<0.0043	U		<0.0043	U		<0.0043	U		0.003	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-29-26-072717	7/27/2017	<0.031	U		<0.031	U		<0.031	U		<0.27	U		<0.036	U		<0.035	U		<0.035	U		<0.11	U	
		VMP-29-26-072717-DUP	7/27/2017	<0.029	U		<0.029	U		<0.029	U		<0.26	U		<0.034	U		<0.033	U		<0.033	U		<0.1	U	
		VMP-29-26-102717	10/27/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-29-26-102717-DUP	10/27/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-29-26-012518	1/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-29-26-041718	4/17/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-29-26-041718-DUP	4/17/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-29-26-072418	7/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-26-102618	10/26/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-29-26-102618-DUP	10/26/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-29-26-012519	1/25/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-29-26-012519-DUP	1/25/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-29-26-050219	5/2/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-29-26-073119	7/31/2019	<0.02	U		<0.02	U		<0.02	U		<0.17	U		<0.023	U		<0.022	U		<0.022	U		<0.072	U	
		VMP-29-26-102519	10/25/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-29-26-012420	1/24/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP-29-26-042320	4/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-29-26-042320-DUP	4/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-29-26-072720	7/27/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-29-26-110220	11/2/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-29-26-012721	1/27/2021	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		0.00085	J		<0.0047	U		<0.0047	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	0.013			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-29-30-050615	5/6/2015	0.01			<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		0.0026	J		<0.06	U		<0.0049	U	
		VMP-29-30-050615-DUP	5/6/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		0.0035	J		<0.057	U		0.0057		
		VMP-29-30-080315	8/3/2015	0.0098	J	J	<0.0065	U		0.0032	J		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-29-30-103015	10/30/2015	0.011			0.0013	J		<0.0058	U		<0.0091	U		<0.0083	U		0.0017	J		<0.051	U		0.0015	J	
		VMP-29-30-012716	1/27/2016	0.0065	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		0.0012	J	
		VMP-29-30-050216	5/2/2016	0.034	J		<0.021	U		<0.024	U		<0.037	U		<0.034	U		<0.02	U		<0.21	U		<0.017	U	
		VMP-29-30-072816	7/28/2016	<0.025	U		<0.014	U		<0.016	U		<0.025	U		<0.023	U		<0.013	U		<0.14	U		<0.012	U	
		VMP-29-26-110316	11/3/2016	<0.0098	J	U	0.057			0.0079			<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-29-26-110316-Dup	11/3/2016	<0.0096	J	U	0.056			0.0087			<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-29-26-013117	1/31/2017	0.0095			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-29-26-013117-Dup	1/31/2017	0.017			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		0.003	J		<0.05	U		0.0045		
		VMP-29-26-050317	5/3/2017	0.005	J		0.0016	J		<0.0054	U		<0.0084	U		<0.0076	U		0.0016	J		<0.046	U		0.0012	J	
		VMP-29-26-072717	7/27/2017	<0.059	U		<0.034	U		<0.038	U		<0.06	U		<0.054	U		<0.032	U		<0.33	U		0.013	J	
		VMP-29-26-072717-DUP	7/27/2017	<0.055	U		<0.032	U		<0.036	U		<0.056	U		<0.051	U		<0.03	U		<0.31	U		0.01	J	
		VMP-29-26-102717	10/27/2017	<0.0084	U		0.004	J		0.01			<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		0.003	J	
		VMP-29-26-102717-DUP	10/27/2017	0.0078	J		0.0023	J		0.0052	J		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		0.0021	J	
		VMP-29-26-012518	1/25/2018	0.0042	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-29-26-041718	4/17/2018	0.0091	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-26-041718-DUP	4/17/2018	0.0098			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-29-26-072418	7/24/2018	0.049			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		0.0059			<0.051	U		0.0034	J	
		VMP-29-26-102618	10/26/2018	0.01			<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		0.0027	J	
		VMP-29-26-102618-DUP	10/26/2018	0.0086			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		0.0017	J	
		VMP-29-26-012519	1/25/2019	0.014			0.0011	J		<0.0052	U		<0.0081	U		<0.0074	U		0.0025	J		<0.045	U		0.0051		
		VMP-29-26-012519-DUP	1/25/2019	0.0071	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		0.0011	J		<0.049	U		0.0042		
		VMP-29-26-050219	5/2/2019	0.0045	J		0.0051	J		0.0015	J		<0.0095	U		<0.0087	U		0.0075			<0.053	U		<0.0044	U	
		VMP-29-26-073119	7/31/2019	<0.037	U	UJ	<0.022	U		<0.024	U		<0.038	U		<0.035	U		<0.02	U		<0.21	U		<0.018	U	
		VMP-29-26-102519	10/25/2019	0.0066	J	J	<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-29-26-012420	1/24/2020	<0.011	U		0.0034	J		<0.007	U		<0.011	U		<0.01	U		0.0039	J		<0.061	U		<0.005	U	
		VMP-29-26-042320	4/23/2020	<0.0092	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-26-042320-DUP	4/23/2020	0.0057	J	J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-29-26-072720	7/27/2020	0.0061	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-29-26-110220	11/2/2020	0.014			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-29-26-012721	1/27/2021	0.0088	J	J	<0.0045	U		<0.0051	U		<0.0079	U		<0.0072	U		<0.0042	U		<0.044	U		<0.0036	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	<0.021	U		0.0084	J		<0.0063	U		<0.0053	U		<0.0046	U					0.01	J		<0.0063	U	
		VMP-29-30-050615	5/6/2015	0.0043	J		0.04		J	<0.0068	U		0.0078			<0.005	U					0.0076	J	J	<0.0068	U	
		VMP-29-30-050615-DUP	5/6/2015	0.0052	J		0.092		J	<0.0066	J	U	0.0085			<0.0048	U					0.01	J	J	<0.0066	U	
		VMP-29-30-080315	8/3/2015	0.012	J	J	0.0057	J		0.0083			0.0062			<0.0054	U					0.014	J		<0.0073	U	
		VMP-29-30-103015	10/30/2015	0.0039	J		0.0023	J		<0.0058	U		<0.0049	J	U	0.00071	J					0.016			<0.0058	U	
		VMP-29-30-012716	1/27/2016	0.0012	J		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					0.0068	J		<0.0069	U	
		VMP-29-30-050216	5/2/2016	<0.079	U		<0.057	U		<0.024	U		<0.02	U		<0.017	U					0.006	J		<0.024	U	
		VMP-29-30-072816	7/28/2016	<0.054	U		0.017	J		<0.016	U		<0.013	U		<0.047	U					0.028	J		<0.016	U	
		VMP-29-26-110316	11/3/2016	<0.021	U		<0.015	U		0.0031	J		0.0036	J		<0.019	U		0.0051	J	J	0.0053	J		0.0035	J	
		VMP-29-26-110316-Dup	11/3/2016	<0.021	U		0.0042	J		0.0028	J		0.0033	J		<0.018	U		0.006	J	J	0.0071	J		0.0035	J	
		VMP-29-26-013117	1/31/2017	<0.019	U		0.0034	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-29-26-013117-Dup	1/31/2017	<0.019	U		0.0059	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-29-26-050317	5/3/2017	<0.018	U		0.004	J		0.0022	J		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-29-26-072717	7/27/2017	<0.13	U		0.082	J		<0.038	U		<0.032	U		<0.11	U					0.038	J		<0.038	U	
		VMP-29-26-072717-DUP	7/27/2017	<0.12	U		0.054	J		0.005	J		<0.03	U		<0.1	U					<0.072	U		<0.036	U	
		VMP-29-26-102717	10/27/2017	<0.018	U		0.016			0.00096	J		<0.0046	U		<0.016	U					0.0045	J		0.0022	J	
		VMP-29-26-102717-DUP	10/27/2017	<0.018	U		0.01	J		<0.0053	U		<0.0044	U		<0.016	U					0.005	J		0.0013	J	
		VMP-29-26-012518	1/25/2018	<0.019	U		0.0026	J		<0.0057	U		<0.0048	U		<0.017	U					0.0024	J		<0.0057	U	
		VMP-29-26-041718	4/17/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-29-26-041718-DUP	4/17/2018	<0.018	U		0.004	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-29-26-072418	7/24/2018	<0.019	U		0.0031	J		<0.0058	U		<0.0049	U		<0.017	U					0.0042	J		<0.0058	U	
		VMP-29-26-102618	10/26/2018	<0.021	U		0.0076	J		<0.0063	U		<0.0052	U		<0.018	U					0.011	J		<0.0063	U	
		VMP-29-26-102618-DUP	10/26/2018	<0.018	U		0.006	J		<0.0055	U		<0.0046	U		<0.016	U					0.011			<0.0055	U	
		VMP-29-26-012519	1/25/2019	<0.017	U		0.0042	J		<0.0052	U		<0.0043	U		<0.015	U					0.0028	J		<0.0052	U	
		VMP-29-26-012519-DUP	1/25/2019	<0.019	U		0.0038	J		<0.0056	U		<0.0047	U		<0.016	U					0.003	J		<0.0056	U	
		VMP-29-26-050219	5/2/2019	<0.02	U		0.0037	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-29-26-073119	7/31/2019	<0.081	U		<0.059	U		<0.024	U		<0.02	U		<0.072	U					<0.049	U		<0.024	U	
		VMP-29-26-102519	10/25/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-29-26-012420	1/24/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					<0.014	U		<0.007	U	
		VMP-29-26-042320	4/23/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U	UJ	<0.006	U	
		VMP-29-26-042320-DUP	4/23/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0038	J	J	0.00092	J	
		VMP-29-26-072720	7/27/2020	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-29-26-110220	11/2/2020	<0.019	U		0.004	J		0.0016	J		<0.0049	U		<0.017	U					0.016			0.0048	J	
		VMP-29-26-012721	1/27/2021	<0.017	U		<0.012	U		0.00034	J		<0.0042	U		<0.015	U					0.0063	J		0.00095	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	<0.0055	U		<0.0088	U		<0.0088	U		0.022			<0.0063		U	<0.038	U		<0.007	U		<0.007	U	
		VMP-29-30-050615	5/6/2015	<0.0059	U		<0.0096	U		<0.0095	U	UJ	0.04		J	0.0016	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-29-30-050615-DUP	5/6/2015	<0.0057	U		<0.0092	U		<0.0091	U	J	0.055		J	0.0015	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-29-30-080315	8/3/2015	<0.0064	U		<0.01	U		0.0085	J		0.2			0.0016	J		<0.044	U	UJ	<0.0082	U		<0.0082	U	
		VMP-29-30-103015	10/30/2015	<0.0051	U		<0.0082	U		<0.0081	U		0.19			0.0019	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-29-30-012716	1/27/2016	<0.006	U		<0.0096	U		<0.0095	U		0.15			<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-29-30-050216	5/2/2016	<0.021	U		<0.033	U		<0.033	U		2.5			<0.018	U		<0.14	U		<0.026	U		<0.026	U	
		VMP-29-30-072816	7/28/2016	<0.014	U		<0.022	U		<0.022	U		4.9			0.0074	J		<0.097	U		<0.018	U		<0.018	U	
		VMP-29-26-110316	11/3/2016	<0.0056	U		<0.009	U		<0.0088	U		0.33			0.012			<0.039	U		<0.0071	U		<0.0071	U	
		VMP-29-26-110316-Dup	11/3/2016	<0.0054	U		<0.0087	U		<0.0086	U		0.33			0.013			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-29-26-013117	1/31/2017	<0.005	U		<0.008	U		<0.0079	U		0.097			<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-29-26-013117-Dup	1/31/2017	<0.005	U		<0.008	U		<0.0079	U		0.077			0.00074	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-29-26-050317	5/3/2017	<0.0046	U		<0.0075	U		<0.0074	U		0.017			0.0025	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-29-26-072717	7/27/2017	<0.033	U		<0.054	U		<0.053	U		5			0.018	J		<0.23	U		<0.042	U		<0.042	U	
		VMP-29-26-072717-DUP	7/27/2017	<0.031	U		<0.05	U		<0.05	U		5.1			0.0073	J		<0.22	U		<0.04	U		<0.04	U	
		VMP-29-26-102717	10/27/2017	<0.0047	U		<0.0076	U		<0.0076	U		0.02			0.0017	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-29-26-102717-DUP	10/27/2017	<0.0046	U		<0.0074	U		<0.0073	U		0.019			0.0017	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-29-26-012518	1/25/2018	<0.005	U		<0.008	U		<0.0079	U		0.11			0.0012	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-29-26-041718	4/17/2018	<0.0052	U		<0.0084	U		<0.0083	U		0.024			<0.0046	J	U	<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-26-041718-DUP	4/17/2018	<0.0048	U		<0.0077	U		<0.0076	U		0.025			<0.0042	J	U	<0.033	U		<0.0061	U		<0.0061	U	
		VMP-29-26-072418	7/24/2018	<0.0051	U		<0.0082	U		<0.0081	U		2.8			0.0039	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-29-26-102618	10/26/2018	<0.0054	U		<0.0088	U		<0.0086	U		0.19			0.0016	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-29-26-102618-DUP	10/26/2018	<0.0048	U		<0.0077	U		<0.0076	U		0.17			0.0017	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-29-26-012519	1/25/2019	<0.0045	U		<0.0072	U		<0.0072	U		0.016			<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-29-26-012519-DUP	1/25/2019	<0.0049	U		<0.0079	U		<0.0078	U		0.013			<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-29-26-050219	5/2/2019	<0.0053	U		<0.0085	U		<0.0084	U		0.16			0.083			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-29-26-073119	7/31/2019	<0.021	U		<0.034	U		<0.034	U		3.8			<0.019	U		<0.15	U		<0.027	U		<0.027	U	
		VMP-29-26-102519	10/25/2019	<0.0057	U		<0.0092	U		<0.009	U		1			<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-29-26-012420	1/24/2020	<0.0061	U		<0.0098	U		<0.0097	U		0.21			0.013			<0.042	U		<0.0078	U		<0.0078	U	
		VMP-29-26-042320	4/23/2020	<0.0052	U		<0.0083	U		<0.0082	U		0.022			<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-26-042320-DUP	4/23/2020	<0.0052	U		0.0023	J		<0.0082	U		0.021			<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-29-26-072720	7/27/2020	<0.0078	U		<0.0078	U		0.0045	J		0.38			<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-29-26-110220	11/2/2020	<0.0051	U		<0.0082	U		<0.0081	U		0.11			0.00057	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-29-26-012721	1/27/2021	<0.0044	U		<0.0071	U		<0.007	U		0.051			0.00042	J		<0.03	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-29-30-020615	2/6/2015	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	U		0.0059	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-29-30-050615	5/6/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0074		J	<0.0036	U		0.0011	J		<0.006	U	
		VMP-29-30-050615-DUP	5/6/2015	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		0.025		J	<0.0034	U		0.0025	J		<0.0058	U	
		VMP-29-30-080315	8/3/2015	<0.008	U		0.0024	J		0.0037	J		0.0014	J		<0.007	U		<0.0038	U		0.0033	J		<0.0065	U	
		VMP-29-30-103015	10/30/2015	<0.0064	U		0.0021	J		<0.0058	U		<0.0058	U		0.00095	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-29-30-012716	1/27/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0027	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-29-30-050216	5/2/2016	<0.026	U		<0.027	U		<0.024	U		<0.024	U		<0.023	U		<0.012	U		<0.021	U		<0.021	U	
		VMP-29-30-072816	7/28/2016	<0.018	U		<0.018	U		<0.016	U		<0.016	U		0.0043	J		<0.0084	U		0.0049	J		<0.014	U	
		VMP-29-26-110316	11/3/2016	<0.007	U		0.0014	J		0.0077			<0.0064	U		0.0059	J		<0.0033	U		0.2			0.052		
		VMP-29-26-110316-Dup	11/3/2016	<0.0068	U		0.0012	J		0.0079			<0.0062	U		0.0052	J		<0.0032	U		0.2			0.053		
		VMP-29-26-013117	1/31/2017	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-29-26-013117-Dup	1/31/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.00066	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-29-26-050317	5/3/2017	<0.0058	U		<0.0061	U		<0.0054	U		<0.0054	U		<0.0051	J	U	<0.0028	U		0.0052			0.0011	J	
		VMP-29-26-072717	7/27/2017	<0.042	U		<0.044	U		<0.038	U		<0.038	U		0.097			<0.02	U		0.022	J		<0.034	U	
		VMP-29-26-072717-DUP	7/27/2017	<0.04	U		<0.041	U		<0.036	U		<0.036	U		0.1			<0.019	U		0.021	J		<0.032	U	
		VMP-29-26-102717	10/27/2017	<0.006	U		0.0011	J		0.011			0.0068			0.0026	J		<0.0028	U		0.015			0.0053		
		VMP-29-26-102717-DUP	10/27/2017	<0.0058	U		0.0013	J		0.0059			0.0032	J		0.0018	J		<0.0028	U		0.011			0.0038	J	
		VMP-29-26-012518	1/25/2018	<0.0063	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-29-26-041718	4/17/2018	<0.0066	U		0.0018	J		<0.006	J	U	<0.006	U		<0.0057	U		<0.0031	U		0.0045	J		<0.0053	J	U
		VMP-29-26-041718-DUP	4/17/2018	<0.006	U		0.0014	J		<0.0055	J	U	<0.0055	U		0.0014	J		<0.0029	U		0.0051			<0.0049	J	U
		VMP-29-26-072418	7/24/2018	0.0018	J		0.0017	J		<0.0058	U		<0.0058	U		0.0023	J		<0.003	U		0.0015	J		<0.0052	U	
		VMP-29-26-102618	10/26/2018	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	J	U	<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-29-26-102618-DUP	10/26/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	J	U	<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-29-26-012519	1/25/2019	<0.0057	U		<0.0059	U		<0.0052	U		<0.0052	U		0.0026	J		<0.0027	U		0.001	J		<0.0046	U	
		VMP-29-26-012519-DUP	1/25/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0021	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-29-26-050219	5/2/2019	<0.0067	U		0.0011	J		0.0021	J		0.00076	J		0.0039	J		<0.0032	U		0.013			0.0037	J	
		VMP-29-26-073119	7/31/2019	<0.027	U		<0.028	U		<0.024	U		<0.024	U		0.016	J		<0.013	U		<0.022	U		<0.022	U	
		VMP-29-26-102519	10/25/2019	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-29-26-012420	1/24/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.011			<0.0036	U		0.011			0.0029	J	
		VMP-29-26-042320	4/23/2020	<0.0065	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-29-26-042320-DUP	4/23/2020	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-29-26-072720	7/27/2020	<0.0061	U		0.0009	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-29-26-110220	11/2/2020	<0.0064	U		0.0017	J		<0.0058	U		<0.0058	U		0.0043	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-29-26-012721	1/27/2021	<0.0055	U		0.0014	J		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	0.038			0.025			<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.057		
		VMP-30-10-050515	5/5/2015	0.04			0.0019	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0029	J		0.046		
		VMP-30-10-072715	7/27/2015	0.065			0.028			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0045	J		0.14		
		VMP-30-10-103015	10/30/2015	0.13			0.003	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.3		
		VMP-30-10-020416	2/4/2016	0.024	J		0.0019	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.042		
		VMP-30-10-050216	5/2/2016	0.044			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.14		
		VMP-30-10-072816	7/28/2016	1.1			0.0032	J		<0.037	U		<0.057	U		<0.21	U		<0.012	U		<0.052	U		3.8		
		VMP-30-10-110316	11/3/2016	0.043			0.0044			<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0056	J		0.11		
		VMP-30-10-013117	1/31/2017	0.0082	J		0.00072	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0052	J		0.0072	J	
		VMP-30-10-050217	5/2/2017	0.028	J		0.00084	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		0.044		
		VMP-30-10-072717	7/27/2017	0.92			0.012			<0.02	U		<0.031	U		<0.12	U		<0.0067	U		0.15			3.6		
		VMP-30-10-102717	10/27/2017	0.013	J		0.00088	J		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.023		
		VMP-30-10-012518	1/25/2018	0.022	J		0.0046			<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.014		
		VMP-30-10-041718	4/17/2018	0.03			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.03		
		VMP-30-10-072418	7/24/2018	0.07			0.001	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		0.25		
		VMP-30-10-102618	10/26/2018	0.042			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.052		
		VMP-30-10-012519	1/25/2019	0.0098	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0028	J	
		VMP-30-10-050219	5/2/2019	0.1			<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0039	J		0.046		
		VMP-30-10-073119	7/31/2019	0.06			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.17		
		VMP-30-10-102519	10/25/2019	0.017	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.037		
		VMP-30-10-012420	1/24/2020	0.019	J		0.015			<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.035		
		VMP-30-10-042320	4/23/2020	0.02	J	J	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.028		
		VMP-30-10-072720	7/27/2020	0.035			<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		0.0064	J	
		VMP-30-10-110220	11/2/2020	0.04			0.00086	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.011	J		0.042		
		VMP-30-10-012721	1/27/2021	0.015	J		0.00046	J		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		0.014		
		VMP-30-10-012721-DUP	1/27/2021	0.013	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		0.016		
	18 ft	VMP-30-20-020615	2/6/2015	0.025	J		0.058			<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0057	J		0.022		
		VMP-30-20-050515	5/5/2015	0.079			0.012			<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0046	J		0.18		
		VMP-30-20-072715	7/27/2015	0.99			0.064			<0.022	U		<0.034	U		<0.13	U		<0.0073	U		<0.031	U		2.8		
		VMP-30-20-103015	10/30/2015	0.083			0.049			<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.091		
		VMP-30-20-012716	1/27/2016	0.019	J		0.0068			<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		0.011	J		0.0066	J	
		VMP-30-20-050216	5/2/2016	0.0083	J		0.0052			<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		0.015	J	
		VMP-30-20-072816	7/28/2016	1.3			0.12			<0.041	U		<0.063	U		<0.24	U		<0.013	U		<0.058	U		4.4		
		VMP-30-18-110316	11/3/2016	0.052			0.013			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0052	J		0.057		
		VMP-30-18-013117	1/31/2017	0.012	J		0.003	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.015			0.0057	J	
		VMP-30-18-050217	5/2/2017	0.022	J		0.0016	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0025	J		0.025		
		VMP-30-18-072717	7/27/2017	1.3			0.09			<0.064	U		<0.098	U		<0.37	U		<0.021	U		<0.09	U		5.6		
		VMP-30-18-102717	10/27/2017	0.016	J		0.0036	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0048	J		0.026		
		VMP-30-18-012518	1/25/2018	0.026			0.034			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0064	J		0.023		
		VMP-30-18-012518-DUP	1/25/2018	0.018	J		0.036			<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.022		
		VMP-30-18-041718	4/17/2018	0.018	J		0.0023	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0046	J		0.018		
		VMP-30-18-072418	7/24/2018	0.14			0.0096			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		0.48		
		VMP-30-18-102618	10/26/2018	0.05			0.011			<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		0.12		
		VMP-30-18-012519	1/25/2019	0.0071	J		0.00085	J		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		0.0031	J	
		VMP-30-18-050219	5/2/2019	0.025	J		0.0021	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.011	J		0.024		
		VMP-30-18-073119	7/31/2019	0.095			0.0073			<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.28		
		VMP-30-18-102519	10/25/2019	0.018	J		0.0032	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.02		
		VMP-30-18-012420	1/24/2020	0.011	J		0.0027	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-30-18-042320	4/23/2020	0.0098	J		0.0016	J		<0.0081	U		<0.012	U		0.0045	J		<0.0027	U		<0.012	U		0.0067	J	
		VMP-30-18-072720	7/27/2020	3.4			0.007	J		<0.034	U		<0.053	U		<0.2	U		<0.011	U		<0.049	U		10		
		VMP-30-18-110220	11/2/2020	0.016	J		0.0022	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.013			0.01	J	
		VMP-30-18-012721	1/27/2021	0.012	J		0.0012	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.007	J		0.0079	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	0.003	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-30-10-050515	5/5/2015	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-30-10-072715	7/27/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		0.0032	J		<0.0067	U	
		VMP-30-10-103015	10/30/2015	0.0073	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		0.0026	J		<0.0065	U	
		VMP-30-10-020416	2/4/2016	0.0013	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-30-10-050216	5/2/2016	0.0032	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U	UJ	<0.0067	U	
		VMP-30-10-072816	7/28/2016	0.056	J		<0.035	U		<0.025	U		<0.047	U		<0.058	U		<0.027	U		<0.11	U		<0.028	U	
		VMP-30-10-110316	11/3/2016	0.007	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-30-10-013117	1/31/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		0.0017	J		<0.025	U		<0.0062	U	
		VMP-30-10-050217	5/2/2017	0.0031	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-30-10-072717	7/27/2017	0.048			<0.019	U		<0.014	U		<0.026	U		<0.032	U		<0.015	U		<0.062	U		<0.016	U	
		VMP-30-10-102717	10/27/2017	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-30-10-012518	1/25/2018	0.012	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	J	U	<0.022	U		<0.0056	U	
		VMP-30-10-041718	4/17/2018	0.0043	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-30-10-072418	7/24/2018	0.012	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-30-10-102618	10/26/2018	0.0036	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0029	J		<0.024	U		<0.006	U	
		VMP-30-10-012519	1/25/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0033	J		<0.024	U		<0.0062	U	
		VMP-30-10-050219	5/2/2019	0.004	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		0.0022	J		<0.0062	U	
		VMP-30-10-073119	7/31/2019	0.0095	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-30-10-102519	10/25/2019	0.0037	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		0.0036	J		<0.026	U		<0.0064	U	
		VMP-30-10-012420	1/24/2020	0.0039	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		0.0016	J		<0.026	U		<0.0066	U	
		VMP-30-10-042320	4/23/2020	0.0044	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.0016	J		<0.024	U		<0.0062	U	
		VMP-30-10-072720	7/27/2020	0.0044	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-30-10-110220	11/2/2020	0.0035	J		<0.0074	U		0.00064	J		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-30-10-012721	1/27/2021	0.0016	J		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-30-10-012721-DUP	1/27/2021	0.0018	J		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U	UJ	<0.0057	U	
	18 ft	VMP-30-20-020615	2/6/2015	0.012	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-30-20-050515	5/5/2015	0.0049	J		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-30-20-072715	7/27/2015	0.04	J		<0.021	U		<0.015	U		<0.028	U		<0.035	U		<0.016	U		0.0068	J		<0.017	U	
		VMP-30-20-103015	10/30/2015	0.023			<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-30-20-012716	1/27/2016	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-30-20-050216	5/2/2016	0.0051	J		<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U	UJ	<0.0078	U	
		VMP-30-20-072816	7/28/2016	0.084			<0.038	U		<0.028	U		<0.052	U		<0.064	U		<0.03	U		<0.12	U		<0.032	U	
		VMP-30-18-110316	11/3/2016	0.012	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		0.0015	J		<0.027	U		<0.0068	U	
		VMP-30-18-013117	1/31/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-30-18-050217	5/2/2017	0.0033	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-30-18-072717	7/27/2017	0.11	J		<0.06	U		<0.044	U		<0.081	U		<0.1	U		<0.046	U		<0.2	U		<0.049	U	
		VMP-30-18-102717	10/27/2017	0.0052	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		0.00092	J		<0.025	U		<0.0062	U	
		VMP-30-18-012518	1/25/2018	0.013	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	J	U	<0.023	U		<0.0058	U	
		VMP-30-18-012518-DUP	1/25/2018	0.0093	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		0.0019	J		<0.023	U		<0.0058	U	
		VMP-30-18-041718	4/17/2018	0.0061	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-30-18-072418	7/24/2018	0.033			<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-30-18-102618	10/26/2018	0.013	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		0.0013	J		<0.022	U		<0.0055	U	
		VMP-30-18-012519	1/25/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		0.0028	J		<0.022	U		<0.0054	U	
		VMP-30-18-050219	5/2/2019	0.0046	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-30-18-073119	7/31/2019	0.015	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		0.0022	J		<0.0065	U	
		VMP-30-18-102519	10/25/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-30-18-012420	1/24/2020	0.0035	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-30-18-042320	4/23/2020	0.0042	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0016	J		<0.025	U		<0.0063	U	
		VMP-30-18-072720	7/27/2020	0.23			<0.032	U		<0.024	U		<0.044	U		<0.054	U		<0.025	U		0.01	J		<0.027	U	
		VMP-30-18-110220	11/2/2020	0.0047	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-30-18-012721	1/27/2021	0.0019	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	0.002	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0029	J		<0.0054	U		<0.0054	U	
		VMP-30-10-050515	5/5/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0021	J		<0.0047	U		<0.0047	U	
		VMP-30-10-072715	7/27/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-30-10-103015	10/30/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	J	U	0.003	J		<0.0051	U		<0.0051	U	
		VMP-30-10-020416	2/4/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0023	J		<0.0053	U		<0.0053	U	
		VMP-30-10-050216	5/2/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-30-10-072816	7/28/2016	<0.019	U		<0.042	U		<0.033	U		<0.033	U		<0.033	U		<0.027	U		<0.022	U		<0.022	U	
		VMP-30-10-110316	11/3/2016	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-30-10-013117	1/31/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0047	J		<0.0048	U		<0.0048	U	
		VMP-30-10-050217	5/2/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-30-10-072717	7/27/2017	<0.01	U		<0.023	U		<0.018	U		<0.018	U		<0.018	U		<0.015	U		<0.012	U		<0.012	U	
		VMP-30-10-102717	10/27/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0024	J		<0.0047	U		<0.0047	U	
		VMP-30-10-012518	1/25/2018	0.0012	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		0.0029	J		<0.0044	U		<0.0044	U	
		VMP-30-10-041718	4/17/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		0.00094	J		0.0028	J		<0.0048	U		<0.0048	U	
		VMP-30-10-072418	7/24/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0049	U		<0.0049	U	
		VMP-30-10-102618	10/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0025	J		<0.0047	U		<0.0047	U	
		VMP-30-10-012519	1/25/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-30-10-050219	5/2/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-30-10-073119	7/31/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-30-10-102519	10/25/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0027	J		<0.005	U		<0.005	U	
		VMP-30-10-012420	1/24/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0063	U		<0.0051	U		<0.0051	U	
		VMP-30-10-042320	4/23/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-30-10-072720	7/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0049	U		<0.0049	U	
		VMP-30-10-110220	11/2/2020	<0.0041	U		<0.0091	U		0.0021	J		<0.0071	U		0.0013	J		0.003	J		<0.0048	U		<0.0048	U	
		VMP-30-10-012721	1/27/2021	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0027	J		<0.0043	U		<0.0043	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0025	J		<0.0044	U		<0.0044	U	
	18 ft	VMP-30-20-020615	2/6/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0036	J		<0.0051	U		<0.0051	U	
		VMP-30-20-050515	5/5/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0028	J		<0.0054	U		<0.0054	U	
		VMP-30-20-072715	7/27/2015	<0.011	U		<0.025	U		<0.02	U		<0.02	U		<0.02	U		<0.016	U		<0.013	U		<0.013	U	
		VMP-30-20-103015	10/30/2015	0.0036	J		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0032	J		<0.0059	U		<0.0059	U	
		VMP-30-20-012716	1/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0032	J		<0.0054	U		<0.0054	U	
		VMP-30-20-050216	5/2/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		<0.0074	U		<0.0061	U		<0.0061	U	
		VMP-30-20-072816	7/28/2016	<0.021	U		<0.047	U		<0.037	U		<0.037	U		<0.037	U		<0.03	U		<0.025	U		<0.025	U	
		VMP-30-18-110316	11/3/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0025	J		<0.0053	U		<0.0053	U	
		VMP-30-18-013117	1/31/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0021	J		<0.005	U		<0.005	U	
		VMP-30-18-050217	5/2/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-30-18-072717	7/27/2017	<0.033	U		<0.073	U		<0.057	U		<0.057	U		<0.057	U		<0.047	U		<0.038	U		<0.038	U	
		VMP-30-18-102717	10/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0031	J		<0.0049	U		<0.0049	U	
		VMP-30-18-012518	1/25/2018	0.0013	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0038	J		<0.0045	U		<0.0045	U	
		VMP-30-18-012518-DUP	1/25/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.003	J		<0.0045	U		<0.0045	U	
		VMP-30-18-041718	4/17/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	J	U	0.0031	J		<0.005	U		<0.005	U	
		VMP-30-18-072418	7/24/2018	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.003	J		<0.0052	U		<0.0052	U	
		VMP-30-18-102618	10/26/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0028	J		<0.0043	U		<0.0043	U	
		VMP-30-18-012519	1/25/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		0.003	J		<0.0042	U		<0.0042	U	
		VMP-30-18-050219	5/2/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.002	J		<0.0049	U		<0.0049	U	
		VMP-30-18-073119	7/31/2019	<0.0043	U		<0.0096	U		0.0014	J		0.0016	J		0.0017	J		0.0024	J		<0.005	U		0.0017	J	
		VMP-30-18-102519	10/25/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0025	J		<0.0051	U		<0.0051	U	
		VMP-30-18-012420	1/24/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-30-18-042320	4/23/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		0.0024	J		0.0023	J		<0.0049	U		<0.0049	U	
		VMP-30-18-072720	7/27/2020	<0.018	U		<0.04	U		<0.031	U		<0.031	U		<0.031	U		0.0022	J		<0.021	U		<0.021	U	
		VMP-30-18-110220	11/2/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0028	J		<0.0047	U		<0.0047	U	
		VMP-30-18-012721	1/27/2021	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-30-10-050515	5/5/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-30-10-072715	7/27/2015	<0.0052	U		<0.0052	U		<0.0052	U		0.0028	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-30-10-103015	10/30/2015	<0.005	U		<0.005	U		<0.005	U		0.005	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-30-10-020416	2/4/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-30-10-050216	5/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-30-10-072816	7/28/2016	<0.022	U		<0.022	U		<0.022	U		<0.19	U		<0.025	U		<0.025	U		<0.025	U		<0.079	U	
		VMP-30-10-110316	11/3/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-30-10-013117	1/31/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-10-050217	5/2/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-30-10-072717	7/27/2017	<0.012	U		<0.012	U		<0.012	U		<0.1	U		<0.014	U		<0.014	U		<0.014	U		<0.044	U	
		VMP-30-10-102717	10/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-30-10-012518	1/25/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		0.0014	J		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-30-10-041718	4/17/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-10-072418	7/24/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-30-10-102618	10/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-30-10-012519	1/25/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-10-050219	5/2/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-10-073119	7/31/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-30-10-102519	10/25/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-10-012420	1/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-30-10-042320	4/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-10-072720	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		0.0022	J	
		VMP-30-10-110220	11/2/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-10-012721	1/27/2021	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0044	U		<0.0044	U		<0.0044	U		0.00095	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
	18 ft	VMP-30-20-020615	2/6/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-30-20-050515	5/5/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-30-20-072715	7/27/2015	<0.013	U		<0.013	U		<0.013	U		<0.11	U		<0.015	U		<0.015	U		<0.015	U		<0.047	U	
		VMP-30-20-103015	10/30/2015	<0.0057	U		<0.0057	U		<0.0057	U		0.0035	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-30-20-012716	1/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		0.0022	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-30-20-050216	5/2/2016	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-30-20-072816	7/28/2016	<0.024	U		<0.024	U		<0.024	U		<0.21	U		<0.028	U		<0.028	U		<0.028	U		<0.088	U	
		VMP-30-18-110316	11/3/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-30-18-013117	1/31/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-18-050217	5/2/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-18-072717	7/27/2017	<0.038	U		<0.038	U		<0.038	U		<0.33	U		<0.044	U		<0.043	U		<0.043	U		<0.14	U	
		VMP-30-18-102717	10/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-30-18-012518	1/25/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-30-18-012518-DUP	1/25/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-30-18-041718	4/17/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-18-072418	7/24/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-30-18-102618	10/26/2018	<0.0042	U		<0.0042	U		<0.0042	U		0.0044	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-30-18-012519	1/25/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-30-18-050219	5/2/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-30-18-073119	7/31/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-30-18-102519	10/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-30-18-012420	1/24/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-30-18-042320	4/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		0.0021	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-30-18-072720	7/27/2020	<0.02	U		<0.02	U		<0.02	U		<0.18	U		<0.024	U		<0.023	U		<0.023	U		<0.074	U	
		VMP-30-18-110220	11/2/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-30-18-012721	1/27/2021	<0.0047	U		<0.0047	U		<0.0047	U		0.0023	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	0.017			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		0.0022	J	
		VMP-30-10-050515	5/5/2015	0.013			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		0.001	J	
		VMP-30-10-072715	7/27/2015	<0.01		U	<0.0056	U		0.0016	J		<0.01	U		<0.0091	U		0.0014	J		<0.055	U		<0.0046	U	
		VMP-30-10-103015	10/30/2015	0.018			0.0015	J		0.0021	J		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-30-10-020416	2/4/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-30-10-050216	5/2/2016	0.0069	J		0.0018	J		0.0015	J		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-30-10-072816	7/28/2016	<0.041	U		<0.024	U		<0.027	U		<0.042	U		<0.038	U		<0.022	U		<0.23	U		<0.019	U	
		VMP-30-10-110316	11/3/2016	<0.0095	J	U	0.059			0.014			<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-30-10-013117	1/31/2017	0.012			0.0043	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-10-050217	5/2/2017	0.02			0.00075	J		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-30-10-072717	7/27/2017	<0.023	U		<0.013	U		<0.015	U		<0.023	U		<0.021	U		<0.012	U		<0.13	U		0.006	J	
		VMP-30-10-102717	10/27/2017	<0.0087	U		0.012			0.0062			<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-30-10-012518	1/25/2018	0.0099			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		0.003	J		<0.046	U		<0.0038	U	
		VMP-30-10-041718	4/17/2018	0.0072	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-30-10-072418	7/24/2018	0.016			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-10-102618	10/26/2018	0.0081	J		0.001	J		0.0014	J		<0.009	U		<0.0082	U		0.0018	J		<0.05	U		0.003	J	
		VMP-30-10-012519	1/25/2019	0.006	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-10-050219	5/2/2019	0.0091			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-10-073119	7/31/2019	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-30-10-102519	10/25/2019	0.0079	J	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-30-10-012420	1/24/2020	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-30-10-042320	4/23/2020	0.0031	J	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-10-072720	7/27/2020	0.0043	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-10-110220	11/2/2020	0.021			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		0.0023	J	
		VMP-30-10-012721	1/27/2021	0.0074	J	J	<0.0046	U		<0.0052	U		0.00062	J		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-30-10-012721-DUP	1/27/2021	0.003	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
	18 ft	VMP-30-20-020615	2/6/2015	0.017			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-30-20-050515	5/5/2015	0.015			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		0.00073	J	
		VMP-30-20-072715	7/27/2015	0.015	J		<0.014	U		<0.016	U		<0.025	U		<0.023	U		0.0054	J		<0.14	U		<0.012	U	
		VMP-30-20-103015	10/30/2015	0.045			0.0013	J		<0.0071	U		<0.011	U		<0.01	U		0.006			<0.062	U		0.0061		
		VMP-30-20-012716	1/27/2016	0.006	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		0.0028	J	
		VMP-30-20-050216	5/2/2016	0.031			<0.0065	U		0.0016	J		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-30-20-072816	7/28/2016	<0.046	U		<0.026	U		<0.03	U		<0.047	U		<0.043	U		<0.025	U		<0.26	U		<0.021	U	
		VMP-30-18-110316	11/3/2016	<0.0099	J	U	0.058			0.014			<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-30-18-013117	1/31/2017	0.0057	J		0.0041	J		0.0017	J		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-30-18-050217	5/2/2017	0.046			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-18-072717	7/27/2017	<0.072	U		<0.041	U		<0.047	U		<0.073	U		<0.066	U		<0.039	U		<0.4	U		<0.033	U	
		VMP-30-18-102717	10/27/2017	<0.0091	U		0.0092			0.006			<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-18-012518	1/25/2018	0.0099			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		0.0022	J		<0.048	U		<0.0039	U	
		VMP-30-18-012518-DUP	1/25/2018	0.0043	J		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-30-18-041718	4/17/2018	0.012			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-30-18-072418	7/24/2018	0.013			<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-30-18-102618	10/26/2018	0.0068	J		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		0.0012	J	
		VMP-30-18-012519	1/25/2019	0.0055	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-30-18-050219	5/2/2019	<0.0091	U		0.0016	J		0.0012	J		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-18-073119	7/31/2019	0.012			0.0019	J		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		0.0027	J	
		VMP-30-18-102519	10/25/2019	<0.0096	U	UJ	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-30-18-012420	1/24/2020	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-30-18-042320	4/23/2020	0.0046	J	J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-30-18-072720	7/27/2020	<0.039	U		<0.022	U		<0.025	U		<0.039	U		<0.036	U		<0.021	U		<0.22	U		<0.018	U	
		VMP-30-18-110220	11/2/2020	0.016			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		0.0021	J	
		VMP-30-18-012721	1/27/2021	0.008	J	J	<0.0051	U		<0.0058	U		0.00071	J		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	<0.022	U		0.007	J		<0.0066	U		<0.0055	U		<0.0048	U					0.029			<0.0066	U	
		VMP-30-10-050515	5/5/2015	0.0026	J		0.0096	J		<0.0057	U		0.0026	J		<0.0042	U					0.044			<0.0057	U	
		VMP-30-10-072715	7/27/2015	0.0089	J		0.015			0.0056	J		0.004	J		<0.0047	U					0.011	J		<0.0064	U	
		VMP-30-10-103015	10/30/2015	0.018	J	J	0.0032	J		0.0031	J		0.0019	J		<0.0045	U					0.023			<0.0062	U	
		VMP-30-10-020416	2/4/2016	0.003	J		<0.016	U		0.0028	J		<0.0054	U		<0.0048	U					0.0043	J		<0.0065	U	
		VMP-30-10-050216	5/2/2016	<0.021	U		0.0034	J		<0.0063	U		<0.0053	U		<0.0046	U					0.0014	J		<0.0063	U	
		VMP-30-10-072816	7/28/2016	<0.09	U		<0.065	U		<0.027	U		<0.022	U		<0.079	U					0.0089	J		<0.027	U	
		VMP-30-10-110316	11/3/2016	<0.021	U		0.005	J		0.0021	J		0.0026	J		<0.018	U		0.0026	J	J	0.0056	J		0.0042	J	
		VMP-30-10-013117	1/31/2017	<0.02	U		0.0042	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-30-10-050217	5/2/2017	0.0046	J		0.0096	J		0.0027	J		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-30-10-072717	7/27/2017	<0.049	U		0.14			<0.015	U		<0.012	U		<0.044	U					<0.03	U		<0.015	U	
		VMP-30-10-102717	10/27/2017	<0.019	U		0.0037	J		<0.0057	U		0.0025	J		<0.017	U					0.0026	J		<0.0057	U	
		VMP-30-10-012518	1/25/2018	<0.018	U		0.079			<0.0053	U		<0.0044	U		<0.016	U					0.022			<0.0053	U	
		VMP-30-10-041718	4/17/2018	<0.019	U		0.0057	J		<0.0058	U		<0.0048	U		<0.017	U					0.0032	J		<0.0058	U	
		VMP-30-10-072418	7/24/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-30-10-102618	10/26/2018	<0.019	U		0.0066	J		<0.0058	U		<0.0048	U		<0.017	U					0.0021	J		0.0018	J	
		VMP-30-10-012519	1/25/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-30-10-050219	5/2/2019	<0.02	U		0.004	J		<0.0059	U		<0.0049	U		<0.017	U					0.024			<0.0059	U	
		VMP-30-10-073119	7/31/2019	<0.02	U		0.01	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-30-10-102519	10/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					0.0038	J		<0.0061	U	
		VMP-30-10-012420	1/24/2020	<0.021	U		0.0028	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-30-10-042320	4/23/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U	J	<0.0058	U	
		VMP-30-10-072720	7/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	J	U	0.0006	J	
		VMP-30-10-110220	11/2/2020	0.0011	J		0.0076	J		0.0061			<0.0048	U		<0.017	U					0.026			<0.0058	U	
		VMP-30-10-012721	1/27/2021	<0.017	U		0.0026	J		0.002	J		<0.0043	U		<0.015	U					0.0062	J		0.0045	J	
		VMP-30-10-012721-DUP	1/27/2021	<0.018	U		<0.013	U		0.0022	J		<0.0045	U		<0.016	U					0.0063	J		0.0047	J	
	18 ft	VMP-30-20-020615	2/6/2015	<0.021	U		0.021			<0.0062	U		<0.0052	U		<0.0045	U					0.02			<0.0062	U	
		VMP-30-20-050515	5/5/2015	0.0036	J		0.0058	J		<0.0066	J	U	0.0029	J		<0.0048	U					0.024			<0.0066	U	
		VMP-30-20-072715	7/27/2015	0.013	J		0.019	J		0.0097	J		0.01	J		<0.012	U					0.012	J		<0.016	U	
		VMP-30-20-103015	10/30/2015	0.016	J	J	0.013	J		0.0029	J		0.0029	J		<0.0052	U					0.02			<0.0071	U	
		VMP-30-20-012716	1/27/2016	0.00093	J		0.0089	J		0.0023	J		<0.0054	J	U	<0.0048	U					0.023			0.0031	J	
		VMP-30-20-050216	5/2/2016	<0.025	U		0.0023	J		<0.0074	U		0.0049	J		<0.0054	U					<0.015	U		<0.0074	U	
		VMP-30-20-072816	7/28/2016	<0.1	U		<0.072	U		<0.03	U		0.017	J		<0.088	U					<0.06	U		<0.03	U	
		VMP-30-18-110316	11/3/2016	<0.021	U		0.0054	J		0.002	J		0.003	J		<0.019	U		0.0013	J	J	0.0068	J		0.0029	J	
		VMP-30-18-013117	1/31/2017	<0.02	U		0.0067	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-30-18-050217	5/2/2017	0.0053	J		0.01	J		0.0039	J		<0.0049	U		<0.017	U					0.0058	J		<0.0059	U	
		VMP-30-18-072717	7/27/2017	<0.16	U		<0.11	U		<0.047	U		<0.039	U		<0.14	U					<0.093	U		<0.047	U	
		VMP-30-18-102717	10/27/2017	<0.02	U		0.0029	J		<0.0059	U		<0.0049	U		<0.017	U					0.0025	J		<0.0059	U	
		VMP-30-18-012518	1/25/2018	<0.018	U		0.044		J	<0.0055	U		<0.0046	U		<0.016	U					0.0098	J		<0.0055	U	
		VMP-30-18-012518-DUP	1/25/2018	<0.018	U		0.0058	J	J	<0.0055	U		<0.0046	U		<0.016	U					0.0024	J		<0.0055	U	
		VMP-30-18-041718	4/17/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-30-18-072418	7/24/2018	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		0.0019	J	
		VMP-30-18-102618	10/26/2018	0.0039	J		<0.013	U		0.0029	J		<0.0044	U		<0.015	U					<0.01	J	U	<0.0053	U	
		VMP-30-18-012519	1/25/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					0.0022	J		<0.0052	U	
		VMP-30-18-050219	5/2/2019	<0.02	U		0.011	J		0.0063			<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-30-18-073119	7/31/2019	<0.02	U		0.0068	J		0.0033	J		<0.0051	U		<0.018	U					0.011	J		0.0061	J	
		VMP-30-18-102519	10/25/2019	<0.021	U		0.0026	J		<0.0062	U		<0.0052	U		<0.018	U					0.0021	J		<0.0062	U	
		VMP-30-18-012420	1/24/2020	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					0.0035	J		<0.0073	U	
		VMP-30-18-042320	4/23/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					0.0058	J	J	0.00062	J	
		VMP-30-18-072720	7/27/2020	<0.084	U		<0.061	U		<0.025	U		0.011	J		<0.074	U					<0.051	U		<0.025	U	
		VMP-30-18-110220	11/2/2020	<0.019	U		0.008	J		0.003	J		<0.0048	U		<0.017	U					0.016			0.00096	J	
		VMP-30-18-012721	1/27/2021	<0.019	U		0.0032	J		0.0013	J		<0.0048	U		<0.017	U					0.016			<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	<0.0057	U		<0.0092	U		<0.0091	U		0.031			<0.0062		U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-30-10-050515	5/5/2015	<0.005	U		<0.008	U		<0.0079	U		0.02			<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-30-10-072715	7/27/2015	<0.0055	U		<0.0089	U		<0.0088	U		0.073			0.0064			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-30-10-103015	10/30/2015	<0.0053	U		<0.0086	U		<0.0085	U		0.13			0.0058			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-30-10-020416	2/4/2016	<0.0056	U		<0.0091	U		<0.009	U		0.021			0.019			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-30-10-050216	5/2/2016	<0.0055	U		<0.0088	U		<0.0088	U		0.093			0.0096			<0.038	U		<0.007	U		<0.007	U	
		VMP-30-10-072816	7/28/2016	<0.023	U		<0.038	U		<0.037	U		2.6			<0.021	U		<0.16	U		<0.03	U		<0.03	U	
		VMP-30-10-110316	11/3/2016	<0.0054	U		<0.0087	U		<0.0086	U		0.07			0.011			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-30-10-013117	1/31/2017	<0.0051	U		<0.0082	U		<0.0081	U		0.0051			0.0013	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-30-10-050217	5/2/2017	<0.0052	U		<0.0084	U		<0.0083	U		0.029			0.00079	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-10-072717	7/27/2017	<0.013	U		<0.021	U		<0.02	U		2.7			0.0054	J		<0.09	U		<0.016	U		<0.016	U	
		VMP-30-10-102717	10/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		0.013			0.0033	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-30-10-012518	1/25/2018	<0.0046	U		<0.0074	U		0.0046	J		0.02			0.059			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-30-10-041718	4/17/2018	<0.005	U		<0.0081	U		<0.008	U		0.044			<0.0044	J	U	<0.035	U		<0.0064	U		<0.0064	U	
		VMP-30-10-072418	7/24/2018	<0.0051	U		<0.0083	U		<0.0082	U		0.15			<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-10-102618	10/26/2018	<0.005	U		<0.008	U		0.0013	J		0.043			0.0045			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-30-10-012519	1/25/2019	<0.0051	U		<0.0082	U		0.0021	J		0.0014	J		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-30-10-050219	5/2/2019	<0.0051	U		<0.0082	U		<0.0081	U		0.045			0.00073	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-30-10-073119	7/31/2019	<0.0052	U		<0.0083	U		<0.0082	U		0.11			0.0021	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-10-102519	10/25/2019	<0.0053	U		<0.0085	U		<0.0084	J	U	0.014			<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-30-10-012420	1/24/2020	<0.0054	U		<0.0087	U		<0.0086	U		0.03			0.00054	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-30-10-042320	4/23/2020	<0.0051	U		<0.0082	U		<0.0081	U		0.056			<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-30-10-072720	7/27/2020	<0.0082	U		<0.0083	U		<0.0082	U		0.0072			<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-10-110220	11/2/2020	<0.005	U		<0.0081	U		<0.008	U		0.02			0.0022	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-30-10-012721	1/27/2021	<0.0045	U		<0.0073	U		0.0018	J		0.017			0.0012	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0047	U		<0.0076	U		0.0059	J		0.015			0.0014	J		0.0047	J		<0.006	U		<0.006	U	
	18 ft	VMP-30-20-020615	2/6/2015	<0.0054	U		<0.0086	U		<0.0085	U		0.22			0.015			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-30-20-050515	5/5/2015	<0.0057	U		<0.0092	U		<0.0091	U		0.1			0.0009	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-30-20-072715	7/27/2015	<0.014	U		<0.022	U		<0.022	U		3.4			0.004	J		<0.098	U		<0.018	U		<0.018	U	
		VMP-30-20-103015	10/30/2015	<0.0062	U		<0.01	U		<0.0098	U		1.1			0.0052	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-30-20-012716	1/27/2016	<0.0056	U		<0.0091	U		<0.009	U		0.022			<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-30-20-050216	5/2/2016	<0.0064	U		<0.01	U		<0.01	U		0.14			0.0047	J		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-30-20-072816	7/28/2016	<0.026	U		<0.042	U		<0.041	U		3.5			0.0047	J		<0.18	U		<0.033	U		<0.033	U	
		VMP-30-18-110316	11/3/2016	<0.0056	U		<0.009	U		<0.0089	U		0.4			0.011			<0.039	U		<0.0071	U		<0.0071	U	
		VMP-30-18-013117	1/31/2017	<0.0053	U		<0.0085	U		<0.0084	U		0.0043			0.0021	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-30-18-050217	5/2/2017	<0.0051	U		<0.0082	U		<0.0081	U		0.025			0.0026	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-30-18-072717	7/27/2017	<0.04	U		<0.065	U		<0.064	U		5.3			<0.036	U		<0.28	U		<0.052	U		<0.052	U	
		VMP-30-18-102717	10/27/2017	<0.0051	U		<0.0083	U		<0.0082	U		0.042			0.0018	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-18-012518	1/25/2018	<0.0047	U		<0.0076	U		0.0013	J		0.07			0.026		J	<0.033	U		<0.0061	U		<0.0061	U	
		VMP-30-18-012518-DUP	1/25/2018	<0.0047	U		<0.0076	U		0.0016	J		0.075			0.0007	J	J	<0.033	U		<0.0061	U		<0.0061	U	
		VMP-30-18-041718	4/17/2018	<0.0053	U		<0.0085	U		<0.0084	U		0.085			<0.0046	U		0.0033	J		<0.0067	U		<0.0067	U	
		VMP-30-18-072418	7/24/2018	<0.0055	U		<0.0089	U		0.0016	J		0.33			0.0011	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-30-18-102618	10/26/2018	<0.0046	U		<0.0073	U		<0.0072	U		0.18			0.0019	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-30-18-012519	1/25/2019	<0.0045	U		<0.0072	U		<0.0071	U		0.0027	J		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-30-18-050219	5/2/2019	0.0022	J		<0.0083	U		<0.0082	U		0.043			0.0064			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-18-073119	7/31/2019	<0.0053	U		<0.0086	U		<0.0085	U		0.16			0.0056			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-30-18-102519	10/25/2019	<0.0054	U		<0.0087	U		<0.0086	U		0.026			0.0016	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-30-18-012420	1/24/2020	<0.0063	U		<0.01	U		<0.01	U		0.026			0.00085	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-30-18-042320	4/23/2020	<0.0052	U		<0.0083	U		<0.0082	U		0.015			0.001	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-18-072720	7/27/2020	<0.035	U		<0.035	U		<0.035	U		8.4			<0.019	U		<0.15	U		<0.028	U		<0.028	U	
		VMP-30-18-110220	11/2/2020	<0.005	U		<0.008	U		<0.0079	U		0.038			0.0018	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-30-18-012721	1/27/2021	<0.005	U		<0.0081	U		<0.008	U		0.011			0.0018	J		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-30	10 ft	VMP-30-10-020615	2/6/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.006	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-30-10-050515	5/5/2015	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-30-10-072715	7/27/2015	<0.007	U		<0.0073	J	U	0.0018	J		<0.0064	U		0.0066			<0.0033	U		0.0045	J		0.0012	J	
		VMP-30-10-103015	10/30/2015	<0.0067	U		0.0015	J		0.003	J		<0.0062	U		<0.0059	U		<0.0032	U		0.0036	J		0.0019	J	
		VMP-30-10-020416	2/4/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-30-10-050216	5/2/2016	<0.0069	U		<0.0072	U		0.003	J		<0.0063	U		<0.006	U		<0.0033	U		0.0076			0.0033	J	
		VMP-30-10-072816	7/28/2016	<0.03	U		<0.031	U		<0.027	U		<0.027	U		<0.026	U		<0.014	U		<0.024	U		<0.024	U	
		VMP-30-10-110316	11/3/2016	<0.0068	U		<0.0071	U		0.02			0.0059	J		0.012			<0.0032	U		0.24			0.077		
		VMP-30-10-013117	1/31/2017	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.017			0.0043	J	
		VMP-30-10-050217	5/2/2017	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.0053	J		<0.0031	U		0.0031	J		0.00085	J	
		VMP-30-10-072717	7/27/2017	<0.016	U		<0.017	U		<0.015	U		<0.015	U		0.73			<0.0077	U		0.0071	J		<0.013	U	
		VMP-30-10-102717	10/27/2017	<0.0062	U		0.0013	J		0.01			0.0034	J		<0.0054	U		<0.003	U		0.055			0.02		
		VMP-30-10-012518	1/25/2018	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-30-10-041718	4/17/2018	<0.0063	U		0.002	J		<0.0058	U	U	<0.0058	U		0.0011	J		<0.003	U		0.0026	J		<0.0051	J	U
		VMP-30-10-072418	7/24/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-30-10-102618	10/26/2018	<0.0063	U		<0.0066	U		0.0017	J		<0.0058	U		0.005	J		<0.003	U		0.003	J		0.0012	J	
		VMP-30-10-012519	1/25/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-30-10-050219	5/2/2019	<0.0064	U		0.00084	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-30-10-073119	7/31/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-30-10-102519	10/25/2019	<0.0067	U		0.0015	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-30-10-012420	1/24/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-30-10-042320	4/23/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-30-10-072720	7/27/2020	<0.0065	U		0.00088	J		<0.0059	U		<0.0059	U		0.0013	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-30-10-110220	11/2/2020	<0.0063	U		0.002	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0009	J		<0.0051	U	
		VMP-30-10-012721	1/27/2021	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		0.006			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-30-10-012721-DUP	1/27/2021	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0055			<0.0028	U		<0.0048	U		<0.0048	U	
	18 ft	VMP-30-20-020615	2/6/2015	<0.0068	J	U	<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.00089	J		<0.0055	U	
		VMP-30-20-050515	5/5/2015	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		0.0014	J		<0.0034	U		0.001	J		<0.0058	U	
		VMP-30-20-072715	7/27/2015	<0.018	U		<0.018	U		<0.016	U		<0.016	U		0.0044	J		<0.0084	U		0.0032	J		<0.014	U	
		VMP-30-20-103015	10/30/2015	<0.0078	U		<0.0081	U		0.0014	J		<0.0071	U		0.0048	J		<0.0037	U		0.0057	J		0.0014	J	
		VMP-30-20-012716	1/27/2016	<0.0071	U		0.0018	J		0.0025	J		<0.0065	U		0.028			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-30-20-050216	5/2/2016	<0.0081	U		<0.0084	U		0.003	J		<0.0074	U		0.0041	J		<0.0038	U		0.0042	J		0.0015	J	
		VMP-30-20-072816	7/28/2016	<0.033	U		<0.034	U		<0.03	U		<0.03	U		<0.028	U		<0.016	U		<0.026	U		<0.026	U	
		VMP-30-18-110316	11/3/2016	<0.007	U		0.0013	J		0.012			0.0042	J		<0.0061	J	U	<0.0033	U		0.22			0.064		
		VMP-30-18-013117	1/31/2017	<0.0067	U		<0.007	U		0.002	J		<0.0061	U		0.00082	J		<0.0032	U		0.018			0.0053	J	
		VMP-30-18-050217	5/2/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0016	J		<0.0052	U	
		VMP-30-18-072717	7/27/2017	<0.051	U		<0.053	U		<0.047	U		<0.047	U		0.016	J		<0.024	U		<0.041	U		<0.041	U	
		VMP-30-18-102717	10/27/2017	<0.0065	U		0.0015	J		0.0063			0.002	J		<0.0056	U		<0.0031	U		0.04			0.013		
		VMP-30-18-012518	1/25/2018	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		0.0017	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-30-18-012518-DUP	1/25/2018	<0.006	U		0.0014	J		<0.0055	U		<0.0055	U		0.0017	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-30-18-041718	4/17/2018	<0.0066	U		0.0016	J		<0.0061	U	U	<0.0061	U		0.0096			<0.0032	U		0.00094	J		<0.0054	U	
		VMP-30-18-072418	7/24/2018	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		0.0018	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-30-18-102618	10/26/2018	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		0.0012	J		<0.0027	U		0.0011	J		<0.0046	U	
		VMP-30-18-012519	1/25/2019	<0.0056	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-30-18-050219	5/2/2019	<0.0065	U		0.0011	J		0.0031	J		<0.0059	U		<0.0056	U		<0.0031	U		0.0048	J		0.0024	J	
		VMP-30-18-073119	7/31/2019	<0.0067	U		<0.007	U		0.0078			<0.0061	U		0.012			<0.0032	U		0.0052	J		0.0026	J	
		VMP-30-18-102519	10/25/2019	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.00082	J		<0.0055	U	
		VMP-30-18-012420	1/24/2020	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0019	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-30-18-042320	4/23/2020	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		0.0016	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-30-18-072720	7/27/2020	<0.028	U		<0.029	U		<0.025	U		<0.025	U		<0.024	U		<0.013	U		<0.022	U		<0.022	U	
		VMP-30-18-110220	11/2/2020	<0.0063	U		0.0021	J		0.00092	J		<0.0058	U		0.0032	J		<0.003	U		0.00093	J		<0.0051	U	
		VMP-30-18-012721	1/27/2021	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.00073	J		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	0.1			0.12			<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.0092	J		0.17		
		VMP-30-30-050515	5/5/2015	0.05			0.035			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.018			0.12		
		VMP-30-30-050515-DUP	5/5/2015	0.049			0.037			<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.022			0.12		
		VMP-30-30-072715	7/27/2015	0.31			0.08			<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		0.0089	J		1.3		
		VMP-30-30-103015	10/30/2015	0.066			0.01			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0053	J		0.088		
		VMP-30-30-012716	1/27/2016	0.16			0.13			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.01	J		0.24		
		VMP-30-30-050216	5/2/2016	0.13			0.024			<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		0.34		
		VMP-30-30-072816	7/28/2016	4.4		J	0.24		J	<0.081	U		<0.12	U		<0.47	U		<0.027	U		<0.12	U		14		
		VMP-30-30-072816-DUP	7/28/2016	3.4		J	0.36		J	<0.064	U		<0.099	U		<0.37	U		<0.021	U		<0.091	U		11		
		VMP-30-26-110316	11/3/2016	0.4			0.07			<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0081	J		1		
		VMP-30-26-013117	1/31/2017	0.19			0.02			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.31		
		VMP-30-26-050217	5/2/2017	0.03			0.0035	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.034		
		VMP-30-26-072717	7/27/2017	0.57			0.058			<0.016	U		<0.025	U		<0.094	U		<0.0054	U		<0.023	U		1.4		
		VMP-30-26-102717	10/27/2017	0.033			0.005			<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.011			0.035		
		VMP-30-26-012518	1/25/2018	0.04			0.1			<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0095	J		0.063		
		VMP-30-26-041718	4/17/2018	0.035			0.0051			<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0079	J		0.054		
		VMP-30-26-072418	7/24/2018	0.36			0.02			<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.76		
		VMP-30-26-072418-DUP	7/24/2018	0.34			0.019			<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		0.76		
		VMP-30-26-102618	10/26/2018	0.17			0.017			<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.27		
		VMP-30-26-012519	1/25/2019	0.0063	J		0.0028	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		0.0052	J	
		VMP-30-26-050219	5/2/2019	0.03			0.0087			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.041			0.055		
		VMP-30-26-073119	7/31/2019	0.097			0.017			<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		0.31		
		VMP-30-26-102519	10/25/2019	0.02	J		0.0065			<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		0.028		
		VMP-30-26-102519-DUP	10/25/2019	0.021	J		0.007			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.01	J		0.026		
		VMP-30-26-012420	1/24/2020	0.02	J		0.0073			<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.016	J	
		VMP-30-26-042320	4/23/2020	0.011	J		0.0024	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		0.0072	J	
		VMP-30-26-072720	7/27/2020	0.064			0.0012	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.15		
		VMP-30-26-110220	11/2/2020	0.04			0.004			<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.011	J		0.016		
		VMP-30-26-012721	1/27/2021	0.014	J		0.0016	J		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0067	J		0.0052	J	
	5 ft	VMP-32-5-021015	2/10/2015	**0.0084**	J		<0.0033	U		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		0.0082	J		<0.012	U	
		VMP-32-5-073115	7/31/2015	**0.028**	J	J	**0.0019**	J	J	<0.0093	U	UJ	<0.014	U	UJ	<0.054	U	UJ	<0.0031	U	UJ	<0.013	U	UJ	**0.0084**	J	J
		VMP-32-5-082415	8/24/2015	**0.02**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-32-5-110415	11/4/2015	**0.023**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0033	U		<0.014	U		**0.0073**	J	
		VMP-32-5-012616	1/26/2016	**0.016**	J		**0.0021**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0072	J		**0.0032**	J	
		VMP-32-5-042716	4/27/2016	**0.014**	J		**0.0019**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.012	J		**0.0072**	J	
		VMP-32-5-072616	7/26/2016	**0.015**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0023**	J	
		VMP-32-5-102716	10/27/2016	**0.018**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0059**	J	
		VMP-32-5-013017	1/30/2017	**0.012**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.032**		
		VMP-32-5-052217	5/22/2017	<0.029	J	U	**0.002**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0053**	J	
		VMP-32-5-072417	7/24/2017	**0.047**			**0.00078**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0074	J		**0.0079**	J	
		VMP-32-5-103117	10/31/2017	**0.018**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0032**	J	
		VMP-32-5-012918	1/29/2018	**0.0076**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-32-5-032818	3/28/2018	**0.019**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0047	J		**0.0033**	J	
		VMP-32-5-041018	4/10/2018	**0.011**	J		**0.00036**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0028**	J	
		VMP-32-5-072318	7/23/2018	**0.043**			**0.00081**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.01**	J	
		VMP-32-5-012319	1/23/2019	**0.032**			<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-32-5-043019	4/30/2019	**0.1**			**0.016**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.016**		
		VMP-32-5-072319	7/23/2019	**0.021**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0036**	J	
		VMP-32-5-072319-DUP	7/23/2019	**0.027**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-32-5-102419	10/24/2019	**0.0078**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0017**	J	
		VMP-32-5-012820	1/28/2020	**0.023**	J		<0.006	U		<0.013	U		<0.02	U		<0.074	U		<0.0042	U		0.0046	J		**0.0063**	J	
		VMP-32-5-042920	4/29/2020	**0.01**	J		**0.00092**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-32-5-072920	7/29/2020	**0.025**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0029**	J	
		VMP-32-5-110420	11/4/2020	**0.018**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0034**	J	
		VMP-32-5-012621	1/26/2021	**0.017**	J		**0.00034**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0015**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	0.01	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-30-30-050515	5/5/2015	0.0056	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-30-30-050515-DUP	5/5/2015	0.0058	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-30-30-072715	7/27/2015	0.055			<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		0.0034	J		<0.0076	U	
		VMP-30-30-103015	10/30/2015	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		0.0038	J		<0.0062	U	
		VMP-30-30-012716	1/27/2016	0.016			<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-30-30-050216	5/2/2016	0.016	J		<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U	UJ	<0.0078	U	
		VMP-30-30-072816	7/28/2016	0.14	J		<0.076	U		<0.056	U		<0.1	U		<0.13	U		<0.059	U		<0.25	U		<0.063	U	
		VMP-30-30-072816-DUP	7/28/2016	0.11	J		<0.06	U		<0.044	U		<0.082	U		<0.1	U		<0.047	U		<0.2	U		<0.05	U	
		VMP-30-26-110316	11/3/2016	0.029			<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-30-26-013117	1/31/2017	0.011	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.0012	J		<0.025	U		<0.0063	U	
		VMP-30-26-050217	5/2/2017	0.0061	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-30-26-072717	7/27/2017	0.045			<0.015	U		<0.011	U		<0.021	U		<0.026	U		<0.012	U		<0.05	U		<0.012	U	
		VMP-30-26-102717	10/27/2017	0.0047	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-30-26-012518	1/25/2018	0.015			<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0018	J		<0.023	U		<0.0058	U	
		VMP-30-26-041718	4/17/2018	0.0068	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-30-26-072418	7/24/2018	0.042			<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-30-26-072418-DUP	7/24/2018	0.041			<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-30-26-102618	10/26/2018	0.023			<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		0.0013	J		<0.023	U		<0.0058	U	
		VMP-30-26-012519	1/25/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		0.0027	J		<0.023	U		<0.0057	U	
		VMP-30-26-050219	5/2/2019	0.011	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-30-26-073119	7/31/2019	0.025			<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-30-26-102519	10/25/2019	0.0093	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-30-26-102519-DUP	10/25/2019	0.0089	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-30-26-012420	1/24/2020	0.03			<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-30-26-042320	4/23/2020	0.0071	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		0.0016	J		<0.023	U		<0.0058	U	
		VMP-30-26-072720	7/27/2020	0.11			<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.00099	J		<0.024	U		<0.0062	U	
		VMP-30-26-110220	11/2/2020	0.01	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-30-26-012721	1/27/2021	0.004	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
	5 ft	VMP-32-5-021015	2/10/2015	<0.013	U		<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U	
		VMP-32-5-073115	7/31/2015	<0.017	J	UJ	<0.0088	U	UJ	<0.0064	U	UJ	<0.012	U	UJ	<0.015	U	UJ	<0.0068	U	UJ	<0.029	U	UJ	<0.0072	U	UJ
		VMP-32-5-082415	8/24/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-5-110415	11/4/2015	<0.019	J	U	<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-32-5-012616	1/26/2016	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-32-5-042716	4/27/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0016**	J		<0.028	U		<0.0071	U	
		VMP-32-5-072616	7/26/2016	**0.0035**	J		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		**0.0056**	J		<0.03	ND,UJ	UJ	<0.0075	U	
		VMP-32-5-102716	10/27/2016	**0.0088**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0031**	J		<0.025	U		<0.0063	U	
		VMP-32-5-013017	1/30/2017	<0.014	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0013**	J		<0.024	U		<0.006	U	
		VMP-32-5-052217	5/22/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0016**	J		<0.025	U		<0.0064	U	
		VMP-32-5-072417	7/24/2017	**0.0086**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-32-5-103117	10/31/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-32-5-012918	1/29/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-32-5-032818	3/28/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-32-5-041018	4/10/2018	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-32-5-072318	7/23/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-32-5-012319	1/23/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-32-5-043019	4/30/2019	**0.0024**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		**0.002**	J		<0.0063	U	
		VMP-32-5-072319	7/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-32-5-072319-DUP	7/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-32-5-102419	10/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-32-5-012820	1/28/2020	<0.024	U		<0.012	U		<0.0087	U		<0.016	U		<0.02	U		<0.0092	U		<0.039	U		<0.0098	U	
		VMP-32-5-042920	4/29/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-5-072920	7/29/2020	**0.0022**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.00074**	J		<0.027	U		<0.0068	U	
		VMP-32-5-110420	11/4/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	ND,UJ	UJ	<0.0067	U	
		VMP-32-5-012621	1/26/2021	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.00041**	J		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0032	J		<0.0056	U		<0.0056	U	
		VMP-30-30-050515	5/5/2015	0.0028	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0022	J		<0.0052	U		<0.0052	U	
		VMP-30-30-050515-DUP	5/5/2015	0.002	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		0.0024	J		<0.0056	U		<0.0056	U	
		VMP-30-30-072715	7/27/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		0.0026	J		<0.006	U		<0.006	U	
		VMP-30-30-103015	10/30/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0049	U		<0.0049	J	U
		VMP-30-30-012716	1/27/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0031	J		<0.0052	U		<0.0052	U	
		VMP-30-30-050216	5/2/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		<0.0074	U		<0.0061	U		<0.0061	U	
		VMP-30-30-072816	7/28/2016	<0.042	U		<0.093	U		<0.073	U		<0.073	U		<0.073	U		<0.06	U		<0.049	U		<0.049	U	
		VMP-30-30-072816-DUP	7/28/2016	<0.033	U		<0.074	U		<0.058	U		<0.058	U		<0.058	U		<0.047	U		<0.039	U		<0.039	U	
		VMP-30-26-110316	11/3/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0023	J		<0.0056	U		<0.0056	U	
		VMP-30-26-013117	1/31/2017	0.00091	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0024	J		<0.0049	U		<0.0049	U	
		VMP-30-26-050217	5/2/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-30-26-072717	7/27/2017	<0.0083	U		<0.019	U		<0.014	U		<0.014	U		<0.014	U		0.0029	J		<0.0098	U		<0.0098	U	
		VMP-30-26-102717	10/27/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0029	J		<0.0046	U		<0.0046	U	
		VMP-30-26-012518	1/25/2018	0.0011	J		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0034	J		<0.0046	U		<0.0046	U	
		VMP-30-26-041718	4/17/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0028	J		<0.005	U		<0.005	U	
		VMP-30-26-072418	7/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0024	J		<0.005	U		<0.005	U	
		VMP-30-26-072418-DUP	7/24/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-30-26-102618	10/26/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0029	J		<0.0046	U		<0.0046	U	
		VMP-30-26-012519	1/25/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0027	J		<0.0044	U		<0.0044	U	
		VMP-30-26-050219	5/2/2019	0.011			<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0023	J		<0.0047	U		<0.0047	U	
		VMP-30-26-073119	7/31/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		0.0072		
		VMP-30-26-102519	10/25/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0022	J		<0.0051	U		0.0023	J	
		VMP-30-26-102519-DUP	10/25/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.002	J		<0.0053	U		0.002	J	
		VMP-30-26-012420	1/24/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-30-26-042320	4/23/2020	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0026	J		<0.0045	U		<0.0045	U	
		VMP-30-26-072720	7/27/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0022	J		<0.0048	U		<0.0048	U	
		VMP-30-26-110220	11/2/2020	0.00087	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0031	J		<0.005	U		<0.005	U	
		VMP-30-26-012721	1/27/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0028	J		<0.0048	U		<0.0048	U	
	5 ft	VMP-32-5-021015	2/10/2015	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0031**	J		<0.0042	U		<0.0042	U	
		VMP-32-5-073115	7/31/2015	<0.0048	U	UJ	<0.011	U	UJ	<0.0084	U	UJ	<0.0084	U	UJ	<0.0084	U	UJ	**0.0026**	J	J	<0.0056	U	UJ	<0.0056	U	UJ
		VMP-32-5-082415	8/24/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-32-5-110415	11/4/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0049**	J		<0.0061	U		<0.0061	U	
		VMP-32-5-012616	1/26/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.005**	J		<0.005	U		<0.005	U	
		VMP-32-5-042716	4/27/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-32-5-072616	7/26/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0024**	J		<0.0059	U		<0.0059	U	
		VMP-32-5-102716	10/27/2016	**0.0012**	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-32-5-013017	1/30/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		<0.0058	U		<0.0047	U		<0.0047	U	
		VMP-32-5-052217	5/22/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-32-5-072417	7/24/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-32-5-103117	10/31/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-32-5-012918	1/29/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-32-5-032818	3/28/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-32-5-041018	4/10/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-32-5-072318	7/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-32-5-012319	1/23/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0024**	J		<0.0043	U		<0.0043	U	
		VMP-32-5-043019	4/30/2019	**0.005**			<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-32-5-072319	7/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-32-5-072319-DUP	7/23/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-32-5-102419	10/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0019**	J		<0.005	U		<0.005	U	
		VMP-32-5-012820	1/28/2020	**0.0028**	J		<0.014	U		<0.011	U		<0.011	U		<0.011	U		**0.0022**	J		<0.0077	U		<0.0077	U	
		VMP-32-5-042920	4/29/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-32-5-072920	7/29/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-32-5-110420	11/4/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0018**	J		<0.0053	U		<0.0053	U	
		VMP-32-5-012621	1/26/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-30-30-050515	5/5/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-30-30-050515-DUP	5/5/2015	<0.0055	U		<0.0055	U		<0.0055	U		0.0023	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-30-30-072715	7/27/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-30-30-103015	10/30/2015	<0.0048	U		<0.0048	U		<0.0048	U		0.0046	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-30-30-012716	1/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		0.0025	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-30-30-050216	5/2/2016	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-30-30-072816	7/28/2016	<0.048	U		<0.048	U		<0.048	U		<0.42	U		<0.056	U		<0.055	U		<0.055	U		<0.18	U	
		VMP-30-30-072816-DUP	7/28/2016	<0.038	U		<0.038	U		<0.038	U		<0.33	U		<0.044	U		<0.044	U		<0.044	U		<0.14	U	
		VMP-30-26-110316	11/3/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-30-26-013117	1/31/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-30-26-050217	5/2/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-26-072717	7/27/2017	<0.0096	U		<0.0096	U		<0.0096	U		<0.084	U		<0.011	U		<0.011	U		<0.011	U		<0.035	U	
		VMP-30-26-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-30-26-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-30-26-041718	4/17/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-26-072418	7/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-26-072418-DUP	7/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-26-102618	10/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-30-26-012519	1/25/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-30-26-050219	5/2/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-30-26-073119	7/31/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-26-102519	10/25/2019	<0.005	U		0.003	J		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-30-26-102519-DUP	10/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-30-26-012420	1/24/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-30-26-042320	4/23/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-30-26-072720	7/27/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-30-26-110220	11/2/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-30-26-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0055	U		<0.0054	U		<0.0054	U		0.0021	J	
	5 ft	VMP-32-5-021015	2/10/2015	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-32-5-073115	7/31/2015	<0.0055	U	UJ	<0.0055	U	UJ	<0.0055	U	UJ	**0.0042**	J	J	<0.0064	U	UJ	<0.0063	U	UJ	<0.0063	U	UJ	<0.02	U	UJ
		VMP-32-5-082415	8/24/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-32-5-110415	11/4/2015	<0.006	U		<0.006	U		<0.006	U		**0.0076**	J		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-32-5-012616	1/26/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-5-042716	4/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-32-5-072616	7/26/2016	<0.0057	U		<0.0057	U		<0.0057	U		**0.0022**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-32-5-102716	10/27/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-32-5-013017	1/30/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0064**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-32-5-052217	5/22/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-5-072417	7/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0042**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-32-5-103117	10/31/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.016**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-32-5-012918	1/29/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-32-5-032818	3/28/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-32-5-041018	4/10/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-32-5-072318	7/23/2018	<0.0047	U		0.0013	J		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-32-5-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-32-5-043019	4/30/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-32-5-072319	7/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-32-5-072319-DUP	7/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-5-102419	10/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-5-012820	1/28/2020	<0.0075	U		<0.0075	U		<0.0075	U		**0.023**	J		<0.0088	U		<0.0086	U		<0.0086	U		<0.027	U	
		VMP-32-5-042920	4/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		**0.0018**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-32-5-072920	7/29/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		**0.0011**	J	
		VMP-32-5-110420	11/4/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-32-5-012621	1/26/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	0.014			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-30-30-050515	5/5/2015	0.018			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		0.0019	J		<0.055	U		0.0059		
		VMP-30-30-050515-DUP	5/5/2015	0.02			<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		0.005		
		VMP-30-30-072715	7/27/2015	<0.011	J	U	<0.0064	U		0.002	J		<0.011	U		<0.01	U		0.0026	J		<0.063	U		0.0039	J	
		VMP-30-30-103015	10/30/2015	0.012			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		0.0013	J		<0.051	U		<0.0042	U	
		VMP-30-30-012716	1/27/2016	0.0044	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		0.0028	J		<0.055	U		0.0036	J	
		VMP-30-30-050216	5/2/2016	<0.011	U		<0.0065	U		0.0016	J		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-30-30-072816	7/28/2016	<0.092	U		<0.053	U		<0.06	U		<0.093	U		<0.085	U		<0.05	U		<0.52	U		<0.043	U	
		VMP-30-30-072816-DUP	7/28/2016	<0.072	U		<0.042	U		<0.047	U		<0.074	U		<0.067	U		<0.039	U		<0.41	U		<0.034	U	
		VMP-30-26-110316	11/3/2016	<0.01	J	U	0.065			0.015			<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-30-26-013117	1/31/2017	0.0072	J		0.0037	J		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-30-26-050217	5/2/2017	0.038			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-30-26-072717	7/27/2017	<0.018	U		<0.01	U		<0.012	U		<0.018	U		<0.017	U		<0.0099	U		<0.1	U		<0.0085	U	
		VMP-30-26-102717	10/27/2017	<0.0085	U		0.024			0.014			<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-30-26-012518	1/25/2018	0.0069	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		0.0013	J		<0.048	U		0.0028	J	
		VMP-30-26-041718	4/17/2018	<0.0093	U		0.0022	J		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-30-26-072418	7/24/2018	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		0.0012	J	
		VMP-30-26-072418-DUP	7/24/2018	0.0064	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-30-26-102618	10/26/2018	0.0046	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		0.0034	J		<0.048	U		0.003	J	
		VMP-30-26-012519	1/25/2019	0.0054	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-30-26-050219	5/2/2019	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		0.017			<0.049	U		0.034		
		VMP-30-26-073119	7/31/2019	<0.0093	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-30-26-102519	10/25/2019	0.0078	J	J	<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-30-26-102519-DUP	10/25/2019	0.0095	J		<0.0057	U		<0.0064	J	U	<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-30-26-012420	1/24/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-30-26-042320	4/23/2020	<0.0084	ND,UJ	UJ	<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-30-26-072720	7/27/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-30-26-110220	11/2/2020	0.023			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		0.0031	J	
		VMP-30-26-012721	1/27/2021	<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
	5 ft	VMP-32-5-021015	2/10/2015	<0.0079		U	<0.0045	U		<0.0051	U		<0.0079	U		<0.0072	U		<0.0042	U		<0.044	U		**0.0015**	J	
		VMP-32-5-073115	7/31/2015	0.027		J	<0.006	U	UJ	<0.0068	U	UJ	<0.011	U	UJ	<0.0098	U	UJ	<0.0057	U	UJ	<0.06	U	UJ	<0.0049	U	UJ
		VMP-32-5-082415	8/24/2015	0.028			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-32-5-110415	11/4/2015	0.014			<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		**0.0022**	J		<0.064	U		**0.0023**	J	
		VMP-32-5-012616	1/26/2016	0.0044	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0016**	J	
		VMP-32-5-042716	4/27/2016	0.0056	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0035**	J		<0.058	U		**0.0044**	J	
		VMP-32-5-072616	7/26/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-32-5-102716	10/27/2016	0.014			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-5-013017	1/30/2017	0.026			**0.00061**	J		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-32-5-052217	5/22/2017	0.024			**0.0041**	J		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-5-072417	7/24/2017	0.028			**0.009**			0.0026	J		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-32-5-103117	10/31/2017	0.032			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-32-5-012918	1/29/2018	0.0066	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-32-5-032818	3/28/2018	0.0077	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0039**	J		<0.051	U		**0.0044**		
		VMP-32-5-041018	4/10/2018	0.014			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		**0.00044**	J	
		VMP-32-5-072318	7/23/2018	0.01			**0.0022**	J		<0.0058	U		<0.0091	U		<0.0083	U		**0.0015**	J		<0.051	U		**0.0013**	J	
		VMP-32-5-012319	1/23/2019	<0.0081	U		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-32-5-043019	4/30/2019	<0.0092	U		**0.0052**	J		0.002	J		<0.0093	U		<0.0085	U		**0.0072**			<0.052	U		<0.0043	U	
		VMP-32-5-072319	7/23/2019	0.0042	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-32-5-072319-DUP	7/23/2019	0.0038	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-5-102419	10/24/2019	<0.0093	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-5-012820	1/28/2020	<0.014	U		<0.0082	U		<0.0093	U		<0.014	U		<0.013	U		<0.0078	U		<0.081	U		<0.0067	U	
		VMP-32-5-042920	4/29/2020	0.0064	J	J	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0023**	J		<0.058	U		**0.004**	J	
		VMP-32-5-072920	7/29/2020	0.0056	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-32-5-110420	11/4/2020	0.0095	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-32-5-012621	1/26/2021	0.0059	J	J	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					0.024			<0.0068	U	
		VMP-30-30-050515	5/5/2015	0.0049	J		0.038			<0.0063	U		0.0037	J		<0.0046	U					0.027			<0.0063	U	
		VMP-30-30-050515-DUP	5/5/2015	<0.023	U		0.042			<0.0068	J	U	0.0031	J		<0.005	U					0.032			<0.0068	U	
		VMP-30-30-072715	7/27/2015	0.011	J		0.018			0.01			0.005	J		<0.0053	U					0.014	J		<0.0072	U	
		VMP-30-30-103015	10/30/2015	0.019	J	J	0.0034	J		0.0027	J		<0.0049	U		<0.0043	U					0.026			<0.0059	U	
		VMP-30-30-012716	1/27/2016	0.0029	J		0.01	J		<0.0064	U		<0.0053	U		<0.0047	U					0.014			<0.0064	U	
		VMP-30-30-050216	5/2/2016	<0.025	U		0.0019	J		<0.0074	U		<0.0062	U		<0.0054	U					0.0018	J		<0.0074	U	
		VMP-30-30-072816	7/28/2016	<0.2	U		<0.14	U		<0.06	U		<0.05	U		<0.18	U					<0.12	U		<0.06	U	
		VMP-30-30-072816-DUP	7/28/2016	<0.16	U		<0.11	U		<0.047	U		<0.039	U		<0.14	U					<0.094	U		<0.047	U	
		VMP-30-26-110316	11/3/2016	<0.023	U		0.0067	J		0.0025	J		0.0028	J		<0.02	U		<0.014	U		0.0083	J		0.0035	J	
		VMP-30-26-013117	1/31/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-30-26-050217	5/2/2017	0.0043	J		0.003	J		0.0032	J		<0.0048	U		<0.017	U					0.017			<0.0058	U	
		VMP-30-26-072717	7/27/2017	<0.04	U		0.014	J		<0.012	U		<0.0099	U		<0.035	U					0.022	J		<0.012	U	
		VMP-30-26-102717	10/27/2017	<0.018	U		0.0056	J		0.0015	J		0.0021	J		<0.016	U					0.0027	J		0.0025	J	
		VMP-30-26-012518	1/25/2018	<0.018	U		0.01	J		<0.0056	U		<0.0046	U		<0.016	U					0.0038	J		<0.0056	U	
		VMP-30-26-041718	4/17/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0031	J		<0.006	U	
		VMP-30-26-072418	7/24/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					0.0052	J		<0.006	U	
		VMP-30-26-072418-DUP	7/24/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-30-26-102618	10/26/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	J	U	<0.0056	U	
		VMP-30-26-012519	1/25/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					0.0038	J		<0.0054	U	
		VMP-30-26-050219	5/2/2019	<0.019	U		0.044			<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-30-26-073119	7/31/2019	<0.02	U		0.0046	J		0.0089			<0.005	U		<0.018	U					0.017			<0.006	U	
		VMP-30-26-102519	10/25/2019	<0.021	U		0.0042	J		0.00068	J		<0.0052	U		<0.018	U					0.0041	J		<0.0062	U	
		VMP-30-26-102519-DUP	10/25/2019	<0.021	U		0.0047	J		0.00088	J		<0.0054	U		<0.019	U					0.0042	J		<0.0064	U	
		VMP-30-26-012420	1/24/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					0.0042	J		<0.0068	U	
		VMP-30-26-042320	4/23/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	ND,UJ	UJ	0.0026	J	
		VMP-30-26-072720	7/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.0078	J		<0.0058	U	
		VMP-30-26-110220	11/2/2020	<0.02	U		0.0093	J		0.0048	J		<0.005	U		<0.018	U					0.026			0.0014	J	
		VMP-30-26-012721	1/27/2021	<0.02	U		0.0033	J		0.0012	J		<0.0049	U		<0.017	U					0.01	J		<0.0059	U	
	5 ft	VMP-32-5-021015	2/10/2015	<0.017	U		0.011	J		<0.0051	U		<0.0042	U		<0.0037	U					**0.0079**	J		<0.0051	U	
		VMP-32-5-073115	7/31/2015	<0.023	U	UJ	<0.016	U	UJ	<0.0068	U	UJ	**0.0018**	J	J	<0.005	U	UJ				**0.0056**	J	J	<0.0068	U	UJ
		VMP-32-5-082415	8/24/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.0049**	J		<0.0066	U	
		VMP-32-5-110415	11/4/2015	**0.0018**	J		0.0096	J		<0.0074	U		<0.0062	J	U	<0.0054	U					**0.0085**	J		<0.0074	U	
		VMP-32-5-012616	1/26/2016	<0.02	U		0.0023	J		<0.0061	U		<0.0051	J	U	<0.0045	U					**0.0026**	J		<0.0061	U	
		VMP-32-5-042716	4/27/2016	<0.022	U		0.021			**0.0012**	J		<0.0056	U		<0.0049	U					**0.027**			<0.0067	U	
		VMP-32-5-072616	7/26/2016	<0.024	U		0.0018	J		<0.0071	U		<0.0059	U		<0.021	U					**0.0016**	J		<0.0071	U	
		VMP-32-5-102716	10/27/2016	<0.02	U		0.011	J		<0.0059	U		<0.005	U		<0.017	U		<0.013	U		**0.045**			<0.0059	U	
		VMP-32-5-013017	1/30/2017	<0.019	U		0.017			<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-32-5-052217	5/22/2017	<0.02	U		0.0025	J		<0.006	U		<0.005	U		<0.018	U					**0.0088**	J		<0.006	U	
		VMP-32-5-072417	7/24/2017	<0.019	U		0.0035	J		<0.0058	U		<0.0049	U		<0.017	U					**0.049**			<0.0058	U	
		VMP-32-5-103117	10/31/2017	<0.018	U		0.017			<0.0055	U		<0.0046	U		<0.016	U					**0.0082**	J		<0.0055	U	
		VMP-32-5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-32-5-032818	3/28/2018	<0.019	U		0.0019	J		<0.0058	U		<0.0049	U		<0.017	U		<0.012	U		**0.0047**	J		<0.0058	U	
		VMP-32-5-041018	4/10/2018	<0.018	U		<0.013	U		<0.0054	U		**0.0019**	J		<0.016	U		**0.00029**	J		**0.0056**	J		<0.0054	U	
		VMP-32-5-072318	7/23/2018	<0.019	U		0.003	J		<0.0058	U		<0.0049	U		<0.017	U					**0.0033**	J		<0.0058	U	
		VMP-32-5-012319	1/23/2019	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-32-5-043019	4/30/2019	<0.02	U		<0.014	U		<0.006	U		**0.0011**	J		<0.018	U					**0.005**	J		<0.006	U	
		VMP-32-5-072319	7/23/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.003**	J		<0.0062	U	
		VMP-32-5-072319-DUP	7/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0034**	J		<0.0061	U	
		VMP-32-5-102419	10/24/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-32-5-012820	1/28/2020	<0.031	U		0.015	J		**0.0022**	J		<0.0078	U		<0.027	U					**0.016**	J		<0.0093	U	
		VMP-32-5-042920	4/29/2020	<0.022	U		0.0035	J		<0.0067	U		<0.0056	U		<0.02	U					**0.0043**	J		<0.0067	U	
		VMP-32-5-072920	7/29/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0095**	J		<0.0064	J	U
		VMP-32-5-110420	11/4/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0075**	J		<0.0064	U	
		VMP-32-5-012621	1/26/2021	<0.021	U		0.0025	J		**0.00046**	J		<0.0052	U		<0.018	U					**0.014**			<0.0062	J	U

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	<0.0059	U		<0.0095	U		<0.0094	U		0.12			<0.006		U	<0.041	U		<0.0075	U		<0.0075	U	
		VMP-30-30-050515	5/5/2015	<0.0055	U		<0.0088	U		<0.0088	U		0.047			0.0044	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-30-30-050515-DUP	5/5/2015	<0.0059	U		<0.0095	U		<0.0094	U		0.051			0.0034	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-30-30-072715	7/27/2015	<0.0063	U		<0.01	U		<0.01	U		0.68			0.0055	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-30-30-103015	10/30/2015	<0.0051	U		<0.0083	U		<0.0082	U		0.028			0.0039	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-30-012716	1/27/2016	<0.0055	U		<0.0089	U		<0.0088	U		0.32			0.0022	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-30-30-050216	5/2/2016	<0.0064	U		<0.01	U		<0.01	U		0.26			0.0041	J		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-30-30-072816	7/28/2016	<0.052	U		<0.083	U		<0.082	U		10			<0.046	U		<0.36	U		<0.066	U		<0.066	U	
		VMP-30-30-072816-DUP	7/28/2016	<0.041	U		<0.066	U		<0.065	U		7.8			0.0032	J		<0.28	U		<0.052	U		<0.052	U	
		VMP-30-26-110316	11/3/2016	<0.0059	U		<0.0095	U		<0.0094	U		0.72			0.012			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-30-26-013117	1/31/2017	<0.0052	U		<0.0083	U		<0.0082	U		0.35			0.0025	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-30-26-050217	5/2/2017	<0.005	U		<0.0081	U		<0.008	U		0.018			0.0015	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-30-26-072717	7/27/2017	<0.01	U		<0.017	U		<0.016	U		1			<0.0091	U		<0.072	U		<0.013	U		<0.013	U	
		VMP-30-26-102717	10/27/2017	<0.0048	U		<0.0077	U		<0.0076	U		0.023			0.0064			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-30-26-012518	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		0.072			0.00096	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-30-26-041718	4/17/2018	<0.0052	U		<0.0084	U		<0.0083	U		0.034			<0.0046	J	U	<0.036	U		<0.0067	U		<0.0067	U	
		VMP-30-26-072418	7/24/2018	<0.0052	U		<0.0084	U		<0.0083	U		0.48			0.0007	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-30-26-072418-DUP	7/24/2018	<0.0053	U		<0.0085	U		<0.0084	U		0.47			<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-30-26-102618	10/26/2018	<0.0048	U		<0.0078	U		<0.0077	U		0.18			0.0017	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-30-26-012519	1/25/2019	<0.0047	U		<0.0076	U		<0.0075	U		0.0028	J		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-30-26-050219	5/2/2019	<0.0049	U		<0.008	U		<0.0079	U		0.025			0.0064			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-30-26-073119	7/31/2019	<0.0052	U		<0.0084	U		<0.0083	U		0.094			0.012			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-30-26-102519	10/25/2019	<0.0054	U		<0.0087	U		<0.0086	U		0.0074			0.003	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-30-26-102519-DUP	10/25/2019	<0.0056	U		<0.009	U		<0.0089	U		0.007			0.0042	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-30-26-012420	1/24/2020	<0.0059	U		<0.0095	U		<0.0094	U		0.043			<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-30-26-042320	4/23/2020	<0.0048	U		<0.0077	U		<0.0076	U		0.022			<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-30-26-072720	7/27/2020	<0.0081	U		<0.0082	U		<0.0081	U		3			<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-30-26-110220	11/2/2020	<0.0052	U		<0.0084	U		<0.0083	U		0.011			0.0023	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-30-26-012721	1/27/2021	<0.0051	U		<0.0082	U		<0.0081	U		0.01			0.0015	J		<0.036	U		<0.0065	U		<0.0065	U	
	5 ft	VMP-32-5-021015	2/10/2015	<0.0044	U		<0.0071	U		<0.007	U		<0.003	U		**0.001**	J		<0.03	U		<0.0056	U		<0.0056	U	
		VMP-32-5-073115	7/31/2015	<0.0059	U	UJ	<0.0096	U	UJ	<0.0095	U	UJ	<0.0041	U	UJ	**0.0018**	J	J	<0.041	U	UJ	<0.0076	U	UJ	<0.0076	U	UJ
		VMP-32-5-082415	8/24/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0027**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-32-5-110415	11/4/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.0033**	J		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-32-5-012616	1/26/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-32-5-042716	4/27/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.00079**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-32-5-072616	7/26/2016	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		**0.00049**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-32-5-102716	10/27/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0066**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-5-013017	1/30/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0086**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-32-5-052217	5/22/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0018**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-32-5-072417	7/24/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0035**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-32-5-103117	10/31/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0096**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-32-5-012918	1/29/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-32-5-032818	3/28/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00054**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-32-5-041018	4/10/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-32-5-072318	7/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.012**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-32-5-012319	1/23/2019	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-32-5-043019	4/30/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.091**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-5-072319	7/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0038**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-32-5-072319-DUP	7/23/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0016**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-32-5-102419	10/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-32-5-012820	1/28/2020	<0.0081	U		<0.013	U		<0.013	U		<0.0056	U		**0.01**			<0.056	U		<0.01	U		<0.01	U	
		VMP-32-5-042920	4/29/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0014**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-32-5-072920	7/29/2020	<0.0089	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-32-5-110420	11/4/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-32-5-012621	1/26/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0011**	J		<0.037	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-30-30-020615	2/6/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0016	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-30-30-050515	5/5/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0022	J		<0.0033	U		0.0031	J		<0.0056	U	
		VMP-30-30-050515-DUP	5/5/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0018	J		<0.0036	U		0.0013	J		<0.006	U	
		VMP-30-30-072715	7/27/2015	<0.0079	U		<0.0083	U		0.002	J		0.00088	J		0.021			<0.0038	U		0.005	J		0.0012	J	
		VMP-30-30-103015	10/30/2015	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0013	J		<0.0031	U		0.0014	J		<0.0052	U	
		VMP-30-30-012716	1/27/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		0.0017	J		<0.0056	U	
		VMP-30-30-050216	5/2/2016	<0.0081	U		<0.0084	U		0.0029	J		<0.0074	U		<0.007	U		<0.0038	U		0.003	J		0.0014	J	
		VMP-30-30-072816	7/28/2016	<0.065	U		<0.068	U		<0.06	U		<0.06	U		<0.057	U		<0.031	U		<0.053	U		<0.053	U	
		VMP-30-30-072816-DUP	7/28/2016	<0.052	U		<0.054	U		<0.047	U		<0.047	U		<0.045	U		<0.024	U		<0.042	U		<0.042	U	
		VMP-30-26-110316	11/3/2016	<0.0074	U		<0.0078	U		0.014			0.0042	J		<0.0065	J	U	<0.0035	U		0.26			0.073		
		VMP-30-26-013117	1/31/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.0014	J		<0.0031	U		0.013			0.0028	J	
		VMP-30-26-050217	5/2/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.002	J		<0.003	U		0.002	J		<0.0051	U	
		VMP-30-26-072717	7/27/2017	<0.013	U		<0.014	U		<0.012	U		<0.012	U		0.0081	J		<0.0062	U		<0.01	U		<0.01	U	
		VMP-30-26-102717	10/27/2017	<0.006	U		0.0015	J		0.012			0.0036	J		0.0011	J		<0.0029	U		0.099			0.03		
		VMP-30-26-012518	1/25/2018	<0.0061	U		0.0017	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-30-26-041718	4/17/2018	<0.0066	U		<0.0069	U		<0.006	J	U	<0.006	U		0.0012	J		<0.0031	U		0.0099			<0.0053	J	U
		VMP-30-26-072418	7/24/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-30-26-072418-DUP	7/24/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-30-26-102618	10/26/2018	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-30-26-012519	1/25/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0042	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-30-26-050219	5/2/2019	<0.0062	U		0.001	J		0.0007	J		<0.0057	U		0.0045	J		<0.003	U		0.0036	J		<0.005	U	
		VMP-30-26-073119	7/31/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0071			0.0023	J	
		VMP-30-26-102519	10/25/2019	0.018		J	0.0012	J		<0.0062	U		<0.0062	U		0.0027	J		<0.0032	U		0.0011	J		<0.0055	U	
		VMP-30-26-102519-DUP	10/25/2019	0.0018	J	J	0.0014	J		<0.0064	U		<0.0064	U		0.0034	J		<0.0033	U		0.0016	J		<0.0057	U	
		VMP-30-26-012420	1/24/2020	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-30-26-042320	4/23/2020	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-30-26-072720	7/27/2020	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-30-26-110220	11/2/2020	<0.0066	U		0.0018	J		0.0013	J		<0.006	U		0.0032	J		<0.0031	U		0.002	J		0.001	J	
		VMP-30-26-012721	1/27/2021	<0.0064	U		0.0017	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00069	J		<0.0052	U	
	5 ft	VMP-32-5-021015	2/10/2015	<0.0055	U		<0.0058	U		<0.0051	J	U	<0.0051	U		0.0014	J		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-32-5-073115	7/31/2015	<0.0075	U	UJ	<0.0078	U	UJ	**0.0015**	J	J	<0.0068	U	UJ	<0.0065	U	UJ	<0.0036	U	UJ	0.0029	J	J	**0.0013**	J	J
		VMP-32-5-082415	8/24/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-5-110415	11/4/2015	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		0.0022	J		<0.0038	U		<0.0066	U		<0.0066	U	
		VMP-32-5-012616	1/26/2016	<0.0067	U		0.0021	J		<0.0061	U		<0.0061	U		0.0074			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-5-042716	4/27/2016	<0.0073	U		0.0016	J		<0.0067	U		<0.0067	U		0.0056	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-32-5-072616	7/26/2016	<0.0078	U		0.0017	J		<0.0071	U		<0.0071	U		0.0013	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-32-5-102716	10/27/2016	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		0.0082			<0.0031	U		0.003	J		<0.0052	U	
		VMP-32-5-013017	1/30/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0019	J		**0.00063**	J	
		VMP-32-5-052217	5/22/2017	<0.0066	U		0.0016	J		**0.0012**	J		<0.006	U		0.00086	J		<0.0031	U		0.017			**0.005**	J	
		VMP-32-5-072417	7/24/2017	<0.0064	U		0.0018	J		**0.0026**	J		**0.0014**	J		0.0036	J		<0.003	U		0.035			**0.011**		
		VMP-32-5-103117	10/31/2017	<0.006	U		0.00093	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-32-5-012918	1/29/2018	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-32-5-032818	3/28/2018	<0.0064	U		0.00099	J		<0.0058	U		<0.0058	U		0.007			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-32-5-041018	4/10/2018	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-32-5-072318	7/23/2018	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.0061			**0.0022**	J	
		VMP-32-5-012319	1/23/2019	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-32-5-043019	4/30/2019	<0.0065	U		0.0011	J		**0.0023**	J		**0.00087**	J		0.0044	J		<0.0031	U		0.012			**0.004**	J	
		VMP-32-5-072319	7/23/2019	<0.0068	U		0.00086	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0022	J		<0.0055	U	
		VMP-32-5-072319-DUP	7/23/2019	<0.0066	U		0.001	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0011	J		<0.0054	U	
		VMP-32-5-102419	10/24/2019	**0.0012**	J		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-5-012820	1/28/2020	<0.01	U		<0.011	U		<0.0093	U		<0.0093	J	U	0.0082	J		<0.0048	U		<0.0082	U		<0.0082	U	
		VMP-32-5-042920	4/29/2020	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0025	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-32-5-072920	7/29/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0046	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-32-5-110420	11/4/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-32-5-012621	1/26/2021	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		0.0053	J		<0.0032	U		<0.0055	J	U	<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	**0.0072**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0064	J		<0.014	U	
		VMP-32-10-051115	5/11/2015	**0.012**	J	J	<0.005	U	UJ	<0.01	U	UJ	<0.016	U	UJ	<0.061	U	UJ	<0.0035	U	UJ	<0.015	U	UJ	**0.0024**	J	J
		VMP-32-10-052915-R	5/29/2015	**0.028**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.013	J		**0.0048**	J	
		VMP-32-10-110415	11/4/2015	**0.023**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0055**	J	
		VMP-32-10-012616	1/26/2016	**0.015**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0048	J		**0.0051**	J	
		VMP-32-10-042716	4/27/2016	**0.024**	J		**0.0029**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0068**	J	
		VMP-32-10-072616	7/26/2016	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0062	J		<0.015	U	
		VMP-32-10-102716	10/27/2016	**0.021**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0073**	J	
		VMP-32-10-013017	1/30/2017	<0.029	J	U	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-32-10-042517	4/25/2017	<0.029	J	U	**0.00082**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.004**	J	
		VMP-32-10-072417	7/24/2017	**0.034**			**0.0013**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0087**	J	
		VMP-32-10-103117	10/31/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-32-10-012918	1/29/2018	<0.026	J	U	<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-32-10-032818	3/28/2018	**0.008**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0019**	J	
		VMP-32-10-041018	4/10/2018	**0.0044**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-32-10-072318	7/23/2018	**0.017**	J		**0.00035**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-32-10-102518	10/25/2018	**0.013**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0023**	J	
		VMP-32-10-012319	1/23/2019	**0.0073**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-32-10-043019	4/30/2019	**0.0075**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-32-10-072319	7/23/2019	**0.02**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-32-10-102419	10/24/2019	**0.0073**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-32-10-012820	1/28/2020	<0.032	U		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-32-10-042920	4/29/2020	**0.011**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-32-10-072920	7/29/2020	**0.028**	J		**0.0012**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0047**	J	
		VMP-32-10-110420	11/4/2020	**0.02**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0015**	J	
		VMP-32-10-012621	1/26/2021	**0.0077**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0014**	J	
	20 ft	VMP-32-20-021015	2/10/2015	**0.013**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-32-20-051115	5/11/2015	**0.017**	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0091**	J	
		VMP-32-20-080315	8/3/2015	**0.039**			<0.0043	J	U	<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0077**	J	
		VMP-32-20-110415	11/4/2015	**0.035**			**0.0011**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.01**	J	
		VMP-32-20-110415-DUP	11/4/2015	**0.016**	J		**0.0015**	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.006**	J	
		VMP-32-20-021616	2/16/2016	**0.015**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0036	J		**0.0034**	J	
		VMP-32-20-042716	4/27/2016	**0.025**	J		**0.0017**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0054**	J	
		VMP-32-20-082616-R	8/29/2016	**0.054**			**0.0014**	J		<0.012	U		<0.018	U		<0.067	U		<0.0038	U		<0.016	U		**0.0095**	J	
		VMP-32-20-102716	10/27/2016	**0.017**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0045**	J	
		VMP-32-20-013017	1/30/2017	**0.0098**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-32-20-042517	4/25/2017	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0056**	J	
		VMP-32-20-072417	7/24/2017	**0.02**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0037**	J	
		VMP-32-20-103117	10/31/2017	**0.009**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-32-20-012918	1/29/2018	<0.024	J	U	<0.0032	U		<0.0068	U		<0.01	U		<0.039	U		<0.0022	U		0.0032	J		<0.012	U	
		VMP-32-20-032818	3/28/2018	**0.013**	J		**0.00071**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.018			**0.0034**	J	
		VMP-32-20-041018	4/10/2018	**0.011**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-32-20-072318	7/23/2018	**0.029**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0047**	J	
		VMP-32-20-102518	10/25/2018	**0.011**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-32-20-012319	1/23/2019	**0.027**			<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0035	J		**0.0023**	J	
		VMP-32-20-043019	4/30/2019	**0.015**	J		**0.0024**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-32-20-072319	7/23/2019	**0.034**			**0.0022**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-32-20-012820	1/28/2020	**0.0072**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0044**	J	
		VMP-32-20-042920	4/29/2020	**0.027**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-32-20-072920	7/29/2020	**0.018**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-32-20-110420	11/4/2020	**0.028**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0016**	J	
		VMP-32-20-012621	1/26/2021	**0.015**	J		**0.0006**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0091	J		<0.016	U	
		VMP-32-20-012621-DUP	1/26/2021	**0.011**	J		**0.0006**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.01	J		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-32-10-051115	5/11/2015	**0.0021**	J	J	<0.0099	U	UJ	<0.0073	U	UJ	<0.013	U	UJ	<0.017	U	UJ	<0.0077	U	UJ	<0.033	U	UJ	<0.0082	U	UJ
		VMP-32-10-052915-R	5/29/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-32-10-110415	11/4/2015	**0.0018**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0042**	J		<0.028	U		<0.007	U	
		VMP-32-10-012616	1/26/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0043**	J		<0.027	U		<0.0068	U	
		VMP-32-10-042716	4/27/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0057**	J		<0.026	U		<0.0064	U	
		VMP-32-10-072616	7/26/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0096**			<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-32-10-102716	10/27/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0079**			<0.027	U		<0.0067	U	
		VMP-32-10-013017	1/30/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0043**	J		<0.025	U		<0.0063	U	
		VMP-32-10-042517	4/25/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0038**	J		<0.025	U		<0.0062	U	
		VMP-32-10-072417	7/24/2017	**0.002**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0039**	J		<0.025	U		<0.0063	U	
		VMP-32-10-103117	10/31/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0032**	J		<0.024	U		<0.0061	U	
		VMP-32-10-012918	1/29/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0023**	J		<0.022	U		<0.0056	U	
		VMP-32-10-032818	3/28/2018	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.002**	J		<0.026	U		<0.0064	U	
		VMP-32-10-041018	4/10/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0021**	J		<0.024	U		<0.006	U	
		VMP-32-10-072318	7/23/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0034**	J		<0.026	U		<0.0064	U	
		VMP-32-10-102518	10/25/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-32-10-012319	1/23/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-32-10-043019	4/30/2019	**0.0025**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-32-10-072319	7/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	ND,UJ	UJ
		VMP-32-10-102419	10/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-32-10-012820	1/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-10-042920	4/29/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-32-10-072920	7/29/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0013**	J		<0.027	U		<0.0068	U	
		VMP-32-10-110420	11/4/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0062	U	
		VMP-32-10-012621	1/26/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-20-051115	5/11/2015	<0.017	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-32-20-080315	8/3/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-20-110415	11/4/2015	**0.01**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		**0.0033**	J		<0.0068	U	
		VMP-32-20-110415-DUP	11/4/2015	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-32-20-021616	2/16/2016	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-32-20-042716	4/27/2016	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-32-20-082616-R	8/29/2016	**0.0035**	J		<0.011	U		<0.008	U		<0.015	U		<0.018	U		<0.0084	U		<0.036	U		<0.009	U	
		VMP-32-20-102716	10/27/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-32-20-013017	1/30/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-32-20-042517	4/25/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-32-20-072417	7/24/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-32-20-103117	10/31/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-32-20-012918	1/29/2018	**0.0016**	J		<0.0064	U		<0.0046	U		<0.0086	U		<0.011	U		<0.0049	U		<0.021	U		<0.0052	U	
		VMP-32-20-032818	3/28/2018	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-32-20-041018	4/10/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-32-20-072318	7/23/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-32-20-102518	10/25/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-32-20-012319	1/23/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-32-20-043019	4/30/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-32-20-072319	7/23/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	ND,UJ	UJ
		VMP-32-20-012820	1/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-20-042920	4/29/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-32-20-072920	7/29/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-32-20-110420	11/4/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-32-20-012621	1/26/2021	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-32-10-051115	5/11/2015	<0.0054	U	UJ	<0.012	U	UJ	<0.0095	U	UJ	<0.0095	U	UJ	<0.0095	U	UJ	<0.0078	U	UJ	<0.0064	U	UJ	<0.0064	U	UJ
		VMP-32-10-052915-R	5/29/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.002**	J		<0.0057	U		<0.0057	U	
		VMP-32-10-110415	11/4/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0049**	J		<0.0054	U		<0.0054	U	
		VMP-32-10-012616	1/26/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0034**	J		<0.0053	U		<0.0053	U	
		VMP-32-10-042716	4/27/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-32-10-072616	7/26/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-32-10-102716	10/27/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-32-10-013017	1/30/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-32-10-042517	4/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-32-10-072417	7/24/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-32-10-103117	10/31/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-32-10-012918	1/29/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-32-10-032818	3/28/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-32-10-041018	4/10/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-32-10-072318	7/23/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-32-10-102518	10/25/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-32-10-012319	1/23/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-32-10-043019	4/30/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-32-10-072319	7/23/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-32-10-102419	10/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-32-10-012820	1/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0021**	J		<0.0054	U		<0.0054	U	
		VMP-32-10-042920	4/29/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-32-10-072920	7/29/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		**0.0016**	J	
		VMP-32-10-110420	11/4/2020	**0.0004**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-32-10-012621	1/26/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-32-20-051115	5/11/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.002**	J		<0.0054	U		<0.0054	U	
		VMP-32-20-080315	8/3/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-32-20-110415	11/4/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.004**	J		<0.0053	U		<0.0053	U	
		VMP-32-20-110415-DUP	11/4/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0037**	J		<0.0058	U		<0.0058	U	
		VMP-32-20-021616	2/16/2016	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0033**	J		<0.0046	U		<0.0046	U	
		VMP-32-20-042716	4/27/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-32-20-082616-R	8/29/2016	<0.006	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0025**	J		<0.007	U		<0.007	U	
		VMP-32-20-102716	10/27/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-32-20-013017	1/30/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-32-20-042517	4/25/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-32-20-072417	7/24/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-32-20-103117	10/31/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-32-20-012918	1/29/2018	<0.0035	U		<0.0078	U		<0.0061	U		<0.0061	U		<0.0061	U		**0.0027**	J		<0.0041	U		<0.0041	U	
		VMP-32-20-032818	3/28/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-32-20-041018	4/10/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-32-20-072318	7/23/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-32-20-102518	10/25/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-32-20-012319	1/23/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-32-20-043019	4/30/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-32-20-072319	7/23/2019	**0.0014**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-32-20-012820	1/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-32-20-042920	4/29/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-32-20-072920	7/29/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-32-20-110420	11/4/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-32-20-012621	1/26/2021	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-10-051115	5/11/2015	<0.0063	U	UJ	<0.0063	U	UJ	<0.0063	U	UJ	<0.055	U	UJ	<0.0073	U	UJ	<0.0072	U	UJ	<0.0072	U	UJ	<0.023	U	UJ
		VMP-32-10-052915-R	5/29/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-32-10-110415	11/4/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.0036**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-32-10-012616	1/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		**0.0029**	J	
		VMP-32-10-042716	4/27/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-10-072616	7/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.003**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-32-10-102716	10/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-32-10-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-32-10-042517	4/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-32-10-072417	7/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0034**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-32-10-103117	10/31/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0037**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-32-10-012918	1/29/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-32-10-032818	3/28/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-10-041018	4/10/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-32-10-072318	7/23/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-10-102518	10/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-32-10-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-32-10-043019	4/30/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-32-10-072319	7/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-32-10-102419	10/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-10-012820	1/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-32-10-042920	4/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-32-10-072920	7/29/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-32-10-110420	11/4/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-32-10-012621	1/26/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-32-20-051115	5/11/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-32-20-080315	8/3/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0056**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-32-20-110415	11/4/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.011**	J		<0.0061	U		<0.006	U		<0.006	U		**0.0046**	J	
		VMP-32-20-110415-DUP	11/4/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0054**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-32-20-021616	2/16/2016	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		**0.0021**	J	
		VMP-32-20-042716	4/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-32-20-082616-R	8/29/2016	<0.0068	U		<0.0068	U		<0.0068	U		<0.06	U		<0.008	U		<0.0078	U		<0.0078	U		<0.025	U	
		VMP-32-20-102716	10/27/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-32-20-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-32-20-042517	4/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0022**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-20-072417	7/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-20-103117	10/31/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0044**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-32-20-012918	1/29/2018	<0.004	U		<0.004	U		<0.004	U		<0.035	U		<0.0047	U		<0.0046	U		<0.0046	U		<0.014	U	
		VMP-32-20-032818	3/28/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-32-20-041018	4/10/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-32-20-072318	7/23/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-20-102518	10/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-32-20-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-32-20-043019	4/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-32-20-072319	7/23/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		**0.0018**	J		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-32-20-012820	1/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-32-20-042920	4/29/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-32-20-072920	7/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-20-110420	11/4/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-32-20-012621	1/26/2021	<0.0053	U		<0.0053	U		<0.0053	U		**0.00098**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0051	U		<0.0051	U		<0.0051	U		**0.0011**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.0093	J	U	<0.0053	U		0.0014	J		<0.0094	U		<0.0086	U		**0.0018**	J		<0.052	U		**0.0018**	J	
		VMP-32-10-051115	5/11/2015	<0.012	U	UJ	<0.0069	U	UJ	<0.0078	U	UJ	<0.012	U	UJ	<0.011	U	UJ	<0.0065	U	UJ	<0.067	U	UJ	**0.0017**	J	J
		VMP-32-10-052915-R	5/29/2015	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0018**	J		<0.06	U		**0.0054**		
		VMP-32-10-110415	11/4/2015	0.012			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.0027**	J		<0.057	U		<0.0047	U	
		VMP-32-10-012616	1/26/2016	0.0052	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0013**	J	
		VMP-32-10-042716	4/27/2016	0.0098			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0012**	J	
		VMP-32-10-072616	7/26/2016	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.00093**	J	
		VMP-32-10-102716	10/27/2016	0.0067	J		**0.0086**			0.0019	J		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-32-10-013017	1/30/2017	0.0045	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		**0.00044**	J	
		VMP-32-10-042517	4/25/2017	0.0086	J		**0.005**	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-32-10-072417	7/24/2017	0.0077	J		**0.0058**			0.0016	J		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-10-103117	10/31/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-32-10-012918	1/29/2018	<0.0082	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-32-10-032818	3/28/2018	0.0056	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0018**	J		<0.053	U		<0.0044	U	
		VMP-32-10-041018	4/10/2018	0.0029	J		<0.005	U		0.0007	J		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-32-10-072318	7/23/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-10-102518	10/25/2018	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-32-10-012319	1/23/2019	<0.008	U		**0.0013**	J		<0.0052	U		<0.0082	U		<0.0074	U		**0.0027**	J		<0.045	U		**0.0069**		
		VMP-32-10-043019	4/30/2019	0.0035	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-32-10-072319	7/23/2019	0.015			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-10-102419	10/24/2019	0.0084	J	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-10-012820	1/28/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-32-10-042920	4/29/2020	0.0089	J	J	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-32-10-072920	7/29/2020	0.0083	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-32-10-110420	11/4/2020	0.014			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-32-10-012621	1/26/2021	<0.024	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		**0.00084**	J	
		VMP-32-20-051115	5/11/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		**0.0011**	J	
		VMP-32-20-080315	8/3/2015	0.0046	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-32-20-110415	11/4/2015	0.011			**0.0017**	J		<0.0065	U		<0.01	U		<0.0092	U		**0.0055**			<0.056	U		**0.0062**		
		VMP-32-20-110415-DUP	11/4/2015	0.007	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		**0.0062**			<0.061	U		**0.0064**		
		VMP-32-20-021616	2/16/2016	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-32-20-042716	4/27/2016	0.0088	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0034**	J		<0.06	U		**0.0015**	J	
		VMP-32-20-082616-R	8/29/2016	0.015			<0.0075	U		<0.0085	U		<0.013	U		<0.012	U		**0.0015**	J		<0.074	U		**0.0015**	J	
		VMP-32-20-102716	10/27/2016	0.0079	J		**0.0043**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-32-20-013017	1/30/2017	0.0056	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-20-042517	4/25/2017	0.005	J		**0.00091**	J		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-20-072417	7/24/2017	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-20-103117	10/31/2017	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-32-20-012918	1/29/2018	<0.0076	U		<0.0044	U		<0.005	U		<0.0077	U		<0.0071	U		<0.0041	U		<0.043	U		<0.0036	U	
		VMP-32-20-032818	3/28/2018	0.0056	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		**0.00097**	J		<0.049	U		<0.004	U	
		VMP-32-20-041018	4/10/2018	0.004	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.00036**	J	
		VMP-32-20-072318	7/23/2018	0.0062	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-20-102518	10/25/2018	0.0035	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-32-20-012319	1/23/2019	0.006	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-32-20-043019	4/30/2019	0.0032	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-32-20-072319	7/23/2019	0.0056	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.0039**	J		<0.055	U		<0.0045	U	
		VMP-32-20-012820	1/28/2020	<0.01	U		<0.0058	U		0.00084	J		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-32-20-042920	4/29/2020	0.011		J	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-32-20-072920	7/29/2020	0.0045	J		<0.0054	U		0.0014	J		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-20-110420	11/4/2020	0.0077	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-32-20-012621	1/26/2021	<0.025	U	UJ	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-32-20-012621-DUP	1/26/2021	0.0057	J	J	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0054**	J		<0.006	U	
		VMP-32-10-051115	5/11/2015	<0.026	U	UJ	0.0016	J	J	<0.0078	U	UJ	**0.0011**	J	J	<0.0057	U	UJ				**0.0016**	J	J	<0.0078	U	UJ
		VMP-32-10-052915-R	5/29/2015	<0.023	U		0.018			<0.0069	U		**0.00094**	J		<0.0051	U					**0.0016**	J		<0.0069	U	
		VMP-32-10-110415	11/4/2015	**0.00086**	J		0.0043	J		<0.0066	U		**0.0012**	J		<0.0048	U					**0.01**	J		<0.0066	U	
		VMP-32-10-012616	1/26/2016	<0.021	U		0.0031	J		<0.0064	U		<0.0054	U		<0.0047	U					**0.012**	J		<0.0064	U	
		VMP-32-10-042716	4/27/2016	<0.02	U		0.0058	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.012**	J		<0.0061	U	
		VMP-32-10-072616	7/26/2016	<0.021	U		0.014	J		**0.0014**	J		<0.0054	U		<0.019	U					**0.013**			**0.0032**	J	
		VMP-32-10-102716	10/27/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		**0.0066**	J		<0.0064	U	
		VMP-32-10-013017	1/30/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-32-10-042517	4/25/2017	**0.0011**	J		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.014**			<0.0059	U	
		VMP-32-10-072417	7/24/2017	**0.0037**	J		<0.014	U		<0.006	U		**0.0017**	J		<0.018	U					**0.016**			<0.006	U	
		VMP-32-10-103117	10/31/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-32-10-012918	1/29/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-32-10-032818	3/28/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		<0.012	U		<0.0061	U	
		VMP-32-10-041018	4/10/2018	<0.019	U		<0.014	U		**0.0004**	J		<0.0048	U		<0.017	U		**0.0064**	J		**0.0014**	J		**0.003**	J	
		VMP-32-10-072318	7/23/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0032**	J		<0.0061	U	
		VMP-32-10-102518	10/25/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-32-10-012319	1/23/2019	<0.017	U		0.0074	J		<0.0052	U		<0.0044	U		<0.015	U					**0.0018**	J		<0.0052	U	
		VMP-32-10-043019	4/30/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-32-10-072319	7/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0033**	J		<0.0059	U	
		VMP-32-10-102419	10/24/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-32-10-012820	1/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.002**	J		<0.0066	U	
		VMP-32-10-042920	4/29/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0099**	J		<0.0067	U	
		VMP-32-10-072920	7/29/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0068**	J		<0.0065	U	
		VMP-32-10-110420	11/4/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.013**			<0.0059	U	
		VMP-32-10-012621	1/26/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0043**	J		<0.0062	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.022	U		0.0044	J		<0.0067	U		<0.0056	U		<0.0049	U					**0.0064**	J		<0.0067	U	
		VMP-32-20-051115	5/11/2015	**0.0012**	J		<0.016	U		<0.0066	U		**0.001**	J		<0.0048	U					**0.0038**	J		<0.0066	U	
		VMP-32-20-080315	8/3/2015	<0.022	U		0.0042	J		<0.0066	U		<0.0055	U		<0.0049	U					<0.013	U		<0.0066	U	
		VMP-32-20-110415	11/4/2015	**0.0014**	J		0.014	J		<0.0065	U		<0.0054	J	U	<0.0048	U					**0.0092**	J		<0.0065	U	
		VMP-32-20-110415-DUP	11/4/2015	<0.023	U		0.012	J		<0.007	U		<0.0058	J	U	<0.0052	U					**0.028**			<0.007	U	
		VMP-32-20-021616	2/16/2016	**0.00074**	J		0.0018	J		<0.0056	U		<0.0047	U		<0.0041	U					**0.031**			<0.0056	U	
		VMP-32-20-042716	4/27/2016	<0.023	U		0.035			<0.0069	U		<0.0057	U		<0.005	U					**0.18**			<0.0069	U	
		VMP-32-20-082616-R	8/29/2016	<0.028	U		<0.02	U		<0.0085	U		<0.0071	U		<0.025	U					**0.047**			<0.0085	U	
		VMP-32-20-102716	10/27/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		<0.012	U		<0.0062	U	
		VMP-32-20-013017	1/30/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-32-20-042517	4/25/2017	**0.0036**	J		0.0026	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-32-20-072417	7/24/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.011**	J		<0.0061	U	
		VMP-32-20-103117	10/31/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-32-20-012918	1/29/2018	<0.016	U		<0.012	U		<0.005	U		<0.0041	U		<0.014	U					**0.0014**	J		<0.005	U	
		VMP-32-20-032818	3/28/2018	<0.019	U		0.0086	J		<0.0056	U		<0.0047	U		<0.016	U		**0.0012**	J		<0.011	U		**0.00072**	J	
		VMP-32-20-041018	4/10/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U		<0.012	U		**0.0029**	J		<0.0056	U	
		VMP-32-20-072318	7/23/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0034**	J		<0.0061	U	
		VMP-32-20-102518	10/25/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-32-20-012319	1/23/2019	<0.018	U		0.022			<0.0053	U		<0.0044	U		<0.016	U					**0.012**			<0.0053	U	
		VMP-32-20-043019	4/30/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-32-20-072319	7/23/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0058**	J		<0.0063	U	
		VMP-32-20-012820	1/28/2020	<0.022	U		<0.016	U		**0.002**	J		<0.0055	U		<0.019	U					**0.006**	J		**0.0037**	J	
		VMP-32-20-042920	4/29/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.0089**	J		<0.0068	U	
		VMP-32-20-072920	7/29/2020	<0.02	U		0.0018	J		**0.0061**			<0.0051	U		<0.018	U					**0.0058**	J		**0.018**		
		VMP-32-20-110420	11/4/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.012**	J		<0.0063	U	
		VMP-32-20-012621	1/26/2021	<0.022	U		0.0042	J		<0.0066	U		<0.0055	U		<0.019	U					**0.006**	J		<0.0066	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.021	U		0.004	J		<0.0064	U		<0.0053	U		<0.019	U					**0.006**	J		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.0052	U		<0.0084	U		**0.0015**	J		<0.0036	U		**0.0028**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-32-10-051115	5/11/2015	<0.0067	U	UJ	<0.011	U	UJ	**0.0039**	J	J	<0.0046	U	UJ	<0.006	U	UJ	<0.047	U	UJ	<0.0086	U	UJ	<0.0086	U	UJ
		VMP-32-10-052915-R	5/29/2015	<0.006	U		<0.0097	U		**0.0036**	J		**0.0014**	J		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-32-10-110415	11/4/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.002**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-32-10-012616	1/26/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-32-10-042716	4/27/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-32-10-072616	7/26/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-32-10-102716	10/27/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0028**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-32-10-013017	1/30/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-10-042517	4/25/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0028**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-10-072417	7/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0026**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-10-103117	10/31/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-32-10-012918	1/29/2018	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-32-10-032818	3/28/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-32-10-041018	4/10/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-32-10-072318	7/23/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-32-10-102518	10/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-32-10-012319	1/23/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.009**			<0.032	U		<0.0058	U		<0.0058	U	
		VMP-32-10-043019	4/30/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-32-10-072319	7/23/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00069**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-10-102419	10/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-32-10-012820	1/28/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-32-10-042920	4/29/2020	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-32-10-072920	7/29/2020	<0.009	U		<0.009	U		**0.003**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-32-10-110420	11/4/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-10-012621	1/26/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.0058	U		<0.0093	U		**0.0012**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-32-20-051115	5/11/2015	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-32-20-080315	8/3/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	UJ	<0.0074	U		<0.0074	U	
		VMP-32-20-110415	11/4/2015	<0.0056	U		<0.0091	U		**0.0034**	J		**0.0075**			**0.0043**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-32-20-110415-DUP	11/4/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.0044**	J		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-32-20-021616	2/16/2016	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-32-20-042716	4/27/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-32-20-082616-R	8/29/2016	<0.0074	U		<0.012	U		<0.012	U		<0.0051	U		<0.0065	U		<0.051	U		<0.0094	U		<0.0094	U	
		VMP-32-20-102716	10/27/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00087**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-32-20-013017	1/30/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-20-042517	4/25/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-32-20-072417	7/24/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-32-20-103117	10/31/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-32-20-012918	1/29/2018	<0.0043	U		<0.0069	U		<0.0068	U		<0.003	U		**0.00049**	J		<0.03	U		<0.0055	U		<0.0055	U	
		VMP-32-20-032818	3/28/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-32-20-041018	4/10/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-32-20-072318	7/23/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-32-20-102518	10/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-32-20-012319	1/23/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0039**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-32-20-043019	4/30/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-32-20-072319	7/23/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.014**			<0.038	U		<0.007	U		<0.007	U	
		VMP-32-20-012820	1/28/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-32-20-042920	4/29/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-32-20-072920	7/29/2020	<0.0085	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-32-20-110420	11/4/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-32-20-012621	1/26/2021	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	J	U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	J	U	<0.038	U		<0.0071	U		<0.0071	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-32	10 ft	VMP-32-10-021015	2/10/2015	<0.0066	U		<0.0069	U		<0.006	J	U	<0.006	U		<0.0057	U		<0.0031	U		0.0031	J		<0.0053	U	
		VMP-32-10-051115	5/11/2015	<0.0085	U	UJ	<0.0089	U	UJ	<0.0078	U	UJ	<0.0078	U	UJ	<0.0074	U	UJ	<0.004	U	UJ	<0.0069	U	UJ	<0.0069	U	UJ
		VMP-32-10-052915-R	5/29/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0027	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-32-10-110415	11/4/2015	<0.0072	U		0.0023	J		<0.0066	U		<0.0066	U		0.001	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-10-012616	1/26/2016	<0.007	U		0.0022	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-32-10-042716	4/27/2016	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		0.0011	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-10-072616	7/26/2016	<0.007	U		0.0021	J		<0.0064	J	U	<0.0064	U		0.068			<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-32-10-102716	10/27/2016	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		0.00087	J		<0.0033	U		0.032			**0.0092**		
		VMP-32-10-013017	1/30/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.001	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-32-10-042517	4/25/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.017			**0.005**	J	
		VMP-32-10-072417	7/24/2017	<0.0066	U		0.002	J		**0.0014**	J		<0.006	U		0.0019	J		<0.0031	U		0.021			**0.006**		
		VMP-32-10-103117	10/31/2017	<0.0064	U		0.0011	J		<0.0058	U		<0.0058	U		0.00081	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-32-10-012918	1/29/2018	<0.0058	U		0.0012	J		<0.0053	U		<0.0053	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-32-10-032818	3/28/2018	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		0.0015	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-10-041018	4/10/2018	<0.0062	U		0.0012	J		**0.0034**	J		<0.0057	U		0.0013	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-32-10-072318	7/23/2018	<0.0066	U		0.0018	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-10-102518	10/25/2018	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-32-10-012319	1/23/2019	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		0.0091			<0.0027	U		0.005			**0.0017**	J	
		VMP-32-10-043019	4/30/2019	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		0.0089			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-32-10-072319	7/23/2019	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-32-10-102419	10/24/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-10-012820	1/28/2020	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-10-042920	4/29/2020	<0.0073	U		0.0018	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-32-10-072920	7/29/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-32-10-110420	11/4/2020	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-32-10-012621	1/26/2021	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
	20 ft	VMP-32-20-021015	2/10/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-32-20-051115	5/11/2015	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-20-080315	8/3/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-32-20-110415	11/4/2015	<0.0071	U		0.0019	J		**0.0036**	J		<0.0065	U		0.0049	J		<0.0034	U		0.0036	J		<0.0057	U	
		VMP-32-20-110415-DUP	11/4/2015	<0.0077	U		0.0024	J		**0.0034**	J		<0.007	U		0.005	J		<0.0036	U		0.0044	J		<0.0062	U	
		VMP-32-20-021616	2/16/2016	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-32-20-042716	4/27/2016	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0015	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-32-20-082616-R	8/29/2016	<0.0093	U		<0.0097	U		<0.0085	U		<0.0085	U		0.0007	J		<0.0044	U		<0.0075	U		<0.0075	U	
		VMP-32-20-102716	10/27/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.016			**0.0049**	J	
		VMP-32-20-013017	1/30/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0018	J		<0.0052	U	
		VMP-32-20-042517	4/25/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0025	J		<0.0031	U		0.0026	J		**0.00088**	J	
		VMP-32-20-072417	7/24/2017	<0.0067	U		0.0015	J		**0.0012**	J		<0.0061	U		0.0014	J		<0.0032	U		0.0017	J		<0.0054	U	
		VMP-32-20-103117	10/31/2017	<0.0062	U		0.001	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-32-20-012918	1/29/2018	<0.0054	U		0.0016	J		<0.005	U		<0.005	U		0.002	J		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-32-20-032818	3/28/2018	<0.0061	U		0.00096	J		**0.00091**	J		<0.0056	U		0.0012	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-32-20-041018	4/10/2018	<0.0061	U		0.00089	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-32-20-072318	7/23/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-20-102518	10/25/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-32-20-012319	1/23/2019	<0.0058	U		0.0012	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		0.00083	J		<0.0047	U	
		VMP-32-20-043019	4/30/2019	<0.0062	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-32-20-072319	7/23/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0017	J		<0.0033	U		0.0018	J		<0.0056	U	
		VMP-32-20-012820	1/28/2020	<0.0072	U		0.0014	J		**0.0018**	J		<0.0066	U		0.0014	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-20-042920	4/29/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0018	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-32-20-072920	7/29/2020	<0.0067	U		0.00086	J		<0.0061	J	U	<0.0061	U		0.027			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-32-20-110420	11/4/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-32-20-012621	1/26/2021	<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-20-012621-DUP	1/26/2021	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	J	U	<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.013			**0.0041**	J	
		VMP-32-30-050515	5/5/2015	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-32-30-073115	7/31/2015	**0.071**		J	**0.0096**		J	<0.0093	U	UJ	<0.014	U	UJ	<0.054	U	UJ	<0.0031	U	UJ	<0.013	U	UJ	**0.015**	J	J
		VMP-32-30-073115-DUP	7/31/2015	**0.037**		J	**0.0056**		J	<0.01	U	UJ	<0.016	U	UJ	<0.06	U	UJ	<0.0034	U	UJ	<0.015	U	UJ	**0.0065**	J	J
		VMP-32-30-082415	8/24/2015	**0.011**	J		**0.0026**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-32-30-082415-DUP	8/24/2015	**0.041**			<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-32-30-110415	11/4/2015	**0.022**	J		**0.0014**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0079**	J	
		VMP-32-30-020216	2/2/2016	**0.014**	J		**0.0011**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.008	J		<0.015	U	
		VMP-32-30-042716	4/27/2016	**0.0054**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-32-30-072616	7/26/2016	**0.021**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0038**	J	
		VMP-32-30-102716	10/27/2016	**0.012**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-32-30-013017	1/30/2017	**0.014**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0021	J		**0.015**		
		VMP-32-30-042517	4/25/2017	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.029	J	U	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0038**	J	
		VMP-32-30-072417	7/24/2017	**0.032**			**0.00087**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0053	J		**0.0048**	J	
		VMP-32-30-072417-DUP	7/24/2017	**0.029**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0052**	J	
		VMP-32-30-103117	10/31/2017	**0.039**	J		**0.0055**	J		<0.015	U		<0.023	U		<0.087	U		<0.005	U		<0.021	U		**0.0062**	J	
		VMP-32-30-012918	1/29/2018	<0.027	J	U	**0.00044**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-32-30-032818	3/28/2018	**0.014**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.01	J		**0.0025**	J	
		VMP-32-30-041018	4/10/2018	**0.0089**	J		**0.0014**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0074	J		<0.013	U	
		VMP-32-30-041018-DUP	4/10/2018	**0.01**	J		**0.0015**	J		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		0.0091	J		<0.012	U	
		VMP-32-30-072318	7/23/2018	**0.013**	J		**0.0003**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-32-30-102518	10/25/2018	**0.03**			<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-32-30-012319	1/23/2019	**0.0051**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-32-30-050319	5/3/2019	**0.064**			**0.008**			<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.012**	J	
		VMP-32-30-072319	7/23/2019	**0.074**			**0.018**			<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.014**	J	
		VMP-32-30-102419	10/24/2019	**0.009**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-32-30-012820	1/28/2020	**0.0084**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0018	J		<0.017	U	
		VMP-32-30-072920	7/29/2020	**0.021**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.0022**	J	
		VMP-32-30-110420	11/4/2020	**0.021**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-32-30-110420-DUP	11/4/2020	**0.025**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-32-30-012621	1/26/2021	**0.008**	J		**0.00041**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0096	J		**0.002**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-32-30-050515	5/5/2015	**0.0012**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0021**	J		<0.027	U		<0.0068	U	
		VMP-32-30-073115	7/31/2015	**0.13**		J	<0.0088	U	UJ	<0.0064	U	UJ	<0.012	U	UJ	<0.015	U	UJ	<0.0068	U	UJ	<0.029	U	UJ	<0.0072	U	UJ
		VMP-32-30-073115-DUP	7/31/2015	<0.019	J	UJ	<0.0098	U	UJ	<0.0072	U	UJ	<0.013	U	UJ	<0.016	U	UJ	<0.0076	U	UJ	<0.032	U	UJ	<0.008	U	UJ
		VMP-32-30-082415	8/24/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-32-30-082415-DUP	8/24/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-32-30-110415	11/4/2015	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		**0.0019**	J		**0.004**	J		<0.03	U		<0.0075	U	
		VMP-32-30-020216	2/2/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-32-30-042716	4/27/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-32-30-072616	7/26/2016	**0.0087**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0092**			<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-32-30-102716	10/27/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.002**	J		<0.027	U		<0.0069	U	
		VMP-32-30-013017	1/30/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0063	U	
		VMP-32-30-042517	4/25/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0064	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0011**	J		<0.025	U		<0.0063	U	
		VMP-32-30-072417	7/24/2017	**0.0026**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0016**	J		<0.026	U		<0.0064	U	
		VMP-32-30-072417-DUP	7/24/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0016**	J		**0.003**	J		<0.0063	U	
		VMP-32-30-103117	10/31/2017	<0.028	U		<0.014	U		<0.01	J	U	<0.019	U		<0.024	U		<0.011	U		<0.046	U		<0.012	U	
		VMP-32-30-012918	1/29/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-32-30-032818	3/28/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-32-30-041018	4/10/2018	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-32-30-041018-DUP	4/10/2018	<0.013	J	U	<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.00051**	J		<0.022	U		<0.0054	U	
		VMP-32-30-072318	7/23/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-32-30-102518	10/25/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-32-30-012319	1/23/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-32-30-050319	5/3/2019	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		<0.0052	U		<0.022	U		<0.0056	U	
		VMP-32-30-072319	7/23/2019	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-32-30-102419	10/24/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-32-30-012820	1/28/2020	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-32-30-072920	7/29/2020	**0.017**			<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-32-30-110420	11/4/2020	**0.058**			<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-32-30-012621	1/26/2021	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	**0.0053**			<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-32-30-050515	5/5/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-32-30-073115	7/31/2015	<0.0048	U	UJ	<0.011	U	UJ	<0.0084	U	UJ	<0.0084	U	UJ	<0.0084	U	UJ	**0.0027**	J	J	<0.0056	U	UJ	<0.0056	U	UJ
		VMP-32-30-073115-DUP	7/31/2015	<0.0054	U	UJ	<0.012	U	UJ	<0.0093	U	UJ	<0.0093	U	UJ	<0.0093	U	UJ	**0.0022**	J	J	<0.0063	U	UJ	<0.0063	U	UJ
		VMP-32-30-082415	8/24/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-32-30-082415-DUP	8/24/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-32-30-110415	11/4/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0022**	J		<0.0059	U		<0.0059	U	
		VMP-32-30-020216	2/2/2016	**0.00088**	J		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0032**	J		<0.0052	U		<0.0052	U	
		VMP-32-30-042716	4/27/2016	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0021**	J		<0.0058	U		<0.0058	U	
		VMP-32-30-072616	7/26/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0052**	J		<0.0057	U		<0.0057	U	
		VMP-32-30-102716	10/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-32-30-013017	1/30/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-32-30-042517	4/25/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-32-30-072417	7/24/2017	**0.0044**			<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-32-30-072417-DUP	7/24/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-32-30-103117	10/31/2017	<0.0077	U		<0.017	U		<0.013	U		<0.013	U		<0.013	U		<0.011	U		<0.0091	U		<0.0091	U	
		VMP-32-30-012918	1/29/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-32-30-032818	3/28/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-32-30-041018	4/10/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-32-30-041018-DUP	4/10/2018	**0.001**	J		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0025**	J		<0.0042	U		<0.0042	U	
		VMP-32-30-072318	7/23/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0029**	J		<0.0047	U		<0.0047	U	
		VMP-32-30-102518	10/25/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-32-30-012319	1/23/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0025**	J		<0.0043	U		<0.0043	U	
		VMP-32-30-050319	5/3/2019	**0.0034**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		<0.0053	U		<0.0044	U		<0.0044	U	
		VMP-32-30-072319	7/23/2019	**0.018**			<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-32-30-102419	10/24/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-32-30-012820	1/28/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0021**	J		<0.0058	U		<0.0058	U	
		VMP-32-30-072920	7/29/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-32-30-110420	11/4/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-32-30-012621	1/26/2021	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-32-30-050515	5/5/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-32-30-073115	7/31/2015	<0.0055	U	UJ	<0.0055	U	UJ	<0.0055	U	UJ	<0.048	U	UJ	<0.0064	U	UJ	<0.0063	U	UJ	<0.0063	U	UJ	<0.02	U	UJ
		VMP-32-30-073115-DUP	7/31/2015	<0.0062	U	UJ	<0.0062	U	UJ	<0.0062	U	UJ	<0.054	U	UJ	<0.0072	U	UJ	<0.007	U	UJ	<0.007	U	UJ	<0.022	U	UJ
		VMP-32-30-082415	8/24/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-32-30-082415-DUP	8/24/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-32-30-110415	11/4/2015	<0.0058	U		<0.0058	U		<0.0058	U		**0.0076**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-32-30-020216	2/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-32-30-042716	4/27/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-32-30-072616	7/26/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0016**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-32-30-102716	10/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-32-30-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0046**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-32-30-042517	4/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-32-30-072417	7/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.027**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-32-30-072417-DUP	7/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0031**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-32-30-103117	10/31/2017	<0.0089	U		<0.0089	U		<0.0089	U		**0.009**	J		<0.01	U		<0.01	U		<0.01	U		<0.032	U	
		VMP-32-30-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-32-30-032818	3/28/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-32-30-041018	4/10/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-32-30-041018-DUP	4/10/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-32-30-072318	7/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-32-30-102518	10/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0034**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-32-30-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-32-30-050319	5/3/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-32-30-072319	7/23/2019	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		**0.0034**	J		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-32-30-102419	10/24/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-32-30-012820	1/28/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-32-30-072920	7/29/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		**0.0012**	J	
		VMP-32-30-110420	11/4/2020	<0.0051	U		<0.0051	U		<0.0051	U		**0.004**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-32-30-012621	1/26/2021	<0.005	U		<0.005	U		<0.005	U		**0.00085**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	<0.011		U	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-32-30-050515	5/5/2015	0.0078	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-32-30-073115	7/31/2015	0.0087	J	J	**0.011**		J	0.016		J	<0.011	U	UJ	<0.0098	U	UJ	**0.0023**	J	J	<0.06	U	UJ	<0.0049	U	UJ
		VMP-32-30-073115-DUP	7/31/2015	<0.012	U	UJ	**0.0068**		J	0.013		J	<0.012	U	UJ	<0.011	U	UJ	**0.0018**	J	J	<0.066	U	UJ	<0.0055	U	UJ
		VMP-32-30-082415	8/24/2015	0.011			**0.0014**	J		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0053**		
		VMP-32-30-082415-DUP	8/24/2015	<0.01	U		**0.0017**	J		<0.0067	U		<0.01	U		<0.0096	U		**0.0068**			<0.058	U		**0.004**	J	
		VMP-32-30-110415	11/4/2015	0.0067	J		<0.0063	U		0.0026	J		<0.011	U		<0.01	U		**0.0023**	J		<0.062	U		**0.0021**	J	
		VMP-32-30-020216	2/2/2016	0.0058	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0037**	J		<0.055	U		**0.0026**	J	
		VMP-32-30-042716	4/27/2016	0.0042	J		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		**0.003**	J		<0.061	U		<0.0051	U	
		VMP-32-30-072616	7/26/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-32-30-102716	10/27/2016	0.0087	J		**0.0015**	J		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-32-30-013017	1/30/2017	0.013			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		**0.00046**	J	
		VMP-32-30-042517	4/25/2017	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.0092	J	U	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-30-072417	7/24/2017	0.023			**0.002**	J		<0.0061	U		<0.0095	U		<0.0086	U		**0.0024**	J		<0.053	U		**0.004**	J	
		VMP-32-30-072417-DUP	7/24/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-32-30-103117	10/31/2017	0.012	J		<0.0097	U		<0.011	U		<0.017	U		<0.016	U		<0.0092	U		<0.096	U		**0.0018**	J	
		VMP-32-30-012918	1/29/2018	0.0049	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-32-30-032818	3/28/2018	0.0034	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		**0.0016**	J		<0.049	U		<0.0041	U	
		VMP-32-30-041018	4/10/2018	0.0074	J		**0.0011**	J		<0.0054	U		<0.0084	U		<0.0077	U		**0.0062**			<0.047	U		**0.016**		
		VMP-32-30-041018-DUP	4/10/2018	0.0057	J		**0.00086**	J		<0.0052	U		<0.008	U		<0.0073	U		**0.0058**			<0.045	U		**0.016**		
		VMP-32-30-072318	7/23/2018	0.0069	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-32-30-102518	10/25/2018	0.0038	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-32-30-012319	1/23/2019	<0.0081	U		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-32-30-050319	5/3/2019	<0.0081	U		**0.0037**	J		0.0028	J		<0.0082	ND,UJ		<0.0075	U		**0.0041**	J		<0.046	U		<0.0038	U	
		VMP-32-30-072319	7/23/2019	<0.01	U		**0.0028**	J		<0.0068	U		<0.01	U		<0.0096	U		**0.043**			<0.059	U		**0.012**		
		VMP-32-30-102419	10/24/2019	0.0021	J	J	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-32-30-012820	1/28/2020	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-32-30-072920	7/29/2020	0.0048	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-32-30-110420	11/4/2020	<0.0096	U		**0.0012**	J		0.002	J		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-32-30-012621	1/26/2021	0.0051	J	J	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
Remediation Objective				**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	<0.021	U		0.051			<0.0062	U		<0.0052	U		<0.0045	U					**0.0032**	J		<0.0062	U	
		VMP-32-30-050515	5/5/2015	<0.022	U		0.0022	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.012**	J		<0.0065	U	
		VMP-32-30-073115	7/31/2015	**0.0044**	J	J	0.0043	J	J	**0.0013**	J	J	**0.002**	J	J	<0.005	U	UJ				**0.0076**	J	J	**0.0038**	J	J
		VMP-32-30-073115-DUP	7/31/2015	<0.025	U	UJ	<0.018	U	UJ	**0.00094**	J	J	**0.0018**	J	J	<0.0056	U	UJ				<0.015	U	UJ	**0.0028**	J	J
		VMP-32-30-082415	8/24/2015	<0.023	U		0.0053	J		<0.0069	U		<0.0057	U		<0.005	U					<0.014	U		<0.0069	U	
		VMP-32-30-082415-DUP	8/24/2015	<0.022	U		0.0059	J		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-32-30-110415	11/4/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0052	U					**0.0038**	J		<0.0072	U	
		VMP-32-30-020216	2/2/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					**0.013**			<0.0063	U	
		VMP-32-30-042716	4/27/2016	<0.024	U		0.016	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.02**			<0.0071	U	
		VMP-32-30-072616	7/26/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-32-30-102716	10/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		<0.013	U		<0.0065	U	
		VMP-32-30-013017	1/30/2017	<0.02	U		0.011	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-32-30-042517	4/25/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0089**	J		<0.0061	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.013**			<0.006	U	
		VMP-32-30-072417	7/24/2017	<0.02	U		0.073			<0.0061	U		<0.005	U		<0.018	U					**0.032**			<0.0061	U	
		VMP-32-30-072417-DUP	7/24/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.01**	J		<0.006	U	
		VMP-32-30-103117	10/31/2017	<0.037	U		0.0055	J		<0.011	U		<0.0092	U		<0.032	U					<0.022	U		<0.011	U	
		VMP-32-30-012918	1/29/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0016**	J		<0.0055	U	
		VMP-32-30-032818	3/28/2018	<0.019	U		0.005	J		<0.0057	U		<0.0048	U		<0.017	U		<0.012	U		<0.011	U		<0.0057	U	
		VMP-32-30-041018	4/10/2018	<0.018	U		0.012	J		<0.0054	U		<0.0045	U		<0.016	U		<0.012	U		**0.0018**	J		<0.0054	U	
		VMP-32-30-041018-DUP	4/10/2018	<0.017	U		0.012	J		<0.0052	U		<0.0043	U		<0.015	U		<0.011	U		**0.002**	J		<0.0052	U	
		VMP-32-30-072318	7/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-32-30-102518	10/25/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0045**	J		<0.0056	U	
		VMP-32-30-012319	1/23/2019	<0.018	U		0.0037	J		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-32-30-050319	5/3/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.01	U		<0.0053	U	
		VMP-32-30-072319	7/23/2019	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0053**	J		<0.0068	U	
		VMP-32-30-102419	10/24/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0013**	J		<0.0062	U	
		VMP-32-30-012820	1/28/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.0016**	J		<0.0071	U	
		VMP-32-30-072920	7/29/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0099**	J		<0.0065	J	U
		VMP-32-30-110420	11/4/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.014**			<0.0063	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.022**			<0.0069	U	
		VMP-32-30-012621	1/26/2021	<0.021	U		0.003	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0054**	J		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-32-30-050515	5/5/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-32-30-073115	7/31/2015	<0.0059	U	UJ	<0.0096	U	UJ	<0.0095	U	UJ	<0.0041	U	UJ	**0.036**		J	<0.041	U	UJ	<0.0076	U	UJ	<0.0076	U	UJ
		VMP-32-30-073115-DUP	7/31/2015	<0.0066	U	UJ	<0.011	U	UJ	<0.01	U	UJ	<0.0046	U	UJ	**0.022**		J	<0.046	U	UJ	<0.0085	U	UJ	<0.0085	U	UJ
		VMP-32-30-082415	8/24/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0026**	J		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-32-30-082415-DUP	8/24/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0023**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-32-30-110415	11/4/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-32-30-020216	2/2/2016	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0015**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-32-30-042716	4/27/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-32-30-072616	7/26/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-32-30-102716	10/27/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00078**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-32-30-013017	1/30/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0047**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-30-042517	4/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00057**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-30-072417	7/24/2017	**0.00091**	J		<0.0085	U		<0.0084	U		<0.0036	U		**0.0097**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-32-30-072417-DUP	7/24/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-32-30-103117	10/31/2017	<0.0096	U		<0.015	U		<0.015	U		<0.0066	U		<0.0084	U		<0.067	U		<0.012	U		<0.012	U	
		VMP-32-30-012918	1/29/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-32-30-032818	3/28/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-32-30-041018	4/10/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.00074**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-32-30-041018-DUP	4/10/2018	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.00056**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-32-30-072318	7/23/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-32-30-102518	10/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-32-30-012319	1/23/2019	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-32-30-050319	5/3/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.056**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-32-30-072319	7/23/2019	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.078**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-32-30-102419	10/24/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-32-30-012820	1/28/2020	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-32-30-072920	7/29/2020	<0.0091	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-32-30-110420	11/4/2020	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0075**			<0.038	U		<0.007	U		<0.007	U	
		VMP-32-30-110420-DUP	11/4/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-32-30-012621	1/26/2021	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-32-30-021015	2/10/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0014	J		<0.0032	U		<0.0055	J	U	<0.0055	U	
		VMP-32-30-050515	5/5/2015	<0.0071	U		0.0017	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-32-30-073115	7/31/2015	<0.0075	U	UJ	<0.0078	U	UJ	**0.023**		J	**0.0053**	J	J	0.0045	J	J	<0.0036	U	UJ	0.026		J	**0.0094**		J
		VMP-32-30-073115-DUP	7/31/2015	<0.0084	U	UJ	<0.0087	U	UJ	**0.021**		J	**0.0054**	J	J	0.0046	J	J	<0.004	U	UJ	0.017		J	**0.0074**		J
		VMP-32-30-082415	8/24/2015	<0.0075	U		<0.0079	U		**0.0009**	J		<0.0069	U		0.0059	J		<0.0036	U		0.0023	J		<0.0061	U	
		VMP-32-30-082415-DUP	8/24/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0061	J		<0.0035	U		0.0021	J		<0.0059	U	
		VMP-32-30-110415	11/4/2015	<0.0078	U		0.002	J		**0.0047**	J		<0.0072	J	U	0.008			<0.0037	U		0.0024	J		<0.0063	U	
		VMP-32-30-020216	2/2/2016	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		0.0013	J		<0.0033	U		0.0012	J		<0.0056	U	
		VMP-32-30-042716	4/27/2016	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0011	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-32-30-072616	7/26/2016	<0.0076	U		0.0017	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-32-30-102716	10/27/2016	<0.0071	U		0.0013	J		<0.0065	U		<0.0065	U		0.0065			<0.0034	U		0.0048	J		**0.0017**	J	
		VMP-32-30-013017	1/30/2017	<0.0065	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-32-30-042517	4/25/2017	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.00061	J		<0.0032	U		0.00088	J		<0.0054	U	
		VMP-32-30-042517-DUP	4/25/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-32-30-072417	7/24/2017	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		0.0009	J		<0.0032	U		0.0045	J		<0.0054	U	
		VMP-32-30-072417-DUP	7/24/2017	<0.0065	U		0.0011	J		<0.006	U		<0.006	U		0.00085	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-32-30-103117	10/31/2017	<0.012	U		<0.013	U		<0.011	U		<0.011	U		<0.01	U		<0.0057	U		<0.0097	U		<0.0097	U	
		VMP-32-30-012918	1/29/2018	<0.006	U		0.0014	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-32-30-032818	3/28/2018	<0.0062	U		0.00094	J		<0.0057	U		<0.0057	U		0.0013	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-32-30-041018	4/10/2018	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.015			<0.0028	U		0.0015	J		<0.0048	U	
		VMP-32-30-041018-DUP	4/10/2018	<0.0056	U		0.0014	J		<0.0052	U		<0.0052	U		0.017			<0.0027	U		0.0012	J		<0.0046	U	
		VMP-32-30-072318	7/23/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0036	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-32-30-102518	10/25/2018	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-32-30-012319	1/23/2019	<0.0058	U		0.0013	J		<0.0052	U		<0.0053	U		0.014			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-32-30-050319	5/3/2019	<0.0058	U		<0.006	U		**0.0058**			<0.0053	U		0.0028	J	J	<0.0027	U		0.0095			**0.0034**	J	
		VMP-32-30-072319	7/23/2019	<0.0074	U		0.0015	J		<0.0068	U		<0.0068	U		0.022			<0.0035	U		0.0086			<0.006	U	
		VMP-32-30-102419	10/24/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-32-30-012820	1/28/2020	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-32-30-072920	7/29/2020	<0.0071	U		0.00096	J		<0.0065	U		<0.0065	U		0.0019	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-32-30-110420	11/4/2020	<0.0069	U		0.001	J		**0.0018**	J		<0.0063	U		<0.006	U		<0.0033	U		0.0066			**0.0014**	J	
		VMP-32-30-110420-DUP	11/4/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-32-30-012621	1/26/2021	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	0.0087	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-41-10-020415-DUP	2/4/2015	0.0064	J		0.001	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-41-10-043015	4/30/2015	0.015	J		0.0014	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		0.029		
		VMP-41-10-072815	7/28/2015	0.027	J		0.0036	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.007	J	
		VMP-41-10-110215	11/2/2015	0.022	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.008	J	
		VMP-41-10-012716	1/27/2016	0.009	J		0.0006	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-41-10-050216	5/2/2016	0.016	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		0.004	J	
		VMP-41-10-072816	7/28/2016	0.038			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-41-10-102416	10/24/2016	0.013	J		<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-41-10-013017	1/30/2017	0.019	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.012	J	
		VMP-41-10-050217	5/2/2017	<0.029	J	U	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		0.0024	J	
		VMP-41-10-072717	7/27/2017	0.017	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0045	J	
		VMP-41-10-102717	10/27/2017	<0.026	J	U	<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-41-10-012418	1/24/2018	<0.026	J	U	0.0004	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0036	J		<0.013	U	
		VMP-41-10-042018	4/20/2018	0.0064	J		<0.0036	U		0.0043	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-41-10-072018	7/20/2018	0.026	J		0.00058	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-10-102518	10/25/2018	0.017	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0039	J		<0.014	U	
		VMP-41-10-012919	1/29/2019	1.9	J		6.7			<0.74	U		<1.1	U		<4.3	U		<0.24	U		1.7			<1.3	U	
		VMP-41-10-022719R	2/27/2019	0.0041	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-10-050319	5/3/2019	0.013	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.014			<0.014	U	
		VMP-41-10-072619	7/26/2019	0.0061	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-41-10-102819	10/28/2019	<0.03	U		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-10-012420	1/24/2020	<0.031	U		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-41-10-042320	4/23/2020	0.0085	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-10-072920	7/29/2020	0.018	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.002	J	
		VMP-41-10-072920-DUP	7/29/2020	0.011	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		0.0022	J	
		VMP-41-10-103020	10/30/2020	<0.031	J	U	<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-41-10-012721	1/27/2021	0.0069	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		0.0012	J	
	20 ft	VMP-41-20-020415	2/4/2015	0.0045	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-20-043015	4/30/2015	<0.3	U		<0.099	U		<0.21	U		<0.32	U		<0.12	U		<0.069	U		<0.3	U		<0.37	U	
		VMP-41-20-072815	7/28/2015	0.032	J		<0.0046	J	U	<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		0.0082	J	
		VMP-41-20-110215	11/3/2015	0.032	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.011	J		0.014	J	
		VMP-41-20-012716	1/27/2016	0.0094	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-41-20-050216	5/2/2016	0.03			0.00083	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0085	J	
		VMP-41-20-072816	7/28/2016	0.016	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-41-20-102416	10/24/2016	0.026	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0094	J	
		VMP-41-20-013017	1/30/2017	0.012	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.016		
		VMP-41-20-050217	5/2/2017	0.046			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		0.0034	J	
		VMP-41-20-072717	7/27/2017	0.011	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0044	J	
		VMP-41-20-102717	10/27/2017	0.012	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0042	J	
		VMP-41-20-012418	1/24/2018	0.0093	J		0.00045	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-41-20-050118	5/1/2018	0.026	J		<0.0038	U		0.0045	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0075	J	
		VMP-41-20-072018	7/20/2018	0.03			<0.0038	U		0.0098			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.004	J	
		VMP-41-20-102518	10/25/2018	0.0051	J		<0.0038	U		0.002	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-20-012919	1/29/2019	0.011	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-41-20-050319	5/3/2019	0.051			<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-41-20-072619	7/26/2019	0.0081	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-41-20-072619-DUP	7/26/2019	0.019	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-41-20-102819	10/28/2019	<0.03	U		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-20-012420	1/24/2020	0.0055	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-41-20-042320	4/23/2020	0.014	J		0.0013	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.0056	J		<0.016	U	
		VMP-41-20-072920	7/29/2020	0.0068	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0039	J		0.0018	J	
		VMP-41-20-103020	10/30/2020	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0028	J	
		VMP-41-20-012721	1/27/2021	0.031			0.00047	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.011	J		0.0043	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-41-10-020415-DUP	2/4/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-41-10-043015	4/30/2015	<0.018	J	U	<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-41-10-072815	7/28/2015	0.004	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		0.0028	J		<0.007	U	
		VMP-41-10-110215	11/2/2015	0.0023	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-41-10-012716	1/27/2016	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-41-10-050216	5/2/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-41-10-072816	7/28/2016	0.0052	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-41-10-102416	10/24/2016	<0.019	U		<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-41-10-013017	1/30/2017	0.0012	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-41-10-050217	5/2/2017	0.015	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-41-10-072717	7/27/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-41-10-102717	10/27/2017	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-41-10-012418	1/24/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-41-10-042018	4/20/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.033			<0.024	U		<0.0059	U	
		VMP-41-10-072018	7/20/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-41-10-102518	10/25/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-41-10-012919	1/29/2019	0.41	J		<0.69	U		<0.51	U		<0.94	U		<1.2	U		<0.54	U		<2.3	U		<0.57	U	
		VMP-41-10-022719R	2/27/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-41-10-050319	5/3/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-41-10-072619	7/26/2019	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-41-10-102819	10/28/2019	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-41-10-012420	1/24/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-41-10-042320	4/23/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-41-10-072920	7/29/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-41-10-072920-DUP	7/29/2020	0.0027	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-41-10-103020	10/30/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-41-10-012721	1/27/2021	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-41-20-043015	4/30/2015	<0.097	U		<0.2	U		<0.14	U		<0.26	U		<0.33	U		<0.15	U		<0.26	U		<0.16	U	
		VMP-41-20-072815	7/28/2015	<0.018	J	U	<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-41-20-110215	11/3/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		0.0025	J		<0.0071	U	
		VMP-41-20-012716	1/27/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-41-20-050216	5/2/2016	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-41-20-072816	7/28/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-41-20-102416	10/24/2016	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-41-20-013017	1/30/2017	0.0011	J		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	ND,UJ	UJ	<0.0059	U	
		VMP-41-20-050217	5/2/2017	0.0014	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-41-20-072717	7/27/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-41-20-102717	10/27/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-41-20-012418	1/24/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-41-20-050118	5/1/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.044			<0.024	U		<0.0062	U	
		VMP-41-20-072018	7/20/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.22			<0.024	U		<0.0061	U	
		VMP-41-20-102518	10/25/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.016			<0.024	U		<0.0061	U	
		VMP-41-20-012919	1/29/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		0.0051	J		<0.024	U		<0.0059	U	
		VMP-41-20-050319	5/3/2019	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-41-20-072619	7/26/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	ND,UJ	UJ
		VMP-41-20-072619-DUP	7/26/2019	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	ND,UJ	UJ
		VMP-41-20-102819	10/28/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-41-20-012420	1/24/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-41-20-042320	4/23/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-41-20-072920	7/29/2020	0.0029	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-41-20-103020	10/30/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		0.0069			<0.024	U		<0.0061	U	
		VMP-41-20-012721	1/27/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0022	J		<0.0049	U		<0.0049	U	
		VMP-41-10-020415-DUP	2/4/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0027	J		<0.0049	U		<0.0049	U	
		VMP-41-10-043015	4/30/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		0.0022	J		<0.006	U		<0.0059	U	
		VMP-41-10-072815	7/28/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0028	J		<0.0055	U		<0.0055	U	
		VMP-41-10-110215	11/2/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0048	J		<0.0053	U		<0.0053	U	
		VMP-41-10-012716	1/27/2016	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		0.002	J		<0.0049	U		<0.0049	U	
		VMP-41-10-050216	5/2/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0035	J		<0.0052	U		<0.0052	U	
		VMP-41-10-072816	7/28/2016	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0032	J		<0.0049	U		<0.0049	U	
		VMP-41-10-102416	10/24/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		0.0022	J		<0.0061	U		<0.0061	U	
		VMP-41-10-013017	1/30/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0026	J		<0.0049	U		<0.0049	U	
		VMP-41-10-050217	5/2/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-41-10-072717	7/27/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0028	J		<0.0047	U		<0.0047	U	
		VMP-41-10-102717	10/27/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		0.0028	J		<0.0044	U		<0.0044	U	
		VMP-41-10-012418	1/24/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.003	J		<0.0045	U		<0.0045	U	
		VMP-41-10-042018	4/20/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-41-10-072018	7/20/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0023	J		<0.0051	U		<0.0051	U	
		VMP-41-10-102518	10/25/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-41-10-012919	1/29/2019	5.3			<0.84	U		<0.66	U		<0.66	U		<0.66	U		<0.54	U		<0.44	U		<0.44	U	
		VMP-41-10-022719R	2/27/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-41-10-050319	5/3/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-41-10-072619	7/26/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0019	J		<0.0053	U		<0.0053	U	
		VMP-41-10-102819	10/28/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		0.0038	J		<0.005	U		<0.005	U	
		VMP-41-10-012420	1/24/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-41-10-042320	4/23/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-41-10-072920	7/29/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0019	J		<0.0055	U		<0.0055	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0023	J		<0.0056	U		<0.0056	U	
		VMP-41-10-103020	10/30/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0021	J		<0.0053	U		<0.0053	U	
		VMP-41-10-012721	1/27/2021	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0023	J		<0.0046	U		<0.0046	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0024	J		<0.0051	U		<0.0051	U	
		VMP-41-20-043015	4/30/2015	<0.11	U		<0.24	U		<0.19	U		<0.19	U		<0.19	U		<0.15	U		<0.12	U		<0.12	U	
		VMP-41-20-072815	7/28/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		0.0021	J		<0.0059	U		<0.0059	U	
		VMP-41-20-110215	11/3/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0043	J		<0.0056	U		<0.0056	U	
		VMP-41-20-012716	1/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.002	J		<0.0054	U		<0.0054	U	
		VMP-41-20-050216	5/2/2016	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0023	J		<0.0048	U		<0.0048	U	
		VMP-41-20-072816	7/28/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		0.0031	J		<0.006	U		<0.006	U	
		VMP-41-20-102416	10/24/2016	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		0.0023	J		<0.0047	U		<0.0047	U	
		VMP-41-20-013017	1/30/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0028	J		<0.0046	U		<0.0046	U	
		VMP-41-20-050217	5/2/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		0.0022	J		<0.0047	U		<0.0047	U	
		VMP-41-20-072717	7/27/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-41-20-102717	10/27/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0026	J		<0.0046	U		<0.0046	U	
		VMP-41-20-012418	1/24/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0032	J		<0.0046	U		<0.0046	U	
		VMP-41-20-050118	5/1/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0021	J		<0.0048	U		<0.0048	U	
		VMP-41-20-072018	7/20/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0028	J		<0.0048	U		<0.0048	U	
		VMP-41-20-102518	10/25/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0024	J		<0.0048	U		<0.0048	U	
		VMP-41-20-012919	1/29/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0022	J		<0.0046	U		<0.0046	U	
		VMP-41-20-050319	5/3/2019	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-41-20-072619	7/26/2019	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0017	J		<0.0054	U		<0.0054	U	
		VMP-41-20-072619-DUP	7/26/2019	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		0.0018	J		<0.0058	U		<0.0058	U	
		VMP-41-20-102819	10/28/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0039	J		<0.0051	U		<0.0051	U	
		VMP-41-20-012420	1/24/2020	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0067	U		<0.0055	U		<0.0055	U	
		VMP-41-20-042320	4/23/2020	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0022	J		<0.0055	U		<0.0055	U	
		VMP-41-20-072920	7/29/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0025	J		<0.0053	U		<0.0053	U	
		VMP-41-20-103020	10/30/2020	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-41-20-012721	1/27/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0024	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-41-10-020415-DUP	2/4/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-41-10-043015	4/30/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-41-10-072815	7/28/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-41-10-110215	11/2/2015	<0.0052	U		<0.0052	U		<0.0052	U		0.0045	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-10-012716	1/27/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-41-10-050216	5/2/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-41-10-072816	7/28/2016	<0.0048	U		<0.0048	U		<0.0048	U		0.012	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-41-10-102416	10/24/2016	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-41-10-013017	1/30/2017	<0.0048	U		<0.0048	U		<0.0048	U		0.0013	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-41-10-050217	5/2/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-41-10-072717	7/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-41-10-102717	10/27/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-41-10-012418	1/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-41-10-042018	4/20/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-41-10-072018	7/20/2018	<0.005	U		<0.005	U		<0.005	U		0.0039	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-41-10-102518	10/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-10-012919	1/29/2019	<0.44	U		<0.44	U		<0.44	U		0.59	J		<0.51	U		<0.5	U		<0.5	U		<1.6	U	
		VMP-41-10-022719R	2/27/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-10-050319	5/3/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-41-10-072619	7/26/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-10-102819	10/28/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	ND,UJ	UJ	<0.0056	U		<0.0056	U		<0.018	U	
		VMP-41-10-012420	1/24/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-41-10-042320	4/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-10-072920	7/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-41-10-103020	10/30/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-41-10-012721	1/27/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	J	U	<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-41-20-043015	4/30/2015	<0.12	U		<0.12	U		<0.12	U		<0.11	U		<0.14	U		<0.14	U		<0.14	U		<0.45	U	
		VMP-41-20-072815	7/28/2015	<0.0057	U		<0.0057	U		<0.0057	U		0.0027	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-41-20-110215	11/3/2015	<0.0055	U		<0.0055	U		<0.0055	U		0.0052	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-41-20-012716	1/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-20-050216	5/2/2016	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-41-20-072816	7/28/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-41-20-102416	10/24/2016	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-41-20-013017	1/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		0.0032	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-41-20-050217	5/2/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-41-20-072717	7/27/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-20-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-41-20-012418	1/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-41-20-050118	5/1/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-20-072018	7/20/2018	<0.0047	U		<0.0047	U		<0.0047	U		0.0042	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-20-102518	10/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-20-012919	1/29/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-41-20-050319	5/3/2019	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-41-20-072619	7/26/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-20-072619-DUP	7/26/2019	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-41-20-102819	10/28/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	ND,UJ	UJ	<0.0058	U		<0.0058	U		<0.018	U	
		VMP-41-20-012420	1/24/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-41-20-042320	4/23/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-41-20-072920	7/29/2020	<0.0052	U		<0.0052	U		<0.0052	U		0.0044	J		<0.006	U		<0.0059	U		<0.0059	U		0.0015	J	
		VMP-41-20-103020	10/30/2020	<0.0046	U		<0.0046	U		<0.0046	U		0.0016	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-41-20-012721	1/27/2021	<0.0048	U		<0.0048	U		<0.0048	U		0.0026	J		<0.0056	U		<0.0055	U		<0.0055	U		0.0027	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	0.0067	J		0.0016	J		<0.0059	J	U	<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		0.001	J	
		VMP-41-10-020415-DUP	2/4/2015	<0.0092	U		<0.0053	U		<0.006	J	U	<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		0.0014	J	
		VMP-41-10-043015	4/30/2015	0.0049	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-41-10-072815	7/28/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-41-10-110215	11/2/2015	0.01			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		0.0034	J		<0.056	U		0.0045	J	
		VMP-41-10-012716	1/27/2016	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	ND,UJ	UJ	<0.0043	U	
		VMP-41-10-050216	5/2/2016	0.0048	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-41-10-072816	7/28/2016	0.0088	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-41-10-102416	10/24/2016	<0.011	U		<0.0065	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		0.0017	J	
		VMP-41-10-013017	1/30/2017	0.072			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		0.00087	J	
		VMP-41-10-050217	5/2/2017	0.043			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-10-072717	7/27/2017	0.031			<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-41-10-102717	10/27/2017	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-41-10-012418	1/24/2018	0.0048	J		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		0.0014	J	
		VMP-41-10-042018	4/20/2018	0.022			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-41-10-072018	7/20/2018	0.013			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		0.0015	J		<0.054	U		<0.0044	U	
		VMP-41-10-102518	10/25/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		0.0014	J	
		VMP-41-10-012919	1/29/2019	0.4	J		18			1.6			<0.84	U		<0.77	U		59			<4.7	U		57		
		VMP-41-10-022719R	2/27/2019	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-10-050319	5/3/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	ND,UJ		<0.0084	U		<0.005	U		<0.052	U		0.0061		
		VMP-41-10-072619	7/26/2019	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-41-10-102819	10/28/2019	<0.0094	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		0.0024	J	
		VMP-41-10-012420	1/24/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-41-10-042320	4/23/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-10-072920	7/29/2020	0.0035	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-41-10-103020	10/30/2020	0.0064	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-41-10-012721	1/27/2021	<0.022	U	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-41-20-043015	4/30/2015	<0.23	U		<0.14	U		<0.15	U		<0.24	U		<0.22	U		<0.13	U		<1.3	U		<0.11	U	
		VMP-41-20-072815	7/28/2015	0.016			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-41-20-110215	11/3/2015	0.34			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		0.0048	J	
		VMP-41-20-012716	1/27/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	ND,UJ	UJ	<0.0047	U	
		VMP-41-20-050216	5/2/2016	0.0064	J		0.00065	J		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		0.0014	J	
		VMP-41-20-072816	7/28/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-41-20-102416	10/24/2016	<0.0088	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-41-20-013017	1/30/2017	0.077			<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-41-20-050217	5/2/2017	0.01			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		0.0013	J		<0.049	U		<0.0041	U	
		VMP-41-20-072717	7/27/2017	0.028			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-20-102717	10/27/2017	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-41-20-012418	1/24/2018	0.0059	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-41-20-050118	5/1/2018	0.0045	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-20-072018	7/20/2018	0.014			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-41-20-102518	10/25/2018	0.022			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-41-20-012919	1/29/2019	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-41-20-050319	5/3/2019	<0.01	U		<0.0061	U		<0.0069	U		<0.011	ND,UJ		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-41-20-072619	7/26/2019	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-41-20-072619-DUP	7/26/2019	0.0033	J		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-41-20-102819	10/28/2019	<0.0096	U	UJ	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-41-20-012420	1/24/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-41-20-042320	4/23/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		0.0017	J		<0.058	U		0.0073		
		VMP-41-20-072920	7/29/2020	0.0084	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-41-20-103020	10/30/2020	0.0057	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-41-20-012721	1/27/2021	0.016	J	J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	<0.02	U		0.0022	J		<0.0059	U		<0.005	U		<0.0044	U					0.013			<0.0059	J	U
		VMP-41-10-020415-DUP	2/4/2015	<0.02	U		0.0017	J		<0.006	U		<0.005	U		<0.0044	U					0.012			<0.006	U	
		VMP-41-10-043015	4/30/2015	0.0035	J		<0.017	U		<0.0072	U		0.0049	J		<0.0053	U					0.042			<0.0072	U	
		VMP-41-10-072815	7/28/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					0.0097	J		<0.0067	U	
		VMP-41-10-110215	11/2/2015	<0.022	U		0.0065	J		<0.0065	U		<0.0054	U		<0.0048	U					0.032			<0.0065	U	
		VMP-41-10-012716	1/27/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					0.0041	J		<0.006	U	
		VMP-41-10-050216	5/2/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					0.0028	J		<0.0063	U	
		VMP-41-10-072816	7/28/2016	<0.02	U		0.015			<0.0059	U		<0.005	U		<0.017	U					0.067			<0.0059	U	
		VMP-41-10-102416	10/24/2016	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.022	U		<0.016	U		<0.015	U		<0.0074	U	
		VMP-41-10-013017	1/30/2017	0.0013	J		0.0041	J		<0.0059	U		0.0014	J		<0.017	U					0.0092	J		<0.0059	U	
		VMP-41-10-050217	5/2/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-41-10-072717	7/27/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					0.003	J		<0.0057	U	
		VMP-41-10-102717	10/27/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					0.0028	J		<0.0054	U	
		VMP-41-10-012418	1/24/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					0.0033	J		<0.0055	U	
		VMP-41-10-042018	4/20/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-41-10-072018	7/20/2018	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-41-10-102518	10/25/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-41-10-012919	1/29/2019	<1.8	U		17			0.42	J		<0.45	U		<1.6	U					0.49	J		0.41	J	
		VMP-41-10-022719R	2/27/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-41-10-050319	5/3/2019	<0.02	U		0.021			<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-41-10-072619	7/26/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.0048	J		<0.0065	U	
		VMP-41-10-102819	10/28/2019	<0.02	U		0.0092	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-41-10-012420	1/24/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-41-10-042320	4/23/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.0033	J		<0.0058	U	
		VMP-41-10-072920	7/29/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					0.0066	J		<0.0066	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					0.0062	J		<0.0068	U	
		VMP-41-10-103020	10/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					0.014			<0.0064	U	
		VMP-41-10-012721	1/27/2021	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					0.0044	J		<0.0056	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.021	U		0.002	J		<0.0062	U		<0.0052	U		<0.0045	U					0.0069	J		<0.0062	U	
		VMP-41-20-043015	4/30/2015	<0.51	U		<0.37	U		<0.15	U		<0.13	U		<0.11	U					0.087	J		<0.15	U	
		VMP-41-20-072815	7/28/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					0.0036	J		<0.0071	U	
		VMP-41-20-110215	11/3/2015	0.0012	J		<0.016	U		<0.0068	U		0.00096	J		<0.005	U					0.049			<0.0068	U	
		VMP-41-20-012716	1/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					<0.013	U		<0.0065	U	
		VMP-41-20-050216	5/2/2016	0.0022	J		0.0043	J		<0.0058	U		<0.0048	U		<0.0042	U					0.0062	J		<0.0058	U	
		VMP-41-20-072816	7/28/2016	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					0.0054	J		<0.0073	U	
		VMP-41-20-102416	10/24/2016	0.0027	J		<0.014	U		<0.0058	U		0.0024	J		<0.017	U		<0.012	U		<0.012	J	U	<0.0058	U	
		VMP-41-20-013017	1/30/2017	<0.019	U		0.0022	J		<0.0056	U		<0.0047	U		<0.016	U					0.0071	J		<0.0056	U	
		VMP-41-20-050217	5/2/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-41-20-072717	7/27/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-41-20-102717	10/27/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-41-20-012418	1/24/2018	<0.018	U		0.0047	J		<0.0056	U		<0.0046	U		<0.016	U					0.0048	J		<0.0056	U	
		VMP-41-20-050118	5/1/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-41-20-072018	7/20/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.007	J		<0.0058	U	
		VMP-41-20-102518	10/25/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-41-20-012919	1/29/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-41-20-050319	5/3/2019	<0.023	U		<0.016	U		<0.0069	U		<0.0057	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-41-20-072619	7/26/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					0.0042	J		<0.0065	U	
		VMP-41-20-072619-DUP	7/26/2019	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					0.0045	J		<0.0071	U	
		VMP-41-20-102819	10/28/2019	<0.021	U		0.0066	J		<0.0062	U		<0.0052	U		<0.018	U					0.0055	J		<0.0062	U	
		VMP-41-20-012420	1/24/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-41-20-042320	4/23/2020	<0.022	U		0.012	J		<0.0067	U		<0.0056	U		<0.02	U					0.004	J		<0.0067	U	
		VMP-41-20-072920	7/29/2020	<0.021	U		0.0029	J		<0.0064	U		<0.0053	U		<0.019	U					0.012	J		<0.0064	J	U
		VMP-41-20-103020	10/30/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.0081	J		<0.0058	U	
		VMP-41-20-012721	1/27/2021	<0.02	U		0.0041	J		<0.0059	U		<0.0049	U		<0.017	U					0.038			<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0043	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-10-020415-DUP	2/4/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		0.0039	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-10-043015	4/30/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-41-10-072815	7/28/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-41-10-110215	11/2/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		0.0018	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-41-10-012716	1/27/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	ND,UJ	UJ	<0.0066	U		<0.0066	U	
		VMP-41-10-050216	5/2/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-41-10-072816	7/28/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0051			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-10-102416	10/24/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-41-10-013017	1/30/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		0.0011	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-10-050217	5/2/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-10-072717	7/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-41-10-102717	10/27/2017	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-41-10-012418	1/24/2018	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		0.00089	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-41-10-042018	4/20/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		0.0018	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-10-072018	7/20/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0019	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-41-10-102518	10/25/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-10-012919	1/29/2019	<0.47	U		<0.76	U		<0.75	U		<0.32	U		120	CN	J	<3.3	U		<0.6	U		<0.6	U	
		VMP-41-10-022719R	2/27/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-10-050319	5/3/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-10-072619	7/26/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-41-10-102819	10/28/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-41-10-012420	1/24/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-41-10-042320	4/23/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-10-072920	7/29/2020	<0.0092	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0094	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-41-10-103020	10/30/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-41-10-012721	1/27/2021	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		0.0011	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-41-20-043015	4/30/2015	<0.13	U		<0.21	U		<0.21	U		<0.092	U		<0.12	U		<0.92	U		<0.17	U		<0.17	U	
		VMP-41-20-072815	7/28/2015	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-41-20-110215	11/3/2015	<0.0059	U		<0.0095	U		<0.0094	U		0.0014	J		0.0022	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-41-20-012716	1/27/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	ND,UJ	UJ	<0.0072	U		<0.0072	U	
		VMP-41-20-050216	5/2/2016	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.0024	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-41-20-072816	7/28/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		0.00086	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-41-20-102416	10/24/2016	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		0.00063	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-41-20-013017	1/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		0.0041	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-20-050217	5/2/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-41-20-072717	7/27/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.001	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-20-102717	10/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-20-012418	1/24/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.0034	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-20-050118	5/1/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-20-072018	7/20/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		0.0017	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-20-102518	10/25/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-41-20-012919	1/29/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-20-050319	5/3/2019	<0.006	U		<0.0096	U		0.0064	J		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-41-20-072619	7/26/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		0.00057	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-41-20-072619-DUP	7/26/2019	<0.0061	U		<0.0099	U		0.01			<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-41-20-102819	10/28/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-41-20-012420	1/24/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-41-20-042320	4/23/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-41-20-072920	7/29/2020	<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		0.0021	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-41-20-103020	10/30/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-41-20-012721	1/27/2021	<0.0051	U		<0.0083	U		0.0016	J		<0.0036	U		0.0012	J		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-41	10 ft	VMP-41-10-020415	2/4/2015	<0.0065	U		<0.0068	U		<0.0059	J	U	<0.0059	J	U	0.0018	J		<0.0031	U		0.0027	J		0.0012	J	
		VMP-41-10-020415-DUP	2/4/2015	<0.0066	U		<0.0068	U		<0.006	J	U	<0.006	J	U	0.0021	J		<0.0031	U		0.0025	J		0.0015	J	
		VMP-41-10-043015	4/30/2015	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-41-10-072815	7/28/2015	<0.0073	U		0.0015	J		<0.0067	U		<0.0067	U		0.016			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-41-10-110215	11/2/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0015	J		<0.0034	U		0.0019	J		<0.0057	U	
		VMP-41-10-012716	1/27/2016	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.014			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-41-10-050216	5/2/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0018	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-41-10-072816	7/28/2016	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		0.0023	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-41-10-102416	10/24/2016	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		0.002	J		<0.0065	U	
		VMP-41-10-013017	1/30/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-41-10-050217	5/2/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-41-10-072717	7/27/2017	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-41-10-102717	10/27/2017	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-41-10-012418	1/24/2018	<0.006	U		0.0014	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-41-10-042018	4/20/2018	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	J	U	<0.0029	U		<0.005	U		<0.005	U	
		VMP-41-10-072018	7/20/2018	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.00055	J		<0.0032	U		0.00099	J		<0.0054	U	
		VMP-41-10-102518	10/25/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0028	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-41-10-012919	1/29/2019	<0.59	U		<0.62	U		0.48	J		0.3	J		130			<0.28	U		56			14		
		VMP-41-10-022719R	2/27/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-10-050319	5/3/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-41-10-072619	7/26/2019	<0.0071	U		0.00091	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-41-10-102819	10/28/2019	<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-41-10-012420	1/24/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-41-10-042320	4/23/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-10-072920	7/29/2020	<0.0072	U		0.00093	J		<0.0066	U		<0.0066	U		0.001	J		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-41-10-072920-DUP	7/29/2020	<0.0074	U		0.0011	J		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-41-10-103020	10/30/2020	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-41-10-012721	1/27/2021	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
	20 ft	VMP-41-20-020415	2/4/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00094	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-41-20-043015	4/30/2015	<0.17	U		<0.17	U		<0.15	U		<0.15	U		<0.14	U		<0.079	U		<0.14	U		<0.14	U	
		VMP-41-20-072815	7/28/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-41-20-110215	11/3/2015	<0.0074	U		0.0022	J		<0.0068	U		<0.0068	U		0.0024	J		0.0028	J		0.0019	J		<0.006	U	
		VMP-41-20-012716	1/27/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-41-20-050216	5/2/2016	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0016	J		<0.003	U		0.0012	J		<0.0051	U	
		VMP-41-20-072816	7/28/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-41-20-102416	10/24/2016	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-41-20-013017	1/30/2017	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0017	J		<0.005	U	
		VMP-41-20-050217	5/2/2017	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.00061	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-41-20-072717	7/27/2017	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-20-102717	10/27/2017	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-41-20-012418	1/24/2018	<0.0061	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-41-20-050118	5/1/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-20-072018	7/20/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-41-20-102518	10/25/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-41-20-012919	1/29/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-41-20-050319	5/3/2019	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-41-20-072619	7/26/2019	<0.0071	U		0.0011	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-41-20-072619-DUP	7/26/2019	<0.0077	U		0.0012	J		<0.0071	U		<0.0071	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-41-20-102819	10/28/2019	<0.0068	U		0.0021	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-41-20-012420	1/24/2020	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-41-20-042320	4/23/2020	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-41-20-072920	7/29/2020	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		0.0038	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-41-20-103020	10/30/2020	<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-41-20-012721	1/27/2021	<0.0065	U		0.0019	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00064	J		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	0.0068	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-30-043015	4/30/2015	0.01	J		0.0012	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		0.0035	J	
		VMP-41-30-043015-DUP	4/30/2015	0.0083	J		0.0011	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		0.0024	J	
		VMP-41-30-072815	7/28/2015	0.02	J		<0.0051	J	U	<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		0.0041	J	
		VMP-41-30-110215	11/2/2015	0.019	J		0.0011	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.0073	J	
		VMP-41-30-110215-DUP	11/2/2015	0.016	J		0.0012	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		0.0043	J	
		VMP-41-30-012716	1/27/2016	0.016	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		0.0022	J	
		VMP-41-30-012716-DUP	1/27/2016	0.008	J		0.00069	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-30-050216	5/2/2016	<0.032	J	U	<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-41-30-072816	7/28/2016	0.054			<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-41-30-072816-DUP	7/28/2016	0.015	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-41-26-102416	10/24/2016	0.012	J		0.0016	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.012			<0.014	U	
		VMP-41-26-013017	1/30/2017	0.013	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0045	J	
		VMP-41-26-013017-Dup	1/30/2017	0.013	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0054	J	
		VMP-41-26-050217	5/2/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-26-072717	7/27/2017	0.0074	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-41-26-072717-DUP	7/27/2017	0.014	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-41-26-102717	10/27/2017	0.0097	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		0.0036	J	
		VMP-41-26-102717-DUP	10/27/2017	<0.026	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-41-26-012418	1/24/2018	<0.025	J	U	0.00034	J		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		0.0032	J		<0.012	U	
		VMP-41-26-042018	4/20/2018	0.0071	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-26-042018-DUP	4/20/2018	0.0085	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-26-072018	7/20/2018	0.018	J		<0.0038	U		0.0074	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		0.0024	J	
		VMP-41-26-102518	10/25/2018	0.024	J		<0.0039	U		0.012			<0.012	U		<0.047	U		<0.0027	U		<0.012	U		0.004	J	
		VMP-41-26-012919	1/29/2019	0.0068	J		<0.0036	U		0.01			<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-41-26-050319	5/3/2019	0.021	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-41-26-012420	1/24/2020	<0.035	U		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-41-26-012420-DUP	1/24/2020	0.0078	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-41-26-042320	4/23/2020	0.013	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-41-26-103020	10/30/2020	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-41-26-012721	1/27/2021	0.009	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
	10 ft	VMP-42-10-020315	2/3/2015	**0.0057**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-42-10-042915	4/29/2015	**0.0066**	J		**0.0011**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.004**	J	
		VMP-42-10-072115	7/21/2015	**0.018**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0027**	J	
		VMP-42-10-102715	10/27/2015	**0.021**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0054**	J	
		VMP-42-10-020116	2/1/2016	**0.0098**	J		**0.00049**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-42-10-042616	4/26/2016	<0.033	U		**0.0062**			<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.0077	J		<0.017	U	
		VMP-42-10-072616	7/26/2016	**0.019**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-42-10-102716	10/27/2016	**0.018**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0088**	J	
		VMP-42-10-012617	1/26/2017	**0.012**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-42-10-050317	5/3/2017	<0.027	J	U	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0032**	J	
		VMP-42-10-072017	7/20/2017	**0.014**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0023**	J	
		VMP-42-10-110117	11/1/2017	**0.014**	J		<0.0033	J	U	<0.0069	U		<0.01	U		<0.04	U		<0.0023	U		<0.0097	U		<0.012	U	
		VMP-42-10-012318	1/23/2018	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-10-041918	4/19/2018	**0.0068**	J		**0.00086**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-10-072318	7/23/2018	**0.022**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-42-10-102218	10/22/2018	**0.015**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-42-10-012519	1/25/2019	**0.023**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-10-050119	5/1/2019	**0.016**	J		**0.032**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.15			<0.014	U	
		VMP-42-10-072319	7/23/2019	**0.014**	J		**0.021**			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.038			<0.014	U	
		VMP-42-10-102119	10/21/2019	**0.0074**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-42-10-012720	1/27/2020	**0.01**	J	J	<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-42-10-042920	4/29/2020	<0.035	U		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-42-10-072820	7/28/2020	**0.02**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-42-10-110520	11/5/2020	**0.0086**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-42-10-012921	1/29/2021	**0.012**	J		**0.025**			<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		0.058			<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-41-30-043015	4/30/2015	<0.016	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-41-30-043015-DUP	4/30/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-41-30-072815	7/28/2015	<0.02	J	U	<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0077	U		<0.033	U		<0.0082	U	
		VMP-41-30-110215	11/2/2015	0.0089	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-41-30-110215-DUP	11/2/2015	0.0037	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		0.0027	J	J	<0.007	U	
		VMP-41-30-012716	1/27/2016	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-41-30-012716-DUP	1/27/2016	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-41-30-050216	5/2/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-41-30-072816	7/28/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-41-26-102416	10/24/2016	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-41-26-013017	1/30/2017	0.0008	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	ND,UJ	UJ	<0.0058	U	
		VMP-41-26-013017-Dup	1/30/2017	0.00057	J		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	ND,UJ	UJ	<0.0059	U	
		VMP-41-26-050217	5/2/2017	0.0022	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-41-26-072717	7/27/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-41-26-072717-DUP	7/27/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-41-26-102717	10/27/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-41-26-012418	1/24/2018	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-41-26-042018	4/20/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.047			<0.024	U		<0.0062	U	
		VMP-41-26-042018-DUP	4/20/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		0.046			<0.024	U		<0.006	U	
		VMP-41-26-072018	7/20/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		0.36			<0.024	U		<0.0062	U	
		VMP-41-26-102518	10/25/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		0.15			<0.025	U		<0.0063	U	
		VMP-41-26-012919	1/29/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		0.044			<0.023	U		<0.0058	U	
		VMP-41-26-050319	5/3/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		0.006	J		<0.026	U		<0.0065	U	
		VMP-41-26-012420	1/24/2020	<0.018	U		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-41-26-042320	4/23/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-41-26-103020	10/30/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-41-26-012721	1/27/2021	0.0015	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
	10 ft	VMP-42-10-020315	2/3/2015	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0066	U	
		VMP-42-10-042915	4/29/2015	**0.0037**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-42-10-072115	7/21/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-42-10-102715	10/27/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	J	U	<0.025	U		<0.0063	U	
		VMP-42-10-020116	2/1/2016	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-42-10-042616	4/26/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-42-10-072616	7/26/2016	**0.0042**	J		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-42-10-102716	10/27/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-42-10-012617	1/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-42-10-050317	5/3/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-42-10-072017	7/20/2017	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0016**	J		<0.025	U		<0.0062	U	
		VMP-42-10-110117	11/1/2017	<0.013	U		<0.0064	U		<0.0047	U		<0.0087	U		<0.011	U		<0.005	U		<0.021	U		<0.0053	U	
		VMP-42-10-012318	1/23/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-42-10-041918	4/19/2018	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-42-10-072318	7/23/2018	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0023**	J		<0.025	U		<0.0062	U	
		VMP-42-10-102218	10/22/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0012**	J		<0.024	U		<0.0061	U	
		VMP-42-10-012519	1/25/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.00084**	J		<0.023	U		<0.0057	U	
		VMP-42-10-050119	5/1/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-42-10-072319	7/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0018**	J		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-42-10-102119	10/21/2019	**0.0065**	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-42-10-012720	1/27/2020	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U	UJ	<0.0077	U	
		VMP-42-10-042920	4/29/2020	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-42-10-072820	7/28/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0035**	J		<0.026	U		**0.00067**	J	
		VMP-42-10-110520	11/5/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0023**	J		<0.025	U		<0.0063	U	
		VMP-42-10-012921	1/29/2021	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U	UJ	<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		0.0028	J		<0.0052	U		<0.0052	U	
		VMP-41-30-043015	4/30/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0024	J		<0.0054	U		<0.0054	U	
		VMP-41-30-043015-DUP	4/30/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		0.0023	J		<0.0055	U		<0.0055	U	
		VMP-41-30-072815	7/28/2015	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		0.0021	J		<0.0064	U		<0.0064	U	
		VMP-41-30-110215	11/2/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0039	J		<0.0054	U		<0.0054	U	
		VMP-41-30-110215-DUP	11/2/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		0.0051	J		<0.0054	U		<0.0054	U	
		VMP-41-30-012716	1/27/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		0.0018	J		<0.0053	U		<0.0053	U	
		VMP-41-30-012716-DUP	1/27/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		0.0018	J		<0.0051	U		<0.0051	U	
		VMP-41-30-050216	5/2/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		0.0026	J		<0.0054	U		<0.0054	U	
		VMP-41-30-072816	7/28/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		0.0022	J		<0.0056	U		<0.0056	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0026	J		<0.0057	U		<0.0057	U	
		VMP-41-26-102416	10/24/2016	0.0013	J		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0029	J		<0.0048	U		<0.0048	U	
		VMP-41-26-013017	1/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0026	J		<0.0046	U		<0.0046	U	
		VMP-41-26-013017-Dup	1/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-41-26-050217	5/2/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0021	J		<0.0048	U		<0.0048	U	
		VMP-41-26-072717	7/27/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0024	J		<0.0045	U		<0.0045	U	
		VMP-41-26-072717-DUP	7/27/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		0.0026	J		<0.005	U		<0.005	U	
		VMP-41-26-102717	10/27/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		0.0025	J		<0.0046	U		<0.0046	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.003	J		<0.0045	U		<0.0045	U	
		VMP-41-26-012418	1/24/2018	0.00074	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		0.0036	J		<0.0043	U		<0.0043	U	
		VMP-41-26-042018	4/20/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0026	J		<0.0048	U		<0.0048	U	
		VMP-41-26-042018-DUP	4/20/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	J	U	0.003	J		<0.0047	U		<0.0047	U	
		VMP-41-26-072018	7/20/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		0.0027	J		<0.0048	U		<0.0048	U	
		VMP-41-26-102518	10/25/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		0.0025	J		<0.0049	U		<0.0049	U	
		VMP-41-26-012919	1/29/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		0.0022	J		<0.0045	U		<0.0045	U	
		VMP-41-26-050319	5/3/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-41-26-012420	1/24/2020	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0073	U		<0.006	U		<0.0059	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-41-26-042320	4/23/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		0.0022	J		<0.0057	U		<0.0057	U	
		VMP-41-26-103020	10/30/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.0025	J		<0.0048	U		<0.0048	U	
		VMP-41-26-012721	1/27/2021	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		0.003	J		<0.0048	U		<0.0048	U	
	10 ft	VMP-42-10-020315	2/3/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-42-10-042915	4/29/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-42-10-072115	7/21/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	J	U	<0.0053	U		<0.0053	U	
		VMP-42-10-102715	10/27/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-42-10-020116	2/1/2016	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0017**	J		<0.0048	U		<0.0048	U	
		VMP-42-10-042616	4/26/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0018**	J		<0.0057	U		<0.0057	U	
		VMP-42-10-072616	7/26/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0073	U		<0.006	U		<0.0059	U	
		VMP-42-10-102716	10/27/2016	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-42-10-012617	1/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-42-10-050317	5/3/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-42-10-072017	7/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0019**	J		<0.0048	U		<0.0048	U	
		VMP-42-10-110117	11/1/2017	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0021**	J		<0.0041	U		<0.0041	U	
		VMP-42-10-012318	1/23/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-42-10-041918	4/19/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0031**	J		<0.0045	U		<0.0045	U	
		VMP-42-10-072318	7/23/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-42-10-102218	10/22/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0037**	J		<0.0048	U		<0.0048	U	
		VMP-42-10-012519	1/25/2019	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-42-10-050119	5/1/2019	**0.049**			<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-42-10-072319	7/23/2019	**0.017**			<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-42-10-102119	10/21/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-42-10-012720	1/27/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0031**	J		<0.006	U		<0.006	U	
		VMP-42-10-042920	4/29/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0019**	J		<0.006	U		<0.006	U	
		VMP-42-10-072820	7/28/2020	<0.0043	U		**0.00086**	J		**0.0016**	J		0.00097	J		**0.0012**	J		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-42-10-110520	11/5/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-42-10-012921	1/29/2021	**0.048**			<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-41-30-043015	4/30/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-30-043015-DUP	4/30/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-41-30-072815	7/28/2015	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-41-30-110215	11/2/2015	<0.0053	U		<0.0053	U		<0.0053	U		0.0032	J		<0.0062	U		<0.0061	U		<0.0061	U		0.0023	J	
		VMP-41-30-110215-DUP	11/2/2015	<0.0053	U		<0.0053	U		<0.0053	U		0.0046	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-41-30-012716	1/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-30-012716-DUP	1/27/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-41-30-050216	5/2/2016	<0.0053	U		0.0012	J		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-41-30-072816	7/28/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-41-26-102416	10/24/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	J	U	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-26-013017	1/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		0.0013	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-41-26-013017-Dup	1/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-41-26-050217	5/2/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-26-072717	7/27/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-41-26-072717-DUP	7/27/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-41-26-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-41-26-012418	1/24/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-41-26-042018	4/20/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-26-042018-DUP	4/20/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-41-26-072018	7/20/2018	<0.0047	U		<0.0047	U		<0.0047	U		0.0043	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-26-102518	10/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-41-26-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-41-26-050319	5/3/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-41-26-012420	1/24/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.0056	U		<0.0056	U		<0.0056	U		0.026	J		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-41-26-042320	4/23/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-41-26-103020	10/30/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-41-26-012721	1/27/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	J	U	<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
	10 ft	VMP-42-10-020315	2/3/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-42-10-042915	4/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-10-072115	7/21/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-42-10-102715	10/27/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-42-10-020116	2/1/2016	<0.0047	U		<0.0047	U		<0.0047	U		**0.0028**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-10-042616	4/26/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-42-10-072616	7/26/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-42-10-102716	10/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-42-10-012617	1/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-10-050317	5/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-42-10-072017	7/20/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-10-110117	11/1/2017	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0047	U		<0.0046	U		<0.0046	U		<0.015	U	
		VMP-42-10-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-42-10-041918	4/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-42-10-072318	7/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0057**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-10-102218	10/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0015**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-42-10-012519	1/25/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		**0.0018**	J	
		VMP-42-10-050119	5/1/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-10-072319	7/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-42-10-102119	10/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-42-10-012720	1/27/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-42-10-042920	4/29/2020	<0.0058	U		<0.0058	U		<0.0058	U		**0.0019**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-42-10-072820	7/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-10-110520	11/5/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-42-10-012921	1/29/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-41-30-043015	4/30/2015	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		0.0029	J		0.0026	J	
		VMP-41-30-043015-DUP	4/30/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		0.0019	J	
		VMP-41-30-072815	7/28/2015	<0.012	J	U	<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.068	U		<0.0056	U	
		VMP-41-30-110215	11/2/2015	0.015			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		0.0033	J	
		VMP-41-30-110215-DUP	11/2/2015	0.014			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		0.0036	J	
		VMP-41-30-012716	1/27/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		0.0012	J		<0.056	ND,UJ	UJ	0.0026	J	
		VMP-41-30-012716-DUP	1/27/2016	0.0046	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		0.0013	J		<0.054	ND,UJ	UJ	0.0035	J	
		VMP-41-30-050216	5/2/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-41-30-072816	7/28/2016	<0.01	U		<0.006	U		<0.0068	J	U	<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-41-26-102416	10/24/2016	<0.009	J	U	0.0023	J		<0.0058	U		<0.0091	U		<0.0083	U		0.0019	J		<0.051	U		0.0026	J	
		VMP-41-26-013017	1/30/2017	0.0024	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		0.0007	J		<0.048	U		0.0017	J	
		VMP-41-26-013017-Dup	1/30/2017	0.0015	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		0.00061	J		<0.048	U		0.0011	J	
		VMP-41-26-050217	5/2/2017	0.031			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-26-072717	7/27/2017	0.019			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-41-26-072717-DUP	7/27/2017	0.015			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-41-26-102717	10/27/2017	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-41-26-012418	1/24/2018	0.0073	J		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		0.0014	J		<0.045	U		<0.0038	U	
		VMP-41-26-042018	4/20/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-26-042018-DUP	4/20/2018	0.0049	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-41-26-072018	7/20/2018	0.017			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-41-26-102518	10/25/2018	0.01			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-41-26-012919	1/29/2019	<0.0084	U		<0.0049	U		0.0033	J		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-41-26-050319	5/3/2019	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	ND,UJ		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-41-26-012420	1/24/2020	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-41-26-042320	4/23/2020	<0.011	U		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-41-26-103020	10/30/2020	0.0067	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-41-26-012721	1/27/2021	<0.022	U	UJ	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
	10 ft	VMP-42-10-020315	2/3/2015	0.0051	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-42-10-042915	4/29/2015	0.0066	J		<0.0054	U		<0.0062	U		**0.0014**	J		<0.0088	U		<0.0051	U		<0.054	U		**0.0012**	J	
		VMP-42-10-072115	7/21/2015	0.0057	J	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-42-10-102715	10/27/2015	<0.0092	J	U	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-10-020116	2/1/2016	0.0044	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-42-10-042616	4/26/2016	<0.011	U		**0.021**			0.0035	J		<0.011	U		<0.0098	U		**0.051**			<0.06	U		**0.094**		
		VMP-42-10-072616	7/26/2016	<0.011	U		**0.0033**	J		<0.0072	U		<0.011	U		<0.01	U		**0.0042**	J		<0.063	U		**0.0023**	J	
		VMP-42-10-102716	10/27/2016	<0.0097	J	U	<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.00056**	J	
		VMP-42-10-012617	1/26/2017	0.015			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-42-10-050317	5/3/2017	0.0054	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-42-10-072017	7/20/2017	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-42-10-110117	11/1/2017	0.017			<0.0044	U		<0.005	U		<0.0078	U		<0.0072	U		<0.0042	U		<0.044	U		<0.0036	U	
		VMP-42-10-012318	1/23/2018	0.033			<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-42-10-041918	4/19/2018	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-42-10-072318	7/23/2018	0.01			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-42-10-102218	10/22/2018	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-42-10-012519	1/25/2019	0.0036	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-42-10-050119	5/1/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U	UJ	<0.0083	U		**0.046**			<0.051	U		**0.18**		
		VMP-42-10-072319	7/23/2019	<0.0093	U		**0.0019**	J		0.0019	J		<0.0095	U		<0.0086	U		**0.021**			<0.053	U		**0.068**		
		VMP-42-10-102119	10/21/2019	0.0029	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-42-10-012720	1/27/2020	<0.011	U	UJ	<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-42-10-042920	4/29/2020	0.013		J	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-42-10-072820	7/28/2020	0.0014	J		<0.0054	U		0.0009	J		<0.0096	U		<0.0088	U		<0.0051	U		**0.0025**	J		<0.0044	U	
		VMP-42-10-110520	11/5/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-10-012921	1/29/2021	<0.024	U		**0.0022**	J		<0.0063	U		<0.0098	U		<0.0089	U		**0.022**			<0.054	U		**0.32**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					0.004	J		<0.0063	U	
		VMP-41-30-043015	4/30/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	J	U	<0.0048	U					0.0058	J		<0.0065	U	
		VMP-41-30-043015-DUP	4/30/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	J	U	<0.0049	U					0.0041	J		<0.0067	U	
		VMP-41-30-072815	7/28/2015	<0.026	U		<0.019	U		<0.0078	U		<0.0065	U		<0.0057	U					<0.016	U		<0.0078	U	
		VMP-41-30-110215	11/2/2015	<0.022	U		0.0038	J		<0.0066	U		<0.0055	U		<0.0048	U					0.02			<0.0066	U	
		VMP-41-30-110215-DUP	11/2/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	J	U	<0.0048	U					0.013			<0.0066	U	
		VMP-41-30-012716	1/27/2016	<0.022	U		0.0031	J		<0.0065	U		<0.0054	U		<0.0047	U					0.0043	J		<0.0065	U	
		VMP-41-30-012716-DUP	1/27/2016	<0.021	U		0.0035	J		<0.0062	U		<0.0052	U		<0.0046	U					0.003	J		<0.0062	U	
		VMP-41-30-050216	5/2/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					0.0017	J		<0.0065	U	
		VMP-41-30-072816	7/28/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					0.043		J	<0.0068	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					0.011	J	J	<0.0069	U	
		VMP-41-26-102416	10/24/2016	<0.019	U		0.014			<0.0058	U		<0.0049	U		<0.017	U		<0.012	U		0.028			<0.0058	U	
		VMP-41-26-013017	1/30/2017	0.0011	J		0.0018	J		<0.0056	U		<0.0046	U		<0.016	U					0.0023	J		<0.0056	U	
		VMP-41-26-013017-Dup	1/30/2017	0.0019	J		0.0022	J		<0.0056	U		<0.0046	U		<0.016	U					0.0024	J		<0.0056	U	
		VMP-41-26-050217	5/2/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-41-26-072717	7/27/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-41-26-072717-DUP	7/27/2017	<0.02	U		0.0048	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-41-26-102717	10/27/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					0.0023	J		<0.0055	U	
		VMP-41-26-012418	1/24/2018	<0.017	U		0.0059	J		<0.0052	U		<0.0044	U		<0.015	U					0.0043	J		<0.0052	U	
		VMP-41-26-042018	4/20/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-41-26-042018-DUP	4/20/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-41-26-072018	7/20/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					0.003	J		<0.0058	U	
		VMP-41-26-102518	10/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-41-26-012919	1/29/2019	<0.018	U		<0.013	U		0.017			<0.0046	U		<0.016	U					<0.011	U		0.051		
		VMP-41-26-050319	5/3/2019	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-41-26-012420	1/24/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					<0.014	U		<0.0072	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.023	U		0.0066	J		<0.007	U		<0.0058	U		<0.02	U					0.029			<0.007	U	
		VMP-41-26-042320	4/23/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					0.0044	J		<0.007	U	
		VMP-41-26-103020	10/30/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					0.011	J		<0.0058	U	
		VMP-41-26-012721	1/27/2021	<0.019	U		<0.014	U		<0.0058	U		0.00076	J		<0.017	U					0.0088	J		<0.0058	U	
	10 ft	VMP-42-10-020315	2/3/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					<0.012	J	U	<0.0063	U	
		VMP-42-10-042915	4/29/2015	<0.02	U		<0.015	U		<0.0062	U		<0.0051	J	U	<0.0045	U					**0.0014**	J		<0.0062	U	
		VMP-42-10-072115	7/21/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.011**	J		<0.0065	U	
		VMP-42-10-102715	10/27/2015	<0.02	U		0.002	J		<0.006	U		<0.005	U		<0.0044	U					<0.012	J	UJ	<0.006	U	
		VMP-42-10-020116	2/1/2016	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					**0.0055**	J		<0.0058	U	
		VMP-42-10-042616	4/26/2016	<0.023	U		0.071			<0.0069	U		<0.0058	U		<0.0051	U					**0.0024**	J		<0.0069	U	
		VMP-42-10-072616	7/26/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.0099**	J		<0.0072	U	
		VMP-42-10-102716	10/27/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U		<0.013	U		**0.011**	J		<0.0063	U	
		VMP-42-10-012617	1/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0024**	J		<0.0058	U	
		VMP-42-10-050317	5/3/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-42-10-072017	7/20/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-42-10-110117	11/1/2017	<0.017	U		0.024			<0.005	U		<0.0042	U		<0.015	U					<0.01	U		<0.005	U	
		VMP-42-10-012318	1/23/2018	<0.018	U		0.0028	J		<0.0054	U		<0.0045	U		<0.016	U					**0.006**	J		<0.0054	U	
		VMP-42-10-041918	4/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-42-10-072318	7/23/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0027**	J		<0.0059	U	
		VMP-42-10-102218	10/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-42-10-012519	1/25/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0042**	J		<0.0054	U	
		VMP-42-10-050119	5/1/2019	<0.019	U		0.4			<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-42-10-072319	7/23/2019	<0.02	U		0.11			**0.0019**	J		<0.005	U		<0.018	U					**0.0068**	J		**0.0049**	J	
		VMP-42-10-102119	10/21/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-42-10-012720	1/27/2020	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.021	U					<0.014	U		<0.0073	U	
		VMP-42-10-042920	4/29/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.0051**	J		<0.0072	U	
		VMP-42-10-072820	7/28/2020	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.0073**	J		**0.00071**	J	
		VMP-42-10-110520	11/5/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0092**	J		<0.0059	U	
		VMP-42-10-012921	1/29/2021	<0.021	U		0.78			<0.0063	U		<0.0052	U		<0.018	U					**0.0045**	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		0.0009	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-41-30-043015	4/30/2015	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		0.0025	J		<0.0072	U		<0.0072	U	
		VMP-41-30-043015-DUP	4/30/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-41-30-072815	7/28/2015	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		<0.006	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-41-30-110215	11/2/2015	<0.0057	U		<0.0092	U		<0.0091	U		0.0031	J	J	0.0021	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-41-30-110215-DUP	11/2/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		0.0021	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-41-30-012716	1/27/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	ND,UJ	UJ	<0.0072	U		<0.0072	U	
		VMP-41-30-012716-DUP	1/27/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	ND,UJ	UJ	<0.0069	U		<0.0069	U	
		VMP-41-30-050216	5/2/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-41-30-072816	7/28/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		0.00092	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		0.00068	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-41-26-102416	10/24/2016	<0.0051	U		<0.0082	U		0.0037	J		<0.0035	U		0.0039	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-26-013017	1/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.00058	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-26-013017-Dup	1/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		0.0006	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-26-050217	5/2/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		0.00066	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-26-072717	7/27/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-41-26-072717-DUP	7/27/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		0.0013	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-41-26-102717	10/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-41-26-012418	1/24/2018	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		0.0049			<0.032	U		<0.0058	U		<0.0058	U	
		VMP-41-26-042018	4/20/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-26-042018-DUP	4/20/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-41-26-072018	7/20/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-41-26-102518	10/25/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-41-26-012919	1/29/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-41-26-050319	5/3/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-41-26-012420	1/24/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		0.0033	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-41-26-042320	4/23/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-41-26-103020	10/30/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-41-26-012721	1/27/2021	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
	10 ft	VMP-42-10-020315	2/3/2015	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-42-10-042915	4/29/2015	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		**0.0025**	J		<0.0068	U		<0.0068	U	
		VMP-42-10-072115	7/21/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-42-10-102715	10/27/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-10-020116	2/1/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-42-10-042616	4/26/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.084**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-42-10-072616	7/26/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		**0.01**			<0.044	U		<0.008	U		<0.008	U	
		VMP-42-10-102716	10/27/2016	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	J	U	<0.038	U		<0.007	U		<0.007	U	
		VMP-42-10-012617	1/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-42-10-050317	5/3/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-42-10-072017	7/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-42-10-110117	11/1/2017	**0.00034**	J		<0.007	U		<0.007	U		<0.003	U		**0.0068**			<0.03	U		<0.0056	U		<0.0056	U	
		VMP-42-10-012318	1/23/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.0017**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-42-10-041918	4/19/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-42-10-072318	7/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.001**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-42-10-102218	10/22/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-42-10-012519	1/25/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-42-10-050119	5/1/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.019**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-42-10-072319	7/23/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.019**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-42-10-102119	10/21/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-42-10-012720	1/27/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-42-10-042920	4/29/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0056	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-42-10-072820	7/28/2020	<0.0086	U		**0.0012**	J		<0.0085	U		<0.0037	U		<0.0047	U		**0.0021**	J		<0.0068	U		<0.0068	U	
		VMP-42-10-110520	11/5/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-10-012921	1/29/2021	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		**0.0015**	J		<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	26 ft	VMP-41-30-020415	2/4/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-41-30-043015	4/30/2015	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		0.0018	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-41-30-043015-DUP	4/30/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0013	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-41-30-072815	7/28/2015	<0.0085	U		<0.0089	U		<0.0078	U		<0.0078	U		<0.0074	U		<0.004	U		<0.0069	U		<0.0069	U	
		VMP-41-30-110215	11/2/2015	<0.0072	U		0.0024	J		<0.0066	U		<0.0066	U		0.0026	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-41-30-110215-DUP	11/2/2015	<0.0072	U		0.0022	J		<0.0066	U		<0.0066	U		0.0013	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-41-30-012716	1/27/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0028	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-41-30-012716-DUP	1/27/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0032	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-41-30-050216	5/2/2016	0.0016	J		0.0012	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-41-30-072816	7/28/2016	<0.0074	U		<0.0078	U		0.004	J		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-41-30-072816-DUP	7/28/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-41-26-102416	10/24/2016	0.0028	J		0.0014	J		<0.0058	U		<0.0058	U		0.0028	J		<0.003	U		0.0066			0.0015	J	
		VMP-41-26-013017	1/30/2017	<0.0061	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.00096	J		<0.0049	U	
		VMP-41-26-013017-Dup	1/30/2017	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		0.00047	J		<0.0029	U		0.00074	J		<0.0049	U	
		VMP-41-26-050217	5/2/2017	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-26-072717	7/27/2017	<0.006	U		0.0016	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-41-26-072717-DUP	7/27/2017	<0.0067	U		0.0019	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-41-26-102717	10/27/2017	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-41-26-102717-DUP	10/27/2017	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		0.00074	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-41-26-012418	1/24/2018	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-41-26-042018	4/20/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-26-042018-DUP	4/20/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-41-26-072018	7/20/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-41-26-102518	10/25/2018	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-41-26-012919	1/29/2019	<0.006	U		0.0012	J		0.0019	J		<0.0055	U		0.031			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-41-26-050319	5/3/2019	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-41-26-012420	1/24/2020	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-41-26-012420-DUP	1/24/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-41-26-042320	4/23/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-41-26-103020	10/30/2020	<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-41-26-012721	1/27/2021	<0.0063	U		0.0019	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
	10 ft	VMP-42-10-020315	2/3/2015	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		0.00078	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-42-10-042915	4/29/2015	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-42-10-072115	7/21/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0005	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-42-10-102715	10/27/2015	<0.0065	U		<0.0068	J	U	<0.006	U		<0.006	U		0.005	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-42-10-020116	2/1/2016	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-42-10-042616	4/26/2016	<0.0076	U		<0.0079	U		**0.0019**	J		<0.0069	U		0.15			<0.0036	U		0.044			**0.014**		
		VMP-42-10-072616	7/26/2016	<0.0079	U		<0.0082	U		**0.0018**	J		<0.0072	U		0.007			<0.0038	U		0.0075			**0.0024**	J	
		VMP-42-10-102716	10/27/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0077			<0.0033	U		0.0019	J		<0.0056	U	
		VMP-42-10-012617	1/26/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-42-10-050317	5/3/2017	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	J	U	<0.0029	U		<0.005	U		<0.005	U	
		VMP-42-10-072017	7/20/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0026	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-42-10-110117	11/1/2017	<0.0055	U		<0.0058	U		<0.005	U		<0.005	U		<0.0048	U		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-42-10-012318	1/23/2018	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-42-10-041918	4/19/2018	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0019	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-42-10-072318	7/23/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-42-10-102218	10/22/2018	<0.0063	U		0.0017	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-42-10-012519	1/25/2019	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-42-10-050119	5/1/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.0047	J		<0.0052	U	
		VMP-42-10-072319	7/23/2019	<0.0066	U		0.0011	J		**0.0022**	J		<0.0061	U		0.012			<0.0032	U		0.0056			**0.0018**	J	
		VMP-42-10-102119	10/21/2019	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-42-10-012720	1/27/2020	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-42-10-042920	4/29/2020	<0.0079	U		<0.0083	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-42-10-072820	7/28/2020	**0.0012**	J		<0.007	U		**0.0012**	J		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-42-10-110520	11/5/2020	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-42-10-012921	1/29/2021	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		0.11			<0.0032	U		<0.0055	U		<0.0055	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	**0.0053**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-42-20-042915	4/29/2015	**0.0083**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0032**	J	
		VMP-42-20-072115	7/21/2015	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0035**	J	
		VMP-42-20-102715	10/27/2015	**0.021**	J		<0.0048	J	U	<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0069**	J	
		VMP-42-20-020116	2/1/2016	**0.02**	J		**0.0011**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0034**	J	
		VMP-42-20-042616	4/26/2016	**0.0088**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-42-20-072616	7/26/2016	**0.0088**	J		<0.0048	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-42-20-102676	10/27/2016	**0.0091**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-42-20-012617	1/26/2017	**0.02**	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0061	J		**0.005**	J	
		VMP-42-20-050317	5/3/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0032**	J	
		VMP-42-20-072017	7/20/2017	**0.021**	J		**0.00036**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0041**	J	
		VMP-42-20-110117	11/1/2017	**0.011**	J		<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-20-012318	1/23/2018	<0.027	J	U	<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-42-20-041918	4/19/2018	**0.0059**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-20-072318	7/23/2018	**0.31**			<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0074**	J	
		VMP-42-20-102218	10/22/2018	**0.034**			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-42-20-020519	2/5/2019	**0.019**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0025**	J	
		VMP-42-20-050119	5/1/2019	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-42-20-072319	7/23/2019	**0.024**	J		**0.001**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-42-20-102119	10/21/2019	**0.015**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-42-20-012720	1/27/2020	<0.034	U	UJ	<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-42-20-042920	4/29/2020	**0.0093**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-42-20-042920-DUP	4/29/2020	**0.0076**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-42-20-072820	7/28/2020	**0.017**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0013**	J	
		VMP-42-20-110520	11/5/2020	**0.021**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0019**	J	
		VMP-42-20-012921	1/29/2021	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0051**	J		<0.03	U		<0.0074	U	
		VMP-42-20-042915	4/29/2015	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0036**	J		<0.03	U		<0.0076	U	
		VMP-42-20-072115	7/21/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	J	U	<0.027	U		<0.0067	U	
		VMP-42-20-102715	10/27/2015	<0.019	J	U	<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.014**			<0.031	U		<0.0079	U	
		VMP-42-20-020116	2/1/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0086**			<0.027	U		<0.0068	U	
		VMP-42-20-042616	4/26/2016	**0.0013**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0048**	J		<0.029	U		<0.0073	U	
		VMP-42-20-072616	7/26/2016	**0.005**	J		<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		**0.0066**	J		<0.031	U		<0.0077	U	
		VMP-42-20-102676	10/27/2016	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		**0.012**			<0.028	U		<0.0069	U	
		VMP-42-20-012617	1/26/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.01**			<0.025	U		<0.0062	U	
		VMP-42-20-050317	5/3/2017	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0023**	J		<0.023	U		<0.0057	U	
		VMP-42-20-072017	7/20/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0044**	J		<0.024	U		<0.0059	U	
		VMP-42-20-110117	11/1/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.012**			<0.023	U		<0.0057	U	
		VMP-42-20-012318	1/23/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.012**			<0.024	U		<0.0059	U	
		VMP-42-20-041918	4/19/2018	<0.013	J	U	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0029**	J		<0.022	U		<0.0056	U	
		VMP-42-20-072318	7/23/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0031**	J		**0.005**	J		<0.0065	U	
		VMP-42-20-102218	10/22/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.012**			<0.026	U		<0.0065	U	
		VMP-42-20-020519	2/5/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0076**			<0.026	U		<0.0065	U	
		VMP-42-20-050119	5/1/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0029**	J		<0.026	U		<0.0065	U	
		VMP-42-20-072319	7/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0038**	J		<0.025	U		<0.0063	U	
		VMP-42-20-102119	10/21/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0091**			<0.026	U		<0.0064	U	
		VMP-42-20-012720	1/27/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.008**			<0.029	U	UJ	<0.0074	U	
		VMP-42-20-042920	4/29/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0022**	J		<0.029	U		<0.0072	U	
		VMP-42-20-042920-DUP	4/29/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0022**	J		<0.027	U		<0.0067	U	
		VMP-42-20-072820	7/28/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0033**	J		<0.025	U		<0.0063	U	
		VMP-42-20-110520	11/5/2020	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.014**			<0.025	U		<0.0063	U	
		VMP-42-20-012921	1/29/2021	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0037**	J		<0.027	U	UJ	<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0023**	J		<0.0058	U		<0.0058	U	
		VMP-42-20-042915	4/29/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0025**	J		<0.0059	U		<0.0059	U	
		VMP-42-20-072115	7/21/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	J	U	<0.0052	U		<0.0052	U	
		VMP-42-20-102715	10/27/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0028**	J		<0.0062	U		<0.0062	U	
		VMP-42-20-020116	2/1/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-42-20-042616	4/26/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-42-20-072616	7/26/2016	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		<0.0074	U		<0.006	U		<0.006	U	
		VMP-42-20-102676	10/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-42-20-012617	1/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-42-20-050317	5/3/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-42-20-072017	7/20/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-42-20-110117	11/1/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0019**	J		<0.0044	U		<0.0044	U	
		VMP-42-20-012318	1/23/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0033**	J		<0.0046	U		<0.0046	U	
		VMP-42-20-041918	4/19/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-42-20-072318	7/23/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-42-20-102218	10/22/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-42-20-020519	2/5/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-42-20-050119	5/1/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-42-20-072319	7/23/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-42-20-102119	10/21/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-42-20-012720	1/27/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-42-20-042920	4/29/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0025**	J		<0.0056	U		<0.0056	U	
		VMP-42-20-042920-DUP	4/29/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-42-20-072820	7/28/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-42-20-110520	11/5/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-42-20-012921	1/29/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-42-20-042915	4/29/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-42-20-072115	7/21/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-42-20-102715	10/27/2015	<0.006	U		<0.006	U		<0.006	U		**0.0082**	J		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-42-20-020116	2/1/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-42-20-042616	4/26/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-42-20-072616	7/26/2016	<0.0059	U		<0.0059	U		<0.0059	U		**0.002**	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-42-20-102676	10/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-42-20-012617	1/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0027**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-20-050317	5/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-42-20-072017	7/20/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0042**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-42-20-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0056**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-42-20-012318	1/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-42-20-041918	4/19/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-42-20-072318	7/23/2018	<0.005	U		<0.005	U		<0.005	U		**0.0032**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-20-102218	10/22/2018	<0.005	U		<0.005	U		<0.005	U		**0.0019**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-20-020519	2/5/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-20-050119	5/1/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-20-072319	7/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-42-20-102119	10/21/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-42-20-012720	1/27/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-42-20-042920	4/29/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-42-20-042920-DUP	4/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-42-20-072820	7/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-42-20-110520	11/5/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-42-20-012921	1/29/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	<0.011	U		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.0051	U	
		VMP-42-20-042915	4/29/2015	0.011	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		**0.0015**	J	
		VMP-42-20-072115	7/21/2015	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-42-20-102715	10/27/2015	0.056			<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-42-20-020116	2/1/2016	0.018			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-42-20-042616	4/26/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-42-20-072616	7/26/2016	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-42-20-102676	10/27/2016	<0.01	J	U	**0.003**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-42-20-012617	1/26/2017	0.011			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.00096**	J	
		VMP-42-20-050317	5/3/2017	0.0059	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		**0.0011**	J		<0.047	U		<0.0039	U	
		VMP-42-20-072017	7/20/2017	0.0099			**0.0029**	J		<0.0056	U		<0.0088	U		<0.008	U		**0.0023**	J		<0.049	U		**0.0019**	J	
		VMP-42-20-110117	11/1/2017	0.0094			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-42-20-012318	1/23/2018	0.013			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0011**	J	
		VMP-42-20-041918	4/19/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0016**	J		<0.046	U		<0.0038	U	
		VMP-42-20-072318	7/23/2018	0.017			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-42-20-102218	10/22/2018	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-42-20-020519	2/5/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-42-20-050119	5/1/2019	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U	UJ	<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-42-20-072319	7/23/2019	0.014			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-20-102119	10/21/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-42-20-012720	1/27/2020	<0.011	U	UJ	<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-42-20-042920	4/29/2020	0.015		J	<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-42-20-042920-DUP	4/29/2020	0.012		J	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-42-20-072820	7/28/2020	0.013			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-20-110520	11/5/2020	0.02			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-20-012921	1/29/2021	<0.025	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	**0.0049**	J		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					<0.014	J	U	<0.0071	U	
		VMP-42-20-042915	4/29/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	J	U	<0.0053	U					**0.002**	J		<0.0072	U	
		VMP-42-20-072115	7/21/2015	**0.0018**	J	J	<0.015	J	U	<0.0063	U		<0.0053	U		<0.0046	U					<0.013	J	U	**0.00076**	J	
		VMP-42-20-102715	10/27/2015	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.0055	U					**0.014**	J	J	<0.0075	U	
		VMP-42-20-020116	2/1/2016	<0.022	U		0.0037	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.0048**	J		<0.0065	U	
		VMP-42-20-042616	4/26/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.0047**	J		<0.0069	U	
		VMP-42-20-072616	7/26/2016	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.021	U					**0.014**	J		<0.0073	U	
		VMP-42-20-102676	10/27/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.01**	J		<0.0066	U	
		VMP-42-20-012617	1/26/2017	<0.02	U		0.0071	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0052**	J		<0.0059	U	
		VMP-42-20-050317	5/3/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-42-20-072017	7/20/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.024**			<0.0056	U	
		VMP-42-20-110117	11/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-42-20-012318	1/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0039**	J		<0.0056	U	
		VMP-42-20-041918	4/19/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-42-20-072318	7/23/2018	<0.02	U		<0.015	U		**0.00084**	J		**0.0022**	J		<0.018	U					**0.047**			<0.0061	U	
		VMP-42-20-102218	10/22/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0043**	J		<0.0062	U	
		VMP-42-20-020519	2/5/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-42-20-050119	5/1/2019	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-42-20-072319	7/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0027**	J		<0.0059	U	
		VMP-42-20-102119	10/21/2019	<0.02	U		<0.014	U		**0.0016**	J		<0.005	U		<0.018	U					<0.012	U		**0.0043**	J	
		VMP-42-20-012720	1/27/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					<0.014	U		<0.007	U	
		VMP-42-20-042920	4/29/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.0063**	J		<0.0068	U	
		VMP-42-20-042920-DUP	4/29/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0057**	J		<0.0063	U	
		VMP-42-20-072820	7/28/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0093**	J		<0.006	U	
		VMP-42-20-110520	11/5/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.023**			<0.0059	U	
		VMP-42-20-012921	1/29/2021	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0028**	J		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-42-20-042915	4/29/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-42-20-072115	7/21/2015	<0.0055	U		<0.0088	U		**0.0015**	J		<0.0038	U		**0.001**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-42-20-102715	10/27/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.0032**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-42-20-020116	2/1/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-42-20-042616	4/26/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0009**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-42-20-072616	7/26/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-42-20-102676	10/27/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	J	U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-42-20-012617	1/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		**0.0026**	J		**0.012**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-42-20-050317	5/3/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-42-20-072017	7/20/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0022**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-42-20-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-42-20-012318	1/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0006**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-42-20-041918	4/19/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-42-20-072318	7/23/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-42-20-102218	10/22/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-42-20-020519	2/5/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-42-20-050119	5/1/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-42-20-072319	7/23/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0044**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-20-102119	10/21/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-42-20-012720	1/27/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-42-20-042920	4/29/2020	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-42-20-042920-DUP	4/29/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-42-20-072820	7/28/2020	<0.0083	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-20-110520	11/5/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0014**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-20-012921	1/29/2021	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00057**	J		<0.039	U		<0.0071	U		<0.0071	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-42	20 ft	VMP-42-20-020315	2/3/2015	<0.0077	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-42-20-042915	4/29/2015	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0064	U		<0.0064	U	
		VMP-42-20-072115	7/21/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.00056	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-42-20-102715	10/27/2015	<0.0082	U		<0.0085	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		0.0014	J		<0.0066	U	
		VMP-42-20-020116	2/1/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-42-20-042616	4/26/2016	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0065	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-42-20-072616	7/26/2016	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		0.00076	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-42-20-102676	10/27/2016	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		0.01			**0.0023**	J	
		VMP-42-20-012617	1/26/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	J		0.001	J		<0.0052	U	
		VMP-42-20-050317	5/3/2017	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0052	J	U	<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-42-20-072017	7/20/2017	<0.0062	U		0.00098	J		**0.00032**	J		<0.0056	U		0.0011	J		<0.0029	U		0.0093			**0.0023**	J	
		VMP-42-20-110117	11/1/2017	<0.0059	U		0.0009	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-42-20-012318	1/23/2018	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-42-20-041918	4/19/2018	<0.0058	U		0.0015	J		<0.0053	U		<0.0053	U		0.0044	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-42-20-072318	7/23/2018	<0.0067	U		<0.007	U		**0.00082**	J		<0.0061	U		0.0046	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-42-20-102218	10/22/2018	<0.0068	U		0.0022	J		<0.0062	U		<0.0062	U		0.0017	J		<0.0032	U		0.0014	J		<0.0055	U	
		VMP-42-20-020519	2/5/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-42-20-050119	5/1/2019	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-42-20-072319	7/23/2019	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		0.0015	J		<0.0031	U		0.0015	J		<0.0052	U	
		VMP-42-20-102119	10/21/2019	<0.0066	U		0.0012	J		<0.0061	U		<0.0061	U		0.0091			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-42-20-012720	1/27/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-42-20-042920	4/29/2020	<0.0075	U		0.0015	J		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-42-20-042920-DUP	4/29/2020	<0.0069	U		0.0017	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-42-20-072820	7/28/2020	<0.0065	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-42-20-110520	11/5/2020	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		0.0066			<0.0031	U		0.00054	J		<0.0052	U	
		VMP-42-20-012921	1/29/2021	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	**0.0055**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-42-30-042915	4/29/2015	**0.014**	J		**0.0014**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0068**	J	
		VMP-42-30-080315	8/3/2015	**0.029**	J		<0.0043	J	U	<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0083**	J	
		VMP-42-30-080315-DUP	8/3/2015	**0.027**	J		**0.0022**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U	UJ	<0.012	U	UJ	**0.0096**	J	
		VMP-42-30-102715	10/27/2015	**0.017**	J		<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0042**	J	
		VMP-42-30-020116	2/1/2016	**0.035**			<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0052**	J	
		VMP-42-30-042616	4/26/2016	**0.033**	J		**0.0012**	J		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		**0.0036**	J	
		VMP-42-30-072616	7/26/2016	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-42-30-102716	10/27/2016	**0.026**	J		**0.001**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.0054	J		**0.0064**	J	
		VMP-42-30-102716-Dup	10/27/2016	<0.06	U		<0.0081	U		<0.017	U		<0.026	U		<0.098	U		<0.0056	U		<0.024	U		<0.03	U	
		VMP-42-30-012617	1/26/2017	**0.014**	J		**0.0034**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.0081	J		**0.0059**	J	
		VMP-42-30-050317	5/3/2017	<0.026	U		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-30-072017	7/20/2017	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0017**	J	
		VMP-42-30-110117	11/1/2017	**0.019**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0044**	J	
		VMP-42-30-110117-DUP	11/1/2017	**0.033**			<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0036**	J	
		VMP-42-30-012318	1/23/2018	<0.024	J	U	<0.0032	J	U	<0.0067	U		<0.01	U		<0.039	U		<0.0022	U		<0.0096	U		<0.012	U	
		VMP-42-30-041918	4/19/2018	**0.0059**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-42-30-072318	7/23/2018	**0.057**		J	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-42-30-072318-DUP	7/23/2018	**0.14**		J	**0.00074**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0039	J		**0.0069**	J	
		VMP-42-30-102218	10/22/2018	**0.016**	J		**0.036**			**0.21**			<0.012	U		<0.045	U		<0.0026	U		0.15			**0.0036**	J	
		VMP-42-30-112818	11/28/2018	**0.0052**	J		**0.0011**	J		**0.061**			<0.011	U		<0.04	U		<0.0023	U		0.0059	J		<0.012	U	
		VMP-42-30-012519	1/25/2019	**0.02**	J		<0.0034	U		**0.0071**	J		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-42-30-050119	5/1/2019	**0.05**			**0.029**			<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0058**	J	
		VMP-42-30-072319	7/23/2019	**0.051**			**0.0045**			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-42-30-102119	10/21/2019	<0.026	U		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-42-30-102119-DUP	10/21/2019	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-42-30-012720	1/27/2020	<0.034	U	UJ	<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-42-30-042920	4/29/2020	<0.037	U		<0.005	U		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		<0.018	U	
		VMP-42-30-072820	7/28/2020	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-42-30-110520	11/5/2020	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-42-30-110520-DUP	11/5/2020	**0.018**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.002**	J	
		VMP-42-30-012921	1/29/2021	**0.007**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.002**	J		<0.029	U		<0.0072	U	
		VMP-42-30-042915	4/29/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-42-30-080315	8/3/2015	<0.017	J	U	<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	J	U	<0.028	U		<0.0069	U	
		VMP-42-30-080315-DUP	8/3/2015	**0.0089**	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0023**	J		**0.0063**	J		<0.0067	U	
		VMP-42-30-102715	10/27/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0055**	J		<0.026	U		<0.0065	U	
		VMP-42-30-020116	2/1/2016	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0038**	J		<0.028	U		<0.007	U	
		VMP-42-30-042616	4/26/2016	<0.02	U		<0.01	U		<0.0073	U		<0.014	U		<0.017	U		**0.002**	J		<0.033	U		<0.0082	U	
		VMP-42-30-072616	7/26/2016	**0.0026**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-42-30-102716	10/27/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.0025**	J		<0.027	U		<0.0069	U	
		VMP-42-30-102716-Dup	10/27/2016	**0.0087**	J		<0.016	U		<0.012	U		<0.022	U		<0.027	U		**0.0028**	J		<0.052	U		<0.013	U	
		VMP-42-30-012617	1/26/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-42-30-050317	5/3/2017	<0.013	J	U	<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.0015**	J		<0.022	U		<0.0056	U	
		VMP-42-30-072017	7/20/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0064	U	
		VMP-42-30-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.0023**	J		<0.023	U		<0.0058	U	
		VMP-42-30-110117-DUP	11/1/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0026**	J		<0.022	U		<0.0055	U	
		VMP-42-30-012318	1/23/2018	<0.012	U		<0.0063	U		<0.0046	U		<0.0086	U		<0.011	U		**0.0041**	J		**0.0015**	J		<0.0052	U	
		VMP-42-30-041918	4/19/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0011**	J		<0.023	U		<0.0058	U	
		VMP-42-30-072318	7/23/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-42-30-072318-DUP	7/23/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-42-30-102218	10/22/2018	<0.014	U		<0.0073	U		<0.0053	U		0.032			<0.012	U		**0.14**			<0.024	U		<0.006	U	
		VMP-42-30-112818	11/28/2018	<0.013	U		<0.0066	U		<0.0048	U		0.034			<0.011	U		**0.023**			<0.022	U		<0.0054	U	
		VMP-42-30-012519	1/25/2019	<0.013	U		<0.0067	U		<0.0049	U		0.017			<0.011	U		**0.0086**			<0.022	U		<0.0055	U	
		VMP-42-30-050119	5/1/2019	<0.014	U		<0.0073	U		**0.003**	J		<0.0098	U		<0.012	U		**0.0025**	J		<0.024	U		<0.006	U	
		VMP-42-30-072319	7/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-42-30-102119	10/21/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0028**	J		<0.023	U		<0.0057	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0029**	J		<0.025	U		<0.0063	U	
		VMP-42-30-012720	1/27/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0033**	J		<0.03	U	UJ	<0.0074	U	
		VMP-42-30-042920	4/29/2020	<0.02	U		<0.0099	U		<0.0072	U		<0.013	U		<0.017	U		**0.0026**	J		<0.032	U		<0.0082	U	
		VMP-42-30-072820	7/28/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0063	U	
		VMP-42-30-110520	11/5/2020	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0028**	J		<0.026	U		<0.0065	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0025**	J		<0.026	U		<0.0064	U	
		VMP-42-30-012921	1/29/2021	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0067**			<0.026	U	UJ	<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-42-30-042915	4/29/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-42-30-080315	8/3/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-42-30-080315-DUP	8/3/2015	**0.001**	J		<0.01	U		<0.0078	U		<0.0078	U		**0.001**	J		**0.0034**	J		<0.0052	U		<0.0052	U	
		VMP-42-30-102715	10/27/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-42-30-020116	2/1/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0019**	J		<0.0054	U		<0.0054	U	
		VMP-42-30-042616	4/26/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		**0.003**	J		<0.0064	U		<0.0064	U	
		VMP-42-30-072616	7/26/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-42-30-102716	10/27/2016	**0.0012**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-42-30-102716-Dup	10/27/2016	<0.0087	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		<0.012	U		<0.01	U		<0.01	U	
		VMP-42-30-012617	1/26/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-42-30-050317	5/3/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-42-30-072017	7/20/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-42-30-110117	11/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0013**	J		<0.0045	U		<0.0045	U	
		VMP-42-30-110117-DUP	11/1/2017	**0.0016**	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0025**	J		<0.0043	U		<0.0043	U	
		VMP-42-30-012318	1/23/2018	<0.0034	U		<0.0077	U		<0.006	U		<0.006	U		<0.006	U		**0.0034**	J		<0.0041	U		<0.0041	U	
		VMP-42-30-041918	4/19/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-42-30-072318	7/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-42-30-072318-DUP	7/23/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-42-30-102218	10/22/2018	**0.074**			<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0031**	J		<0.0047	U		<0.0047	U	
		VMP-42-30-112818	11/28/2018	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0021**	J		<0.0042	U		<0.0042	U	
		VMP-42-30-012519	1/25/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-42-30-050119	5/1/2019	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		<0.0057	U		<0.0047	U		<0.0047	U	
		VMP-42-30-072319	7/23/2019	**0.0027**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-42-30-102119	10/21/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-42-30-012720	1/27/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-42-30-042920	4/29/2020	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0032**	J		<0.0064	U		<0.0064	U	
		VMP-42-30-072820	7/28/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-42-30-110520	11/5/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-42-30-012921	1/29/2021	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-42-30-042915	4/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-30-080315	8/3/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-42-30-080315-DUP	8/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.0037**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-42-30-102715	10/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-30-020116	2/1/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-42-30-042616	4/26/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0074	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-42-30-072616	7/26/2016	<0.005	U		<0.005	U		<0.005	U		**0.0064**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-30-102716	10/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-42-30-102716-Dup	10/27/2016	<0.01	U		<0.01	U		<0.01	U		<0.088	U		<0.012	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-42-30-012617	1/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-42-30-050317	5/3/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-42-30-072017	7/20/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-42-30-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-42-30-110117-DUP	11/1/2017	<0.0042	U		<0.0042	U		<0.0042	U		**0.017**	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-42-30-012318	1/23/2018	<0.004	U		<0.004	U		<0.004	U		<0.035	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.014	U	
		VMP-42-30-041918	4/19/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-42-30-072318	7/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0047**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-30-072318-DUP	7/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0039**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-42-30-102218	10/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0041**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-42-30-112818	11/28/2018	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-42-30-012519	1/25/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-42-30-050119	5/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-42-30-072319	7/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-42-30-102119	10/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-42-30-012720	1/27/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-42-30-042920	4/29/2020	<0.0062	U		<0.0062	U		<0.0062	U		<0.055	U		<0.0073	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-42-30-072820	7/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-42-30-110520	11/5/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-42-30-012921	1/29/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-42-30-042915	4/29/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-42-30-080315	8/3/2015	0.0047	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-42-30-080315-DUP	8/3/2015	0.0085	J	J	<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-42-30-102715	10/27/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-42-30-020116	2/1/2016	0.045			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-42-30-042616	4/26/2016	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		**0.00085**	J		<0.068	U		<0.0056	U	
		VMP-42-30-072616	7/26/2016	0.011			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-42-30-102716	10/27/2016	0.022			<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.00094**	J	
		VMP-42-30-102716-Dup	10/27/2016	<0.019	J	U	<0.011	U		<0.012	U		<0.019	U		<0.018	U		<0.01	U		<0.11	U		**0.0014**	J	
		VMP-42-30-012617	1/26/2017	0.009			**0.01**			0.0014	J		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0014**	J	
		VMP-42-30-050317	5/3/2017	0.0017	J		<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		**0.0016**	J		<0.046	U		**0.0018**	J	
		VMP-42-30-072017	7/20/2017	0.0062	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-30-110117	11/1/2017	0.018		J	<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		**0.001**	J		<0.048	U		<0.0039	U	
		VMP-42-30-110117-DUP	11/1/2017	0.12		J	<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		**0.0023**	J		<0.046	U		<0.0038	U	
		VMP-42-30-012318	1/23/2018	<0.0078		U	<0.0044	U		<0.0049	U		<0.0077	U		<0.007	U		<0.0041	U		<0.043	U		<0.0035	U	
		VMP-42-30-041918	4/19/2018	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-42-30-072318	7/23/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.00097**	J	
		VMP-42-30-072318-DUP	7/23/2018	0.0069	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0036**	J		<0.05	U		**0.0054**		
		VMP-42-30-102218	10/22/2018	<0.0087	U		**0.0039**	J		<0.0057	U		<0.0088	U		<0.0081	U		**0.082**			<0.049	U		**0.39**		
		VMP-42-30-112818	11/28/2018	0.0031	J		**0.0012**	J		<0.0051	U		<0.008	U		<0.0073	U		**0.0039**	J		<0.044	U		**0.008**		
		VMP-42-30-012519	1/25/2019	<0.008	U		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-42-30-050119	5/1/2019	0.0096			<0.005	U		<0.0057	U		<0.0088	U	UJ	<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-42-30-072319	7/23/2019	<0.0093	U		**0.0013**	J		<0.0061	U		<0.0095	U		<0.0086	U		**0.0072**			<0.053	U		<0.0044	U	
		VMP-42-30-102119	10/21/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.0023**	J		<0.052	U		**0.0047**		
		VMP-42-30-012720	1/27/2020	<0.011	U	UJ	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-42-30-042920	4/29/2020	0.017		J	<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		<0.0056	U	
		VMP-42-30-072820	7/28/2020	0.015			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-42-30-110520	11/5/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-42-30-012921	1/29/2021	<0.024	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.023	U		0.003	J		<0.0069	U		<0.0057	U		<0.005	U					<0.014	J	U	<0.0069	U	
		VMP-42-30-042915	4/29/2015	**0.00099**	J		0.0014	J		<0.0062	U		**0.002**	J		<0.0045	U					**0.0027**	J		<0.0062	U	
		VMP-42-30-080315	8/3/2015	<0.022	U		<0.016	U		<0.0066	U		**0.0021**	J		<0.0048	U					**0.0072**	J		<0.0066	U	
		VMP-42-30-080315-DUP	8/3/2015	<0.021	ND,UJ	UJ	<0.015	U		**0.00061**	J		**0.0022**	J		<0.0047	U					**0.009**	J		<0.0064	U	
		VMP-42-30-102715	10/27/2015	<0.021	U		0.0025	J		<0.0062	U		<0.0052	U		<0.0045	U					<0.012	J	UJ	<0.0062	U	
		VMP-42-30-020116	2/1/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.0029**	J		<0.0066	U	
		VMP-42-30-042616	4/26/2016	<0.026	U		<0.019	U		<0.0078	U		<0.0065	U		<0.0058	U					**0.022**			<0.0078	U	
		VMP-42-30-072616	7/26/2016	<0.021	U		0.0089	J		<0.0062	U		<0.0052	U		<0.018	U					**0.025**			<0.0062	U	
		VMP-42-30-102716	10/27/2016	<0.022	U		0.011	J		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.041**			<0.0065	U	
		VMP-42-30-102716-Dup	10/27/2016	<0.041	U		<0.03	U		<0.012	U		<0.01	U		<0.036	U		<0.026	U		**0.015**	J		<0.012	U	
		VMP-42-30-012617	1/26/2017	**0.0035**	J		0.0063	J		**0.0014**	J		**0.0012**	J		<0.016	U					**0.0038**	J		<0.0056	U	
		VMP-42-30-050317	5/3/2017	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.01	U		<0.0053	U	
		VMP-42-30-072017	7/20/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-42-30-110117	11/1/2017	<0.018	U		0.0076	J	J	<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-42-30-110117-DUP	11/1/2017	<0.018	U		0.048		J	<0.0052	U		<0.0044	U		<0.015	U					**0.015**			<0.0053	U	
		VMP-42-30-012318	1/23/2018	<0.016	U		<0.012	U		<0.0049	U		<0.0041	U		<0.014	U					**0.0077**	J		<0.0049	U	
		VMP-42-30-041918	4/19/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-42-30-072318	7/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0094**	J		<0.0058	U	
		VMP-42-30-072318-DUP	7/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.021**			<0.0058	U	
		VMP-42-30-102218	10/22/2018	<0.019	U		0.54			<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		**0.0025**	J	
		VMP-42-30-112818	11/28/2018	<0.017	U		0.021			<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		**0.00086**	J	
		VMP-42-30-012519	1/25/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0023**	J		<0.0052	U	
		VMP-42-30-050119	5/1/2019	<0.019	U		0.0036	J		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-42-30-072319	7/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0054**	J		<0.0061	U	
		VMP-42-30-102119	10/21/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.02	U		0.0036	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-42-30-012720	1/27/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.021	U					<0.014	U		<0.007	U	
		VMP-42-30-042920	4/29/2020	<0.026	U		<0.018	U		<0.0077	U		<0.0064	U		<0.023	U					**0.011**	J		<0.0077	U	
		VMP-42-30-072820	7/28/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.01**	J		<0.0059	U	
		VMP-42-30-110520	11/5/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0057**	J		<0.0062	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0076**	J		<0.0061	U	
		VMP-42-30-012921	1/29/2021	<0.021	U		0.0026	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0043**	J		**0.0028**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-42-30-042915	4/29/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-42-30-080315	8/3/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0012**	J		<0.04	U	UJ	<0.0073	U		<0.0073	U	
		VMP-42-30-080315-DUP	8/3/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0024**	J		<0.038	U	UJ	<0.0071	U		<0.0071	U	
		VMP-42-30-102715	10/27/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-42-30-020116	2/1/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-42-30-042616	4/26/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		**0.0013**	J		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-42-30-072616	7/26/2016	<0.0054	U		<0.0086	U		**0.0042**	J		<0.0037	U		**0.0055**			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-42-30-102716	10/27/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0058**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-42-30-102716-Dup	10/27/2016	<0.011	U		<0.017	U		<0.017	U		<0.0075	U		**0.0016**	J		<0.075	U		<0.014	U		<0.014	U	
		VMP-42-30-012617	1/26/2017	<0.0049	U		<0.0079	U		**0.001**	J		<0.0034	U		**0.0054**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-42-30-050317	5/3/2017	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-42-30-072017	7/20/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00035**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-42-30-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.0014**	J	J	<0.033	U		<0.0061	U		<0.0061	U	
		VMP-42-30-110117-DUP	11/1/2017	**0.00076**	J		<0.0073	U		**0.0016**	J		<0.0032	U		**0.034**		J	<0.032	U		<0.0058	U		<0.0058	U	
		VMP-42-30-012318	1/23/2018	<0.0043	U		<0.0069	U		<0.0068	U		<0.003	U		<0.0038	U		<0.03	U		<0.0055	U		<0.0055	U	
		VMP-42-30-041918	4/19/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-42-30-072318	7/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-42-30-072318-DUP	7/23/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-42-30-102218	10/22/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.02**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-42-30-112818	11/28/2018	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.0074**			<0.031	U		<0.0057	U		<0.0057	U	
		VMP-42-30-012519	1/25/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-42-30-050119	5/1/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-42-30-072319	7/23/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.025**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-42-30-102119	10/21/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-30-012720	1/27/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-42-30-042920	4/29/2020	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		<0.0059	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-42-30-072820	7/28/2020	<0.0082	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-42-30-110520	11/5/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-42-30-012921	1/29/2021	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-42-30-020315	2/3/2015	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-42-30-042915	4/29/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.017			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-42-30-080315	8/3/2015	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		0.0015	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-42-30-080315-DUP	8/3/2015	<0.007	U		0.002	J		**0.0011**	J		<0.0064	U		0.0026	J		<0.0033	U		0.0014	J		<0.0056	U	
		VMP-42-30-102715	10/27/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-42-30-020116	2/1/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.004	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-42-30-042616	4/26/2016	<0.0086	U		<0.009	U		<0.0078	U		<0.0078	U		0.0027	J		<0.0041	U		0.0016	J		<0.0069	U	
		VMP-42-30-072616	7/26/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00048	J		<0.0032	U		0.00072	J		<0.0055	U	
		VMP-42-30-102716	10/27/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	J	U	<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-42-30-102716-Dup	10/27/2016	<0.014	U		<0.014	U		<0.012	U		<0.012	U		0.0018	J		<0.0065	U		<0.011	U		<0.011	U	
		VMP-42-30-012617	1/26/2017	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		0.00083	J		<0.0029	U		0.03			**0.006**		
		VMP-42-30-050317	5/3/2017	<0.0058	U		<0.006	U		<0.0053	U		<0.0053	U		<0.005	J	U	<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-42-30-072017	7/20/2017	<0.0066	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-42-30-110117	11/1/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0015	J		<0.0028	U		0.00092	J		<0.0048	U	
		VMP-42-30-110117-DUP	11/1/2017	**0.0005**	J		0.00096	J		<0.0052	U		<0.0053	U		0.00088	J		<0.0027	U		0.0022	J		**0.00087**	J	
		VMP-42-30-012318	1/23/2018	<0.0054	U		0.0013	J		<0.0049	U		<0.0049	U		<0.0047	U		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-42-30-041918	4/19/2018	<0.0061	U		0.0015	J		<0.0056	U		<0.0056	U		0.0019	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-42-30-072318	7/23/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0019	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-42-30-072318-DUP	7/23/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.003	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-42-30-102218	10/22/2018	<0.0062	U		0.0018	J		<0.0057	U		<0.0057	U		0.021			<0.003	U		0.011			**0.0041**	J	
		VMP-42-30-112818	11/28/2018	<0.0056	U		0.0009	J		<0.0051	U		<0.0051	U		0.0089			<0.0027	U		0.005			**0.0019**	J	
		VMP-42-30-012519	1/25/2019	<0.0057	U		<0.006	U		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-42-30-050119	5/1/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-42-30-072319	7/23/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.0042	J		<0.0032	U		0.0034	J		<0.0054	U	
		VMP-42-30-102119	10/21/2019	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0025	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-42-30-102119-DUP	10/21/2019	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		0.0056			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-42-30-012720	1/27/2020	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-42-30-042920	4/29/2020	<0.0085	U		<0.0088	U		<0.0077	U		<0.0077	U		<0.0074	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-42-30-072820	7/28/2020	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-42-30-110520	11/5/2020	<0.0068	U		0.002	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-42-30-110520-DUP	11/5/2020	<0.0066	U		0.0019	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0008	J		<0.0054	U	
		VMP-42-30-012921	1/29/2021	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.002	J		<0.0032	U		<0.0055	U		<0.0055	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	**0.0076**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-43-10-050515	5/5/2015	**0.042**			**0.0055**			<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.018**		
		VMP-43-10-072115	7/21/2015	**0.029**	J		<0.0043	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0082**	J	
		VMP-43-10-102915	10/29/2015	**0.019**	J		<0.0049	J	U	<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0029**	J	
		VMP-43-10-020116	2/1/2016	<0.035	J	U	**0.00091**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-43-10-042716	4/27/2016	**0.022**	J		**0.0029**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		0.0084	J		<0.017	U	
		VMP-43-10-072716	7/27/2016	**0.024**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.006**	J	
		VMP-43-10-102616	10/26/2016	**0.043**			**0.0048**			<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0067	J		**0.0079**	J	
		VMP-43-10-013117	1/31/2017	**0.011**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.011	J		**0.01**	J	
		VMP-43-10-042717	4/27/2017	**0.027**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0055**	J	
		VMP-43-10-072417	7/24/2017	**0.02**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0045**	J	
		VMP-43-10-102717	10/27/2017	**0.012**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-43-10-012618	1/26/2018	<0.025	J	U	<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-43-10-041218	4/12/2018	**0.019**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-43-10-071818	7/18/2018	**0.01**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-43-10-102918	10/29/2018	**0.018**	J		**0.0011**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.011	J		<0.014	U	
		VMP-43-10-012919	1/29/2019	**0.07**			<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-43-10-042919	4/29/2019	**0.02**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0071**	J	
		VMP-43-10-080119	8/1/2019	**0.032**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-10-102119	10/21/2019	**0.01**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-10-012720	1/27/2020	**0.0061**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-10-043020	4/30/2020	**0.022**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-43-10-072820	7/28/2020	**0.042**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.005**	J	
		VMP-43-10-110320	11/3/2020	**0.018**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-43-10-012621	1/26/2021	**0.0056**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	20 ft	VMP-43-20-021215	2/12/2015	**0.015**	J		**0.00095**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0039**	J	
		VMP-43-20-021215-DUP	2/12/2015	**0.01**	J		**0.00083**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-43-20-050515	5/5/2015	**0.022**	J		**0.00067**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.008**	J	
		VMP-43-20-072115	7/21/2015	**0.025**	J		<0.0054	J	U	**0.0024**	J		<0.017	U		<0.065	U		<0.0037	U		<0.016	U		**0.012**	J	
		VMP-43-20-102915	10/29/2015	**0.026**	J		<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.011**	J	
		VMP-43-20-102915-DUP	10/29/2015	**0.02**	J		<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.012**	J	
		VMP-43-20-020116	2/1/2016	**0.024**	J		**0.0014**	J		<0.014	U		<0.022	U		<0.082	U		<0.0047	U		0.007	J		**0.0048**	J	
		VMP-43-20-042716	4/27/2016	**0.011**	J		**0.002**	J		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-43-20-072716	7/27/2016	**0.024**	J		**0.0024**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.0043	J		**0.0039**	J	
		VMP-43-20-102616	10/26/2016	**0.017**	J		**0.00097**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-43-20-013117	1/31/2017	**0.0097**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-43-20-042717	4/27/2017	<0.029	J	U	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-43-20-072417	7/24/2017	**0.011**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-43-20-102717	10/27/2017	**0.01**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-20-012618	1/26/2018	<0.028	J	U	<0.0038	U		**0.033**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-20-041218	4/12/2018	**0.15**			<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0041**	J	
		VMP-43-20-071818	7/18/2018	**0.029**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0049**	J	
		VMP-43-20-102918	10/29/2018	**0.031**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0092**	J	
		VMP-43-20-012919	1/29/2019	**0.077**			<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		0.13			**0.0037**	J	
		VMP-43-20-042919	4/29/2019	**0.022**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-43-20-080119	8/1/2019	**0.019**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.16			<0.014	U	
		VMP-43-20-102119	10/21/2019	**0.022**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-43-20-012720	1/27/2020	<0.032	U		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-43-20-043020	4/30/2020	**0.014**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-43-20-072820	7/28/2020	**0.048**			<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		0.12			**0.0041**	J	
		VMP-43-20-110320	11/3/2020	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0018**	J	
		VMP-43-20-012621	1/26/2021	**0.0076**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0016**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-43-10-050515	5/5/2015	**0.0023**	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-43-10-072115	7/21/2015	**0.0059**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0014**	J		**0.0028**	J		<0.007	U	
		VMP-43-10-102915	10/29/2015	<0.019	J	U	<0.0097	U		<0.0071	U		<0.013	U		<0.016	U		**0.0047**	J		<0.032	U		<0.008	U	
		VMP-43-10-020116	2/1/2016	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-43-10-042716	4/27/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-43-10-072716	7/27/2016	**0.016**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0011**	J		<0.027	ND,UJ	UJ	<0.0067	U	
		VMP-43-10-102616	10/26/2016	**0.003**	J		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0036**	J		<0.024	U		<0.0059	U	
		VMP-43-10-013117	1/31/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-43-10-042717	4/27/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-43-10-072417	7/24/2017	**0.002**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-43-10-102717	10/27/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-43-10-012618	1/26/2018	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0094**			<0.022	U		<0.0055	U	
		VMP-43-10-041218	4/12/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-43-10-071818	7/18/2018	**0.0011**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-43-10-102918	10/29/2018	**0.0012**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-43-10-012919	1/29/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-43-10-042919	4/29/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-43-10-080119	8/1/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	ND,UJ	UJ
		VMP-43-10-102119	10/21/2019	**0.0024**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0068**			<0.024	U		<0.006	U	
		VMP-43-10-012720	1/27/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U	UJ	<0.0062	U	
		VMP-43-10-043020	4/30/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-43-10-072820	7/28/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-43-10-110320	11/3/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-43-10-012621	1/26/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-43-20-021215-DUP	2/12/2015	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-43-20-050515	5/5/2015	**0.0018**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-43-20-072115	7/21/2015	<0.021	J	U	<0.01	U		<0.0077	U		<0.014	U		<0.018	U		**0.012**			<0.035	U		<0.0087	U	
		VMP-43-20-102915	10/29/2015	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0066**			<0.025	U		<0.0062	U	
		VMP-43-20-102915-DUP	10/29/2015	**0.0072**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0072**			**0.0034**	J		<0.0061	U	
		VMP-43-20-020116	2/1/2016	<0.026	J	U	<0.013	U		<0.0097	U		<0.018	U		<0.022	U		**0.0029**	J		<0.044	U		<0.011	U	
		VMP-43-20-042716	4/27/2016	<0.017	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-43-20-072716	7/27/2016	<0.018	J	U	<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	ND,UJ	UJ	<0.0076	U	
		VMP-43-20-102616	10/26/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0034**	J		<0.027	U		<0.0068	U	
		VMP-43-20-013117	1/31/2017	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0021**	J		<0.028	U		<0.0071	U	
		VMP-43-20-042717	4/27/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-43-20-072417	7/24/2017	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-43-20-102717	10/27/2017	<0.014	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-43-20-012618	1/26/2018	**0.0022**	J		<0.0075	U		<0.0055	U		0.0036	J		<0.012	U		**0.094**			<0.024	U		<0.0062	U	
		VMP-43-20-041218	4/12/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0022**	J		<0.023	U		<0.0058	U	
		VMP-43-20-071818	7/18/2018	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0066	U	
		VMP-43-20-102918	10/29/2018	**0.001**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0064	U	
		VMP-43-20-012919	1/29/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.001**	J		<0.022	U		<0.0055	U	
		VMP-43-20-042919	4/29/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-43-20-080119	8/1/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	ND,UJ	UJ
		VMP-43-20-102119	10/21/2019	**0.0033**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0039**	J		<0.026	U		<0.0064	U	
		VMP-43-20-012720	1/27/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-43-20-043020	4/30/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-43-20-072820	7/28/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0013**	J		<0.028	U		<0.0071	U	
		VMP-43-20-110320	11/3/2020	**0.002**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0018**	J		<0.026	U		<0.0065	U	
		VMP-43-20-012621	1/26/2021	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-43-10-050515	5/5/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-43-10-072115	7/21/2015	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0022**	J		<0.0055	U		<0.0055	U	
		VMP-43-10-102915	10/29/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0025**	J		<0.0062	U		<0.0062	U	
		VMP-43-10-020116	2/1/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.002**	J		<0.006	U		<0.006	U	
		VMP-43-10-042716	4/27/2016	**0.00089**	J		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0027**	J		<0.006	U		<0.006	U	
		VMP-43-10-072716	7/27/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-43-10-102616	10/26/2016	**0.0043**			<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-43-10-013117	1/31/2017	**0.0015**	J		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-43-10-042717	4/27/2017	**0.0037**	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-43-10-072417	7/24/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-43-10-102717	10/27/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-43-10-012618	1/26/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.003**	J		<0.0043	U		<0.0043	U	
		VMP-43-10-041218	4/12/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-43-10-071818	7/18/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-43-10-102918	10/29/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-43-10-012919	1/29/2019	**0.0044**			<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-43-10-042919	4/29/2019	**0.005**			<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0037**	J		<0.0048	U		<0.0048	U	
		VMP-43-10-080119	8/1/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-43-10-102119	10/21/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-43-10-012720	1/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-43-10-043020	4/30/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0022**	J		<0.0054	U		<0.0054	U	
		VMP-43-10-072820	7/28/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-43-10-110320	11/3/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-43-10-012621	1/26/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-43-20-021215-DUP	2/12/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-43-20-050515	5/5/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-43-20-072115	7/21/2015	<0.0058	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0025**	J		<0.0068	U		<0.0068	U	
		VMP-43-20-102915	10/29/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-43-20-102915-DUP	10/29/2015	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-43-20-020116	2/1/2016	<0.0073	U		<0.016	U		<0.013	U		<0.013	U		<0.013	U		<0.01	U		<0.0085	U		<0.0085	U	
		VMP-43-20-042716	4/27/2016	**0.00074**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-43-20-072716	7/27/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-43-20-102616	10/26/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-43-20-013117	1/31/2017	**0.018**			<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-43-20-042717	4/27/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-43-20-072417	7/24/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0032**	J		<0.0052	U		<0.0052	U	
		VMP-43-20-102717	10/27/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-43-20-012618	1/26/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-43-20-041218	4/12/2018	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-43-20-071818	7/18/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-43-20-102918	10/29/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0019**	J		<0.005	U		<0.005	U	
		VMP-43-20-012919	1/29/2019	**0.017**			<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0025**	J		<0.0043	U		<0.0043	U	
		VMP-43-20-042919	4/29/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-43-20-080119	8/1/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-43-20-102119	10/21/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-43-20-012720	1/27/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0054**	J		<0.0055	U		<0.0055	U	
		VMP-43-20-043020	4/30/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-43-20-072820	7/28/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-43-20-110320	11/3/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0033**	J		<0.0051	U		<0.0051	U	
		VMP-43-20-012621	1/26/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-43-10-050515	5/5/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-43-10-072115	7/21/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0036**	J		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-43-10-102915	10/29/2015	<0.0061	U		<0.0061	U		<0.0061	U		**0.0063**	J		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-43-10-020116	2/1/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-43-10-042716	4/27/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-43-10-072716	7/27/2016	<0.0051	U		<0.0051	U		<0.0051	U		**0.0027**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-43-10-102616	10/26/2016	<0.0045	U		<0.0045	U		<0.0045	U		**0.0054**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-43-10-013117	1/31/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-43-10-042717	4/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-10-072417	7/24/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-43-10-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-43-10-012618	1/26/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-43-10-041218	4/12/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-10-071818	7/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-10-102918	10/29/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-10-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-43-10-042919	4/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-10-080119	8/1/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		**0.0022**	J		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-10-102119	10/21/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-43-10-012720	1/27/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-10-043020	4/30/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-43-10-072820	7/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-43-10-110320	11/3/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-43-10-012621	1/26/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-20-021215-DUP	2/12/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-43-20-050515	5/5/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-43-20-072115	7/21/2015	<0.0067	U		<0.0067	U		<0.0067	U		<0.058	U		<0.0078	U		<0.0076	U		<0.0076	U		<0.024	U	
		VMP-43-20-102915	10/29/2015	<0.0048	U		<0.0048	U		<0.0048	U		**0.0037**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-20-102915-DUP	10/29/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0041**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-20-020116	2/1/2016	<0.0084	U		<0.0084	U		<0.0084	U		<0.073	U		<0.0098	U		<0.0096	U		<0.0096	U		<0.03	U	
		VMP-43-20-042716	4/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-43-20-072716	7/27/2016	<0.0058	U		<0.0058	U		<0.0058	U		**0.0022**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-43-20-102616	10/26/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-43-20-013117	1/31/2017	<0.0054	U		<0.0054	U		<0.0054	U		**0.003**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-43-20-042717	4/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-20-072417	7/24/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-43-20-102717	10/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-43-20-012618	1/26/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-20-041218	4/12/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-43-20-071818	7/18/2018	<0.005	U		0.01			<0.005	U		**0.0049**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-43-20-102918	10/29/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		**0.0026**	J		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-20-012919	1/29/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-43-20-042919	4/29/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-43-20-080119	8/1/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-20-102119	10/21/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-20-012720	1/27/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-43-20-043020	4/30/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-43-20-072820	7/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-43-20-110320	11/3/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-43-20-012621	1/26/2021	<0.0048	U		<0.0048	U		<0.0048	U		**0.0011**	J		<0.0056	U		<0.0055	U		<0.0055	U		**0.0013**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.0083	J	U	<0.0048	U		0.0014	J	J	<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		**0.00079**	J	
		VMP-43-10-050515	5/5/2015	0.012			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-43-10-072115	7/21/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-43-10-102915	10/29/2015	0.01	J		<0.0067	U		<0.0076	U		<0.012	U		<0.011	U		<0.0063	U		<0.066	U		<0.0054	U	
		VMP-43-10-020116	2/1/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	ND,UJ	UJ	<0.0052	U	
		VMP-43-10-042716	4/27/2016	0.01	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0036**	J	
		VMP-43-10-072716	7/27/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-43-10-102616	10/26/2016	0.022			**0.052**			0.0067			<0.0087	U		<0.008	U		**0.0027**	J		<0.049	U		**0.0035**	J	
		VMP-43-10-013117	1/31/2017	0.0076	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-43-10-042717	4/27/2017	0.0047	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-43-10-072417	7/24/2017	0.0079	J		**0.0036**	J		0.0019	J		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-43-10-102717	10/27/2017	0.0091			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-43-10-012618	1/26/2018	0.0059	J		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-43-10-041218	4/12/2018	0.0041	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-43-10-071818	7/18/2018	0.0043	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-43-10-102918	10/29/2018	0.021			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0029**	J	
		VMP-43-10-012919	1/29/2019	<0.0084	U		**0.0067**			0.078			<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-43-10-042919	4/29/2019	0.03			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.002**	J	
		VMP-43-10-080119	8/1/2019	0.0038	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-43-10-102119	10/21/2019	0.034			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-43-10-012720	1/27/2020	<0.009	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-43-10-043020	4/30/2020	0.036			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-43-10-072820	7/28/2020	0.0073	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-43-10-110320	11/3/2020	0.017	J	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	J	U	<0.0046	U	
		VMP-43-10-012621	1/26/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.0092	J	U	**0.0014**	J		<0.006	U		<0.0094	U		<0.0086	U		**0.0018**	J		<0.052	U		**0.0034**	J	
		VMP-43-20-021215-DUP	2/12/2015	<0.0092	U		**0.0015**	J		<0.006	U		<0.0094	U		<0.0085	U		**0.0016**	J		<0.052	U		**0.0032**	J	
		VMP-43-20-050515	5/5/2015	0.0052	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-43-20-072115	7/21/2015	<0.013	J	U	<0.0073	U		<0.0082	U		<0.013	U		<0.012	U		<0.0069	U		<0.072	U		<0.0059	U	
		VMP-43-20-102915	10/29/2015	0.0073	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0014**	J		<0.051	U		<0.0042	U	
		VMP-43-20-102915-DUP	10/29/2015	0.009			**0.0011**	J		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-43-20-020116	2/1/2016	0.008	J		<0.0092	U		<0.01	U		<0.016	U		<0.015	U		<0.0086	U		<0.09	ND,UJ	UJ	<0.0074	U	
		VMP-43-20-042716	4/27/2016	0.0063	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		**0.0023**	J	
		VMP-43-20-072716	7/27/2016	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-43-20-102616	10/26/2016	0.0086	J		**0.016**			<0.0064	J	U	<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.00092**	J	
		VMP-43-20-013117	1/31/2017	0.0047	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-43-20-042717	4/27/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.0013**	J	
		VMP-43-20-072417	7/24/2017	0.019			**0.0032**	J		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-43-20-102717	10/27/2017	0.023			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-43-20-012618	1/26/2018	0.0062	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-43-20-041218	4/12/2018	0.0052	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-43-20-071818	7/18/2018	0.0093	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-43-20-102918	10/29/2018	0.045			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-43-20-012919	1/29/2019	0.0044	J		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		**0.007**			<0.045	U		**0.043**		
		VMP-43-20-042919	4/29/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-43-20-080119	8/1/2019	0.0079	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.00076**	J	
		VMP-43-20-102119	10/21/2019	0.008	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-43-20-012720	1/27/2020	<0.01	ND,UJ	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-43-20-043020	4/30/2020	0.01	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-43-20-072820	7/28/2020	0.0081	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-43-20-110320	11/3/2020	0.021			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-43-20-012621	1/26/2021	<0.023	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.004	U					**0.0064**	J		<0.0054	U	
		VMP-43-10-050515	5/5/2015	<0.023	U		0.0029	J		<0.0069	U		**0.0043**	J		<0.0051	U					**0.038**			<0.0069	U	
		VMP-43-10-072115	7/21/2015	<0.022	U		0.0064	J		<0.0067	U		<0.0056	U		<0.0049	U					**0.012**	J		<0.0067	U	
		VMP-43-10-102915	10/29/2015	<0.025	U		0.0036	J		<0.0076	U		<0.0063	U		<0.0056	U					**0.0054**	J		<0.0076	U	
		VMP-43-10-020116	2/1/2016	<0.024	U		0.0033	J		<0.0073	U		<0.0061	U		<0.0053	U					**0.0031**	J		<0.0073	U	
		VMP-43-10-042716	4/27/2016	**0.0036**	J		0.023			<0.0073	U		<0.0061	U		<0.0053	U					**0.01**	J		<0.0073	U	
		VMP-43-10-072716	7/27/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0098**	J		<0.0063	U	
		VMP-43-10-102616	10/26/2016	<0.019	U		0.0076	J		<0.0056	J	U	**0.004**	J		<0.016	U		**0.00061**	J	J	**0.033**			<0.0056	J	U
		VMP-43-10-013117	1/31/2017	<0.021	U		0.0053	J		**0.0022**	J		<0.0052	U		<0.018	U					**0.014**			<0.0062	U	
		VMP-43-10-042717	4/27/2017	<0.02	U		0.0027	J		<0.0059	U		<0.005	U		<0.017	U					**0.0048**	J		<0.0059	U	
		VMP-43-10-072417	7/24/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-43-10-102717	10/27/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0013**	J		<0.0056	U	
		VMP-43-10-012618	1/26/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	J	U	<0.0052	U	
		VMP-43-10-041218	4/12/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.025**			<0.0059	U	
		VMP-43-10-071818	7/18/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-43-10-102918	10/29/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0042**	J		<0.0058	U	
		VMP-43-10-012919	1/29/2019	<0.018	U		0.0047	J		**0.37**			<0.0046	U		<0.016	U					**0.0068**	J		**1.4**		
		VMP-43-10-042919	4/29/2019	<0.02	U		0.0059	J		**0.0036**	J		<0.0049	ND,UJ	UJ	<0.017	U					**0.027**			<0.0059	U	
		VMP-43-10-080119	8/1/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0053**	J		<0.0058	U	
		VMP-43-10-102119	10/21/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-43-10-012720	1/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-43-10-043020	4/30/2020	<0.022	U		<0.016	U		**0.0008**	J		<0.0055	U		<0.019	U					**0.0084**	J		<0.0066	U	
		VMP-43-10-072820	7/28/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0073**	J		**0.0009**	J	
		VMP-43-10-110320	11/3/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.033**			<0.0065	U	
		VMP-43-10-012621	1/26/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.004**	J		<0.0059	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0032**	J		<0.006	U	
		VMP-43-20-021215-DUP	2/12/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0025**	J		<0.006	U	
		VMP-43-20-050515	5/5/2015	<0.022	U		0.0017	J		<0.0066	U		<0.0055	U		<0.0049	U					**0.0033**	J		<0.0066	U	
		VMP-43-20-072115	7/21/2015	**0.0041**	J		<0.02	U		**0.001**	J		**0.0018**	J		<0.006	U					**0.0091**	J		<0.0082	U	
		VMP-43-20-102915	10/29/2015	**0.0024**	J	J	0.0042	J		<0.0059	U		<0.0049	U		<0.0043	U					**0.011**	J		<0.0059	U	
		VMP-43-20-102915-DUP	10/29/2015	<0.019	U		<0.014	U		<0.0058	U		**0.0012**	J		<0.0043	U					**0.013**			<0.0058	U	
		VMP-43-20-020116	2/1/2016	<0.034	U		0.012	J		<0.01	U		<0.0086	U		<0.0076	U					**0.014**	J		<0.01	U	
		VMP-43-20-042716	4/27/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	J	U	<0.0066	U	
		VMP-43-20-072716	7/27/2016	**0.0022**	J		0.0046	J		**0.0019**	J		<0.006	U		<0.021	U					**0.018**			<0.0072	U	
		VMP-43-20-102616	10/26/2016	<0.021	U		0.0038	J		<0.0064	U		<0.0054	U		<0.019	U		<0.014	U		**0.0036**	J		<0.0064	J	U
		VMP-43-20-013117	1/31/2017	<0.022	U		0.0039	J		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-43-20-042717	4/27/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0061**	J		<0.0059	U	
		VMP-43-20-072417	7/24/2017	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.0035**	J		<0.0063	U	
		VMP-43-20-102717	10/27/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0026**	J		<0.0058	U	
		VMP-43-20-012618	1/26/2018	<0.019	U		0.022			<0.0058	U		<0.0049	U		<0.017	U					**0.005**	J		<0.0058	U	
		VMP-43-20-041218	4/12/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.018**			**0.00075**	J	
		VMP-43-20-071818	7/18/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0026**	J		<0.0062	U	
		VMP-43-20-102918	10/29/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0033**	J		<0.0061	U	
		VMP-43-20-012919	1/29/2019	<0.017	U		0.26			<0.0052	U		<0.0044	U		<0.015	U					**0.014**			<0.0052	U	
		VMP-43-20-042919	4/29/2019	<0.021	U		0.0035	J		<0.0062	U		<0.0052	ND,UJ	UJ	<0.018	U					<0.012	U		<0.0062	U	
		VMP-43-20-080119	8/1/2019	<0.019	ND,UJ	UJ	<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0045**	J		<0.0058	U	
		VMP-43-20-102119	10/21/2019	<0.02	U		0.0045	J		<0.0061	U		<0.005	U		<0.018	U					**0.012**			<0.0061	U	
		VMP-43-20-012720	1/27/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.032**			<0.0067	U	
		VMP-43-20-043020	4/30/2020	<0.023	U		<0.016	U		**0.0014**	J		<0.0056	U		<0.02	U					**0.0089**	J		**0.0035**	J	
		VMP-43-20-072820	7/28/2020	<0.022	U		0.21			<0.0067	U		<0.0056	U		<0.02	U					**0.016**			**0.0013**	J	
		VMP-43-20-110320	11/3/2020	<0.021	U		0.003	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0064**	J		<0.0062	U	
		VMP-43-20-012621	1/26/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0071**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0018**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-43-10-050515	5/5/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.00082**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-43-10-072115	7/21/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0024**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-43-10-102915	10/29/2015	<0.0066	U		<0.01	U		<0.01	U		<0.0045	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-43-10-020116	2/1/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-43-10-042716	4/27/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0019**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-43-10-072716	7/27/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.00095**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-43-10-102616	10/26/2016	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.019**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-43-10-013117	1/31/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0022**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-43-10-042717	4/27/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0016**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-10-072417	7/24/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0013**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-43-10-102717	10/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.00085**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-43-10-012618	1/26/2018	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.00084**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-43-10-041218	4/12/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-10-071818	7/18/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-10-102918	10/29/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-10-012919	1/29/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-43-10-042919	4/29/2019	**0.0018**	J		<0.0082	U		<0.0081	U		<0.0035	ND,UJ	UJ	**0.0042**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-43-10-080119	8/1/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-10-102119	10/21/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00058**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-43-10-012720	1/27/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-10-043020	4/30/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0011**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-43-10-072820	7/28/2020	<0.0089	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-43-10-110320	11/3/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-43-10-012621	1/26/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0046**			<0.036	U		<0.0067	U		<0.0067	U	
		VMP-43-20-021215-DUP	2/12/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0037**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-20-050515	5/5/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0012**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-43-20-072115	7/21/2015	<0.0072	U		<0.012	U		<0.011	U		<0.005	U		<0.0063	U		<0.05	U		<0.0092	U		<0.0092	U	
		VMP-43-20-102915	10/29/2015	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-20-102915-DUP	10/29/2015	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.001**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-20-020116	2/1/2016	<0.009	U		<0.014	U		<0.014	U		<0.0062	U		<0.008	U		<0.063	U		<0.012	U		<0.012	U	
		VMP-43-20-042716	4/27/2016	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-43-20-072716	7/27/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.00086**	J		<0.043	U		<0.008	U		<0.008	U	
		VMP-43-20-102616	10/26/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0029**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-43-20-013117	1/31/2017	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0018**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-43-20-042717	4/27/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-20-072417	7/24/2017	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0012**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-43-20-102717	10/27/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-43-20-012618	1/26/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.014**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-20-041218	4/12/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-43-20-071818	7/18/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-43-20-102918	10/29/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-43-20-012919	1/29/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-43-20-042919	4/29/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	ND,UJ	UJ	<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-43-20-080119	8/1/2019	<0.0051	U		<0.0082	U		**0.075**			<0.0035	U		**0.00062**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-20-102119	10/21/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00054**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-43-20-012720	1/27/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-43-20-043020	4/30/2020	<0.0059	U		<0.0095	U		**0.016**			<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-43-20-072820	7/28/2020	<0.0093	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-43-20-110320	11/3/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-43-20-012621	1/26/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	J	U	<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-43	10 ft	VMP-43-10-021015	2/10/2015	<0.0059	U		<0.0062	U		<0.0054	J	U	<0.0054	U		<0.0051	U		<0.0028	U		0.0036	J		**0.0011**	J	
		VMP-43-10-050515	5/5/2015	<0.0076	U		0.0016	J		<0.0069	J	U	<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-43-10-072115	7/21/2015	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-43-10-102915	10/29/2015	<0.0083	U		<0.0086	U		<0.0076	U		<0.0076	U		0.02		J	<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-43-10-020116	2/1/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-43-10-042716	4/27/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0014	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-43-10-072716	7/27/2016	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-43-10-102616	10/26/2016	<0.0061	U		0.0012	J		<0.006		U	<0.0056	U		0.0045	J		<0.0029	U		0.18			**0.041**		
		VMP-43-10-013117	1/31/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00063	J		<0.0032	U		0.0011	J		<0.0055	U	
		VMP-43-10-042717	4/27/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-10-072417	7/24/2017	<0.0068	U		0.0014	J		**0.0025**	J		<0.0062	U		0.0087			<0.0032	U		0.016			**0.0064**		
		VMP-43-10-102717	10/27/2017	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0034	J		<0.0049	U	
		VMP-43-10-012618	1/26/2018	<0.0057	U		0.0012	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-43-10-041218	4/12/2018	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-10-071818	7/18/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-10-102918	10/29/2018	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		0.0007	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-43-10-012919	1/29/2019	<0.006	U		0.0012	J		**0.1**			**0.0065**			0.76			<0.0029	U		0.0014	J		**0.0013**	J	
		VMP-43-10-042919	4/29/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0018	J		<0.0052	U	
		VMP-43-10-080119	8/1/2019	<0.0064	U		0.00094	J		<0.0058	U		<0.0058	U		0.0018	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-43-10-102119	10/21/2019	<0.0063	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-43-10-012720	1/27/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-43-10-043020	4/30/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-43-10-072820	7/28/2020	<0.007	U		0.00087	J		<0.0064	U		<0.0064	U		0.00066	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-43-10-110320	11/3/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-43-10-012621	1/26/2021	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
	20 ft	VMP-43-20-021215	2/12/2015	<0.0066	U		<0.0069	U		<0.006	J	U	<0.006	U		0.0045	J		<0.0031	U		0.0026	J		**0.0013**	J	
		VMP-43-20-021215-DUP	2/12/2015	<0.0066	U		<0.0068	U		<0.006	J	U	<0.006	U		0.0045	J		<0.0031	U		0.0025	J		**0.0014**	J	
		VMP-43-20-050515	5/5/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-43-20-072115	7/21/2015	<0.009	U		<0.0094	U		<0.0082	U		<0.0082	U		<0.0078	U		<0.0043	U		<0.0073	U		<0.0073	U	
		VMP-43-20-102915	10/29/2015	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.021		J	<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-20-102915-DUP	10/29/2015	<0.0064	U		<0.0066	U		**0.00073**	J	J	<0.0058	U		0.022		J	<0.003	U		0.0013	J		<0.0051	U	
		VMP-43-20-020116	2/1/2016	<0.011	U		<0.012	U		<0.01	U		<0.01	U		0.0036	J		<0.0054	U		0.002	J		<0.0092	U	
		VMP-43-20-042716	4/27/2016	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		0.0087			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-43-20-072716	7/27/2016	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		0.009			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-43-20-102616	10/26/2016	<0.007	U		<0.0074	U		<0.0064	J	U	<0.0064	U		<0.0061	J	U	<0.0033	U		0.056			**0.015**		
		VMP-43-20-013117	1/31/2017	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		0.0013	J		<0.0059	U	
		VMP-43-20-042717	4/27/2017	<0.0065	U		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-20-072417	7/24/2017	<0.0069	U		0.0016	J		**0.0013**	J		<0.0063	U		<0.006	U		<0.0033	U		0.011			**0.0029**	J	
		VMP-43-20-102717	10/27/2017	<0.0063	U		0.0016	J		**0.0011**	J		<0.0058	U		0.00096	J		<0.003	U		0.0034	J		<0.0051	U	
		VMP-43-20-012618	1/26/2018	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-43-20-041218	4/12/2018	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		0.0057			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-43-20-071818	7/18/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-43-20-102918	10/29/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0014	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-43-20-012919	1/29/2019	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		0.33			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-43-20-042919	4/29/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-43-20-080119	8/1/2019	**0.0031**	J		0.00075	J		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-43-20-102119	10/21/2019	<0.0066	U		0.0015	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-43-20-012720	1/27/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-43-20-043020	4/30/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.008			<0.0035	U		<0.006	U		<0.006	U	
		VMP-43-20-072820	7/28/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.89			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-43-20-110320	11/3/2020	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		0.0026	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-43-20-012621	1/26/2021	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	**0.023**	J		**0.0039**	J		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		0.015			**0.017**	J	
		VMP-43-30-050515-DUP	5/5/2015	**0.013**	J		**0.0022**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.011**	J	
		VMP-43-30-072115	7/21/2015	**0.026**	J		<0.0043	J	U	**0.0014**	J		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0069**	J	
		VMP-43-30-102915	10/29/2015	**0.017**	J		<0.0039	J	U	<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-43-30-020116	2/1/2016	**0.029**	J		**0.00056**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0061**	J	
		VMP-43-30-042716	4/27/2016	**0.017**	J		<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0024**	J	
		VMP-43-30-042716-DUP	4/27/2016	**0.016**	J		**0.0024**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0024**	J	
		VMP-43-30-072716	7/27/2016	**0.023**	J		**0.0011**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		**0.0043**	J	
		VMP-43-30-102616	10/26/2016	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-43-30-102616-Dup	10/26/2016	**0.026**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0074**	J	
		VMP-43-30-013117	1/31/2017	**0.02**	J		**0.0028**	J		**0.0036**	J		<0.014	U		<0.052	U		<0.003	U		0.01	J		**0.0045**	J	
		VMP-43-30-013117-Dup	1/31/2017	**0.013**	J		**0.002**	J		**0.003**	J		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0041**	J	
		VMP-43-30-042717	4/27/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0041	J		**0.0055**	J	
		VMP-43-30-072417	7/24/2017	**0.023**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0044**	J	
		VMP-43-30-102717	10/27/2017	**0.013**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0033**	J	
		VMP-43-30-012618	1/26/2018	<0.028	J	U	<0.0037	J	U	**0.038**			<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-30-041218	4/12/2018	**0.014**	J		<0.0038	U		**0.0036**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-30-041218-DUP	4/12/2018	**0.05**			<0.0038	U		**0.0037**	J		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-43-30-071818	7/18/2018	**0.04**			<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0095**	J	
		VMP-43-30-102918	10/29/2018	**0.034**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0075**	J	
		VMP-43-30-012919	1/29/2019	**0.014**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-43-30-012919-DUP	1/29/2019	**0.023**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0033**	J	
		VMP-43-30-042919	4/29/2019	**0.011**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-43-30-080119	8/1/2019	**0.028**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0035	J		<0.014	U	
		VMP-43-30-102119	10/21/2019	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-43-30-102119-DUP	10/21/2019	**0.011**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-43-30-012720	1/27/2020	**0.01**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-43-30-043020	4/30/2020	**0.01**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-43-30-072820	7/28/2020	**0.02**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0022**	J	
		VMP-43-30-110320	11/3/2020	**0.018**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0094	J		**0.0036**	J	
		VMP-43-30-022521	2/25/2021	**0.02**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
	10 ft	VMP-44-10-020415	2/4/2015	**0.013**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-44-10-050115	5/1/2015	**0.021**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.017**		
		VMP-44-10-072415	7/24/2015	**0.042**			<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0079**	J	
		VMP-44-10-102815	10/28/2015	**0.022**	J		**0.0011**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0058**	J	
		VMP-44-10-012516	1/25/2016	**0.021**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0028	J		**0.0061**	J	
		VMP-44-10-042816	4/28/2016	**0.012**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-44-10-072716	7/27/2016	**0.038**			<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0065**	J	
		VMP-44-10-102716	10/27/2016	**0.015**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-44-10-012417	1/24/2017	**0.02**	J		<0.0044	J	U	<0.0092	U		<0.014	U		<0.053	U		<0.003	U		0.0053	J		**0.0046**	J	
		VMP-44-10-042517	4/25/2017	<0.029	J	U	<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-44-10-072517	7/25/2017	**0.014**	J		**0.0004**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-44-10-102517	10/25/2017	**0.018**	J		<0.0039	J	U	<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0039**	J	
		VMP-44-10-012518	1/25/2018	<0.027	J	U	<0.0037	J	U	<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.012			<0.014	U	
		VMP-44-10-042318	4/23/2018	**0.0067**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-44-10-071818	7/18/2018	**0.022**	J		**0.0023**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0037**	J	
		VMP-44-10-102518	10/25/2018	**0.02**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.005**	J	
		VMP-44-10-012219	1/22/2019	**0.022**	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		**0.0041**	J	
		VMP-44-10-042919	4/29/2019	**0.014**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-44-10-072319	7/23/2019	**0.021**	J		**0.0017**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-44-10-102419	10/24/2019	**0.012**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0018**	J	
		VMP-44-10-012720	1/27/2020	**0.011**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-44-10-043020	4/30/2020	**0.0067**	J		**0.00069**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-44-10-072820	7/28/2020	**0.0032**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.004	J		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	**0.002**	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-43-30-050515-DUP	5/5/2015	**0.0015**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0015**	J		<0.027	U		<0.0067	U	
		VMP-43-30-072115	7/21/2015	**0.0043**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0069**			<0.028	U		<0.007	U	
		VMP-43-30-102915	10/29/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0034**	J		<0.025	U		<0.0063	U	
		VMP-43-30-020116	2/1/2016	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.00099**	J		<0.028	U		<0.0071	U	
		VMP-43-30-042716	4/27/2016	**0.002**	J		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-43-30-042716-DUP	4/27/2016	**0.0075**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		**0.007**	J		<0.0073	U	
		VMP-43-30-072716	7/27/2016	**0.0037**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0014**	J		<0.029	ND,UJ	UJ	<0.0074	U	
		VMP-43-30-102616	10/26/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0039**	J		<0.027	U		<0.0067	U	
		VMP-43-30-102616-Dup	10/26/2016	**0.0033**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0039**	J		<0.028	U		<0.0071	U	
		VMP-43-30-013117	1/31/2017	**0.0022**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.01**			<0.028	U		<0.007	U	
		VMP-43-30-013117-Dup	1/31/2017	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.01**			<0.027	U		<0.0067	U	
		VMP-43-30-042717	4/27/2017	**0.0016**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0027**	J		<0.024	U		<0.0061	U	
		VMP-43-30-072417	7/24/2017	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0015**	J		<0.024	U		<0.006	U	
		VMP-43-30-102717	10/27/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.00098**	J		<0.023	U		<0.0059	U	
		VMP-43-30-012618	1/26/2018	<0.014	U		<0.0073	U		<0.0054	U		0.0017	J		<0.012	U		**0.21**			<0.024	U		<0.006	U	
		VMP-43-30-041218	4/12/2018	<0.015	U		<0.0074	U		<0.0054	U		0.0027	J		<0.012	U		**0.013**			<0.024	U		<0.0061	U	
		VMP-43-30-041218-DUP	4/12/2018	<0.015	U		<0.0076	U		<0.0055	U		0.0024	J		<0.013	U		**0.013**			<0.025	U		<0.0062	U	
		VMP-43-30-071818	7/18/2018	**0.18**			<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.0068**			<0.026	U		<0.0066	U	
		VMP-43-30-102918	10/29/2018	**0.023**			<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-43-30-012919	1/29/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0016**	J		<0.023	U		<0.0057	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0018**	J		<0.023	U		<0.0058	U	
		VMP-43-30-042919	4/29/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-43-30-080119	8/1/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	ND,UJ	UJ
		VMP-43-30-102119	10/21/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0021**	J		<0.026	U		<0.0064	U	
		VMP-43-30-102119-DUP	10/21/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0019**	J		<0.026	U		<0.0064	U	
		VMP-43-30-012720	1/27/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U	UJ	<0.0068	U	
		VMP-43-30-043020	4/30/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-43-30-072820	7/28/2020	**0.0041**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-43-30-110320	11/3/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-43-30-022521	2/25/2021	**0.0025**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
	10 ft	VMP-44-10-020415	2/4/2015	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-44-10-050115	5/1/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-44-10-072415	7/24/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0033**	J		<0.03	U		<0.0075	U	
		VMP-44-10-102815	10/28/2015	**0.0091**	J		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	J	U	**0.003**	J		<0.0078	U	
		VMP-44-10-012516	1/25/2016	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-44-10-042816	4/28/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-44-10-072716	7/27/2016	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.004**	J		<0.03	ND,UJ	UJ	<0.0074	U	
		VMP-44-10-102716	10/27/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0064**	J		<0.027	U		<0.0068	U	
		VMP-44-10-012417	1/24/2017	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-44-10-042517	4/25/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-44-10-072517	7/25/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0036**	J		<0.026	U		<0.0065	U	
		VMP-44-10-102517	10/25/2017	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0063	U	
		VMP-44-10-012518	1/25/2018	**0.0043**	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-44-10-042318	4/23/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-44-10-071818	7/18/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-44-10-102518	10/25/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-44-10-012219	1/22/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.0051	U		<0.021	U		<0.0054	U	
		VMP-44-10-042919	4/29/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-44-10-072319	7/23/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0018**	J		<0.028	U		<0.007	U	
		VMP-44-10-102419	10/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0012**	J		<0.024	U		<0.0059	U	
		VMP-44-10-012720	1/27/2020	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U	UJ	<0.0076	U	
		VMP-44-10-043020	4/30/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-44-10-072820	7/28/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0024**	J		<0.0061	U		<0.0061	U	
		VMP-43-30-050515-DUP	5/5/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-43-30-072115	7/21/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0021**	J		<0.0055	U		<0.0055	U	
		VMP-43-30-102915	10/29/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-43-30-020116	2/1/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0018**	J		<0.0056	U		<0.0056	U	
		VMP-43-30-042716	4/27/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	U		<0.0063	U		<0.0063	U	
		VMP-43-30-042716-DUP	4/27/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-43-30-072716	7/27/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0047**	J		<0.0057	U		<0.0057	U	
		VMP-43-30-102616	10/26/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-43-30-102616-Dup	10/26/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-43-30-013117	1/31/2017	**0.037**		J	<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-43-30-013117-Dup	1/31/2017	**0.002**	J	J	<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0053	U		<0.0053	U	
		VMP-43-30-042717	4/27/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-43-30-072417	7/24/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-43-30-102717	10/27/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-43-30-012618	1/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0027**	J		<0.0047	U		<0.0047	U	
		VMP-43-30-041218	4/12/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-43-30-041218-DUP	4/12/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-43-30-071818	7/18/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-43-30-102918	10/29/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-43-30-012919	1/29/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-43-30-042919	4/29/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-43-30-080119	8/1/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-43-30-102119	10/21/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-43-30-102119-DUP	10/21/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-43-30-012720	1/27/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0044**	J		<0.0053	U		<0.0053	U	
		VMP-43-30-043020	4/30/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-43-30-072820	7/28/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-43-30-110320	11/3/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-43-30-022521	2/25/2021	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
	10 ft	VMP-44-10-020415	2/4/2015	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-44-10-050115	5/1/2015	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-44-10-072415	7/24/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-44-10-102815	10/28/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.006**	J		<0.0061	U		<0.0061	U	
		VMP-44-10-012516	1/25/2016	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-44-10-042816	4/28/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0017**	J		<0.0056	U		<0.0056	U	
		VMP-44-10-072716	7/27/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.002**	J		<0.0058	U		<0.0058	U	
		VMP-44-10-102716	10/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-44-10-012417	1/24/2017	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-44-10-042517	4/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-44-10-072517	7/25/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-44-10-102517	10/25/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-44-10-012518	1/25/2018	**0.00088**	J		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0036**	J		<0.0047	U		<0.0047	U	
		VMP-44-10-042318	4/23/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	J	U	**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-44-10-071818	7/18/2018	**0.0021**	J		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-44-10-102518	10/25/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-44-10-012219	1/22/2019	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0028**	J		<0.0042	U		<0.0042	U	
		VMP-44-10-042919	4/29/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-44-10-072319	7/23/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-44-10-102419	10/24/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-44-10-012720	1/27/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-44-10-043020	4/30/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-44-10-072820	7/28/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-43-30-050515-DUP	5/5/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-43-30-072115	7/21/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-43-30-102915	10/29/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-30-020116	2/1/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-43-30-042716	4/27/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-43-30-042716-DUP	4/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-43-30-072716	7/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0019**	J		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-43-30-102616	10/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-43-30-102616-Dup	10/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-43-30-013117	1/31/2017	<0.0054	U		<0.0054	U		<0.0054	U		**0.0044**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-43-30-013117-Dup	1/31/2017	<0.0052	U		<0.0052	U		<0.0052	U		**0.0016**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-43-30-042717	4/27/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-30-072417	7/24/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-43-30-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-43-30-012618	1/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-43-30-041218	4/12/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-30-041218-DUP	4/12/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-43-30-071818	7/18/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		**0.0087**	J	
		VMP-43-30-102918	10/29/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-30-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-43-30-042919	4/29/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-43-30-080119	8/1/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-43-30-102119	10/21/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-30-102119-DUP	10/21/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-30-012720	1/27/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-43-30-043020	4/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-43-30-072820	7/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-43-30-110320	11/3/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-43-30-022521	2/25/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
	10 ft	VMP-44-10-020415	2/4/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-44-10-050115	5/1/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-44-10-072415	7/24/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	J	U	<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-44-10-102815	10/28/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	J	U	<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-44-10-012516	1/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-44-10-042816	4/28/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-44-10-072716	7/27/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-44-10-102716	10/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-44-10-012417	1/24/2017	<0.0054	U		<0.0054	U		<0.0054	U		**0.0023**	J		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-44-10-042517	4/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0028**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-44-10-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	ND,UJ	UJ	<0.0057	U		<0.0057	U		<0.018	U	
		VMP-44-10-102517	10/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-44-10-012518	1/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-44-10-042318	4/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-44-10-071818	7/18/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0044**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-44-10-102518	10/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-10-012219	1/22/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-44-10-042919	4/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-10-072319	7/23/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-44-10-102419	10/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-44-10-012720	1/27/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-44-10-043020	4/30/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-44-10-072820	7/28/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	0.0097	J		**0.0048**	J		0.002	J		<0.011	U		<0.01	U		**0.008**			<0.064	U		**0.0098**		
		VMP-43-30-050515-DUP	5/5/2015	<0.0098	U		**0.0019**	J		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		**0.0023**	J	
		VMP-43-30-072115	7/21/2015	0.01			<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-43-30-102915	10/29/2015	0.0047	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-43-30-020116	2/1/2016	0.12			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-43-30-042716	4/27/2016	<0.012	U		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-43-30-042716-DUP	4/27/2016	<0.011	U		**0.0024**	J		0.0026	J		<0.011	U		<0.0098	U		**0.0035**	J		<0.06	U		**0.006**		
		VMP-43-30-072716	7/27/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-43-30-102616	10/26/2016	0.017			**0.0024**	J		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0015**	J	
		VMP-43-30-102616-Dup	10/26/2016	0.011			**0.0022**	J		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		**0.0012**	J	
		VMP-43-30-013117	1/31/2017	0.013			**0.0039**	J		0.00096	J		<0.01	U		<0.0094	U		**0.0064**			<0.058	U		**0.01**		
		VMP-43-30-013117-Dup	1/31/2017	0.0084	J		**0.003**	J		<0.0064	U		<0.01	U		<0.0091	U		**0.0028**	J		<0.055	U		**0.006**		
		VMP-43-30-042717	4/27/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-43-30-072417	7/24/2017	0.023			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-43-30-102717	10/27/2017	0.018			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-43-30-012618	1/26/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-43-30-041218	4/12/2018	0.011			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0017**	J	
		VMP-43-30-041218-DUP	4/12/2018	0.014			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0017**	J	
		VMP-43-30-071818	7/18/2018	0.0096			<0.0055	U		0.0012	J		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-43-30-102918	10/29/2018	0.014			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-43-30-012919	1/29/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-43-30-042919	4/29/2019	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-43-30-080119	8/1/2019	0.0058	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-43-30-102119	10/21/2019	0.0047	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-43-30-102119-DUP	10/21/2019	0.0045	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-43-30-012720	1/27/2020	<0.0099	ND,UJ	UJ	<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-43-30-043020	4/30/2020	0.011			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-43-30-072820	7/28/2020	0.0065	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-43-30-110320	11/3/2020	0.016			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-43-30-022521	2/25/2021	0.008	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
	10 ft	VMP-44-10-020415	2/4/2015	0.0044	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-44-10-050115	5/1/2015	0.005	J		<0.006	U		0.0022	J		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0024**	J	
		VMP-44-10-072415	7/24/2015	0.015		J	<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-44-10-102815	10/28/2015	0.014			<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		<0.0053	U	
		VMP-44-10-012516	1/25/2016	0.036			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-10-042816	4/28/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-44-10-072716	7/27/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-44-10-102716	10/27/2016	0.0074	J		**0.002**	J		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-44-10-012417	1/24/2017	0.019			<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		**0.0024**	J		<0.059	U		**0.0023**	J	
		VMP-44-10-042517	4/25/2017	0.0069	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0014**	J		<0.053	U		<0.0044	U	
		VMP-44-10-072517	7/25/2017	0.0093	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-44-10-102517	10/25/2017	0.0081	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-10-012518	1/25/2018	0.006	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		**0.0018**	J	
		VMP-44-10-042318	4/23/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-10-071818	7/18/2018	0.028			**0.0012**	J		0.0028	J		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-44-10-102518	10/25/2018	0.0074	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-44-10-012219	1/22/2019	<0.0078	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-44-10-042919	4/29/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-44-10-072319	7/23/2019	0.014			**0.0012**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0036**	J	
		VMP-44-10-102419	10/24/2019	<0.0086	U	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-44-10-012720	1/27/2020	<0.011	ND,UJ	UJ	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		**0.0033**	J	
		VMP-44-10-043020	4/30/2020	0.0048	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-44-10-072820	7/28/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	<0.024	U		0.0074	J		<0.0074	J	U	**0.0036**	J		<0.0054	U					**0.011**	J		<0.0074	J	U
		VMP-43-30-050515-DUP	5/5/2015	<0.021	U		<0.015	U		<0.0064	U		**0.0021**	J		<0.0047	U					**0.0071**	J		<0.0064	U	
		VMP-43-30-072115	7/21/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0077**	J		<0.0067	U	
		VMP-43-30-102915	10/29/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0035**	J		<0.006	U	
		VMP-43-30-020116	2/1/2016	<0.023	U		0.0046	J		<0.0068	U		<0.0056	U		<0.005	U					**0.011**	J		<0.0068	U	
		VMP-43-30-042716	4/27/2016	**0.0012**	J		0.0025	J		<0.0076	U		<0.0064	U		<0.0056	U					**0.0023**	J		<0.0076	U	
		VMP-43-30-042716-DUP	4/27/2016	**0.002**	J		0.011	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.0041**	J		<0.0069	U	
		VMP-43-30-072716	7/27/2016	**0.0012**	J		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.0065**	J		<0.007	U	
		VMP-43-30-102616	10/26/2016	<0.021	U		0.0058	J		<0.0063	U		<0.0053	U		<0.019	U		<0.014	U		**0.021**			<0.0063	J	U
		VMP-43-30-102616-Dup	10/26/2016	<0.022	U		0.0061	J		<0.0067	U		<0.0056	U		<0.02	U		<0.014	U		**0.013**	J		<0.0067	U	
		VMP-43-30-013117	1/31/2017	<0.022	U		0.015	J		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-43-30-013117-Dup	1/31/2017	<0.021	U		0.0074	J		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-43-30-042717	4/27/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.013**			<0.0058	U	
		VMP-43-30-072417	7/24/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-43-30-102717	10/27/2017	<0.018	U		0.0066	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0028**	J		<0.0056	U	
		VMP-43-30-012618	1/26/2018	<0.019	U		0.0016	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-43-30-041218	4/12/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0046**	J		<0.0058	U	
		VMP-43-30-041218-DUP	4/12/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.012**			<0.0059	U	
		VMP-43-30-071818	7/18/2018	<0.021	U		<0.015	U		**0.0022**	J		<0.0052	U		<0.018	U					**0.004**	J		**0.0078**		
		VMP-43-30-102918	10/29/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.019**			<0.0059	U	
		VMP-43-30-012919	1/29/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0024**	J		<0.0054	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0019**	J		<0.0055	U	
		VMP-43-30-042919	4/29/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	ND,UJ	UJ	<0.019	U					<0.013	U		<0.0064	U	
		VMP-43-30-080119	8/1/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0028**	J		<0.0059	U	
		VMP-43-30-102119	10/21/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.003**	J		<0.0061	U	
		VMP-43-30-102119-DUP	10/21/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0026**	J		<0.0061	U	
		VMP-43-30-012720	1/27/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.028**			<0.0064	U	
		VMP-43-30-043020	4/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0068**	J		<0.0063	U	
		VMP-43-30-072820	7/28/2020	<0.022	U		<0.016	U		**0.00066**	J		<0.0054	U		<0.019	U					**0.0081**	J		**0.0018**	J	
		VMP-43-30-110320	11/3/2020	<0.02	U		0.0035	J		<0.0061	U		<0.005	U		<0.018	U					**0.019**			<0.0061	U	
		VMP-43-30-022521	2/25/2021	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.013**			<0.0061	U	
	10 ft	VMP-44-10-020415	2/4/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0059**	J		<0.0062	U	
		VMP-44-10-050115	5/1/2015	**0.0011**	J		0.0018	J		<0.0068	U		<0.0056	J	U	<0.005	U					**0.022**			<0.0068	U	
		VMP-44-10-072415	7/24/2015	**0.0026**	J	J	<0.017	J	U	<0.0071	U		**0.0031**	J		<0.0052	U					**0.01**	J	J	<0.0071	U	
		VMP-44-10-102815	10/28/2015	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.0055	U					**0.0093**	J		<0.0074	U	
		VMP-44-10-012516	1/25/2016	<0.02	U		0.0012	J		<0.0059	U		<0.005	J	U	<0.0044	U					**0.011**	J		**0.0029**	J	
		VMP-44-10-042816	4/28/2016	<0.023	ND,UJ	UJ	<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					<0.014	U		<0.0068	U	
		VMP-44-10-072716	7/27/2016	**0.0013**	J		<0.017	U		<0.007	U		<0.0059	U		<0.021	U					**0.0019**	J		<0.007	U	
		VMP-44-10-102716	10/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.008**	J		<0.0065	U	
		VMP-44-10-012417	1/24/2017	<0.022	U		0.0073	J		<0.0068	U		<0.0056	U		<0.02	U					**0.03**			<0.0068	U	
		VMP-44-10-042517	4/25/2017	<0.02	U		0.0033	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-44-10-072517	7/25/2017	<0.021	U		0.002	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0077**	J		<0.0062	U	
		VMP-44-10-102517	10/25/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-44-10-012518	1/25/2018	<0.019	U		0.037			<0.0057	U		<0.0047	U		<0.017	U					**0.0085**	J		<0.0057	U	
		VMP-44-10-042318	4/23/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-44-10-071818	7/18/2018	<0.021	U		0.01	J		<0.0063	U		<0.0052	U		<0.018	U					**0.014**			**0.0015**	J	
		VMP-44-10-102518	10/25/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-44-10-012219	1/22/2019	<0.017	U		0.018			<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-44-10-042919	4/29/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	ND,UJ	UJ	<0.017	U					**0.0064**	J		<0.0058	U	
		VMP-44-10-072319	7/23/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0022**	J		<0.0066	U	
		VMP-44-10-102419	10/24/2019	<0.019	U		<0.014	U		<0.0056	J	U	<0.0047	U		<0.016	U					<0.011	U		<0.0056	J	U
		VMP-44-10-012720	1/27/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.025**			<0.0072	U	
		VMP-44-10-043020	4/30/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.012**			<0.0057	U	
		VMP-44-10-072820	7/28/2020	<0.02	U		0.0071	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	J	U	<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.011**			<0.044	U		<0.0082	U		<0.0082	U	
		VMP-43-30-050515-DUP	5/5/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0027**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-43-30-072115	7/21/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-43-30-102915	10/29/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-43-30-020116	2/1/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-43-30-042716	4/27/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		**0.0006**	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-43-30-042716-DUP	4/27/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0079**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-43-30-072716	7/27/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0014**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-43-30-102616	10/26/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0016**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-43-30-102616-Dup	10/26/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	J	U	<0.04	U		<0.0074	U		<0.0074	U	
		VMP-43-30-013117	1/31/2017	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0044**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-43-30-013117-Dup	1/31/2017	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0018**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-43-30-042717	4/27/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-30-072417	7/24/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-43-30-102717	10/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0048**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-43-30-012618	1/26/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-43-30-041218	4/12/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-43-30-041218-DUP	4/12/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-43-30-071818	7/18/2018	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		**0.00083**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-43-30-102918	10/29/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-30-012919	1/29/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-43-30-042919	4/29/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	ND,UJ	UJ	<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-43-30-080119	8/1/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-43-30-102119	10/21/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-43-30-102119-DUP	10/21/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-43-30-012720	1/27/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-43-30-043020	4/30/2020	<0.0055	U		<0.0088	U		**0.0031**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-43-30-072820	7/28/2020	<0.009	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-43-30-110320	11/3/2020	<0.0053	U		<0.0085	U		**0.0014**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-43-30-022521	2/25/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
	10 ft	VMP-44-10-020415	2/4/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-44-10-050115	5/1/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0048**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-44-10-072415	7/24/2015	<0.0062	U		<0.0099	U		**0.0014**	J		<0.0043	U		**0.0012**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-44-10-102815	10/28/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		**0.0014**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-44-10-012516	1/25/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-10-042816	4/28/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U	UJ	<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-44-10-072716	7/27/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-44-10-102716	10/27/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0025**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-44-10-012417	1/24/2017	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0041**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-44-10-042517	4/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00079**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-44-10-072517	7/25/2017	<0.0054	U		<0.0087	ND,UJ	UJ	<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-44-10-102517	10/25/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-10-012518	1/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.018**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-44-10-042318	4/23/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-10-071818	7/18/2018	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0084**			<0.038	U		<0.007	U		<0.007	U	
		VMP-44-10-102518	10/25/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-44-10-012219	1/22/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-44-10-042919	4/29/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	ND,UJ	UJ	<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-44-10-072319	7/23/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0058**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-44-10-102419	10/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-44-10-012720	1/27/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0056	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-44-10-043020	4/30/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-44-10-072820	7/28/2020	<0.0081	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-43-30-050515	5/5/2015	<0.0081	U		0.0017	J		<0.0074	J	U	<0.0074	U		0.0077			<0.0038	U		0.0092			**0.0028**	J	
		VMP-43-30-050515-DUP	5/5/2015	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		0.0019	J		<0.0033	U		0.0026	J		<0.0056	U	
		VMP-43-30-072115	7/21/2015	<0.0073	U		<0.0076	U		**0.0017**	J		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-43-30-102915	10/29/2015	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		0.0092		J	<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-43-30-020116	2/1/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0047	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-43-30-042716	4/27/2016	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		0.00076	J		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-43-30-042716-DUP	4/27/2016	<0.0076	U		<0.0079	U		**0.0028**	J		**0.0011**	J		0.0082			<0.0036	U		0.011			**0.0035**	J	
		VMP-43-30-072716	7/27/2016	<0.0076	U		0.0018	J		<0.007	U		<0.007	U		0.0029	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-43-30-102616	10/26/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0037	J		<0.0033	U		0.0079			**0.0024**	J	
		VMP-43-30-102616-Dup	10/26/2016	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		0.0025	J		<0.0035	U		0.0076			**0.0021**	J	
		VMP-43-30-013117	1/31/2017	**0.0012**	J		0.0016	J		<0.0066	U		<0.0066	U		0.0056	J		<0.0034	U		0.0061			**0.0014**	J	
		VMP-43-30-013117-Dup	1/31/2017	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0037	J		<0.0033	U		0.0059			**0.001**	J	
		VMP-43-30-042717	4/27/2017	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		0.0011	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-43-30-072417	7/24/2017	<0.0063	U		0.0012	J		<0.0058	U		<0.0058	U		0.0036	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-43-30-102717	10/27/2017	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		0.0012	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-43-30-012618	1/26/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0011	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-43-30-041218	4/12/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0063			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-43-30-041218-DUP	4/12/2018	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		0.0058			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-30-071818	7/18/2018	<0.0068	U		<0.0072	U		**0.0034**	J		<0.0063	U		0.018			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-43-30-102918	10/29/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.019			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-30-012919	1/29/2019	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0072			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-43-30-012919-DUP	1/29/2019	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		0.0073			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-43-30-042919	4/29/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-43-30-080119	8/1/2019	**0.0017**	J		0.0011	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-43-30-102119	10/21/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.0015	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-43-30-102119-DUP	10/21/2019	<0.0066	U		0.0011	J		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-43-30-012720	1/27/2020	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-43-30-043020	4/30/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-43-30-072820	7/28/2020	<0.0071	U		0.00092	J		<0.0065	U		<0.0065	U		0.0039	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-43-30-110320	11/3/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-43-30-022521	2/25/2021	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
	10 ft	VMP-44-10-020415	2/4/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-10-050115	5/1/2015	<0.0074	U		<0.0077	U		**0.0025**	J		<0.0068	U		0.0036	J		<0.0035	U		0.003	J		**0.0018**	J	
		VMP-44-10-072415	7/24/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.001	J		<0.0037	U		0.0011	J		<0.0063	U	
		VMP-44-10-102815	10/28/2015	<0.0081	U		<0.0085	U		**0.0014**	J		<0.0074	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-44-10-012516	1/25/2016	<0.0065	U		<0.0068	U		**0.0033**	J		<0.0059	U		0.0016	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-10-042816	4/28/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-44-10-072716	7/27/2016	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		0.0073			<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-44-10-102716	10/27/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.00091	J		<0.0034	U		0.0052	J		<0.0058	U	
		VMP-44-10-012417	1/24/2017	<0.0074	U		0.0016	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		0.0011	J		<0.006	U	
		VMP-44-10-042517	4/25/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.001	J		<0.0054	U	
		VMP-44-10-072517	7/25/2017	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-10-102517	10/25/2017	**0.0012**	J		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0019	J		<0.0053	U	
		VMP-44-10-012518	1/25/2018	<0.0062	U		0.0013	J		<0.0057	U		<0.0057	U		0.0017	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-44-10-042318	4/23/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-10-071818	7/18/2018	<0.0069	U		<0.0072	U		**0.0032**	J		<0.0063	U		0.019			<0.0033	U		0.004	J		**0.0017**	J	
		VMP-44-10-102518	10/25/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-44-10-012219	1/22/2019	<0.0056	U		<0.0058	U		<0.0051	U		<0.0051	U		0.022			<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-44-10-042919	4/29/2019	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-44-10-072319	7/23/2019	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0027	J		<0.0034	U		0.0026	J		<0.0058	U	
		VMP-44-10-102419	10/24/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0031	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-44-10-012720	1/27/2020	<0.0079	U		<0.0083	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-44-10-043020	4/30/2020	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-44-10-072820	7/28/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	**0.014**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0029**	J	
		VMP-44-20-051115	5/11/2015	**0.014**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0041**	J	
		VMP-44-20-072415	7/24/2015	**0.033**			**0.002**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0089**	J	
		VMP-44-20-102815	10/28/2015	**0.024**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0066**	J	
		VMP-44-20-020216-R	2/2/2016	**0.02**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.007**	J	
		VMP-44-20-042816	4/28/2016	**0.03**	J		<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		0.0064	J		**0.0062**	J	
		VMP-44-20-072716	7/27/2016	**0.013**	J		**0.0012**	J		<0.011	U		<0.017	U		<0.063	U		<0.0036	U		<0.016	U		<0.019	U	
		VMP-44-20-102716	10/27/2016	**0.023**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-44-20-012417	1/24/2017	**0.012**	J		<0.0041	J	U	<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0026**	J	
		VMP-44-20-042517	4/25/2017	**0.034**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0052**	J	
		VMP-44-20-072517	7/25/2017	**0.02**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0046**	J	
		VMP-44-20-102517	10/25/2017	**0.019**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-44-20-012518	1/25/2018	<0.027	J	U	<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.009	J		<0.013	U	
		VMP-44-20-042718	4/27/2018	**0.022**	J		**0.00094**	J		**0.0031**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0061**	J	
		VMP-44-20-071818	7/18/2018	**0.03**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0046**	J	
		VMP-44-20-102518	10/25/2018	**0.029**			<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0023**	J	
		VMP-44-20-020419	2/4/2019	**0.13**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0041**	J	
		VMP-44-20-020419-DUP	2/4/2019	**0.04**			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0038	J		<0.015	U	
		VMP-44-20-042919	4/29/2019	**0.016**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-44-20-072319	7/23/2019	**0.39**			**0.002**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0049**	J	
		VMP-44-20-102419	10/24/2019	**0.0069**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-44-20-012720	1/27/2020	<0.034	U		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-44-20-043020	4/30/2020	**0.04**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.003**	J	
		VMP-44-20-072820	7/28/2020	**0.0083**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	30 ft	VMP-44-30-020415	2/4/2015	**0.0048**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.002**	J	
		VMP-44-30-051115	5/11/2015	**0.018**	J		**0.0012**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0044**	J	
		VMP-44-30-072415	7/24/2015	**0.04**			**0.0029**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0045**	J	
		VMP-44-30-102815	10/28/2015	**0.032**	J		**0.00079**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.011**	J	
		VMP-44-30-012516	1/25/2016	**0.026**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.005**	J	
		VMP-44-30-050516	5/5/2016	**0.01**	J		<0.0056	U		<0.012	U		<0.018	U		<0.068	U		<0.0038	U		<0.016	U		<0.02	U	
		VMP-44-30-072716	7/27/2016	**0.054**			**0.00094**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		**0.01**	J	
		VMP-44-30-102716	10/27/2016	**0.027**	J		**0.001**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0048	J		**0.006**	J	
		VMP-44-30-012417	1/24/2017	**0.0065**	J		<0.0044	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-44-30-012417-Dup	1/24/2017	**0.014**	J		<0.0041	J	U	<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-44-30-042517	4/25/2017	<0.032	J	U	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0041**	J	
		VMP-44-30-072517	7/25/2017	**0.0078**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-44-30-102517	10/25/2017	**0.019**	J		**0.00085**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0035**	J	
		VMP-44-30-102517-DUP	10/25/2017	**0.015**	J		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0038	J		<0.014	U	
		VMP-44-30-012518	1/25/2018	<0.027	J	U	**0.00094**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.01	J		<0.014	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.027	J	U	**0.00087**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.013			<0.013	U	
		VMP-44-30-052118	5/21/2018	**0.019**	J		**0.00061**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-44-30-071818	7/18/2018	**0.034**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0048**	J	
		VMP-44-30-102518	10/25/2018	**0.019**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0036**	J	
		VMP-44-30-012219	1/22/2019	**0.011**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-44-30-042919	4/29/2019	**0.016**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-44-30-072319	7/23/2019	**0.018**	J		**0.0011**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-44-30-102419	10/24/2019	**0.0099**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-44-30-012720	1/27/2020	**0.0091**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-44-30-012720-DUP	1/27/2020	**0.006**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-44-30-043020	4/30/2020	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-44-20-051115	5/11/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-44-20-072415	7/24/2015	**0.018**			<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	J	U	<0.027	U		<0.0067	U	
		VMP-44-20-102815	10/28/2015	**0.028**			<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0037**	J		<0.028	U		<0.007	U	
		VMP-44-20-020216-R	2/2/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-44-20-042816	4/28/2016	<0.02	U		<0.01	U		<0.0074	U		<0.014	U		<0.017	U		<0.0078	U		<0.033	U		<0.0083	U	
		VMP-44-20-072716	7/27/2016	<0.02	J	U	<0.01	U		<0.0075	U		<0.014	U		<0.017	U		**0.0039**	J		<0.034	ND,UJ	UJ	<0.0085	U	
		VMP-44-20-102716	10/27/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.013**			<0.027	U		<0.0068	U	
		VMP-44-20-012417	1/24/2017	<0.016	J	U	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-44-20-042517	4/25/2017	**0.004**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-44-20-072517	7/25/2017	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0032**	J		<0.027	U		<0.0067	U	
		VMP-44-20-102517	10/25/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-44-20-012518	1/25/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-44-20-042718	4/27/2018	**0.0032**	J		**0.0029**	J		<0.0056	U		<0.01	U		<0.013	U		**0.024**			**0.012**	J		<0.0063	U	
		VMP-44-20-071818	7/18/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-44-20-102518	10/25/2018	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-44-20-020419	2/4/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		**0.021**	J		<0.0063	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-44-20-042919	4/29/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-44-20-072319	7/23/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0028**	J		**0.0022**	J		<0.0062	ND,UJ	UJ
		VMP-44-20-102419	10/24/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0012**	J		<0.024	U		<0.006	U	
		VMP-44-20-012720	1/27/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U	UJ	<0.0074	U	
		VMP-44-20-043020	4/30/2020	**0.0037**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-44-20-072820	7/28/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0056**	J		<0.026	U		<0.0065	U	
	30 ft	VMP-44-30-020415	2/4/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-44-30-051115	5/11/2015	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-44-30-072415	7/24/2015	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	J	U	**0.0022**	J	J	<0.0064	U	
		VMP-44-30-102815	10/28/2015	<0.019	J	U	<0.0095	U		<0.007	U		<0.013	U		<0.016	U		**0.0036**	J		<0.031	U		<0.0078	U	
		VMP-44-30-012516	1/25/2016	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-44-30-050516	5/5/2016	**0.0056**	J		<0.011	U		<0.008	U		<0.015	U		<0.018	U		<0.0085	U		<0.036	ND,UJ	UJ	<0.009	U	
		VMP-44-30-072716	7/27/2016	<0.019	J	U	<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		**0.0038**	J		**0.0016**	J	J	<0.0079	U	
		VMP-44-30-102716	10/27/2016	**0.0031**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0081**			<0.026	U		<0.0064	U	
		VMP-44-30-012417	1/24/2017	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-44-30-012417-Dup	1/24/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-44-30-042517	4/25/2017	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-44-30-072517	7/25/2017	**0.0032**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0036**	J		<0.026	U		<0.0065	U	
		VMP-44-30-102517	10/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-44-30-102517-DUP	10/25/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-44-30-012518	1/25/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-44-30-052118	5/21/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-44-30-071818	7/18/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-44-30-102518	10/25/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-44-30-012219	1/22/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-44-30-042919	4/29/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-44-30-072319	7/23/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.002**	J		<0.024	U		<0.006	ND,UJ	UJ
		VMP-44-30-102419	10/24/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0011**	J		<0.023	U		<0.0057	U	
		VMP-44-30-012720	1/27/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U	UJ	<0.0062	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U	UJ	<0.0063	U	
		VMP-44-30-043020	4/30/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-44-20-051115	5/11/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-44-20-072415	7/24/2015	**0.00068**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-44-20-102815	10/28/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0028**	J		<0.0054	U		<0.0054	U	
		VMP-44-20-020216-R	2/2/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0021**	J		<0.0055	U		<0.0055	U	
		VMP-44-20-042816	4/28/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		**0.0022**	J		<0.0065	U		<0.0065	U	
		VMP-44-20-072716	7/27/2016	<0.0056	U		<0.012	U		<0.0098	U		<0.0098	U		<0.0098	U		<0.0081	U		<0.0066	U		<0.0066	U	
		VMP-44-20-102716	10/27/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0029**	J		<0.0053	U		<0.0053	U	
		VMP-44-20-012417	1/24/2017	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-44-20-042517	4/25/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-44-20-072517	7/25/2017	**0.0015**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0018**	J		<0.0052	U		<0.0052	U	
		VMP-44-20-102517	10/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-44-20-012518	1/25/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-44-20-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0036**	J		<0.0049	U		<0.0049	U	
		VMP-44-20-071818	7/18/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-44-20-102518	10/25/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-44-20-020419	2/4/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-44-20-042919	4/29/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-44-20-072319	7/23/2019	**0.00074**	J		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-44-20-102419	10/24/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-44-20-012720	1/27/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-44-20-043020	4/30/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-44-20-072820	7/28/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
	30 ft	VMP-44-30-020415	2/4/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-44-30-051115	5/11/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-44-30-072415	7/24/2015	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-44-30-102815	10/28/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0027**	J		<0.0061	U		<0.0061	U	
		VMP-44-30-012516	1/25/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-44-30-050516	5/5/2016	<0.006	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		<0.0086	U		<0.007	U		<0.007	U	
		VMP-44-30-072716	7/27/2016	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0025**	J		<0.0062	U		<0.0062	U	
		VMP-44-30-102716	10/27/2016	**0.0016**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-44-30-012417	1/24/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-44-30-012417-Dup	1/24/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-44-30-042517	4/25/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-44-30-072517	7/25/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-44-30-102517	10/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-44-30-102517-DUP	10/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-44-30-012518	1/25/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-44-30-052118	5/21/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-44-30-071818	7/18/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-44-30-102518	10/25/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-44-30-012219	1/22/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0028**	J		<0.0043	U		<0.0043	U	
		VMP-44-30-042919	4/29/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0032**	J		<0.0049	U		<0.0049	U	
		VMP-44-30-072319	7/23/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-44-30-102419	10/24/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0018**	J		<0.0044	U		<0.0044	U	
		VMP-44-30-012720	1/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.006	U		<0.005	U		<0.005	U	
		VMP-44-30-043020	4/30/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-44-20-051115	5/11/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-44-20-072415	7/24/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-44-20-102815	10/28/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	J	U	<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-44-20-020216-R	2/2/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-44-20-042816	4/28/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.056	U		<0.0074	U		<0.0073	U		<0.0073	U		<0.023	U	
		VMP-44-20-072716	7/27/2016	<0.0065	U		<0.0065	U		<0.0065	U		**0.0038**	J		<0.0076	U		<0.0074	U		<0.0074	U		<0.024	U	
		VMP-44-20-102716	10/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-44-20-012417	1/24/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-44-20-042517	4/25/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-44-20-072517	7/25/2017	<0.0051	U		<0.0051	U		<0.0051	U		**0.0029**	J		<0.006	ND,UJ	UJ	<0.0059	U		<0.0059	U		<0.019	U	
		VMP-44-20-102517	10/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-20-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-44-20-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0025**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-44-20-071818	7/18/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-20-102518	10/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-44-20-020419	2/4/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		**0.0046**	J	
		VMP-44-20-042919	4/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-44-20-072319	7/23/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		**0.0028**	J	
		VMP-44-20-102419	10/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-44-20-012720	1/27/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-44-20-043020	4/30/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-44-20-072820	7/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	30 ft	VMP-44-30-020415	2/4/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-44-30-051115	5/11/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-44-30-072415	7/24/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	J	U	<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-44-30-102815	10/28/2015	<0.006	U		<0.006	U		<0.006	U		**0.0052**	J		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-44-30-012516	1/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-44-30-050516	5/5/2016	<0.0069	U		<0.0069	U		<0.0069	U		**0.0021**	J		<0.008	U		<0.0079	U		<0.0079	U		<0.025	U	
		VMP-44-30-072716	7/27/2016	<0.0061	U		0.0013	J		<0.0061	U		**0.0035**	J		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-44-30-102716	10/27/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.0068**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-44-30-012417	1/24/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-44-30-012417-Dup	1/24/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-44-30-042517	4/25/2017	<0.0053	U		<0.0053	U		<0.0053	U		**0.0024**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-44-30-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		**0.0022**	J		<0.0058	ND,UJ	UJ	<0.0057	U		<0.0057	U		<0.018	U	
		VMP-44-30-102517	10/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-30-102517-DUP	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-44-30-012518	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-44-30-052118	5/21/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-44-30-071818	7/18/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-44-30-102518	10/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-30-012219	1/22/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-44-30-042919	4/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-44-30-072319	7/23/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-44-30-102419	10/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-44-30-012720	1/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-44-30-043020	4/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-44-20-051115	5/11/2015	0.0062	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-20-072415	7/24/2015	0.024		J	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-44-20-102815	10/28/2015	0.014			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-44-20-020216-R	2/2/2016	0.0074	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		**0.004**	J		<0.058	U		**0.002**	J	
		VMP-44-20-042816	4/28/2016	0.011	J		<0.0069	U		<0.0079	U		<0.012	U		<0.011	U		**0.0072**			<0.068	U		**0.0025**	J	
		VMP-44-20-072716	7/27/2016	0.015			**0.0025**	J		<0.008	U		<0.012	U		<0.011	U		**0.0022**	J		<0.07	U		**0.0014**	J	
		VMP-44-20-102716	10/27/2016	0.0095	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-44-20-012417	1/24/2017	0.0092	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-44-20-042517	4/25/2017	0.0037	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-44-20-072517	7/25/2017	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-44-20-102517	10/25/2017	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-44-20-012518	1/25/2018	0.0057	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0024**	J	
		VMP-44-20-042718	4/27/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-20-071818	7/18/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-44-20-102518	10/25/2018	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-44-20-020419	2/4/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-44-20-042919	4/29/2019	0.017			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-44-20-072319	7/23/2019	0.0057	J		**0.0012**	J		<0.0058	U		<0.0091	U		<0.0083	U		**0.0013**	J		<0.051	U		<0.0042	U	
		VMP-44-20-102419	10/24/2019	<0.0088	U	UJ	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-44-20-012720	1/27/2020	0.012	J0	J	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-44-20-043020	4/30/2020	0.0048	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-44-20-072820	7/28/2020	0.0028	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	30 ft	VMP-44-30-020415	2/4/2015	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-44-30-051115	5/11/2015	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		**0.0021**	J	
		VMP-44-30-072415	7/24/2015	0.013		J	**0.0019**	J		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-44-30-102815	10/28/2015	0.013			<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		<0.0053	U	
		VMP-44-30-012516	1/25/2016	0.01			<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		**0.0014**	J	
		VMP-44-30-050516	5/5/2016	<0.013	U		<0.0076	U		<0.0086	U		<0.013	U		<0.012	U		<0.0071	U		<0.074	U		<0.0061	U	
		VMP-44-30-072716	7/27/2016	<0.012	U		<0.0067	U		<0.0075	U		<0.012	U		<0.011	U		<0.0063	U		<0.065	U		<0.0054	U	
		VMP-44-30-102716	10/27/2016	0.014			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-44-30-012417	1/24/2017	0.015			<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		**0.0011**	J	
		VMP-44-30-012417-Dup	1/24/2017	0.01			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.0011**	J	
		VMP-44-30-042517	4/25/2017	0.0041	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-44-30-072517	7/25/2017	0.014			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-44-30-102517	10/25/2017	0.0094			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-44-30-102517-DUP	10/25/2017	0.0072	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0049**		
		VMP-44-30-012518	1/25/2018	0.0068	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0015**	J		<0.049	U		**0.0042**		
		VMP-44-30-012518-DUP	1/25/2018	0.0051	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		**0.0019**	J		<0.049	U		**0.0048**		
		VMP-44-30-052118	5/21/2018	0.0026	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		**0.0018**	J	
		VMP-44-30-071818	7/18/2018	0.0078	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0024**	J		<0.053	U		<0.0044	U	
		VMP-44-30-102518	10/25/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-44-30-012219	1/22/2019	<0.008	U		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-44-30-042919	4/29/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-30-072319	7/23/2019	0.011			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.00097**	J	
		VMP-44-30-102419	10/24/2019	<0.0083	U	UJ	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-44-30-012720	1/27/2020	<0.009	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.0092	ND,UJ	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-44-30-043020	4/30/2020	0.0054	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.004**	J		<0.0062	U	
		VMP-44-20-051115	5/11/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0058**	J		<0.006	U	
		VMP-44-20-072415	7/24/2015	**0.0018**	J	J	0.0088	J	J	<0.0063	U		<0.0053	U		<0.0046	U					**0.01**	J	J	<0.0063	U	
		VMP-44-20-102815	10/28/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.007**	J		<0.0066	U	
		VMP-44-20-020216-R	2/2/2016	<0.022	U		<0.016	U		**0.0012**	J		<0.0056	U		<0.0049	U					**0.016**			**0.0025**	J	
		VMP-44-20-042816	4/28/2016	<0.026	U		<0.019	U		<0.0079	U		<0.0066	U		<0.0058	U					**0.019**			<0.0079	U	
		VMP-44-20-072716	7/27/2016	<0.027	U		<0.019	U		<0.008	U		<0.0067	U		<0.024	U					**0.0084**	J		<0.008	U	
		VMP-44-20-102716	10/27/2016	<0.022	U		0.012	J		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.023**			<0.0065	U	
		VMP-44-20-012417	1/24/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.013**			<0.0064	U	
		VMP-44-20-042517	4/25/2017	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-44-20-072517	7/25/2017	<0.021	U		0.011	J		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-44-20-102517	10/25/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-44-20-012518	1/25/2018	<0.018	U		0.0099	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0041**	J		<0.0056	U	
		VMP-44-20-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-44-20-071818	7/18/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.003**	J		<0.0058	U	
		VMP-44-20-102518	10/25/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-44-20-020419	2/4/2019	<0.02	U		0.0056	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.021	U		0.0049	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0021**	J		<0.0062	U	
		VMP-44-20-042919	4/29/2019	<0.02	U		0.0048	J		<0.0059	U		<0.0049	ND,UJ	UJ	<0.017	U					<0.012	U		<0.0059	U	
		VMP-44-20-072319	7/23/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0054**	J		<0.0058	U	
		VMP-44-20-102419	10/24/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-44-20-012720	1/27/2020	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.021	U					**0.047**			<0.007	U	
		VMP-44-20-043020	4/30/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0088**	J		**0.0011**	J	
		VMP-44-20-072820	7/28/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0066**	J		**0.00093**	J	
	30 ft	VMP-44-30-020415	2/4/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.0047	U					**0.0041**	J		<0.0064	U	
		VMP-44-30-051115	5/11/2015	**0.00091**	J		0.003	J		<0.0062	U		**0.0011**	J		<0.0046	U					**0.0015**	J		<0.0062	U	
		VMP-44-30-072415	7/24/2015	**0.0014**	J	J	<0.015	J	U	<0.0061	U		<0.0051	U		<0.0045	U					**0.005**	J	J	<0.0061	U	
		VMP-44-30-102815	10/28/2015	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.0055	U					**0.0074**	J		<0.0074	U	
		VMP-44-30-012516	1/25/2016	<0.021	U		0.0028	J		<0.0063	U		<0.0052	U		<0.0046	U					**0.0044**	J		<0.0063	U	
		VMP-44-30-050516	5/5/2016	<0.028	U		<0.02	U		<0.0086	U		<0.0071	U		<0.0063	U					**0.0022**	J		<0.0086	U	
		VMP-44-30-072716	7/27/2016	**0.0019**	J		<0.018	U		<0.0075	U		<0.0063	U		<0.022	U					**0.0066**	J		<0.0075	U	
		VMP-44-30-102716	10/27/2016	<0.02	U		0.031			<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.064**			<0.0061	U	
		VMP-44-30-012417	1/24/2017	<0.022	U		0.0027	J		<0.0067	U		<0.0056	U		<0.02	U					**0.033**			<0.0067	U	
		VMP-44-30-012417-Dup	1/24/2017	<0.021	U		0.0023	J		<0.0063	U		<0.0053	U		<0.018	U					**0.016**			<0.0063	U	
		VMP-44-30-042517	4/25/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-44-30-072517	7/25/2017	<0.021	U		0.0029	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-44-30-102517	10/25/2017	<0.019	U		0.0046	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-44-30-102517-DUP	10/25/2017	<0.019	U		0.0092	J		<0.0057	U		<0.0048	U		<0.017	U					**0.012**			<0.0057	U	
		VMP-44-30-012518	1/25/2018	<0.019	U		0.012	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0017**	J		<0.0056	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.019	U		0.01	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0019**	J		<0.0056	U	
		VMP-44-30-052118	5/21/2018	<0.02	U		0.0041	J		<0.006	U		<0.005	U		<0.018	U					**0.0026**	J		<0.006	U	
		VMP-44-30-071818	7/18/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.003**	J		<0.0061	U	
		VMP-44-30-102518	10/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.016**			<0.0059	U	
		VMP-44-30-012219	1/22/2019	<0.017	U		0.018			<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		**0.00074**	J	
		VMP-44-30-042919	4/29/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	ND,UJ	UJ	<0.018	U					<0.012	U		<0.006	U	
		VMP-44-30-072319	7/23/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0027**	J		<0.0057	U	
		VMP-44-30-102419	10/24/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-44-30-012720	1/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-44-30-043020	4/30/2020	<0.021	U		0.0029	J		<0.0062	U		<0.0052	U		<0.018	U					**0.011**	J		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-44-20-051115	5/11/2015	<0.0052	U		<0.0083	U		**0.0037**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-20-072415	7/24/2015	<0.0055	U		<0.0088	U		**0.0024**	J		<0.0038	U		**0.003**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-44-20-102815	10/28/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0012**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-44-20-020216-R	2/2/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-44-20-042816	4/28/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		**0.001**	J		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-44-20-072716	7/27/2016	<0.007	U		<0.011	U		<0.011	U		<0.0048	U		**0.0078**			<0.048	U		<0.0089	U		<0.0089	U	
		VMP-44-20-102716	10/27/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0025**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-44-20-012417	1/24/2017	**0.0035**	J		<0.0089	U		<0.0088	U		<0.0038	U		**0.00072**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-44-20-042517	4/25/2017	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00076**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-44-20-072517	7/25/2017	<0.0055	U		<0.0089	ND,UJ	UJ	<0.0088	U		<0.0038	U		**0.0032**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-44-20-102517	10/25/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-44-20-012518	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.00068**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-44-20-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-20-071818	7/18/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-44-20-102518	10/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-44-20-020419	2/4/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-44-20-042919	4/29/2019	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	ND,UJ	UJ	<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-20-072319	7/23/2019	<0.0051	U		<0.0082	U		**0.0079**	J		**0.0016**	J		**0.0084**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-44-20-102419	10/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-44-20-012720	1/27/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-44-20-043020	4/30/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-44-20-072820	7/28/2020	<0.0086	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
	30 ft	VMP-44-30-020415	2/4/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.00087**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-44-30-051115	5/11/2015	<0.0054	U		<0.0087	U		**0.0032**	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-44-30-072415	7/24/2015	<0.0053	U		<0.0085	U		**0.0012**	J		<0.0036	U		**0.0039**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-44-30-102815	10/28/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-44-30-012516	1/25/2016	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-44-30-050516	5/5/2016	<0.0074	U		<0.012	U		<0.012	U		<0.0051	U		<0.0066	U		<0.052	U		<0.0095	U		<0.0095	U	
		VMP-44-30-072716	7/27/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.00083**	J		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-44-30-102716	10/27/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0056**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-44-30-012417	1/24/2017	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-44-30-012417-Dup	1/24/2017	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.00087**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-44-30-042517	4/25/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.00075**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-44-30-072517	7/25/2017	<0.0054	U		<0.0086	ND,UJ	UJ	<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-44-30-102517	10/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00044**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-44-30-102517-DUP	10/25/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00082**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-44-30-012518	1/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.00085**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.0011**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-44-30-052118	5/21/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0025**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-30-071818	7/18/2018	<0.0053	U		<0.0085	U		**0.0074**	J		<0.0036	U		**0.0013**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-44-30-102518	10/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-44-30-012219	1/22/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-44-30-042919	4/29/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	ND,UJ	UJ	**0.0033**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-44-30-072319	7/23/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0028**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-44-30-102419	10/24/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-44-30-012720	1/27/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.0052	U		<0.0084	U		**0.0083**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-44-30-043020	4/30/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-44	20 ft	VMP-44-20-020415	2/4/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-20-051115	5/11/2015	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-44-20-072415	7/24/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.00048	J		<0.0033	U		0.0013	J		<0.0056	U	
		VMP-44-20-102815	10/28/2015	<0.0072	U		<0.0076	J	U	<0.0066	U		<0.0066	U		0.013			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-44-20-020216-R	2/2/2016	<0.0074	U		0.0013	J		<0.0067	U		<0.0067	U		0.007			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-44-20-042816	4/28/2016	<0.0086	U		<0.009	U		<0.0079	U		<0.0079	U		0.0016	J		<0.0041	U		<0.0069	U		<0.0069	U	
		VMP-44-20-072716	7/27/2016	<0.0088	U		<0.0092	U		<0.008	U		<0.008	U		0.0034	J		<0.0042	U		0.005	J		**0.0015**	J	
		VMP-44-20-102716	10/27/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0011	J		<0.0034	U		0.0012	J		<0.0057	U	
		VMP-44-20-012417	1/24/2017	<0.007	U		0.0019	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		0.0011	J		<0.0056	U	
		VMP-44-20-042517	4/25/2017	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.00072	J		<0.0034	U		0.0016	J		<0.0057	U	
		VMP-44-20-072517	7/25/2017	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-44-20-102517	10/25/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		0.001	J		<0.0052	U	
		VMP-44-20-012518	1/25/2018	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		0.0026	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-44-20-042718	4/27/2018	<0.0065	U		0.0015	J		**0.00069**	J		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-20-071818	7/18/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-44-20-102518	10/25/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-44-20-020419	2/4/2019	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.0023	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-20-020419-DUP	2/4/2019	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		0.0028	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-20-042919	4/29/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-20-072319	7/23/2019	**0.0016**	J		0.0013	J		**0.072**			**0.062**			0.004	J		<0.003	U		0.016			**0.026**		
		VMP-44-20-102419	10/24/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0014	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-44-20-012720	1/27/2020	<0.0077	U		<0.0081	U		<0.007	U		<0.007	U		<0.0067	U		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-44-20-043020	4/30/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-44-20-072820	7/28/2020	<0.0068	U		0.0011	J		<0.0062	U		<0.0062	U		0.00056	J		<0.0032	U		<0.0055	U		<0.0055	U	
	30 ft	VMP-44-30-020415	2/4/2015	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0052	J		<0.0033	U		0.00078	J		<0.0056	U	
		VMP-44-30-051115	5/11/2015	**0.0022**	J		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-30-072415	7/24/2015	<0.0067	U		<0.007	U		**0.0023**	J		<0.0061	U		0.0011	J		<0.0032	U		0.0043	J		**0.002**	J	
		VMP-44-30-102815	10/28/2015	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-44-30-012516	1/25/2016	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		0.002	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-30-050516	5/5/2016	<0.0094	U		<0.0098	U		<0.0086	U		<0.0086	U		<0.0081	U		<0.0044	U		<0.0076	U		<0.0076	U	
		VMP-44-30-072716	7/27/2016	**0.0027**	J		<0.0086	U		<0.0075	U		<0.0075	U		<0.0072	U		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-44-30-102716	10/27/2016	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	J	U	<0.0032	U		0.0013	J		<0.0054	U	
		VMP-44-30-012417	1/24/2017	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-44-30-012417-Dup	1/24/2017	<0.0069	U		0.0017	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-44-30-042517	4/25/2017	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0015	J		<0.0034	U		0.0012	J		<0.0058	U	
		VMP-44-30-072517	7/25/2017	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-44-30-102517	10/25/2017	<0.0064	U		0.00097	J		**0.0021**	J		<0.0058	U		0.0039	J		<0.003	U		0.0021	J		**0.0015**	J	
		VMP-44-30-102517-DUP	10/25/2017	<0.0063	U		0.0011	J		<0.0057	U		<0.0057	U		0.011			<0.003	U		<0.005	U		<0.005	U	
		VMP-44-30-012518	1/25/2018	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		0.005			<0.0029	U		<0.005	U		<0.005	U	
		VMP-44-30-012518-DUP	1/25/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0048	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-44-30-052118	5/21/2018	**0.0016**	J		<0.0068	U		<0.006	U		<0.006	U		0.0014	J		<0.0031	U		0.0017	J		<0.0053	U	
		VMP-44-30-071818	7/18/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-44-30-102518	10/25/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-30-012219	1/22/2019	<0.0057	U		0.0012	J		<0.0052	U		<0.0052	U		0.029			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-44-30-042919	4/29/2019	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-44-30-072319	7/23/2019	<0.0063	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0012	J		<0.005	U	
		VMP-44-30-102419	10/24/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-44-30-012720	1/27/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.0026	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-44-30-012720-DUP	1/27/2020	<0.0066	U		<0.0069	U		<0.006	J	U	<0.006	U		0.0027	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-44-30-043020	4/30/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	**0.0078**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-45-10-051215	5/12/2015	**0.058**			<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.02			**0.0067**	J	
		VMP-45-10-072115	7/21/2015	**0.032**			**0.021**			<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.051			**0.0072**	J	
		VMP-45-10-102815	10/28/2015	<0.033	J	U	<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-45-10-030916-R	3/9/2016	<0.032	J	U	<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-45-10-042816	4/28/2016	**0.013**	J		**0.0024**	J		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.004**	J	
		VMP-45-10-082616	8/26/2016	**0.083**			**0.0018**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.013			**0.0099**	J	
		VMP-45-10-102816	10/28/2016	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-10-020117	2/1/2017	**0.021**	J		**0.00073**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0047**	J	
		VMP-45-10-042617	4/26/2017	<0.029	J	U	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-45-10-072517	7/25/2017	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0037**	J	
		VMP-45-10-103117	10/31/2017	<0.026	J	U	<0.0035	J	U	<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-45-10-012418	1/24/2018	**0.011**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-45-10-041818	4/18/2018	**0.013**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0019**	J	
		VMP-45-10-071918	7/19/2018	**0.8**			**0.022**			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.032**		
		VMP-45-10-102518	10/25/2018	**0.013**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-45-10-012219	1/22/2019	**0.0093**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-45-10-042519	4/25/2019	**0.027**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.003**	J	
		VMP-45-10-080119	8/1/2019	**0.018**	J		**0.0016**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-10-111519R	11/15/2019	**0.0091**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-45-10-012720	1/27/2020	<0.03	U		**0.0014**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-10-042720	4/27/2020	**0.0097**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-45-10-072820	7/28/2020	**0.011**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0019	J		<0.016	U	
		VMP-45-10-110520	11/5/2020	**0.013**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0016**	J	
		VMP-45-10-012621	1/26/2021	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	20 ft	VMP-45-20-020615	2/6/2015	**0.0047**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-20-042915	4/29/2015	**0.011**	J		**0.0028**	J		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.006**	J	
		VMP-45-20-072115	7/21/2015	**0.033**	J		**0.0016**	J		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		**0.0072**	J	
		VMP-45-20-102815	10/28/2015	**0.026**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.006**	J	
		VMP-45-20-012516	1/25/2016	**0.017**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0034**	J	
		VMP-45-20-042816	4/28/2016	**0.013**	J		**0.0021**	J		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		**0.009**	J	
		VMP-45-20-072716	7/27/2016	**0.021**	J		**0.00093**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0041**	J	
		VMP-45-20-102816	10/28/2016	**0.011**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-45-20-012317	1/23/2017	**0.0079**	J		<0.004	J	U	<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-20-042617	4/26/2017	**0.018**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-45-20-072517	7/25/2017	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-20-103117	10/31/2017	<0.026	J	U	<0.0035	J	U	<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-45-20-012418	1/24/2018	<0.026	J	U	**0.00034**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-45-20-041818	4/18/2018	**0.0094**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0023**	J	
		VMP-45-20-071918	7/19/2018	**0.018**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-45-20-102518	10/25/2018	**0.018**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.016			**0.005**	J	
		VMP-45-20-012219	1/22/2019	**0.018**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		0.016			**0.0025**	J	
		VMP-45-20-042519	4/25/2019	**0.0087**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-45-20-080119	8/1/2019	**0.045**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.012**	J	
		VMP-45-20-102419	10/24/2019	<0.027	U		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0098	J		<0.014	U	
		VMP-45-20-012720	1/27/2020	**0.0067**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-45-20-042720	4/27/2020	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-20-072820	7/28/2020	**0.016**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0022**	J	
		VMP-45-20-110520	11/5/2020	**0.033**			**0.0011**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0058	J		**0.0022**	J	
		VMP-45-20-012621	1/26/2021	**0.0037**	J		<0.0039	U		<0.0081	U		**0.0015**	J		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-45-10-051215	5/12/2015	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-45-10-072115	7/21/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-45-10-102815	10/28/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-45-10-030916-R	3/9/2016	<0.016	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-45-10-042816	4/28/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-45-10-082616	8/26/2016	**0.0038**	J		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-45-10-102816	10/28/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-45-10-020117	2/1/2017	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	ND,UJ	UJ	<0.0058	U	
		VMP-45-10-042617	4/26/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-45-10-072517	7/25/2017	**0.0026**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-45-10-103117	10/31/2017	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-45-10-012418	1/24/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-45-10-041818	4/18/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-45-10-071918	7/19/2018	**0.034**			<0.0078	U		**0.001**	J		<0.01	U		<0.013	U		**0.0021**	J		**0.0047**	J		<0.0064	U	
		VMP-45-10-102518	10/25/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0021**	J		<0.025	U		<0.0062	U	
		VMP-45-10-012219	1/22/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-45-10-042519	4/25/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-45-10-080119	8/1/2019	**0.0051**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0014**	J		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-45-10-111519R	11/15/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-45-10-012720	1/27/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U	UJ	<0.0065	U	
		VMP-45-10-042720	4/27/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-45-10-072820	7/28/2020	**0.0077**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-45-10-110520	11/5/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-45-10-012621	1/26/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
	20 ft	VMP-45-20-020615	2/6/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-45-20-042915	4/29/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-45-20-072115	7/21/2015	<0.02	J	U	<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0078	U		<0.033	U		<0.0082	U	
		VMP-45-20-102815	10/28/2015	**0.012**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-45-20-012516	1/25/2016	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-45-20-042816	4/28/2016	**0.0019**	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-45-20-072716	7/27/2016	<0.019	U		<0.0098	U		<0.0071	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-45-20-102816	10/28/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-45-20-012317	1/23/2017	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-45-20-042617	4/26/2017	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-45-20-072517	7/25/2017	**0.0022**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-45-20-103117	10/31/2017	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-45-20-012418	1/24/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-45-20-041818	4/18/2018	<0.014	J	U	**0.00049**	J		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-45-20-071918	7/19/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-45-20-102518	10/25/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-45-20-012219	1/22/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-45-20-042519	4/25/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-45-20-080119	8/1/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	ND,UJ	UJ
		VMP-45-20-102419	10/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-45-20-012720	1/27/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U	UJ	<0.0064	U	
		VMP-45-20-042720	4/27/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-45-20-072820	7/28/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-45-20-110520	11/5/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.00042**	J		<0.026	U		<0.0064	U	
		VMP-45-20-012621	1/26/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-45-10-051215	5/12/2015	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-45-10-072115	7/21/2015	**0.0043**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	J	U	<0.0054	U		<0.0054	U	
		VMP-45-10-102815	10/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-45-10-030916-R	3/9/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-45-10-042816	4/28/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.002**	J		<0.006	U		<0.006	U	
		VMP-45-10-082616	8/26/2016	**0.0014**	J		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-45-10-102816	10/28/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-45-10-020117	2/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-45-10-042617	4/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-45-10-072517	7/25/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-45-10-103117	10/31/2017	**0.00057**	J		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-45-10-012418	1/24/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0033**	J		<0.0044	U		<0.0044	U	
		VMP-45-10-041818	4/18/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0047	U		<0.0047	U	
		VMP-45-10-071918	7/19/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0062**			<0.005	U		<0.005	U	
		VMP-45-10-102518	10/25/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-45-10-012219	1/22/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-45-10-042519	4/25/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-45-10-080119	8/1/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-45-10-111519R	11/15/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-45-10-012720	1/27/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0035**	J		<0.005	U		<0.005	U	
		VMP-45-10-042720	4/27/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-45-10-072820	7/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.002**	J		<0.0055	U		<0.0055	U	
		VMP-45-10-110520	11/5/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-45-10-012621	1/26/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
	20 ft	VMP-45-20-020615	2/6/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-45-20-042915	4/29/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0021**	J		<0.006	U		<0.006	U	
		VMP-45-20-072115	7/21/2015	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		<0.0079	J	U	<0.0064	U		<0.0064	U	
		VMP-45-20-102815	10/28/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-45-20-012516	1/25/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-45-20-042816	4/28/2016	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-45-20-072716	7/27/2016	<0.0053	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0027**	J		<0.0063	U		<0.0063	U	
		VMP-45-20-102816	10/28/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-45-20-012317	1/23/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-45-20-042617	4/26/2017	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-45-20-072517	7/25/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-45-20-103117	10/31/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0027**	J		<0.0044	U		<0.0044	U	
		VMP-45-20-012418	1/24/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0032**	J		<0.0044	U		<0.0044	U	
		VMP-45-20-041818	4/18/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-45-20-071918	7/19/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-45-20-102518	10/25/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-45-20-012219	1/22/2019	**0.001**	J		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0021**	J		<0.0044	U		<0.0044	U	
		VMP-45-20-042519	4/25/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-45-20-080119	8/1/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-45-20-102419	10/24/2019	**0.0035**	J		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0019**	J		<0.0046	U		<0.0046	U	
		VMP-45-20-012720	1/27/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-45-20-042720	4/27/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-45-20-072820	7/28/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0022**	J		<0.0055	U		<0.0055	U	
		VMP-45-20-110520	11/5/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-45-20-012621	1/26/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-45-10-051215	5/12/2015	<0.0051	U		<0.0051	U		<0.0051	U	UJ	<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-45-10-072115	7/21/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-45-10-102815	10/28/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.003**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-45-10-030916-R	3/9/2016	<0.0053	U		<0.0053	U		<0.0053	U		**0.004**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-45-10-042816	4/28/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-45-10-082616	8/26/2016	<0.0044	U		<0.0044	U		<0.0044	U		**0.002**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-45-10-102816	10/28/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-45-10-020117	2/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-45-10-042617	4/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0026**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-45-10-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	ND,UJ	UJ	<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-10-103117	10/31/2017	<0.0043	U		<0.0043	U		<0.0043	U		**0.0086**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-45-10-012418	1/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-45-10-041818	4/18/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-45-10-071918	7/19/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-10-102518	10/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-10-012219	1/22/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-10-042519	4/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-45-10-080119	8/1/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-10-111519R	11/15/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-10-012720	1/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-10-042720	4/27/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-45-10-072820	7/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		**0.0016**	J	
		VMP-45-10-110520	11/5/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-45-10-012621	1/26/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
	20 ft	VMP-45-20-020615	2/6/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-20-042915	4/29/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-45-20-072115	7/21/2015	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0074	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-45-20-102815	10/28/2015	<0.0048	U		<0.0048	U		<0.0048	U		**0.0037**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-45-20-012516	1/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-45-20-042816	4/28/2016	<0.0042	U		0.0008	J		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-45-20-072716	7/27/2016	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-45-20-102816	10/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-45-20-012317	1/23/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-20-042617	4/26/2017	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-45-20-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		**0.0034**	J		<0.0058	ND,UJ	UJ	<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-20-103117	10/31/2017	<0.0043	U		<0.0043	U		<0.0043	U		**0.0036**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-45-20-012418	1/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-45-20-041818	4/18/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-45-20-071918	7/19/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-20-102518	10/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-45-20-012219	1/22/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-45-20-042519	4/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-20-080119	8/1/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		**0.0094**	J	
		VMP-45-20-102419	10/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-45-20-012720	1/27/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-20-042720	4/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-20-072820	7/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-45-20-110520	11/5/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		**0.0009**	J		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-20-012621	1/26/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-45-10-051215	5/12/2015	0.0025	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0062**		
		VMP-45-10-072115	7/21/2015	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.0032**	J		<0.057	U		**0.01**		
		VMP-45-10-102815	10/28/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-45-10-030916-R	3/9/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-45-10-042816	4/28/2016	<0.011	J	U	**0.0089**			0.0013	J		<0.011	U		<0.01	U		**0.018**			<0.063	U		**0.024**		
		VMP-45-10-082616	8/26/2016	0.027			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		**0.0052**			<0.047	U		**0.0061**		
		VMP-45-10-102816	10/28/2016	0.0039	J	J	**0.00094**	J		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-45-10-020117	2/1/2017	<0.0084	U		**0.00095**	J		0.0039	J		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-45-10-042617	4/26/2017	<0.0091	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.002**	J		<0.051	U		**0.0015**	J	
		VMP-45-10-072517	7/25/2017	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-45-10-103117	10/31/2017	0.035			<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-45-10-012418	1/24/2018	0.0043	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-45-10-041818	4/18/2018	0.011			<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		**0.00079**	J		<0.049	U		**0.0016**	J	
		VMP-45-10-071918	7/19/2018	0.017			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.004**	J		<0.053	U		<0.0044	U	
		VMP-45-10-102518	10/25/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0022**	J	
		VMP-45-10-012219	1/22/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-45-10-042519	4/25/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-45-10-080119	8/1/2019	0.0043	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.0022**	J		<0.054	U		**0.0048**		
		VMP-45-10-111519R	11/15/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-45-10-012720	1/27/2020	<0.0094	ND,UJ	UJ	**0.0035**	J		<0.0061	U		<0.0096	U		<0.0087	U		**0.0048**	J		<0.053	U		**0.0088**		
		VMP-45-10-042720	4/27/2020	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-45-10-072820	7/28/2020	0.13			<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-45-10-110520	11/5/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-45-10-012621	1/26/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
	20 ft	VMP-45-20-020615	2/6/2015	0.0036	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-45-20-042915	4/29/2015	<0.011	U		**0.0032**	J		0.0034	J		<0.011	U		<0.01	U		**0.0022**	J		<0.063	U		**0.0065**		
		VMP-45-20-072115	7/21/2015	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		**0.0015**	J		<0.068	U		**0.0024**	J	
		VMP-45-20-102815	10/28/2015	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-45-20-012516	1/25/2016	0.0058	J		<0.0057	U		<0.0065	U		**0.0017**	J		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-45-20-042816	4/28/2016	0.031			**0.0024**	J		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		**0.0011**	J	
		VMP-45-20-072716	7/27/2016	<0.012	U		<0.0067	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-45-20-102816	10/28/2016	0.007	J	J	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-45-20-012317	1/23/2017	0.0064	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-45-20-042617	4/26/2017	0.011			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0015**	J	
		VMP-45-20-072517	7/25/2017	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-45-20-103117	10/31/2017	0.016			<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-45-20-012418	1/24/2018	0.0032	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		**0.0015**	J		<0.047	U		<0.0039	U	
		VMP-45-20-041818	4/18/2018	0.0046	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.00071**	J	
		VMP-45-20-071918	7/19/2018	<0.0093	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-45-20-102518	10/25/2018	0.0061	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-45-20-012219	1/22/2019	0.0078	J		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		**0.0038**		
		VMP-45-20-042519	4/25/2019	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-45-20-080119	8/1/2019	0.0048	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.00099**	J		<0.055	U		**0.0019**	J	
		VMP-45-20-102419	10/24/2019	<0.0086	U	UJ	<0.005	U		<0.0056	J	U	<0.0088	U		<0.008	U		**0.0029**	J		<0.049	U		**0.0045**		
		VMP-45-20-012720	1/27/2020	<0.0093	ND,UJ	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-45-20-042720	4/27/2020	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-45-20-072820	7/28/2020	0.0047	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-45-20-110520	11/5/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-45-20-012621	1/26/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
Remediation Objective				**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.0076**	J		<0.0066	U	
		VMP-45-10-051215	5/12/2015	<0.021	U		0.043			<0.0064	U		<0.0053	U		<0.0047	U					**0.0042**	J		<0.0064	U	
		VMP-45-10-072115	7/21/2015	**0.0018**	J	J	0.081			<0.0066	U		<0.0055	U		<0.0048	U					**0.011**	J		<0.0066	U	
		VMP-45-10-102815	10/28/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					**0.0046**	J		<0.0068	U	
		VMP-45-10-030916-R	3/9/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0026**	J		<0.0065	U	
		VMP-45-10-042816	4/28/2016	<0.024	ND,UJ	UJ	0.0081	J		<0.0073	U		<0.0061	U		<0.0054	U					**0.0018**	J		<0.0073	U	
		VMP-45-10-082616	8/26/2016	**0.0017**	J		0.038			<0.0054	U		**0.0013**	J		<0.016	U					**0.06**			<0.0054	U	
		VMP-45-10-102816	10/28/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U		<0.014	U		**0.02**			<0.0063	U	
		VMP-45-10-020117	2/1/2017	<0.018	U		<0.013	U		**0.0036**	J		<0.0046	U		<0.016	U					**0.0018**	J		**0.01**		
		VMP-45-10-042617	4/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0021**	J		<0.0059	U	
		VMP-45-10-072517	7/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-45-10-103117	10/31/2017	<0.018	U		0.017			<0.0054	U		<0.0045	U		<0.016	U					**0.0057**	J		<0.0054	U	
		VMP-45-10-012418	1/24/2018	<0.018	U		0.004	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0031**	J		<0.0053	U	
		VMP-45-10-041818	4/18/2018	<0.019	U		0.0028	J		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		**0.00064**	J	
		VMP-45-10-071918	7/19/2018	<0.02	U		<0.014	U		<0.0061	U		**0.0041**	J		<0.018	U					**0.092**			<0.0061	U	
		VMP-45-10-102518	10/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-45-10-012219	1/22/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-45-10-042519	4/25/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0042**	J		<0.006	U	
		VMP-45-10-080119	8/1/2019	<0.021	ND,UJ	UJ	0.006	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-45-10-111519R	11/15/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0038**	J		<0.0061	U	
		VMP-45-10-012720	1/27/2020	<0.02	U		0.0038	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-45-10-042720	4/27/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0055**	J		<0.0065	U	
		VMP-45-10-072820	7/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0049**	J		<0.0066	U	
		VMP-45-10-110520	11/5/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0073**	J		<0.0065	U	
		VMP-45-10-012621	1/26/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.012**			<0.0059	U	
	20 ft	VMP-45-20-020615	2/6/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					**0.006**	J		<0.0062	U	
		VMP-45-20-042915	4/29/2015	**0.0016**	J		0.0056	J		<0.0073	U		<0.0061	J	U	<0.0054	U					**0.011**	J		<0.0073	U	
		VMP-45-20-072115	7/21/2015	**0.0015**	J	J	<0.019	J	U	<0.0078	U		<0.0065	U		<0.0058	U					<0.016	J	U	<0.0078	U	
		VMP-45-20-102815	10/28/2015	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.0044	U					**0.0059**	J		<0.0059	U	
		VMP-45-20-012516	1/25/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	J	U	<0.0048	U					**0.0075**	J		<0.0065	U	
		VMP-45-20-042816	4/28/2016	**0.003**	J	J	0.0027	J		**0.00072**	J		**0.0047**			<0.0038	U					**0.018**			<0.0052	U	
		VMP-45-20-072716	7/27/2016	**0.0011**	J		<0.018	U		<0.0076	U		<0.0063	U		<0.022	U					**0.0026**	J		<0.0076	U	
		VMP-45-20-102816	10/28/2016	<0.022	U		0.0099	J		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.019**			<0.0066	U	
		VMP-45-20-012317	1/23/2017	<0.02	U		0.0028	J		<0.0061	U		<0.0051	U		<0.018	U					**0.013**			<0.0061	U	
		VMP-45-20-042617	4/26/2017	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.022**			<0.0066	U	
		VMP-45-20-072517	7/25/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-45-20-103117	10/31/2017	<0.018	U		0.011	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0026**	J		<0.0054	U	
		VMP-45-20-012418	1/24/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0012**	J		<0.0054	U	
		VMP-45-20-041818	4/18/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	J	U	<0.0057	U	
		VMP-45-20-071918	7/19/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0017**	J		<0.006	U	
		VMP-45-20-102518	10/25/2018	<0.019	U		0.017			<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-45-20-012219	1/22/2019	<0.018	U		0.017			<0.0054	U		<0.0045	U		<0.016	U					**0.0018**	J		<0.0054	U	
		VMP-45-20-042519	4/25/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-45-20-080119	8/1/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.003**	J		<0.0063	U	
		VMP-45-20-102419	10/24/2019	<0.019	U		0.013	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-45-20-012720	1/27/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-45-20-042720	4/27/2020	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.0036**	J		<0.0062	U	
		VMP-45-20-072820	7/28/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.008**	J		**0.00092**	J	
		VMP-45-20-110520	11/5/2020	<0.02	U		0.0035	J		<0.0061	U		**0.0013**	J		<0.018	U					**0.0094**	J		<0.0061	U	
		VMP-45-20-012621	1/26/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0027**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	J	U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-45-10-051215	5/12/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-45-10-072115	7/21/2015	<0.0057	U		<0.0092	U		**0.0022**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-45-10-102815	10/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-45-10-030916-R	3/9/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-45-10-042816	4/28/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U	U	**0.035**			<0.044	U		<0.0081	U		<0.0081	U	
		VMP-45-10-082616	8/26/2016	<0.0047	J	U	<0.0076	U		<0.0075	U		<0.0032	U		**0.011**			<0.033	U		<0.006	U		<0.006	U	
		VMP-45-10-102816	10/28/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0011**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-45-10-020117	2/1/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0018**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-45-10-042617	4/26/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-45-10-072517	7/25/2017	<0.0054	U		<0.0086	ND,UJ	UJ	<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-45-10-103117	10/31/2017	**0.00033**	J		<0.0075	U		<0.0074	U		<0.0032	U		**0.0077**			<0.032	U		<0.006	U		<0.006	U	
		VMP-45-10-012418	1/24/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0016**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-45-10-041818	4/18/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0012**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-45-10-071918	7/19/2018	<0.0053	U		<0.0085	U		<0.0084	U		**0.012**			**0.00089**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-45-10-102518	10/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-45-10-012219	1/22/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-45-10-042519	4/25/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0018**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-45-10-080119	8/1/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0017**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-45-10-111519R	11/15/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0032**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-10-012720	1/27/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.017**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-10-042720	4/27/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-45-10-072820	7/28/2020	<0.0092	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-45-10-110520	11/5/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-45-10-012621	1/26/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	20 ft	VMP-45-20-020615	2/6/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0069	U		<0.0069	U	
		VMP-45-20-042915	4/29/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.012**			<0.044	U		<0.0081	U		<0.0081	U	
		VMP-45-20-072115	7/21/2015	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		**0.0034**	J		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-45-20-102815	10/28/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-45-20-012516	1/25/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-45-20-042816	4/28/2016	**0.00047**	J		<0.0073	U		<0.0072	U		**0.0012**	J	J	**0.0041**			<0.032	U		<0.0058	U		<0.0058	U	
		VMP-45-20-072716	7/27/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-45-20-102816	10/28/2016	<0.0058	U		<0.0093	U		**0.0021**	J		<0.004	U		**0.01**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-45-20-012317	1/23/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-20-042617	4/26/2017	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-45-20-072517	7/25/2017	<0.0053	U		<0.0086	ND,UJ	UJ	<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-20-103117	10/31/2017	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.0042**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-45-20-012418	1/24/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-45-20-041818	4/18/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00031**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-45-20-071918	7/19/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-45-20-102518	10/25/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-45-20-012219	1/22/2019	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-45-20-042519	4/25/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-45-20-080119	8/1/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0032**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-45-20-102419	10/24/2019	<0.0049	U		<0.0079	U		**0.003**	J		<0.0034	U		**0.0013**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-45-20-012720	1/27/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-20-042720	4/27/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-20-072820	7/28/2020	<0.0093	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-45-20-110520	11/5/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00044**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-45-20-012621	1/26/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-45	10 ft	VMP-45-10-020615	2/6/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.0017	J		<0.0058	U	
		VMP-45-10-051215	5/12/2015	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0036	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-45-10-072115	7/21/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.1			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-45-10-102815	10/28/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-45-10-030916-R	3/9/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-45-10-042816	4/28/2016	<0.008	U		<0.0083	U		**0.00098**	J		<0.0073	U		0.051			<0.0038	U		0.018			**0.0062**	J	
		VMP-45-10-082616	8/26/2016	<0.0059	U		0.0019	J		<0.0054	U		<0.0054	U		0.0012	J		<0.0028	U		0.0022	J		**0.00096**	J	
		VMP-45-10-102816	10/28/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0029	J		<0.0056	U	
		VMP-45-10-020117	2/1/2017	<0.006	U		0.0012	J		**0.0091**			**0.0018**	J		0.26			<0.0029	U		0.0028	J		**0.0015**	J	
		VMP-45-10-042617	4/26/2017	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-45-10-072517	7/25/2017	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-45-10-103117	10/31/2017	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.003	J		<0.0028	U		0.00069	J		<0.0048	U	
		VMP-45-10-012418	1/24/2018	<0.0058	U		0.0015	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-45-10-041818	4/18/2018	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		0.0029	J		<0.003	U		0.00063	J		<0.005	U	
		VMP-45-10-071918	7/19/2018	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-45-10-102518	10/25/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.00092	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-45-10-012219	1/22/2019	<0.0063	U		0.0015	J		<0.0058	U		**0.0022**	J		0.03			<0.003	U		<0.0051	U		**0.0014**	J	
		VMP-45-10-042519	4/25/2019	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0023	J		<0.0053	U	
		VMP-45-10-080119	8/1/2019	<0.0068	U		0.00088	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0014	J		<0.0055	U	
		VMP-45-10-111519R	11/15/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0017	J		<0.0054	U	
		VMP-45-10-012720	1/27/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.01			<0.0032	U		0.015			**0.0044**	J	
		VMP-45-10-042720	4/27/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-45-10-072820	7/28/2020	<0.0072	U		0.0011	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-45-10-110520	11/5/2020	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-45-10-012621	1/26/2021	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
	20 ft	VMP-45-20-020615	2/6/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-45-20-042915	4/29/2015	<0.008	U		<0.0083	U		**0.0049**	J		<0.0073	U		0.0082			<0.0038	U		0.0073			**0.0034**	J	
		VMP-45-20-072115	7/21/2015	<0.0086	U		<0.009	U		<0.0078	U		<0.0078	U		0.0017	J		<0.0041	U		0.0013	J		<0.0069	U	
		VMP-45-20-102815	10/28/2015	<0.0065	U		<0.0068	J	U	<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-45-20-012516	1/25/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0011	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-45-20-042816	4/28/2016	<0.0057	U		0.0012	J		**0.0011**	J		<0.0052	U		0.00064	J		<0.0027	U		0.0031	J		**0.0014**	J	
		VMP-45-20-072716	7/27/2016	<0.0083	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0072	U		<0.004	U		<0.0067	U		<0.0067	U	
		VMP-45-20-102816	10/28/2016	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		0.00091	J		<0.0034	U		0.0018	J		<0.0059	U	
		VMP-45-20-012317	1/23/2017	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-45-20-042617	4/26/2017	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-45-20-072517	7/25/2017	<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-45-20-103117	10/31/2017	<0.0058	U		0.0011	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-45-20-012418	1/24/2018	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		0.0016	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-45-20-041818	4/18/2018	<0.0063	U		0.0015	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-45-20-071918	7/19/2018	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-45-20-102518	10/25/2018	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		0.031			<0.0029	U		<0.005	U		<0.005	U	
		VMP-45-20-012219	1/22/2019	<0.0058	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-45-20-042519	4/25/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-45-20-080119	8/1/2019	<0.0069	U		0.001	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-45-20-102419	10/24/2019	<0.0062	U		0.0011	J		<0.0056	U		<0.0056	J	U	0.0057			<0.0029	U		0.002	J		<0.005	U	
		VMP-45-20-012720	1/27/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-45-20-042720	4/27/2020	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-45-20-072820	7/28/2020	<0.0073	U		0.0009	J		<0.0067	U		<0.0067	U		0.00066	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-45-20-110520	11/5/2020	<0.0066	U		0.002	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.00041	J		<0.0054	U	
		VMP-45-20-012621	1/26/2021	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	**0.0095**	J		**0.0022**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0077	J		<0.016	U	
		VMP-45-30-020615-DUP	2/6/2015	**0.0081**	J		**0.0022**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0068	J		<0.015	U	
		VMP-45-30-042915	4/29/2015	**0.013**	J		**0.0019**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0026	J		**0.004**	J	
		VMP-45-30-072115	7/21/2015	**0.037**			**0.003**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0096**	J	
		VMP-45-30-072115-DUP	7/21/2015	**0.05**			**0.003**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0067**	J	
		VMP-45-30-102815	10/28/2015	**0.029**			<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.008**	J	
		VMP-45-30-012516	1/25/2016	**0.026**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0079	J		**0.0037**	J	
		VMP-45-30-042816	4/28/2016	**0.012**	J		**0.0027**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0038**	J	
		VMP-45-30-042816-DUP	4/28/2016	**0.014**	J		**0.00077**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0037**	J	
		VMP-45-30-072716	7/27/2016	**0.044**			**0.0019**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.011**	J	
		VMP-45-30-102816	10/28/2016	**0.021**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0048**	J	
		VMP-45-30-012317	1/23/2017	**0.018**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0021**	J	
		VMP-45-30-042617	4/26/2017	**0.015**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-45-30-042617-DUP	4/26/2017	**0.019**	J		**0.0046**			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0038**	J	
		VMP-45-30-072517	7/25/2017	**0.0063**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-30-103117	10/31/2017	**0.019**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0054**	J	
		VMP-45-30-012418	1/24/2018	<0.027	J	U	**0.00037**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-45-30-041818	4/18/2018	**0.015**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0054**	J	
		VMP-45-30-071918	7/19/2018	**0.12**			**0.00037**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0068**	J	
		VMP-45-30-102518	10/25/2018	**0.015**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0034**	J	
		VMP-45-30-012219	1/22/2019	**0.01**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-45-30-042519	4/25/2019	**0.024**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-45-30-052819R	5/28/2019	**0.035**			**0.0041**	J		**0.0033**	J		<0.014	U		<0.051	U		<0.0029	U		0.019			**0.0041**	J	
		VMP-45-30-080119	8/1/2019	**0.042**			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0036	J		**0.0035**	J	
		VMP-45-30-102419	10/24/2019	**0.007**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-45-30-102419-DUP	10/24/2019	**0.0062**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-45-30-012720	1/27/2020	**0.014**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		0.024			<0.016	U	
		VMP-45-30-042720	4/27/2020	**0.019**	J		**0.0009**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-45-30-072820	7/28/2020	**0.028**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.021			**0.0036**	J	
		VMP-45-30-110520	11/5/2020	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-45-30-012621	1/26/2021	**0.0043**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-45-30-020615-DUP	2/6/2015	**0.0022**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-45-30-042915	4/29/2015	<0.018	J	U	<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-45-30-072115	7/21/2015	<0.019	J	U	<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-45-30-072115-DUP	7/21/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-45-30-102815	10/28/2015	**0.0091**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0036**	J		<0.024	U		<0.0062	U	
		VMP-45-30-012516	1/25/2016	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-45-30-042816	4/28/2016	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.00091**	J		<0.025	U		<0.0063	U	
		VMP-45-30-042816-DUP	4/28/2016	**0.0075**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-45-30-072716	7/27/2016	**0.015**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0038**	J		<0.028	U		<0.0071	U	
		VMP-45-30-102816	10/28/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0074**			<0.027	U		<0.0068	U	
		VMP-45-30-012317	1/23/2017	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.00093**	J		<0.027	U		<0.0068	U	
		VMP-45-30-042617	4/26/2017	**0.002**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-45-30-042617-DUP	4/26/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-45-30-072517	7/25/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-45-30-103117	10/31/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-45-30-012418	1/24/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0011**	J		<0.024	U		<0.0059	U	
		VMP-45-30-041818	4/18/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-45-30-071918	7/19/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0012**	J		<0.025	U		<0.0062	U	
		VMP-45-30-102518	10/25/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0024**	J		<0.025	U		<0.0062	U	
		VMP-45-30-012219	1/22/2019	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-45-30-042519	4/25/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-45-30-052819R	5/28/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-45-30-080119	8/1/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		**0.0022**	J		<0.0065	ND,UJ	UJ
		VMP-45-30-102419	10/24/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-45-30-102419-DUP	10/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-45-30-012720	1/27/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-45-30-042720	4/27/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-45-30-072820	7/28/2020	**0.004**	J		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		**0.0065**	J		<0.03	U		<0.0076	U	
		VMP-45-30-110520	11/5/2020	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-45-30-012621	1/26/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-45-30-020615-DUP	2/6/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0032**	J		<0.0052	U		<0.0052	U	
		VMP-45-30-042915	4/29/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-45-30-072115	7/21/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		<0.0075	J	U	<0.0061	U		<0.0061	U	
		VMP-45-30-072115-DUP	7/21/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	J	U	<0.0058	U		<0.0058	U	
		VMP-45-30-102815	10/28/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0032**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-012516	1/25/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0035**	J		<0.0056	U		<0.0056	U	
		VMP-45-30-042816	4/28/2016	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0018**	J		<0.0049	U		<0.0049	U	
		VMP-45-30-042816-DUP	4/28/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0016**	J		<0.0051	U		<0.0051	U	
		VMP-45-30-072716	7/27/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-45-30-102816	10/28/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-45-30-012317	1/23/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0027**	J		<0.0053	U		<0.0053	U	
		VMP-45-30-042617	4/26/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-45-30-042617-DUP	4/26/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.002**	J		<0.0047	U		<0.0047	U	
		VMP-45-30-072517	7/25/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-45-30-103117	10/31/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-45-30-012418	1/24/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0039**	J		<0.0046	U		<0.0046	U	
		VMP-45-30-041818	4/18/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-071918	7/19/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-102518	10/25/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-012219	1/22/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-45-30-042519	4/25/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0063	U		<0.0051	U		<0.0051	U	
		VMP-45-30-052819R	5/28/2019	**0.0027**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-45-30-080119	8/1/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-45-30-102419	10/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0017**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-102419-DUP	10/24/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-45-30-012720	1/27/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-45-30-042720	4/27/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-072820	7/28/2020	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		**0.00071**	J		**0.0019**	J		<0.006	U		<0.0059	U	
		VMP-45-30-110520	11/5/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-45-30-012621	1/26/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-45-30-020615-DUP	2/6/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-45-30-042915	4/29/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-45-30-072115	7/21/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-45-30-072115-DUP	7/21/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	J	U	<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-45-30-102815	10/28/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0036**	J		<0.0055	U		<0.0054	U		<0.0054	U		**0.011**	J	
		VMP-45-30-012516	1/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-45-30-042816	4/28/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-45-30-042816-DUP	4/28/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-30-072716	7/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		**0.0067**	J	
		VMP-45-30-102816	10/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-45-30-012317	1/23/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-45-30-042617	4/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-45-30-042617-DUP	4/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-45-30-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	ND,UJ	UJ	<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-30-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-45-30-012418	1/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-45-30-041818	4/18/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.006**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-30-071918	7/19/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-30-102518	10/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-30-012219	1/22/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-45-30-042519	4/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-45-30-052819R	5/28/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-45-30-080119	8/1/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-45-30-102419	10/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-30-102419-DUP	10/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-45-30-012720	1/27/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-45-30-042720	4/27/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-30-072820	7/28/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		**0.0026**	J	
		VMP-45-30-110520	11/5/2020	<0.0047	U		<0.0047	U		<0.0047	U		**0.0014**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-45-30-012621	1/26/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.0037**	J		<0.056	U		**0.01**		
		VMP-45-30-020615-DUP	2/6/2015	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.0034**	J		<0.055	U		**0.0097**		
		VMP-45-30-042915	4/29/2015	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0029**	J	
		VMP-45-30-072115	7/21/2015	0.022		J	<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		**0.0041**	J		<0.065	U		**0.0074**		
		VMP-45-30-072115-DUP	7/21/2015	<0.011	J	U	<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		**0.0038**	J		<0.062	U		**0.0069**		
		VMP-45-30-102815	10/28/2015	0.0054	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0016**	J		<0.051	U		**0.0031**	J	
		VMP-45-30-012516	1/25/2016	0.014			**0.0039**	J		0.0056	J		<0.011	U		<0.0097	U		**0.0017**	J		<0.059	U		**0.0021**	J	
		VMP-45-30-042816	4/28/2016	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-45-30-042816-DUP	4/28/2016	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.00086**	J	
		VMP-45-30-072716	7/27/2016	0.0058	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-45-30-102816	10/28/2016	0.0084	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		**0.00084**	J	
		VMP-45-30-012317	1/23/2017	0.011			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.001**	J	
		VMP-45-30-042617	4/26/2017	<0.0093	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0021**	J	
		VMP-45-30-042617-DUP	4/26/2017	0.0079	J		**0.0046**	J		0.0048	J		<0.0089	U		<0.0081	U		**0.0044**	J		<0.049	U		**0.0048**		
		VMP-45-30-072517	7/25/2017	0.014			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-45-30-103117	10/31/2017	0.012			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-45-30-012418	1/24/2018	0.024			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-45-30-041818	4/18/2018	0.017			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.00069**	J	
		VMP-45-30-071918	7/19/2018	0.008	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0014**	J		<0.051	U		<0.0042	U	
		VMP-45-30-102518	10/25/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-45-30-012219	1/22/2019	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-45-30-042519	4/25/2019	0.0093	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-45-30-052819R	5/28/2019	0.009	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		**0.0044**	J		<0.056	U		**0.0089**		
		VMP-45-30-080119	8/1/2019	0.0046	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0017**	J	
		VMP-45-30-102419	10/24/2019	<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-45-30-102419-DUP	10/24/2019	0.005	J	J	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0014**	J	
		VMP-45-30-012720	1/27/2020	<0.01	ND,UJ	UJ	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-45-30-042720	4/27/2020	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-45-30-072820	7/28/2020	0.0093	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-45-30-110520	11/5/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-45-30-012621	1/26/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-45-30-020615	2/6/2015	<0.022	U		0.0086	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.011**	J		<0.0065	U	
		VMP-45-30-020615-DUP	2/6/2015	<0.021	U		0.0097	J		<0.0063	U		<0.0053	U		<0.0046	U					**0.01**	J		<0.0063	U	
		VMP-45-30-042915	4/29/2015	**0.001**	J		0.0022	J		<0.0069	U		**0.0022**	J		<0.0051	U					**0.098**			<0.0069	U	
		VMP-45-30-072115	7/21/2015	**0.0015**	J	J	0.0069	J		<0.0074	U		<0.0062	U		<0.0055	U					<0.015	J	U	<0.0074	U	
		VMP-45-30-072115-DUP	7/21/2015	**0.0021**	J	J	<0.017	J	U	<0.0071	U		<0.0059	U		<0.0052	U					**0.0098**	J		<0.0071	U	
		VMP-45-30-102815	10/28/2015	**0.003**	J	J	0.0039	J		<0.0058	U		<0.0049	U		<0.0043	U					**0.0039**	J		<0.0058	U	
		VMP-45-30-012516	1/25/2016	<0.023	U		0.0036	J		**0.0049**	J		<0.0057	U		<0.005	U					**0.01**	J		**0.014**		
		VMP-45-30-042816	4/28/2016	<0.02	ND,UJ	UJ	<0.014	U		<0.006	U		<0.005	U		<0.0044	U					<0.012	U		<0.006	U	
		VMP-45-30-042816-DUP	4/28/2016	<0.02	ND,UJ	UJ	<0.015	U		<0.0062	U		<0.0051	U		<0.0045	U					**0.0025**	J		<0.0062	U	
		VMP-45-30-072716	7/27/2016	**0.0025**	J		0.0036	J		<0.0067	U		<0.0056	U		<0.02	U					**0.0053**	J		<0.0067	U	
		VMP-45-30-102816	10/28/2016	<0.021	U		0.01	J		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		**0.022**			<0.0064	U	
		VMP-45-30-012317	1/23/2017	<0.021	U		0.0019	J		<0.0064	U		<0.0054	U		<0.019	U					**0.014**			<0.0064	U	
		VMP-45-30-042617	4/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.003**	J		<0.006	U	
		VMP-45-30-042617-DUP	4/26/2017	<0.019	U		0.0053	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0046**	J		**0.0013**	J	
		VMP-45-30-072517	7/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
	30 ft	VMP-45-30-103117	10/31/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		**0.00065**	J	
		VMP-45-30-012418	1/24/2018	<0.019	U		0.0043	J		<0.0056	U		<0.0047	U		<0.016	U					**0.021**			<0.0056	U	
		VMP-45-30-041818	4/18/2018	<0.019	U		0.0063	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	J	U	<0.0058	U	
		VMP-45-30-071918	7/19/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.021**			<0.0059	U	
		VMP-45-30-102518	10/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-45-30-012219	1/22/2019	<0.018	U		0.0039	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-45-30-042519	4/25/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0046**	J		<0.0062	U	
		VMP-45-30-052819R	5/28/2019	<0.022	U		0.028			<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		**0.0029**	J	
		VMP-45-30-080119	8/1/2019	<0.021	ND,UJ	UJ	0.0046	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0069**	J		<0.0062	U	
		VMP-45-30-102419	10/24/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0013**	J		<0.0058	U	
		VMP-45-30-102419-DUP	10/24/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-45-30-012720	1/27/2020	<0.023	U		0.002	J		<0.0068	U		<0.0056	U		<0.02	U					<0.014	U		**0.0053**	J	
		VMP-45-30-042720	4/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0024**	J		<0.0058	U	
		VMP-45-30-072820	7/28/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.011**	J		**0.00097**	J	
		VMP-45-30-110520	11/5/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0041**	J		<0.0058	U	
		VMP-45-30-012621	1/26/2021	<0.02	U		0.0016	J		<0.0059	U		<0.005	U		<0.017	U					**0.0072**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.0061		U	<0.039	U		<0.0072	U		<0.0072	U	
		VMP-45-30-020615-DUP	2/6/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0059		U	<0.038	U		<0.007	U		<0.007	U	
		VMP-45-30-042915	4/29/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-45-30-072115	7/21/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		**0.0014**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-45-30-072115-DUP	7/21/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	J	U	**0.0011**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-45-30-102815	10/28/2015	<0.0051	U		<0.0082	U		<0.0081	U		**0.0063**			**0.001**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-012516	1/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-45-30-042816	4/28/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U	UJ	**0.00045**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-45-30-042816-DUP	4/28/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U	UJ	**0.00051**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-45-30-072716	7/27/2016	<0.0058	U		<0.0094	U		<0.0093	U		**0.0023**	J		**0.0017**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-45-30-102816	10/28/2016	<0.0056	U		<0.009	U		**0.0025**	J		<0.0038	U		**0.009**			<0.039	U		<0.0071	U		<0.0071	U	
		VMP-45-30-012317	1/23/2017	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-45-30-042617	4/26/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U	UJ	<0.036	U		<0.0067	U		<0.0067	U	
		VMP-45-30-042617-DUP	4/26/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.015**		J	<0.034	U		<0.0063	U		<0.0063	U	
		VMP-45-30-072517	7/25/2017	<0.0054	U		<0.0086	ND,UJ	UJ	<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-45-30-103117	10/31/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.0012**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-45-30-012418	1/24/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0024**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-45-30-041818	4/18/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0028**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-071918	7/19/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0006**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-102518	10/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-012219	1/22/2019	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.0021**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-45-30-042519	4/25/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0028**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-45-30-052819R	5/28/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.007**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-45-30-080119	8/1/2019	<0.0054	U		<0.0086	U		**0.1**			<0.0037	U		**0.002**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-45-30-102419	10/24/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-102419-DUP	10/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-45-30-012720	1/27/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-45-30-042720	4/27/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-072820	7/28/2020	<0.01	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		**0.0017**	J		<0.008	U		<0.008	U	
		VMP-45-30-110520	11/5/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-45-30-012621	1/26/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-45-30-020615	2/6/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.014			<0.0034	U		0.0013	J		<0.0057	U	
		VMP-45-30-020615-DUP	2/6/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.014			<0.0033	U		0.0012	J		<0.0056	U	
		VMP-45-30-042915	4/29/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-45-30-072115	7/21/2015	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		0.0082			<0.0039	U		0.002	J		<0.0066	U	
		VMP-45-30-072115-DUP	7/21/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.008			<0.0037	U		0.0014	J		<0.0063	U	
		VMP-45-30-102815	10/28/2015	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0037	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-45-30-012516	1/25/2016	<0.0075	U		0.0022	J		**0.012**			<0.0068	J	U	0.011			<0.0036	U		0.0025	J		<0.006	U	
		VMP-45-30-042816	4/28/2016	<0.0065	U		<0.0068	U		**0.0007**	J		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-45-30-042816-DUP	4/28/2016	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-45-30-072716	7/27/2016	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0016	J		<0.0035	U		0.0011	J		<0.0059	U	
		VMP-45-30-102816	10/28/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0034	J		<0.0033	U		0.0016	J		<0.0057	U	
		VMP-45-30-012317	1/23/2017	<0.007	U		0.0021	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-45-30-042617	4/26/2017	<0.0066	U		0.0013	J		<0.006	U		<0.006	U		0.00092	J		<0.0031	U		<0.0053	U	UJ	<0.0053	U	
		VMP-45-30-042617-DUP	4/26/2017	<0.0062	U		0.0016	J		**0.0063**			**0.002**	J		0.013			<0.003	U		0.015		J	**0.0057**		
		VMP-45-30-072517	7/25/2017	<0.0068	U		0.0022	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-45-30-103117	10/31/2017	<0.006	U		0.0017	J		<0.0055	U		<0.0055	U		0.0013	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-45-30-012418	1/24/2018	<0.0062	U		0.0038	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-45-30-041818	4/18/2018	<0.0064	U		0.0033	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-45-30-071918	7/19/2018	<0.0064	U		0.0019	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-45-30-102518	10/25/2018	<0.0064	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-45-30-012219	1/22/2019	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.003	J		<0.0028	U		0.0012	J		<0.0048	U	
		VMP-45-30-042519	4/25/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.003	J		<0.0055	U	
		VMP-45-30-052819R	5/28/2019	<0.0071	U		<0.0074	U		**0.0037**	J		<0.0065	U		0.036			<0.0034	U		0.0062			**0.0023**	J	
		VMP-45-30-080119	8/1/2019	<0.0068	U		0.00091	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-45-30-102419	10/24/2019	<0.0064	U		0.0037	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-45-30-102419-DUP	10/24/2019	<0.0062	U		0.0039	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0014	J		<0.005	U	
		VMP-45-30-012720	1/27/2020	<0.0074	U		0.018			<0.0068	U		<0.0068	U		0.0043	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-45-30-042720	4/27/2020	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-45-30-072820	7/28/2020	<0.0079	U		0.0012	J		<0.0072	U		<0.0072	U		0.0046	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-45-30-110520	11/5/2020	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-45-30-012621	1/26/2021	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	**0.0072**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-5-042815	4/28/2015	**0.012**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-47-5-072115	7/21/2015	**0.05**			**0.0015**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0071**	J	
		VMP-47-5-102715	10/27/2015	<0.036	J	U	<0.0048	J	U	<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.0024**	J	
		VMP-47-5-012916	1/29/2016	**0.015**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0029**	J	
		VMP-47-5-042516	4/25/2016	<0.035	J	U	**0.002**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-47-5-072516	7/25/2016	**0.016**	J		<0.0045	U		**0.0085**	J		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-47-5-102616	10/26/2016	**0.031**	J		**0.0014**	J		**0.0018**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0062**	J	
		VMP-47-5-020117	2/1/2017	**0.02**	J		**0.00093**	J		**0.0023**	J		<0.012	U		<0.045	U		<0.0026	U		0.004	J		**0.0087**	J	
		VMP-47-5-042717	4/27/2017	<0.026	J	U	<0.0034	U		**0.0022**	J		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0034**	J	
		VMP-47-5-072417	7/24/2017	**0.017**	J		<0.0039	U		**0.001**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0042**	J	
		VMP-47-5-102617	10/26/2017	**0.02**	J		**0.015**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0044**	J	
		VMP-47-5-012618	1/26/2018	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0042	J		<0.013	U	
		VMP-47-5-042718	4/27/2018	**0.038**			<0.0039	U		**0.003**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-5-071918	7/19/2018	**0.018**	J		**0.0013**	J		**0.0028**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-5-102318	10/23/2018	**0.012**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0028**	J	
		VMP-47-5-012919	1/29/2019	**0.02**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-47-5-042519	4/25/2019	**0.034**			<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0042**	J	
		VMP-47-5-072619	7/26/2019	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-5-102319	10/23/2019	**0.01**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-5-012920	1/29/2020	**0.0093**	J		**0.0072**		J	**0.0082**	J		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-47-5-012920-DUP	1/29/2020	**0.01**	J		**0.028**		J	**0.0095**			<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-47-5-042820	4/28/2020	**0.017**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-47-5-072720	7/27/2020	**0.058**			<0.0039	U		**0.0078**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.011**	J	
		VMP-47-5-110220	11/2/2020	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-5-012221	1/22/2021	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	10 ft	VMP-47-10-020215	2/2/2015	**0.0046**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-10-042815	4/28/2015	**0.011**	J		<0.0048	U		**0.0059**	J		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		**0.007**	J	
		VMP-47-10-072115	7/21/2015	**0.024**	J		<0.005	U		**0.017**			<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0039**	J	
		VMP-47-10-102715	10/27/2015	**0.034**			<0.0045	J	U	**0.0029**	J		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.012**	J	
		VMP-47-10-012916	1/29/2016	**0.0081**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0019**	J	
		VMP-47-10-042516	4/25/2016	<0.035	J	U	<0.0048	U		**0.011**			<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-47-10-080216	8/2/2016	**0.026**	J		<0.0036	U		**0.014**			<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0046**	J	
		VMP-47-10-102616	10/26/2016	**0.014**	J		<0.0037	U		**0.017**			<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-10-020117	2/1/2017	**0.022**	J		**0.00078**	J		**0.016**			<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0025**	J	
		VMP-47-10-042717	4/27/2017	<0.028	J	U	<0.0037	U		**0.016**			<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-10-072417	7/24/2017	**0.018**	J		**0.00078**	J		**0.033**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-10-102617	10/26/2017	**0.013**	J		<0.0038	U		**0.011**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-10-012618	1/26/2018	**0.0097**	J		<0.0036	U		**0.007**	J		<0.012	U		<0.043	U		<0.0025	U		0.0052	J		<0.013	U	
		VMP-47-10-042718	4/27/2018	**0.0096**	J		<0.0039	U		**0.021**			<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-10-071918	7/19/2018	**0.028**			**0.00046**	J		**0.051**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.006**	J	
		VMP-47-10-102318	10/23/2018	**0.016**	J		<0.0038	U		**0.0077**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0042**	J	
		VMP-47-10-012919	1/29/2019	**0.013**	J		<0.0038	U		**0.014**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0029**	J	
		VMP-47-10-042519	4/25/2019	**0.0099**	J		<0.0035	U		**0.021**			<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-47-10-072619	7/26/2019	**0.0062**	J		<0.0041	U		**0.007**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-10-102319	10/23/2019	**0.0074**	J		<0.0042	U		**0.013**			<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-47-10-012920	1/29/2020	**0.0053**	J		**0.002**	J		**0.016**			<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-47-10-042820	4/28/2020	**0.0088**	J		<0.0044	U		**0.011**			<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-47-10-042820-DUP	4/28/2020	**0.036**			<0.0045	U		**0.011**			<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0031**	J	
		VMP-47-10-072720	7/27/2020	**0.02**	J		<0.0038	U		**0.024**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0029**	J	
		VMP-47-10-072720-DUP	7/27/2020	**0.012**	J		<0.0038	U		**0.025**			<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-10-110220	11/2/2020	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-10-012221	1/22/2021	**0.02**	J		<0.0039	U		**0.012**			<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	**0.003**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-47-5-042815	4/28/2015	**0.0026**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.003**	J		<0.029	U		<0.0073	U	
		VMP-47-5-072115	7/21/2015	<0.019	J	U	<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		**0.016**			<0.032	U		<0.008	U	
		VMP-47-5-102715	10/27/2015	<0.019	J	U	<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0077	U	
		VMP-47-5-012916	1/29/2016	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-47-5-042516	4/25/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0027**	J		<0.03	U		<0.0077	U	
		VMP-47-5-072516	7/25/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.021**			<0.029	U		<0.0073	U	
		VMP-47-5-102616	10/26/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0046**	J		<0.028	U		<0.007	U	
		VMP-47-5-020117	2/1/2017	**0.00099**	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0052**	J		<0.024	U		<0.006	U	
		VMP-47-5-042717	4/27/2017	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0062**			<0.022	U		<0.0056	U	
		VMP-47-5-072417	7/24/2017	**0.0017**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.003**	J		<0.025	U		<0.0063	U	
		VMP-47-5-102617	10/26/2017	**0.0018**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-47-5-012618	1/26/2018	**0.0032**	J		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-47-5-042718	4/27/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.007**			<0.026	U		<0.0064	U	
		VMP-47-5-071918	7/19/2018	**0.0018**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0068**			<0.024	U		<0.006	U	
		VMP-47-5-102318	10/23/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-47-5-012919	1/29/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0022**	J		<0.023	U		<0.0058	U	
		VMP-47-5-042519	4/25/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0066**			<0.025	U		<0.0062	U	
		VMP-47-5-072619	7/26/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0026**	J		<0.026	U		<0.0065	U	
		VMP-47-5-102319	10/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-47-5-012920	1/29/2020	<0.018	U		<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		**0.011**			<0.031	U		<0.0077	U	
		VMP-47-5-012920-DUP	1/29/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.012**			<0.029	U		<0.0074	U	
		VMP-47-5-042820	4/28/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-47-5-072720	7/27/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.03**			<0.026	U		<0.0064	U	
		VMP-47-5-110220	11/2/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.026**			<0.025	U		<0.0063	U	
		VMP-47-5-012221	1/22/2021	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
	10 ft	VMP-47-10-020215	2/2/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0022**	J		<0.026	U		<0.0065	U	
		VMP-47-10-042815	4/28/2015	<0.019	U		<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		**0.0093**			<0.031	U		<0.0078	U	
		VMP-47-10-072115	7/21/2015	<0.019	J	U	<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		**0.1**			<0.032	U		<0.008	U	
		VMP-47-10-102715	10/27/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.024**			<0.029	U		<0.0072	U	
		VMP-47-10-012916	1/29/2016	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0039**	J		<0.025	U		<0.0062	U	
		VMP-47-10-042516	4/25/2016	<0.018	U		<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		**0.024**			<0.031	U		<0.0077	U	
		VMP-47-10-080216	8/2/2016	**0.0061**	J		<0.007	U		<0.0052	U		0.0018	J		<0.012	U		**0.028**			<0.023	U		<0.0058	U	
		VMP-47-10-102616	10/26/2016	**0.0028**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.038**			<0.024	U		<0.006	U	
		VMP-47-10-020117	2/1/2017	**0.00063**	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.036**			<0.024	U		<0.006	U	
		VMP-47-10-042717	4/27/2017	<0.014	U		<0.0073	U		<0.0054	U		0.0022	J		<0.012	U		**0.034**			<0.024	U		<0.006	U	
		VMP-47-10-072417	7/24/2017	<0.015	U		<0.0074	U		<0.0054	U		0.003	J		<0.012	U		**0.073**			<0.024	U		<0.0061	U	
		VMP-47-10-102617	10/26/2017	**0.0017**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.025**			<0.024	U		<0.0062	U	
		VMP-47-10-012618	1/26/2018	**0.0083**	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.023**			<0.023	U		<0.0058	U	
		VMP-47-10-042718	4/27/2018	<0.015	J	U	<0.0076	U		<0.0056	U		0.004	J		<0.013	U		**0.041**			<0.025	U		<0.0063	U	
		VMP-47-10-071918	7/19/2018	**0.0039**	J		**0.00068**	J		<0.0055	U		0.0046	J		<0.012	U		**0.092**			<0.024	U		<0.0062	U	
		VMP-47-10-102318	10/23/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.014**			<0.024	U		<0.0061	U	
		VMP-47-10-012919	1/29/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.03**			<0.024	U		<0.0062	U	
		VMP-47-10-042519	4/25/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.046**			<0.023	U		<0.0057	U	
		VMP-47-10-072619	7/26/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.06**			<0.026	U		<0.0066	ND,UJ	UJ
		VMP-47-10-102319	10/23/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.032**			<0.027	U		<0.0068	U	
		VMP-47-10-012920	1/29/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.026**			<0.028	U		<0.007	U	
		VMP-47-10-042820	4/28/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.016**			<0.028	U		<0.0071	U	
		VMP-47-10-042820-DUP	4/28/2020	**0.0049**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.016**			<0.029	U		<0.0073	U	
		VMP-47-10-072720	7/27/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.064**			<0.024	U		<0.0061	U	
		VMP-47-10-072720-DUP	7/27/2020	**0.0098**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.069**			<0.025	U		<0.0062	U	
		VMP-47-10-110220	11/2/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0082**			<0.024	U		<0.006	U	
		VMP-47-10-012221	1/22/2021	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.023**			<0.025	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-47-5-042815	4/28/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0021**	J		<0.0057	U		<0.0057	U	
		VMP-47-5-072115	7/21/2015	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	J	U	<0.0063	U		<0.0063	U	
		VMP-47-5-102715	10/27/2015	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0024**	J		<0.006	U		<0.006	U	
		VMP-47-5-012916	1/29/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0029**	J		<0.0055	U		<0.0055	U	
		VMP-47-5-042516	4/25/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0026**	J		<0.006	U		<0.006	U	
		VMP-47-5-072516	7/25/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-47-5-102616	10/26/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-47-5-020117	2/1/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-47-5-042717	4/27/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0034**	J		<0.0044	U		<0.0044	U	
		VMP-47-5-072417	7/24/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-47-5-102617	10/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-47-5-012618	1/26/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-47-5-042718	4/27/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-47-5-071918	7/19/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0033**	J		<0.0047	U		<0.0047	U	
		VMP-47-5-102318	10/23/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-47-5-012919	1/29/2019	**0.0013**	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-47-5-042519	4/25/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-47-5-072619	7/26/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-47-5-102319	10/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-47-5-012920	1/29/2020	**0.0027**	J		<0.011	U		<0.009	U		<0.009	U		<0.009	U		<0.0074	U		<0.006	U		<0.006	U	
		VMP-47-5-012920-DUP	1/29/2020	**0.0088**			<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-47-5-042820	4/28/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-47-5-072720	7/27/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0037**	J		<0.005	U		<0.005	U	
		VMP-47-5-110220	11/2/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-47-5-012221	1/22/2021	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
	10 ft	VMP-47-10-020215	2/2/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-47-10-042815	4/28/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0023**	J		<0.0061	U		<0.0061	U	
		VMP-47-10-072115	7/21/2015	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	J	U	<0.0063	U		<0.0063	U	
		VMP-47-10-102715	10/27/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0029**	J		<0.0057	U		<0.0057	U	
		VMP-47-10-012916	1/29/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-042516	4/25/2016	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0031**	J		<0.006	U		<0.006	U	
		VMP-47-10-080216	8/2/2016	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0024**	J		<0.0045	U		<0.0045	U	
		VMP-47-10-102616	10/26/2016	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-47-10-020117	2/1/2017	**0.001**	J		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0044**	J		<0.0047	U		<0.0047	U	
		VMP-47-10-042717	4/27/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0079**			<0.0047	U		<0.0047	U	
		VMP-47-10-072417	7/24/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0038**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-102617	10/26/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-012618	1/26/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-47-10-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-47-10-071918	7/19/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0032**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-102318	10/23/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-012919	1/29/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-042519	4/25/2019	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-47-10-072619	7/26/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-47-10-102319	10/23/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-47-10-012920	1/29/2020	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0067	U		<0.0055	U		<0.0055	U	
		VMP-47-10-042820	4/28/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-47-10-042820-DUP	4/28/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0025**	J		<0.0057	U		<0.0057	U	
		VMP-47-10-072720	7/27/2020	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0034**	J		<0.0048	U		<0.0048	U	
		VMP-47-10-110220	11/2/2020	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0034**	J		<0.0047	U		<0.0047	U	
		VMP-47-10-012221	1/22/2021	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-5-042815	4/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-5-072115	7/21/2015	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-47-5-102715	10/27/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	J	U	<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-47-5-012916	1/29/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-47-5-042516	4/25/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-47-5-072516	7/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-5-102616	10/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-47-5-020117	2/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-5-042717	4/27/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-47-5-072417	7/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0027**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-5-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-5-012618	1/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-47-5-042718	4/27/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-5-071918	7/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-5-102318	10/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0025**	J		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-47-5-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-47-5-042519	4/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-5-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-47-5-102319	10/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		**0.0055**	J	
		VMP-47-5-012920	1/29/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-47-5-012920-DUP	1/29/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-5-042820	4/28/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-5-072720	7/27/2020	<0.0049	U		0.0072			<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-5-110220	11/2/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-47-5-012221	1/22/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	ND,UJ	UJ
	10 ft	VMP-47-10-020215	2/2/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-47-10-042815	4/28/2015	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-47-10-072115	7/21/2015	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-47-10-102715	10/27/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	J	U	<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-10-012916	1/29/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-042516	4/25/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-47-10-080216	8/2/2016	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-47-10-102616	10/26/2016	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-10-020117	2/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-47-10-042717	4/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-10-072417	7/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0029**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-012618	1/26/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-47-10-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-10-071918	7/19/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-102318	10/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.002**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-012919	1/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-042519	4/25/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-47-10-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-47-10-102319	10/23/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-47-10-012920	1/29/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-47-10-042820	4/28/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-47-10-042820-DUP	4/28/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-10-072720	7/27/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-10-110220	11/2/2020	<0.0046	U		<0.0046	U		<0.0046	U		**0.0021**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-10-012221	1/22/2021	<0.0049	U		<0.0049	U		<0.0049	U		**0.01**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-5-042815	4/28/2015	0.01	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	ND,UJ	UJ	**0.0023**	J	
		VMP-47-5-072115	7/21/2015	0.01	J	J	<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		**0.0028**	J		<0.066	U		**0.0033**	J	
		VMP-47-5-102715	10/27/2015	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-47-5-012916	1/29/2016	0.01	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-47-5-042516	4/25/2016	0.0077	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	J	U	<0.063	U		<0.0052	J	U
		VMP-47-5-072516	7/25/2016	<0.011	U		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		**0.0017**	J	
		VMP-47-5-102616	10/26/2016	0.016			**0.0019**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		**0.0021**	J	
		VMP-47-5-020117	2/1/2017	0.042			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-47-5-042717	4/27/2017	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-47-5-072417	7/24/2017	0.0064	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-5-102617	10/26/2017	0.0036	J		<0.0052	U		0.0024	J		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-5-012618	1/26/2018	0.0088			<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-47-5-042718	4/27/2018	0.02			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-5-071918	7/19/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-47-5-102318	10/23/2018	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-47-5-012919	1/29/2019	0.013			**0.0058**			0.11			<0.0086	U		<0.0078	U		**0.0017**	J		<0.048	U		**0.003**	J	
		VMP-47-5-042519	4/25/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-5-072619	7/26/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-5-102319	10/23/2019	0.014			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-47-5-012920	1/29/2020	<0.011	ND,UJ	UJ	**0.0092**		J	<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-47-5-012920-DUP	1/29/2020	<0.011	ND,UJ	UJ	**0.088**		J	0.0059	J		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-47-5-042820	4/28/2020	0.0069	J	J	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-47-5-072720	7/27/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-5-110220	11/2/2020	0.023		J	<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-5-012221	1/22/2021	0.0058	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
	10 ft	VMP-47-10-020215	2/2/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0011**	J	
		VMP-47-10-042815	4/28/2015	0.0024	J		<0.0065	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	ND,UJ	UJ	<0.0053	U	
		VMP-47-10-072115	7/21/2015	<0.012	J	U	<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-47-10-102715	10/27/2015	0.01	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-47-10-012916	1/29/2016	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-10-042516	4/25/2016	<0.011	U		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-47-10-080216	8/2/2016	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-47-10-102616	10/26/2016	0.021			**0.0025**	J		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0012**	J	
		VMP-47-10-020117	2/1/2017	0.0082	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-47-10-042717	4/27/2017	0.0078	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-47-10-072417	7/24/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-47-10-102617	10/26/2017	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-10-012618	1/26/2018	0.0097			<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		**0.0023**	J		<0.048	U		<0.0039	U	
		VMP-47-10-042718	4/27/2018	0.016			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-10-071918	7/19/2018	0.0058	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-10-102318	10/23/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-47-10-012919	1/29/2019	<0.009	U		<0.0052	U		0.002	J		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-10-042519	4/25/2019	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-47-10-072619	7/26/2019	0.0028	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-47-10-102319	10/23/2019	0.011			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-47-10-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-47-10-042820	4/28/2020	0.0062	J	J	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-47-10-042820-DUP	4/28/2020	0.0088	J	J	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-47-10-072720	7/27/2020	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-10-110220	11/2/2020	0.014	J	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-47-10-012221	1/22/2021	0.0061	J		**0.00072**	J		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.00098**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					**0.0036**	J		<0.0061	J	U
		VMP-47-5-042815	4/28/2015	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		**0.001**	J					<0.014	U		<0.0069	U	
		VMP-47-5-072115	7/21/2015	<0.025	U		0.0054	J		<0.0076	U		<0.0064	U		<0.0056	U					<0.015	J	U	<0.0076	U	
		VMP-47-5-102715	10/27/2015	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					<0.015	U		<0.0073	U	
		VMP-47-5-012916	1/29/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0052**	J		<0.0067	U	
		VMP-47-5-042516	4/25/2016	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					**0.014**	J		<0.0073	U	
		VMP-47-5-072516	7/25/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.0031**	J		<0.007	U	
		VMP-47-5-102616	10/26/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.0077**	J		<0.0066	U	
		VMP-47-5-020117	2/1/2017	<0.019	U		<0.014	J	U	<0.0057	U		<0.0048	U		<0.017	U					**0.013**			<0.0057	U	
		VMP-47-5-042717	4/27/2017	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0025**	J		<0.0053	U	
		VMP-47-5-072417	7/24/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0026**	J		<0.0059	U	
		VMP-47-5-102617	10/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-47-5-012618	1/26/2018	<0.019	U		0.021			<0.0056	U		<0.0047	U		<0.016	U					**0.0036**	J		<0.0056	U	
		VMP-47-5-042718	4/27/2018	<0.02	U		0.0046	J		<0.0061	U		<0.005	U		<0.018	U					**0.01**	J		<0.0061	U	
		VMP-47-5-071918	7/19/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-47-5-102318	10/23/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-47-5-012919	1/29/2019	<0.018	U		0.0044	J		**0.15**			<0.0046	U		<0.016	U					**0.0026**	J		**0.51**		
		VMP-47-5-042519	4/25/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0039**	J		<0.0059	U	
		VMP-47-5-072619	7/26/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-47-5-102319	10/23/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-47-5-012920	1/29/2020	<0.024	U		0.0076	J	J	**0.008**		J	<0.0061	U		<0.021	U					<0.015	U		**0.0086**		J
		VMP-47-5-012920-DUP	1/29/2020	<0.023	U		0.012	J	J	**0.1**		J	<0.0058	U		<0.02	U					<0.014	U		**0.097**		J
		VMP-47-5-042820	4/28/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.0058**	J		<0.0069	U	
		VMP-47-5-072720	7/27/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.015**			<0.0061	U	
		VMP-47-5-110220	11/2/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.029**			<0.006	U	
		VMP-47-5-012221	1/22/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.006**	J		<0.0062	U	
	10 ft	VMP-47-10-020215	2/2/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					<0.012	J	U	<0.0062	U	
		VMP-47-10-042815	4/28/2015	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		**0.0086**						**0.0072**	J		<0.0074	U	
		VMP-47-10-072115	7/21/2015	**0.0014**	J	J	<0.018	U		<0.0076	U		<0.0064	U		**0.0066**						<0.015	J	U	<0.0076	U	
		VMP-47-10-102715	10/27/2015	**0.0035**	J	J	<0.016	U		<0.0069	U		<0.0057	U		<0.005	U					<0.014	J	UJ	<0.0069	U	
		VMP-47-10-012916	1/29/2016	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.0043	U					**0.0051**	J		<0.0059	U	
		VMP-47-10-042516	4/25/2016	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					<0.015	J	U	**0.00094**	J	
		VMP-47-10-080216	8/2/2016	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0035**	J		<0.0055	U	
		VMP-47-10-102616	10/26/2016	<0.019	U		0.0042	J		<0.0057	U		<0.0048	U		<0.017	U		<0.012	U		**0.053**			<0.0057	U	
		VMP-47-10-020117	2/1/2017	<0.019	U		<0.014	J	U	<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-47-10-042717	4/27/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0022**	J		<0.0057	U	
		VMP-47-10-072417	7/24/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-47-10-102617	10/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-47-10-012618	1/26/2018	<0.018	U		0.072			<0.0055	U		<0.0046	U		<0.016	U					**0.0091**	J		<0.0055	U	
		VMP-47-10-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-47-10-071918	7/19/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0035**	J		<0.0058	U	
		VMP-47-10-102318	10/23/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.003**	J		<0.0058	U	
		VMP-47-10-012919	1/29/2019	<0.019	U		<0.014	U		**0.0087**			<0.0049	U		<0.017	U					<0.012	U		**0.035**		
		VMP-47-10-042519	4/25/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-47-10-072619	7/26/2019	<0.021	U		<0.015	U		**0.00083**	J		<0.0052	U		<0.018	U					<0.012	U		**0.0024**	J	
		VMP-47-10-102319	10/23/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-47-10-012920	1/29/2020	<0.022	U		0.0027	J	J	<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-47-10-042820	4/28/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0035**	J		<0.0068	U	
		VMP-47-10-042820-DUP	4/28/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.0056**	J		<0.0069	U	
		VMP-47-10-072720	7/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0097**	J		<0.0058	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.012**	J		<0.0059	U	
		VMP-47-10-110220	11/2/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0067**	J		<0.0057	U	
		VMP-47-10-012221	1/22/2021	<0.02	U		0.0046	J		<0.006	U		<0.005	U		<0.018	U					**0.011**	J		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-47-5-042815	4/28/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-47-5-072115	7/21/2015	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		**0.0012**	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-47-5-102715	10/27/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.0013**	J		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-47-5-012916	1/29/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-47-5-042516	4/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	J	U	<0.044	U		<0.0081	U		<0.0081	U	
		VMP-47-5-072516	7/25/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-47-5-102616	10/26/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	J	U	<0.04	U		<0.0074	U		<0.0074	U	
		VMP-47-5-020117	2/1/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00055**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-5-042717	4/27/2017	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-47-5-072417	7/24/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-5-102617	10/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0027**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-5-012618	1/26/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.0096**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-47-5-042718	4/27/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0037**	J		<0.037	J	U	<0.0067	U		<0.0067	U	
		VMP-47-5-071918	7/19/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00067**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-47-5-102318	10/23/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-47-5-012919	1/29/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.005**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-47-5-042519	4/25/2019	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-5-072619	7/26/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-47-5-102319	10/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-47-5-012920	1/29/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-47-5-012920-DUP	1/29/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-47-5-042820	4/28/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-47-5-072720	7/27/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00086**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-47-5-110220	11/2/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-5-012221	1/22/2021	<0.0054	U		<0.0087	ND,UJ	UJ	<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
	10 ft	VMP-47-10-020215	2/2/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00072**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-47-10-042815	4/28/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-47-10-072115	7/21/2015	<0.0066	U		<0.011	U		**0.0017**	J		<0.0046	U		<0.0058	U		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-47-10-102715	10/27/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-47-10-012916	1/29/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-10-042516	4/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-47-10-080216	8/2/2016	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-47-10-102616	10/26/2016	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0023**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-47-10-020117	2/1/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-10-042717	4/27/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-47-10-072417	7/24/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-10-102617	10/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-10-012618	1/26/2018	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.041**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-47-10-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0007**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-10-071918	7/19/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0029**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-10-102318	10/23/2018	<0.005	U		<0.0081	U		**0.0018**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-10-012919	1/29/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-10-042519	4/25/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-47-10-072619	7/26/2019	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-47-10-102319	10/23/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-47-10-012920	1/29/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-47-10-042820	4/28/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-47-10-042820-DUP	4/28/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-47-10-072720	7/27/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-47-10-110220	11/2/2020	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-10-012221	1/22/2021	<0.0052	U		<0.0084	ND,UJ	UJ	<0.0083	U		<0.0036	U		**0.00059**	J		<0.036	U		<0.0067	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-47-5-020215	2/2/2015	<0.0066	U		<0.0069	U		<0.0061	J	U	<0.0061	U		0.0095			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-5-042815	4/28/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.0014	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-47-5-072115	7/21/2015	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		0.0015	J		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-47-5-102715	10/27/2015	<0.008	U		<0.0084	U		<0.0073	J	UJ	<0.0073	U		<0.007	U		<0.0038	U		0.0019	J		<0.0065	U	
		VMP-47-5-012916	1/29/2016	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0027	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-47-5-042516	4/25/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	J	U	<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-47-5-072516	7/25/2016	**0.0042**	J		0.0017	J		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-47-5-102616	10/26/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0021	J		<0.0034	U		0.0084			**0.0031**	J	
		VMP-47-5-020117	2/1/2017	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0015	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-5-042717	4/27/2017	**0.0027**	J		0.0014	J		<0.0053	U		<0.0053	U		0.0035	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-47-5-072417	7/24/2017	<0.0065	U		0.0011	J		**0.00096**	J		<0.0059	U		0.0024	J		<0.0031	U		0.0044	J		<0.0052	U	
		VMP-47-5-102617	10/26/2017	<0.0064	U		0.0014	J		**0.0026**	J		<0.0059	U		<0.0056	U		<0.003	U		0.0043	J		**0.0023**	J	
		VMP-47-5-012618	1/26/2018	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-47-5-042718	4/27/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-5-071918	7/19/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0017	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-5-102318	10/23/2018	<0.0061	U		0.0018	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-47-5-012919	1/29/2019	<0.006	U		<0.0063	U		**0.21**			**0.022**			0.22			<0.0029	U		0.0063			**0.0019**	J	
		VMP-47-5-042519	4/25/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0031	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-5-072619	7/26/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-5-102319	10/23/2019	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-47-5-012920	1/29/2020	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		0.038		J	<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-47-5-012920-DUP	1/29/2020	<0.0076	U		<0.008	U		**0.0031**	J		<0.007	U		0.15		J	<0.0036	U		0.012			<0.0062	U	
		VMP-47-5-042820	4/28/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-47-5-072720	7/27/2020	**0.0038**	J		0.0023	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-5-110220	11/2/2020	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-47-5-012221	1/22/2021	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
	10 ft	VMP-47-10-020215	2/2/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00056	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-47-10-042815	4/28/2015	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		0.0024	J		<0.0038	U		0.0016	J		<0.0065	U	
		VMP-47-10-072115	7/21/2015	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-47-10-102715	10/27/2015	<0.0075	U		<0.0079	J	U	<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-47-10-012916	1/29/2016	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-47-10-042516	4/25/2016	**0.011**			<0.0084	U		<0.0073	U		<0.0073	U		0.0056	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-47-10-080216	8/2/2016	**0.0043**	J		<0.0063	U		<0.0055	U		<0.0055	U		0.00098	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-47-10-102616	10/26/2016	<0.0063	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0083			**0.002**	J	
		VMP-47-10-020117	2/1/2017	**0.0059**	J		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-10-042717	4/27/2017	**0.0097**			0.0014	J		<0.0057	U		<0.0057	U		0.0045	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-10-072417	7/24/2017	<0.0064	U		0.0021	J		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		0.0026	J		<0.0051	U	
		VMP-47-10-102617	10/26/2017	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0011	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-47-10-012618	1/26/2018	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-47-10-042718	4/27/2018	<0.0065	U		0.002	J		<0.0059	U		<0.0059	U		0.002	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-10-071918	7/19/2018	**0.0021**	J		<0.0067	U		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		0.0018	J		<0.0052	U	
		VMP-47-10-102318	10/23/2018	<0.0064	U		0.0022	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-47-10-012919	1/29/2019	<0.0064	U		0.0012	J		**0.0039**	J		<0.0058	U		0.015			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-47-10-042519	4/25/2019	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-47-10-072619	7/26/2019	<0.0068	U		0.0013	J		<0.0063	U		<0.0063	U		0.0022	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-47-10-102319	10/23/2019	<0.0071	U		0.0012	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0008	J		<0.0057	U	
		VMP-47-10-012920	1/29/2020	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0063	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-47-10-042820	4/28/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-47-10-042820-DUP	4/28/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-47-10-072720	7/27/2020	<0.0063	U		0.0019	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-47-10-072720-DUP	7/27/2020	<0.0064	U		0.0022	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-10-110220	11/2/2020	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-10-012221	1/22/2021	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0028	J		**0.00085**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0017**	J	
		VMP-47-20-042815	4/28/2015	**0.012**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-47-20-072115	7/21/2015	**0.03**	J		**0.028**			**0.0076**	J		<0.016	U		<0.059	U		<0.0034	U		0.034			**0.0065**	J	
		VMP-47-20-102715	10/27/2015	**0.019**	J		<0.004	J	U	<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0064**	J	
		VMP-47-20-012916	1/29/2016	**0.014**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.014			**0.0035**	J	
		VMP-47-20-042516	4/25/2016	**0.015**	J		**0.0013**	J		**0.0025**	J		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-47-20-072516	7/25/2016	**0.025**	J		<0.0046	U		**0.0052**	J		<0.015	U		<0.056	U		<0.0032	U		0.0074	J		<0.017	U	
		VMP-47-20-102616	10/26/2016	**0.012**	J		<0.004	U		**0.0018**	J		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-20-020117	2/1/2017	**0.012**	J		<0.0037	J	U	**0.0028**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0055**	J	
		VMP-47-20-042717	4/27/2017	<0.027	J	U	<0.0036	U		**0.0032**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-47-20-072417	7/24/2017	**0.067**			<0.0038	U		**0.0042**	J		<0.012	U		<0.047	U		<0.0026	U		0.015			**0.0092**	J	
		VMP-47-20-102617	10/26/2017	**0.014**	J		<0.0038	U		**0.0026**	J		<0.012	U		<0.046	U		<0.0026	U		0.003	J		<0.014	U	
		VMP-47-20-012618	1/26/2018	<0.028	J	U	<0.0038	U		**0.0016**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-20-012618-DUP	1/26/2018	<0.027	J	U	<0.0036	U		**0.0017**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-47-20-042718	4/27/2018	**0.017**	J		<0.0039	U		**0.004**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-20-071918	7/19/2018	**0.023**	J		**0.00036**	J		**0.0072**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0038**	J	
		VMP-47-20-102318	10/23/2018	**0.0079**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-20-012919	1/29/2019	**0.01**	J		<0.0033	U		**0.0026**	J		<0.01	U		<0.04	U		<0.0023	U		<0.0097	U		<0.012	U	
		VMP-47-20-042519	4/25/2019	**0.028**	J		<0.004	U		**0.0058**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-20-072619	7/26/2019	**0.017**	J		<0.0039	U		**0.0019**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-20-102319	10/23/2019	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-20-012920	1/29/2020	<0.031	U		<0.0042	U		**0.0027**	J		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-47-20-042820	4/28/2020	**0.016**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-47-20-072720	7/27/2020	**0.013**	J		<0.0038	U		**0.009**			<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-20-110220	11/2/2020	**0.056**			<0.0042	U		**0.0022**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-47-20-012221	1/22/2021	<0.029	J	U	<0.0039	U		**0.0019**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-20-012221-DUP	1/22/2021	**0.013**	J		<0.0038	U		**0.002**	J		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.003**	J		<0.026	U		<0.0064	U	
		VMP-47-20-042815	4/28/2015	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		**0.0042**	J		<0.03	U		<0.0075	U	
		VMP-47-20-072115	7/21/2015	<0.019	J	U	<0.0095	U		<0.007	U		<0.013	U		<0.016	U		**0.027**			<0.031	U		<0.0078	U	
		VMP-47-20-102715	10/27/2015	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0088**			<0.026	U		<0.0066	U	
		VMP-47-20-012916	1/29/2016	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-47-20-042516	4/25/2016	<0.018	U		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		**0.006**	J		<0.03	U		<0.0076	U	
		VMP-47-20-072516	7/25/2016	**0.0036**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.014**			<0.03	U		<0.0074	U	
		VMP-47-20-102616	10/26/2016	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0076**			<0.026	U		<0.0064	U	
		VMP-47-20-020117	2/1/2017	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0057**			<0.024	U		<0.006	U	
		VMP-47-20-042717	4/27/2017	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0079**			<0.024	U		<0.0059	U	
		VMP-47-20-072417	7/24/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.01**			<0.025	U		<0.0062	U	
		VMP-47-20-102617	10/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0085**			<0.024	U		<0.0061	U	
		VMP-47-20-012618	1/26/2018	**0.002**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.006**			<0.024	U		<0.0061	U	
		VMP-47-20-012618-DUP	1/26/2018	**0.003**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0047**	J		<0.024	U		<0.0059	U	
		VMP-47-20-042718	4/27/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.01**			<0.025	U		<0.0063	U	
		VMP-47-20-071918	7/19/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.018**			<0.024	U		<0.0062	U	
		VMP-47-20-102318	10/23/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0028**	J		<0.024	U		<0.006	U	
		VMP-47-20-012919	1/29/2019	<0.013	U		<0.0064	U		<0.0047	U		<0.0087	U		<0.011	U		**0.0094**			<0.021	U		<0.0053	U	
		VMP-47-20-042519	4/25/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.013**			<0.026	U		<0.0065	U	
		VMP-47-20-072619	7/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0087**			<0.026	U		<0.0064	ND,UJ	UJ
		VMP-47-20-102319	10/23/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0031**	J		<0.027	U		<0.0067	U	
		VMP-47-20-012920	1/29/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.014**			<0.027	U		<0.0067	U	
		VMP-47-20-042820	4/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0022**	J		<0.028	U		<0.007	U	
		VMP-47-20-072720	7/27/2020	**0.0023**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.036**			<0.024	U		<0.0061	U	
		VMP-47-20-110220	11/2/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.017**			<0.027	U		<0.0068	U	
		VMP-47-20-012221	1/22/2021	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0073**			<0.025	U		<0.0063	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0077**			<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-47-20-042815	4/28/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0028**	J		<0.0059	U		<0.0059	U	
		VMP-47-20-072115	7/21/2015	**0.0064**			<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		<0.0075	J	U	<0.0061	U		<0.0061	U	
		VMP-47-20-102715	10/27/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-47-20-012916	1/29/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0032**	J		<0.0049	U		<0.0049	U	
		VMP-47-20-042516	4/25/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0022**	J		<0.006	U		<0.0059	U	
		VMP-47-20-072516	7/25/2016	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0026**	J		<0.0058	U		<0.0058	U	
		VMP-47-20-102616	10/26/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-47-20-020117	2/1/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-47-20-042717	4/27/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-47-20-072417	7/24/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-47-20-102617	10/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-47-20-012618	1/26/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-47-20-012618-DUP	1/26/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-47-20-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-47-20-071918	7/19/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-47-20-102318	10/23/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0018**	J		<0.0047	U		<0.0047	U	
		VMP-47-20-012919	1/29/2019	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0025**	J		<0.0041	U		<0.0041	U	
		VMP-47-20-042519	4/25/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-47-20-072619	7/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-47-20-102319	10/23/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-47-20-012920	1/29/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0053	U		<0.0053	U	
		VMP-47-20-042820	4/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-47-20-072720	7/27/2020	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-47-20-110220	11/2/2020	**0.0035**	J		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.004**	J		<0.0053	U		<0.0053	U	
		VMP-47-20-012221	1/22/2021	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-20-042815	4/28/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-47-20-072115	7/21/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-47-20-102715	10/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-47-20-012916	1/29/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0022**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-20-042516	4/25/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-47-20-072516	7/25/2016	<0.0057	U		<0.0057	U		<0.0057	U		**0.017**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-47-20-102616	10/26/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-20-020117	2/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-20-042717	4/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-47-20-072417	7/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0037**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-20-102617	10/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-20-012618	1/26/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-20-012618-DUP	1/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-47-20-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-20-071918	7/19/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-20-102318	10/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-47-20-012919	1/29/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0047	U		<0.0046	U		<0.0046	U		<0.015	U	
		VMP-47-20-042519	4/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-47-20-072619	7/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-20-102319	10/23/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-47-20-012920	1/29/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-47-20-042820	4/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-47-20-072720	7/27/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-20-110220	11/2/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.004**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-47-20-012221	1/22/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	ND,UJ	UJ
		VMP-47-20-012221-DUP	1/22/2021	<0.0048	U		<0.0048	U		<0.0048	U		**0.0019**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-20-042815	4/28/2015	0.0017	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	ND,UJ	UJ	<0.0051	U	
		VMP-47-20-072115	7/21/2015	<0.011	J	U	<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		**0.0044**	J		<0.065	U		**0.015**		
		VMP-47-20-102715	10/27/2015	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-47-20-012916	1/29/2016	0.0078	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0046**	J		<0.051	U		**0.0053**		
		VMP-47-20-042516	4/25/2016	0.0072	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-47-20-072516	7/25/2016	<0.011	U		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		**0.0039**	J		<0.061	U		**0.0016**	J	
		VMP-47-20-102616	10/26/2016	0.014			**0.0069**			<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0014**	J	
		VMP-47-20-020117	2/1/2017	0.011			**0.0041**	J		0.052			<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-47-20-042717	4/27/2017	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-47-20-072417	7/24/2017	0.058			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0015**	J	
		VMP-47-20-102617	10/26/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-47-20-012618	1/26/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-47-20-012618-DUP	1/26/2018	0.0051	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-47-20-042718	4/27/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-20-071918	7/19/2018	0.0045	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-20-102318	10/23/2018	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-47-20-012919	1/29/2019	<0.0077	U		<0.0044	U		<0.005	U		<0.0078	U		<0.0072	U		<0.0042	U		<0.044	U		<0.0036	U	
		VMP-47-20-042519	4/25/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-47-20-072619	7/26/2019	0.0036	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-20-102319	10/23/2019	0.0085	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-47-20-012920	1/29/2020	<0.0098	ND,UJ	UJ	<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-47-20-042820	4/28/2020	0.0094	J	J	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-47-20-072720	7/27/2020	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-47-20-110220	11/2/2020	0.059		J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-47-20-012221	1/22/2021	0.018	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0014**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					<0.012	J	U	<0.0061	U	
		VMP-47-20-042815	4/28/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		**0.0021**	J					**0.042**			<0.0071	U	
		VMP-47-20-072115	7/21/2015	**0.0033**	J	J	0.072			<0.0074	U		<0.0062	U		**0.0022**	J					<0.015	J	U	<0.0074	U	
		VMP-47-20-102715	10/27/2015	<0.021	U		0.0021	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.0066**	J	J	<0.0062	U	
		VMP-47-20-012916	1/29/2016	<0.02	U		0.0052	J		<0.0059	U		<0.0049	U		<0.0043	U					**0.017**			<0.0059	U	
		VMP-47-20-042516	4/25/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					<0.014	J	U	<0.0072	U	
		VMP-47-20-072516	7/25/2016	<0.024	U		0.0098	J		<0.0071	U		<0.0059	U		<0.021	U					**0.014**	J		<0.0071	U	
		VMP-47-20-102616	10/26/2016	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.012**	J		<0.0061	U	
		VMP-47-20-020117	2/1/2017	**0.0071**	J		<0.014	U		**0.027**			<0.0048	U		<0.017	U					**0.005**	J		**0.13**		
		VMP-47-20-042717	4/27/2017	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0019**	J		<0.0056	U	
		VMP-47-20-072417	7/24/2017	<0.02	U		0.0047	J		<0.0059	U		<0.0049	U		<0.017	U					**0.073**			<0.0059	U	
		VMP-47-20-102617	10/26/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-47-20-012618	1/26/2018	<0.019	U		0.01	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	J	U	<0.0058	U	
		VMP-47-20-012618-DUP	1/26/2018	<0.019	U		0.021			<0.0056	U		<0.0047	U		<0.016	U					**0.007**	J		<0.0056	U	
		VMP-47-20-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-47-20-071918	7/19/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0024**	J		<0.0058	U	
		VMP-47-20-102318	10/23/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-47-20-012919	1/29/2019	<0.017	U		<0.012	U		<0.005	U		<0.0042	U		<0.015	U					<0.01	U		<0.005	U	
		VMP-47-20-042519	4/25/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-47-20-072619	7/26/2019	<0.02	U		<0.014	U		**0.00098**	J		<0.005	U		<0.018	U					<0.012	U		**0.0025**	J	
		VMP-47-20-102319	10/23/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-47-20-012920	1/29/2020	<0.021	U		<0.015	U	UJ	<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		**0.0032**	J	
		VMP-47-20-042820	4/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0052**	J		<0.0066	U	
		VMP-47-20-072720	7/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0089**	J		<0.0058	U	
		VMP-47-20-110220	11/2/2020	<0.022	U		0.022			<0.0065	U		<0.0054	U		<0.019	U					**0.067**			<0.0065	U	
		VMP-47-20-012221	1/22/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0055**	J		<0.006	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0092**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-47-20-042815	4/28/2015	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-47-20-072115	7/21/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-47-20-102715	10/27/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0022**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-47-20-012916	1/29/2016	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.003**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-20-042516	4/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-47-20-072516	7/25/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		**0.002**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-47-20-102616	10/26/2016	<0.0053	U		<0.0085	U		**0.022**			<0.0037	U		**0.0034**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-47-20-020117	2/1/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-20-042717	4/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.0042**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-47-20-072417	7/24/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0013**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-47-20-102617	10/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-47-20-012618	1/26/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0059**		J	<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-20-012618-DUP	1/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		**0.0023**	J		**0.015**		J	<0.034	U		<0.0062	U		<0.0062	U	
		VMP-47-20-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-20-071918	7/19/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-20-102318	10/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-20-012919	1/29/2019	<0.0044	U		<0.007	U		<0.007	U		<0.003	U		<0.0039	U		<0.03	U		<0.0056	U		<0.0056	U	
		VMP-47-20-042519	4/25/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-47-20-072619	7/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-47-20-102319	10/23/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-47-20-012920	1/29/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-47-20-042820	4/28/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-47-20-072720	7/27/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-47-20-110220	11/2/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0021**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-47-20-012221	1/22/2021	<0.0052	U		<0.0084	ND,UJ	UJ	<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0051	U		<0.0083	ND,UJ	UJ	<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-47	20 ft	VMP-47-20-020215	2/2/2015	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-20-042815	4/28/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-47-20-072115	7/21/2015	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		0.16			<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-47-20-102715	10/27/2015	<0.0068	U		<0.0071	J	U	<0.0062	J	UJ	<0.0062	U		0.0014	J		<0.0032	U		0.0012	J		<0.0055	U	
		VMP-47-20-012916	1/29/2016	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		0.0035	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-20-042516	4/25/2016	**0.0042**	J		<0.0082	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-47-20-072516	7/25/2016	**0.0033**	J		0.0014	J		<0.0071	U		<0.0071	U		0.003	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-47-20-102616	10/26/2016	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	J	U	<0.0032	U		0.028			**0.0074**		
		VMP-47-20-020117	2/1/2017	**0.0014**	J		<0.0065	U		**0.19**			**0.02**			0.0048	J		<0.003	U		0.0029	J		<0.005	U	
		VMP-47-20-042717	4/27/2017	**0.0043**	J		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-47-20-072417	7/24/2017	<0.0064	U		0.0012	J		<0.0059	U		<0.0059	U		0.0014	J		<0.0031	U		0.0024	J		<0.0052	U	
		VMP-47-20-102617	10/26/2017	<0.0063	U		0.00098	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0012	J		<0.0051	U	
		VMP-47-20-012618	1/26/2018	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-47-20-012618-DUP	1/26/2018	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-47-20-042718	4/27/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-20-071918	7/19/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-47-20-102318	10/23/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-20-012919	1/29/2019	<0.0055	U		0.0013	J		<0.005	U		<0.005	U		<0.0048	U		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-47-20-042519	4/25/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-47-20-072619	7/26/2019	<0.0066	U		0.0011	J		<0.0061	U		<0.0061	U		0.0096			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-20-102319	10/23/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-47-20-012920	1/29/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-47-20-042820	4/28/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-47-20-072720	7/27/2020	<0.0063	U		0.002	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-47-20-110220	11/2/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-47-20-012221	1/22/2021	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-47-20-012221-DUP	1/22/2021	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00053	J		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	**0.011**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0042**	J	
		VMP-47-30-020215-DUP	2/2/2015	**0.014**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0049**	J	
		VMP-47-30-042815	4/28/2015	**0.017**	J		<0.0038	U		**0.002**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-30-042815-DUP	4/28/2015	**0.026**	J		<0.0046	U		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		**0.0098**	J	
		VMP-47-30-072115	7/21/2015	**0.047**			**0.0034**	J		**0.0058**	J		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.012**	J	
		VMP-47-30-102715	10/27/2015	**0.026**	J		<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.011**	J	
		VMP-47-30-102715-DUP	10/27/2015	**0.022**	J		<0.0039	J	U	<0.0082	J	U	<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.01**	J	
		VMP-47-30-012916-DUP	1/29/2016	**0.011**	J		**0.002**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		0.0085	J		**0.0022**	J	
		VMP-47-30-042516	4/25/2016	**0.044**			**0.0047**			**0.0055**	J		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.01**	J	
		VMP-47-30-042516-DUP	4/25/2016	**0.039**	J		**0.0022**	J		**0.0054**	J		<0.017	U		<0.065	U		<0.0037	U		<0.016	U		**0.0092**	J	
		VMP-47-30-072516	7/25/2016	<0.034	U		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-47-30-102616	10/26/2016	**0.026**	J		**0.0016**	J		**0.006**	J		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0092**	J	
		VMP-47-30-020117	2/1/2017	<0.028	J	U	<0.0037	J	U	**0.0036**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-30-020117-Dup	2/1/2017	**0.011**	J		<0.0037	J	U	**0.004**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0028**	J	
		VMP-47-30-042717	4/27/2017	**0.045**			<0.0036	U		**0.0079**			<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0046**	J	
		VMP-47-30-072417	7/24/2017	**0.023**	J		**0.001**	J		**0.011**			<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0046**	J	
		VMP-47-30-102617	10/26/2017	<0.029	J	U	<0.0039	J	U	**0.0042**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-30-012618	1/26/2018	**0.011**	J		<0.0037	U		**0.0019**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-30-042718	4/27/2018	**0.013**	J		**0.0015**	J		**0.0073**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-30-042718-DUP	4/27/2018	**0.014**	J		**0.0014**	J		**0.006**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0037**	J	
		VMP-47-30-071918	7/19/2018	**0.019**	J		**0.00037**	J		**0.021**			<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-47-30-102318	10/23/2018	**0.018**	J		<0.0038	U		**0.0058**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-30-050319	5/3/2019	**0.018**	J		<0.0038	U		**0.012**			<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-30-072619	7/26/2019	**0.01**	J		<0.004	U		**0.0034**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-47-30-102319	10/23/2019	**0.014**	J		<0.0043	U		**0.0045**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-47-30-012920	1/29/2020	<0.034	U		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-47-30-042820	4/28/2020	**0.021**	J		<0.0043	U		**0.0035**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-47-30-072720	7/27/2020	**0.024**	J		<0.0039	U		**0.0035**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-47-30-110220	11/2/2020	**0.016**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-47-30-110220-DUP	11/2/2020	**0.023**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-47-30-012221	1/22/2021	<0.03	J	U	<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
	5 ft	VMP-48-5-020215	2/2/2015	**0.025**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0042**	J	
		VMP-48-5-042815	4/28/2015	**0.02**	J		**0.0049**			<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.03**		
		VMP-48-5-072115	7/21/2015	**0.014**	J		<0.0048	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.0023**	J	
		VMP-48-5-102015	10/20/2015	**0.018**	J		**0.0014**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0041**	J	
		VMP-48-5-012916	1/29/2016	**0.016**	J		<0.005	U		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		**0.0023**	J	
		VMP-48-5-042516	4/25/2016	**0.012**	J		**0.0014**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-48-5-072516	7/25/2016	**0.028**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-48-5-102616	10/26/2016	**0.02**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0047**	J	
		VMP-48-5-012617	1/26/2017	**0.008**	J		<0.0039	J	U	<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-5-042617	4/26/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0042**	J	
		VMP-48-5-072117	7/21/2017	**0.023**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0049**	J	
		VMP-48-5-103117	10/31/2017	**0.015**	J		**0.0008**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0042**	J	
		VMP-48-5-012618	1/26/2018	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-5-042718	4/27/2018	**0.022**	J		<0.01	U		<0.022	U		<0.033	U		<0.12	U		<0.0071	U		<0.031	U		<0.038	U	
		VMP-48-5-072418	7/24/2018	**0.026**			**0.00029**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0042**	J	
		VMP-48-5-102418	10/24/2018	**0.011**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-5-012319	1/23/2019	**0.058**			<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0054**	J	
		VMP-48-5-042619	4/26/2019	**0.014**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-5-072619	7/26/2019	**0.02**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-48-5-102119	10/21/2019	**0.01**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-5-012920	1/29/2020	**0.011**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-48-5-042420	4/24/2020	**0.038**			<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-48-5-073020	7/30/2020	**0.045**			<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.003**	J	
		VMP-48-5-110220	11/2/2020	**0.014**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-5-012521	1/25/2021	**0.014**	J		**0.00081**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0019**	J		<0.027	U		<0.0068	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0018**	J		<0.026	U		<0.0064	U	
		VMP-47-30-042815	4/28/2015	**0.002**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0069**			<0.024	U		<0.0062	U	
		VMP-47-30-042815-DUP	4/28/2015	**0.016**	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.007**			<0.029	U		<0.0074	U	
		VMP-47-30-072115	7/21/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.039**			<0.03	U		<0.0077	U	
		VMP-47-30-102715	10/27/2015	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.015**			<0.024	U		<0.0059	U	
		VMP-47-30-102715-DUP	10/27/2015	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.014**			<0.025	U		<0.0063	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0025**	J		<0.026	U		<0.0064	U	
		VMP-47-30-042516	4/25/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.013**			<0.03	U		<0.0076	U	
		VMP-47-30-042516-DUP	4/25/2016	**0.0042**	J		<0.01	U		<0.0077	U		<0.014	U		<0.018	U		**0.014**			<0.034	U		<0.0086	U	
		VMP-47-30-072516	7/25/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.013**			<0.03	U		<0.0074	U	
		VMP-47-30-102616	10/26/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.017**			<0.028	U		<0.0071	U	
		VMP-47-30-020117	2/1/2017	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.01**			<0.024	U		<0.006	U	
		VMP-47-30-020117-Dup	2/1/2017	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.011**			<0.024	U		<0.006	U	
		VMP-47-30-042717	4/27/2017	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.016**			<0.024	U		<0.0059	U	
		VMP-47-30-072417	7/24/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.03**			<0.026	U		<0.0065	U	
		VMP-47-30-102617	10/26/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.011**			<0.026	U		<0.0064	U	
		VMP-47-30-012618	1/26/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.007**			<0.024	U		<0.006	U	
		VMP-47-30-042718	4/27/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.015**			<0.025	U		<0.0063	U	
		VMP-47-30-042718-DUP	4/27/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.016**			<0.024	U		<0.0062	U	
		VMP-47-30-071918	7/19/2018	**0.0072**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.054**			<0.025	U		<0.0063	U	
		VMP-47-30-102318	10/23/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.017**			<0.025	U		<0.0062	U	
		VMP-47-30-050319	5/3/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.025**			<0.025	U		<0.0062	U	
		VMP-47-30-072619	7/26/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.018**			<0.026	U		<0.0065	ND,UJ	UJ
		VMP-47-30-102319	10/23/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.013**			<0.028	U		<0.007	U	
		VMP-47-30-012920	1/29/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0078**			<0.029	U		<0.0074	U	
		VMP-47-30-042820	4/28/2020	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		**0.0056**	J		<0.028	U		<0.0069	U	
		VMP-47-30-072720	7/27/2020	**0.002**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.014**			<0.025	U		<0.0063	U	
		VMP-47-30-110220	11/2/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0071**			<0.024	U		<0.006	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0066**			<0.023	U		<0.0058	U	
		VMP-47-30-012221	1/22/2021	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
	5 ft	VMP-48-5-020215	2/2/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		**0.0077**	J		<0.007	U	
		VMP-48-5-042815	4/28/2015	**0.001**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-48-5-072115	7/21/2015	<0.019	J	U	<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.003**	J		<0.031	U		<0.0077	U	
		VMP-48-5-102015	10/20/2015	**0.0032**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-48-5-012916	1/29/2016	<0.02	J	U	<0.0099	U		<0.0072	U		<0.013	U		<0.017	U		<0.0077	U		<0.032	U		<0.0082	U	
		VMP-48-5-042516	4/25/2016	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-48-5-072516	7/25/2016	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0028**	J		<0.031	U		<0.0079	U	
		VMP-48-5-102616	10/26/2016	**0.0026**	J		<0.0071	U		**0.0021**	J		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-48-5-012617	1/26/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-48-5-042617	4/26/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-48-5-072117	7/21/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-48-5-103117	10/31/2017	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-48-5-012618	1/26/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-48-5-042718	4/27/2018	**0.0027**	J		<0.02	U		<0.015	U		<0.027	U		<0.034	U		<0.016	U		<0.066	U		<0.017	U	
		VMP-48-5-072418	7/24/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-48-5-102418	10/24/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-48-5-012319	1/23/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-48-5-042619	4/26/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-48-5-072619	7/26/2019	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0026**	J		<0.027	U		<0.0067	U	
		VMP-48-5-102119	10/21/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0014**	J		<0.026	U		<0.0065	U	
		VMP-48-5-012920	1/29/2020	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.004**	J		<0.03	U	UJ	<0.0075	U	
		VMP-48-5-042420	4/24/2020	**0.0041**	J		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0018**	J		<0.03	U		<0.0076	U	
		VMP-48-5-073020	7/30/2020	**0.0026**	J		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0081**			<0.023	U		<0.0059	U	
		VMP-48-5-110220	11/2/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0011**	J		<0.024	U		<0.006	U	
		VMP-48-5-012521	1/25/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-47-30-042815	4/28/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-47-30-042815-DUP	4/28/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0027**	J		<0.0058	U		<0.0058	U	
		VMP-47-30-072115	7/21/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	J	U	<0.006	U		<0.006	U	
		VMP-47-30-102715	10/27/2015	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-47-30-102715-DUP	10/27/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-47-30-042516	4/25/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0023**	J		<0.0059	U		<0.0059	U	
		VMP-47-30-042516-DUP	4/25/2016	<0.0057	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0046**	J		<0.0067	U		<0.0067	U	
		VMP-47-30-072516	7/25/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-47-30-102616	10/26/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0027**	J		<0.0056	U		<0.0056	U	
		VMP-47-30-020117	2/1/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0033**	J		<0.0047	U		<0.0047	U	
		VMP-47-30-020117-Dup	2/1/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0047	U		<0.0047	U	
		VMP-47-30-042717	4/27/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0034**	J		<0.0046	U		<0.0046	U	
		VMP-47-30-072417	7/24/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-47-30-102617	10/26/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-47-30-012618	1/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0032**	J		<0.0047	U		<0.0047	U	
		VMP-47-30-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-47-30-042718-DUP	4/27/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-47-30-071918	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-47-30-102318	10/23/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0035**	J		<0.0048	U		<0.0048	U	
		VMP-47-30-050319	5/3/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-47-30-072619	7/26/2019	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-47-30-102319	10/23/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0029**	J		<0.0054	U		<0.0054	U	
		VMP-47-30-012920	1/29/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-47-30-042820	4/28/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-47-30-072720	7/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-47-30-110220	11/2/2020	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0078**			<0.0047	U		<0.0047	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0065**			<0.0045	U		<0.0045	U	
		VMP-47-30-012221	1/22/2021	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
	5 ft	VMP-48-5-020215	2/2/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-48-5-042815	4/28/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-48-5-072115	7/21/2015	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0026**	J		<0.006	U		<0.006	U	
		VMP-48-5-102015	10/20/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0039**	J		<0.0055	U		<0.0055	U	
		VMP-48-5-012916	1/29/2016	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0018**	J		<0.0064	U		<0.0064	U	
		VMP-48-5-042516	4/25/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-48-5-072516	7/25/2016	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0032**	J		<0.0062	U		<0.0062	U	
		VMP-48-5-102616	10/26/2016	**0.0073**			<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-48-5-012617	1/26/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-48-5-042617	4/26/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-48-5-072117	7/21/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-48-5-103117	10/31/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-48-5-012618	1/26/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-48-5-042718	4/27/2018	<0.011	U		<0.025	U		<0.019	U		<0.019	U		<0.019	U		<0.016	U		<0.013	U		<0.013	U	
		VMP-48-5-072418	7/24/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-48-5-102418	10/24/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-48-5-012319	1/23/2019	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-48-5-042619	4/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-48-5-072619	7/26/2019	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-48-5-102119	10/21/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-48-5-012920	1/29/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-48-5-042420	4/24/2020	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0029**	J		<0.0059	U		<0.0059	U	
		VMP-48-5-073020	7/30/2020	**0.00038**	J		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-48-5-110220	11/2/2020	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-48-5-012521	1/25/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-30-042815	4/28/2015	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-30-042815-DUP	4/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		**0.006**	J	
		VMP-47-30-072115	7/21/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-47-30-102715	10/27/2015	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	J	U	<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-47-30-102715-DUP	10/27/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	J	U	<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-30-042516	4/25/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-47-30-042516-DUP	4/25/2016	<0.0066	U		<0.0066	U		<0.0066	U		<0.058	U		<0.0077	U		<0.0076	U		<0.0076	U		<0.024	U	
		VMP-47-30-072516	7/25/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-47-30-102616	10/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-47-30-020117	2/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-30-020117-Dup	2/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-47-30-042717	4/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0042**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-47-30-072417	7/24/2017	<0.005	U		<0.005	U		<0.005	U		**0.0047**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-47-30-102617	10/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-47-30-012618	1/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-30-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0035**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-30-042718-DUP	4/27/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-30-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-47-30-102318	10/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0037**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-30-050319	5/3/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-47-30-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-47-30-102319	10/23/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-47-30-012920	1/29/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-47-30-042820	4/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-47-30-072720	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-47-30-110220	11/2/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-47-30-012221	1/22/2021	<0.005	U		<0.005	U		<0.005	U		**0.0032**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	ND,UJ	UJ
	5 ft	VMP-48-5-020215	2/2/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-48-5-042815	4/28/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-48-5-072115	7/21/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-48-5-102015	10/20/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	J	U	<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-48-5-012916	1/29/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.055	U		<0.0073	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-48-5-042516	4/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-48-5-072516	7/25/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-48-5-102616	10/26/2016	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-48-5-012617	1/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-5-042617	4/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-5-072117	7/21/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-48-5-103117	10/31/2017	<0.0043	U		<0.0043	U		<0.0043	U		**0.0031**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-48-5-012618	1/26/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-5-042718	4/27/2018	<0.013	U		<0.013	U		<0.013	U		<0.11	U		<0.015	U		<0.015	U		<0.015	U		<0.046	U	
		VMP-48-5-072418	7/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-48-5-102418	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-5-012319	1/23/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		**0.014**	J	
		VMP-48-5-042619	4/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-5-072619	7/26/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-48-5-102119	10/21/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-48-5-012920	1/29/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-48-5-042420	4/24/2020	<0.0058	U		<0.0058	U		<0.0058	U		**0.0029**	J		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-48-5-073020	7/30/2020	<0.0045	U		0.00093	J		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		**0.0017**	J	
		VMP-48-5-110220	11/2/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-48-5-012521	1/25/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-30-042815	4/28/2015	0.003	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	ND,UJ	UJ	**0.0023**	J	
		VMP-47-30-042815-DUP	4/28/2015	0.0039	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0058	U		<0.061	ND,UJ	UJ	<0.005	U	
		VMP-47-30-072115	7/21/2015	0.018		J	<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.002**	J	
		VMP-47-30-102715	10/27/2015	<0.0086	J	U	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-47-30-102715-DUP	10/27/2015	0.0096			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.0094	U		**0.0047**	J		0.0018	J	J	<0.0095	U		<0.0087	U		**0.0085**			<0.053	U		**0.02**		
		VMP-47-30-042516	4/25/2016	0.013			**0.013**			0.015			<0.011	U		<0.01	U		<0.006	J	U	<0.062	U		**0.0042**	J	
		VMP-47-30-042516-DUP	4/25/2016	0.003	J		<0.0072	U		<0.0082	U		<0.013	U		<0.012	U		<0.0068	J	U	<0.071	U		<0.0059	J	U
		VMP-47-30-072516	7/25/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-47-30-102616	10/26/2016	0.009	J		**0.032**			0.0034	J		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-47-30-020117	2/1/2017	<0.0088	U		<0.005	U		0.0084			<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-47-30-020117-Dup	2/1/2017	0.014			<0.005	U		0.0064			<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-47-30-042717	4/27/2017	0.023			**0.0017**	J		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		**0.0012**	J	
		VMP-47-30-072417	7/24/2017	<0.0094	U		**0.017**			0.0073			<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-30-102617	10/26/2017	0.0079	J		**0.0026**	J		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-47-30-012618	1/26/2018	0.0067	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-47-30-042718	4/27/2018	0.027			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-30-042718-DUP	4/27/2018	0.024			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-30-071918	7/19/2018	0.0046	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-30-102318	10/23/2018	0.0084	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-30-050319	5/3/2019	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	ND,UJ		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-47-30-072619	7/26/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-47-30-102319	10/23/2019	0.014			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-47-30-012920	1/29/2020	<0.011	ND,UJ	UJ	<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-47-30-042820	4/28/2020	0.0071	J	J	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-47-30-072720	7/27/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-47-30-110220	11/2/2020	0.012	J	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-47-30-110220-DUP	11/2/2020	0.0094	J	J	<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-47-30-012221	1/22/2021	<0.024	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
	5 ft	VMP-48-5-020215	2/2/2015	0.0088	J		<0.0059	U		0.0036	J		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-48-5-042815	4/28/2015	0.0081	J		**0.0018**	J		0.0027	J		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		**0.0018**	J	
		VMP-48-5-072115	7/21/2015	0.025			<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-48-5-102015	10/20/2015	0.0063	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	ND,UJ	UJ	<0.0048	U	
		VMP-48-5-012916	1/29/2016	0.011	J		<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		<0.0056	U	
		VMP-48-5-042516	4/25/2016	0.0042	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	J	U
		VMP-48-5-072516	7/25/2016	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-48-5-102616	10/26/2016	0.017			**0.0022**	J		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	J	U
		VMP-48-5-012617	1/26/2017	0.0087	J		**0.0014**	J		0.0011	J		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.00096**	J	
		VMP-48-5-042617	4/26/2017	0.0055	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-5-072117	7/21/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-5-103117	10/31/2017	0.012			<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-48-5-012618	1/26/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-5-042718	4/27/2018	3			<0.014	U		<0.016	U		<0.025	U		<0.022	U		<0.013	U		<0.14	U		<0.011	U	
		VMP-48-5-072418	7/24/2018	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-48-5-102418	10/24/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-5-012319	1/23/2019	0.022			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-48-5-042619	4/26/2019	0.0036	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-48-5-072619	7/26/2019	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-48-5-102119	10/21/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-48-5-012920	1/29/2020	<0.011	ND,UJ	UJ	<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-48-5-042420	4/24/2020	0.016		J	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0052	U	
		VMP-48-5-073020	7/30/2020	<0.0086	U		**0.00056**	J		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-48-5-110220	11/2/2020	0.008	J	J	<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-48-5-012521	1/25/2021	1.3			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.022	U		0.002	J		<0.0065	U		**0.0011**	J		<0.0048	U					**0.0068**	J		<0.0065	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.02	U		0.0021	J		<0.0061	U		<0.005	U		<0.0044	U					**0.011**	J		<0.0061	U	
		VMP-47-30-042815	4/28/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		**0.0018**	J					**0.0079**	J		<0.0058	U	
		VMP-47-30-042815-DUP	4/28/2015	<0.023	U		0.0031	J		<0.007	U		<0.0058	U		**0.00082**	J					**0.0059**	J		<0.007	U	
		VMP-47-30-072115	7/21/2015	**0.0069**	J	J	0.005	J		**0.0024**	J		<0.0061	U		**0.0028**	J					**0.021**			<0.0073	U	
		VMP-47-30-102715	10/27/2015	<0.019	U		0.0045	J		<0.0056	U		<0.0047	U		<0.0041	U					**0.011**	J	J	<0.0056	U	
		VMP-47-30-102715-DUP	10/27/2015	<0.02	U		0.0044	J		<0.006	U		<0.005	U		<0.0044	U					**0.013**		J	<0.006	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.02	U		0.025			<0.0061	U		<0.0051	U		<0.0045	U					**0.0064**	J		<0.0061	U	
		VMP-47-30-042516	4/25/2016	<0.024	U		<0.017	U		**0.0028**	J		<0.006	U		<0.0053	U					<0.014	J	U	**0.0048**	J	
		VMP-47-30-042516-DUP	4/25/2016	<0.027	U		<0.02	U		<0.0082	U		<0.0068	U		<0.006	U					**0.012**	J		<0.0082	U	
		VMP-47-30-072516	7/25/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.021	U					<0.014	U		<0.007	U	
		VMP-47-30-102616	10/26/2016	<0.023	U		<0.016	U		<0.0068	U		**0.004**	J		<0.02	U		**0.00085**	J	J	**0.0068**	J		<0.0068	J	U
		VMP-47-30-020117	2/1/2017	<0.019	U		0.0045	J		**0.0072**			<0.0048	U		<0.017	U					<0.011	U		**0.035**		
		VMP-47-30-020117-Dup	2/1/2017	<0.019	U		0.0038	J		**0.0045**	J		<0.0047	U		<0.017	U					<0.011	U		**0.027**		
		VMP-47-30-042717	4/27/2017	<0.019	U		0.13			<0.0056	U		<0.0047	U		<0.016	U					**0.013**			<0.0056	U	
		VMP-47-30-072417	7/24/2017	<0.02	U		<0.015	U		**0.0012**	J		**0.0019**	J		<0.018	U					**0.01**	J		**0.0016**	J	
		VMP-47-30-102617	10/26/2017	<0.02	U		0.0035	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-47-30-012618	1/26/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	J	U	<0.0057	U	
		VMP-47-30-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-47-30-042718-DUP	4/27/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-47-30-071918	7/19/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0016**	J		<0.0059	U	
		VMP-47-30-102318	10/23/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0043**	J		<0.0059	U	
		VMP-47-30-050319	5/3/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-47-30-072619	7/26/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-47-30-102319	10/23/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-47-30-012920	1/29/2020	<0.023	U		<0.017	U	UJ	<0.007	U		<0.0058	U		<0.02	U					<0.014	U		<0.007	U	
		VMP-47-30-042820	4/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0038**	J		<0.0066	U	
		VMP-47-30-072720	7/27/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0047**	J		<0.006	U	
		VMP-47-30-110220	11/2/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0095**	J		<0.0057	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0098**	J		<0.0055	U	
		VMP-47-30-012221	1/22/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0088**	J		<0.0063	U	
	5 ft	VMP-48-5-020215	2/2/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0041**	J		<0.0067	U	
		VMP-48-5-042815	4/28/2015	**0.0033**	J		0.011	J		<0.0064	U		**0.0071**			<0.0047	U					**0.02**			<0.0064	U	
		VMP-48-5-072115	7/21/2015	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					<0.015	U		<0.0073	U	
		VMP-48-5-102015	10/20/2015	<0.022	U		0.0049	J		<0.0067	U		**0.002**	J		<0.0049	U					**0.0029**	J		<0.0067	U	
		VMP-48-5-012916	1/29/2016	<0.026	U		0.0075	J		<0.0077	U		<0.0064	U		<0.0057	U					**0.024**			<0.0077	U	
		VMP-48-5-042516	4/25/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0047	U					<0.013	J	U	<0.0065	U	
		VMP-48-5-072516	7/25/2016	<0.025	U		<0.018	U		<0.0075	U		<0.0062	U		<0.022	U					**0.021**			<0.0075	U	
		VMP-48-5-102616	10/26/2016	<0.018	U		0.0068	J		<0.0056	U		<0.0046	U		<0.016	U		<0.012	U		**0.045**			<0.0056	U	
		VMP-48-5-012617	1/26/2017	<0.02	U		<0.014	U		**0.0005**	J		<0.005	U		<0.018	U					**0.0052**	J		**0.0015**	J	
		VMP-48-5-042617	4/26/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0019**	J		<0.0059	U	
		VMP-48-5-072117	7/21/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.013**			<0.0059	U	
		VMP-48-5-103117	10/31/2017	<0.018	U		0.003	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-48-5-012618	1/26/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	J	U	<0.0058	U	
		VMP-48-5-042718	4/27/2018	<0.053	U		<0.038	U		<0.016	U		<0.013	U		<0.046	U					**0.02**	J		<0.016	U	
		VMP-48-5-072418	7/24/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-48-5-102418	10/24/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0015**	J		<0.0059	U	
		VMP-48-5-012319	1/23/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.014**			<0.0055	U	
		VMP-48-5-042619	4/26/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0019**	J		<0.0061	U	
		VMP-48-5-072619	7/26/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.063**			<0.0064	U	
		VMP-48-5-102119	10/21/2019	<0.021	U		<0.015	U		**0.0018**	J		<0.0052	U		<0.018	U					<0.012	U		**0.0047**	J	
		VMP-48-5-012920	1/29/2020	<0.024	U		<0.017	U	UJ	<0.0071	U		<0.0059	U		<0.021	U					**0.0056**	J		<0.0071	U	
		VMP-48-5-042420	4/24/2020	<0.024	U		0.0038	J		<0.0072	U		<0.006	U		<0.021	U					**0.023**			<0.0072	U	
		VMP-48-5-073020	7/30/2020	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0021**	J		**0.001**	J	
		VMP-48-5-110220	11/2/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					**0.02**			<0.0057	U	
		VMP-48-5-012521	1/25/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.045**			<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-47-30-042815	4/28/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-30-042815-DUP	4/28/2015	<0.0061	U		<0.0098	U		<0.0097	U		**0.0044**			<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-47-30-072115	7/21/2015	<0.0063	U		<0.01	U		**0.0022**	J		<0.0044	U		**0.003**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-47-30-102715	10/27/2015	<0.0049	U		<0.0079	U		**0.0024**	J		<0.0034	U		**0.0011**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-47-30-102715-DUP	10/27/2015	<0.0052	U		<0.0084	U		**0.0025**	J		<0.0036	U		**0.0011**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.015**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-47-30-042516	4/25/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.0072**			<0.043	U		<0.008	U		<0.008	U	
		VMP-47-30-042516-DUP	4/25/2016	<0.0071	U		<0.011	U		<0.011	U		<0.0049	U		<0.0063	J	U	<0.049	U		<0.0091	U		<0.0091	U	
		VMP-47-30-072516	7/25/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-47-30-102616	10/26/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0086**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-47-30-020117	2/1/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-47-30-020117-Dup	2/1/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-30-042717	4/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.012**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-47-30-072417	7/24/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0041**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-47-30-102617	10/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0019**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-47-30-012618	1/26/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-47-30-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-30-042718-DUP	4/27/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-30-071918	7/19/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-30-102318	10/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-47-30-050319	5/3/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-47-30-072619	7/26/2019	<0.0054	U		<0.0087	U		**0.0035**	J		<0.0037	U		**0.0016**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-47-30-102319	10/23/2019	<0.0057	U		<0.0092	U		**0.0019**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-47-30-012920	1/29/2020	<0.006	U		<0.0097	U		**0.0063**	J		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-47-30-042820	4/28/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-47-30-072720	7/27/2020	<0.0052	U		<0.0083	U		**0.0064**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-47-30-110220	11/2/2020	<0.0049	U		<0.008	U		**0.0045**	J		<0.0034	U		**0.00058**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.0048	U		<0.0077	U		**0.012**			<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-47-30-012221	1/22/2021	<0.0054	U		<0.0088	ND,UJ	UJ	<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
	5 ft	VMP-48-5-020215	2/2/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0012**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-5-042815	4/28/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0036**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-48-5-072115	7/21/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-48-5-102015	10/20/2015	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-5-012916	1/29/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		**0.0043**	J		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-48-5-042516	4/25/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	J	U	<0.039	U		<0.0072	U		<0.0072	U	
		VMP-48-5-072516	7/25/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.00082**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-48-5-102616	10/26/2016	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.011**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-48-5-012617	1/26/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00092**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-48-5-042617	4/26/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0028**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-48-5-072117	7/21/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-5-103117	10/31/2017	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.00084**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-48-5-012618	1/26/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0012**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-48-5-042718	4/27/2018	<0.014	U		<0.022	U		<0.022	U		<0.0095	U		<0.012	U		<0.096	U		<0.018	U		<0.018	U	
		VMP-48-5-072418	7/24/2018	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-48-5-102418	10/24/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-48-5-012319	1/23/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-48-5-042619	4/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00098**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-48-5-072619	7/26/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-48-5-102119	10/21/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-48-5-012920	1/29/2020	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-48-5-042420	4/24/2020	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.0014**	J		<0.043	U		<0.008	U		<0.008	U	
		VMP-48-5-073020	7/30/2020	<0.0077	U		<0.0078	U		**0.046**			<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-48-5-110220	11/2/2020	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-48-5-012521	1/25/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-47-30-020215	2/2/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.025			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-47-30-020215-DUP	2/2/2015	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.024			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-47-30-042815	4/28/2015	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-47-30-042815-DUP	4/28/2015	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-47-30-072115	7/21/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-47-30-102715	10/27/2015	<0.0062	U		<0.0064	J	U	<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-47-30-102715-DUP	10/27/2015	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0018	J		<0.0031	U		0.0013	J		<0.0053	U	
		VMP-47-30-012916-DUP	1/29/2016	<0.0067	U		<0.007	U		<0.0061	J	U	<0.0061	U		0.022			<0.0032	U		0.01			**0.0038**	J	
		VMP-47-30-042516	4/25/2016	**0.0061**	J		0.0016	J		**0.018**		J	**0.0078**			0.0097			<0.0037	U		0.031		J	**0.0064**		
		VMP-47-30-042516-DUP	4/25/2016	**0.0068**	J		<0.0094	U		<0.0082	U	UJ	<0.0082	U		<0.0078	J	U	<0.0042	U		<0.0072	U	UJ	<0.0072	U	
		VMP-47-30-072516	7/25/2016	**0.01**			<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-47-30-102616	10/26/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	J	U	<0.0035	U		0.11			**0.024**		
		VMP-47-30-020117	2/1/2017	**0.0026**	J		<0.0065	U		**0.044**			<0.0057	J	U	0.0073			<0.003	U		<0.005	U		<0.005	U	
		VMP-47-30-020117-Dup	2/1/2017	**0.0025**	J		0.0012	J		**0.034**			<0.0057	J	U	0.004	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-30-042717	4/27/2017	**0.011**			0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0053			<0.005	U	
		VMP-47-30-072417	7/24/2017	<0.0067	U		0.0015	J		**0.0083**			**0.0026**	J		<0.0058	U		<0.0032	U		0.068			**0.022**		
		VMP-47-30-102617	10/26/2017	**0.0011**	J		0.0011	J		**0.0011**	J		<0.0061	U		<0.0058	U		<0.0032	U		0.011			**0.0035**	J	
		VMP-47-30-012618	1/26/2018	<0.0063	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-30-042718	4/27/2018	<0.0065	U		<0.0068	U		**0.001**	J		<0.0059	U		0.004	J		<0.0031	U		0.0027	J		**0.0013**	J	
		VMP-47-30-042718-DUP	4/27/2018	<0.0064	U		<0.0067	U		**0.00087**	J		<0.0058	U		0.0031	J		<0.003	U		0.0026	J		**0.0015**	J	
		VMP-47-30-071918	7/19/2018	**0.0021**	J		0.0017	J		<0.0059	U		<0.0059	U		0.0051	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-30-102318	10/23/2018	<0.0064	U		0.0021	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-47-30-050319	5/3/2019	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-47-30-072619	7/26/2019	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.00093	J		<0.0055	U	
		VMP-47-30-102319	10/23/2019	<0.0072	U		0.00093	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-47-30-012920	1/29/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-47-30-042820	4/28/2020	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-47-30-072720	7/27/2020	<0.0065	U		0.002	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-47-30-110220	11/2/2020	<0.0062	U		0.0019	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-47-30-110220-DUP	11/2/2020	<0.006	U		0.002	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-47-30-012221	1/22/2021	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
	5 ft	VMP-48-5-020215	2/2/2015	<0.0073	U		<0.0076	U		**0.0067**			<0.0067	J	U	<0.0064	U		<0.0035	U		0.0027	J		**0.0025**	J	
		VMP-48-5-042815	4/28/2015	<0.007	U		<0.0073	U		**0.0037**	J		**0.0012**	J		0.0035	J		<0.0033	U		0.0049	J		**0.002**	J	
		VMP-48-5-072115	7/21/2015	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-48-5-102015	10/20/2015	<0.0073	U		0.0018	J		<0.0067	U		<0.0067	U		0.028			<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-48-5-012916	1/29/2016	<0.0085	U		<0.0088	U		<0.0077	U		<0.0077	U		<0.0074	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-48-5-042516	4/25/2016	<0.0071	U		0.002	J		<0.0065	U		<0.0065	U		<0.0061	J	U	<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-48-5-072516	7/25/2016	<0.0082	U		0.0017	J		<0.0075	U		<0.0075	U		<0.0071	J	U	<0.0039	U		0.0021	J		<0.0066	U	
		VMP-48-5-102616	10/26/2016	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		0.0009	J		<0.0029	U		0.008			**0.0024**	J	
		VMP-48-5-012617	1/26/2017	<0.0066	U		<0.0069	U		**0.0016**	J		<0.006	U		0.00067	J		<0.0031	U		0.0046	J		**0.0015**	J	
		VMP-48-5-042617	4/26/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		0.01			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-5-072117	7/21/2017	<0.0065	U		0.002	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-5-103117	10/31/2017	<0.0058	U		0.001	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-48-5-012618	1/26/2018	<0.0064	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-48-5-042718	4/27/2018	<0.017	U		<0.018	U		<0.016	U		<0.016	U		0.0023	J		<0.0082	U		<0.014	U		<0.014	U	
		VMP-48-5-072418	7/24/2018	**0.0021**	J		0.0022	J		<0.0055	U		<0.0055	U		0.0024	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-48-5-102418	10/24/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-48-5-012319	1/23/2019	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-48-5-042619	4/26/2019	<0.0066	U		0.0016	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-48-5-072619	7/26/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-48-5-102119	10/21/2019	<0.0068	U		0.00094	J		<0.0062	U		<0.0062	U		0.013			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-48-5-012920	1/29/2020	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-48-5-042420	4/24/2020	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0064	U		<0.0064	U	
		VMP-48-5-073020	7/30/2020	**0.0071**			0.0022	J		**0.0012**	J		<0.0056	U		0.0013	J		<0.0029	U		0.0013	J		<0.0049	U	
		VMP-48-5-110220	11/2/2020	<0.0062	U		0.0018	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-48-5-012521	1/25/2021	<0.0065	U		0.0021	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	**0.0065**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-10-042815	4/28/2015	**0.016**	J		**0.0017**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.0039	J		**0.021**		
		VMP-48-10-042815-DUP	4/28/2015	**0.047**			**0.002**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0029	J		**0.022**		
		VMP-48-10-072115	7/21/2015	**0.014**	J		**0.002**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0046	J		**0.0026**	J	
		VMP-48-10-102015	10/20/2015	<0.032	J	U	**0.0015**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.0067	J		**0.0033**	J	
		VMP-48-10-012916	1/29/2016	**0.013**	J		**0.00047**	J		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-48-10-042516	4/25/2016	**0.012**	J		**0.0036**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0049	J		<0.016	U	
		VMP-48-10-072516	7/25/2016	**0.018**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-48-10-102616	10/26/2016	**0.0069**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-10-012617	1/26/2017	**0.053**			<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.048			**0.0036**	J	
		VMP-48-10-042617	4/26/2017	**0.017**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		**0.0059**	J	
		VMP-48-10-072117	7/21/2017	**0.01**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0037**	J	
		VMP-48-10-103117	10/31/2017	<0.026	J	U	<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-48-10-012618	1/26/2018	**0.0088**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-48-10-042718	4/27/2018	**0.0095**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-10-072418	7/24/2018	**0.035**			**0.037**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.089			<0.015	U	
		VMP-48-10-102418	10/24/2018	**0.01**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-10-012319	1/23/2019	**0.011**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-48-10-042619	4/26/2019	**0.0071**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-10-072619	7/26/2019	**0.012**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-10-102119	10/21/2019	**0.005**	J		**0.00073**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-10-012920	1/29/2020	<0.035	U		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-48-10-042420	4/24/2020	**0.013**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-48-10-073020	7/30/2020	**0.016**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0015**	J	
		VMP-48-10-073020-DUP	7/30/2020	**0.015**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0021**	J	
		VMP-48-10-110220	11/2/2020	**0.011**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-48-10-012521	1/25/2021	**0.0077**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	20 ft	VMP-48-20-020215	2/2/2015	**0.0077**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-48-20-042815	4/28/2015	**0.021**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.002	J		**0.0064**	J	
		VMP-48-20-102015	10/20/2015	**0.028**	J		**0.0025**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0068	J		**0.0084**	J	
		VMP-48-20-042516	4/25/2016	**0.017**	J		**0.0012**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-48-20-102616	10/26/2016	**0.023**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0064**	J	
		VMP-48-20-012617	1/26/2017	<0.03	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-20-042617	4/26/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-20-072117	7/21/2017	**0.013**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.004**	J	
		VMP-48-20-103117	10/31/2017	<0.025	J	U	<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-48-20-012618	1/26/2018	**0.0085**	J		**0.0017**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-48-20-042718	4/27/2018	**0.0067**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0031**	J	
		VMP-48-20-102418	10/24/2018	**0.033**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0044**	J	
		VMP-48-20-012319	1/23/2019	**0.027**			<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		**0.0071**	J	
		VMP-48-20-102119	10/21/2019	**0.011**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-48-20-110220	11/2/2020	**0.009**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-20-012521	1/25/2021	**0.037**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-20-012521-DUP	1/25/2021	**0.025**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-48-10-042815	4/28/2015	**0.0012**	J		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-48-10-042815-DUP	4/28/2015	**0.002**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-48-10-072115	7/21/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0012**	J		<0.029	U		<0.0072	U	
		VMP-48-10-102015	10/20/2015	**0.0042**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-48-10-012916	1/29/2016	<0.017	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-48-10-042516	4/25/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-48-10-072516	7/25/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-48-10-102616	10/26/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-48-10-012617	1/26/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		**0.0029**	J		<0.0061	U	
		VMP-48-10-042617	4/26/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-48-10-072117	7/21/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-48-10-103117	10/31/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-48-10-012618	1/26/2018	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-48-10-042718	4/27/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-48-10-072418	7/24/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-48-10-102418	10/24/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-48-10-012319	1/23/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-48-10-042619	4/26/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-48-10-072619	7/26/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-48-10-102119	10/21/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-48-10-012920	1/29/2020	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.0021**	J		<0.03	U		<0.0076	U	
		VMP-48-10-042420	4/24/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.001**	J		<0.028	U		<0.007	U	
		VMP-48-10-073020	7/30/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-48-10-110220	11/2/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-48-10-012521	1/25/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-48-20-042815	4/28/2015	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-48-20-102015	10/20/2015	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-48-20-042516	4/25/2016	<0.019	U		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-48-20-102616	10/26/2016	**0.0028**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-48-20-012617	1/26/2017	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-48-20-042617	4/26/2017	**0.0041**	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-48-20-072117	7/21/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-48-20-103117	10/31/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-48-20-012618	1/26/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-48-20-042718	4/27/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-48-20-102418	10/24/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-48-20-012319	1/23/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-48-20-102119	10/21/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-48-20-110220	11/2/2020	**0.0067**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-48-20-012521	1/25/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-48-10-042815	4/28/2015	<0.0047	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-48-10-042815-DUP	4/28/2015	<0.0044	U		<0.0099	U		<0.0077	J	U	<0.0077	U		<0.0077	J	U	**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-48-10-072115	7/21/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-48-10-102015	10/20/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0032**	J		<0.0055	U		<0.0055	U	
		VMP-48-10-012916	1/29/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-48-10-042516	4/25/2016	<0.0045	J	U	<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-48-10-072516	7/25/2016	<0.005	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.004**	J		<0.0058	U		<0.0058	U	
		VMP-48-10-102616	10/26/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-48-10-012617	1/26/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-48-10-042617	4/26/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-48-10-072117	7/21/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-48-10-103117	10/31/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0021**	J		<0.0045	U		<0.0045	U	
		VMP-48-10-012618	1/26/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0044	U		<0.0044	U	
		VMP-48-10-042718	4/27/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-48-10-072418	7/24/2018	**0.037**			<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-48-10-102418	10/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-48-10-012319	1/23/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-48-10-042619	4/26/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-48-10-072619	7/26/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-48-10-102119	10/21/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-48-10-012920	1/29/2020	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-48-10-042420	4/24/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-48-10-073020	7/30/2020	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-48-10-110220	11/2/2020	<0.0045	U		<0.01	U		**0.0017**	J		<0.0078	U		**0.0014**	J		**0.0039**	J		<0.0053	U		<0.0053	U	
		VMP-48-10-012521	1/25/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0019**	J		<0.0046	U		<0.0046	U	
		VMP-48-20-042815	4/28/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-48-20-102015	10/20/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0036**	J		<0.0053	U		<0.0053	U	
		VMP-48-20-042516	4/25/2016	<0.0052	J	U	<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0043**	J		<0.0061	U		<0.0061	U	
		VMP-48-20-102616	10/26/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-48-20-012617	1/26/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-48-20-042617	4/26/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-48-20-072117	7/21/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-48-20-103117	10/31/2017	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0024**	J		<0.0043	U		<0.0043	U	
		VMP-48-20-012618	1/26/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0021**	J		<0.0044	U		<0.0044	U	
		VMP-48-20-042718	4/27/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0037**	J		<0.0051	U		<0.0051	U	
		VMP-48-20-102418	10/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-48-20-012319	1/23/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0024**	J		<0.0043	U		<0.0043	U	
		VMP-48-20-102119	10/21/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0034**	J		<0.0048	U		<0.0048	U	
		VMP-48-20-110220	11/2/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-48-20-012521	1/25/2021	**0.0015**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-48-10-042815	4/28/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0061	U		<0.0061	U		<0.02	U	
		VMP-48-10-042815-DUP	4/28/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-48-10-072115	7/21/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-48-10-102015	10/20/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	J	U	<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-48-10-012916	1/29/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-48-10-042516	4/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-48-10-072516	7/25/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-48-10-102616	10/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-48-10-012617	1/26/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		**0.0022**	J	
		VMP-48-10-042617	4/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-48-10-072117	7/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-48-10-103117	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.023**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-48-10-012618	1/26/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-48-10-042718	4/27/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-10-072418	7/24/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0039**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-48-10-102418	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-10-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-48-10-042619	4/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-48-10-072619	7/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-48-10-102119	10/21/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-10-012920	1/29/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-48-10-042420	4/24/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-48-10-073020	7/30/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-48-10-110220	11/2/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-48-10-012521	1/25/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-48-20-042815	4/28/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-48-20-102015	10/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-48-20-042516	4/25/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-48-20-102616	10/26/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-20-012617	1/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-20-042617	4/26/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-48-20-072117	7/21/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-48-20-103117	10/31/2017	<0.0042	U		<0.0042	U		<0.0042	U		**0.018**	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-48-20-012618	1/26/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-48-20-042718	4/27/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-48-20-102418	10/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-20-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-48-20-102119	10/21/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-20-110220	11/2/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-48-20-012521	1/25/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.0092	U		**0.0026**	J		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-10-042815	4/28/2015	0.0052	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0017**	J		<0.058	U		**0.0069**		
		VMP-48-10-042815-DUP	4/28/2015	0.007	J		**0.0017**	J		0.0016	J		<0.0098	U		<0.009	U		**0.0021**	J		<0.055	J	U	**0.0053**		
		VMP-48-10-072115	7/21/2015	<0.01	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-48-10-102015	10/20/2015	0.0061	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0026**	J		<0.058	ND,UJ	UJ	**0.0031**	J	
		VMP-48-10-012916	1/29/2016	0.0053	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-48-10-042516	4/25/2016	0.013			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	J	U	<0.056	U		<0.0046	J	U
		VMP-48-10-072516	7/25/2016	0.0043	J		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		**0.00074**	J	
		VMP-48-10-102616	10/26/2016	<0.0095	J	U	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	J	U
		VMP-48-10-012617	1/26/2017	0.012			**0.0056**			<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0028**	J	
		VMP-48-10-042617	4/26/2017	0.0077	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-48-10-072117	7/21/2017	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-48-10-103117	10/31/2017	0.014			<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-48-10-012618	1/26/2018	0.03			<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-48-10-042718	4/27/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-48-10-072418	7/24/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.024**			<0.055	U		**0.12**		
		VMP-48-10-102418	10/24/2018	0.0076	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-48-10-012319	1/23/2019	<0.0082	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-48-10-042619	4/26/2019	0.0049	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-10-072619	7/26/2019	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-10-102119	10/21/2019	0.007	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-10-012920	1/29/2020	<0.011	ND,UJ	UJ	<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-48-10-042420	4/24/2020	0.0047	J	J	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-48-10-073020	7/30/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-10-110220	11/2/2020	0.0094	J	J	**0.00044**	J		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		**0.024**	J		<0.0046	U	
		VMP-48-10-012521	1/25/2021	0.0088	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-48-20-042815	4/28/2015	0.0037	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		**0.0019**	J	
		VMP-48-20-102015	10/20/2015	0.013			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	ND,UJ	UJ	<0.0046	J	U
		VMP-48-20-042516	4/25/2016	0.0077	J		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.065	U		<0.0053	J	U
		VMP-48-20-102616	10/26/2016	<0.0093	J	U	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	J	U
		VMP-48-20-012617	1/26/2017	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-48-20-042617	4/26/2017	0.0054	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-48-20-072117	7/21/2017	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-48-20-103117	10/31/2017	0.015			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-48-20-012618	1/26/2018	0.0076	J		**0.0016**	J		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-48-20-042718	4/27/2018	0.21			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-48-20-102418	10/24/2018	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-20-012319	1/23/2019	<0.008	U		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-48-20-102119	10/21/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-20-110220	11/2/2020	<0.024	U	UJ	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-48-20-012521	1/25/2021	0.0094	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.002**	J		<0.053	U		<0.0044	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0034**	J		<0.006	J	U
		VMP-48-10-042815	4/28/2015	**0.0025**	J		0.0044	J		<0.0067	U		**0.004**	J		<0.0049	U					**0.011**	J		<0.0067	U	
		VMP-48-10-042815-DUP	4/28/2015	**0.0031**	J		0.0043	J		<0.0063	U		**0.0045**	J		<0.0046	U					**0.011**	J		<0.0063	U	
		VMP-48-10-072115	7/21/2015	<0.023	U		0.0047	J		<0.0069	U		<0.0057	U		<0.005	U					<0.014	U		<0.0069	U	
		VMP-48-10-102015	10/20/2015	<0.022	U		0.0033	J		<0.0067	U		**0.0017**	J		<0.0049	U					**0.0022**	J		<0.0067	U	
		VMP-48-10-012916	1/29/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.0027**	J		<0.0066	U	
		VMP-48-10-042516	4/25/2016	<0.022	U		0.0062	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.034**			<0.0065	U	
		VMP-48-10-072516	7/25/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.04**			<0.0071	U	
		VMP-48-10-102616	10/26/2016	<0.021	U		0.004	J		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.007**	J		<0.0062	U	
		VMP-48-10-012617	1/26/2017	**0.0013**	J		0.028			**0.00054**	J		**0.0011**	J		<0.017	U					**0.006**	J		<0.0058	U	
		VMP-48-10-042617	4/26/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0024**	J		<0.0056	U	
		VMP-48-10-072117	7/21/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-48-10-103117	10/31/2017	<0.018	U		0.0038	J		<0.0054	U		<0.0045	U		<0.016	U					**0.006**	J		<0.0054	U	
		VMP-48-10-012618	1/26/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	J	U	<0.0054	U	
		VMP-48-10-042718	4/27/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-48-10-072418	7/24/2018	<0.021	U		0.28			<0.0063	U		<0.0053	U		<0.019	U					**0.0062**	J		<0.0063	U	
		VMP-48-10-102418	10/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0027**	J		<0.0058	U	
		VMP-48-10-012319	1/23/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-48-10-042619	4/26/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0038**	J		<0.0059	U	
		VMP-48-10-072619	7/26/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-48-10-102119	10/21/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-48-10-012920	1/29/2020	<0.024	U		<0.017	U	UJ	<0.0072	U		<0.006	U		<0.021	U					<0.014	U		<0.0072	U	
		VMP-48-10-042420	4/24/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0037**	J		<0.0067	U	
		VMP-48-10-073020	7/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0062**	J		<0.0064	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.003**	J		<0.0059	U	
		VMP-48-10-110220	11/2/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0099**	J		<0.0064	U	
		VMP-48-10-012521	1/25/2021	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0096**	J		<0.0059	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.0041	U					<0.011	J	U	<0.0056	J	U
		VMP-48-20-042815	4/28/2015	**0.0013**	J		0.0013	J		<0.006	U		<0.005	J	U	<0.0044	U					**0.0044**	J		<0.006	U	
		VMP-48-20-102015	10/20/2015	**0.0012**	J		0.0041	J		<0.0065	U		**0.0018**	J		<0.0047	U					**0.0097**	J		<0.0065	U	
		VMP-48-20-042516	4/25/2016	<0.025	U		0.0059	J		<0.0074	U		<0.0062	U		<0.0055	U					<0.015	J	U	<0.0074	U	
		VMP-48-20-102616	10/26/2016	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.0051**	J		<0.0061	U	
		VMP-48-20-012617	1/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-48-20-042617	4/26/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0024**	J		<0.0057	U	
		VMP-48-20-072117	7/21/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.28**			<0.0057	U	
		VMP-48-20-103117	10/31/2017	<0.017	U		0.0017	J		<0.0052	U		<0.0043	U		<0.015	U					**0.0034**	J		<0.0052	U	
		VMP-48-20-012618	1/26/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0065**	J		<0.0054	U	
		VMP-48-20-042718	4/27/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-48-20-102418	10/24/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0026**	J		<0.006	U	
		VMP-48-20-012319	1/23/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.003**	J		<0.0052	U	
		VMP-48-20-102119	10/21/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0017**	J		<0.0058	U	
		VMP-48-20-110220	11/2/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0056**	J		<0.0061	U	
		VMP-48-20-012521	1/25/2021	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.028**			<0.0061	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.016**			<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-10-042815	4/28/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0032**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-10-042815-DUP	4/28/2015	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0037**	J		<0.038	J	U	<0.007	U		<0.007	U	
		VMP-48-10-072115	7/21/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-48-10-102015	10/20/2015	<0.0058	U		<0.0094	U		**0.0046**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-10-012916	1/29/2016	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-48-10-042516	4/25/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0022**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-48-10-072516	7/25/2016	<0.0061	U		<0.0099	U		<0.0098	U		<0.0042	U		**0.0013**	J		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-48-10-102616	10/26/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.002**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-48-10-012617	1/26/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0026**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-48-10-042617	4/26/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0012**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-48-10-072117	7/21/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-48-10-103117	10/31/2017	<0.0047	U		<0.0076	U		**0.0018**	J		<0.0032	U		**0.003**	J		<0.033	U		**0.001**	J		<0.006	U	
		VMP-48-10-012618	1/26/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-48-10-042718	4/27/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-48-10-072418	7/24/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.014**			<0.038	U		**0.00085**	J		<0.007	U	
		VMP-48-10-102418	10/24/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-48-10-012319	1/23/2019	<0.0046	U		<0.0074	U		**0.056**			<0.0032	U		**0.0016**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-48-10-042619	4/26/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0029**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-10-072619	7/26/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-10-102119	10/21/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-48-10-012920	1/29/2020	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-48-10-042420	4/24/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-10-073020	7/30/2020	<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0082	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-10-110220	11/2/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.00049**	J		**0.0081**	J		**0.001**	J		<0.0071	U	
		VMP-48-10-012521	1/25/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		**0.00094**	J		<0.0066	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-48-20-042815	4/28/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		**0.0017**	J		<0.0066	U		<0.0066	U	
		VMP-48-20-102015	10/20/2015	<0.0056	U		<0.009	U		<0.0089	U		**0.0035**	J		**0.0073**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-48-20-042516	4/25/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		**0.0017**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-48-20-102616	10/26/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	
		VMP-48-20-012617	1/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-48-20-042617	4/26/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.014**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-48-20-072117	7/21/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-48-20-103117	10/31/2017	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.00088**	J		<0.031	U		**0.00096**	J		<0.0058	U	
		VMP-48-20-012618	1/26/2018	<0.0046	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.0008**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-48-20-042718	4/27/2018	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-48-20-102418	10/24/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		**0.0012**	J		<0.0067	U	
		VMP-48-20-012319	1/23/2019	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-48-20-102119	10/21/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-48-20-110220	11/2/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-48-20-012521	1/25/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0011**	J		<0.037	U		**0.00098**	J		<0.0067	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		**0.0011**	J		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-48	10 ft	VMP-48-10-020215	2/2/2015	<0.0066	U		<0.0068	U		<0.006	J	U	<0.006	U		0.03			<0.0031	U		0.0012	J		<0.0053	U	
		VMP-48-10-042815	4/28/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		0.0054	J		<0.0035	U		0.0024	J		<0.0059	U	
		VMP-48-10-042815-DUP	4/28/2015	<0.0069	U		0.0018	J		**0.0017**	J		**0.0014**	J		0.0058	J		<0.0033	U		0.0026	J		**0.0016**	J	
		VMP-48-10-072115	7/21/2015	<0.0075	U		0.0017	J		<0.0069	U		<0.0069	U		0.008			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-48-10-102015	10/20/2015	<0.0073	U		0.0018	J		**0.0014**	J		<0.0067	U		0.002	J		<0.0035	U		0.0018	J		<0.0059	U	
		VMP-48-10-012916	1/29/2016	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-48-10-042516	4/25/2016	<0.0071	U		0.0012	J		<0.0065	U		<0.0065	U		<0.0062	J	U	<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-48-10-072516	7/25/2016	<0.0077	U		0.0019	J		<0.0071	U		<0.0071	U		<0.0067	J	U	<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-48-10-102616	10/26/2016	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0035	J		<0.0055	U	
		VMP-48-10-012617	1/26/2017	<0.0063	U		0.0011	J		**0.00078**	J		<0.0058	U		<0.0055	U		<0.003	U		0.018			**0.004**	J	
		VMP-48-10-042617	4/26/2017	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-48-10-072117	7/21/2017	<0.0063	U		0.002	J		<0.0057	U		<0.0057	U		0.00081	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-48-10-103117	10/31/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-48-10-012618	1/26/2018	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-48-10-042718	4/27/2018	<0.0066	U		0.0019	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-48-10-072418	7/24/2018	**0.0051**	J		0.0024	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0029	J		**0.0014**	J	
		VMP-48-10-102418	10/24/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-48-10-012319	1/23/2019	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		0.0016	J		<0.0028	U		0.0015	J		<0.0047	U	
		VMP-48-10-042619	4/26/2019	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		0.0016	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-10-072619	7/26/2019	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-48-10-102119	10/21/2019	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		0.0011	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-48-10-012920	1/29/2020	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-48-10-042420	4/24/2020	<0.0073	U		0.0013	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-48-10-073020	7/30/2020	<0.007	U		0.0016	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-48-10-073020-DUP	7/30/2020	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-10-110220	11/2/2020	<0.007	U		0.0023	J		<0.0064	U		**0.00088**	J		<0.0061	U		<0.0033	U		0.00072	J		**0.00069**	J	
		VMP-48-10-012521	1/25/2021	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.00099	J		<0.0031	U		<0.0052	U		<0.0052	U	
	20 ft	VMP-48-20-020215	2/2/2015	<0.0061	U		<0.0064	U		<0.0056	J	U	<0.0056	U		0.0032	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-48-20-042815	4/28/2015	<0.0065	U		<0.0068	U		**0.0012**	J		<0.006	U		0.016			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-48-20-102015	10/20/2015	<0.0071	U		0.0028	J		<0.0065	U		<0.0065	U		0.0021	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-48-20-042516	4/25/2016	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		<0.0071	J	U	<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-48-20-102616	10/26/2016	<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		0.00095	J		<0.0032	U		0.0044	J		<0.0054	U	
		VMP-48-20-012617	1/26/2017	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-48-20-042617	4/26/2017	<0.0062	U		0.0018	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-48-20-072117	7/21/2017	<0.0063	U		0.0011	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-48-20-103117	10/31/2017	<0.0057	U		0.0012	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-48-20-012618	1/26/2018	<0.0058	U		0.0013	J		**0.0014**	J		**0.0009**	J		<0.0051	U		<0.0028	U		0.0066			**0.0031**	J	
		VMP-48-20-042718	4/27/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-48-20-102418	10/24/2018	<0.0066	U		0.0018	J		<0.006	U		<0.006	U		0.0025	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-48-20-012319	1/23/2019	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		0.0078			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-48-20-102119	10/21/2019	<0.0064	U		0.002	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-48-20-110220	11/2/2020	<0.0067	U		0.0024	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-48-20-012521	1/25/2021	<0.0066	U		0.0019	J		<0.0061	U		<0.0061	U		0.0011	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-48-20-012521-DUP	1/25/2021	<0.0068	U		0.0024	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	**0.0073**	J		**0.00095**	J		<0.0067	U		<0.01	U		<0.039	U		<0.0022	U		0.0094	J		**0.0015**	J	
		VMP-48-30-042815	4/28/2015	**0.01**	J		**0.0032**	J		**0.0035**	J		**0.0067**	J		<0.057	U		<0.0033	U		<0.014	U		**0.0053**	J	
		VMP-48-30-080315	8/3/2015	**0.021**	J		**0.0047**			<0.0098	U		<0.015	U		<0.057	U		<0.0032	U	UJ	<0.014	U	UJ	**0.012**	J	
		VMP-48-30-102015	10/20/2015	<0.032	J	U	**0.0025**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.013			**0.0042**	J	
		VMP-48-30-102015-DUP	10/20/2015	**0.018**	J		**0.0024**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.016			**0.0064**	J	
		VMP-48-30-012916	1/29/2016	**0.025**	J		**0.00087**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0047**	J	
		VMP-48-30-042516	4/25/2016	**0.014**	J		**0.0045**	J		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		0.022			<0.019	U	
		VMP-48-30-042516-DUP	4/25/2016	**0.011**	J		**0.005**			<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.014			<0.016	U	
		VMP-48-30-072516	7/25/2016	**0.061**			**0.0011**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.016**		
		VMP-48-30-102616	10/26/2016	**0.044**			**0.0028**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.015			**0.0061**	J	
		VMP-48-30-102616-Dup	10/26/2016	**0.0056**	J		**0.00093**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-30-042617	4/26/2017	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-30-072117	7/21/2017	**0.029**			<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.011**	J	
		VMP-48-30-103117	10/31/2017	<0.027	J	U	<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.026	J	U	<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-48-30-012618	1/26/2018	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-48-30-042718	4/27/2018	**0.0072**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-30-042718-DUP	4/27/2018	**0.02**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0054**	J	
		VMP-48-30-072418	7/24/2018	**0.024**	J		**0.0014**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0053**	J	
		VMP-48-30-102418	10/24/2018	**0.019**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0065	J		**0.01**	J	
		VMP-48-30-012319	1/23/2019	<0.026	U		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-48-30-042619	4/26/2019	**0.0085**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-48-30-072619	7/26/2019	**0.021**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-30-102119	10/21/2019	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.011	J		<0.015	U	
		VMP-48-30-012920	1/29/2020	<0.034	U		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-48-30-073020	7/30/2020	**0.015**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-30-110220	11/2/2020	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-48-30-012521	1/25/2021	**0.0097**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	5 ft	VMP-49-5-020215	2/3/2015	<0.033	U		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-49-5-042815	4/28/2015	**0.0076**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0015**	J	
		VMP-49-5-073015	7/30/2015	**0.023**	J		<0.0044	J	U	<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0081**	J	
		VMP-49-5-110315	11/3/2015	**0.017**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0053**	J	
		VMP-49-5-020116	2/1/2016	<0.034	J	U	**0.0011**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		0.0073	J		<0.017	U	
		VMP-49-5-042616	4/26/2016	**0.03**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-49-5-080116	8/1/2016	**0.035**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.025			**0.0057**	J	
		VMP-49-5-102716	10/27/2016	**0.01**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-49-5-012717	1/27/2017	**0.013**	J		<0.0039	J	U	<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0056**	J	
		VMP-49-5-042417	4/24/2017	<0.034	J	U	<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-49-5-072617	7/26/2017	**0.023**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.007**	J	
		VMP-49-5-102717	10/27/2017	**0.0099**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0041**	J	
		VMP-49-5-012618	1/26/2018	<0.027	J	U	<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-49-5-041918	4/19/2018	**0.02**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0082**	J	
		VMP-49-5-072018	7/20/2018	**0.017**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-49-5-102318	10/23/2018	**0.014**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-49-5-020119	2/1/2019	**0.0079**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-49-5-042919	4/29/2019	**0.02**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0099	J		<0.015	U	
		VMP-49-5-072919	7/29/2019	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-5-101819	10/18/2019	**0.0077**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-5-012220	1/22/2020	**0.0066**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-5-042920	4/29/2020	**0.016**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-49-5-072420	7/24/2020	**0.023**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-5-072420-DUP	7/24/2020	**0.042**			<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.003**	J	
		VMP-49-5-110420	11/4/2020	**0.017**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.021			**0.0019**	J	
		VMP-49-5-012521	1/25/2021	**0.0083**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	<0.012	J	U	<0.0063	U		<0.0046	U		<0.0086	U		<0.011	U		**0.0014**	J		<0.021	U		<0.0052	U	
		VMP-48-30-042815	4/28/2015	<0.018	J	U	**0.0027**	J		<0.0068	U		0.0053	J		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-48-30-080315	8/3/2015	**0.0036**	J		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-48-30-102015	10/20/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-48-30-102015-DUP	10/20/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-48-30-012916	1/29/2016	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-48-30-042516	4/25/2016	<0.02	U		<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0077	U		<0.033	U		<0.0082	U	
		VMP-48-30-042516-DUP	4/25/2016	**0.0033**	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-48-30-072516	7/25/2016	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-48-30-102616	10/26/2016	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-48-30-102616-Dup	10/26/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-48-30-042617	4/26/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-48-30-072117	7/21/2017	**0.0022**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-48-30-103117	10/31/2017	**0.0084**	J		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-48-30-012618	1/26/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.00085**	J		<0.023	U		<0.0058	U	
		VMP-48-30-042718	4/27/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-48-30-042718-DUP	4/27/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0067	U	
		VMP-48-30-072418	7/24/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-48-30-102418	10/24/2018	**0.0019**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-48-30-012319	1/23/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-48-30-042619	4/26/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-48-30-072619	7/26/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-48-30-102119	10/21/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-48-30-012920	1/29/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U	UJ	<0.0074	U	
		VMP-48-30-073020	7/30/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-48-30-110220	11/2/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-48-30-012521	1/25/2021	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
	5 ft	VMP-49-5-020215	2/3/2015	**0.0056**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-49-5-042815	4/28/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-49-5-073015	7/30/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0023**	J		<0.028	U		<0.0071	U	
		VMP-49-5-110315	11/3/2015	**0.0033**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-49-5-020116	2/1/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-49-5-042616	4/26/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-49-5-080116	8/1/2016	**0.0046**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-49-5-102716	10/27/2016	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-49-5-012717	1/27/2017	**0.00087**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-49-5-042417	4/24/2017	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-49-5-072617	7/26/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-49-5-102717	10/27/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-49-5-012618	1/26/2018	<0.014	U		**0.0045**	J		<0.0053	U		<0.0098	U		<0.012	U		**0.0069**			<0.024	U		<0.0059	U	
		VMP-49-5-041918	4/19/2018	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-49-5-072018	7/20/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-5-102318	10/23/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-49-5-020119	2/1/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-49-5-042919	4/29/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-49-5-072919	7/29/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-49-5-101819	10/18/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-49-5-012220	1/22/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-49-5-042920	4/29/2020	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-49-5-072420	7/24/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-49-5-072420-DUP	7/24/2020	**0.0032**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-49-5-110420	11/4/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-49-5-012521	1/25/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	**0.0014**	J		<0.0077	U		<0.006	U		<0.006	U		<0.006	U		**0.0023**	J		<0.0041	U		<0.0041	U	
		VMP-48-30-042815	4/28/2015	<0.0051	U		<0.011	U		**0.0019**	J		<0.0089	U		**0.0019**	J		**0.0032**	J		<0.006	U		**0.0022**	J	
		VMP-48-30-080315	8/3/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0034**	J		<0.0059	U		<0.0059	U	
		VMP-48-30-102015	10/20/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0042**	J		<0.0055	U		<0.0055	U	
		VMP-48-30-102015-DUP	10/20/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0046**	J		<0.0055	U		<0.0055	U	
		VMP-48-30-012916	1/29/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0018**	J		<0.0057	U		<0.0057	U	
		VMP-48-30-042516	4/25/2016	**0.0062**			<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0025**	J		<0.0064	U		<0.0064	U	
		VMP-48-30-042516-DUP	4/25/2016	**0.0046**	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0035**	J		<0.0056	U		<0.0056	U	
		VMP-48-30-072516	7/25/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0042**	J		<0.005	U		<0.005	U	
		VMP-48-30-102616	10/26/2016	**0.0052**			<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-48-30-102616-Dup	10/26/2016	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-48-30-042617	4/26/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-48-30-072117	7/21/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-48-30-103117	10/31/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-48-30-012618	1/26/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-48-30-042718	4/27/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-48-30-042718-DUP	4/27/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0033**	J		<0.0052	U		<0.0052	U	
		VMP-48-30-072418	7/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0037**	J		<0.005	U		<0.005	U	
		VMP-48-30-102418	10/24/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-48-30-012319	1/23/2019	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0043**	J		<0.0045	U		<0.0045	U	
		VMP-48-30-042619	4/26/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-48-30-072619	7/26/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-48-30-102119	10/21/2019	**0.0015**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-48-30-012920	1/29/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0031**	J		<0.0058	U		<0.0058	U	
		VMP-48-30-073020	7/30/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-48-30-110220	11/2/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-48-30-012521	1/25/2021	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0032**	J		<0.0049	U		<0.0049	U	
	5 ft	VMP-49-5-020215	2/3/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-49-5-042815	4/28/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.002**	J		<0.0056	U		<0.0056	U	
		VMP-49-5-073015	7/30/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-49-5-110315	11/3/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0042**	J		<0.0058	U		<0.0058	U	
		VMP-49-5-020116	2/1/2016	**0.0034**	J		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-49-5-042616	4/26/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0022**	J		<0.0055	U		<0.0055	U	
		VMP-49-5-080116	8/1/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0033**	J		<0.0052	U		<0.0052	U	
		VMP-49-5-102716	10/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-49-5-012717	1/27/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-49-5-042417	4/24/2017	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0027**	J		<0.0059	U		<0.0059	U	
		VMP-49-5-072617	7/26/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		**0.07**			**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-49-5-102717	10/27/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		**0.018**			**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-49-5-012618	1/26/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		**0.0073**			**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-49-5-041918	4/19/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		**0.0028**	J		**0.0033**	J		<0.0049	U		<0.0049	U	
		VMP-49-5-072018	7/20/2018	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-49-5-102318	10/23/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-49-5-020119	2/1/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-49-5-042919	4/29/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0035**	J		<0.0052	U		<0.0052	U	
		VMP-49-5-072919	7/29/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-49-5-101819	10/18/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-49-5-012220	1/22/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-49-5-042920	4/29/2020	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0023**	J		<0.006	U		<0.006	U	
		VMP-49-5-072420	7/24/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0038**	J		<0.0054	U		<0.0054	U	
		VMP-49-5-110420	11/4/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-49-5-012521	1/25/2021	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	<0.004	U		<0.004	U		<0.004	U		<0.035	U		<0.0046	U		<0.0046	U		<0.0046	U		<0.014	U	
		VMP-48-30-042815	4/28/2015	<0.0059	U		0.047			0.0064			<0.051	U		**0.003**	J		**0.0019**	J		**0.0017**	J		<0.021	U	
		VMP-48-30-080315	8/3/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-48-30-102015	10/20/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	J	U	<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-48-30-102015-DUP	10/20/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	J	U	<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-48-30-012916	1/29/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-48-30-042516	4/25/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-48-30-042516-DUP	4/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-48-30-072516	7/25/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.021**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-30-102616	10/26/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-48-30-102616-Dup	10/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-48-30-042617	4/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0031**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-30-072117	7/21/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0054**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-48-30-103117	10/31/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0032**	J		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0032**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-48-30-012618	1/26/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-48-30-042718	4/27/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-48-30-042718-DUP	4/27/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-48-30-072418	7/24/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-48-30-102418	10/24/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-48-30-012319	1/23/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-48-30-042619	4/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-48-30-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-48-30-102119	10/21/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-48-30-012920	1/29/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-48-30-073020	7/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-48-30-110220	11/2/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-48-30-012521	1/25/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
	5 ft	VMP-49-5-020215	2/3/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-49-5-042815	4/28/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-49-5-073015	7/30/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0029**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-49-5-110315	11/3/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0074**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-5-020116	2/1/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-49-5-042616	4/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-49-5-080116	8/1/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-5-102716	10/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-49-5-012717	1/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0021**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-5-042417	4/24/2017	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-5-072617	7/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-49-5-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		**0.0043**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-49-5-012618	1/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-49-5-041918	4/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-49-5-072018	7/20/2018	<0.0049	U		0.0021	J		<0.0049	U		**0.003**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-5-102318	10/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0022**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-49-5-020119	2/1/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-49-5-042919	4/29/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-5-072919	7/29/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-5-101819	10/18/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-49-5-012220	1/22/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-49-5-042920	4/29/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-49-5-072420	7/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-49-5-110420	11/4/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-5-012521	1/25/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	<0.0076	U		<0.0044	U		<0.0049	U		<0.0077	U		<0.007	U		**0.0022**	J		<0.043	U		**0.002**	J	
		VMP-48-30-042815	4/28/2015	0.0064	J		**0.0033**	J		<0.0073	U		**0.0027**	J		<0.01	U		<0.0061	U		**0.0038**	J		**0.0035**	J	
		VMP-48-30-080315	8/3/2015	0.014	J0	J	<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		**0.0018**	J		<0.062	U		<0.0051	U	
		VMP-48-30-102015	10/20/2015	0.019			**0.0022**	J		<0.0067	U		<0.01	U		<0.0095	U		**0.0059**			<0.058	ND,UJ	UJ	**0.01**		
		VMP-48-30-102015-DUP	10/20/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		**0.0043**	J		<0.058	ND,UJ	UJ	**0.0098**		
		VMP-48-30-012916	1/29/2016	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-48-30-042516	4/25/2016	0.0073	J		**0.0098**			0.0077	J		<0.012	U		<0.011	U		**0.02**			<0.068	U		**0.035**		
		VMP-48-30-042516-DUP	4/25/2016	0.0063	J		**0.0076**			0.0062	J		<0.011	U		<0.0098	U		**0.014**			<0.06	U		**0.029**		
		VMP-48-30-072516	7/25/2016	0.0096			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0018**	J	
		VMP-48-30-102616	10/26/2016	0.034		J	**0.032**		J	0.0032	J		<0.0091	U		<0.0083	U		**0.007**			<0.051	U		**0.013**		J
		VMP-48-30-102616-Dup	10/26/2016	<0.0097	U	UJ	<0.0056	U	UJ	<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.0035**	J	J
		VMP-48-30-042617	4/26/2017	0.0072	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-30-072117	7/21/2017	0.012			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-48-30-103117	10/31/2017	0.01			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0019**	J	
		VMP-48-30-103117-DUP	10/31/2017	0.0072	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		**0.0015**	J	
		VMP-48-30-012618	1/26/2018	0.031			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-48-30-042718	4/27/2018	0.017			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-30-042718-DUP	4/27/2018	0.014			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-48-30-072418	7/24/2018	0.007	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-30-102418	10/24/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-48-30-012319	1/23/2019	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-48-30-042619	4/26/2019	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-48-30-072619	7/26/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-48-30-102119	10/21/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.008**			<0.055	U		**0.02**		
		VMP-48-30-012920	1/29/2020	<0.011	ND,UJ	UJ	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-48-30-073020	7/30/2020	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-48-30-110220	11/2/2020	0.012	J	J	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-48-30-012521	1/25/2021	<0.023	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
	5 ft	VMP-49-5-020215	2/3/2015	0.0066	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-49-5-042815	4/28/2015	<0.01	U		<0.006	U		0.0067	J		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-49-5-073015	7/30/2015	<0.01	J	U	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-49-5-110315	11/3/2015	0.0085	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		**0.0036**	J		<0.062	U		**0.0028**	J	
		VMP-49-5-020116	2/1/2016	0.42			<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	J	U	<0.06	U		**0.0027**	J	
		VMP-49-5-042616	4/26/2016	0.0061	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		**0.0038**	J		<0.058	U		**0.0032**	J	
		VMP-49-5-080116	8/1/2016	0.012			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-49-5-102716	10/27/2016	<0.01	J	U	**0.0019**	J		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.00061**	J	
		VMP-49-5-012717	1/27/2017	0.054			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-5-042417	4/24/2017	<0.011	J	U	<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.0018**	J	
		VMP-49-5-072617	7/26/2017	0.0078	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-5-102717	10/27/2017	0.026			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0015**	J	
		VMP-49-5-012618	1/26/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-49-5-041918	4/19/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-49-5-072018	7/20/2018	0.0067	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-49-5-102318	10/23/2018	0.012			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-49-5-020119	2/1/2019	0.0028	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-49-5-042919	4/29/2019	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-49-5-072919	7/29/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-49-5-101819	10/18/2019	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.0012**	J		<0.052	U		**0.0025**	J	
		VMP-49-5-012220	1/22/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-5-042920	4/29/2020	0.009	J	J	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-49-5-072420	7/24/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-49-5-072420-DUP	7/24/2020	0.0064	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-49-5-110420	11/4/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-49-5-012521	1/25/2021	0.03			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.00071**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	<0.016	U		0.0068	J		<0.0049	U		<0.0041	U		<0.0036	U					**0.0043**	J		<0.0049	U	
		VMP-48-30-042815	4/28/2015	**0.0017**	J		0.0024	J		<0.0073	U		**0.003**	J		**0.0014**	J					**0.0047**	J		<0.0073	U	
		VMP-48-30-080315	8/3/2015	**0.0039**	J	J	<0.017	U		**0.0027**	J		**0.004**	J		<0.0053	U					**0.0066**	J		<0.0072	U	
		VMP-48-30-102015	10/20/2015	<0.022	U		0.012	J		<0.0067	U		**0.0013**	J		<0.0049	U					**0.006**	J		<0.0067	U	
		VMP-48-30-102015-DUP	10/20/2015	**0.0014**	J		0.01	J		<0.0067	U		<0.0056	U		<0.0049	U					**0.0059**	J		<0.0067	U	
		VMP-48-30-012916	1/29/2016	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.0048**	J		<0.0069	U	
		VMP-48-30-042516	4/25/2016	<0.026	U		0.034			**0.0044**	J		<0.0065	U		<0.0057	U					**0.016**			**0.01**		
		VMP-48-30-042516-DUP	4/25/2016	<0.023	U		0.029			**0.0037**	J		<0.0057	U		<0.005	U					**0.019**			**0.0082**		
		VMP-48-30-072516	7/25/2016	**0.003**	J		0.0088	J		<0.006	U		<0.005	U		<0.018	U					**0.14**			<0.006	U	
		VMP-48-30-102616	10/26/2016	<0.019	U		0.011	J		<0.0058	J	U	**0.0023**	J		<0.017	U		<0.012	U		**0.18**		J	**0.0014**	J	
		VMP-48-30-102616-Dup	10/26/2016	<0.021	U		0.005	J		<0.0063	U		<0.0053	U		<0.018	U		<0.013	U		**0.006**	J	J	<0.0063	U	
		VMP-48-30-042617	4/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0088**	J		<0.006	U	
		VMP-48-30-072117	7/21/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.027**			<0.0056	U	
		VMP-48-30-103117	10/31/2017	<0.018	U		0.0077	J		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.018	U		0.0064	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-48-30-012618	1/26/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0058**	J		<0.0055	U	
		VMP-48-30-042718	4/27/2018	<0.02	U		<0.014	U		<0.0059	U		**0.0072**			<0.017	U					<0.012	U		<0.0059	U	
		VMP-48-30-042718-DUP	4/27/2018	<0.021	U		<0.015	U		<0.0063	U		**0.009**			<0.019	U					<0.013	U		<0.0063	U	
		VMP-48-30-072418	7/24/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-48-30-102418	10/24/2018	<0.02	U		0.0072	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0047**	J		<0.0059	U	
		VMP-48-30-012319	1/23/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-48-30-042619	4/26/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-48-30-072619	7/26/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-48-30-102119	10/21/2019	<0.021	U		0.022			**0.0011**	J		<0.0053	U		<0.019	U					<0.013	U		**0.0032**	J	
		VMP-48-30-012920	1/29/2020	<0.023	U		<0.017	U	UJ	<0.007	U		<0.0058	U		<0.021	U					<0.014	U		<0.007	U	
		VMP-48-30-073020	7/30/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.011**	J		<0.0062	U	
		VMP-48-30-110220	11/2/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0097**	J		<0.0061	U	
		VMP-48-30-012521	1/25/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0057**	J		<0.006	U	
	5 ft	VMP-49-5-020215	2/3/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					<0.014	U		<0.0068	U	
		VMP-49-5-042815	4/28/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	J	U	<0.005	U					**0.0025**	J		<0.0068	U	
		VMP-49-5-073015	7/30/2015	**0.0024**	J		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0032**	J		<0.0067	U	
		VMP-49-5-110315	11/3/2015	<0.024	U		0.0023	J		<0.0071	U		<0.0059	J	U	<0.0052	U					**0.0064**	J		<0.0071	U	
		VMP-49-5-020116	2/1/2016	<0.023	U		<0.017	U		<0.007	U		**0.0052**	J		<0.0051	U					**0.022**			<0.007	U	
		VMP-49-5-042616	4/26/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.015**			<0.0067	U	
		VMP-49-5-080116	8/1/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0092**	J		<0.0063	U	
		VMP-49-5-102716	10/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.0049**	J		<0.0065	U	
		VMP-49-5-012717	1/27/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0038**	J		<0.006	U	
		VMP-49-5-042417	4/24/2017	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.0064**	J		<0.0071	U	
		VMP-49-5-072617	7/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.032**			<0.006	U	
		VMP-49-5-102717	10/27/2017	<0.018	U		0.031			<0.0056	U		<0.0046	U		<0.016	U					**0.0044**	J		<0.0056	U	
		VMP-49-5-012618	1/26/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-49-5-041918	4/19/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-49-5-072018	7/20/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0031**	J		**0.00095**	J	
		VMP-49-5-102318	10/23/2018	<0.019	U		0.01	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	J	U	<0.0058	U	
		VMP-49-5-020119	2/1/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-49-5-042919	4/29/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0031**	J		<0.0063	U	
		VMP-49-5-072919	7/29/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-49-5-101819	10/18/2019	<0.02	U		0.0039	J		<0.0059	U		<0.005	U		<0.017	U					**0.0018**	J		<0.0059	U	
		VMP-49-5-012220	1/22/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0066**	J		<0.006	U	
		VMP-49-5-042920	4/29/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.005**	J		<0.0072	U	
		VMP-49-5-072420	7/24/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.008**	J		<0.0061	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0071**	J		<0.0066	U	
		VMP-49-5-110420	11/4/2020	<0.021	U		0.0018	J		<0.0063	U		<0.0053	U		<0.018	U					**0.0066**	J		<0.0063	U	
		VMP-49-5-012521	1/25/2021	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.014**			<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	<0.0043	U		<0.0069	U		<0.0068	U		<0.003	U		**0.0006**	J		<0.03	U		<0.0055	U		<0.0055	U	
		VMP-48-30-042815	4/28/2015	<0.0063	U		**0.14**			**0.11**			<0.0044	U		**0.0082**			**0.0031**	J		**0.0021**	J		**0.0036**	J	
		VMP-48-30-080315	8/3/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.0015**	J		<0.043	U	UJ	<0.008	U		<0.008	U	
		VMP-48-30-102015	10/20/2015	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.0051**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-30-102015-DUP	10/20/2015	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.0033**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-48-30-012916	1/29/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-48-30-042516	4/25/2016	<0.0068	U		<0.011	U		**0.0029**	J		<0.0047	U		**0.025**			<0.047	U		<0.0086	U		<0.0086	U	
		VMP-48-30-042516-DUP	4/25/2016	<0.0059	U		<0.0096	U		**0.0031**	J		<0.0041	U		**0.018**			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-48-30-072516	7/25/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0015**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-48-30-102616	10/26/2016	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.014**		J	<0.035	U		<0.0065	U		<0.0065	U	
		VMP-48-30-102616-Dup	10/26/2016	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0026**	J	J	<0.038	U		<0.007	U		<0.007	U	
		VMP-48-30-042617	4/26/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-48-30-072117	7/21/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0011**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-48-30-103117	10/31/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0009**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.00067**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-48-30-012618	1/26/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-48-30-042718	4/27/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-30-042718-DUP	4/27/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-48-30-072418	7/24/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-48-30-102418	10/24/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0056**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-30-012319	1/23/2019	<0.0047	U		<0.0076	U		**0.0025**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-48-30-042619	4/26/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-48-30-072619	7/26/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0017**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-48-30-102119	10/21/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-48-30-012920	1/29/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-48-30-073020	7/30/2020	<0.0086	U		<0.0087	U		**0.0053**	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-48-30-110220	11/2/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-48-30-012521	1/25/2021	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00098**	J		<0.036	U		<0.0066	U		<0.0066	U	
	5 ft	VMP-49-5-020215	2/3/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-49-5-042815	4/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-49-5-073015	7/30/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		**0.0016**	J		<0.0075	U	
		VMP-49-5-110315	11/3/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.0019**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-5-020116	2/1/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0023**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-49-5-042616	4/26/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.002**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-49-5-080116	8/1/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0012**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-5-102716	10/27/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	J	U	<0.039	U		<0.0072	U		<0.0072	U	
		VMP-49-5-012717	1/27/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0023**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-49-5-042417	4/24/2017	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-5-072617	7/26/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-5-102717	10/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.029**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-49-5-012618	1/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.00063**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-49-5-041918	4/19/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-5-072018	7/20/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0013**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-49-5-102318	10/23/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.012**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-49-5-020119	2/1/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-49-5-042919	4/29/2019	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-5-072919	7/29/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-49-5-101819	10/18/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-5-012220	1/22/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-5-042920	4/29/2020	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0056	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-49-5-072420	7/24/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	J	U	<0.04	U		<0.0073	U		<0.0073	U	
		VMP-49-5-110420	11/4/2020	<0.0055	U		<0.0088	U		**0.31**			<0.0038	U		<0.0048	U		<0.038	U		**0.001**	J		<0.007	U	
		VMP-49-5-012521	1/25/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0012**	J		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-48-30-020215	2/2/2015	<0.0054	U		0.052			<0.0049	U		<0.0049	U		0.00083	J		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-48-30-042815	4/28/2015	**0.28**			0.0027	J		**0.0014**	J		<0.0073	U		0.0034	J		<0.0038	U		0.01			**0.0081**		
		VMP-48-30-080315	8/3/2015	<0.0078	U		0.047			<0.0072	U		<0.0072	U		0.0078			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-48-30-102015	10/20/2015	<0.0073	U		0.16			**0.0016**	J		<0.0067	U		0.015			<0.0035	U		0.006			**0.0023**	J	
		VMP-48-30-102015-DUP	10/20/2015	<0.0073	U		0.16			<0.0067	U		<0.0067	U		0.013			<0.0035	U		0.0025	J		<0.0059	U	
		VMP-48-30-012916	1/29/2016	<0.0076	U		0.071			<0.0069	U		<0.0069	U		0.007			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-48-30-042516	4/25/2016	<0.0085	U		0.034			**0.01**			<0.0078	U		0.1			<0.004	U		0.022			**0.007**		
		VMP-48-30-042516-DUP	4/25/2016	<0.0075	U		0.038			**0.0084**			<0.0068	U		0.078			<0.0036	U		0.016			**0.0054**	J	
		VMP-48-30-072516	7/25/2016	<0.0066	U		0.037			<0.006	U		<0.006	U		0.0092			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-48-30-102616	10/26/2016	<0.0064	U		0.025			<0.0058	J	U	<0.0058	U		0.012			<0.003	U		0.086		J	**0.018**		J
		VMP-48-30-102616-Dup	10/26/2016	<0.0069	U		0.038			<0.0063	U		<0.0063	U		0.0039	J		<0.0033	U		0.0017	J	J	<0.0056	U	UJ
		VMP-48-30-042617	4/26/2017	<0.0066	U		0.043			<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-48-30-072117	7/21/2017	<0.0062	U		0.044			<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-48-30-103117	10/31/2017	<0.0061	U		0.033			<0.0056	U		<0.0056	U		0.0012	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-48-30-103117-DUP	10/31/2017	<0.006	U		0.033			<0.0054	U		<0.0054	U		0.00098	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-48-30-012618	1/26/2018	<0.006	U		0.03			<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-48-30-042718	4/27/2018	<0.0065	U		0.033			<0.0059	U		<0.0059	U		0.00062	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-30-042718-DUP	4/27/2018	<0.0069	U		0.032			<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-48-30-072418	7/24/2018	<0.0066	U		0.024			<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-48-30-102418	10/24/2018	<0.0065	U		0.014			<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-30-012319	1/23/2019	<0.006	U		0.021			<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-48-30-042619	4/26/2019	<0.0065	U		0.019			<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-48-30-072619	7/26/2019	<0.0067	U		0.016			<0.0061	U		<0.0061	U		0.0019	J		<0.0032	U		0.0015	J		<0.0054	U	
		VMP-48-30-102119	10/21/2019	<0.0069	U		0.016			<0.0063	U		<0.0063	U		0.022			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-48-30-012920	1/29/2020	<0.0077	U		0.024		J	<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-48-30-073020	7/30/2020	<0.0068	U		0.03			<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-48-30-110220	11/2/2020	<0.0067	U		0.03			<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-48-30-012521	1/25/2021	<0.0066	U		0.031			<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
	5 ft	VMP-49-5-020215	2/3/2015	<0.0074	U		0.0014	J		<0.0068	J	U	<0.0068	U		0.0017	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-49-5-042815	4/28/2015	<0.0075	U		<0.0078	U		**0.01**			**0.0029**	J		<0.0065	U		<0.0036	U		0.0031	J		**0.0018**	J	
		VMP-49-5-073015	7/30/2015	<0.0074	U		0.0016	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-49-5-110315	11/3/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0019	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-49-5-020116	2/1/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	J	U	<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-49-5-042616	4/26/2016	<0.0074	U		0.0014	J		<0.0067	U		<0.0067	U		0.0038	J		<0.0035	U		0.0016	J		<0.0059	U	
		VMP-49-5-080116	8/1/2016	<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		0.0013	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-5-102716	10/27/2016	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0073			**0.0017**	J	
		VMP-49-5-012717	1/27/2017	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		0.0016	J		<0.0053	U	
		VMP-49-5-042417	4/24/2017	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-49-5-072617	7/26/2017	<0.0065	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-49-5-102717	10/27/2017	<0.0061	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-49-5-012618	1/26/2018	**0.0067**			0.00096	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-49-5-041918	4/19/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-49-5-072018	7/20/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.012			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-5-102318	10/23/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-49-5-020119	2/1/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-49-5-042919	4/29/2019	<0.0069	U		0.0019	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-5-072919	7/29/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-5-101819	10/18/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0012	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-49-5-012220	1/22/2020	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-49-5-042920	4/29/2020	<0.0079	U		0.0016	J		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-49-5-072420	7/24/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-5-072420-DUP	7/24/2020	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-49-5-110420	11/4/2020	**0.0024**	J		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-5-012521	1/25/2021	<0.0064	U		0.0017	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	**0.0064**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-49-10-042815	4/28/2015	**0.016**	J		<0.0059	U		<0.012	U		<0.019	U		<0.072	U		<0.0041	U		<0.018	U		**0.0056**	J	
		VMP-49-10-073015	7/30/2015	**0.042**			<0.0048	J	U	<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		**0.0088**	J	
		VMP-49-10-110315	11/3/2015	**0.024**	J		<0.0046	U		<0.0097	U		<0.015	U		**0.0036**	J		<0.0032	U		0.0084	J		**0.0069**	J	
		VMP-49-10-020116	2/1/2016	<0.034	J	U	<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0061	J		<0.017	U	
		VMP-49-10-042616	4/26/2016	**0.026**	J		**0.0025**	J		<0.011	U		<0.017	U		<0.062	U		<0.0036	U		<0.015	U		<0.019	U	
		VMP-49-10-080116	8/1/2016	**0.016**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-10-102716	10/27/2016	**0.02**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		0.0072	J		<0.016	U	
		VMP-49-10-012717	1/27/2017	**0.0085**	J		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.01**	J	
		VMP-49-10-042417	4/24/2017	<0.034	J	U	<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-49-10-072617	7/26/2017	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-10-102717	10/27/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-49-10-012618	1/26/2018	<0.027	J	U	<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-49-10-041918	4/19/2018	**0.0082**	J		**0.00062**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-49-10-072018	7/20/2018	**0.036**			**0.0023**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.006**	J	
		VMP-49-10-102318	10/23/2018	**0.021**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0048**	J	
		VMP-49-10-012119	1/21/2019	**0.028**			<0.0034	U		**0.0014**	J		<0.011	U		<0.041	U		<0.0023	U		<0.01	U	UJ	**0.0079**	J	
		VMP-49-10-042919	4/29/2019	**0.017**	J		**0.0056**			<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.029			<0.014	U	
		VMP-49-10-072919	7/29/2019	**0.011**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-10-101819	10/18/2019	**0.0085**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-49-10-012220	1/22/2020	**0.01**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-49-10-042920	4/29/2020	**0.02**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-10-072420	7/24/2020	**0.05**			**0.00037**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-49-10-110420	11/4/2020	**0.039**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0018**	J	
		VMP-49-10-012521	1/25/2021	**0.012**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0079	J		<0.013	U	
	20 ft	VMP-49-20-020215	2/3/2015	**0.0067**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-20-073015	7/30/2015	**0.016**	J		**0.0015**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0034**	J	
		VMP-49-20-110315	11/3/2015	**0.014**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.012			**0.0062**	J	
		VMP-49-20-020116	2/1/2016	<0.031	J	U	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-49-20-042616	4/26/2016	**0.0077**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-20-080116	8/1/2016	**0.023**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-20-102716	10/27/2016	**0.03**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.01**	J	
		VMP-49-20-012717	1/27/2017	**0.014**	J		<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.004**	J	
		VMP-49-20-042417	4/24/2017	<0.033	J	U	<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-49-20-072617	7/26/2017	**0.014**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-20-102717	10/27/2017	**0.0085**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-49-20-012618	1/26/2018	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-49-20-041918	4/19/2018	**0.02**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0041**	J	
		VMP-49-20-072018	7/20/2018	**0.044**			**0.0032**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-20-102318	10/23/2018	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0028**	J	
		VMP-49-20-012119	1/21/2019	**0.0051**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U	UJ	<0.012	U	
		VMP-49-20-042919	4/29/2019	**0.014**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.015			<0.014	U	
		VMP-49-20-072919	7/29/2019	**0.015**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-20-101819	10/18/2019	**0.0087**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-49-20-012220	1/22/2020	**0.0069**	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-49-20-042920	4/29/2020	**0.006**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-49-20-042920-DUP	4/29/2020	**0.0093**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-49-20-072420	7/24/2020	**0.054**			**0.00044**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0063**	J	
		VMP-49-20-110420	11/4/2020	**0.0075**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-20-012521	1/25/2021	**0.0062**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	**0.0037**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-49-10-042815	4/28/2015	**0.0029**	J		<0.012	U		<0.0085	U		<0.016	U		<0.02	U		<0.009	U		<0.038	U		<0.0096	U	
		VMP-49-10-073015	7/30/2015	<0.019	J	U	<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-49-10-110315	11/3/2015	**0.0036**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-49-10-020116	2/1/2016	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-49-10-042616	4/26/2016	**0.25**			<0.01	U		<0.0074	U		<0.014	U		<0.017	U		<0.0079	U		<0.033	U		<0.0083	U	
		VMP-49-10-080116	8/1/2016	**0.0029**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-10-102716	10/27/2016	**0.0038**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-49-10-012717	1/27/2017	**0.0007**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	ND,UJ	UJ	<0.006	U	
		VMP-49-10-042417	4/24/2017	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-49-10-072617	7/26/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-49-10-102717	10/27/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0016**	J		<0.024	U		<0.006	U	
		VMP-49-10-012618	1/26/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-49-10-041918	4/19/2018	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-49-10-072018	7/20/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-49-10-102318	10/23/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0019**	J		<0.025	U		<0.0062	U	
		VMP-49-10-012119	1/21/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.006**			<0.022	U		<0.0054	U	
		VMP-49-10-042919	4/29/2019	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-49-10-072919	7/29/2019	**0.063**			<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-10-101819	10/18/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-49-10-012220	1/22/2020	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	ND,UJ	UJ	<0.0075	U	
		VMP-49-10-042920	4/29/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-49-10-072420	7/24/2020	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-49-10-110420	11/4/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0019**	J		<0.027	U		<0.0068	U	
		VMP-49-10-012521	1/25/2021	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0033**	J		<0.023	U		<0.0058	U	
	20 ft	VMP-49-20-020215	2/3/2015	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-49-20-073015	7/30/2015	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-49-20-110315	11/3/2015	**0.0017**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-49-20-020116	2/1/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-49-20-042616	4/26/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-49-20-080116	8/1/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-49-20-102716	10/27/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-49-20-012717	1/27/2017	**0.00093**	J		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	ND,UJ	UJ	<0.0058	U	
		VMP-49-20-042417	4/24/2017	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-49-20-072617	7/26/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-49-20-102717	10/27/2017	<0.014	J	U	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-49-20-012618	1/26/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-49-20-041918	4/19/2018	**0.0055**	J		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-49-20-072018	7/20/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-49-20-102318	10/23/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-20-012119	1/21/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-49-20-042919	4/29/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-49-20-072919	7/29/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-20-101819	10/18/2019	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-49-20-012220	1/22/2020	<0.017	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	ND,UJ	UJ	<0.0069	U	
		VMP-49-20-042920	4/29/2020	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-49-20-042920-DUP	4/29/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-49-20-072420	7/24/2020	**0.0027**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-49-20-110420	11/4/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-49-20-012521	1/25/2021	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0018**	J		<0.0053	U		<0.0053	U	
		VMP-49-10-042815	4/28/2015	<0.0064	U		<0.014	U		<0.011	U		<0.011	U		<0.011	U		**0.0024**	J		<0.0075	U		<0.0075	U	
		VMP-49-10-073015	7/30/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0028**	J		<0.0061	U		<0.0061	U	
		VMP-49-10-110315	11/3/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0047**	J		<0.0058	U		<0.0058	U	
		VMP-49-10-020116	2/1/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0026**	J		<0.0059	U		<0.0059	U	
		VMP-49-10-042616	4/26/2016	<0.0055	U		<0.012	U		<0.0097	U		<0.0097	U		<0.0097	U		**0.0028**	J		<0.0065	U		<0.0065	U	
		VMP-49-10-080116	8/1/2016	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-49-10-102716	10/27/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0021**	J		<0.0055	U		<0.0055	U	
		VMP-49-10-012717	1/27/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-49-10-042417	4/24/2017	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0022**	J		<0.0058	U		<0.0058	U	
		VMP-49-10-072617	7/26/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-49-10-102717	10/27/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-49-10-012618	1/26/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-49-10-041918	4/19/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-49-10-072018	7/20/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-49-10-102318	10/23/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0033**	J		<0.0049	U		<0.0049	U	
		VMP-49-10-012119	1/21/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0027**	J		<0.0042	U		<0.0042	U	
		VMP-49-10-042919	4/29/2019	**0.011**			<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0036**	J		<0.0047	U		<0.0047	U	
		VMP-49-10-072919	7/29/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-49-10-101819	10/18/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-49-10-012220	1/22/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-49-10-042920	4/29/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-49-10-072420	7/24/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-49-10-110420	11/4/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-49-10-012521	1/25/2021	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
	20 ft	VMP-49-20-020215	2/3/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-49-20-073015	7/30/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-49-20-110315	11/3/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0037**	J		<0.0049	U		<0.0049	U	
		VMP-49-20-020116	2/1/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-49-20-042616	4/26/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-49-20-080116	8/1/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-49-20-102716	10/27/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-49-20-012717	1/27/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-49-20-042417	4/24/2017	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-49-20-072617	7/26/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-49-20-102717	10/27/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-49-20-012618	1/26/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-49-20-041918	4/19/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0032**	J		<0.0044	U		<0.0044	U	
		VMP-49-20-072018	7/20/2018	**0.0013**	J		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-49-20-102318	10/23/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-49-20-012119	1/21/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-49-20-042919	4/29/2019	**0.0018**	J		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0034**	J		<0.0048	U		<0.0048	U	
		VMP-49-20-072919	7/29/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-49-20-101819	10/18/2019	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-49-20-012220	1/22/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-49-20-042920	4/29/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-49-20-042920-DUP	4/29/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-49-20-072420	7/24/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-49-20-110420	11/4/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-49-20-012521	1/25/2021	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-49-10-042815	4/28/2015	<0.0073	U		<0.0073	U		<0.0073	U	UJ	<0.064	U		<0.0085	U		<0.0084	U		<0.0084	U		<0.027	U	
		VMP-49-10-073015	7/30/2015	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-49-10-110315	11/3/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.003**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-10-020116	2/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-10-042616	4/26/2016	<0.0064	U		<0.0064	U		<0.0064	U		<0.056	U		<0.0074	U		<0.0073	U		<0.0073	U		<0.023	U	
		VMP-49-10-080116	8/1/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-10-102716	10/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-49-10-012717	1/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		**0.0087**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-49-10-042417	4/24/2017	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-49-10-072617	7/26/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-10-102717	10/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-49-10-012618	1/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-49-10-041918	4/19/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-49-10-072018	7/20/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0028**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-49-10-102318	10/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0054**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-49-10-012119	1/21/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-49-10-042919	4/29/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-49-10-072919	7/29/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-10-101819	10/18/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-49-10-012220	1/22/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-10-042920	4/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-10-072420	7/24/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-49-10-110420	11/4/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-49-10-012521	1/25/2021	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
	20 ft	VMP-49-20-020215	2/3/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-20-073015	7/30/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.0051**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-49-20-110315	11/3/2015	<0.0048	U		<0.0048	U		<0.0048	U		**0.014**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-49-20-020116	2/1/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-49-20-042616	4/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-20-080116	8/1/2016	<0.0051	U		<0.0051	U		<0.0051	U		**0.0042**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-20-102716	10/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-49-20-012717	1/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-49-20-042417	4/24/2017	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-49-20-072617	7/26/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-49-20-102717	10/27/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-49-20-012618	1/26/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-49-20-041918	4/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-49-20-072018	7/20/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-20-102318	10/23/2018	<0.0049	U		<0.0049	U		<0.0049	U		**0.0018**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-20-012119	1/21/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-49-20-042919	4/29/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-49-20-072919	7/29/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-20-101819	10/18/2019	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-49-20-012220	1/22/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-49-20-042920	4/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-20-042920-DUP	4/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-49-20-072420	7/24/2020	<0.0047	U		<0.0047	U		<0.0047	U		**0.018**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-49-20-110420	11/4/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-20-012521	1/25/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-49-10-042815	4/28/2015	0.17			<0.008	U		<0.0091	U		<0.014	U		<0.013	U		<0.0076	U		<0.079	U	UJ	<0.0065	U	
		VMP-49-10-073015	7/30/2015	0.0064	J		<0.0065	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-49-10-110315	11/3/2015	0.0084	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		**0.003**	J		<0.062	U		**0.0029**	J	
		VMP-49-10-020116	2/1/2016	0.082			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	J	U	<0.062	U		**0.0028**	J	
		VMP-49-10-042616	4/26/2016	0.0036	J		**0.0019**	J		<0.0079	U		<0.012	U		<0.011	U		**0.003**	J		<0.069	U		**0.0016**	J	
		VMP-49-10-080116	8/1/2016	0.017			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-49-10-102716	10/27/2016	0.016			**0.0022**	J		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		**0.00065**	J	
		VMP-49-10-012717	1/27/2017	0.018			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-49-10-042417	4/24/2017	<0.011	J	U	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		**0.0023**	J	
		VMP-49-10-072617	7/26/2017	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-49-10-102717	10/27/2017	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-49-10-012618	1/26/2018	0.035			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-49-10-041918	4/19/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-49-10-072018	7/20/2018	0.016			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-10-102318	10/23/2018	0.016			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0021**	J		<0.051	U		<0.0042	U	
		VMP-49-10-012119	1/21/2019	0.0077	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-49-10-042919	4/29/2019	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.012**			<0.05	U		**0.035**		
		VMP-49-10-072919	7/29/2019	<0.0093	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-49-10-101819	10/18/2019	0.0024	J	J	<0.0052	U		0.00053	J		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-49-10-012220	1/22/2020	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-49-10-042920	4/29/2020	0.015		J	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-10-072420	7/24/2020	0.0084	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0012**	J	
		VMP-49-10-110420	11/4/2020	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-49-10-012521	1/25/2021	0.0075	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
	20 ft	VMP-49-20-020215	2/3/2015	0.0082	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-49-20-073015	7/30/2015	<0.01	U		<0.0061	U		0.0062	J		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-49-20-110315	11/3/2015	0.0053	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.0027**	J		<0.052	U		**0.0019**	J	
		VMP-49-20-020116	2/1/2016	0.054			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	J	U	<0.056	U		**0.0039**	J	
		VMP-49-20-042616	4/26/2016	0.0069	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.003**	J		<0.055	U		**0.0015**	J	
		VMP-49-20-080116	8/1/2016	0.0066	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0011**	J	
		VMP-49-20-102716	10/27/2016	<0.0099	J	U	<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-49-20-012717	1/27/2017	0.016			<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-49-20-042417	4/24/2017	<0.011	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0018**	J	
		VMP-49-20-072617	7/26/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-20-102717	10/27/2017	0.0093			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-49-20-012618	1/26/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-49-20-041918	4/19/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-49-20-072018	7/20/2018	0.1			**0.001**	J		<0.0063	U		<0.0098	U		<0.0089	U		**0.0067**			<0.055	U		**0.018**		
		VMP-49-20-102318	10/23/2018	0.0084	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0014**	J		<0.053	U		**0.0026**	J	
		VMP-49-20-012119	1/21/2019	0.003	J		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-49-20-042919	4/29/2019	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0046**		
		VMP-49-20-072919	7/29/2019	0.0066	J	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-49-20-101819	10/18/2019	0.0072	J	J	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-49-20-012220	1/22/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-49-20-042920	4/29/2020	0.0092	J	J	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-49-20-042920-DUP	4/29/2020	0.0076	J	J	<0.0056	U		<0.0064	U		<0.009	U		<0.0053	U		<0.0046	U		<0.055	U		<0.0046	U	
		VMP-49-20-072420	7/24/2020	0.03			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0039**	J	
		VMP-49-20-110420	11/4/2020	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-49-20-012521	1/25/2021	<0.022	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.0047	U					**0.0037**	J		<0.0064	U	
		VMP-49-10-042815	4/28/2015	<0.03	U		<0.022	U		<0.0091	U		<0.0076	U		<0.0067	U					**0.0039**	J		<0.0091	U	
		VMP-49-10-073015	7/30/2015	<0.025	U		<0.018	U		<0.0074	U		**0.002**	J		<0.0054	U					**0.0036**	J		<0.0074	U	
		VMP-49-10-110315	11/3/2015	<0.024	U		0.0066	J		<0.0071	U		<0.0059	J	U	<0.0052	U					**0.014**			<0.0071	U	
		VMP-49-10-020116	2/1/2016	<0.024	U		0.004	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.088**			<0.0071	U	
		VMP-49-10-042616	4/26/2016	<0.026	U		<0.019	U		<0.0079	U		<0.0066	U		<0.0058	U					**0.016**			**0.0017**	J	
		VMP-49-10-080116	8/1/2016	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0031**	J		<0.0061	U	
		VMP-49-10-102716	10/27/2016	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U		<0.014	U		**0.059**			<0.0067	U	
		VMP-49-10-012717	1/27/2017	<0.019	U		0.02			<0.0057	U		<0.0048	U		<0.017	U					**0.0034**	J		<0.0057	U	
		VMP-49-10-042417	4/24/2017	<0.024	U		<0.017	U		<0.007	U		<0.0059	U		<0.021	U					**0.007**	J		**0.0014**	J	
		VMP-49-10-072617	7/26/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.007**	J		<0.0062	U	
		VMP-49-10-102717	10/27/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-49-10-012618	1/26/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-49-10-041918	4/19/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-49-10-072018	7/20/2018	**0.0034**	J		0.004	J		**0.0062**			<0.005	U		<0.018	U					**0.013**			<0.006	U	
		VMP-49-10-102318	10/23/2018	<0.02	U		0.018			<0.0059	U		<0.0049	U		<0.017	U					**0.0074**	J		<0.0059	U	
		VMP-49-10-012119	1/21/2019	**0.0017**	J		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.0024**	J		<0.0052	U	
		VMP-49-10-042919	4/29/2019	<0.019	U		0.055			<0.0058	U		<0.0048	U		<0.017	U					**0.0028**	J		<0.0058	U	
		VMP-49-10-072919	7/29/2019	<0.02	U		<0.014	U		**0.0019**	J		<0.005	U		<0.018	U					**0.014**			<0.0061	U	
		VMP-49-10-101819	10/18/2019	<0.02	U		<0.014	U		**0.00075**	J		<0.0049	U		<0.017	U					**0.0016**	J		**0.0027**	J	
		VMP-49-10-012220	1/22/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.007**	J		<0.0071	U	
		VMP-49-10-042920	4/29/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0047**	J		<0.006	U	
		VMP-49-10-072420	7/24/2020	<0.023	U		<0.016	U		<0.0069	U		<0.0057	U		<0.02	U					**0.012**	J		<0.0069	U	
		VMP-49-10-110420	11/4/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.017**			<0.0064	U	
		VMP-49-10-012521	1/25/2021	<0.018	U		0.01	J		<0.0055	U		<0.0046	U		<0.016	U					**0.012**			<0.0055	U	
	20 ft	VMP-49-20-020215	2/3/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					<0.012	U		<0.0063	U	
		VMP-49-20-073015	7/30/2015	<0.023	U		<0.016	U		<0.0069	U		<0.0057	U		<0.005	U					**0.0039**	J		<0.0069	U	
		VMP-49-20-110315	11/3/2015	<0.02	U		<0.014	U		<0.0059	U		<0.005	J	U	<0.0044	U					**0.0029**	J		<0.0059	U	
		VMP-49-20-020116	2/1/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.02**			<0.0065	U	
		VMP-49-20-042616	4/26/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.009**	J		<0.0063	U	
		VMP-49-20-080116	8/1/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0042**	J		<0.0063	U	
		VMP-49-20-102716	10/27/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U		<0.014	U		**0.0064**	J		<0.0064	U	
		VMP-49-20-012717	1/27/2017	<0.018	U		0.0011	J		<0.0056	U		<0.0046	U		<0.016	U					**0.003**	J		<0.0056	U	
		VMP-49-20-042417	4/24/2017	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.0076**	J		<0.0069	U	
		VMP-49-20-072617	7/26/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0064**	J		<0.006	U	
		VMP-49-20-102717	10/27/2017	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-49-20-012618	1/26/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-49-20-041918	4/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-49-20-072018	7/20/2018	<0.021	U		0.01	J		<0.0063	U		<0.0052	U		<0.018	U					**0.0095**	J		<0.0063	U	
		VMP-49-20-102318	10/23/2018	<0.02	U		0.0024	J		<0.0061	U		<0.005	U		<0.018	U					**0.003**	J		<0.0061	U	
		VMP-49-20-012119	1/21/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.0034**	J		<0.0052	U	
		VMP-49-20-042919	4/29/2019	<0.019	U		0.015			<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-49-20-072919	7/29/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0091**	J		<0.0061	U	
		VMP-49-20-101819	10/18/2019	<0.023	U		<0.016	U		**0.0017**	J		<0.0057	U		<0.02	U					<0.014	U		**0.0048**	J	
		VMP-49-20-012220	1/22/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.009**	J		<0.0066	U	
		VMP-49-20-042920	4/29/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.003**	J		<0.006	U	
		VMP-49-20-042920-DUP	4/29/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0044**	J		<0.0064	U	
		VMP-49-20-072420	7/24/2020	<0.019	U		0.022			<0.0058	U		<0.0049	U		<0.017	U					**0.032**			<0.0058	U	
		VMP-49-20-110420	11/4/2020	<0.021	U		0.029			<0.0062	U		<0.0052	U		<0.018	U					**0.013**			<0.0062	U	
		VMP-49-20-012521	1/25/2021	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0038**	J		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-49-10-042815	4/28/2015	<0.0079	U		<0.013	U		<0.012	U		<0.0054	U		<0.007	U		<0.055	U	UJ	<0.01	U		<0.01	U	
		VMP-49-10-073015	7/30/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U	UJ	<0.0082	U		<0.0082	U	
		VMP-49-10-110315	11/3/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.0019**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-10-020116	2/1/2016	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		**0.0013**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-10-042616	4/26/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		**0.00098**	J		<0.048	U		<0.0088	U		<0.0088	U	
		VMP-49-10-080116	8/1/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0014**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-49-10-102716	10/27/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0013**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-49-10-012717	1/27/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0068**			<0.034	U		<0.0064	U		<0.0064	U	
		VMP-49-10-042417	4/24/2017	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-49-10-072617	7/26/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-49-10-102717	10/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-49-10-012618	1/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-49-10-041918	4/19/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0011**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-49-10-072018	7/20/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0026**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-10-102318	10/23/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.019**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-10-012119	1/21/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-49-10-042919	4/29/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-49-10-072919	7/29/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0026**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-49-10-101819	10/18/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00091**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-49-10-012220	1/22/2020	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-10-042920	4/29/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-49-10-072420	7/24/2020	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	J	U	<0.042	U		<0.0076	U		<0.0076	U	
		VMP-49-10-110420	11/4/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-49-10-012521	1/25/2021	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
	20 ft	VMP-49-20-020215	2/3/2015	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-20-073015	7/30/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.003**	J		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-49-20-110315	11/3/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0016**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-20-020116	2/1/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00088**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-49-20-042616	4/26/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.001**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-20-080116	8/1/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0016**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-20-102716	10/27/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-49-20-012717	1/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0005**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-49-20-042417	4/24/2017	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-49-20-072617	7/26/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-20-102717	10/27/2017	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-49-20-012618	1/26/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-49-20-041918	4/19/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-49-20-072018	7/20/2018	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.011**			<0.038	U		<0.007	U		<0.007	U	
		VMP-49-20-102318	10/23/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-49-20-012119	1/21/2019	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-49-20-042919	4/29/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-49-20-072919	7/29/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-49-20-101819	10/18/2019	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-49-20-012220	1/22/2020	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-49-20-042920	4/29/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0016**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-49-20-042920-DUP	4/29/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-49-20-072420	7/24/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0055**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-49-20-110420	11/4/2020	<0.0054	U		<0.0087	U		**0.0016**	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-49-20-012521	1/25/2021	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-49	10 ft	VMP-49-10-020215	2/3/2015	<0.007	U		0.00098	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-49-10-042815	4/28/2015	<0.0099	U		<0.01	U		<0.0091	U		<0.0091	U		0.0023	J		<0.0047	U		<0.008	U		<0.008	U	
		VMP-49-10-073015	7/30/2015	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-49-10-110315	11/3/2015	<0.0078	U		0.0026	J		<0.0071	U		**0.0017**	J		0.0014	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-49-10-020116	2/1/2016	<0.0078	U		0.0014	J		<0.0071	U		<0.0071	U		<0.0068	J	U	<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-49-10-042616	4/26/2016	<0.0086	U		<0.009	U		<0.0079	U		<0.0079	U		0.0032	J		<0.0041	U		0.0025	J		<0.007	U	
		VMP-49-10-080116	8/1/2016	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-10-102716	10/27/2016	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		0.0068			<0.0035	U		0.007			**0.0019**	J	
		VMP-49-10-012717	1/27/2017	**0.0013**	J		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0023	J		**0.00091**	J	
		VMP-49-10-042417	4/24/2017	<0.0077	U		0.0014	J		<0.007	U		<0.007	U		0.019			<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-49-10-072617	7/26/2017	<0.0068	U		0.0018	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-10-102717	10/27/2017	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-49-10-012618	1/26/2018	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-49-10-041918	4/19/2018	<0.0063	U		0.0016	J		<0.0058	U		<0.0058	U		0.00074	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-49-10-072018	7/20/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-49-10-102318	10/23/2018	<0.0065	U		0.002	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.00086	J		<0.0052	U	
		VMP-49-10-012119	1/21/2019	<0.0056	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-49-10-042919	4/29/2019	<0.0063	U		0.002	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0017	J		<0.0051	U	
		VMP-49-10-072919	7/29/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-10-101819	10/18/2019	<0.0064	U		0.0015	J		**0.0012**	J		<0.0059	U		0.0022	J		<0.003	U		0.00094	J		<0.0052	U	
		VMP-49-10-012220	1/22/2020	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-49-10-042920	4/29/2020	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-49-10-072420	7/24/2020	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-49-10-110420	11/4/2020	<0.007	U		0.00095	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-49-10-012521	1/25/2021	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		0.0017	J		<0.0029	U		<0.0049	U		<0.0049	U	
	20 ft	VMP-49-20-020215	2/3/2015	<0.0068	U		0.00099	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-20-073015	7/30/2015	<0.0075	U		<0.0079	U		**0.013**			**0.0029**	J		<0.0065	U		<0.0036	U		0.0061			**0.0036**	J	
		VMP-49-20-110315	11/3/2015	<0.0065	U		0.0021	J		<0.0059	U		<0.0059	U		0.0012	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-49-20-020116	2/1/2016	<0.0071	U		0.0013	J		<0.0065	U		<0.0065	U		0.013			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-49-20-042616	4/26/2016	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.002	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-20-080116	8/1/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0011	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-20-102716	10/27/2016	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.0074			<0.0033	U		0.0018	J		<0.0057	U	
		VMP-49-20-012717	1/27/2017	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		0.0011	J		<0.0049	U	
		VMP-49-20-042417	4/24/2017	<0.0076	U		0.0012	J		<0.0069	U		<0.0069	U		0.0018	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-49-20-072617	7/26/2017	<0.0065	U		0.0015	J		<0.006	U		<0.006	U		0.0074			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-49-20-102717	10/27/2017	<0.0058	U		0.0017	J		<0.0053	U		<0.0053	U		0.00076	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-49-20-012618	1/26/2018	<0.0063	U		0.001	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-49-20-041918	4/19/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.00091	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-49-20-072018	7/20/2018	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		0.019			<0.0033	U		0.0029	J		<0.0056	U	
		VMP-49-20-102318	10/23/2018	<0.0066	U		0.002	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-20-012119	1/21/2019	<0.0057	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-49-20-042919	4/29/2019	<0.0063	U		0.0018	J		<0.0058	U		<0.0058	U		0.0075			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-49-20-072919	7/29/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0058			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-20-101819	10/18/2019	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0066			<0.0035	U		<0.006	U		<0.006	U	
		VMP-49-20-012220	1/22/2020	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-49-20-042920	4/29/2020	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-49-20-042920-DUP	4/29/2020	<0.007	U		0.0012	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-20-072420	7/24/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	J	U	<0.0052	U	
		VMP-49-20-110420	11/4/2020	<0.0068	U		0.00094	J		<0.0062	U		<0.0062	U		0.0073			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-20-012521	1/25/2021	<0.0063	U		0.0017	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	**0.0093**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-49-30-042815	4/28/2015	**0.02**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-49-30-073015	7/30/2015	<1.8	U		**0.17**	J		<1.2	U		<1.9	U		<0.73	U		<0.41	U		470			<2.2	U	
		VMP-49-30-073015-DUP	7/30/2015	<1.7	U		**0.23**	J		<1.2	U		<1.9	U		<0.71	U		<0.4	U		470			<2.1	U	
		VMP-49-30-110315	11/3/2015	**0.011**	J		**0.0012**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0094	J		**0.0037**	J	
		VMP-49-30-110315-DUP	11/3/2015	**0.016**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0055**	J	
		VMP-49-30-020116	2/1/2016	**0.015**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.031	J	U	**0.0012**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-042716	4/27/2016	**0.011**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0096	J		<0.016	U	
		VMP-49-30-042716-DUP	4/27/2016	**0.027**	J		**0.001**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.011	J		**0.0076**	J	
		VMP-49-30-080116	8/1/2016	**0.031**	J		**0.0053**			<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0056	J		**0.0056**	J	
		VMP-49-30-080116-DUP	8/1/2016	**0.046**			<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.05			**0.009**	J	
		VMP-49-30-102716	10/27/2016	**0.02**	J		<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.0077**	J	
		VMP-49-30-012717	1/27/2017	**0.012**	J		<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-49-30-042417	4/24/2017	<0.033	J	U	**0.0017**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-49-30-072617	7/26/2017	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-072617-DUP	7/26/2017	**0.014**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0048**	J	
		VMP-49-30-102717	10/27/2017	**0.0099**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0036**	J	
		VMP-49-30-012618	1/26/2018	<0.028	J	U	<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-49-30-042718	4/27/2018	**0.0056**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-072018	7/20/2018	**0.022**	J		**0.0013**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-102318	10/23/2018	**0.023**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0035**	J	
		VMP-49-30-012119	1/21/2019	**0.0059**	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U	UJ	<0.012	U	
		VMP-49-30-042919	4/29/2019	**0.013**	J		**0.016**		J	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.28		J	<0.014	U	
		VMP-49-30-042919-DUP	4/29/2019	**0.016**	J		<0.0041	U	UJ	<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		0.027		J	<0.015	U	
		VMP-49-30-072919	7/29/2019	**0.031**			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-101819	10/18/2019	**0.0081**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-49-30-012220	1/22/2020	<0.03	U		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-042920	4/29/2020	**0.011**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-49-30-072420	7/24/2020	**0.032**			**0.00037**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-49-30-110420	11/4/2020	<0.95	U		<0.32	U		<0.67	U		<1	U		<1.6	U		<0.22	U		240			<1.2	U	
		VMP-49-30-012521	1/25/2021	**0.0084**	J		**0.001**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-49-30-042815	4/28/2015	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0079	U	
		VMP-49-30-073015	7/30/2015	<0.58	U		<1.2	U		<0.86	U		<1.6	U		<2	U		<0.91	U		<1.5	U		<0.97	U	
		VMP-49-30-073015-DUP	7/30/2015	<0.57	U		<1.1	U		<0.84	U		<1.6	U		<1.9	U		<0.89	U		<1.5	U		<0.94	U	
		VMP-49-30-110315	11/3/2015	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-49-30-110315-DUP	11/3/2015	**0.0017**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-30-020116	2/1/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-49-30-042716	4/27/2016	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-49-30-042716-DUP	4/27/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-49-30-080116	8/1/2016	**0.01**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-49-30-080116-DUP	8/1/2016	**0.009**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-49-30-102716	10/27/2016	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-49-30-012717	1/27/2017	**0.0009**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	ND,UJ	UJ	<0.0065	U	
		VMP-49-30-042417	4/24/2017	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-49-30-072617	7/26/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-49-30-072617-DUP	7/26/2017	**0.003**	J		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-49-30-102717	10/27/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-49-30-012618	1/26/2018	**0.0038**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-49-30-042718	4/27/2018	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-49-30-072018	7/20/2018	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-49-30-102318	10/23/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-49-30-012119	1/21/2019	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.0051	U		<0.021	U		<0.0054	U	
		VMP-49-30-042919	4/29/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-49-30-042919-DUP	4/29/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-49-30-072919	7/29/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-49-30-101819	10/18/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.001**	J		<0.027	U		<0.0068	U	
		VMP-49-30-012220	1/22/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	ND,UJ	UJ	<0.0066	U	
		VMP-49-30-042920	4/29/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-49-30-072420	7/24/2020	**0.0037**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-49-30-110420	11/4/2020	<1.2	U		<0.63	U		<0.46	U		<0.86	U		<1.1	U		<0.49	U		<0.83	U		<0.52	U	
		VMP-49-30-012521	1/25/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-49-30-042815	4/28/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0017**	J		<0.0062	U		<0.0062	U	
		VMP-49-30-073015	7/30/2015	**2.3**			<1.4	U		<1.1	U		<1.1	U		<1.1	U		<0.92	U		<0.76	U		<0.76	U	
		VMP-49-30-073015-DUP	7/30/2015	**2.1**			<1.4	U		<1.1	U		<1.1	U		<1.1	U		<0.9	U		<0.74	U		<0.74	U	
		VMP-49-30-110315	11/3/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0038**	J		<0.0054	U		<0.0054	U	
		VMP-49-30-110315-DUP	11/3/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0041**	J		<0.005	U		<0.005	U	
		VMP-49-30-020116	2/1/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-49-30-042716	4/27/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-49-30-042716-DUP	4/27/2016	**0.0023**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-49-30-080116	8/1/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0026**	J		<0.0058	U		<0.0058	U	
		VMP-49-30-080116-DUP	8/1/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.003**	J		<0.0058	U		<0.0058	U	
		VMP-49-30-102716	10/27/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-49-30-012717	1/27/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-49-30-042417	4/24/2017	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-49-30-072617	7/26/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-49-30-072617-DUP	7/26/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-49-30-102717	10/27/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-49-30-012618	1/26/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-49-30-042718	4/27/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.022**			<0.0051	U		<0.0051	U	
		VMP-49-30-072018	7/20/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-49-30-102318	10/23/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-49-30-012119	1/21/2019	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0027**	J		<0.0042	U		<0.0042	U	
		VMP-49-30-042919	4/29/2019	**0.026**		J	<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0034**	J		<0.0048	U		<0.0048	U	
		VMP-49-30-042919-DUP	4/29/2019	**0.0013**	J	J	<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0037**	J		<0.0052	U		<0.0052	U	
		VMP-49-30-072919	7/29/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-49-30-101819	10/18/2019	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0053**	J		<0.0054	U		<0.0054	U	
		VMP-49-30-012220	1/22/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0032**	J		<0.0052	U		<0.0052	U	
		VMP-49-30-042920	4/29/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-49-30-072420	7/24/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-49-30-110420	11/4/2020	<0.34	U		<0.77	U		<0.6	U		<0.6	U		<0.6	U		<0.5	U		<0.41	U		<0.41	U	
		VMP-49-30-012521	1/25/2021	**0.00098**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-49-30-042815	4/28/2015	<0.006	U		<0.006	U		<0.006	U	UJ	<0.053	U		<0.007	U		<0.0069	U		<0.0069	J	U	<0.022	U	
		VMP-49-30-073015	7/30/2015	<0.74	U		<0.74	U		<0.74	U		<0.65	U		<0.86	U		<0.85	U		<0.85	U		<2.7	U	
		VMP-49-30-073015-DUP	7/30/2015	<0.72	U		<0.72	U		<0.72	U		<0.63	U		<0.84	U		<0.83	U		<0.83	U		<2.6	U	
		VMP-49-30-110315	11/3/2015	<0.0053	U		<0.0053	U		<0.0053	U		**0.003**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-49-30-110315-DUP	11/3/2015	<0.0049	U		<0.0049	U		<0.0049	U		**0.0043**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-30-020116	2/1/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-30-042716	4/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-49-30-042716-DUP	4/27/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-30-080116	8/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-30-080116-DUP	8/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-49-30-102716	10/27/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-49-30-012717	1/27/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-30-042417	4/24/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-49-30-072617	7/26/2017	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-30-072617-DUP	7/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-49-30-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-49-30-012618	1/26/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-49-30-042718	4/27/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-30-072018	7/20/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-30-102318	10/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0021**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-49-30-012119	1/21/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-49-30-042919	4/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		**0.005**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-49-30-042919-DUP	4/29/2019	<0.005	U		<0.005	U		<0.005	U		**0.0032**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-30-072919	7/29/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-30-101819	10/18/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-49-30-012220	1/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-30-042920	4/29/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-49-30-072420	7/24/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-49-30-110420	11/4/2020	<0.4	U		<0.4	U		<0.4	U		<1.4	U		<0.46	U		<0.46	U		<0.46	U		<1.4	U	
		VMP-49-30-012521	1/25/2021	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	0.0075	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-49-30-042815	4/28/2015	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U	UJ	<0.0054	U	
		VMP-49-30-073015	7/30/2015	<1.4	U		<0.81	U		<0.92	U		<1.4	U		<1.3	U		**0.95**			<8	U		**17**		
		VMP-49-30-073015-DUP	7/30/2015	<1.4	U		**0.28**	J		<0.89	U		<1.4	U		<1.3	U		**0.95**			<7.8	U		**16**		
		VMP-49-30-110315	11/3/2015	0.0059	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.0034**	J		<0.057	U		<0.0047	U	
		VMP-49-30-110315-DUP	11/3/2015	0.0053	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-49-30-020116	2/1/2016	0.0085	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	J	U	<0.059	U		**0.0034**	J	
		VMP-49-30-020116-DUP	2/1/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	J	U	<0.055	U		**0.0038**	J	
		VMP-49-30-042716	4/27/2016	<0.01	U		<0.0061	U		0.0018	J		<0.011	U		<0.0098	U		**0.0026**	J		<0.06	U		**0.0018**	J	
		VMP-49-30-042716-DUP	4/27/2016	0.0064	J		<0.0054	U		0.0022	J		<0.0095	U		<0.0087	U		**0.0038**	J		<0.053	U		**0.0018**	J	
		VMP-49-30-080116	8/1/2016	0.01	J		**0.004**	J		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.0012**	J	
		VMP-49-30-080116-DUP	8/1/2016	0.021			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.0017**	J	
		VMP-49-30-102716	10/27/2016	<0.011	J	U	<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-49-30-012717	1/27/2017	0.024			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-49-30-042417	4/24/2017	<0.01	J	U	**0.0022**	J		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0021**	J	
		VMP-49-30-072617	7/26/2017	<0.0094	U	UJ	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		**0.002**	J		<0.053	U		**0.0026**	J	
		VMP-49-30-072617-DUP	7/26/2017	0.034		J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0026**	J	
		VMP-49-30-102717	10/27/2017	0.013			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-49-30-012618	1/26/2018	0.01			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-49-30-042718	4/27/2018	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-49-30-072018	7/20/2018	0.0068	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-49-30-102318	10/23/2018	0.015			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-49-30-012119	1/21/2019	0.0032	J		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-49-30-042919	4/29/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.026**		J	<0.05	U		**0.16**		J
		VMP-49-30-042919-DUP	4/29/2019	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0034**	J	J	<0.054	U		**0.0052**		J
		VMP-49-30-072919	7/29/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-49-30-101819	10/18/2019	<0.01	U	UJ	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-49-30-012220	1/22/2020	<0.0097	U		<0.0056	U		<0.0063	U		**0.0048**	J		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-49-30-042920	4/29/2020	0.0098		J	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-49-30-072420	7/24/2020	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-49-30-110420	11/4/2020	<0.76	U		<0.44	U		<0.49	U		<0.77	U		<0.7	U		<0.41	U		<4.3	U		**0.61**		
		VMP-49-30-012521	1/25/2021	<0.024	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0022**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.0047	U					**0.0056**	J		<0.0064	U	
		VMP-49-30-042815	4/28/2015	<0.025	U		0.0038	J		<0.0075	U		<0.0062	U		<0.0055	U					**0.0021**	J		<0.0075	U	
		VMP-49-30-073015	7/30/2015	<3.1	U		460			<0.92	U		<0.77	U		<0.67	U					<1.8	U		<0.92	U	
		VMP-49-30-073015-DUP	7/30/2015	<3	U		460			<0.89	U		<0.74	U		<0.66	U					<1.8	U		<0.89	U	
		VMP-49-30-110315	11/3/2015	<0.022	U		0.011	J		<0.0066	U		<0.0055	J	U	<0.0048	U					**0.0099**	J		<0.0066	U	
		VMP-49-30-110315-DUP	11/3/2015	**0.0019**	J		0.0095	J		<0.0061	U		<0.005	J	U	<0.0044	U					**0.0095**	J		<0.0061	U	
		VMP-49-30-020116	2/1/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.029**			<0.0068	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.017**			<0.0063	U	
		VMP-49-30-042716	4/27/2016	<0.023	U		0.0089	J		<0.0069	U		<0.0057	U		<0.005	U					<0.014	J	UJ	<0.0069	U	
		VMP-49-30-042716-DUP	4/27/2016	<0.02	U		0.019			<0.0061	U		<0.0051	U		<0.0045	U					**0.032**		J	<0.0061	U	
		VMP-49-30-080116	8/1/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.008**	J		<0.0071	U	
		VMP-49-30-080116-DUP	8/1/2016	<0.024	U		0.0038	J		<0.0071	U		<0.0059	U		<0.021	U					**0.019**			<0.0071	U	
		VMP-49-30-102716	10/27/2016	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.021	U		<0.016	U		**0.0058**	J		<0.0073	U	
		VMP-49-30-012717	1/27/2017	<0.021	U		0.0027	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0022**	J		<0.0062	U	
		VMP-49-30-042417	4/24/2017	<0.022	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0078**	J		<0.0068	U	
		VMP-49-30-072617	7/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0096**	J		<0.0061	U	
		VMP-49-30-072617-DUP	7/26/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0089**	J		<0.0061	U	
		VMP-49-30-102717	10/27/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-49-30-012618	1/26/2018	<0.019	U		0.035			<0.0058	U		<0.0049	U		<0.017	U					**0.0049**	J		<0.0058	U	
		VMP-49-30-042718	4/27/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-49-30-072018	7/20/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.012**	J		<0.0062	U	
		VMP-49-30-102318	10/23/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0035**	J		<0.0059	U	
		VMP-49-30-012119	1/21/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-49-30-042919	4/29/2019	<0.019	U		0.53		J	<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-49-30-042919-DUP	4/29/2019	<0.021	U		0.017		J	<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-49-30-072919	7/29/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0057**	J		<0.0062	U	
		VMP-49-30-101819	10/18/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0014**	J		<0.0065	U	
		VMP-49-30-012220	1/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.0077**	J		<0.0063	U	
		VMP-49-30-042920	4/29/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0044**	J		<0.0062	U	
		VMP-49-30-072420	7/24/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.014**			<0.0063	U	
		VMP-49-30-110420	11/4/2020	<1.6	U		120			<0.49	U		<0.41	U		<0.36	U					<0.99	U		<0.49	U	
		VMP-49-30-012521	1/25/2021	<0.021	U		0.0032	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0063**	J		<0.0063	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0012**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-49-30-042815	4/28/2015	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U	UJ	<0.0083	U		<0.0083	U	
		VMP-49-30-073015	7/30/2015	<0.8	U		<1.3	U		<1.3	U		<0.55	U		<0.7	U		<5.6	U		<1	U		<1	U	
		VMP-49-30-073015-DUP	7/30/2015	<0.78	U		<1.2	U		<1.2	U		<0.54	U		<0.68	U		<5.4	U		<0.99	U		<0.99	U	
		VMP-49-30-110315	11/3/2015	<0.0057	U		<0.0092	U		<0.0091	U		**0.0012**	J	J	**0.0034**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-49-30-110315-DUP	11/3/2015	<0.0053	U		<0.0085	U		**0.0039**	J		<0.0036	U		**0.0016**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-49-30-020116	2/1/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0008**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-30-042716	4/27/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-49-30-042716-DUP	4/27/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.007**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-49-30-080116	8/1/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.00083**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-30-080116-DUP	8/1/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.0025**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-49-30-102716	10/27/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	J	U	<0.044	U		<0.0081	U		<0.0081	U	
		VMP-49-30-012717	1/27/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0012**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-49-30-042417	4/24/2017	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0013**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-49-30-072617	7/26/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-49-30-072617-DUP	7/26/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-49-30-102717	10/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-49-30-012618	1/26/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.029**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-49-30-042718	4/27/2018	<0.0054	U		<0.0086	U		**0.0017**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-49-30-072018	7/20/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0014**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-49-30-102318	10/23/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-49-30-012119	1/21/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-49-30-042919	4/29/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.004**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-49-30-042919-DUP	4/29/2019	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-30-072919	7/29/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-49-30-101819	10/18/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-49-30-012220	1/22/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-30-042920	4/29/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-49-30-072420	7/24/2020	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-49-30-110420	11/4/2020	<0.43	U		<0.69	U		<0.68	U		<0.3	U		<0.38	U		<3	U		<0.55	U		<0.55	U	
		VMP-49-30-012521	1/25/2021	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-49-30-020215	2/3/2015	<0.007	U		0.0017	J		<0.0064	J	U	<0.0064	U		0.0054	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-30-042815	4/28/2015	<0.0082	U		0.021			<0.0075	U		<0.0075	U		0.0091			<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-49-30-073015	7/30/2015	<1	U		<1	U		<0.92	U		<0.92	U		180			<0.48	U		<0.81	U		<0.81	U	
		VMP-49-30-073015-DUP	7/30/2015	<0.98	U		<1	U		**0.37**	J		<0.89	U		180			<0.46	U		0.24	J		**0.24**	J	
		VMP-49-30-110315	11/3/2015	<0.0072	U		0.0069	J		<0.0066	U		<0.0066	U		0.0016	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-49-30-110315-DUP	11/3/2015	<0.0066	U		0.0077			<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-30-020116	2/1/2016	<0.0074	U		0.0091			<0.0068	U		<0.0068	U		0.0039	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-49-30-020116-DUP	2/1/2016	<0.0069	U		0.0098			<0.0063	U		<0.0063	U		0.0036	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-30-042716	4/27/2016	<0.0075	U		0.0039	J		<0.0069	U		<0.0069	U		0.002	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-49-30-042716-DUP	4/27/2016	**0.0056**	J		0.0032	J		<0.0061	U		<0.0061	U		0.0023	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-30-080116	8/1/2016	<0.0078	U		0.0029	J		**0.0033**	J		<0.0071	U		0.0025	J		<0.0037	U		0.0042	J		<0.0063	U	
		VMP-49-30-080116-DUP	8/1/2016	<0.0078	U		0.0016	J		<0.0071	U		<0.0071	U		0.0026	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-49-30-102716	10/27/2016	<0.008	U		0.01			<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		0.006	J		**0.0015**	J	
		VMP-49-30-012717	1/27/2017	<0.0068	U		0.033			<0.0062	U		<0.0062	U		0.0027	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-30-042417	4/24/2017	<0.0074	U		0.039			<0.0068	U		<0.0068	U		0.0019	J		<0.0035	U		0.0074			<0.006	U	
		VMP-49-30-072617	7/26/2017	<0.0067	U		0.023			<0.0061	U		<0.0061	U		0.00088	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-30-072617-DUP	7/26/2017	<0.0067	U		0.022			<0.0061	U		<0.0061	U		0.001	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-49-30-102717	10/27/2017	<0.0062	U		0.024			<0.0056	U		<0.0056	U		0.0014	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-49-30-012618	1/26/2018	<0.0064	U		0.061			<0.0058	U		<0.0058	U		0.13			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-49-30-042718	4/27/2018	<0.0068	U		0.042			<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-30-072018	7/20/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0009	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-30-102318	10/23/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-49-30-012119	1/21/2019	<0.0056	U		<0.0058	U		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-49-30-042919	4/29/2019	<0.0064	U		0.0037	J		<0.0058	U		<0.0058	U		0.0041	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-49-30-042919-DUP	4/29/2019	<0.0068	U		0.0032	J		<0.0063	U		<0.0063	U		0.0026	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-30-072919	7/29/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-30-101819	10/18/2019	<0.0071	U		0.0023	J		<0.0065	U		<0.0065	U		0.003	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-49-30-012220	1/22/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-30-042920	4/29/2020	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-49-30-072420	7/24/2020	<0.0069	U		0.027			<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-49-30-110420	11/4/2020	**0.11**	J		<0.56	U		<0.49	U		<0.49	U		1.5			<0.26	U		<0.44	U		<0.44	U	
		VMP-49-30-012521	1/25/2021	<0.0069	U		0.045			<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	**0.029**	J		**0.024**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-50-5-050515	5/5/2015	**0.014**	J		**0.032**			<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0028**	J	
		VMP-50-5-073015	7/30/2015	**0.031**	J		<0.0046	J	U	<0.0096	U		<0.015	U		<0.056	U		<0.0032	U	UJ	0.018		J	**0.0058**	J	
		VMP-50-5-110315	11/3/2015	**0.015**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.011			**0.0075**	J	
		VMP-50-5-020216	2/2/2016	**0.023**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0062**	J	
		VMP-50-5-050316	5/3/2016	**0.0089**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-50-5-080216	8/2/2016	**0.051**			**0.0016**	J		<0.012	U		<0.019	U		<0.07	U		<0.004	U		0.01	J		**0.0081**	J	
		VMP-50-5-103116	10/31/2016	**0.018**	J		**0.0011**	J		<0.015	U		<0.024	U		<0.088	U		<0.005	U		<0.022	U		<0.027	U	
		VMP-50-5-020117	2/1/2017	<0.03	J	U	<0.004	J	U	<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.013			<0.015	U	
		VMP-50-5-050317	5/3/2017	<0.026	J	U	<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-50-5-072617	7/26/2017	**0.019**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0041**	J	
		VMP-50-5-110117	11/1/2017	**0.011**	J		<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-50-5-013118	1/31/2018	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.005	J		<0.014	U	
		VMP-50-5-032918	3/29/2018	**0.0063**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-50-5-041018	4/10/2018	**0.052**	J		<0.086	U		<0.18	U		<0.28	U		<1	U		<0.06	U		15			<0.32	U	
		VMP-50-5-072618	7/26/2018	**0.05**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0053**	J	
		VMP-50-5-103018	10/30/2018	**0.01**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.003**	J	
		VMP-50-5-020519	2/5/2019	**0.016**	J		**0.0083**			<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-50-5-042919	4/29/2019	**0.042**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0035**	J	
		VMP-50-5-073019	7/30/2019	**0.037**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-50-5-102319	10/23/2019	<0.028	U		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-50-5-012820	1/28/2020	**0.0093**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-50-5-042820	4/28/2020	**0.014**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-50-5-072720	7/27/2020	**0.024**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-50-5-110520	11/5/2020	**0.013**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0015**	J	
		VMP-50-5-012621	1/26/2021	**0.0094**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
	10 ft	VMP-50-10-021015	2/10/2015	**0.006**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-50-10-050515	5/5/2015	**0.0091**	J		**0.033**			**0.0033**	J		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-50-10-073015	7/30/2015	**0.022**	J		<0.0048	J	U	**0.0063**	J		<0.016	U		<0.058	U		<0.0033	U	UJ	<0.014	U	UJ	**0.0057**	J	
		VMP-50-10-110315	11/3/2015	**0.014**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0029**	J	
		VMP-50-10-020216	2/2/2016	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0025**	J	
		VMP-50-10-050316	5/3/2016	**0.017**	J		<0.004	U		**0.0048**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0034**	J	
		VMP-50-10-082616	8/26/2016	**0.021**	J		<0.0041	U		**0.021**			<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0052**	J	
		VMP-50-10-103116	10/31/2016	<0.031	U		<0.0042	U		**0.024**			<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-50-10-020117	2/1/2017	**0.012**	J		<0.004	J	U	**0.01**			<0.013	U		<0.049	U		<0.0028	U		0.0025	J		**0.0021**	J	
		VMP-50-10-050317	5/3/2017	<0.026	J	U	<0.0035	U		**0.0066**	J		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-50-10-072617	7/26/2017	**0.014**	J		<0.004	U		**0.0067**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0027**	J	
		VMP-50-10-110117	11/1/2017	<0.026	J	U	<0.0035	U		**0.0095**			<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-50-10-013118	1/31/2018	<0.027	J	U	<0.0036	U		**0.006**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-50-10-032918	3/29/2018	**0.0063**	J		<0.0036	U		**0.0051**	J		<0.012	U		<0.043	U		<0.0025	U		0.0049	J		<0.013	U	
		VMP-50-10-041018	4/10/2018	**0.01**	J		<0.012	U		**0.0084**	J		<0.039	U		<0.15	U		<0.0084	U		1.3			<0.044	U	
		VMP-50-10-072618	7/26/2018	**0.013**	J		<0.004	U		**0.0071**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-50-10-103018	10/30/2018	**0.055**			<0.0039	U		**0.0048**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-50-10-012519	1/25/2019	**0.0083**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-50-10-042919	4/29/2019	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-50-10-073019	7/30/2019	**0.027**	J		<0.0042	U		**0.0037**	J		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-50-10-102319	10/23/2019	<0.029	U		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-50-10-012820	1/28/2020	<0.033	U		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-50-10-042820	4/28/2020	**0.014**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-50-10-072720	7/27/2020	**0.017**	J		<0.0037	U		**0.0048**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-50-10-110520	11/5/2020	**0.016**	J		<0.0039	U		**0.0038**	J		<0.012	U		<0.047	U		<0.0027	U		0.0044	J		**0.0024**	J	
		VMP-50-10-012621	1/26/2021	**0.013**	J		<0.004	U		**0.003**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-50-5-050515	5/5/2015	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-50-5-073015	7/30/2015	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-50-5-110315	11/3/2015	**0.002**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-50-5-020216	2/2/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-50-5-050316	5/3/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U	UJ	<0.0068	U	
		VMP-50-5-080216	8/2/2016	<0.022	U		<0.011	U		<0.0083	U		<0.015	U		<0.019	U		<0.0088	U		<0.037	U		<0.0093	U	
		VMP-50-5-103116	10/31/2016	<0.028	U		<0.014	U		<0.01	U		<0.019	U		<0.024	U		<0.011	U		<0.047	U		<0.012	U	
		VMP-50-5-020117	2/1/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-50-5-050317	5/3/2017	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-50-5-072617	7/26/2017	<0.016	J	U	**0.00063**	J		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-50-5-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-50-5-013118	1/31/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0062	U	
		VMP-50-5-032918	3/29/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-50-5-041018	4/10/2018	**0.024**	J		<0.17	U		<0.12	U		<0.23	U		<0.28	U		<0.13	U		<0.56	U		<0.14	U	
		VMP-50-5-072618	7/26/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.035**			<0.026	U		<0.0066	U	
		VMP-50-5-103018	10/30/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-50-5-020519	2/5/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-50-5-042919	4/29/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-50-5-073019	7/30/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		**0.0021**	J		<0.0061	U	
		VMP-50-5-102319	10/23/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-50-5-012820	1/28/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-50-5-042820	4/28/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-50-5-072720	7/27/2020	**0.0027**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-50-5-110520	11/5/2020	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0026**	J		<0.024	U		<0.0059	U	
		VMP-50-5-012621	1/26/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.00053**	J		<0.026	U		<0.0065	U	
	10 ft	VMP-50-10-021015	2/10/2015	**0.002**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0033**	J		<0.026	U		<0.0064	U	
		VMP-50-10-050515	5/5/2015	**0.0014**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.0088**			<0.027	U		<0.0069	U	
		VMP-50-10-073015	7/30/2015	<0.019	J	U	<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		**0.022**			<0.031	U		<0.0078	U	
		VMP-50-10-110315	11/3/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0096**			<0.026	U		<0.0065	U	
		VMP-50-10-020216	2/2/2016	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0039**	J		<0.025	U		<0.0063	U	
		VMP-50-10-050316	5/3/2016	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.01**			<0.026	U	UJ	<0.0066	U	
		VMP-50-10-082616	8/26/2016	**0.0022**	J		<0.008	U		<0.0059	U		0.0013	J		<0.013	U		**0.055**			<0.026	U		<0.0066	U	
		VMP-50-10-103116	10/31/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.066**			<0.027	U		<0.0068	U	
		VMP-50-10-020117	2/1/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.03**			<0.026	U		<0.0066	U	
		VMP-50-10-050317	5/3/2017	**0.0016**	J		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.02**			<0.023	U		<0.0057	U	
		VMP-50-10-072617	7/26/2017	**0.0025**	J		**0.00082**	J		<0.0058	U		<0.011	U		<0.013	U		**0.026**			<0.026	U		<0.0065	U	
		VMP-50-10-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.035**			<0.023	U		<0.0057	U	
		VMP-50-10-013118	1/31/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.029**			<0.023	U		<0.0059	U	
		VMP-50-10-032918	3/29/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.016**			<0.023	U		<0.0058	U	
		VMP-50-10-041018	4/10/2018	**0.004**	J		<0.024	U		<0.017	U		<0.032	U		<0.04	U		**0.028**			<0.078	U		<0.02	U	
		VMP-50-10-072618	7/26/2018	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.099**			<0.026	U		<0.0066	U	
		VMP-50-10-103018	10/30/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.022**			<0.026	U		<0.0064	U	
		VMP-50-10-012519	1/25/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0011**	J		<0.023	U		<0.0057	U	
		VMP-50-10-042919	4/29/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0018**	J		<0.026	U		<0.0066	U	
		VMP-50-10-073019	7/30/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.011**			<0.027	U		<0.0068	U	
		VMP-50-10-102319	10/23/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0064	U	
		VMP-50-10-012820	1/28/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0036**	J		<0.029	U		<0.0073	U	
		VMP-50-10-042820	4/28/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.00097**	J		<0.028	U		<0.0071	U	
		VMP-50-10-072720	7/27/2020	**0.0017**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.013**			<0.024	U		<0.006	U	
		VMP-50-10-110520	11/5/2020	<0.015	J	U	**0.0017**	J		<0.0056	U		<0.01	U		<0.013	U		**0.021**			<0.025	U		<0.0063	U	
		VMP-50-10-012621	1/26/2021	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.077**			<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	**0.0037**	J		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-50-5-050515	5/5/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0028**	J		<0.006	U		<0.006	U	
		VMP-50-5-073015	7/30/2015	**0.0021**	J		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0025**	J		<0.0058	U		<0.0058	U	
		VMP-50-5-110315	11/3/2015	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0046**	J		<0.0046	U		<0.0046	U	
		VMP-50-5-020216	2/2/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0025**	J		<0.0058	U		<0.0058	U	
		VMP-50-5-050316	5/3/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.002**	J		<0.0054	U		<0.0054	U	
		VMP-50-5-080216	8/2/2016	<0.0062	U		<0.014	U		<0.011	U		<0.011	U		<0.011	U		**0.0034**	J		<0.0073	U		<0.0073	U	
		VMP-50-5-103116	10/31/2016	<0.0078	U		<0.017	U		<0.014	U		<0.014	U		<0.014	U		**0.0022**	J		<0.0092	U		<0.0092	U	
		VMP-50-5-020117	2/1/2017	**0.0061**			<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-50-5-050317	5/3/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-50-5-072617	7/26/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	J	U	**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-50-5-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0019**	J		<0.0045	U		<0.0045	U	
		VMP-50-5-013118	1/31/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-50-5-032918	3/29/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0029**	J		<0.0047	U		<0.0047	U	
		VMP-50-5-041018	4/10/2018	**0.057**	J		<0.21	U		<0.16	U		<0.16	U		<0.16	U		<0.13	U		<0.11	U		<0.11	U	
		VMP-50-5-072618	7/26/2018	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-50-5-103018	10/30/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-50-5-020519	2/5/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-50-5-042919	4/29/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-50-5-073019	7/30/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-50-5-102319	10/23/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J	J	<0.0048	U		<0.0048	U	
		VMP-50-5-012820	1/28/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-50-5-042820	4/28/2020	**0.0015**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-50-5-072720	7/27/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0063	U		<0.0052	U		<0.0052	U	
		VMP-50-5-110520	11/5/2020	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-50-5-012621	1/26/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
	10 ft	VMP-50-10-021015	2/10/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-50-10-050515	5/5/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-50-10-073015	7/30/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0029**	J		<0.0061	U		<0.0061	U	
		VMP-50-10-110315	11/3/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0041**	J		<0.0051	U		<0.0051	U	
		VMP-50-10-020216	2/2/2016	**0.0019**	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-50-10-050316	5/3/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-50-10-082616	8/26/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0033**	J		<0.0052	U		<0.0052	U	
		VMP-50-10-103116	10/31/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0029**	J		<0.0053	U		<0.0053	U	
		VMP-50-10-020117	2/1/2017	**0.0011**	J		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-50-10-050317	5/3/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-50-10-072617	7/26/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-50-10-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-50-10-013118	1/31/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-50-10-032918	3/29/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-50-10-041018	4/10/2018	<0.013	U		<0.029	U		<0.023	U		<0.023	U		<0.023	U		**0.0034**	J		<0.015	U		<0.015	U	
		VMP-50-10-072618	7/26/2018	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-50-10-103018	10/30/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-50-10-012519	1/25/2019	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0026**	J		<0.0045	U		<0.0045	U	
		VMP-50-10-042919	4/29/2019	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0031**	J		<0.0052	U		<0.0052	U	
		VMP-50-10-073019	7/30/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0053	U		<0.0053	U	
		VMP-50-10-102319	10/23/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0035**	J	J	<0.005	U		<0.005	U	
		VMP-50-10-012820	1/28/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-50-10-042820	4/28/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0031**	J		<0.0056	U		<0.0056	U	
		VMP-50-10-072720	7/27/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0034**	J		<0.0047	U		<0.0047	U	
		VMP-50-10-110520	11/5/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-50-10-012621	1/26/2021	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-5-050515	5/5/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-50-5-073015	7/30/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0034**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-50-5-110315	11/3/2015	<0.0045	U		<0.0045	U		<0.0045	U		**0.0082**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-50-5-020216	2/2/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-50-5-050316	5/3/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-50-5-080216	8/2/2016	<0.0071	U		<0.0071	U		<0.0071	U		<0.062	U		<0.0083	U		<0.0082	U		<0.0082	U		<0.026	U	
		VMP-50-5-103116	10/31/2016	<0.009	U		<0.009	U		<0.009	U		<0.079	U		<0.01	U		<0.01	U		<0.01	U		<0.033	U	
		VMP-50-5-020117	2/1/2017	<0.005	U		<0.005	U		<0.005	U		**0.002**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-5-050317	5/3/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-50-5-072617	7/26/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-50-5-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.003**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-50-5-013118	1/31/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-50-5-032918	3/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-50-5-041018	4/10/2018	<0.11	U		<0.11	U		<0.11	U		<0.94	U		<0.12	U		<0.12	U		<0.12	U		<0.39	U	
		VMP-50-5-072618	7/26/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-5-103018	10/30/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-50-5-020519	2/5/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-5-042919	4/29/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-50-5-073019	7/30/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-50-5-102319	10/23/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U	UJ	<0.0054	U		<0.0054	U		<0.017	U	
		VMP-50-5-012820	1/28/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-50-5-042820	4/28/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-50-5-072720	7/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-5-110520	11/5/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-50-5-012621	1/26/2021	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	10 ft	VMP-50-10-021015	2/10/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-10-050515	5/5/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-50-10-073015	7/30/2015	<0.006	U		<0.006	U		<0.006	U		**0.0041**	J		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-50-10-110315	11/3/2015	<0.005	U		<0.005	U		<0.005	U		**0.0044**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-50-10-020216	2/2/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-50-10-050316	5/3/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-10-082616	8/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-10-103116	10/31/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-50-10-020117	2/1/2017	<0.005	U		<0.005	U		<0.005	U		**0.002**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-10-050317	5/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-50-10-072617	7/26/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-50-10-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0045**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-50-10-013118	1/31/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-50-10-032918	3/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-50-10-041018	4/10/2018	<0.015	U		<0.015	U		<0.015	U		<0.13	U		<0.017	U		<0.017	U		<0.017	U		<0.054	U	
		VMP-50-10-072618	7/26/2018	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-10-103018	10/30/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-10-012519	1/25/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-50-10-042919	4/29/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-10-073019	7/30/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-50-10-102319	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U	UJ	<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-10-012820	1/28/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-50-10-042820	4/28/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-50-10-072720	7/27/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-50-10-110520	11/5/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-50-10-012621	1/26/2021	<0.005	U		<0.005	U		<0.005	U		**0.0013**	J		<0.0058	U		<0.0057	U		<0.0057	U		**0.0023**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	<0.01		U	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		**0.0022**	J		<0.055	U		**0.011**		
		VMP-50-5-050515	5/5/2015	0.007	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-50-5-073015	7/30/2015	<0.011	U		<0.0062	U		<0.0071	U		<0.011	U		<0.01	U		**0.0018**	J		<0.061	U		**0.007**		
		VMP-50-5-110315	11/3/2015	0.0056	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0037**	J	
		VMP-50-5-020216	2/2/2016	0.0078	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		**0.0014**	J	
		VMP-50-5-050316	5/3/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-50-5-080216	8/2/2016	0.022			<0.0078	U		<0.0088	U		<0.014	U		<0.012	U		<0.0074	U		<0.077	U		**0.0041**	J	
		VMP-50-5-103116	10/31/2016	0.014	J	J	**0.0041**	J		<0.011	U		<0.017	U		<0.016	U		<0.0093	U		<0.097	U		**0.0054**	J	
		VMP-50-5-020117	2/1/2017	0.023			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		**0.0011**	J		<0.054	U		<0.0045	U	
		VMP-50-5-050317	5/3/2017	<0.0081	J	U	<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		**0.0015**	J	
		VMP-50-5-072617	7/26/2017	0.0061	J		<0.0055	U		<0.0062	U		**0.0052**	J		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-50-5-110117	11/1/2017	0.0063	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-50-5-013118	1/31/2018	0.036			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0024**	J		<0.051	U		**0.0035**	J	
		VMP-50-5-032918	3/29/2018	0.011			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-50-5-041018	4/10/2018	<0.2	U		<0.12	U		<0.13	U		<0.21	U		<0.19	U		<0.11	U		<1.2	U		**0.07**	J	
		VMP-50-5-072618	7/26/2018	0.0099			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-50-5-103018	10/30/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0014**	J	
		VMP-50-5-020519	2/5/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-50-5-042919	4/29/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0022**	J	
		VMP-50-5-073019	7/30/2019	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-50-5-102319	10/23/2019	<0.009	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-50-5-012820	1/28/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-50-5-042820	4/28/2020	0.0067	J	J	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		**0.0017**	J		<0.056	U		<0.0047	U	
		VMP-50-5-072720	7/27/2020	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-50-5-110520	11/5/2020	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-50-5-012621	1/26/2021	<0.024	U	UJ	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
	10 ft	VMP-50-10-021015	2/10/2015	<0.01		U	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		**0.00084**	J	
		VMP-50-10-050515	5/5/2015	0.023			<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-50-10-073015	7/30/2015	0.0062	J		<0.0065	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-50-10-110315	11/3/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0024**	J	
		VMP-50-10-020216	2/2/2016	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-50-10-050316	5/3/2016	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-50-10-082616	8/26/2016	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-50-10-103116	10/31/2016	<0.0099	J	U	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-50-10-020117	2/1/2017	0.028			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		**0.0038**	J	
		VMP-50-10-050317	5/3/2017	<0.0083	J	U	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-50-10-072617	7/26/2017	0.0061	J		<0.0055	U		<0.0062	U		**0.0064**	J		<0.0088	U		<0.0052	U		<0.054	U		**0.0007**	J	
		VMP-50-10-110117	11/1/2017	0.0096			<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-50-10-013118	1/31/2018	0.0049	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-50-10-032918	3/29/2018	0.022			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0017**	J		<0.048	U		**0.0026**	J	
		VMP-50-10-041018	4/10/2018	<0.028	U		<0.016	U		<0.018	U		<0.029	U		<0.026	U		<0.015	U		<0.16	U		<0.013	U	
		VMP-50-10-072618	7/26/2018	0.0094	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-50-10-103018	10/30/2018	0.025			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0011**	J		<0.053	U		<0.0044	U	
		VMP-50-10-012519	1/25/2019	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-50-10-042919	4/29/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-50-10-073019	7/30/2019	<0.0098	U	UJ	<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-50-10-102319	10/23/2019	0.012	J0	J	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-50-10-012820	1/28/2020	<0.011	U		<0.0061	U		0.00089	J		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-50-10-042820	4/28/2020	0.014	J0	J	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-50-10-072720	7/27/2020	0.013			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-50-10-110520	11/5/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-50-10-012621	1/26/2021	<0.024	U	UJ	<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	<0.021	U		0.016			<0.0063	U		<0.0052	U		<0.0046	U					**0.031**			<0.0063	U	
		VMP-50-5-050515	5/5/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					**0.016**			<0.0072	U	
		VMP-50-5-073015	7/30/2015	<0.024	U		0.011	J		<0.0071	U		<0.0059	U		<0.0052	U					<0.014	U		<0.0071	U	
		VMP-50-5-110315	11/3/2015	**0.0011**	J		0.0028	J		<0.0056	U		<0.0047	J	U	<0.0041	U					**0.0053**	J		<0.0056	U	
		VMP-50-5-020216	2/2/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0052	U					**0.012**	J		<0.007	U	
		VMP-50-5-050316	5/3/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0014**	J		<0.0065	U	
		VMP-50-5-080216	8/2/2016	<0.029	U		0.0091	J		<0.0088	U		<0.0074	U		<0.026	U					**0.04**			<0.0088	U	
		VMP-50-5-103116	10/31/2016	<0.037	U		0.02	J		<0.011	U		<0.0093	U		<0.033	U		<0.024	U		**0.13**			<0.011	U	
		VMP-50-5-020117	2/1/2017	<0.021	U		0.0064	J		<0.0062	U		<0.0052	U		<0.018	U					**0.024**			<0.0062	U	
		VMP-50-5-050317	5/3/2017	<0.018	U		0.0022	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0017**	J		<0.0053	U	
		VMP-50-5-072617	7/26/2017	<0.021	U		<0.015	U		<0.0062	U		**0.00098**	J		<0.018	U					**0.016**			<0.0062	U	
		VMP-50-5-110117	11/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-50-5-013118	1/31/2018	<0.02	U		0.0038	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0018**	J		<0.0059	U	
		VMP-50-5-032918	3/29/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U		<0.012	U		**0.0029**	J		<0.0057	U	
		VMP-50-5-041018	4/10/2018	<0.44	U		12			<0.13	U		<0.11	U		<0.39	U		<0.28	U		<0.26	U		<0.13	U	
		VMP-50-5-072618	7/26/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U	UJ	<0.0063	U	
		VMP-50-5-103018	10/30/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-50-5-020519	2/5/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-50-5-042919	4/29/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	ND,UJ	UJ	<0.017	U					<0.012	U		<0.0058	U	
		VMP-50-5-073019	7/30/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0095**	J		<0.0058	U	
		VMP-50-5-102319	10/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-50-5-012820	1/28/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0014**	J		<0.0068	U	
		VMP-50-5-042820	4/28/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0068**	J		<0.0065	U	
		VMP-50-5-072720	7/27/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-50-5-110520	11/5/2020	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0071**	J		<0.0056	U	
		VMP-50-5-012621	1/26/2021	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.018**			<0.0061	U	
	10 ft	VMP-50-10-021015	2/10/2015	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					**0.0078**	J		<0.0061	U	
		VMP-50-10-050515	5/5/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.031**			<0.0065	U	
		VMP-50-10-073015	7/30/2015	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.0054	U					<0.015	U		<0.0074	U	
		VMP-50-10-110315	11/3/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	J	U	<0.0045	U					**0.0027**	J		<0.0062	U	
		VMP-50-10-020216	2/2/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.01**	J		<0.006	J	U
		VMP-50-10-050316	5/3/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					<0.012	U		<0.0062	U	
		VMP-50-10-082616	8/26/2016	<0.021	U		0.0022	J		<0.0063	U		<0.0052	U		<0.018	U					**0.0075**	J		<0.0063	U	
		VMP-50-10-103116	10/31/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.01**	J		<0.0065	U	
		VMP-50-10-020117	2/1/2017	<0.021	U		0.0077	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-50-10-050317	5/3/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0023**	J		<0.0054	U	
		VMP-50-10-072617	7/26/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.01**	J		<0.0062	U	
		VMP-50-10-110117	11/1/2017	<0.018	U		0.0038	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-50-10-013118	1/31/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.0024**	J		<0.0056	U	
		VMP-50-10-032918	3/29/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		<0.012	U		**0.0029**	J		<0.0055	U	
		VMP-50-10-041018	4/10/2018	<0.062	U		1.5			<0.018	U		<0.015	U		<0.054	U		<0.04	U		<0.037	U		<0.018	U	
		VMP-50-10-072618	7/26/2018	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U	UJ	<0.0062	U	
		VMP-50-10-103018	10/30/2018	<0.02	U		<0.014	U		<0.0061	U		**0.0019**	J		<0.018	U					**0.0091**	J		<0.0061	U	
		VMP-50-10-012519	1/25/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0017**	J		<0.0054	U	
		VMP-50-10-042919	4/29/2019	<0.021	U		0.0036	J		<0.0063	U		<0.0053	ND,UJ	UJ	<0.018	U					<0.013	U		<0.0063	U	
		VMP-50-10-073019	7/30/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0087**	J		<0.0064	U	
		VMP-50-10-102319	10/23/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-50-10-012820	1/28/2020	<0.023	U		<0.017	U		**0.001**	J		<0.0058	U		<0.02	U					**0.0014**	J		**0.0033**	J	
		VMP-50-10-042820	4/28/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0042**	J		<0.0068	U	
		VMP-50-10-072720	7/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.024**			<0.0058	U	
		VMP-50-10-110520	11/5/2020	**0.0046**	J		0.012	J		<0.0059	U		<0.005	U		<0.017	U					**0.0058**	J		<0.0059	U	
		VMP-50-10-012621	1/26/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.012**	J		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0011**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-5-050515	5/5/2015	<0.0063	U		<0.01	U		**0.0024**	J		<0.0043	U		<0.0056	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-50-5-073015	7/30/2015	<0.0061	U		<0.0099	U		**0.014**			<0.0042	U		<0.0054	U		<0.043	U	UJ	<0.0078	U		<0.0078	U	
		VMP-50-5-110315	11/3/2015	<0.0049	U		<0.0079	U		**0.0076**	J		<0.0034	U		**0.0016**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-50-5-020216	2/2/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U	UJ	<0.0078	U		<0.0078	U	
		VMP-50-5-050316	5/3/2016	<0.0056	U		<0.0091	U		**0.0031**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-5-080216	8/2/2016	<0.0077	U		<0.012	U		**0.018**			<0.0053	U		**0.0016**	J		<0.053	U		<0.0098	U		<0.0098	U	
		VMP-50-5-103116	10/31/2016	<0.0097	U		<0.016	U		**0.0047**	J		<0.0067	U		**0.016**			<0.068	U		<0.012	U		<0.012	U	
		VMP-50-5-020117	2/1/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0018**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-50-5-050317	5/3/2017	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0033**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-50-5-072617	7/26/2017	<0.0054	U		<0.0087	U		**0.017**			<0.0037	U		**0.00043**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-50-5-110117	11/1/2017	<0.0047	U		<0.0076	U		**0.0041**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-50-5-013118	1/31/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.001**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-50-5-032918	3/29/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-50-5-041018	4/10/2018	<0.12	U		<0.18	U		<0.18	U		<0.08	U		<0.1	U		<0.8	U		<0.15	U		<0.15	U	
		VMP-50-5-072618	7/26/2018	<0.0055	U		<0.0088	U		**0.01**			**0.014**			**0.00073**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-5-103018	10/30/2018	<0.0051	U		<0.0082	U		**0.0021**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-50-5-020519	2/5/2019	<0.0053	U		<0.0085	U		**0.0013**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-50-5-042919	4/29/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	ND,UJ	UJ	**0.0021**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-50-5-073019	7/30/2019	<0.005	U		<0.0081	U		**0.012**			<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-50-5-102319	10/23/2019	<0.0051	U		<0.0082	U	UJ	**0.0048**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-50-5-012820	1/28/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-50-5-042820	4/28/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-5-072720	7/27/2020	<0.0054	U		<0.0088	U		**0.016**			<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-5-110520	11/5/2020	<0.0049	U		<0.0079	U		**0.005**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-50-5-012621	1/26/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
	10 ft	VMP-50-10-021015	2/10/2015	<0.0053	U		<0.0085	U		**0.0021**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-50-10-050515	5/5/2015	<0.0057	U		<0.0091	U		**0.0031**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-10-073015	7/30/2015	<0.0064	U		<0.01	U		**0.019**			<0.0044	U		<0.0057	U		<0.045	U	UJ	<0.0082	U		<0.0082	U	
		VMP-50-10-110315	11/3/2015	<0.0054	U		<0.0086	U		**0.011**			<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-50-10-020216	2/2/2016	<0.0052	U		<0.0083	U		**0.0021**	J		<0.0036	U		**0.0012**	J		<0.036	U	UJ	<0.0066	U		<0.0066	U	
		VMP-50-10-050316	5/3/2016	<0.0054	U		<0.0087	U		**0.0036**	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-50-10-082616	8/26/2016	<0.0054	U		<0.0088	U		**0.013**			<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-10-103116	10/31/2016	<0.0056	U		<0.0091	U		**0.01**			<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-10-020117	2/1/2017	<0.0054	U		<0.0087	U		**0.003**	J		<0.0037	U		**0.0053**			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-50-10-050317	5/3/2017	<0.0047	U		<0.0076	U		**0.0034**	J		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-50-10-072617	7/26/2017	<0.0054	U		<0.0086	U		**0.01**			<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-50-10-110117	11/1/2017	<0.0047	U		<0.0076	U		**0.0076**			<0.0032	U		**0.0015**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-50-10-013118	1/31/2018	<0.0048	U		<0.0078	U		**0.0026**	J		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-50-10-032918	3/29/2018	<0.0048	U		<0.0077	U		**0.0018**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-50-10-041018	4/10/2018	<0.016	U		<0.026	U		<0.026	U		<0.011	U		<0.014	U		<0.11	U		<0.02	U		<0.02	U	
		VMP-50-10-072618	7/26/2018	<0.0054	U		<0.0087	U		**0.0096**			<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-50-10-103018	10/30/2018	<0.0053	U		<0.0085	U		**0.0052**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-50-10-012519	1/25/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-50-10-042919	4/29/2019	<0.0055	U		<0.0088	U		**0.0035**	J		<0.0038	ND,UJ	UJ	<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-10-073019	7/30/2019	<0.0056	U		<0.009	U		**0.025**			<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-50-10-102319	10/23/2019	<0.0052	U		<0.0084	U	UJ	**0.01**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-50-10-012820	1/28/2020	<0.006	U		<0.0097	U		**0.0035**	J		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-50-10-042820	4/28/2020	<0.0059	U		<0.0095	U		**0.0035**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-50-10-072720	7/27/2020	<0.005	U		<0.008	U		**0.018**			<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-50-10-110520	11/5/2020	<0.0052	U		<0.0083	U		**0.012**			<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-50-10-012621	1/26/2021	<0.0054	U		<0.0087	U		**0.0017**	J		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-50-5-021015	2/10/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.024			<0.0033	U		<0.0056	J	U	<0.0056	U	
		VMP-50-5-050515	5/5/2015	<0.0079	U		0.0015	J		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-50-5-073015	7/30/2015	<0.0077	U		<0.0081	U		<0.0071	U		**0.00087**	J		0.0048	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-50-5-110315	11/3/2015	<0.0062	U		0.0023	J		<0.0056	U		<0.0056	U		0.0031	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-50-5-020216	2/2/2016	<0.0077	U		<0.008	U		<0.007	J	U	<0.007	U		0.0016	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-50-5-050316	5/3/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-50-5-080216	8/2/2016	<0.0097	U		0.0023	J		<0.0088	U		<0.0088	U		0.0023	J		<0.0046	U		<0.0078	U		<0.0078	U	
		VMP-50-5-103116	10/31/2016	<0.012	U		<0.013	U		**0.0017**	J		<0.011	U		<0.011	U		<0.0058	U		0.011			**0.0027**	J	
		VMP-50-5-020117	2/1/2017	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-5-050317	5/3/2017	<0.0058	U		0.0012	J		<0.0053	U		<0.0053	U		0.0043	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-50-5-072617	7/26/2017	<0.0068	U		0.0023	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-5-110117	11/1/2017	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-50-5-013118	1/31/2018	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		0.0016	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-50-5-032918	3/29/2018	<0.0063	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-50-5-041018	4/10/2018	<0.14	U		<0.15	U		<0.13	U		<0.13	U		<0.13	U		<0.069	U		<0.12	U		<0.12	U	
		VMP-50-5-072618	7/26/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.00075	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-50-5-103018	10/30/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-50-5-020519	2/5/2019	**0.0084**			<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-50-5-042919	4/29/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.014			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-50-5-073019	7/30/2019	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-50-5-102319	10/23/2019	<0.0064	U		0.0016	J	J	<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-50-5-012820	1/28/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-50-5-042820	4/28/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-50-5-072720	7/27/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-50-5-110520	11/5/2020	<0.0062	U		0.0018	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-50-5-012621	1/26/2021	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
	10 ft	VMP-50-10-021015	2/10/2015	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-50-10-050515	5/5/2015	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-50-10-073015	7/30/2015	<0.0081	U		0.0018	J		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-50-10-110315	11/3/2015	<0.0068	U		0.0022	J		<0.0062	U		<0.0062	U		0.0011	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-10-020216	2/2/2016	<0.0065	U		<0.0068	U		<0.006	J	U	<0.006	U		0.0032	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-50-10-050316	5/3/2016	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-10-082616	8/26/2016	<0.0068	U		0.0018	J		<0.0063	U		<0.0063	U		0.0074			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-10-103116	10/31/2016	<0.0071	U		0.0015	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-50-10-020117	2/1/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-10-050317	5/3/2017	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		0.0022	J		<0.0048	U	
		VMP-50-10-072617	7/26/2017	<0.0068	U		0.002	J		<0.0062	U		<0.0062	U		0.00061	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-10-110117	11/1/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.00082	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-50-10-013118	1/31/2018	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-50-10-032918	3/29/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0019	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-50-10-041018	4/10/2018	<0.02	U		<0.021	U		<0.018	U		<0.018	U		0.0023	J		<0.0096	U		<0.016	U		<0.016	U	
		VMP-50-10-072618	7/26/2018	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0015	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-50-10-103018	10/30/2018	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-50-10-012519	1/25/2019	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-50-10-042919	4/29/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-50-10-073019	7/30/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-50-10-102319	10/23/2019	<0.0066	U		0.0022	J	J	<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-50-10-012820	1/28/2020	<0.0076	U		<0.0079	U		**0.0013**	J		<0.0069	U		0.0019	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-50-10-042820	4/28/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-50-10-072720	7/27/2020	<0.0063	U		0.0024	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-50-10-110520	11/5/2020	**0.0041**	J		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-50-10-012621	1/26/2021	<0.0068	U		0.0018	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	**0.011**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0026**	J	
		VMP-50-20-050515	5/5/2015	**0.0063**	J		**0.00068**	J		**0.0022**	J		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-50-20-073015	7/30/2015	**0.022**	J		**0.004**	J		**0.0032**	J		<0.014	U		<0.054	U		<0.0031	U	UJ	<0.013	U	UJ	**0.0088**	J	
		VMP-50-20-110315	11/3/2015	**0.02**	J		**0.14**			**0.0023**	J		<0.014	U		<0.054	U		<0.003	U		0.0075	J		**0.014**	J	
		VMP-50-20-020216	2/2/2016	**0.014**	J		<0.0053	U		<0.011	U		<0.017	U		<0.065	U		<0.0037	U		<0.016	U		<0.02	U	
		VMP-50-20-050316	5/3/2016	**0.0055**	J		<0.0051	U		**0.0015**	J		<0.017	U		<0.062	U		<0.0036	U		<0.015	U		<0.019	U	
		VMP-50-20-082616	8/26/2016	**0.024**	J		**0.00053**	J		**0.003**	J		<0.014	U		<0.053	U		<0.003	U		0.012	J		**0.0038**	J	
		VMP-50-20-103116	10/31/2016	**0.0066**	J		<0.0045	U		**0.0054**	J		<0.014	U		<0.055	U		<0.0031	U		0.014			<0.017	U	
		VMP-50-20-020117	2/1/2017	**0.017**	J		<0.0039	J	U	**0.011**			<0.012	U		<0.047	U		<0.0027	U		0.009	J		**0.0054**	J	
		VMP-50-20-050317	5/3/2017	<0.025	J	U	<0.0034	U		**0.0071**	J		<0.011	U		<0.041	U		<0.0024	U		0.005	J		**0.0073**	J	
		VMP-50-20-072617	7/26/2017	**0.0075**	J		<0.0039	U		**0.0092**			<0.013	U		<0.048	U		<0.0027	U		0.0037	J		<0.014	U	
		VMP-50-20-110117	11/1/2017	**0.012**	J		<0.0034	J	U	**0.007**	J		<0.011	U		<0.041	U		<0.0024	U		0.0065	J		<0.012	U	
		VMP-50-20-013118	1/31/2018	**0.014**	J		**0.011**	J		<0.031	U		<0.048	U		<0.18	U		<0.01	U		0.63			<0.055	U	
		VMP-50-20-013118-DUP	1/31/2018	**0.0083**	J		**0.014**	J		<0.031	U		<0.048	U		<0.18	U		<0.01	U		0.72			<0.055	U	
		VMP-50-20-032918	3/29/2018	**0.01**	J		<0.0036	U		**0.0063**	J		<0.012	U		<0.043	U		<0.0025	U		0.007	J		<0.013	U	
		VMP-50-20-041018	4/10/2018	<2.7	U		<0.36	U		<0.76	U		<1.2	U		<4.4	U		<0.25	U		39			<1.3	U	
		VMP-50-20-041018-DUP	4/10/2018	<2.7	U		<0.36	U		<0.77	U		<1.2	U		<4.4	U		<0.25	U		37			<1.4	U	
		VMP-50-20-072618	7/26/2018	**0.0097**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-50-20-103018	10/30/2018	**0.032**			<0.0041	U		**0.003**	J		<0.013	U		<0.05	U		<0.0028	U		0.0042	J		**0.0096**	J	
		VMP-50-20-020119	2/1/2019	**0.0091**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-50-20-042919	4/29/2019	**0.018**	J		**0.054**			<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		0.048			<0.014	U	
		VMP-50-20-073019	7/30/2019	**0.022**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-50-20-102319	10/23/2019	**0.03**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-50-20-012820	1/28/2020	**0.009**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-50-20-042820	4/28/2020	**0.0088**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-50-20-072720	7/27/2020	**0.13**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0047	J		**0.0078**	J	
		VMP-50-20-110520	11/5/2020	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-50-20-110520-DUP	11/5/2020	**0.013**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0049	J		<0.016	U	
		VMP-50-20-022521	2/25/2021	**0.02**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-50-20-022521-DUP	2/25/2021	**0.01**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	**0.0025**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0066**			<0.024	U		<0.0061	U	
		VMP-50-20-050515	5/5/2015	**0.0019**	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.012**			<0.03	U		<0.0074	U	
		VMP-50-20-073015	7/30/2015	**0.0041**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.02**			<0.029	U		<0.0072	U	
		VMP-50-20-110315	11/3/2015	**0.0041**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.016**			<0.028	U		<0.0071	U	
		VMP-50-20-020216	2/2/2016	**0.0019**	J		<0.01	U		<0.0077	U		<0.014	U		<0.018	U		**0.016**			<0.034	U		<0.0086	U	
		VMP-50-20-050316	5/3/2016	**0.0014**	J		<0.01	U		<0.0074	U		<0.014	U		<0.017	U		**0.022**			<0.033	U	UJ	<0.0083	U	
		VMP-50-20-082616	8/26/2016	**0.0023**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.033**			<0.028	U		<0.0071	U	
		VMP-50-20-103116	10/31/2016	**0.0038**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.068**			<0.029	U		<0.0073	U	
		VMP-50-20-020117	2/1/2017	**0.0025**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.11**			<0.025	U		<0.0063	U	
		VMP-50-20-050317	5/3/2017	**0.0019**	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.032**			<0.022	U		<0.0055	U	
		VMP-50-20-072617	7/26/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.052**			<0.025	U		<0.0064	U	
		VMP-50-20-110117	11/1/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.054**			<0.022	U		<0.0055	U	
		VMP-50-20-013118	1/31/2018	<0.058	U		<0.029	U		<0.021	U		<0.039	U		<0.049	U		<0.023	U		<0.096	U		<0.024	U	
		VMP-50-20-013118-DUP	1/31/2018	<0.058	U		<0.029	U		<0.022	U		<0.04	U		<0.049	U		<0.023	U		<0.097	U		<0.024	U	
		VMP-50-20-032918	3/29/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.04**			<0.023	U		<0.0058	U	
		VMP-50-20-041018	4/10/2018	**0.11**	J		<0.71	U		<0.52	U		<0.97	U		<1.2	U		<0.55	U		<2.3	U		<0.59	U	
		VMP-50-20-041018-DUP	4/10/2018	**0.11**	J		<0.72	U		<0.53	U		<0.98	U		<1.2	U		<0.56	U		<2.4	U		<0.59	U	
		VMP-50-20-072618	7/26/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0036**	J		<0.027	U		<0.0067	U	
		VMP-50-20-103018	10/30/2018	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.015**			<0.027	U		<0.0067	U	
		VMP-50-20-020119	2/1/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0023**	J		<0.024	U		<0.006	U	
		VMP-50-20-042919	4/29/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0052**	J		<0.024	U		<0.006	U	
		VMP-50-20-073019	7/30/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0041**	J		<0.028	U		<0.0071	U	
		VMP-50-20-102319	10/23/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0039**	J		<0.027	U		<0.0068	U	
		VMP-50-20-012820	1/28/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.012**			<0.028	U		<0.0071	U	
		VMP-50-20-042820	4/28/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0036**	J		<0.026	U		<0.0066	U	
		VMP-50-20-072720	7/27/2020	**0.03**			<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0039**	J		<0.025	U		<0.0063	U	
		VMP-50-20-110520	11/5/2020	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0056**	J		<0.026	U		<0.0064	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0058**	J		<0.027	U		<0.0068	U	
		VMP-50-20-022521	2/25/2021	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.027**			<0.027	U		<0.0068	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.028**			<0.026	U		<0.0065	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-50-20-050515	5/5/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0032**	J		<0.0058	U		<0.0058	U	
		VMP-50-20-073015	7/30/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.003**	J		<0.0056	U		<0.0056	U	
		VMP-50-20-110315	11/3/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0049**	J		<0.0056	U		<0.0056	U	
		VMP-50-20-020216	2/2/2016	<0.0057	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		**0.0032**	J		<0.0068	U		<0.0068	U	
		VMP-50-20-050316	5/3/2016	<0.0055	U		<0.012	U		<0.0097	U		<0.0097	U		<0.0097	U		<0.008	U		<0.0065	U		<0.0065	U	
		VMP-50-20-082616	8/26/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0031**	J		<0.0055	U		<0.0055	U	
		VMP-50-20-103116	10/31/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0025**	J		<0.0057	U		<0.0057	U	
		VMP-50-20-020117	2/1/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-50-20-050317	5/3/2017	**0.0034**	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-50-20-072617	7/26/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-50-20-110117	11/1/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0021**	J		<0.0043	U		<0.0043	U	
		VMP-50-20-013118	1/31/2018	**0.87**			<0.036	U		<0.028	U		<0.028	U		<0.028	U		<0.023	U		<0.019	U		<0.019	U	
		VMP-50-20-013118-DUP	1/31/2018	**1**			<0.036	U		<0.028	U		<0.028	U		<0.028	U		<0.023	U		<0.019	U		<0.019	U	
		VMP-50-20-032918	3/29/2018	<0.0038	U		<0.0086	U		<0.0067	U		0.00098	J		**0.0014**	J		**0.0031**	J		<0.0045	U		<0.0045	U	
		VMP-50-20-041018	4/10/2018	**14**			<0.87	U		<0.68	U		<0.68	U		<0.68	U		<0.56	U		<0.46	U		<0.46	U	
		VMP-50-20-041018-DUP	4/10/2018	**14**			<0.88	U		<0.69	U		<0.69	U		<0.69	U		<0.57	U		<0.46	U		<0.46	U	
		VMP-50-20-072618	7/26/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-50-20-103018	10/30/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-50-20-020119	2/1/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-50-20-042919	4/29/2019	**0.044**			<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0032**	J		<0.0046	U		<0.0046	U	
		VMP-50-20-073019	7/30/2019	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-50-20-102319	10/23/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0032**	J	J	<0.0053	U		<0.0053	U	
		VMP-50-20-012820	1/28/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.002**	J		<0.0056	U		<0.0056	U	
		VMP-50-20-042820	4/28/2020	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-50-20-072720	7/27/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-50-20-110520	11/5/2020	**0.00082**	J		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-50-20-022521	2/25/2021	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-50-20-050515	5/5/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-50-20-073015	7/30/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0037**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-50-20-110315	11/3/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0059**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-50-20-020216	2/2/2016	<0.0066	U		<0.0066	U		<0.0066	U		<0.058	U		<0.0077	U		<0.0076	U		<0.0076	U		<0.024	U	
		VMP-50-20-050316	5/3/2016	<0.0064	U		<0.0064	U		<0.0064	U		<0.056	U		<0.0074	U		<0.0073	U		<0.0073	U		<0.023	U	
		VMP-50-20-082616	8/26/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-50-20-103116	10/31/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-50-20-020117	2/1/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-50-20-050317	5/3/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-50-20-072617	7/26/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0029**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-20-110117	11/1/2017	<0.0042	U		<0.0042	U		<0.0042	U		**0.0067**	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-50-20-013118	1/31/2018	<0.018	U		<0.018	U		<0.018	U		<0.16	U		<0.021	U		<0.021	U		<0.021	U		<0.067	U	
		VMP-50-20-013118-DUP	1/31/2018	<0.018	U		<0.018	U		<0.018	U		<0.16	U		<0.022	U		<0.021	U		<0.021	U		<0.068	U	
		VMP-50-20-032918	3/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-50-20-041018	4/10/2018	<0.45	U		<0.45	U		<0.45	U		<3.9	U		<0.52	U		<0.52	U		<0.52	U		<1.6	U	
		VMP-50-20-041018-DUP	4/10/2018	<0.45	U		<0.45	U		<0.45	U		<4	U		<0.53	U		<0.52	U		<0.52	U		<1.6	U	
		VMP-50-20-072618	7/26/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-20-103018	10/30/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-20-020119	2/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-50-20-042919	4/29/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-50-20-073019	7/30/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-50-20-102319	10/23/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U	UJ	<0.006	U		<0.006	U		<0.019	U	
		VMP-50-20-012820	1/28/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-50-20-042820	4/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-50-20-072720	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.0074**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-20-110520	11/5/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		**0.0014**	J		<0.006	U		<0.006	U		<0.019	U	
		VMP-50-20-022521	2/25/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	0.022			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0011**	J	
		VMP-50-20-050515	5/5/2015	0.01	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-50-20-073015	7/30/2015	0.0044	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-50-20-110315	11/3/2015	0.012			**0.0056**	J		0.012			<0.01	U		<0.0096	U		**0.0043**	J		<0.059	U		**0.0041**	J	
		VMP-50-20-020216	2/2/2016	<0.012	U		<0.0072	U		<0.0082	U		<0.013	U		<0.012	U		<0.0068	U		<0.071	U		<0.0059	U	
		VMP-50-20-050316	5/3/2016	0.018			<0.007	U		<0.0079	U		<0.012	U		<0.011	U		**0.0038**	J		<0.069	U		**0.0029**	J	
		VMP-50-20-082616	8/26/2016	0.0089	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		**0.0022**	J		<0.058	U		**0.0027**	J	
		VMP-50-20-103116	10/31/2016	<0.011	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.001**	J	
		VMP-50-20-020117	2/1/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-50-20-050317	5/3/2017	0.051			<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		**0.0021**	J		<0.045	U		**0.0022**	J	
		VMP-50-20-072617	7/26/2017	0.0052	J		<0.0053	U		<0.006	U		**0.0026**	J		<0.0086	U		<0.005	U		<0.052	U		**0.00059**	J	
		VMP-50-20-110117	11/1/2017	0.078			<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		**0.0011**	J		<0.045	U		<0.0038	U	
		VMP-50-20-013118	1/31/2018	0.013	J		<0.02	U		<0.023	U		<0.035	U		<0.032	U		**1.4**			<0.2	U		**2.8**		
		VMP-50-20-013118-DUP	1/31/2018	0.019	J		<0.02	U		<0.023	U		<0.036	U		<0.033	U		**1.7**			<0.2	U		**3.4**		
		VMP-50-20-032918	3/29/2018	0.006	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0026**	J	
		VMP-50-20-041018	4/10/2018	<0.86	U		<0.49	U		<0.56	U		<0.87	U		<0.79	U		**18**			<4.8	U		**34**		
		VMP-50-20-041018-DUP	4/10/2018	<0.86	U		<0.5	U		<0.56	U		<0.88	U		<0.8	U		**18**			<4.9	U		**34**		
		VMP-50-20-072618	7/26/2018	0.0073	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-50-20-103018	10/30/2018	0.0047	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.002**	J		<0.055	U		**0.0025**	J	
		VMP-50-20-020119	2/1/2019	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-50-20-042919	4/29/2019	<0.0087	U		**0.23**			0.053			<0.0088	U		<0.008	U		**0.36**			<0.049	U		**0.43**		
		VMP-50-20-073019	7/30/2019	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-50-20-102319	10/23/2019	<0.0099	ND,UJ	UJ	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-50-20-012820	1/28/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-50-20-042820	4/28/2020	0.01	J0	J	<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-50-20-072720	7/27/2020	0.023			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-50-20-110520	11/5/2020	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-50-20-110520-DUP	11/5/2020	0.0082	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-50-20-022521	2/25/2021	0.011	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.024	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	<0.019	U		0.0053	J		<0.0058	U		<0.0048	U		<0.0042	U					**0.048**			<0.0058	U	
		VMP-50-20-050515	5/5/2015	<0.024	U		0.0018	J		<0.007	U		<0.0059	U		<0.0052	U					**0.0056**	J		<0.007	U	
		VMP-50-20-073015	7/30/2015	<0.023	U		0.0038	J		**0.001**	J		**0.0014**	J		<0.005	U					**0.012**	J		**0.0025**	J	
		VMP-50-20-110315	11/3/2015	<0.023	U		0.0034	J		<0.0068	U		<0.0056	U		<0.005	U					**0.0076**	J		<0.0068	U	
		VMP-50-20-020216	2/2/2016	<0.027	U		<0.02	U		<0.0082	U		<0.0068	U		<0.006	U					**0.0063**	J		<0.0082	U	
		VMP-50-20-050316	5/3/2016	<0.026	U		0.0057	J		<0.0079	U		<0.0066	U		<0.0058	U					<0.016	U		<0.0079	U	
		VMP-50-20-082616	8/26/2016	<0.022	U		0.0033	J		<0.0067	U		<0.0056	U		<0.02	U					**0.022**			<0.0067	U	
		VMP-50-20-103116	10/31/2016	<0.023	U		0.0071	J		<0.0069	U		<0.0058	U		<0.02	U		<0.015	U		**0.076**			<0.0069	U	
		VMP-50-20-020117	2/1/2017	**0.0012**	J		0.0086	J		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-50-20-050317	5/3/2017	<0.017	U		0.0052	J		<0.0052	U		<0.0044	U		<0.015	U					**0.016**			<0.0052	U	
		VMP-50-20-072617	7/26/2017	<0.02	U		0.004	J		<0.006	U		<0.005	U		<0.018	U					**0.0087**	J		<0.006	U	
		VMP-50-20-110117	11/1/2017	<0.017	U		0.017			<0.0052	U		<0.0044	U		<0.015	U					**0.0082**	J		<0.0052	U	
		VMP-50-20-013118	1/31/2018	<0.076	U		3.4			<0.023	U		<0.019	U		<0.067	U					<0.046	U		<0.023	U	
		VMP-50-20-013118-DUP	1/31/2018	<0.077	U		4			<0.023	U		<0.019	U		<0.068	U					<0.046	U		<0.023	U	
		VMP-50-20-032918	3/29/2018	<0.018	U		0.0067	J		<0.0055	U		<0.0046	U		<0.016	U		<0.012	U		**0.0038**	J		<0.0055	U	
		VMP-50-20-041018	4/10/2018	<1.8	U		100			<0.56	U		<0.46	U		<1.6	U		<1.2	U		<1.1	U		<0.56	U	
		VMP-50-20-041018-DUP	4/10/2018	<1.9	U		98			<0.56	U		<0.47	U		<1.6	U		<1.2	U		<1.1	U		<0.56	U	
		VMP-50-20-072618	7/26/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U	UJ	<0.0063	U	
		VMP-50-20-103018	10/30/2018	<0.021	U		0.004	J		<0.0063	U		<0.0053	U		<0.019	U					**0.0039**	J		<0.0063	U	
		VMP-50-20-020119	2/1/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-50-20-042919	4/29/2019	<0.019	U		0.31			**0.008**			<0.0047	ND,UJ	UJ	<0.016	U					<0.011	U		**0.0089**		
		VMP-50-20-073019	7/30/2019	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.013**	J		<0.0067	U	
		VMP-50-20-102319	10/23/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-50-20-012820	1/28/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0025**	J		<0.0068	U	
		VMP-50-20-042820	4/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.019**			<0.0063	U	
		VMP-50-20-072720	7/27/2020	<0.02	U		0.011	J		<0.006	U		<0.005	U		<0.018	U					**0.024**			<0.006	U	
		VMP-50-20-110520	11/5/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.011**	J		<0.0061	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.022	U		0.0049	J		<0.0065	U		<0.0054	U		<0.019	U					**0.0074**	J		<0.0065	U	
		VMP-50-20-022521	2/25/2021	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0074**	J		<0.0065	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0046**	J		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	<0.005	U		<0.0081	U		**0.0015**	J		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-50-20-050515	5/5/2015	<0.0061	U		<0.0098	U		**0.0034**	J		<0.0042	U		<0.0054	U		<0.043	U		<0.0078	U		<0.0078	U	
		VMP-50-20-073015	7/30/2015	<0.0059	U		<0.0095	U		**0.013**			<0.0041	U		**0.0014**	J		<0.041	U	UJ	<0.0076	U		<0.0076	U	
		VMP-50-20-110315	11/3/2015	<0.0059	U		<0.0095	U		**0.012**			**0.0027**	J	J	**0.014**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-50-20-020216	2/2/2016	<0.0071	U		<0.011	U		**0.0024**	J		<0.0049	U		<0.0063	U		<0.05	U	UJ	<0.0091	U		<0.0091	U	
		VMP-50-20-050316	5/3/2016	<0.0068	U		<0.011	U		**0.0038**	J		<0.0047	U		**0.0015**	J		<0.048	U		<0.0088	U		<0.0088	U	
		VMP-50-20-082616	8/26/2016	<0.0058	U		<0.0094	U		**0.0073**	J		<0.004	U		<0.0052	J	U	<0.041	U		<0.0075	U		<0.0075	U	
		VMP-50-20-103116	10/31/2016	<0.006	U		<0.0097	U		**0.0066**	J		<0.0042	U		**0.0044**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-50-20-020117	2/1/2017	<0.0052	U		<0.0083	U		**0.0037**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-50-20-050317	5/3/2017	<0.0045	U		<0.0073	U		**0.0028**	J		<0.0031	U		**0.002**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-50-20-072617	7/26/2017	<0.0052	U		<0.0084	U		**0.0043**	J		<0.0036	U		**0.00085**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-50-20-110117	11/1/2017	<0.0045	U		<0.0073	U		**0.0043**	J		<0.0031	U		**0.01**			<0.032	U		<0.0058	U		<0.0058	U	
		VMP-50-20-013118	1/31/2018	<0.02	U		<0.032	U		<0.031	U		<0.014	U		**0.0095**	J		<0.14	U		<0.025	U		<0.025	U	
		VMP-50-20-013118-DUP	1/31/2018	<0.02	U		<0.032	U		<0.032	U		<0.014	U		**0.004**	J		<0.14	U		<0.026	U		<0.026	U	
		VMP-50-20-032918	3/29/2018	<0.0048	U		<0.0077	U		**0.0024**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-50-20-041018	4/10/2018	<0.48	U		<0.78	U		<0.77	U		<0.33	U		<0.43	U		<3.4	U		<0.62	U		<0.62	U	
		VMP-50-20-041018-DUP	4/10/2018	<0.49	U		<0.79	U		<0.78	U		<0.34	U		<0.43	U		<3.4	U		<0.62	U		<0.62	U	
		VMP-50-20-072618	7/26/2018	<0.0055	U		<0.0088	U		**0.0055**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-20-103018	10/30/2018	<0.0055	U		<0.0088	U		**0.0057**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-20-020119	2/1/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-50-20-042919	4/29/2019	<0.0049	U		<0.0079	U		**0.004**	J		<0.0034	ND,UJ	UJ	**0.98**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-50-20-073019	7/30/2019	<0.0058	U		<0.0094	U		**0.013**			<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-50-20-102319	10/23/2019	<0.0056	U		<0.0091	U	UJ	**0.0088**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-20-012820	1/28/2020	<0.0059	U		<0.0095	U		**0.003**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-50-20-042820	4/28/2020	<0.0055	U		<0.0088	U		**0.0031**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-50-20-072720	7/27/2020	<0.0052	U		<0.0084	U		**0.013**			<0.0036	U		**0.002**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-50-20-110520	11/5/2020	<0.0053	U		<0.0085	U		**0.0058**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0056	U		<0.0091	U		**0.0058**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-20-022521	2/25/2021	<0.0056	U		<0.0091	U		**0.0022**	J		<0.0039	U		**0.00037**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-50	20 ft	VMP-50-20-021015	2/10/2015	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-50-20-050515	5/5/2015	<0.0077	U		0.0017	J		<0.007	U		<0.007	U		0.0011	J		<0.0037	U		<0.0062	U		<0.0062	U	
		VMP-50-20-073015	7/30/2015	<0.0074	U		0.0018	J		<0.0068	U		<0.0068	U		0.0021	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-50-20-110315	11/3/2015	<0.0074	U		0.0023	J		**0.014**			**0.0038**	J		0.0012	J		<0.0035	U		0.022			**0.01**		
		VMP-50-20-020216	2/2/2016	<0.009	U		<0.0094	U		<0.0082	U		<0.0082	U		<0.0078	U		<0.0043	U		<0.0072	U		<0.0072	U	
		VMP-50-20-050316	5/3/2016	<0.0086	U		<0.009	U		<0.0079	U		<0.0079	U		0.0035	J		<0.0041	U		0.0012	J		<0.007	U	
		VMP-50-20-082616	8/26/2016	<0.0074	U		0.0019	J		<0.0067	U		<0.0067	U		0.0011	J		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-50-20-103116	10/31/2016	<0.0076	U		0.0019	J		<0.0069	U		<0.0069	U		<0.0066	J	U	<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-50-20-020117	2/1/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0019	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-50-20-050317	5/3/2017	<0.0057	U		0.0011	J		<0.0052	U		<0.0052	U		0.0018	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-50-20-072617	7/26/2017	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-50-20-110117	11/1/2017	<0.0057	U		0.0011	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-50-20-013118	1/31/2018	<0.025	U		<0.026	U		<0.023	U		<0.023	U		9			<0.012	U		<0.02	U		<0.02	U	
		VMP-50-20-013118-DUP	1/31/2018	<0.025	U		<0.026	U		<0.023	U		<0.023	U		10			<0.012	U		<0.02	U		<0.02	U	
		VMP-50-20-032918	3/29/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0039	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-50-20-041018	4/10/2018	<0.61	U		<0.64	U		<0.56	U		<0.56	U		110			<0.29	U		<0.49	U		<0.49	U	
		VMP-50-20-041018-DUP	4/10/2018	<0.62	U		<0.64	U		<0.56	U		<0.56	U		100			<0.29	U		<0.5	U		<0.5	U	
		VMP-50-20-072618	7/26/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-50-20-103018	10/30/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0016	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-50-20-020119	2/1/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-50-20-042919	4/29/2019	<0.0062	U		<0.0065	U		**0.017**			**0.007**			0.89			<0.0029	U		0.8			**0.26**		
		VMP-50-20-073019	7/30/2019	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-50-20-102319	10/23/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.048			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-50-20-012820	1/28/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-50-20-042820	4/28/2020	<0.0069	U		0.0013	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-50-20-072720	7/27/2020	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0026	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-50-20-110520	11/5/2020	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.053			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-50-20-110520-DUP	11/5/2020	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		0.053			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-50-20-022521	2/25/2021	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-50-20-022521-DUP	2/25/2021	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	**2.3**	J		**7.7**			<2.1	U		<3.2	U		<12	U		<0.69	U		58			<3.7	U	
		VMP-50-30-050515	5/5/2015	<2.8	U		**4**			<2	U		<3	U		<1.1	U		<0.65	U		28			<3.5	U	
		VMP-50-30-061515-R	6/15/2015	<1.3	U		**3.6**			<0.92	U		<1.4	U		<0.53	U		<0.3	U		24			<1.6	U	
		VMP-50-30-073015	7/30/2015	<1.9	U		**2.2**			<1.3	U		<2	U		<0.76	U		<0.44	U		14			<2.3	U	
		VMP-50-30-110315	11/3/2015	**0.084**	J		**1**			<0.09	U		<0.14	U		**0.028**	J	J	<0.03	U		15			<0.16	U	
		VMP-50-30-020216	2/2/2016	<3.9	U		**0.81**	J		<2.7	U		<4.2	U		<1.6	U	UJ	<0.9	U		15	J0	J	<4.8	U	
		VMP-50-30-020216-DUP	2/2/2016	<4.4	U		**0.85**	J		<3.1	U		<4.7	U		<1.8	U	UJ	<1	U		16	J0	J	<5.4	U	
		VMP-50-30-050316	5/3/2016	<0.46	U		**0.35**			<0.32	U		<0.5	U		<0.19	U		<0.1	U		6.2			<0.56	U	
		VMP-50-30-080216	8/2/2016	**0.09**	J		**0.42**			<0.095	U		<0.15	U		<0.22	U		<0.031	U		16			<0.17	U	
		VMP-50-30-103116	10/31/2016	**0.074**	J		**0.21**			<0.19	U		<0.29	U		<0.44	U		<0.062	U		26			<0.33	U	
		VMP-50-30-020117	2/1/2017	**0.033**	J		**0.15**			<0.082	U		<0.13	U		<0.19	U		<0.027	U		14			<0.14	U	
		VMP-50-30-050317	5/3/2017	<0.33	U		**0.11**			<0.093	U		<0.14	U		<0.54	U		<0.031	U		9.8			<0.16	U	
		VMP-50-30-050317-DUP	5/3/2017	**0.032**	J		**0.099**			<0.096	U		<0.15	U		<0.56	U		<0.032	U		9.5			<0.17	U	
		VMP-50-30-072617	7/26/2017	<0.39	U		**0.095**			<0.11	U		<0.17	U		<0.64	U		<0.036	U		9.6			<0.19	U	
		VMP-50-30-110117	11/1/2017	**0.029**	J		**0.14**			<0.074	U		<0.11	U		<0.17	U		<0.024	U		13			<0.13	U	
		VMP-50-30-110117-DUP	11/1/2017	<0.1	U		**0.15**			<0.073	U		<0.11	U		<0.17	U		<0.024	U		14			<0.13	U	
		VMP-50-30-013118	1/31/2018	<0.11	U		<0.036	U		<0.076	U		<0.12	U		<0.18	U		<0.025	U		22			<0.13	U	
		VMP-50-30-032918	3/29/2018	<0.37	U		<0.05	U		<0.1	U		<0.16	U		<0.6	U		<0.034	U		14			<0.18	U	
		VMP-50-30-032918-DUP	3/29/2018	<0.35	U		<0.047	U		<0.098	U		<0.15	U		<0.57	U		<0.032	U		13			<0.17	U	
		VMP-50-30-041018	4/10/2018	**0.32**	J		<0.74	U		<1.6	U		<2.4	U		<9	U		<0.51	U		47			<2.7	U	
		VMP-50-30-072618	7/26/2018	<0.58	U		<0.078	U		<0.16	U		<0.25	U		<0.96	U		<0.054	U		12			<0.29	U	
		VMP-50-30-103018	10/30/2018	**0.023**	J	J	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		15			**0.004**	J	J
		VMP-50-30-012519	1/25/2019	<0.53	U		<0.072	U		<0.15	U		<0.23	U		<0.87	U		<0.05	U		13			<0.26	U	
		VMP-50-30-012519-DUP	1/25/2019	<0.49	U		<0.065	U		<0.14	U		<0.21	U		<0.8	U		<0.045	U		13			<0.24	U	
		VMP-50-30-042919	4/29/2019	<0.29	U		<0.039	U		<0.082	U		<0.13	U		<0.48	U		<0.027	U		15			<0.14	U	
		VMP-50-30-073019	7/30/2019	<0.6	U		<0.081	U		<0.17	U		<0.26	U		<0.99	U		<0.056	U		12			<0.3	U	
		VMP-50-30-102319	10/23/2019	**0.039**	J		<0.04	U		<0.085	U		<0.13	U		<0.2	U		<0.028	U		16			<0.15	U	
		VMP-50-30-012820	1/28/2020	<0.64	U		<0.086	U		<0.18	U		<0.28	U		<1	U		<0.06	U		6.5			<0.32	U	
		VMP-50-30-042820	4/28/2020	<0.4	U		<0.054	U		<0.11	U		<0.18	U		<0.66	U		<0.037	U		10			<0.2	U	
		VMP-50-30-072720	7/27/2020	**0.039**	J		<0.04	U		<0.084	U		<0.13	U		<0.48	U		<0.028	U		5.3			<0.15	U	
		VMP-50-30-110520	11/5/2020	**0.022**	J		<0.0079	U		<0.016	U		<0.026	U		<0.096	U		<0.0055	U		1.1			<0.029	U	
		VMP-50-30-012621	1/26/2021	**0.034**	J		<0.08	U		<0.17	U		<0.26	U		<0.97	U		<0.055	U		7			<0.3	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	<3.9	U		<2	U		<1.4	U		<2.7	U		<3.3	U		<1.5	U		<6.4	U		<1.6	U	
		VMP-50-30-050515	5/5/2015	<0.92	U		<1.8	U		<1.4	U		<2.5	U		<3.1	U		<1.4	U		<2.4	U		<1.5	U	
		VMP-50-30-061515-R	6/15/2015	<0.43	U		<0.86	U		<0.63	U		<1.2	U		<1.4	U		<0.67	U		<1.1	U		<0.71	U	
		VMP-50-30-073015	7/30/2015	<0.61	U		<1.2	U		<0.91	U		<1.7	U		<2.1	U		<0.96	U		<1.6	U		<1	U	
		VMP-50-30-110315	11/3/2015	<0.042	U		<0.085	U		<0.062	U		<0.11	U		<0.14	U		<0.066	U		<0.11	U		<0.07	U	UJ
		VMP-50-30-020216	2/2/2016	<1.3	U	UJ	<2.6	U		<1.9	U		<3.5	U		<4.3	U		<2	U		<3.4	U		<2.1	U	
		VMP-50-30-020216-DUP	2/2/2016	<1.4	U	UJ	<2.9	U		<2.1	U		<3.9	U		<4.8	U		<2.2	U		<3.8	U		<2.4	U	
		VMP-50-30-050316	5/3/2016	<0.15	U		<0.3	U		<0.22	U		<0.41	U		<0.5	U		<0.23	U		<0.4	U		<0.25	U	
		VMP-50-30-080216	8/2/2016	**0.012**	J		<0.089	U		<0.065	U		<0.12	U		<0.15	U		<0.069	U		<0.12	U		<0.073	U	
		VMP-50-30-103116	10/31/2016	<0.35	U		<0.18	U		<0.13	U		<0.24	U		<0.3	U		<0.14	U		<0.23	U		<0.14	U	
		VMP-50-30-020117	2/1/2017	<0.15	U		<0.077	U		<0.056	U		<0.1	U		<0.13	U		<0.06	U		<0.1	U		<0.063	U	
		VMP-50-30-050317	5/3/2017	<0.17	U		<0.088	U		<0.064	U		<0.12	U		<0.15	U		<0.068	U		<0.29	U		<0.072	U	
		VMP-50-30-050317-DUP	5/3/2017	<0.18	U		<0.09	U		<0.066	U		<0.12	U		<0.15	U		<0.07	U		<0.3	U		<0.074	U	
		VMP-50-30-072617	7/26/2017	<0.2	U		<0.1	U		<0.076	U		<0.14	U		<0.17	U		<0.08	U		**0.33**	J		<0.085	U	
		VMP-50-30-110117	11/1/2017	<0.14	U		<0.07	U		<0.051	U		<0.094	U		<0.12	U		<0.054	U		<0.092	U		<0.057	U	
		VMP-50-30-110117-DUP	11/1/2017	<0.14	U		<0.068	U		<0.05	U		<0.092	U		<0.11	U		<0.053	U		<0.09	U		<0.056	U	
		VMP-50-30-013118	1/31/2018	<0.14	U		<0.071	U		<0.052	U		<0.096	U		<0.12	U		<0.055	U		<0.093	U		<0.058	U	
		VMP-50-30-032918	3/29/2018	<0.19	U		<0.098	U		<0.071	U		<0.13	U		<0.16	U		<0.076	U		<0.32	U		<0.08	U	
		VMP-50-30-032918-DUP	3/29/2018	<0.18	U		<0.092	U		<0.067	U		<0.12	U		<0.15	U		<0.071	U		<0.3	U		<0.076	U	
		VMP-50-30-041018	4/10/2018	**0.2**	J		<1.5	U		<1.1	U		<2	U		<2.4	U		<1.1	U		<4.8	U		<1.2	U	
		VMP-50-30-072618	7/26/2018	**0.026**	J		<0.15	U		<0.11	U		<0.21	U		<0.26	U		<0.12	U		<0.51	U		<0.13	U	
		VMP-50-30-103018	10/30/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-50-30-012519	1/25/2019	<0.28	U		<0.14	U		<0.1	U		<0.19	U		<0.24	U		**0.034**	J		<0.46	U		<0.12	U	
		VMP-50-30-012519-DUP	1/25/2019	<0.26	U		<0.13	U		<0.094	U		<0.17	U		<0.22	U		<0.1	U		<0.42	U		<0.11	U	
		VMP-50-30-042919	4/29/2019	<0.15	U		<0.077	U		<0.057	U		<0.1	U		<0.13	U		**0.021**	J		<0.25	U		<0.064	U	
		VMP-50-30-073019	7/30/2019	**0.15**	J		<0.16	U		<0.12	U		<0.22	U		<0.27	U		<0.12	U		<0.53	U		<0.13	U	
		VMP-50-30-102319	10/23/2019	<0.16	U		<0.08	U		<0.058	U		<0.11	U		<0.13	U		<0.062	U		<0.1	U		<0.065	U	
		VMP-50-30-012820	1/28/2020	<0.34	U		<0.17	U		<0.12	U		<0.23	U		<0.28	U		<0.13	U		<0.56	U		<0.14	U	
		VMP-50-30-042820	4/28/2020	<0.21	U		<0.11	U		<0.078	U		<0.14	U		<0.18	U		<0.083	U		<0.35	U		<0.088	U	
		VMP-50-30-072720	7/27/2020	<0.16	U		<0.079	U		<0.058	U		<0.11	U		<0.13	U		<0.061	U		<0.26	U		<0.065	U	
		VMP-50-30-110520	11/5/2020	<0.031	J	U	<0.016	U		<0.011	U		<0.021	U		<0.026	U		<0.012	U		**0.025**	J		<0.013	U	
		VMP-50-30-012621	1/26/2021	<0.31	U		<0.16	U		<0.12	U		<0.21	U		<0.26	U		<0.12	U		<0.52	U		<0.13	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	**71**			<2.4	U		<1.9	U		<1.9	U		<1.9	U		<1.5	U		<1.3	U		<1.3	U	
		VMP-50-30-050515	5/5/2015	**44**			<2.3	U		<1.8	U		<1.8	U		<1.8	U		<1.4	U		<1.2	U		<1.2	U	
		VMP-50-30-061515-R	6/15/2015	**45**			<1	U		<0.83	U		<0.83	U		<0.83	U		<0.68	U		<0.56	U		<0.56	U	
		VMP-50-30-073015	7/30/2015	**32**			<1.5	U		<1.2	U		<1.2	U		<1.2	U		<0.97	U		<0.8	U		<0.8	U	
		VMP-50-30-110315	11/3/2015	**32**			<0.1	U		<0.081	U		<0.081	U		<0.081	U		<0.066	U		<0.054	U		<0.054	U	
		VMP-50-30-020216	2/2/2016	**29**			<3.1	U		<2.4	U		<2.4	U		<2.4	U		<2	U		<1.6	U		<1.6	U	
		VMP-50-30-020216-DUP	2/2/2016	**33**			<3.5	U		<2.8	U		<2.8	U		<2.8	U		<2.3	U		<1.8	U		<1.8	U	
		VMP-50-30-050316	5/3/2016	**18**			<0.37	U		<0.29	U		<0.29	U		<0.29	U		<0.24	U		<0.19	U		<0.19	U	
		VMP-50-30-080216	8/2/2016	**12**			**0.13**			<0.085	U		<0.085	U		<0.085	U		<0.07	U		<0.057	U		<0.057	U	
		VMP-50-30-103116	10/31/2016	**16**			<0.22	U		<0.17	U		<0.17	U		<0.17	U		<0.14	U		<0.11	U		<0.11	U	
		VMP-50-30-020117	2/1/2017	**8.4**			<0.094	U		<0.074	U		<0.074	U		<0.074	U		<0.06	U		<0.05	U		<0.05	U	
		VMP-50-30-050317	5/3/2017	**5.8**			<0.11	U		<0.084	U		<0.084	U		<0.084	U		<0.069	U		<0.056	U		<0.056	U	
		VMP-50-30-050317-DUP	5/3/2017	**5.4**			<0.11	U		<0.086	U		<0.086	U		<0.086	U		<0.071	U		<0.058	U		<0.058	U	
		VMP-50-30-072617	7/26/2017	**5**			<0.13	U		<0.099	U		<0.099	U		<0.099	U		<0.081	U		<0.066	U		<0.066	U	
		VMP-50-30-110117	11/1/2017	**7.3**			<0.085	U		<0.067	U		<0.067	U		<0.067	U		<0.055	U		<0.045	U		<0.045	U	
		VMP-50-30-110117-DUP	11/1/2017	**7.7**			<0.083	U		<0.065	U		<0.065	U		<0.065	U		<0.054	U		<0.044	U		<0.044	U	
		VMP-50-30-013118	1/31/2018	**7.7**			<0.087	U		<0.068	U		<0.068	U		<0.068	U		<0.056	U		<0.046	U		<0.046	U	
		VMP-50-30-032918	3/29/2018	**4.5**			<0.12	U		<0.093	U		<0.093	U		<0.093	U		<0.077	U		<0.063	U		<0.063	U	
		VMP-50-30-032918-DUP	3/29/2018	**4.6**			<0.11	U		<0.088	U		<0.088	U		<0.088	U		<0.072	U		<0.059	U		<0.059	U	
		VMP-50-30-041018	4/10/2018	**11**			<1.8	U		<1.4	U		<1.4	U		<1.4	U		<1.1	U		<0.94	U		<0.94	U	
		VMP-50-30-072618	7/26/2018	**3.6**			<0.19	U		<0.15	U		<0.15	U		<0.15	U		<0.12	U		<0.1	U		<0.1	U	
		VMP-50-30-103018	10/30/2018	**6**			<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J	J	<0.0048	U		<0.0048	U	
		VMP-50-30-012519	1/25/2019	**5**			<0.17	U		<0.14	U		<0.14	U		<0.14	U		<0.11	U		<0.091	U		<0.091	U	
		VMP-50-30-012519-DUP	1/25/2019	**5**			<0.16	U		<0.12	U		<0.12	U		<0.12	U		<0.1	U		<0.083	U		<0.083	U	
		VMP-50-30-042919	4/29/2019	**3.6**			<0.094	U		<0.074	U		<0.074	U		<0.074	U		<0.061	U		<0.05	U		<0.05	U	
		VMP-50-30-073019	7/30/2019	**4.1**			<0.2	U		<0.15	U		<0.15	U		<0.15	U		<0.13	U		<0.1	U		<0.1	U	
		VMP-50-30-102319	10/23/2019	**4.8**			<0.097	U		<0.076	U		<0.076	U		<0.076	U		<0.062	U		<0.051	U		<0.051	U	
		VMP-50-30-012820	1/28/2020	**1.1**			<0.21	U		<0.16	U		<0.16	U		<0.16	U		<0.13	U		<0.11	U		<0.11	U	
		VMP-50-30-042820	4/28/2020	**2.4**			<0.13	U		<0.1	U		<0.1	U		<0.1	U		<0.084	U		<0.069	U		<0.069	U	
		VMP-50-30-072720	7/27/2020	**0.88**			<0.096	U		<0.075	U		<0.075	U		<0.075	U		<0.062	U		<0.05	U		<0.05	U	
		VMP-50-30-110520	11/5/2020	**0.016**			<0.019	U		<0.015	U		<0.015	U		<0.015	U		**0.0035**	J		<0.01	U		<0.01	U	
		VMP-50-30-012621	1/26/2021	**1.6**			<0.19	U		<0.15	U		<0.15	U		<0.15	U		<0.12	U		<0.1	U		<0.1	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	<1.2	U		<1.2	U		<1.2	U		<11	U		<1.4	U		<1.4	U		<1.4	U		<4.5	U	
		VMP-50-30-050515	5/5/2015	<1.2	U		<1.2	U		<1.2	U		<1	U		<1.4	U		<1.3	U		<1.3	U		<4.2	U	
		VMP-50-30-061515-R	6/15/2015	<0.54	U		<0.54	U		<0.54	U		<0.48	U		<0.64	U		<0.62	U		<0.62	U		<2	U	
		VMP-50-30-073015	7/30/2015	<0.78	U		<0.78	U		<0.78	U		<0.68	U		<0.91	U		<0.89	U		<0.89	U		<2.8	U	
		VMP-50-30-110315	11/3/2015	<0.053	U		<0.053	U		<0.053	U		<0.047	U		<0.062	U		<0.061	U		<0.061	U		<0.19	U	
		VMP-50-30-020216	2/2/2016	<1.6	U		<1.6	U		<1.6	U	UJ	<1.4	U		<1.9	U		<1.8	U		<1.8	U		<5.9	U	
		VMP-50-30-020216-DUP	2/2/2016	<1.8	U		<1.8	U		<1.8	U	UJ	<1.6	U		<2.1	U		<2.1	U		<2.1	U		<6.6	U	
		VMP-50-30-050316	5/3/2016	<0.19	U		<0.19	U		<0.19	U		<0.17	U		<0.22	U		<0.22	U		<0.22	U		<0.69	U	
		VMP-50-30-080216	8/2/2016	<0.056	U		<0.056	U		<0.056	U		**0.026**	J		<0.065	U		<0.064	U		<0.064	U		<0.2	U	
		VMP-50-30-103116	10/31/2016	<0.11	U		<0.11	U		<0.11	U		<0.39	U		<0.13	U		<0.13	U		<0.13	U		<0.41	U	
		VMP-50-30-020117	2/1/2017	<0.048	U		<0.048	U		<0.048	U		<0.17	U		<0.057	U		<0.056	U		<0.056	U		<0.18	U	
		VMP-50-30-050317	5/3/2017	<0.055	U		<0.055	U		<0.055	U		<0.48	U		<0.064	U		<0.063	U		<0.063	U		<0.2	U	
		VMP-50-30-050317-DUP	5/3/2017	<0.057	U		<0.057	U		<0.057	U		<0.5	U		<0.066	U		<0.065	U		<0.065	U		<0.21	U	
		VMP-50-30-072617	7/26/2017	<0.065	U		<0.065	U		<0.065	U		<0.57	U		<0.076	U		<0.075	U		<0.075	U		<0.24	U	
		VMP-50-30-110117	11/1/2017	<0.044	U		<0.044	U		<0.044	U		<0.15	U		**0.022**	J		<0.05	U		<0.05	U		<0.16	U	
		VMP-50-30-110117-DUP	11/1/2017	<0.043	U		<0.043	U		<0.043	U		<0.15	U		**0.026**	J		<0.049	U		<0.049	U		<0.16	U	
		VMP-50-30-013118	1/31/2018	<0.045	U		<0.045	U		<0.045	U		<0.16	U		<0.052	U		<0.051	U		<0.051	U		<0.16	U	
		VMP-50-30-032918	3/29/2018	<0.061	U		<0.061	U		<0.061	U		<0.54	U		<0.072	U		<0.07	U		<0.07	U		<0.22	U	
		VMP-50-30-032918-DUP	3/29/2018	<0.058	U		<0.058	U		<0.058	U		<0.51	U		<0.067	U		<0.066	U		<0.066	U		<0.21	U	
		VMP-50-30-041018	4/10/2018	<0.92	U		<0.92	U		<0.92	U		<8.1	U		<1.1	U		<1	U		<1	U		<3.4	U	
		VMP-50-30-072618	7/26/2018	<0.098	U		<0.098	U		<0.098	U		<0.85	U		<0.11	U		<0.11	U		<0.11	U		<0.35	U	
		VMP-50-30-103018	10/30/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-50-30-012519	1/25/2019	<0.089	U		<0.089	U		<0.089	U		<0.78	U		<0.1	U		<0.1	U		<0.1	U		<0.32	U	
		VMP-50-30-012519-DUP	1/25/2019	<0.081	U		<0.081	U		<0.081	U		<0.71	U		<0.095	U		<0.093	U		<0.093	U		<0.3	U	
		VMP-50-30-042919	4/29/2019	<0.049	U		<0.049	U		<0.049	U		<0.43	U		<0.057	U		<0.056	U		<0.056	U		<0.18	U	
		VMP-50-30-073019	7/30/2019	<0.1	U		<0.1	U		<0.1	U		<0.88	U		<0.12	U		<0.12	U		<0.12	U		<0.37	U	
		VMP-50-30-102319	10/23/2019	<0.05	U		<0.05	U		<0.05	U		<0.18	J	U	<0.058	U		<0.057	U		<0.057	U		<0.18	U	
		VMP-50-30-012820	1/28/2020	<0.11	U		<0.11	U		<0.11	U		<0.94	U		<0.12	U		<0.12	U		<0.12	U		<0.39	U	
		VMP-50-30-042820	4/28/2020	<0.067	U		<0.067	U		<0.067	U		<0.59	U		<0.078	U		<0.077	U		<0.077	U		<0.24	U	
		VMP-50-30-072720	7/27/2020	<0.05	U		<0.05	U		<0.05	U		<0.43	U		<0.058	U		<0.057	U		<0.057	U		<0.18	U	
		VMP-50-30-110520	11/5/2020	<0.0098	U		<0.0098	U		<0.0098	U		<0.086	U		<0.011	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-50-30-012621	1/26/2021	<0.099	U		<0.099	U		<0.099	U		<0.87	U		<0.12	U		<0.11	U		<0.11	U		<0.36	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	<2.4	U		**79**			74			<2.4	U		<2.2	U		**140**			<13	U		**150**		
		VMP-50-30-050515	5/5/2015	<2.2	U		**39**			130			<2.3	U		<2.1	U		**120**			<12	U		**110**		
		VMP-50-30-061515-R	6/15/2015	<1	U		**45**			170			<1	U		<0.96	U		**120**			<5.9	U		**110**		
		VMP-50-30-073015	7/30/2015	<1.5	U		**32**			190			<1.5	U		<1.4	U		**80**			<8.4	U		**70**		
		VMP-50-30-110315	11/3/2015	<0.1	U		**15**			210			<0.1	U		<0.094	U		**50**			<0.57	U		**48**		
		VMP-50-30-020216	2/2/2016	<3.1	U		**14**			280			<3.1	U		<2.8	U		**36**			<17	U		**42**		
		VMP-50-30-020216-DUP	2/2/2016	<3.4	U		**15**			310			<3.5	U		<3.2	U		**41**			<20	U		**48**		
		VMP-50-30-050316	5/3/2016	<0.36	U		**5.6**			290			<0.37	U		<0.33	U		**26**			<2	U		**36**		
		VMP-50-30-080216	8/2/2016	<0.11	U		**1.9**			12			<0.11	U		<0.099	U		**9.7**			<0.6	U		**18**		
		VMP-50-30-103116	10/31/2016	<0.21	U		**2.3**			26			<0.22	U		<0.2	U		**16**			<1.2	U		**27**		
		VMP-50-30-020117	2/1/2017	0.98			**0.9**			1.1			<0.094	U		<0.086	U		**2.2**			<0.52	U		**7.2**		
		VMP-50-30-050317	5/3/2017	<0.1	U		**0.78**			1.3			<0.11	U		<0.098	U		**3**			<0.6	U		**6.1**		
		VMP-50-30-050317-DUP	5/3/2017	<0.11	U		**0.73**			1.2			<0.11	U		<0.1	U		**2.8**			<0.61	U		**5.8**		
		VMP-50-30-072617	7/26/2017	<0.12	U		**0.74**			0.86			<0.13	U		<0.12	U		**2**			<0.7	U		**3.9**		
		VMP-50-30-110117	11/1/2017	0.048	J		**0.9**			1.1		J	<0.085	U		<0.078	U		**1.2**			<0.47	U		**4.5**		
		VMP-50-30-110117-DUP	11/1/2017	<0.082	U		**1**			1.2		J	<0.083	U		<0.076	U		**1.2**			<0.46	U		**4.8**		
		VMP-50-30-013118	1/31/2018	<0.085	U		**0.41**			0.26			<0.087	U		<0.079	U		**5.4**			<0.48	U		**12**		
		VMP-50-30-032918	3/29/2018	<0.12	U		**0.29**			0.21			<0.12	U		<0.11	U		**2.9**			<0.66	U		**5.2**		
		VMP-50-30-032918-DUP	3/29/2018	<0.11	U		**0.3**			0.2			<0.11	U		<0.1	U		**2.8**			<0.62	U		**5.2**		
		VMP-50-30-041018	4/10/2018	<1.8	U		**0.42**	J		0.44	J		<1.8	U		<1.6	U		**6.4**			<9.9	U		**17**		
		VMP-50-30-072618	7/26/2018	<0.18	U		**0.25**			0.17			<0.19	U		<0.17	U		**3.3**			<1	U		**5.4**		
		VMP-50-30-103018	10/30/2018	0.0068	J	J	**0.23**		J	0.2		J	<0.0091	U		<0.0083	U		**2.8**			<0.051	U		**8**		
		VMP-50-30-012519	1/25/2019	<0.17	U		**0.24**			0.15			<0.17	U		<0.16	U		**4.1**			<0.96	U		**6.5**		
		VMP-50-30-012519-DUP	1/25/2019	<0.15	U		**0.25**			0.17			<0.16	U		<0.14	U		**4**			<0.87	U		**6.6**		
		VMP-50-30-042919	4/29/2019	<0.093	U		**0.18**			0.13			<0.094	U		<0.086	U		**2.1**			<0.52	U		**4.7**		
		VMP-50-30-073019	7/30/2019	<0.19	U	UJ	**0.19**			0.1	J		<0.2	U		<0.18	U		**1.8**			<1.1	U		**4.5**		
		VMP-50-30-102319	10/23/2019	<0.095	U		**0.13**			0.078			<0.097	U		<0.088	U		**1.7**			<0.54	U		**4.6**		
		VMP-50-30-012820	1/28/2020	<0.2	U		<0.12	U		<0.13	U		<0.21	U		<0.19	U		<0.11	U		<1.1	U		**0.25**		
		VMP-50-30-042820	4/28/2020	<0.13	ND,UJ	UJ	**0.067**	J		0.021	J		<0.13	U		<0.12	U		**0.52**			<0.72	U		**1.7**		
		VMP-50-30-072720	7/27/2020	<0.094	U		<0.054	U		<0.061	U		<0.096	U		<0.087	U		**0.19**			<0.53	U		**1.2**		
		VMP-50-30-110520	11/5/2020	<0.019	U		<0.011	U		<0.012	U		<0.019	U		<0.017	U		<0.01	U		<0.1	U		**0.014**		
		VMP-50-30-012621	1/26/2021	<0.47	U	UJ	**0.015**	J		<0.12	U		<0.19	U		<0.18	U		**0.52**			<1.1	U		**3.9**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	<5.1	U		110			**4.8**			<1.3	U		<1.1	U					<3.1	U		**3.7**		
		VMP-50-30-050515	5/5/2015	<4.8	U		76			**2.2**			<1.2	U		<1.1	U					**0.59**	J		**1.8**		
		VMP-50-30-061515-R	6/15/2015	<2.2	U		69			**2.5**			<0.56	U		<0.5	U					<1.4	U		**1.6**		
		VMP-50-30-073015	7/30/2015	<3.2	U		41			**2.2**			<0.81	U		<0.71	U					<1.9	U		**1.4**		
		VMP-50-30-110315	11/3/2015	<0.22	U		33			<0.066	U		<0.055	U		<0.048	ND,UJ	UJ				<0.13	U		**0.58**		
		VMP-50-30-020216	2/2/2016	<6.7	U		31			<2	U		<1.7	U		<1.5	U					<4	U		<2	U	
		VMP-50-30-020216-DUP	2/2/2016	<7.5	U		36			<2.2	U		<1.9	U		<1.6	U					<4.5	U		**0.63**	J	
		VMP-50-30-050316	5/3/2016	<0.78	U		19			<0.24	U		<0.2	U		<0.17	U					<0.47	U		<0.24	U	
		VMP-50-30-080216	8/2/2016	<0.23	U		24			**0.15**			<0.058	U		<0.051	U					<0.14	U		<0.07	U	
		VMP-50-30-103116	10/31/2016	<0.46	U		53			<0.14	U		<0.12	U		<0.1	U		<0.59	U		<0.28	U		**0.2**		
		VMP-50-30-020117	2/1/2017	<0.2	U		29			**0.064**			<0.05	U		<0.044	U					<0.12	U		**0.052**	J	
		VMP-50-30-050317	5/3/2017	<0.23	U		17			**0.08**			<0.057	U		<0.2	U					<0.14	U		**0.064**	J	
		VMP-50-30-050317-DUP	5/3/2017	<0.24	U		16			**0.072**			<0.059	U		<0.21	U					<0.14	U		**0.067**	J	
		VMP-50-30-072617	7/26/2017	<0.27	U		14			**0.062**	J		<0.067	U		<0.24	U					<0.16	U		**0.066**	J	
		VMP-50-30-110117	11/1/2017	<0.18	U		21			**0.1**			<0.045	U		<0.04	U					<0.11	U		**0.07**		
		VMP-50-30-110117-DUP	11/1/2017	<0.18	U		22			**0.11**			<0.044	U		<0.039	U					<0.11	U		**0.067**		
		VMP-50-30-013118	1/31/2018	<0.18	U		40			**0.025**	J		<0.046	U		<0.041	U					<0.11	U		**0.012**	J	
		VMP-50-30-032918	3/29/2018	<0.25	U		21			**0.023**	J		<0.063	U		<0.22	U		<0.16	U		<0.15	U		**0.016**	J	
		VMP-50-30-032918-DUP	3/29/2018	<0.24	U		20			**0.025**	J		<0.06	U		<0.21	U		<0.15	U		<0.14	U		**0.016**	J	
		VMP-50-30-041018	4/10/2018	<3.8	U		85			<1.1	U		<0.95	U		<3.4	U		<2.4	U		<2.3	U		<1.1	U	
		VMP-50-30-072618	7/26/2018	<0.4	U		18			**0.016**	J		<0.1	U		<0.35	U					<0.24	U	UJ	<0.12	U	
		VMP-50-30-103018	10/30/2018	<0.019	U		33			**0.011**	J	J	<0.0049	U		<0.017	U					<0.012	U		**0.0079**	J	J
		VMP-50-30-012519	1/25/2019	<0.37	U		23			<0.11	U		<0.092	U		<0.32	U					<0.22	U		<0.11	U	
		VMP-50-30-012519-DUP	1/25/2019	<0.34	U		24			<0.1	U		<0.084	U		<0.3	U					<0.2	U		<0.1	U	
		VMP-50-30-042919	4/29/2019	<0.2	U		22			**0.018**	J		<0.05	ND,UJ	UJ	<0.18	U					<0.12	U		<0.06	U	
		VMP-50-30-073019	7/30/2019	<0.42	U		22			<0.12	U		<0.1	U		<0.37	U					<0.25	U		<0.12	U	
		VMP-50-30-102319	10/23/2019	<0.21	U		26			**0.013**	J		<0.052	U		<0.046	U					<0.12	U		<0.062	U	
		VMP-50-30-012820	1/28/2020	<0.44	U		15			<0.13	U		<0.11	U		<0.39	U					<0.26	U		<0.13	U	
		VMP-50-30-042820	4/28/2020	<0.28	U		12			<0.083	U		<0.069	U		<0.24	U					<0.17	U		<0.083	U	
		VMP-50-30-072720	7/27/2020	<0.2	U		9			<0.061	U		<0.051	U		<0.18	U					<0.12	U		<0.061	U	
		VMP-50-30-110520	11/5/2020	<0.04	U		1.9			<0.012	U		<0.01	U		<0.036	U					**0.0092**	J		<0.012	U	
		VMP-50-30-012621	1/26/2021	<0.41	U		17			<0.12	U		<0.1	U		<0.36	U					<0.25	U		<0.12	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	<1.3	U		<2.1	U		<2.1	U		<0.92	U		**220**			<9.3	U		<1.7	U		<1.7	U	
		VMP-50-30-050515	5/5/2015	<1.2	U		<2	U					<0.87	U		**140**			<8.8	U		<1.6	U		<1.6	U	
		VMP-50-30-061515-R	6/15/2015	<0.58	U		<0.94	U		<0.93	U		<0.4	U		**140**			<4.1	U		<0.75	U		<0.75	U	
		VMP-50-30-073015	7/30/2015	<0.84	U		<1.4	U		<1.3	U		<0.58	U		**96**			<5.8	U		<1.1	U		<1.1	U	
		VMP-50-30-110315	11/3/2015	<0.057	U		<0.092	U		<0.091	U		<0.04	U		**42**			<0.4	U		<0.073	U		<0.073	U	
		VMP-50-30-020216	2/2/2016	<1.7	U		<2.8	U		<2.8	U		<1.2	U		**34**			<12	U		<2.2	U		<2.2	U	
		VMP-50-30-020216-DUP	2/2/2016	<2	U		<3.2	U		<3.1	U		<1.4	U		**37**			<14	U		<2.5	U		<2.5	U	
		VMP-50-30-050316	5/3/2016	<0.2	U		<0.33	U		<0.32	U		<0.14	U		**8.4**			<1.4	U		<0.26	U		<0.26	U	
		VMP-50-30-080216	8/2/2016	<0.06	U		<0.097	U		<0.096	U		<0.042	U		**10**			<0.42	U		<0.077	U		<0.077	U	
		VMP-50-30-103116	10/31/2016	<0.12	U		<0.19	U		<0.19	U		<0.083	U		**3.4**			<0.84	ND,UJ	UJ	<0.15	U		<0.15	U	
		VMP-50-30-020117	2/1/2017	<0.052	U		<0.084	U		<0.083	U		<0.036	U		**3.2**			<0.36	U		<0.067	U		<0.067	U	
		VMP-50-30-050317	5/3/2017	<0.059	U		<0.096	U		<0.095	U		<0.041	U		**3.3**			<0.41	U		<0.076	U		<0.076	U	
		VMP-50-30-050317-DUP	5/3/2017	<0.061	U		<0.098	U		<0.097	U		<0.042	U		**3.1**			<0.43	U		<0.078	U		<0.078	U	
		VMP-50-30-072617	7/26/2017	<0.07	U		<0.11	U		**0.018**	J		<0.048	U		**2.3**			<0.49	U		<0.09	U		<0.09	U	
		VMP-50-30-110117	11/1/2017	<0.047	U		<0.076	U		<0.075	U		<0.033	U		**4.5**			<0.33	U		<0.06	U		<0.06	U	
		VMP-50-30-110117-DUP	11/1/2017	<0.046	U		<0.074	U		<0.074	U		<0.032	U		**4.8**			<0.32	U		<0.059	U		<0.059	U	
		VMP-50-30-013118	1/31/2018	<0.048	U		<0.078	U		<0.077	U		<0.033	U		**0.045**			<0.34	U		<0.062	U		<0.062	U	
		VMP-50-30-032918	3/29/2018	<0.066	U		<0.11	U		<0.1	U		<0.046	U		**0.037**	J		<0.46	U		<0.084	U		<0.084	U	
		VMP-50-30-032918-DUP	3/29/2018	<0.062	U		<0.1	U		<0.099	U		<0.043	U		**0.032**	J		<0.43	U		<0.08	U		<0.08	U	
		VMP-50-30-041018	4/10/2018	<0.99	U		<1.6	U		<1.6	U		<0.68	U		<0.88	U		<6.9	U		<1.3	U		<1.3	U	
		VMP-50-30-072618	7/26/2018	<0.1	U		<0.17	U		<0.17	U		<0.072	U		**0.026**	J		<0.73	U		<0.13	U		<0.13	U	
		VMP-50-30-103018	10/30/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.061**		J	<0.035	U		<0.0065	U		<0.0065	U	
		VMP-50-30-012519	1/25/2019	<0.096	U		<0.15	U		<0.15	U		<0.066	U		<0.085	U		<0.67	U		<0.12	U		<0.12	U	
		VMP-50-30-012519-DUP	1/25/2019	<0.087	U		<0.14	U		<0.14	U		<0.06	U		<0.077	U		<0.61	U		<0.11	U		<0.11	U	
		VMP-50-30-042919	4/29/2019	<0.052	U		<0.084	U		<0.083	U		<0.036	ND,UJ	UJ	**0.034**	J		<0.36	U		<0.067	U		<0.067	U	
		VMP-50-30-073019	7/30/2019	<0.11	U		<0.18	U		<0.17	U		<0.075	U		<0.096	U		<0.76	U		<0.14	U		<0.14	U	
		VMP-50-30-102319	10/23/2019	<0.054	U		<0.087	U		<0.086	U		<0.037	U		**0.021**	J		<0.38	U		<0.069	U		<0.069	U	
		VMP-50-30-012820	1/28/2020	<0.11	U		<0.18	U		<0.18	U		<0.079	U		<0.1	U		<0.8	U		<0.15	U		<0.15	U	
		VMP-50-30-042820	4/28/2020	<0.072	U		<0.12	U		<0.11	U		<0.05	U		**0.041**	J		<0.5	U		<0.092	U		<0.092	U	
		VMP-50-30-072720	7/27/2020	<0.053	U		<0.086	U		<0.085	U		<0.037	U		<0.047	U		<0.37	U		<0.068	U		<0.068	U	
		VMP-50-30-110520	11/5/2020	<0.01	U		<0.017	U		**0.0019**	J		<0.0073	U		**0.0014**	J		<0.073	U		<0.014	U		<0.014	U	
		VMP-50-30-012621	1/26/2021	<0.11	U		<0.17	U		<0.17	U		<0.074	U		**0.043**	J		<0.74	U		<0.14	U		<0.14	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-50-30-021015	2/10/2015	<1.7	U		<1.8	U		**40**			**20**			190			<0.8	U		420			**140**		
		VMP-50-30-050515	5/5/2015	<1.6	U		<1.6	U		**91**			**39**			140			<0.75	U		550			**190**		
		VMP-50-30-061515-R	6/15/2015	<0.74	U		<0.77	U		**110**			**48**			140			<0.35	U		630	E	J	**250**		
		VMP-50-30-073015	7/30/2015	<1	U		<1.1	U		**130**			**56**			96			<0.5	U		550			**240**		
		VMP-50-30-110315	11/3/2015	<0.072	U		<0.076	U		**120**			**58**			85			<0.034	U		280			**150**		
		VMP-50-30-020216	2/2/2016	<2.2	U		<2.3	U		**180**			**95**			94			<1	ND,UJ	UJ	190			**98**		
		VMP-50-30-020216-DUP	2/2/2016	<2.5	U		<2.6	U		**200**			**100**			100			<1.2	ND,UJ	UJ	210			**100**		
		VMP-50-30-050316	5/3/2016	<0.26	U		<0.27	U		**230**			**120**			79			<0.12	U		120			**54**		
		VMP-50-30-080216	8/2/2016	<0.076	U		<0.08	U		**2.2**			**11**			29			<0.036	U		6.8			**5.5**		
		VMP-50-30-103116	10/31/2016	<0.15	U		<0.16	U		**15**			**29**			45			<0.072	U		9.6			**2.8**		
		VMP-50-30-020117	2/1/2017	<0.066	U		<0.069	U		**0.13**			**2.8**			7.1			<0.031	U		1.9			**1.9**		
		VMP-50-30-050317	5/3/2017	<0.075	U		<0.078	U		**0.29**			**2.9**			7.8			<0.036	U		2.6			**2.6**		
		VMP-50-30-050317-DUP	5/3/2017	<0.077	U		<0.081	U		**0.27**			**2.7**			7.4			<0.037	U		2.4			**2.5**		
		VMP-50-30-072617	7/26/2017	<0.088	U		<0.092	U		**0.13**			**2.2**			6			<0.042	U		1.7			**1.8**		
		VMP-50-30-110117	11/1/2017	<0.06	U		<0.062	U		**0.25**			**1.6**			4.1			<0.028	U		3			**2.7**		
		VMP-50-30-110117-DUP	11/1/2017	<0.058	U		<0.061	U		**0.27**			**1.8**			4.3			<0.028	U		3.4			**2.9**		
		VMP-50-30-013118	1/31/2018	<0.061	U		<0.063	U		<0.056	U		**0.68**			11			<0.029	U		0.2			**0.11**		
		VMP-50-30-032918	3/29/2018	<0.083	U		<0.087	U		<0.076	U		**0.45**			5.7			<0.04	U		0.19			**0.083**		
		VMP-50-30-032918-DUP	3/29/2018	<0.078	U		<0.082	U		<0.072	U		**0.45**			5.8			<0.037	U		0.19			**0.081**		
		VMP-50-30-041018	4/10/2018	<1.2	U		<1.3	U		<1.1	U		**1.2**			24			<0.59	U		0.19	J		**0.042**	J	
		VMP-50-30-072618	7/26/2018	<0.13	U		<0.14	U		<0.12	U		**0.36**			7			<0.063	U		0.11			**0.058**	J	
		VMP-50-30-103018	10/30/2018	<0.0064	U		<0.0067	U		**0.0063**	J	J	**0.67**		J	15			<0.003	U		0.12		J	**0.088**		J
		VMP-50-30-012519	1/25/2019	<0.12	U		<0.13	U		<0.11	U		**0.26**			9.1			<0.058	U		0.15			**0.044**	J	
		VMP-50-30-012519-DUP	1/25/2019	<0.11	U		<0.12	U		<0.1	U		**0.26**			8.8			<0.052	U		0.15			**0.044**	J	
		VMP-50-30-042919	4/29/2019	<0.066	U		<0.069	U		<0.06	U		**0.18**			6.5			<0.031	U		0.1			**0.053**		
		VMP-50-30-073019	7/30/2019	<0.14	U		<0.14	U		<0.12	U		**0.24**			8.9			<0.065	U		0.092	J		**0.05**	J	
		VMP-50-30-102319	10/23/2019	<0.068	U		<0.071	U		<0.062	U		**0.19**			6.4			<0.032	U		0.049	J		**0.036**	J	
		VMP-50-30-012820	1/28/2020	<0.14	U		<0.15	U		<0.13	U		**0.076**	J		5.8			<0.069	U		<0.12	U		<0.12	U	
		VMP-50-30-042820	4/28/2020	<0.091	U		<0.095	U		<0.083	U		**0.028**	J		1.9			<0.043	U		0.032	J		**0.027**	J	
		VMP-50-30-072720	7/27/2020	<0.067	U		<0.07	U		<0.061	U		**0.01**	J		3.9			<0.032	U		<0.054	U		<0.054	U	
		VMP-50-30-110520	11/5/2020	<0.013	U		0.0025	J		<0.012	U		<0.012	U		1.9			<0.0063	U		<0.011	U		<0.011	U	
		VMP-50-30-012621	1/26/2021	<0.13	U		<0.14	U		<0.12	U		<0.12	U		3.6			<0.064	U		<0.11	U		<0.11	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-5-042915	4/29/2015	**0.0077**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0071**	J	
		VMP-51-5-072115	7/21/2015	**0.039**			<0.0042	J	U	<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0075**	J	
		VMP-51-5-102815	10/28/2015	**0.086**			**0.0022**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.013**	J	
		VMP-51-5-012516	1/25/2016	**0.0094**	J		**0.0013**	J		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.0032	J		**0.0024**	J	
		VMP-51-5-042816	4/28/2016	**0.0089**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-51-5-072716	7/27/2016	**0.025**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.004**	J	
		VMP-51-5-101916	10/19/2016	**0.0062**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-51-5-012617	1/26/2017	**0.014**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0033**	J	
		VMP-51-5-042517	4/25/2017	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0022**	J	
		VMP-51-5-072017	7/20/2017	**0.0072**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-5-103017	10/30/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-51-5-012318	1/23/2018	**0.015**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-51-5-041618	4/16/2018	**0.014**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.003**	J	
		VMP-51-5-071718	7/17/2018	**0.014**	J		**0.0012**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-51-5-101918	10/19/2018	**0.0057**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-51-5-012319	1/23/2019	**0.014**	J		**0.0026**	J		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.014			**0.0044**	J	
		VMP-51-5-050119	5/1/2019	**0.011**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-5-072419	7/24/2019	**0.0069**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-5-102519	10/25/2019	<0.031	U		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-5-012820	1/28/2020	**0.011**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-51-5-012820-DUP	1/28/2020	**0.012**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0025**	J	
		VMP-51-5-042720	4/27/2020	**0.008**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-5-072320	7/23/2020	**0.024**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0028	J		**0.0073**	J	
		VMP-51-5-103020	10/30/2020	<0.03	J	U	<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-5-012221	1/22/2021	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.029	U		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-51-10-042915	4/29/2015	**0.0075**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-10-072115	7/21/2015	**0.0096**	J		<0.0048	J	U	<0.01	U		<0.016	U		<0.059	U		<0.0033	U		<0.014	U		**0.0039**	J	
		VMP-51-10-102815	10/28/2015	<0.032	J	U	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0055	J		<0.016	U	
		VMP-51-10-012516	1/25/2016	**0.013**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0027	J		**0.004**	J	
		VMP-51-10-042816	4/28/2016	**0.0072**	J		**0.0019**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-10-042816-DUP	4/28/2016	**0.018**	J		**0.0015**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		**0.011**	J	
		VMP-51-10-072716	7/27/2016	**0.014**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0033**	J	
		VMP-51-10-101916	10/19/2016	**0.011**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-10-012617	1/26/2017	**0.0087**	J		**0.00051**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-51-10-042517	4/25/2017	**0.057**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.015**		
		VMP-51-10-072017	7/20/2017	**0.015**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0028**	J	
		VMP-51-10-103017	10/30/2017	<0.027	J	U	<0.0036	J	U	<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-51-10-012318	1/23/2018	<0.027	J	U	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-51-10-041618	4/16/2018	**0.0068**	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-51-10-071718	7/17/2018	**0.059**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-10-101918	10/19/2018	**0.013**	J		<0.0035	U		**0.0012**	J		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-51-10-012319	1/23/2019	**0.041**			<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0048**	J	
		VMP-51-10-050119	5/1/2019	**0.022**	J		**0.0073**			<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		0.017			**0.005**	J	
		VMP-51-10-072419	7/24/2019	**0.01**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-10-102519	10/25/2019	<0.029	U		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-51-10-012820	1/28/2020	**0.0098**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-10-042720	4/27/2020	**0.027**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0054**	J	
		VMP-51-10-072320	7/23/2020	**0.028**			**0.00098**	J		**0.0014**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.005**	J	
		VMP-51-10-103020	10/30/2020	<0.03	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-10-012221	1/22/2021	**0.011**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0018**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-51-5-042915	4/29/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-51-5-072115	7/21/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	J	U	<0.027	U		<0.0068	U	
		VMP-51-5-102815	10/28/2015	**0.011**	J		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		**0.0047**	J		<0.0078	U	
		VMP-51-5-012516	1/25/2016	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-51-5-042816	4/28/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-51-5-072716	7/27/2016	**0.0048**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-51-5-101916	10/19/2016	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-51-5-012617	1/26/2017	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-51-5-042517	4/25/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-51-5-072017	7/20/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-51-5-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-51-5-012318	1/23/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-51-5-041618	4/16/2018	<0.014	J	U	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-51-5-071718	7/17/2018	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-51-5-101918	10/19/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-51-5-012319	1/23/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-51-5-050119	5/1/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-51-5-072419	7/24/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	ND,UJ	UJ
		VMP-51-5-102519	10/25/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-51-5-012820	1/28/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-51-5-042720	4/27/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-51-5-072320	7/23/2020	**0.0022**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-51-5-103020	10/30/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-51-5-012221	1/22/2021	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-51-10-042915	4/29/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-51-10-072115	7/21/2015	<0.019	J	U	<0.0095	U		<0.007	U		<0.013	U		<0.016	U		**0.0032**	J		<0.031	U		<0.0078	U	
		VMP-51-10-102815	10/28/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-51-10-012516	1/25/2016	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-51-10-042816	4/28/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-51-10-042816-DUP	4/28/2016	**0.013**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-51-10-072716	7/27/2016	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-51-10-101916	10/19/2016	**0.0029**	J		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.00085**	J		<0.024	U		<0.006	U	
		VMP-51-10-012617	1/26/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-51-10-042517	4/25/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-51-10-072017	7/20/2017	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.001**	J		<0.024	U		<0.0059	U	
		VMP-51-10-103017	10/30/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	
		VMP-51-10-012318	1/23/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-51-10-041618	4/16/2018	<0.013	J	U	<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-51-10-071718	7/17/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0028**	J		<0.026	U		<0.0066	U	
		VMP-51-10-101918	10/19/2018	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.004**	J		<0.023	U		<0.0057	U	
		VMP-51-10-012319	1/23/2019	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		**0.00092**	J		<0.022	U		<0.0056	U	
		VMP-51-10-050119	5/1/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-51-10-072419	7/24/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0016**	J		<0.024	U		<0.0062	ND,UJ	UJ
		VMP-51-10-102519	10/25/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-51-10-012820	1/28/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0033**	J		<0.028	U		<0.0071	U	
		VMP-51-10-042720	4/27/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.003**	J		<0.027	U		<0.0067	U	
		VMP-51-10-072320	7/23/2020	**0.0022**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.003**	J		<0.024	U		<0.006	U	
		VMP-51-10-103020	10/30/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0011**	J		<0.026	U		<0.0066	U	
		VMP-51-10-012221	1/22/2021	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-51-5-042915	4/29/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0021**	J		<0.0056	U		<0.0056	U	
		VMP-51-5-072115	7/21/2015	**0.0022**	J		<0.01	U		<0.0078	J	U	<0.0078	U		<0.0078	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-51-5-102815	10/28/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0028**	J		<0.0061	U		<0.0061	U	
		VMP-51-5-012516	1/25/2016	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-51-5-042816	4/28/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-51-5-072716	7/27/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0031**	J		<0.0057	U		<0.0057	U	
		VMP-51-5-101916	10/19/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0025**	J		<0.0057	U		<0.0057	U	
		VMP-51-5-012617	1/26/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-51-5-042517	4/25/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-51-5-072017	7/20/2017	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0015**	J		<0.0051	U		<0.0051	U	
		VMP-51-5-103017	10/30/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-51-5-012318	1/23/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0032**	J		<0.0045	U		<0.0045	U	
		VMP-51-5-041618	4/16/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-51-5-071718	7/17/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-51-5-101918	10/19/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		<0.0057	U		<0.0046	U		<0.0046	U	
		VMP-51-5-012319	1/23/2019	**0.004**			<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-51-5-050119	5/1/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-51-5-072419	7/24/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-51-5-102519	10/25/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0019**	J		<0.0053	U		<0.0053	U	
		VMP-51-5-012820	1/28/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-51-5-042720	4/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-51-5-072320	7/23/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-51-5-103020	10/30/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-51-5-012221	1/22/2021	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-51-10-042915	4/29/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-51-10-072115	7/21/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.002**	J		<0.0061	U		<0.0061	U	
		VMP-51-10-102815	10/28/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-51-10-012516	1/25/2016	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-51-10-042816	4/28/2016	**0.0027**	J		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.002**	J		<0.0055	U		<0.0055	U	
		VMP-51-10-042816-DUP	4/28/2016	**0.0016**	J		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-51-10-072716	7/27/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0028**	J		<0.0059	U		<0.0059	U	
		VMP-51-10-101916	10/19/2016	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-51-10-012617	1/26/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-51-10-042517	4/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-51-10-072017	7/20/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-51-10-103017	10/30/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-51-10-012318	1/23/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-51-10-041618	4/16/2018	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0028**	J		<0.0042	U		<0.0042	U	
		VMP-51-10-071718	7/17/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-51-10-101918	10/19/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-51-10-012319	1/23/2019	**0.0014**	J		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-51-10-050119	5/1/2019	**0.006**			<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-51-10-072419	7/24/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-51-10-102519	10/25/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0017**	J		<0.0049	U		<0.0049	U	
		VMP-51-10-012820	1/28/2020	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0023**	J		<0.0056	U		<0.0056	U	
		VMP-51-10-042720	4/27/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-51-10-072320	7/23/2020	**0.00038**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-51-10-103020	10/30/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-51-10-012221	1/22/2021	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-5-042915	4/29/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-51-5-072115	7/21/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-51-5-102815	10/28/2015	<0.006	U		<0.006	U		<0.006	U		**0.0066**	J		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-51-5-012516	1/25/2016	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-51-5-042816	4/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-51-5-072716	7/27/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0057**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-51-5-101916	10/19/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-51-5-012617	1/26/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-5-042517	4/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-5-072017	7/20/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-5-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-51-5-012318	1/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-51-5-041618	4/16/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-51-5-071718	7/17/2018	<0.0052	U		<0.0052	U		<0.0052	U		**0.0038**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-51-5-101918	10/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-5-012319	1/23/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-51-5-050119	5/1/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-5-072419	7/24/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-5-102519	10/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-5-012820	1/28/2020	<0.0056	U		<0.0056	U		<0.0056	U		**0.00099**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.0055	U		<0.0055	U		<0.0055	U		**0.0011**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-51-5-042720	4/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-5-072320	7/23/2020	<0.0047	U		<0.0047	U		<0.0047	U		**0.14**			<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-5-103020	10/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-5-012221	1/22/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-51-10-042915	4/29/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-51-10-072115	7/21/2015	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-51-10-102815	10/28/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	J	U	<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-51-10-012516	1/25/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-51-10-042816	4/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-51-10-042816-DUP	4/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-51-10-072716	7/27/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-51-10-101916	10/19/2016	<0.0046	U		<0.0046	U		<0.0046	U		**0.0023**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-51-10-012617	1/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-51-10-042517	4/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-10-072017	7/20/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-10-103017	10/30/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-10-012318	1/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-10-041618	4/16/2018	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-51-10-071718	7/17/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-10-101918	10/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-51-10-012319	1/23/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-51-10-050119	5/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-51-10-072419	7/24/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-10-102519	10/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-51-10-012820	1/28/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-51-10-042720	4/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-51-10-072320	7/23/2020	<0.0046	U		<0.0046	U		<0.0046	U		**0.043**			<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-51-10-103020	10/30/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-10-012221	1/22/2021	<0.0051	U		<0.0051	U		<0.0051	U		**0.00097**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	0.015			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-5-042915	4/29/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	ND,UJ	UJ	<0.0049	U	
		VMP-51-5-072115	7/21/2015	0.0047	J		**0.024**			0.11			<0.01	U		<0.0091	U		**0.0036**	J		<0.056	U		**0.0032**	J	
		VMP-51-5-102815	10/28/2015	0.024			<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		**0.002**	J		<0.065	U		**0.0065**		
		VMP-51-5-012516	1/25/2016	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0014**	J	
		VMP-51-5-042816	4/28/2016	0.0033	J		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		**0.0013**	J	
		VMP-51-5-072716	7/27/2016	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-51-5-101916	10/19/2016	<0.01	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-51-5-012617	1/26/2017	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-51-5-042517	4/25/2017	<0.0095	J	U	<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-51-5-072017	7/20/2017	0.0063	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-51-5-103017	10/30/2017	<0.0085	J	U	<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-51-5-012318	1/23/2018	0.0036	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-51-5-041618	4/16/2018	0.0034	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-51-5-071718	7/17/2018	0.0044	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0025**	J	
		VMP-51-5-101918	10/19/2018	<0.0087	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0018**	J	
		VMP-51-5-012319	1/23/2019	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.012**		
		VMP-51-5-050119	5/1/2019	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U	UJ	<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-5-072419	7/24/2019	0.0034	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-51-5-102519	10/25/2019	0.0025	J	J	<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-5-012820	1/28/2020	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-51-5-042720	4/27/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-51-5-072320	7/23/2020	0.034			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.00088**	J		<0.051	U		**0.0012**	J	
		VMP-51-5-103020	10/30/2020	<0.024	U	UJ	<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-51-5-012221	1/22/2021	<0.024	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
	10 ft	VMP-51-10-020315	2/3/2015	0.03			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-51-10-042915	4/29/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	ND,UJ	UJ	<0.0048	U	
		VMP-51-10-072115	7/21/2015	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-51-10-102815	10/28/2015	0.015			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-51-10-012516	1/25/2016	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0014**	J	
		VMP-51-10-042816	4/28/2016	0.0046	J		**0.0066**			0.006	J		<0.01	U		<0.0096	U		**0.0073**			<0.058	U		**0.0093**		
		VMP-51-10-042816-DUP	4/28/2016	0.0077	J		**0.0068**			0.007			<0.011	U		<0.0099	U		**0.0065**			<0.06	U		**0.0067**		
		VMP-51-10-072716	7/27/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-51-10-101916	10/19/2016	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-51-10-012617	1/26/2017	0.0059	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-51-10-042517	4/25/2017	0.033			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0011**	J		<0.05	U		<0.0042	U	
		VMP-51-10-072017	7/20/2017	0.0049	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.00098**	J	
		VMP-51-10-103017	10/30/2017	<0.0086	J	U	<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-51-10-012318	1/23/2018	0.029			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0013**	J		<0.049	U		**0.002**	J	
		VMP-51-10-041618	4/16/2018	<0.0079	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-51-10-071718	7/17/2018	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-51-10-101918	10/19/2018	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		**0.0011**	J	
		VMP-51-10-012319	1/23/2019	<0.0082	U		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-51-10-050119	5/1/2019	0.017			**0.0046**	J		<0.0057	U		<0.0088	U	UJ	<0.0081	U		**0.042**			<0.049	U		**0.074**		
		VMP-51-10-072419	7/24/2019	0.0035	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-51-10-102519	10/25/2019	0.0041	J	J	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0022**	J	
		VMP-51-10-012820	1/28/2020	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-51-10-042720	4/27/2020	0.0072	J		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-51-10-072320	7/23/2020	0.018			**0.00078**	J		<0.0058	U		<0.009	U		<0.0082	U		**0.0023**	J		<0.05	U		**0.0032**	J	
		VMP-51-10-103020	10/30/2020	<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-51-10-012221	1/22/2021	0.007	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0047	U					**0.0044**	J		<0.0065	U	
		VMP-51-5-042915	4/29/2015	<0.023	U		<0.016	U		<0.0068	U		**0.0024**	J		<0.005	U					**0.015**			<0.0068	U	
		VMP-51-5-072115	7/21/2015	<0.021	U		0.0022	J		**0.0046**	J		<0.0053	U		<0.0047	U					**0.0054**	J		**0.016**		
		VMP-51-5-102815	10/28/2015	<0.025	U		0.019			<0.0074	U		<0.0062	U		<0.0055	U					<0.015	J	U	<0.0074	U	
		VMP-51-5-012516	1/25/2016	<0.018	U		0.0021	J		<0.0055	U		<0.0046	U		<0.004	U					**0.018**			<0.0055	U	
		VMP-51-5-042816	4/28/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					**0.0089**	J		<0.007	U	
		VMP-51-5-072716	7/27/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.014**			<0.0069	U	
		VMP-51-5-101916	10/19/2016	<0.023	U		0.0041	J		<0.0069	U		<0.0058	U		<0.02	U		<0.015	U		**0.0054**	J		<0.0069	U	
		VMP-51-5-012617	1/26/2017	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					**0.002**	J		<0.0056	U	
		VMP-51-5-042517	4/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.023**			<0.0062	U	
		VMP-51-5-072017	7/20/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		**0.0007**	J	
		VMP-51-5-103017	10/30/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-51-5-012318	1/23/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.003**	J		<0.0055	U	
		VMP-51-5-041618	4/16/2018	<0.018	U		0.0042	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-51-5-071718	7/17/2018	<0.021	U		0.0066	J		<0.0064	U		<0.0054	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-51-5-101918	10/19/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-51-5-012319	1/23/2019	<0.018	U		0.033			<0.0056	U		<0.0046	U		<0.016	U					**0.002**	J		<0.0056	U	
		VMP-51-5-050119	5/1/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-51-5-072419	7/24/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-51-5-102519	10/25/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-51-5-012820	1/28/2020	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					<0.014	U		<0.0069	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0016**	J		<0.0068	U	
		VMP-51-5-042720	4/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0035**	J		<0.0059	U	
		VMP-51-5-072320	7/23/2020	<0.019	U		0.016			<0.0058	U		<0.0049	U		<0.017	U					**0.016**			<0.0058	U	
		VMP-51-5-103020	10/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0048**	J		<0.0063	U	
		VMP-51-5-012221	1/22/2021	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0063**	J		<0.0062	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.0043	U					**0.0035**	J		<0.0059	U	
		VMP-51-10-042915	4/29/2015	<0.022	U		0.0032	J		<0.0067	U		<0.0056	U		<0.0049	U					**0.015**			<0.0067	U	
		VMP-51-10-072115	7/21/2015	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.0054	U					**0.0033**	J		<0.0074	U	
		VMP-51-10-102815	10/28/2015	<0.022	U		0.0043	J		<0.0066	U		<0.0055	U		<0.0048	U					<0.013	J	U	<0.0066	U	
		VMP-51-10-012516	1/25/2016	**0.0012**	J		0.0022	J		<0.0061	U		<0.0051	U		<0.0045	U					**0.0039**	J		<0.0061	U	
		VMP-51-10-042816	4/28/2016	<0.022	U		0.0037	J		**0.0036**	J		<0.0056	U		<0.0049	U					**0.012**	J		**0.008**		
		VMP-51-10-042816-DUP	4/28/2016	**0.0016**	J		0.0058	J		**0.0028**	J		**0.0041**	J		<0.0051	U					**0.012**	J		**0.0079**		
		VMP-51-10-072716	7/27/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.0051**	J		<0.0071	U	
		VMP-51-10-101916	10/19/2016	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U		<0.012	U		<0.011	U		<0.0057	U	
		VMP-51-10-012617	1/26/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-51-10-042517	4/25/2017	**0.0025**	J		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.019**			<0.0058	U	
		VMP-51-10-072017	7/20/2017	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.014**			<0.0056	U	
		VMP-51-10-103017	10/30/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-51-10-012318	1/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.05**			<0.0056	U	
		VMP-51-10-041618	4/16/2018	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-51-10-071718	7/17/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.006**	J		<0.0063	U	
		VMP-51-10-101918	10/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-51-10-012319	1/23/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.007**	J		<0.0054	U	
		VMP-51-10-050119	5/1/2019	<0.019	U		0.069			<0.0057	U		<0.0047	U		<0.017	U					**0.0039**	J		<0.0057	U	
		VMP-51-10-072419	7/24/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-51-10-102519	10/25/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-51-10-012820	1/28/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-51-10-042720	4/27/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0045**	J		<0.0064	U	
		VMP-51-10-072320	7/23/2020	<0.019	U		0.0077	J		<0.0058	U		<0.0048	U		<0.017	U					**0.025**			<0.0058	U	
		VMP-51-10-103020	10/30/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0088**	J		<0.0063	U	
		VMP-51-10-012221	1/22/2021	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0079**	J		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-5-042915	4/29/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-5-072115	7/21/2015	<0.0056	U		<0.009	U		<0.0088	U		**0.0022**	J		**0.016**			<0.039	U		<0.0071	U		<0.0071	U	
		VMP-51-5-102815	10/28/2015	<0.0064	U		<0.01	U		<0.01	U		**0.019**			**0.0044**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-51-5-012516	1/25/2016	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-51-5-042816	4/28/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0007**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-51-5-072716	7/27/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0014**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-51-5-101916	10/19/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.00049**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-51-5-012617	1/26/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-5-042517	4/25/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-51-5-072017	7/20/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-51-5-103017	10/30/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-51-5-012318	1/23/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-51-5-041618	4/16/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.00034**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-51-5-071718	7/17/2018	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00067**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-51-5-101918	10/19/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	J	U	<0.034	U		<0.0063	U		<0.0063	U	
		VMP-51-5-012319	1/23/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-5-050119	5/1/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-5-072419	7/24/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.00067**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-51-5-102519	10/25/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-5-012820	1/28/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-5-042720	4/27/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-51-5-072320	7/23/2020	<0.0081	U		<0.0082	U		**0.0044**	J		<0.0035	U		**0.014**			<0.035	U		<0.0065	U		<0.0065	U	
		VMP-51-5-103020	10/30/2020	<0.0054	U		<0.0088	U		**0.0031**	J		<0.0038	U		<0.0048	J	U	<0.038	U		<0.007	U		<0.007	U	
		VMP-51-5-012221	1/22/2021	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-51-10-042915	4/29/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0015**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-10-072115	7/21/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-51-10-102815	10/28/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-51-10-012516	1/25/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-10-042816	4/28/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.015**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-10-042816-DUP	4/28/2016	<0.006	U		<0.0097	U		<0.0096	U		**0.003**	J		**0.02**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-51-10-072716	7/27/2016	<0.0062	U		<0.01	U		**0.0053**	J		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-51-10-101916	10/19/2016	<0.0049	U		<0.0079	U		**0.00096**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-51-10-012617	1/26/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-51-10-042517	4/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0013**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-51-10-072017	7/20/2017	<0.0049	U		<0.0079	U		**0.0016**	J		<0.0034	U		**0.00036**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-10-103017	10/30/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-10-012318	1/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-10-041618	4/16/2018	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-51-10-071718	7/17/2018	<0.0054	U		<0.0088	U		**0.0061**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-51-10-101918	10/19/2018	<0.0047	U		<0.0076	U		**0.0036**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-51-10-012319	1/23/2019	<0.0046	U		<0.0075	U		**0.0025**	J		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-51-10-050119	5/1/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.071**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-51-10-072419	7/24/2019	<0.0051	U		<0.0082	U		**0.0041**	J		<0.0035	U		**0.0012**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-51-10-102519	10/25/2019	<0.0052	U		<0.0084	U		**0.0022**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-51-10-012820	1/28/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0032**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-10-042720	4/27/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-51-10-072320	7/23/2020	<0.008	U		<0.008	U		**0.0031**	J		<0.0034	U		**0.0063**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-51-10-103020	10/30/2020	<0.0054	U		<0.0088	U		**0.0032**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-51-10-012221	1/22/2021	<0.0055	U		<0.0088	U		**0.0018**	J		<0.0038	U		**0.0005**	J		<0.038	U		<0.007	U		<0.007	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-51-5-020315	2/3/2015	<0.0071	U		0.0012	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-51-5-042915	4/29/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0018	J		<0.0035	U		0.0017	J		<0.006	U	
		VMP-51-5-072115	7/21/2015	<0.007	U		0.0017	J		**0.22**			**0.066**			0.0036	J		<0.0033	U		0.3			**0.19**		
		VMP-51-5-102815	10/28/2015	<0.0081	U		<0.0085	U		**0.0018**	J		<0.0074	U		0.011			<0.0039	U		0.0025	J		<0.0066	U	
		VMP-51-5-012516	1/25/2016	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0098			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-5-042816	4/28/2016	<0.0076	U		0.0017	J		<0.007	U		<0.007	U		0.0011	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-51-5-072716	7/27/2016	<0.0076	U		0.0022	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-51-5-101916	10/19/2016	<0.0076	U		0.0015	J		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-51-5-012617	1/26/2017	<0.0061	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-51-5-042517	4/25/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00064	J		<0.0032	U		0.0012	J		<0.0055	U	
		VMP-51-5-072017	7/20/2017	<0.0068	U		0.0015	J		**0.00028**	J		<0.0062	U		0.0023	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-51-5-103017	10/30/2017	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-5-012318	1/23/2018	<0.006	U		0.0014	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-5-041618	4/16/2018	<0.0059	U		0.0018	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-51-5-071718	7/17/2018	**0.0016**	J		0.0027	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-51-5-101918	10/19/2018	<0.0062	U		<0.0065	U		<0.0056	U		<0.0056	U		0.0014	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-51-5-012319	1/23/2019	<0.0061	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-5-050119	5/1/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-51-5-072419	7/24/2019	<0.0069	U		0.002	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-51-5-102519	10/25/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0013	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-51-5-012820	1/28/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-51-5-012820-DUP	1/28/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-51-5-042720	4/27/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-51-5-072320	7/23/2020	**0.00083**	J		0.001	J		<0.0058	U		<0.0058	U		0.0033	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-51-5-103020	10/30/2020	**0.0028**	J		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-51-5-012221	1/22/2021	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.00067	J		<0.0055	U	
	10 ft	VMP-51-10-020315	2/3/2015	<0.0065	U		0.0012	J		<0.0059	J	U	<0.0059	U		0.0015	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-51-10-042915	4/29/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-51-10-072115	7/21/2015	<0.0081	U		0.0016	J		<0.0074	U		<0.0074	U		0.003	J		<0.0038	U		<0.0066	U		<0.0066	U	
		VMP-51-10-102815	10/28/2015	<0.0072	U		<0.0076	J	U	<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-51-10-012516	1/25/2016	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-51-10-042816	4/28/2016	<0.0074	U		<0.0077	U		**0.0089**			<0.0067	U		0.046			<0.0035	U		0.015			**0.0056**	J	
		VMP-51-10-042816-DUP	4/28/2016	<0.0076	U		<0.008	U		**0.01**			**0.0029**	J		0.04			<0.0036	U		0.014			**0.0054**	J	
		VMP-51-10-072716	7/27/2016	<0.0078	U		0.002	J		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-51-10-101916	10/19/2016	<0.0062	U		0.0019	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-51-10-012617	1/26/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0011	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-51-10-042517	4/25/2017	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.001	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-51-10-072017	7/20/2017	<0.0062	U		0.0019	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-51-10-103017	10/30/2017	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-10-012318	1/23/2018	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-51-10-041618	4/16/2018	<0.0056	U		0.0018	J		<0.0051	U		<0.0051	U		<0.0049	U		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-51-10-071718	7/17/2018	<0.0069	U		0.0028	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-51-10-101918	10/19/2018	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0013	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-51-10-012319	1/23/2019	<0.0058	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		0.0016	J		<0.0047	U	
		VMP-51-10-050119	5/1/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.11	J0	J	<0.003	U		0.014			**0.0036**	J	
		VMP-51-10-072419	7/24/2019	<0.0064	U		0.0018	J		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		0.00089	J		<0.0052	U	
		VMP-51-10-102519	10/25/2019	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		0.00095	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-51-10-012820	1/28/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-51-10-042720	4/27/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-51-10-072320	7/23/2020	<0.0063	U		0.0017	J		<0.0058	U		<0.0058	U		0.0028	J		<0.003	U		0.0013	J		**0.00054**	J	
		VMP-51-10-103020	10/30/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-51-10-012221	1/22/2021	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-20-042915	4/29/2015	**0.024**	J		**0.002**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.009**	J	
		VMP-51-20-072115	7/21/2015	**0.015**	J		**0.002**	J		<0.012	U		<0.018	U		<0.069	U		<0.0039	U		0.21			**0.0032**	J	
		VMP-51-20-102815	10/28/2015	**0.029**	J		**0.00063**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0086**	J	
		VMP-51-20-012516	1/25/2016	**0.0083**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0034	J		**0.0013**	J	
		VMP-51-20-042816	4/28/2016	**0.0091**	J		**0.0036**	J		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		<0.018	U	
		VMP-51-20-052516-R	5/25/2016	**0.016**	J		**0.0038**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		0.0054	J		**0.0041**	J	
		VMP-51-20-072716	7/27/2016	**0.021**	J		<0.0051	U		<0.011	U		<0.017	U		<0.062	U		<0.0036	U		<0.015	U		<0.019	U	
		VMP-51-20-101916-Dup	10/19/2016	**0.025**	J		**0.002**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.005	J		**0.0037**	J	
		VMP-51-20-101916	10/19/2016	**0.0082**	J		**0.002**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-20-012617	1/26/2017	<0.026	J	U	<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0063	J		<0.013	U	
		VMP-51-20-042517	4/25/2017	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0046**	J	
		VMP-51-20-072017	7/20/2017	**0.022**	J		**0.0015**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0023**	J	
		VMP-51-20-103017	10/30/2017	<0.028	J	U	<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0049	J		<0.014	U	
		VMP-51-20-012318	1/23/2018	**0.01**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-51-20-012318-DUP	1/23/2018	**0.016**	J		**0.00052**	J		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-51-20-041618	4/16/2018	**0.0068**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		**0.0015**	J	
		VMP-51-20-071718	7/17/2018	**0.17**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0059**	J	
		VMP-51-20-101918	10/19/2018	**0.0099**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.003**	J	
		VMP-51-20-012319	1/23/2019	**0.014**	J		**0.002**	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-51-20-050119	5/1/2019	**0.011**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-51-20-072419	7/24/2019	<0.031	U		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-20-102519	10/25/2019	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-20-022120	2/21/2020	**0.013**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-20-042720	4/27/2020	**0.0066**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-20-072320	7/23/2020	**0.0074**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-51-20-103020	10/30/2020	<0.031	J	U	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-51-20-012221	1/22/2021	<0.029	J	U	<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0013**	J		<0.026	U		<0.0065	U	
		VMP-51-20-042915	4/29/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0012**	J		<0.026	U		<0.0065	U	
		VMP-51-20-072115	7/21/2015	<0.022	J	U	<0.011	U		<0.0082	U		<0.015	U		<0.019	U		**0.003**	J		<0.037	U		<0.0092	U	
		VMP-51-20-102815	10/28/2015	**0.064**			<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	J	U	<0.026	U		<0.0065	U	
		VMP-51-20-012516	1/25/2016	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-51-20-042816	4/28/2016	<0.02	U		<0.0099	U		<0.0072	U		<0.013	U		<0.017	U		<0.0077	U		<0.032	U		<0.0082	U	
		VMP-51-20-052516-R	5/25/2016	**0.003**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-51-20-072716	7/27/2016	**0.0056**	J		<0.01	U		<0.0074	U		<0.014	U		<0.017	U		**0.0013**	J		<0.033	U		<0.0083	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0018**	J		<0.026	U		<0.0066	U	
		VMP-51-20-101916	10/19/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0013**	J		<0.026	U		<0.0065	U	
		VMP-51-20-012617	1/26/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.00093**	J		<0.023	U		<0.0057	U	
		VMP-51-20-042517	4/25/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-51-20-072017	7/20/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0016**	J		<0.024	U		<0.0061	U	
		VMP-51-20-103017	10/30/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-51-20-012318	1/23/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.001**	J		<0.024	U		<0.0059	U	
		VMP-51-20-012318-DUP	1/23/2018	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0015**	J		<0.022	U		<0.0055	U	
		VMP-51-20-041618	4/16/2018	<0.013	J	U	<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		**0.00098**	J		<0.022	U		<0.0055	U	
		VMP-51-20-071718	7/17/2018	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.001**	J		<0.027	U		<0.0068	U	
		VMP-51-20-101918	10/19/2018	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0014**	J		<0.024	U		<0.0059	U	
		VMP-51-20-012319	1/23/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-51-20-050119	5/1/2019	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-51-20-072419	7/24/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0014**	J		<0.027	U		<0.0067	ND,UJ	UJ
		VMP-51-20-102519	10/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0014**	J		<0.026	U		<0.0065	U	
		VMP-51-20-022120	2/21/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.002**	J		<0.024	U		<0.0062	U	
		VMP-51-20-042720	4/27/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-51-20-072320	7/23/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0022**	J		<0.027	U		<0.0068	U	
		VMP-51-20-103020	10/30/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0035**	J		<0.027	U		<0.0068	U	
		VMP-51-20-012221	1/22/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.00082**	J		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-51-20-042915	4/29/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0042**	J		<0.0051	U		<0.0051	U	
		VMP-51-20-072115	7/21/2015	**0.0049**	J		<0.014	U		<0.011	U		<0.011	U		<0.011	U		**0.0025**	J		<0.0072	U		<0.0072	U	
		VMP-51-20-102815	10/28/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-51-20-012516	1/25/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-51-20-042816	4/28/2016	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0024**	J		<0.0064	U		<0.0064	U	
		VMP-51-20-052516-R	5/25/2016	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-51-20-072716	7/27/2016	<0.0055	U		<0.012	U		<0.0097	U		<0.0097	U		<0.0097	U		**0.0023**	J		<0.0065	U		<0.0065	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0034**	J		<0.0052	U		<0.0052	U	
		VMP-51-20-101916	10/19/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.0051	U		<0.0051	U	
		VMP-51-20-012617	1/26/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-51-20-042517	4/25/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-51-20-072017	7/20/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-51-20-103017	10/30/2017	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-51-20-012318	1/23/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-51-20-012318-DUP	1/23/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0037**	J		<0.0043	U		<0.0043	U	
		VMP-51-20-041618	4/16/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0075**			<0.0043	U		<0.0043	U	
		VMP-51-20-071718	7/17/2018	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0042**	J		<0.0053	U		<0.0053	U	
		VMP-51-20-101918	10/19/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0028**	J		<0.0046	U		<0.0046	U	
		VMP-51-20-012319	1/23/2019	**0.0027**	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-51-20-050119	5/1/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-51-20-072419	7/24/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-51-20-102519	10/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-51-20-022120	2/21/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-51-20-042720	4/27/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0033**	J		<0.0053	U		<0.0053	U	
		VMP-51-20-072320	7/23/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0029**	J		<0.0053	U		<0.0053	U	
		VMP-51-20-103020	10/30/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0037**	J		<0.0053	U		<0.0053	U	
		VMP-51-20-012221	1/22/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-20-042915	4/29/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-20-072115	7/21/2015	<0.0071	U		<0.0071	U		<0.0071	U		<0.062	U		<0.0082	U		<0.0081	U		<0.0081	U		<0.026	U	
		VMP-51-20-102815	10/28/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0058	U		<0.0057	U		<0.0057	U		**0.0057**	J	
		VMP-51-20-012516	1/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-20-042816	4/28/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.055	U		<0.0073	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-51-20-052516-R	5/25/2016	<0.0054	U		<0.0054	U		<0.0054	U		**0.0015**	J		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-51-20-072716	7/27/2016	<0.0064	U		<0.0064	U		<0.0064	U		**0.0042**	J		<0.0074	U		<0.0073	U		<0.0073	U		<0.023	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-20-101916	10/19/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-20-012617	1/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		**0.0015**	J	
		VMP-51-20-042517	4/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-51-20-072017	7/20/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0016**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-20-103017	10/30/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-51-20-012318	1/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-20-012318-DUP	1/23/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-51-20-041618	4/16/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-51-20-071718	7/17/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-20-101918	10/19/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-20-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-51-20-050119	5/1/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-51-20-072419	7/24/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-20-102519	10/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-20-022120	2/21/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-20-042720	4/27/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-20-072320	7/23/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		**0.0012**	J	
		VMP-51-20-103020	10/30/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-51-20-012221	1/22/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	0.0055	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-51-20-042915	4/29/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	ND,UJ	UJ	<0.0044	U	
		VMP-51-20-072115	7/21/2015	<0.013	U		**0.0023**	J		0.0024	J		<0.014	U		<0.012	U		**0.0046**	J		<0.076	U		**0.024**		
		VMP-51-20-102815	10/28/2015	0.012			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-51-20-012516	1/25/2016	0.0036	J		**0.0036**	J		0.0067			<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-20-042816	4/28/2016	0.0094	J		<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		<0.0056	U	
		VMP-51-20-052516-R	5/25/2016	0.0093	J		**0.0029**	J		0.0013	J		<0.01	U		<0.0096	U		**0.0022**	J		<0.059	U		**0.0035**	J	
		VMP-51-20-072716	7/27/2016	<0.012	U		<0.007	U		<0.0079	U		<0.012	U		<0.011	U		<0.0066	U		<0.069	U		<0.0057	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.0096	J	U	**0.003**	J		<0.0063	U		<0.0098	U		<0.0089	U		**0.004**	J		<0.055	U		**0.0064**		
		VMP-51-20-101916	10/19/2016	<0.0094	U		**0.0026**	J		<0.0062	U		<0.0096	U		<0.0088	U		**0.0043**	J		<0.054	U		**0.0076**		
		VMP-51-20-012617	1/26/2017	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		**0.0012**	J	
		VMP-51-20-042517	4/25/2017	0.0077	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0011**	J		<0.053	U		<0.0044	U	
		VMP-51-20-072017	7/20/2017	0.007	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.0011**	J	
		VMP-51-20-103017	10/30/2017	0.021			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-51-20-012318	1/23/2018	0.0049	J	J	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-51-20-012318-DUP	1/23/2018	0.024		J	<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		**0.0014**	J		<0.045	U		<0.0038	U	
		VMP-51-20-041618	4/16/2018	<0.008	U		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-51-20-071718	7/17/2018	0.0048	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-20-101918	10/19/2018	<0.0086	U		<0.0049	U		0.0014	J		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-51-20-012319	1/23/2019	<0.0081	U		**0.0015**	J		0.0015	J		<0.0082	U		<0.0075	U		**0.0029**	J		<0.046	U		**0.0062**		
		VMP-51-20-050119	5/1/2019	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U	UJ	<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-51-20-072419	7/24/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-51-20-102519	10/25/2019	<0.0094	U	UJ	<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.0039**	J	
		VMP-51-20-022120	2/21/2020	<0.009	U		**0.0012**	J		<0.0058	U		<0.0091	U		<0.0083	U		**0.0038**	J		<0.051	U		**0.0073**		
		VMP-51-20-042720	4/27/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-20-072320	7/23/2020	0.0049	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-20-103020	10/30/2020	<0.025	U	UJ	<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-20-012221	1/22/2021	0.0087	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
Remediation Objective				**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					<0.012	U		<0.0062	U	
		VMP-51-20-042915	4/29/2015	<0.021	U		0.0026	J		<0.0062	U		<0.0052	U		<0.0045	U					**0.016**			<0.0062	U	
		VMP-51-20-072115	7/21/2015	<0.029	U		0.23			<0.0088	U		<0.0073	U		<0.0064	U					<0.018	U		<0.0088	U	
		VMP-51-20-102815	10/28/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					<0.012	J	U	<0.0062	U	
		VMP-51-20-012516	1/25/2016	<0.022	U		0.0014	J		**0.0058**	J		<0.0054	U		<0.0047	U					**0.0073**	J		**0.017**		
		VMP-51-20-042816	4/28/2016	<0.026	U		<0.018	U		<0.0077	U		<0.0064	U		<0.0057	U					**0.0043**	J		<0.0077	U	
		VMP-51-20-052516-R	5/25/2016	<0.022	U		0.0063	J		**0.00072**	J		**0.0016**	J		<0.005	U					**0.058**			<0.0068	U	
		VMP-51-20-072716	7/27/2016	<0.026	U		0.002	J		<0.0079	U		<0.0066	U		<0.023	U					**0.011**	J		<0.0079	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.021	U		0.01	J		<0.0063	U		<0.0052	U		<0.018	U		<0.013	U		**0.0085**	J		<0.0063	U	
		VMP-51-20-101916	10/19/2016	<0.02	U		0.0062	J		<0.0062	U		<0.0051	U		<0.018	U		<0.013	U		<0.012	J	U	<0.0062	U	
		VMP-51-20-012617	1/26/2017	<0.018	U		0.0036	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0015**	J		**0.00058**	J	
		VMP-51-20-042517	4/25/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0095**	J		<0.0061	U	
		VMP-51-20-072017	7/20/2017	<0.019	U		0.0014	J		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-51-20-103017	10/30/2017	<0.019	U		0.019			<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-51-20-012318	1/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0079**	J		<0.0056	U	
		VMP-51-20-012318-DUP	1/23/2018	<0.017	U		0.0032	J		<0.0052	U		**0.001**	J		<0.015	U					**0.01**	J		<0.0052	U	
		VMP-51-20-041618	4/16/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-51-20-071718	7/17/2018	<0.022	U		<0.016	U		<0.0065	U		**0.0023**	J		<0.019	U					**0.037**			<0.0065	U	
		VMP-51-20-101918	10/19/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-51-20-012319	1/23/2019	<0.018	U		0.016			<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0053	U	
		VMP-51-20-050119	5/1/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-51-20-072419	7/24/2019	<0.021	U		<0.015	U		**0.0036**	J		<0.0053	U		<0.019	U					<0.013	U		**0.0089**		
		VMP-51-20-102519	10/25/2019	<0.02	U		0.0027	J		<0.0062	U		<0.0051	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-51-20-022120	2/21/2020	<0.019	U		0.0054	J		<0.0058	U		<0.0049	U		<0.017	U					**0.0031**	J		<0.0058	U	
		VMP-51-20-042720	4/27/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0037**	J		<0.0065	U	
		VMP-51-20-072320	7/23/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0052**	J		<0.0064	U	
		VMP-51-20-103020	10/30/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0076**	J		<0.0064	U	
		VMP-51-20-012221	1/22/2021	<0.02	U		0.0022	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0098**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-51-20-042915	4/29/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0046**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-51-20-072115	7/21/2015	<0.0076	U		<0.012	U		<0.012	U		<0.0053	U		**0.0016**	J		<0.053	U		<0.0097	U		<0.0097	U	
		VMP-51-20-102815	10/28/2015	<0.0054	U		<0.0086	U		<0.0085	U		**0.01**			<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-51-20-012516	1/25/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-20-042816	4/28/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		**0.00074**	J		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-51-20-052516-R	5/25/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0091**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-20-072716	7/27/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		**0.0021**	J		<0.048	U		<0.0088	U		<0.0088	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.0054	U		<0.0088	U		**0.001**	J		<0.0038	U		**0.0035**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-51-20-101916	10/19/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.001**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-20-012617	1/26/2017	<0.0047	U		**0.00048**	J		<0.0075	U		<0.0032	U		<0.0042	J	U	<0.033	U		<0.006	U		<0.006	U	
		VMP-51-20-042517	4/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00068**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-20-072017	7/20/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.002**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-51-20-103017	10/30/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0064**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-51-20-012318	1/23/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0012**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-20-012318-DUP	1/23/2018	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.0015**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-51-20-041618	4/16/2018	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-51-20-071718	7/17/2018	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-20-101918	10/19/2018	<0.0048	U		<0.0078	U		**0.0014**	J		<0.0034	U		**0.0013**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-20-012319	1/23/2019	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		**0.0014**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-51-20-050119	5/1/2019	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-51-20-072419	7/24/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.00067**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-51-20-102519	10/25/2019	<0.0053	U		<0.0086	U		**0.0018**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-20-022120	2/21/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-51-20-042720	4/27/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-20-072320	7/23/2020	<0.0089	U		<0.009	U		**0.0088**	J		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-51-20-103020	10/30/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-51-20-012221	1/22/2021	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-51	20 ft	VMP-51-20-020315	2/3/2015	<0.0068	U		0.0013	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-51-20-042915	4/29/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0034	J		<0.0032	U		0.002	J		<0.0055	U	
		VMP-51-20-072115	7/21/2015	<0.0096	U		0.0019	J		**0.0045**	J		**0.0017**	J		0.011			<0.0046	U		0.017			**0.0073**	J	
		VMP-51-20-102815	10/28/2015	<0.0068	U		<0.0071	J	U	<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-51-20-012516	1/25/2016	<0.0071	U		<0.0074	U		**0.017**			**0.0025**	J		0.03			<0.0034	U		0.0017	J		<0.0057	U	
		VMP-51-20-042816	4/28/2016	<0.0085	U		<0.0088	U		**0.0026**	J		<0.0077	U		<0.0074	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-51-20-052516-R	5/25/2016	<0.0074	U		<0.0077	U		<0.0068	J	U	<0.0068	U		0.0094			<0.0035	U		0.0075			**0.0026**	J	
		VMP-51-20-072716	7/27/2016	<0.0086	U		0.0017	J		<0.0079	U		<0.0079	U		<0.0075	U		<0.0041	U		<0.007	U		<0.007	U	
		VMP-51-20-101916-Dup	10/19/2016	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.008			<0.0033	U		0.0033	J		<0.0056	U	
		VMP-51-20-101916	10/19/2016	<0.0067	U		0.0014	J		<0.0062	U		<0.0062	U		0.01			<0.0032	U		0.0028	J		<0.0054	U	
		VMP-51-20-012617	1/26/2017	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		0.00066	J		<0.0028	U		0.0014	J		<0.0048	U	
		VMP-51-20-042517	4/25/2017	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.00077	J		<0.0032	U		0.0016	J		<0.0054	U	
		VMP-51-20-072017	7/20/2017	<0.0064	U		0.0013	J		**0.00048**	J		<0.0058	U		<0.0055	U		<0.003	U		0.0025	J		**0.00094**	J	
		VMP-51-20-103017	10/30/2017	<0.0063	U		0.0012	J		<0.0058	U		<0.0058	U		0.0018	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-51-20-012318	1/23/2018	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-51-20-012318-DUP	1/23/2018	<0.0057	U		0.0012	J		<0.0052	U		<0.0052	U		0.0044	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-51-20-041618	4/16/2018	<0.0057	U		0.0014	J		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-51-20-071718	7/17/2018	<0.0071	U		0.0021	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-51-20-101918	10/19/2018	<0.0061	U		0.0014	J		**0.0022**	J		<0.0056	J	U	<0.0053	U		<0.0029	U		0.003	J		**0.0019**	J	
		VMP-51-20-012319	1/23/2019	<0.0058	U		0.0012	J		<0.0052	U		<0.0053	U		0.0039	J		<0.0027	U		0.0068			**0.0015**	J	
		VMP-51-20-050119	5/1/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0076	J0	J	<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-51-20-072419	7/24/2019	<0.0069	U		0.002	J		<0.0063	U		<0.0063	U		0.015			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-51-20-102519	10/25/2019	<0.0067	U		0.0016	J		<0.0062	U		<0.0062	U		0.0023	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-51-20-022120	2/21/2020	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0041	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-51-20-042720	4/27/2020	<0.0071	U		0.002	J		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-51-20-072320	7/23/2020	<0.007	U		0.002	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-51-20-103020	10/30/2020	<0.007	U		0.0022	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-51-20-012221	1/22/2021	<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	**0.0099**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-30-020315-DUP	2/3/2015	**0.011**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-30-042915	4/29/2015	**0.0058**	J		**0.0014**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-30-042915-DUP	4/29/2015	**0.012**	J		**0.002**	J		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-30-072115	7/21/2015	**0.018**	J		<0.0041	J	U	<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0041**	J	
		VMP-51-30-102815	10/28/2015	<0.037	J	U	<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0034**	J	
		VMP-51-30-012516	1/25/2016	**0.013**	J		<0.0044	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0026**	J	
		VMP-51-30-012516-DUP	1/25/2016	**0.027**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		0.0025	J		**0.005**	J	
		VMP-51-30-042816	4/28/2016	**0.019**	J		**0.0078**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0041**	J	
		VMP-51-30-072716	7/27/2016	**0.01**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-30-072716-DUP	7/27/2016	**0.0086**	J		**0.0007**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-51-30-101916	10/19/2016	**0.058**			**0.0016**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0086	J		**0.0045**	J	
		VMP-51-30-012617	1/26/2017	<0.027	J	U	<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-51-30-042517	4/25/2017	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0024**	J	
		VMP-51-30-042517-DUP	4/25/2017	<0.03	J	U	**0.00063**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0049**	J	
		VMP-51-30-072017	7/20/2017	**0.0096**	J		**0.0015**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-30-103017	10/30/2017	<0.026	J	U	<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0029	J		<0.013	U	
		VMP-51-30-012318	1/23/2018	**0.014**	J		**0.00058**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-30-041618	4/16/2018	**0.012**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0022**	J	
		VMP-51-30-071718	7/17/2018	**0.016**	J		**0.00096**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-30-071718-DUP	7/17/2018	**0.0093**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-30-101918	10/19/2018	**0.0084**	J		<0.0035	U		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-51-30-101918-DUP	10/19/2018	**0.0096**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-51-30-012319	1/23/2019	**0.0065**	J		<0.0034	U		<0.007	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-51-30-050119	5/1/2019	**0.0061**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-30-050119-DUP	5/1/2019	**0.013**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-51-30-072419	7/24/2019	**0.0093**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U	UJ	<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-30-102519	10/25/2019	<0.029	U		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-51-30-102519-DUP	10/25/2019	**0.0056**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-51-30-012820	1/28/2020	**0.0099**	J		**0.0019**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0072	J		<0.016	U	
		VMP-51-30-042720	4/27/2020	**0.012**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-51-30-072320	7/23/2020	**0.013**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0022**	J	
		VMP-51-30-103020	10/30/2020	**0.018**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-51-30-012221	1/22/2021	**0.013**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0029**	J		<0.026	U		<0.0064	U	
		VMP-51-30-020315-DUP	2/3/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.003**	J		<0.027	U		<0.0068	U	
		VMP-51-30-042915	4/29/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0022**	J		<0.028	U		<0.0071	U	
		VMP-51-30-042915-DUP	4/29/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-51-30-072115	7/21/2015	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.0038**	J		<0.026	U		<0.0066	U	
		VMP-51-30-102815	10/28/2015	<0.019	J	U	<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		**0.014**			<0.032	U		<0.008	U	
		VMP-51-30-012516	1/25/2016	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.005**	J		<0.028	U		<0.0071	U	
		VMP-51-30-012516-DUP	1/25/2016	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0039**	J		<0.027	U		<0.0068	U	
		VMP-51-30-042816	4/28/2016	**0.00082**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.002**	J		<0.026	U		<0.0066	U	
		VMP-51-30-072716	7/27/2016	<0.017	J	U	<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		**0.0075**			<0.028	U		<0.0069	U	
		VMP-51-30-072716-DUP	7/27/2016	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0066**			<0.027	U		<0.0068	U	
		VMP-51-30-101916	10/19/2016	**0.0079**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.0016**	J		<0.029	U		<0.0072	U	
		VMP-51-30-012617	1/26/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.002**	J		<0.023	U		<0.0058	U	
		VMP-51-30-042517	4/25/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-51-30-042517-DUP	4/25/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0065	U	
		VMP-51-30-072017	7/20/2017	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0039**	J		<0.025	U		<0.0062	U	
		VMP-51-30-103017	10/30/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.005**	J		<0.023	U		<0.0057	U	
		VMP-51-30-012318	1/23/2018	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.0026**	J		<0.028	U		<0.0071	U	
		VMP-51-30-041618	4/16/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.00082**	J		<0.024	U		<0.0059	U	
		VMP-51-30-071718	7/17/2018	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-51-30-101918	10/19/2018	<0.014	J	U	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		**0.00087**	J		<0.023	U		<0.0057	U	
		VMP-51-30-101918-DUP	10/19/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0012**	J		<0.023	U		<0.0059	U	
		VMP-51-30-012319	1/23/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.00099**	J		<0.022	U		<0.0054	U	
		VMP-51-30-050119	5/1/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-51-30-072419	7/24/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.0019**	J		<0.024	U		<0.006	ND,UJ	UJ
		VMP-51-30-102519	10/25/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0022**	J		<0.025	U		<0.0063	U	
		VMP-51-30-102519-DUP	10/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0021**	J		<0.026	U		<0.0065	U	
		VMP-51-30-012820	1/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0013**	J		<0.028	U		<0.007	U	
		VMP-51-30-042720	4/27/2020	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0013**	J		<0.024	U		<0.006	U	
		VMP-51-30-072320	7/23/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0063	U	
		VMP-51-30-103020	10/30/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0023**	J		<0.028	U		<0.007	U	
		VMP-51-30-012221	1/22/2021	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	3700			0.004			140						0.2			64			1			0.42		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-51-30-020315-DUP	2/3/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-51-30-042915	4/29/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-51-30-042915-DUP	4/29/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-51-30-072115	7/21/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-51-30-102815	10/28/2015	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0024**	J		<0.0063	U		<0.0063	U	
		VMP-51-30-012516	1/25/2016	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0033**	J		<0.0055	U		<0.0055	U	
		VMP-51-30-012516-DUP	1/25/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0034**	J		<0.0054	U		<0.0054	U	
		VMP-51-30-042816	4/28/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-51-30-072716	7/27/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0028**	J		<0.0054	U		<0.0054	U	
		VMP-51-30-072716-DUP	7/27/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-51-30-101916	10/19/2016	**0.0021**	J		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-51-30-012617	1/26/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-51-30-042517	4/25/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-51-30-042517-DUP	4/25/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-51-30-072017	7/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-51-30-103017	10/30/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-51-30-012318	1/23/2018	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0034**	J		<0.0056	U		<0.0056	U	
		VMP-51-30-041618	4/16/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.014**			<0.0046	U		<0.0046	U	
		VMP-51-30-071718	7/17/2018	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0054**	J		<0.0051	U		<0.0051	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0058**	J		<0.005	U		<0.005	U	
		VMP-51-30-101918	10/19/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0034**	J		<0.0044	U		<0.0044	U	
		VMP-51-30-101918-DUP	10/19/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0034**	J		<0.0046	U		<0.0046	U	
		VMP-51-30-012319	1/23/2019	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0031**	J		<0.0042	U		<0.0042	U	
		VMP-51-30-050119	5/1/2019	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0038**	J		<0.0055	U		<0.0055	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-51-30-072419	7/24/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0034**	J		<0.0047	U		<0.0047	U	
		VMP-51-30-102519	10/25/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-51-30-102519-DUP	10/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-51-30-012820	1/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0022**	J		<0.0054	U		<0.0054	U	
		VMP-51-30-042720	4/27/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0052**	J		<0.0047	U		<0.0047	U	
		VMP-51-30-072320	7/23/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0037**	J		<0.0049	U		<0.0049	U	
		VMP-51-30-103020	10/30/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0033**	J		<0.0055	U		<0.0055	U	
		VMP-51-30-012221	1/22/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0035**	J		<0.0053	U		<0.0053	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-51-30-020315-DUP	2/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-30-042915	4/29/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-51-30-042915-DUP	4/29/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-30-072115	7/21/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-30-102815	10/28/2015	<0.0062	U		<0.0062	U		<0.0062	U		**0.0055**	J		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-51-30-012516	1/25/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-51-30-012516-DUP	1/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-30-042816	4/28/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-51-30-072716	7/27/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-51-30-072716-DUP	7/27/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.0015**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-51-30-101916	10/19/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	J	U	<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-51-30-012617	1/26/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-51-30-042517	4/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-30-042517-DUP	4/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-30-072017	7/20/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-51-30-103017	10/30/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-51-30-012318	1/23/2018	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-51-30-041618	4/16/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-30-071718	7/17/2018	<0.005	U		<0.005	U		<0.005	U		**0.0042**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.005	U		<0.005	U		<0.005	U		**0.0039**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-30-101918	10/19/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-51-30-101918-DUP	10/19/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-51-30-012319	1/23/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-51-30-050119	5/1/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-51-30-072419	7/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-51-30-102519	10/25/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-51-30-102519-DUP	10/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-51-30-012820	1/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		**0.0036**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-51-30-042720	4/27/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-51-30-072320	7/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.0025**	J		<0.0056	U		<0.0055	U		<0.0055	U		**0.0024**	J	
		VMP-51-30-103020	10/30/2020	<0.0054	U		<0.0054	U		<0.0054	U		**0.0018**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-51-30-012221	1/22/2021	<0.0052	U		<0.0052	U		<0.0052	U		**0.0017**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	0.023			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-51-30-020315-DUP	2/3/2015	0.015			**0.0013**	J		0.0034	J		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-51-30-042915	4/29/2015	<0.01	U		**0.0022**	J		<0.0067	U		<0.01	U		<0.0095	U		**0.006**			<0.058	ND,UJ	UJ	**0.0061**		
		VMP-51-30-042915-DUP	4/29/2015	<0.01	U		**0.0027**	J		<0.0065	U		<0.01	U		<0.0093	U		**0.0041**	J		<0.056	ND,UJ	UJ	**0.0043**	J	
		VMP-51-30-072115	7/21/2015	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-51-30-102815	10/28/2015	<0.012	U		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-51-30-012516	1/25/2016	0.0055	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-51-30-012516-DUP	1/25/2016	0.0085	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		**0.0025**	J		<0.056	U		**0.0018**	J	
		VMP-51-30-042816	4/28/2016	<0.0096	U		**0.0014**	J		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		**0.0011**	J	
		VMP-51-30-072716	7/27/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-51-30-072716-DUP	7/27/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-51-30-101916	10/19/2016	0.041			**0.0025**	J		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-51-30-012617	1/26/2017	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-51-30-042517	4/25/2017	0.0054	J		**0.00066**	J		<0.0061	U		<0.0096	U		<0.0087	U		**0.0018**	J		<0.053	U		**0.0039**	J	
		VMP-51-30-042517-DUP	4/25/2017	0.0081	J		**0.00091**	J		<0.0062	U		<0.0096	U		<0.0088	U		**0.0024**	J		<0.054	U		**0.0042**	J	
		VMP-51-30-072017	7/20/2017	0.0069	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-51-30-103017	10/30/2017	0.016			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-51-30-012318	1/23/2018	0.0056	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-51-30-041618	4/16/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-51-30-071718	7/17/2018	0.01			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		**0.0022**	J		<0.054	U		<0.0044	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-51-30-101918	10/19/2018	0.0044	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-51-30-101918-DUP	10/19/2018	0.0019	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-51-30-012319	1/23/2019	<0.0079	U		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-51-30-050119	5/1/2019	0.0074	J		<0.0059	U		<0.0067	U		<0.01	U	UJ	<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U	UJ	<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-51-30-072419	7/24/2019	0.0036	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-51-30-102519	10/25/2019	<0.0092	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0015**	J	
		VMP-51-30-102519-DUP	10/25/2019	<0.0094	U	UJ	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-51-30-012820	1/28/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0016**	J	
		VMP-51-30-042720	4/27/2020	0.0056	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-51-30-072320	7/23/2020	0.0035	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-51-30-103020	10/30/2020	0.033		J	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-51-30-012221	1/22/2021	0.008	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					**0.0035**	J		<0.0061	U	
		VMP-51-30-020315-DUP	2/3/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					<0.013	U		<0.0065	U	
		VMP-51-30-042915	4/29/2015	<0.022	U		0.0062	J		<0.0067	U		<0.0056	U		<0.0049	U					**0.021**			<0.0067	U	
		VMP-51-30-042915-DUP	4/29/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.015**			<0.0065	U	
		VMP-51-30-072115	7/21/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					**0.0028**	J		<0.0063	U	
		VMP-51-30-102815	10/28/2015	<0.025	U		<0.018	U		<0.0076	U		<0.0064	U		<0.0056	U					<0.015	J	U	<0.0076	U	
		VMP-51-30-012516	1/25/2016	<0.022	U		0.0014	J		<0.0067	U		<0.0056	J	U	<0.0049	U					**0.019**			<0.0067	U	
		VMP-51-30-012516-DUP	1/25/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	J	U	<0.0048	U					**0.035**			<0.0065	U	
		VMP-51-30-042816	4/28/2016	**0.0038**	J		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					**0.0037**	J		<0.0063	U	
		VMP-51-30-072716	7/27/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0068**	J		<0.0066	J	U
		VMP-51-30-072716-DUP	7/27/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0068**	J		<0.0065	J	U
		VMP-51-30-101916	10/19/2016	<0.023	U		0.026			<0.0068	U		<0.0057	U		<0.02	U		<0.014	U		**0.033**			<0.0068	U	
		VMP-51-30-012617	1/26/2017	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-51-30-042517	4/25/2017	<0.02	U		0.0034	J		<0.0061	U		<0.0051	U		<0.018	U					**0.0084**	J		<0.0061	U	
		VMP-51-30-042517-DUP	4/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0095**	J		<0.0062	U	
		VMP-51-30-072017	7/20/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-51-30-103017	10/30/2017	<0.018	U		0.0022	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-51-30-012318	1/23/2018	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0088**	J		<0.0068	U	
		VMP-51-30-041618	4/16/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		**0.001**	J	
		VMP-51-30-071718	7/17/2018	<0.021	U		0.0081	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0092**	J		<0.0062	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-51-30-101918	10/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-51-30-101918-DUP	10/19/2018	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-51-30-012319	1/23/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.002**	J		<0.0052	U	
		VMP-51-30-050119	5/1/2019	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		<0.0067	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-51-30-072419	7/24/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-51-30-102519	10/25/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-51-30-102519-DUP	10/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-51-30-012820	1/28/2020	<0.022	U		0.011	J		<0.0066	U		<0.0055	U		<0.019	U					**0.0051**	J		<0.0066	U	
		VMP-51-30-042720	4/27/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0036**	J		**0.00078**	J	
		VMP-51-30-072320	7/23/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0026**	J		<0.006	U	
		VMP-51-30-103020	10/30/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.044**			<0.0066	U	
		VMP-51-30-012221	1/22/2021	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.022**			<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.00096**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-30-020315-DUP	2/3/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0023**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-30-042915	4/29/2015	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.0097**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-51-30-042915-DUP	4/29/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0083**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-30-072115	7/21/2015	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		**0.001**	J		<0.007	U	
		VMP-51-30-102815	10/28/2015	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		<0.0058	U		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-51-30-012516	1/25/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-51-30-012516-DUP	1/25/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-30-042816	4/28/2016	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.00072**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-51-30-072716	7/27/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0005**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-51-30-072716-DUP	7/27/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.00043**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-51-30-101916	10/19/2016	**0.00081**	J		<0.0095	U		**0.0012**	J		<0.0041	U		**0.013**			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-51-30-012617	1/26/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-30-042517	4/25/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00065**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-30-042517-DUP	4/25/2017	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.001**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-51-30-072017	7/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-51-30-103017	10/30/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.00041**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-51-30-012318	1/23/2018	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0017**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-51-30-041618	4/16/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-30-071718	7/17/2018	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0055**			<0.038	U		<0.0069	U		<0.0069	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-30-101918	10/19/2018	<0.0047	U		<0.0075	U		**0.0011**	J		<0.0032	U		<0.0041	U		<0.032	U		<0.006	U		<0.006	U	
		VMP-51-30-101918-DUP	10/19/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-51-30-012319	1/23/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.00068**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-51-30-050119	5/1/2019	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-51-30-072419	7/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0017**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-51-30-102519	10/25/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-51-30-102519-DUP	10/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-51-30-012820	1/28/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0028**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-51-30-042720	4/27/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-51-30-072320	7/23/2020	<0.0083	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-51-30-103020	10/30/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.00088**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-51-30-012221	1/22/2021	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00064**	J		<0.039	U		<0.0072	U		<0.0072	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-51-30-020315	2/3/2015	**0.002**	J		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-51-30-020315-DUP	2/3/2015	<0.0071	U		0.001	J		**0.0054**	J		**0.0015**	J		<0.0062	U		<0.0034	U		0.003	J		**0.0014**	J	
		VMP-51-30-042915	4/29/2015	<0.0073	U		<0.0077	U		**0.0018**	J		**0.00078**	J		0.0081			<0.0035	U		0.0073			**0.0026**	J	
		VMP-51-30-042915-DUP	4/29/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0075			<0.0034	U		0.0059			**0.0014**	J	
		VMP-51-30-072115	7/21/2015	<0.0068	U		0.0021	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-51-30-102815	10/28/2015	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-51-30-012516	1/25/2016	<0.0073	U		0.0018	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-51-30-012516-DUP	1/25/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-51-30-042816	4/28/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.013			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-51-30-072716	7/27/2016	<0.0072	U		0.0021	J		<0.0066	U		<0.0066	U		0.0066			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-51-30-072716-DUP	7/27/2016	<0.0071	U		0.002	J		<0.0065	U		<0.0065	U		0.0062			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-51-30-101916	10/19/2016	<0.0074	U		0.002	J		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		0.0041	J		**0.0015**	J	
		VMP-51-30-012617	1/26/2017	<0.0061	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-30-042517	4/25/2017	<0.0067	U		0.0016	J		<0.0061	U		<0.0061	U		0.0026	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-51-30-042517-DUP	4/25/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0025	J		<0.0032	U		0.00096	J		<0.0055	U	
		VMP-51-30-072017	7/20/2017	<0.0064	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		0.00098	J		**0.00026**	J	
		VMP-51-30-103017	10/30/2017	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-51-30-012318	1/23/2018	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-51-30-041618	4/16/2018	<0.0062	U		0.0018	J		**0.00076**	J		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-51-30-071718	7/17/2018	<0.0068	U		0.0019	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0014	J		<0.0055	U	
		VMP-51-30-071718-DUP	7/17/2018	<0.0067	U		0.0025	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-51-30-101918	10/19/2018	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-51-30-101918-DUP	10/19/2018	<0.0061	U		0.002	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-51-30-012319	1/23/2019	<0.0056	U		0.0015	J		<0.0052	U		<0.0052	U		0.0036	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-51-30-050119	5/1/2019	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-51-30-050119-DUP	5/1/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-51-30-072419	7/24/2019	<0.0063	U		0.0016	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.0013	J		<0.005	U	
		VMP-51-30-102519	10/25/2019	<0.0066	U		0.0019	J		<0.006	U		<0.006	U		0.0012	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-51-30-102519-DUP	10/25/2019	<0.0067	U		0.0018	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-51-30-012820	1/28/2020	<0.0072	U		0.0014	J		<0.0066	U		<0.0066	U		0.0019	J		<0.0034	U		0.00083	J		<0.0058	U	
		VMP-51-30-042720	4/27/2020	<0.0063	U		0.0031	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-51-30-072320	7/23/2020	<0.0065	U		0.0019	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-51-30-103020	10/30/2020	<0.0072	U		0.0022	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		0.0007	J		<0.0059	U	
		VMP-51-30-012221	1/22/2021	<0.0071	U		0.0022	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	**0.0053**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0018**	J	
		VMP-52-5-042915	4/29/2015	**0.0078**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-52-5-072715	7/27/2015	**0.024**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0076**	J	
		VMP-52-5-102915	10/29/2015	**0.03**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0059**	J	
		VMP-52-5-012516	1/25/2016	**0.014**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.0038	J		**0.0035**	J	
		VMP-52-5-042516	4/25/2016	**0.056**			**0.0014**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0023	J		**0.011**	J	
		VMP-52-5-072716	7/27/2016	**0.014**	J		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-52-5-102716	10/27/2016	**0.022**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0067**	J	
		VMP-52-5-012517	1/25/2017	**0.049**			<0.004	J	U	<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		0.011	J		<0.015	U	
		VMP-52-5-042417	4/24/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-5-072117	7/21/2017	**0.02**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0062**	J	
		VMP-52-5-102517	10/25/2017	**0.0055**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-52-5-012418	1/24/2018	<0.026	J	U	**0.00038**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-52-5-042618	4/26/2018	**0.011**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-5-072018	7/20/2018	**0.026**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0043**	J	
		VMP-52-5-102318	10/23/2018	**0.0068**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-52-5-013119	1/31/2019	**0.021**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0023**	J	
		VMP-52-5-050219	5/2/2019	**0.57**	J		<0.078	U		<0.16	U		<0.25	U		<0.96	U		<0.054	U		<0.23	U		<0.29	U	
		VMP-52-5-072619	7/26/2019	**0.0096**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-5-072619-DUP	7/26/2019	**0.02**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-5-102219	10/22/2019	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-5-012320	1/23/2020	<0.035	U		<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-52-5-042720	4/27/2020	**0.0099**	J		**0.0009**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-5-072320	7/23/2020	**0.04**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0026	J		**0.0044**	J	
		VMP-52-5-072320-DUP	7/23/2020	**0.01**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-52-5-102920	10/29/2020	<0.031	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-5-012221	1/22/2021	**0.0082**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-5-012221-DUP	1/22/2021	**0.0081**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
	10 ft	VMP-52-10-020415	2/4/2015	**0.0045**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-52-10-042915	4/29/2015	<0.039	U		<0.0052	U		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		<0.016	U		<0.019	U	
		VMP-52-10-072715	7/27/2015	**0.014**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.002**	J	
		VMP-52-10-102915	10/29/2015	**0.024**	J		<0.0048	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		**0.0059**	J	
		VMP-52-10-012516	1/25/2016	**0.014**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-10-042516	4/25/2016	**0.02**	J		<0.005	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0046**	J	
		VMP-52-10-072716	7/27/2016	**0.046**			<0.005	U		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		**0.0084**	J	
		VMP-52-10-102716	10/27/2016	**0.0078**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-52-10-012517	1/25/2017	<0.03	J	U	<0.004	J	U	<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-10-042417	4/24/2017	<0.029	J	U	<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-10-072117	7/21/2017	**0.016**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0053**	J	
		VMP-52-10-102517	10/25/2017	**0.014**	J		**0.0014**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0036**	J	
		VMP-52-10-012418	1/24/2018	**0.0099**	J		**0.00048**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-10-042618	4/26/2018	**0.013**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-10-072018	7/20/2018	**0.018**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-10-102318	10/23/2018	**0.0029**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-52-10-013119	1/31/2019	**0.0078**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-52-10-072619	7/26/2019	**0.03**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0037**	J	
		VMP-52-10-102219	10/22/2019	**0.011**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-10-042720	4/27/2020	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-10-102920	10/29/2020	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-10-012221	1/22/2021	**0.0095**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-52-5-042915	4/29/2015	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-52-5-072715	7/27/2015	<0.018	J	U	<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		**0.0013**	J		<0.03	U		<0.0076	U	
		VMP-52-5-102915	10/29/2015	**0.029**			<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.0014**	J		<0.029	U		<0.0072	U	
		VMP-52-5-012516	1/25/2016	<0.016	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-52-5-042516	4/25/2016	**0.0053**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-52-5-072716	7/27/2016	<0.018	J	U	<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		**0.0018**	J		<0.03	U		<0.0076	U	
		VMP-52-5-102716	10/27/2016	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-52-5-012517	1/25/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-52-5-042417	4/24/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-52-5-072117	7/21/2017	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-52-5-102517	10/25/2017	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-52-5-012418	1/24/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-52-5-042618	4/26/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-52-5-072018	7/20/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-52-5-102318	10/23/2018	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-52-5-013119	1/31/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-52-5-050219	5/2/2019	<0.31	U		<0.15	U		<0.11	U		<0.21	U		<0.26	U		<0.12	U		<0.51	U		<0.13	U	
		VMP-52-5-072619	7/26/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-52-5-102219	10/22/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-52-5-012320	1/23/2020	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-52-5-042720	4/27/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-52-5-072320	7/23/2020	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.00089**	J		<0.024	U		<0.006	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.00094**	J		<0.026	U		<0.0064	U	
		VMP-52-5-102920	10/29/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-52-5-012221	1/22/2021	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
	10 ft	VMP-52-10-020415	2/4/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-52-10-042915	4/29/2015	<0.02	U		<0.01	U		<0.0076	U		<0.014	U		<0.017	U		<0.008	U		<0.034	U		<0.0085	U	
		VMP-52-10-072715	7/27/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0017**	J		<0.028	U		<0.007	U	
		VMP-52-10-102915	10/29/2015	**0.0051**	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.00099**	J		<0.031	U		<0.0077	U	
		VMP-52-10-012516	1/25/2016	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-52-10-042516	4/25/2016	**0.00088**	J		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-52-10-072716	7/27/2016	**0.016**	J		<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		**0.0013**	J		**0.0042**	J		<0.0081	U	
		VMP-52-10-102716	10/27/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-52-10-012517	1/25/2017	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-52-10-042417	4/24/2017	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-52-10-072117	7/21/2017	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-52-10-102517	10/25/2017	**0.0022**	J		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-52-10-012418	1/24/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0021**	J		<0.024	U		<0.006	U	
		VMP-52-10-042618	4/26/2018	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.002**	J		<0.027	U		<0.0067	U	
		VMP-52-10-072018	7/20/2018	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0014**	J		<0.025	U		<0.0062	U	
		VMP-52-10-102318	10/23/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-52-10-013119	1/31/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-52-10-072619	7/26/2019	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-52-10-102219	10/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-52-10-042720	4/27/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-52-10-102920	10/29/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-52-10-012221	1/22/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-52-5-042915	4/29/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0037**	J		<0.0059	U		<0.0059	U	
		VMP-52-5-072715	7/27/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0024**	J		<0.006	U		<0.0059	U	
		VMP-52-5-102915	10/29/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-52-5-012516	1/25/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0043**	J		<0.0054	U		<0.0054	U	
		VMP-52-5-042516	4/25/2016	**0.019**			<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-52-5-072716	7/27/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0028**	J		<0.006	U		<0.0059	U	
		VMP-52-5-102716	10/27/2016	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-52-5-012517	1/25/2017	**0.00075**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-52-5-042417	4/24/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-52-5-072117	7/21/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-52-5-102517	10/25/2017	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-52-5-012418	1/24/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0035**	J		<0.0044	U		<0.0044	U	
		VMP-52-5-042618	4/26/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-52-5-072018	7/20/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-52-5-102318	10/23/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0019**	J		<0.0043	U		<0.0043	U	
		VMP-52-5-013119	1/31/2019	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-52-5-050219	5/2/2019	<0.085	U		<0.19	U		<0.15	U		<0.15	U		<0.15	U		<0.12	U		<0.1	U		<0.1	U	
		VMP-52-5-072619	7/26/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0063	U		<0.0052	U		<0.0052	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-52-5-102219	10/22/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0031**	J		<0.0052	U		<0.0052	U	
		VMP-52-5-012320	1/23/2020	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0037**	J		<0.0059	U		<0.0059	U	
		VMP-52-5-042720	4/27/2020	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-52-5-072320	7/23/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0019**	J		<0.0047	U		<0.0047	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-52-5-102920	10/29/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-52-5-012221	1/22/2021	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
	10 ft	VMP-52-10-020415	2/4/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0019**	J		<0.0053	U		<0.0053	U	
		VMP-52-10-042915	4/29/2015	<0.0057	U		<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		<0.0081	U		<0.0066	U		<0.0066	U	
		VMP-52-10-072715	7/27/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-52-10-102915	10/29/2015	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0022**	J		<0.006	U		<0.006	U	
		VMP-52-10-012516	1/25/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0034**	J		<0.0051	U		<0.0051	U	
		VMP-52-10-042516	4/25/2016	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		<0.0077	U		<0.0063	U		<0.0063	U	
		VMP-52-10-072716	7/27/2016	<0.0054	U		<0.012	U		<0.0094	U		<0.0094	U		<0.0094	U		**0.0028**	J		<0.0063	U		<0.0063	U	
		VMP-52-10-102716	10/27/2016	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-52-10-012517	1/25/2017	**0.0015**	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-52-10-042417	4/24/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-52-10-072117	7/21/2017	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-52-10-102517	10/25/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.002**	J		<0.0045	U		<0.0045	U	
		VMP-52-10-012418	1/24/2018	**0.0012**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0034**	J		<0.0047	U		<0.0047	U	
		VMP-52-10-042618	4/26/2018	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0037**	J		<0.0052	U		<0.0052	U	
		VMP-52-10-072018	7/20/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		**0.0007**	J		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-52-10-102318	10/23/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-52-10-013119	1/31/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-52-10-072619	7/26/2019	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-52-10-102219	10/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-52-10-042720	4/27/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-52-10-102920	10/29/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-52-10-012221	1/22/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-5-042915	4/29/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-52-5-072715	7/27/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-52-5-102915	10/29/2015	<0.0055	U		<0.0055	U		<0.0055	U		**0.0053**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-52-5-012516	1/25/2016	<0.0053	U		<0.0053	U		<0.0053	U		**0.0022**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-52-5-042516	4/25/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.0073**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-5-072716	7/27/2016	<0.0058	U		<0.0058	U		<0.0058	U		**0.0019**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-52-5-102716	10/27/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-5-012517	1/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-52-5-042417	4/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-52-5-072117	7/21/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-52-5-102517	10/25/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-52-5-012418	1/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-52-5-042618	4/26/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-5-072018	7/20/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0046**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-52-5-102318	10/23/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-52-5-013119	1/31/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-52-5-050219	5/2/2019	<0.098	U		<0.098	U		<0.098	U		<0.85	U		<0.11	U		<0.11	U		<0.11	U		<0.35	U	
		VMP-52-5-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-5-102219	10/22/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-5-012320	1/23/2020	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-52-5-042720	4/27/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-52-5-072320	7/23/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		**0.012**	J	
		VMP-52-5-072320-DUP	7/23/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-5-102920	10/29/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-5-012221	1/22/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	ND,UJ	UJ
		VMP-52-5-012221-DUP	1/22/2021	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	ND,UJ	UJ
	10 ft	VMP-52-10-020415	2/4/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-52-10-042915	4/29/2015	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0076	U		<0.0075	U		<0.0075	U		<0.024	U	
		VMP-52-10-072715	7/27/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-52-10-102915	10/29/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.0034**	J		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-52-10-012516	1/25/2016	<0.005	U		<0.005	U		<0.005	U		**0.002**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-10-042516	4/25/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-52-10-072716	7/27/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	U		<0.0072	U		<0.0071	U		<0.0071	U		<0.022	U	
		VMP-52-10-102716	10/27/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-52-10-012517	1/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-52-10-042417	4/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-52-10-072117	7/21/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-10-102517	10/25/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0038**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-52-10-012418	1/24/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-52-10-042618	4/26/2018	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-10-072018	7/20/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0027**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-52-10-102318	10/23/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-52-10-013119	1/31/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-52-10-072619	7/26/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-10-102219	10/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-10-042720	4/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-52-10-102920	10/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-52-10-012221	1/22/2021	<0.0048	U		<0.0048	U		<0.0048	U		**0.0021**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-5-042915	4/29/2015	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	ND,UJ	UJ	<0.0052	U	
		VMP-52-5-072715	7/27/2015	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-52-5-102915	10/29/2015	0.025			<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-52-5-012516	1/25/2016	0.0059	J		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.0012**	J	
		VMP-52-5-042516	4/25/2016	0.025			**0.0023**	J		<0.0061	U		<0.0095	U		<0.0086	U		**0.0085**			<0.053	U		**0.0082**		
		VMP-52-5-072716	7/27/2016	<0.011	U		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-52-5-102716	10/27/2016	<0.0093	J	U	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-5-012517	1/25/2017	0.0085	J		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		**0.0057**			<0.053	U		**0.007**		
		VMP-52-5-042417	4/24/2017	0.009			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0013**	J	
		VMP-52-5-072117	7/21/2017	0.008	J		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-52-5-102517	10/25/2017	0.026			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-52-5-012418	1/24/2018	0.0032	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-52-5-042618	4/26/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-52-5-072018	7/20/2018	0.011			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0013**	J	
		VMP-52-5-102318	10/23/2018	<0.008	U		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-52-5-013119	1/31/2019	0.0042	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-52-5-050219	5/2/2019	<0.18	U		<0.11	U		<0.12	U		<0.19	U		<0.17	U		<0.1	U		<1	U		<0.087	U	
		VMP-52-5-072619	7/26/2019	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-5-102219	10/22/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-52-5-012320	1/23/2020	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.062	U		<0.0051	U	
		VMP-52-5-042720	4/27/2020	0.0058	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-52-5-072320	7/23/2020	0.0068	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.00087**	J		<0.05	U		**0.002**	J	
		VMP-52-5-072320-DUP	7/23/2020	0.0035	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-5-102920	10/29/2020	<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-52-5-012221	1/22/2021	0.066		J	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-5-012221-DUP	1/22/2021	0.0086	J	J	<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
	10 ft	VMP-52-10-020415	2/4/2015	<0.0099	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-52-10-042915	4/29/2015	<0.012	U		<0.0071	U		<0.0081	U		<0.013	U		<0.012	U		<0.0067	U		<0.07	ND,UJ	UJ	<0.0058	U	
		VMP-52-10-072715	7/27/2015	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-52-10-102915	10/29/2015	0.074			<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-52-10-012516	1/25/2016	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-10-042516	4/25/2016	<0.012	U		<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		<0.0064	U		<0.066	U		<0.0055	U	
		VMP-52-10-072716	7/27/2016	<0.012	U		**0.0029**	J		<0.0077	U		<0.012	U		<0.011	U		**0.002**	J		<0.067	U		<0.0055	U	
		VMP-52-10-102716	10/27/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-52-10-012517	1/25/2017	0.0097			**0.0011**	J		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0011**	J	
		VMP-52-10-042417	4/24/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0017**	J	
		VMP-52-10-072117	7/21/2017	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-10-102517	10/25/2017	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-52-10-012418	1/24/2018	0.006	J		**0.0013**	J		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-52-10-042618	4/26/2018	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		**0.007**	J		<0.0045	U	
		VMP-52-10-072018	7/20/2018	0.0058	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-52-10-102318	10/23/2018	0.0059	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-52-10-013119	1/31/2019	0.0081	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-52-10-072619	7/26/2019	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-10-102219	10/22/2019	0.032			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-10-042720	4/27/2020	0.0045	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-10-102920	10/29/2020	0.018		J	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-10-012221	1/22/2021	0.0077	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		21						300			2100			1700			0.05			87			810		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0019**	J		<0.0062	U	
		VMP-52-5-042915	4/29/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					<0.014	U		<0.0072	U	
		VMP-52-5-072715	7/27/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					<0.014	U		<0.0072	U	
		VMP-52-5-102915	10/29/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.0037**	J		<0.0068	U	
		VMP-52-5-012516	1/25/2016	<0.022	U		0.0017	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.0045**	J		<0.0065	U	
		VMP-52-5-042516	4/25/2016	<0.02	U		0.15			<0.0061	U		<0.005	U		<0.0044	U					**0.25**			<0.0061	U	
		VMP-52-5-072716	7/27/2016	**0.0013**	J		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.003**	J		<0.0072	U	
		VMP-52-5-102716	10/27/2016	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.0065**	J		<0.006	U	
		VMP-52-5-012517	1/25/2017	<0.02	U		0.0052	J		<0.0061	U		<0.0051	U		<0.018	U					**0.01**	J		<0.0061	U	
		VMP-52-5-042417	4/24/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.004**	J		<0.0059	U	
		VMP-52-5-072117	7/21/2017	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.012**			<0.0062	U	
		VMP-52-5-102517	10/25/2017	<0.018	U		0.0022	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-52-5-012418	1/24/2018	<0.018	U		0.0025	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0031**	J		<0.0054	U	
		VMP-52-5-042618	4/26/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-52-5-072018	7/20/2018	<0.02	U		0.012	J		<0.0059	U		<0.0049	U		<0.017	U					**0.022**			<0.0059	U	
		VMP-52-5-102318	10/23/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-52-5-013119	1/31/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					**0.0033**	J		<0.0057	U	
		VMP-52-5-050219	5/2/2019	<0.4	U		<0.29	U		<0.12	U		<0.1	U		<0.35	U					**22**			<0.12	U	
		VMP-52-5-072619	7/26/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-52-5-102219	10/22/2019	<0.021	U		<0.015	U		**0.0015**	J		<0.0053	U		<0.019	U					<0.013	U		**0.0045**	J	
		VMP-52-5-012320	1/23/2020	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.014**	J		<0.0072	U	
		VMP-52-5-042720	4/27/2020	<0.019	U		0.0038	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0025**	J		<0.0057	U	
		VMP-52-5-072320	7/23/2020	**0.001**	J		0.003	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0073**	J		<0.0058	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	J	U	<0.0061	U	
		VMP-52-5-102920	10/29/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.006**	J		<0.0063	U	
		VMP-52-5-012221	1/22/2021	<0.02	U		0.0036	J		<0.006	U		<0.005	U		<0.018	U					**0.0073**	J		<0.006	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.018	U		0.0026	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0065**	J		<0.0056	U	
	10 ft	VMP-52-10-020415	2/4/2015	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.0047	U					**0.0028**	J		<0.0064	U	
		VMP-52-10-042915	4/29/2015	<0.027	U		<0.019	U		<0.0081	U		<0.0067	U		<0.0059	U					<0.016	U		<0.0081	U	
		VMP-52-10-072715	7/27/2015	<0.022	U		0.0023	J		<0.0066	U		<0.0055	U		<0.0049	U					<0.013	U		<0.0066	U	
		VMP-52-10-102915	10/29/2015	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					**0.0085**	J		<0.0073	U	
		VMP-52-10-012516	1/25/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0021**	J		<0.0062	U	
		VMP-52-10-042516	4/25/2016	**0.0016**	J		<0.018	U		<0.0076	U		<0.0064	U		<0.0056	U					**0.012**	J		<0.0076	U	
		VMP-52-10-072716	7/27/2016	**0.0013**	J		<0.018	U		<0.0077	U		<0.0064	U		<0.022	U					**0.02**			<0.0077	U	
		VMP-52-10-102716	10/27/2016	<0.022	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U		<0.014	U		<0.014	U		<0.0068	U	
		VMP-52-10-012517	1/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0074**	J		<0.0062	U	
		VMP-52-10-042417	4/24/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.018**			<0.006	U	
		VMP-52-10-072117	7/21/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.013**			<0.0062	U	
		VMP-52-10-102517	10/25/2017	<0.018	U		0.0035	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-52-10-012418	1/24/2018	<0.019	U		0.0085	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0047**	J		<0.0058	U	
		VMP-52-10-042618	4/26/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-52-10-072018	7/20/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		**0.0012**	J	
		VMP-52-10-102318	10/23/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-52-10-013119	1/31/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0035**	J		<0.0055	U	
		VMP-52-10-072619	7/26/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-52-10-102219	10/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-52-10-042720	4/27/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0042**	J		<0.0059	U	
		VMP-52-10-102920	10/29/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.016**			<0.0059	U	
		VMP-52-10-012221	1/22/2021	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0098**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-5-042915	4/29/2015	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-52-5-072715	7/27/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		**0.0021**	J		<0.008	U	
		VMP-52-5-102915	10/29/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-52-5-012516	1/25/2016	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-52-5-042516	4/25/2016	**0.0019**	J		<0.0085	U		**0.0037**	J		<0.0036	U		**0.1**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-52-5-072716	7/27/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-52-5-102716	10/27/2016	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-52-5-012517	1/25/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	
		VMP-52-5-042417	4/24/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-52-5-072117	7/21/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-52-5-102517	10/25/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.00095**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-52-5-012418	1/24/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0015**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-52-5-042618	4/26/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-5-072018	7/20/2018	<0.0051	U		<0.0082	U		**0.0014**	J		<0.0035	U		**0.037**			<0.036	U		<0.0065	U		<0.0065	U	
		VMP-52-5-102318	10/23/2018	<0.0045	U		<0.0072	U		<0.0072	U		<0.0031	U		**0.00055**	J		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-52-5-013119	1/31/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-52-5-050219	5/2/2019	<0.1	U		<0.17	U		<0.17	U		<0.072	U		<0.093	U		<0.73	U		<0.13	U		<0.13	U	
		VMP-52-5-072619	7/26/2019	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-52-5-102219	10/22/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-5-012320	1/23/2020	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	U		<0.008	U		<0.008	U	
		VMP-52-5-042720	4/27/2020	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-52-5-072320	7/23/2020	<0.008	U		<0.008	U		**0.0034**	J		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0084	U		<0.0085	U		**0.0014**	J		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-52-5-102920	10/29/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-5-012221	1/22/2021	<0.0052	U		<0.0084	ND,UJ	UJ	<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0048	U		<0.0078	ND,UJ	UJ	<0.0077	U		<0.0033	U		**0.00056**	J		<0.034	U		<0.0062	U		<0.0062	U	
	10 ft	VMP-52-10-020415	2/4/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-52-10-042915	4/29/2015	<0.007	U		<0.011	U		<0.011	U		<0.0048	U		<0.0062	U		<0.049	U		<0.009	U		<0.009	U	
		VMP-52-10-072715	7/27/2015	<0.0058	U		<0.0093	U		**0.0021**	J		<0.004	U		<0.0051	U		<0.04	U		**0.00096**	J		<0.0074	U	
		VMP-52-10-102915	10/29/2015	<0.0064	U		<0.01	U		**0.0032**	J		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-52-10-012516	1/25/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-10-042516	4/25/2016	<0.0066	U		<0.011	U		<0.01	U		<0.0046	U		**0.00056**	J		<0.046	U		<0.0085	U		<0.0085	U	
		VMP-52-10-072716	7/27/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		**0.0082**			<0.046	U		<0.0085	U		<0.0085	U	
		VMP-52-10-102716	10/27/2016	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-52-10-012517	1/25/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	J	U	<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-10-042417	4/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-10-072117	7/21/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-10-102517	10/25/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		**0.001**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-52-10-012418	1/24/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0041**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-52-10-042618	4/26/2018	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-10-072018	7/20/2018	<0.0051	U		<0.0082	U		**0.0034**	J		<0.0035	U		**0.0013**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-52-10-102318	10/23/2018	<0.0049	U		<0.0079	U		**0.0015**	J		<0.0034	U		**0.0015**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-52-10-013119	1/31/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-52-10-072619	7/26/2019	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-10-102219	10/22/2019	<0.0053	U		<0.0085	U		**0.0014**	J		<0.0036	U		**0.00071**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-52-10-042720	4/27/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-10-102920	10/29/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00055**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-10-012221	1/22/2021	<0.0051	U		<0.0083	ND,UJ	UJ	<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-52-5-020415	2/4/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-5-042915	4/29/2015	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0064	U		<0.0064	U	
		VMP-52-5-072715	7/27/2015	<0.0079	U		0.0024	J		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		0.0013	J		<0.0064	U	
		VMP-52-5-102915	10/29/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-52-5-012516	1/25/2016	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		0.0017	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-52-5-042516	4/25/2016	<0.0066	U		0.0016	J		<0.0061	U		<0.0061	U		0.0012	J		<0.0032	U		0.0053	J		**0.0028**	J	
		VMP-52-5-072716	7/27/2016	<0.0079	U		0.0023	J		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-52-5-102716	10/27/2016	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-52-5-012517	1/25/2017	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		0.0056	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-5-042417	4/24/2017	<0.0064	U		0.0016	J		<0.0059	U		<0.0059	U		0.0024	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-5-072117	7/21/2017	<0.0067	U		0.0018	J		**0.00088**	J		<0.0062	U		<0.0059	U		<0.0032	U		0.0061			<0.0054	U	
		VMP-52-5-102517	10/25/2017	<0.006	U		0.001	J		<0.0055	U		<0.0055	U		0.0022	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-52-5-012418	1/24/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-52-5-042618	4/26/2018	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-52-5-072018	7/20/2018	<0.0064	U		0.0022	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-5-102318	10/23/2018	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-52-5-013119	1/31/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-52-5-050219	5/2/2019	<0.13	U		<0.14	U		<0.12	U		<0.12	U		<0.11	U		<0.063	U		<0.11	U		<0.11	U	
		VMP-52-5-072619	7/26/2019	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-5-072619-DUP	7/26/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-5-102219	10/22/2019	<0.0069	U		0.0019	J		<0.0063	U		<0.0063	U		0.011			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-52-5-012320	1/23/2020	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-52-5-042720	4/27/2020	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-52-5-072320	7/23/2020	<0.0063	U		0.0011	J		<0.0058	U		<0.0058	U		0.001	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-52-5-072320-DUP	7/23/2020	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-5-102920	10/29/2020	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-52-5-012221	1/22/2021	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0043	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-52-5-012221-DUP	1/22/2021	<0.0061	U		<0.0063	U		**0.0011**	J		<0.0056	U		0.0033	J		<0.0029	U		0.00053	J		<0.0049	U	
	10 ft	VMP-52-10-020415	2/4/2015	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-52-10-042915	4/29/2015	<0.0088	U		<0.0092	U		<0.0081	U		<0.0081	U		0.002	J		<0.0042	U		<0.0071	U		<0.0071	U	
		VMP-52-10-072715	7/27/2015	<0.0072	U		0.0021	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-52-10-102915	10/29/2015	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		0.0074		J	<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-52-10-012516	1/25/2016	<0.0068	U		0.0023	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-10-042516	4/25/2016	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		<0.0073	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-52-10-072716	7/27/2016	<0.0084	U		0.0025	J		<0.0077	U		<0.0077	U		0.0036	J		<0.004	U		0.0066	J		**0.0017**	J	
		VMP-52-10-102716	10/27/2016	<0.0074	U		0.0019	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-52-10-012517	1/25/2017	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0024	J		<0.0055	U	
		VMP-52-10-042417	4/24/2017	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-52-10-072117	7/21/2017	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		0.0039	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-10-102517	10/25/2017	<0.006	U		0.00098	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-52-10-012418	1/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		0.0039	J		<0.0051	U	
		VMP-52-10-042618	4/26/2018	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-52-10-072018	7/20/2018	<0.0064	U		0.0021	J		**0.0017**	J		<0.0059	U		0.017			<0.003	U		0.0012	J		<0.0052	U	
		VMP-52-10-102318	10/23/2018	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-52-10-013119	1/31/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-52-10-072619	7/26/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-10-102219	10/22/2019	<0.0066	U		0.002	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0021	J		<0.0054	U	
		VMP-52-10-042720	4/27/2020	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-10-102920	10/29/2020	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-10-012221	1/22/2021	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	**0.004**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-52-20-042915	4/29/2015	**0.0064**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-52-20-072715	7/27/2015	**0.02**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		**0.0048**	J	
		VMP-52-20-102915	10/29/2015	**0.023**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0056**	J	
		VMP-52-20-012516	1/25/2016	**0.01**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-52-20-042516	4/25/2016	**0.018**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0044**	J	
		VMP-52-20-072716	7/27/2016	**0.0066**	J		**0.0013**	J		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		<0.016	U		<0.019	U	
		VMP-52-20-102716	10/27/2016	**0.0095**	J		**0.0009**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0067	J		<0.015	U	
		VMP-52-20-012517	1/25/2017	**0.069**			**0.00098**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.004**	J	
		VMP-52-20-042417	4/24/2017	**0.022**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-52-20-072117	7/21/2017	**0.014**	J		<0.004	U		**0.0015**	J		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-20-102517	10/25/2017	<0.026	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-52-20-012418	1/24/2018	<0.026	J	U	**0.00042**	J		**0.0016**	J		<0.012	U		<0.043	U		<0.0025	U		0.0034	J		<0.013	U	
		VMP-52-20-012418-DUP	1/24/2018	**0.0082**	J		**0.00049**	J		**0.0024**	J		<0.011	U		<0.042	U		<0.0024	U		0.0034	J		<0.013	U	
		VMP-52-20-042618	4/26/2018	**0.011**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-20-072018	7/20/2018	**0.027**	J		**0.00076**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0061**	J	
		VMP-52-20-102318	10/23/2018	**0.11**			**0.0011**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-52-20-013119	1/31/2019	**0.01**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0019**	J	
		VMP-52-20-013119-DUP	1/31/2019	**0.01**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		0.0089	J		<0.012	U	
		VMP-52-20-050219	5/2/2019	**0.0081**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-20-072219	7/22/2019	**0.022**	J		**0.0013**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-20-102219	10/22/2019	**0.011**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-20-012320	1/23/2020	**0.0089**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-20-042720	4/27/2020	**0.0064**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-52-20-072320	7/23/2020	**0.011**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0022**	J	
		VMP-52-20-102920	10/29/2020	**0.01**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-20-012221	1/22/2021	<0.028	U		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0067**			<0.028	U		<0.007	U	
		VMP-52-20-042915	4/29/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.012**			<0.028	U		<0.0071	U	
		VMP-52-20-072715	7/27/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0057**	J		<0.029	U		<0.0073	U	
		VMP-52-20-102915	10/29/2015	**0.0045**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0087**			<0.027	U		<0.0068	U	
		VMP-52-20-012516	1/25/2016	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		**0.012**			<0.028	U		<0.0071	U	
		VMP-52-20-042516	4/25/2016	**0.00092**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.024**			<0.03	U		<0.0077	U	
		VMP-52-20-072716	7/27/2016	<0.02	J	U	<0.01	U		<0.0076	U		<0.014	U		<0.017	U		**0.045**			<0.034	U		<0.0085	U	
		VMP-52-20-102716	10/27/2016	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.031**			<0.026	U		<0.0066	U	
		VMP-52-20-012517	1/25/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0015**	J		<0.025	U		<0.0062	U	
		VMP-52-20-042417	4/24/2017	<0.016	U		**0.0071**	J		<0.006	U		<0.011	U		<0.014	U		**0.0016**	J		<0.027	U		<0.0068	U	
		VMP-52-20-072117	7/21/2017	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.01**			<0.026	U		<0.0064	U	
		VMP-52-20-102517	10/25/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.0049**	J		<0.023	U		<0.0058	U	
		VMP-52-20-012418	1/24/2018	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.011**			<0.023	U		<0.0058	U	
		VMP-52-20-012418-DUP	1/24/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.011**			<0.022	U		<0.0056	U	
		VMP-52-20-042618	4/26/2018	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0065**			<0.026	U		<0.0064	U	
		VMP-52-20-072018	7/20/2018	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0087**			<0.025	U		<0.0063	U	
		VMP-52-20-102318	10/23/2018	**0.0018**	J		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0093**			**0.004**	J		<0.0057	U	
		VMP-52-20-013119	1/31/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0038**	J		<0.022	U		<0.0055	U	
		VMP-52-20-013119-DUP	1/31/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		**0.0018**	J		<0.022	U		<0.0055	U	
		VMP-52-20-050219	5/2/2019	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-52-20-072219	7/22/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-52-20-102219	10/22/2019	**0.0081**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0018**	J		<0.026	U		<0.0064	U	
		VMP-52-20-012320	1/23/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-52-20-042720	4/27/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-52-20-072320	7/23/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.0021**	J		<0.028	U		<0.007	U	
		VMP-52-20-102920	10/29/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0024**	J		<0.024	U		<0.0062	U	
		VMP-52-20-012221	1/22/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0013**	J		<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-52-20-042915	4/29/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0026**	J		<0.0055	U		<0.0055	U	
		VMP-52-20-072715	7/27/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0023**	J		<0.0057	U		<0.0057	U	
		VMP-52-20-102915	10/29/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-52-20-012516	1/25/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0038**	J		<0.0056	U		<0.0056	U	
		VMP-52-20-042516	4/25/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0022**	J		<0.006	U		<0.006	U	
		VMP-52-20-072716	7/27/2016	<0.0056	U		<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		**0.0026**	J		<0.0066	U		<0.0066	U	
		VMP-52-20-102716	10/27/2016	**0.0016**	J		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-52-20-012517	1/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-52-20-042417	4/24/2017	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-52-20-072117	7/21/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-52-20-102517	10/25/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0021**	J		<0.0045	U		<0.0045	U	
		VMP-52-20-012418	1/24/2018	**0.0011**	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.004**	J		<0.0045	U		<0.0045	U	
		VMP-52-20-012418-DUP	1/24/2018	**0.0011**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0034**	J		<0.0044	U		<0.0044	U	
		VMP-52-20-042618	4/26/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-52-20-072018	7/20/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0019**	J		<0.0049	U		<0.0049	U	
		VMP-52-20-102318	10/23/2018	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-52-20-013119	1/31/2019	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-52-20-013119-DUP	1/31/2019	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0023**	J		<0.0043	U		<0.0043	U	
		VMP-52-20-050219	5/2/2019	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0063	U		<0.0052	U		<0.0052	U	
		VMP-52-20-072219	7/22/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-52-20-102219	10/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-52-20-012320	1/23/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-52-20-042720	4/27/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-52-20-072320	7/23/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-52-20-102920	10/29/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-52-20-012221	1/22/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0023**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-52-20-042915	4/29/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-52-20-072715	7/27/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.0049**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-52-20-102915	10/29/2015	<0.0052	U		<0.0052	U		<0.0052	U		**0.0037**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-52-20-012516	1/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-52-20-042516	4/25/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-52-20-072716	7/27/2016	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0076	U		<0.0074	U		<0.0074	U		<0.024	U	
		VMP-52-20-102716	10/27/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-20-012517	1/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-52-20-042417	4/24/2017	**0.0079**			<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-52-20-072117	7/21/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-20-102517	10/25/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-52-20-012418	1/24/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-52-20-012418-DUP	1/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-52-20-042618	4/26/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-20-072018	7/20/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.003**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-52-20-102318	10/23/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-52-20-013119	1/31/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-52-20-013119-DUP	1/31/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-52-20-050219	5/2/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-20-072219	7/22/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-20-102219	10/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-20-012320	1/23/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-52-20-042720	4/27/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		**0.0052**	J	
		VMP-52-20-072320	7/23/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-52-20-102920	10/29/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-52-20-012221	1/22/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	0.0093	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-52-20-042915	4/29/2015	0.026			<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	ND,UJ	UJ	<0.0048	U	
		VMP-52-20-072715	7/27/2015	<0.011	J	U	<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-52-20-102915	10/29/2015	0.01			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-52-20-012516	1/25/2016	0.0038	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0013**	J	
		VMP-52-20-042516	4/25/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.001**	J	
		VMP-52-20-072716	7/27/2016	<0.012	U		<0.0071	U		<0.0081	J	U	<0.012	U		<0.011	U		<0.0067	U		<0.07	U		<0.0058	U	
		VMP-52-20-102716	10/27/2016	<0.0096	J	U	<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-20-012517	1/25/2017	0.0093			**0.00085**	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-52-20-042417	4/24/2017	0.01			<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-52-20-072117	7/21/2017	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-20-102517	10/25/2017	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-52-20-012418	1/24/2018	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-52-20-012418-DUP	1/24/2018	<0.0082	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-52-20-042618	4/26/2018	0.015			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-20-072018	7/20/2018	0.0058	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-20-102318	10/23/2018	0.011			**0.002**	J		0.0014	J	J	<0.0085	U		<0.0077	U		**0.0044**	J		<0.047	U		**0.0092**		
		VMP-52-20-013119	1/31/2019	0.0059	J		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-52-20-013119-DUP	1/31/2019	0.014			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-52-20-050219	5/2/2019	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-20-072219	7/22/2019	<0.0097	ND,UJ	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-52-20-102219	10/22/2019	0.0044	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-20-012320	1/23/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-20-042720	4/27/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-52-20-072320	7/23/2020	0.0032	J		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-52-20-102920	10/29/2020	<0.009	U	UJ	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-52-20-012221	1/22/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	<0.022	U		0.0024	J		<0.0066	U		<0.0055	U		<0.0049	U					**0.0045**	J		<0.0066	U	
		VMP-52-20-042915	4/29/2015	<0.022	U		0.0032	J		<0.0067	U		<0.0056	U		<0.0049	U					<0.013	U		<0.0067	U	
		VMP-52-20-072715	7/27/2015	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					<0.014	U		<0.007	U	
		VMP-52-20-102915	10/29/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0089**	J		<0.0065	U	
		VMP-52-20-012516	1/25/2016	<0.023	U		0.0028	J		<0.0068	U		<0.0056	U		<0.005	U					**0.003**	J		**0.0014**	J	
		VMP-52-20-042516	4/25/2016	**0.00099**	J		0.0025	J		<0.0073	U		<0.0061	U		<0.0053	U					**0.0034**	J		<0.0073	U	
		VMP-52-20-072716	7/27/2016	<0.027	U		<0.019	U		<0.0081	U		<0.0067	U		<0.024	U					**0.0048**	J		<0.0081	U	
		VMP-52-20-102716	10/27/2016	<0.021	U		0.0096	J		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		<0.012	U		<0.0062	U	
		VMP-52-20-012517	1/25/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0088**	J		<0.0059	U	
		VMP-52-20-042417	4/24/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0029**	J		<0.0064	U	
		VMP-52-20-072117	7/21/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-52-20-102517	10/25/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-52-20-012418	1/24/2018	<0.018	U		0.003	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-52-20-012418-DUP	1/24/2018	<0.018	U		0.003	J		<0.0053	U		<0.0044	U		<0.016	U					**0.0046**	J		<0.0053	U	
		VMP-52-20-042618	4/26/2018	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-52-20-072018	7/20/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-52-20-102318	10/23/2018	<0.018	U		0.016			<0.0054	U		<0.0045	U		<0.016	U					**0.0073**	J		**0.0018**	J	
		VMP-52-20-013119	1/31/2019	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0016**	J		<0.0053	U	
		VMP-52-20-013119-DUP	1/31/2019	<0.017	U		0.0041	J		<0.0052	U		<0.0043	U		<0.015	U					**0.002**	J		<0.0052	U	
		VMP-52-20-050219	5/2/2019	<0.021	U		0.0045	J		<0.0063	U		<0.0052	U		<0.018	U					**0.01**	J		<0.0063	U	
		VMP-52-20-072219	7/22/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.023**			<0.0063	U	
		VMP-52-20-102219	10/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		**0.00058**	J	
		VMP-52-20-012320	1/23/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.046**			<0.006	U	
		VMP-52-20-042720	4/27/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.0053**	J		<0.0064	U	
		VMP-52-20-072320	7/23/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	J	U	<0.0066	U	
		VMP-52-20-102920	10/29/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.006**	J		<0.0058	U	
		VMP-52-20-012221	1/22/2021	<0.02	U		0.013	J		<0.0059	U		<0.0049	U		<0.017	U					**0.022**			<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-52-20-042915	4/29/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-52-20-072715	7/27/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-52-20-102915	10/29/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-52-20-012516	1/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-52-20-042516	4/25/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-52-20-072716	7/27/2016	<0.007	U		<0.011	U		<0.011	U		<0.0048	U		**0.00055**	J		<0.049	U		<0.0089	U		<0.0089	U	
		VMP-52-20-102716	10/27/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0044**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-20-012517	1/25/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00094**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-52-20-042417	4/24/2017	<0.0056	U		<0.009	U		**0.003**	J		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-52-20-072117	7/21/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-52-20-102517	10/25/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-52-20-012418	1/24/2018	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-52-20-012418-DUP	1/24/2018	<0.0046	U		<0.0074	U		<0.0074	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-52-20-042618	4/26/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-52-20-072018	7/20/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0026**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-20-102318	10/23/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0092**			<0.033	U		<0.006	U		<0.006	U	
		VMP-52-20-013119	1/31/2019	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-52-20-013119-DUP	1/31/2019	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-52-20-050219	5/2/2019	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-20-072219	7/22/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.011**			<0.038	U		<0.007	U		<0.007	U	
		VMP-52-20-102219	10/22/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-52-20-012320	1/23/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-20-042720	4/27/2020	<0.0055	U		<0.0089	U		**0.012**			<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-52-20-072320	7/23/2020	<0.0092	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-52-20-102920	10/29/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00063**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-52-20-012221	1/22/2021	<0.0051	U		<0.0082	ND,UJ	UJ	<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-52	20 ft	VMP-52-20-020415	2/4/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.00049	J		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-52-20-042915	4/29/2015	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-52-20-072715	7/27/2015	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-52-20-102915	10/29/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.0014	J	J	<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-52-20-012516	1/25/2016	<0.0074	U		<0.0078	U		<0.0068	J	U	<0.0068	U		0.02			<0.0035	U		<0.006	U		<0.006	U	
		VMP-52-20-042516	4/25/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-52-20-072716	7/27/2016	<0.0088	U		<0.0092	U		<0.0081	U		<0.0081	U		0.014			<0.0042	U		<0.0071	U		<0.0071	U	
		VMP-52-20-102716	10/27/2016	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	J	U	<0.0032	U		0.0032	J		<0.0055	U	
		VMP-52-20-012517	1/25/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		0.0043	J		**0.0019**	J	
		VMP-52-20-042417	4/24/2017	**0.0023**	J		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-52-20-072117	7/21/2017	<0.0067	U		0.0019	J		<0.0061	U		<0.0061	U		0.0074			<0.0032	U		0.0023	J		<0.0054	U	
		VMP-52-20-102517	10/25/2017	<0.006	U		0.0011	J		<0.0055	U		<0.0055	U		0.0013	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-52-20-012418	1/24/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.0014	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-52-20-012418-DUP	1/24/2018	<0.0058	U		0.0014	J		<0.0053	U		<0.0053	U		0.0018	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-52-20-042618	4/26/2018	<0.0066	U		0.0016	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-20-072018	7/20/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.0015	J		<0.0031	U		0.00092	J		<0.0053	U	
		VMP-52-20-102318	10/23/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0099			<0.0028	U		0.0071			**0.0022**	J	
		VMP-52-20-013119	1/31/2019	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		0.0012	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-52-20-013119-DUP	1/31/2019	<0.0057	U		<0.006	U		<0.0052	U		**0.0035**	J		0.0022	J		<0.0027	U		0.00091	J		<0.0046	U	
		VMP-52-20-050219	5/2/2019	<0.0068	U		0.0011	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-20-072219	7/22/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.0054	J		<0.0033	U		0.0036	J		<0.0056	U	
		VMP-52-20-102219	10/22/2019	<0.0066	U		0.00096	J		<0.0061	U		<0.0061	U		0.003	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-20-012320	1/23/2020	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-52-20-042720	4/27/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-52-20-072320	7/23/2020	<0.0072	U		0.00092	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-52-20-102920	10/29/2020	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.00045	J		<0.0052	U	
		VMP-52-20-012221	1/22/2021	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	**0.0092**	J		**0.0013**	J		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.011	J		**0.0024**	J	
		VMP-52-30-020415-DUP	2/4/2015	**0.0059**	J		**0.0012**	J		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		0.014			<0.016	U	
		VMP-52-30-042915	4/29/2015	**0.0049**	J		**0.00088**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.009	J		<0.014	U	
		VMP-52-30-072715	7/27/2015	**0.012**	J		**0.002**	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.0095	J		**0.0026**	J	
		VMP-52-30-102915	10/29/2015	**0.022**	J		<0.004	J	U	<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.02			**0.005**	J	
		VMP-52-30-020216-R	2/2/2016	**0.026**	J		**0.001**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.014			**0.0079**	J	
		VMP-52-30-042516	4/25/2016	**0.011**	J		**0.0011**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-52-30-072716	7/27/2016	**0.008**	J		<0.0053	U		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		<0.016	U		<0.019	U	
		VMP-52-30-102716	10/27/2016	**0.019**	J		**0.0012**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0065**	J	
		VMP-52-30-012517	1/25/2017	**0.0084**	J		**0.00088**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-52-30-042417	4/24/2017	<0.029	J	U	**0.00084**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0032**	J	
		VMP-52-30-072117	7/21/2017	**0.018**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0041**	J	
		VMP-52-30-102517	10/25/2017	<0.028	J	U	<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-52-30-012418	1/24/2018	**0.009**	J		**0.00068**	J		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-52-30-042618	4/26/2018	**0.0087**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-52-30-072018	7/20/2018	**0.026**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-30-102318	10/23/2018	**0.014**	J		**0.0015**	J		<0.0069	U		<0.01	U		<0.04	U		<0.0023	U		<0.0097	U		<0.012	U	
		VMP-52-30-102318-DUP	10/23/2018	**0.0066**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-52-30-013119	1/31/2019	**0.012**	J		**0.00089**	J		<0.0069	U		<0.011	U		<0.04	U		<0.0023	U		0.0051	J		<0.012	U	
		VMP-52-30-050219	5/2/2019	**0.0074**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-52-30-072219	7/22/2019	**0.0093**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-30-102219	10/22/2019	**0.0079**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-30-102219-DUP	10/22/2019	**0.0083**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-30-012320	1/23/2020	**0.016**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-52-30-042720	4/27/2020	**0.025**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-52-30-042720-DUP	4/27/2020	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-52-30-072320	7/23/2020	**0.014**	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0024**	J	
		VMP-52-30-102920	10/29/2020	<0.029	J	U	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-52-30-012221	1/22/2021	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	**0.0039**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0055**	J		<0.029	U		<0.0073	U	
		VMP-52-30-020415-DUP	2/4/2015	**0.0036**	J		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.0055**	J		<0.027	U		<0.0069	U	
		VMP-52-30-042915	4/29/2015	**0.0026**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.015**			<0.025	U		<0.0063	U	
		VMP-52-30-072715	7/27/2015	**0.0035**	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0077**			<0.03	U		<0.0074	U	
		VMP-52-30-102915	10/29/2015	**0.0029**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0079**			<0.026	U		<0.0066	U	
		VMP-52-30-020216-R	2/2/2016	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.01**			<0.03	U		<0.0075	U	
		VMP-52-30-042516	4/25/2016	**0.018**			<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.021**			<0.027	U		<0.0068	U	
		VMP-52-30-072716	7/27/2016	<0.02	J	U	<0.01	U		<0.0076	U		<0.014	U		<0.017	U		**0.035**			<0.034	U		<0.0085	U	
		VMP-52-30-102716	10/27/2016	**0.0032**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.027**			<0.03	U		<0.0077	U	
		VMP-52-30-012517	1/25/2017	**0.0029**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0024**	J		<0.025	U		<0.0062	U	
		VMP-52-30-042417	4/24/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0029**	J		<0.025	U		<0.0063	U	
		VMP-52-30-072117	7/21/2017	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0081**			<0.026	U		<0.0066	U	
		VMP-52-30-102517	10/25/2017	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0055**	J		<0.024	U		<0.006	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0046**	J		<0.024	U		<0.0061	U	
		VMP-52-30-012418	1/24/2018	**0.002**	J		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		**0.008**			<0.021	U		<0.0054	U	
		VMP-52-30-042618	4/26/2018	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0066**			<0.028	U		<0.007	U	
		VMP-52-30-072018	7/20/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0067**			<0.025	U		<0.0064	U	
		VMP-52-30-102318	10/23/2018	**0.0023**	J		<0.0064	U		<0.0047	U		<0.0087	U		<0.011	U		**0.0057**			<0.021	U		<0.0053	U	
		VMP-52-30-102318-DUP	10/23/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.006**			<0.022	U		<0.0056	U	
		VMP-52-30-013119	1/31/2019	<0.013	U		<0.0065	U		<0.0047	U		<0.0088	U		<0.011	U		**0.0022**	J		<0.021	U		<0.0053	U	
		VMP-52-30-050219	5/2/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.00094**	J		<0.027	U		<0.0068	U	
		VMP-52-30-072219	7/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-52-30-102219	10/22/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0015**	J		<0.025	U		<0.0063	U	
		VMP-52-30-102219-DUP	10/22/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0013**	J		<0.026	U		<0.0065	U	
		VMP-52-30-012320	1/23/2020	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-52-30-042720	4/27/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0014**	J		<0.026	U		<0.0064	U	
		VMP-52-30-042720-DUP	4/27/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0012**	J		<0.026	U		<0.0065	U	
		VMP-52-30-072320	7/23/2020	<0.017	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		**0.0023**	J		<0.028	U		<0.0069	U	
		VMP-52-30-102920	10/29/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.003**	J		<0.025	U		<0.0063	U	
		VMP-52-30-012221	1/22/2021	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0025**	J		<0.024	U		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-52-30-020415-DUP	2/4/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-52-30-042915	4/29/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-52-30-072715	7/27/2015	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-52-30-102915	10/29/2015	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0024**	J		<0.0051	U		<0.0051	U	
		VMP-52-30-020216-R	2/2/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-52-30-042516	4/25/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0023**	J		<0.0053	U		<0.0053	U	
		VMP-52-30-072716	7/27/2016	<0.0057	U		<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		**0.002**	J		<0.0067	U		<0.0067	U	
		VMP-52-30-102716	10/27/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0024**	J		<0.006	U		<0.006	U	
		VMP-52-30-012517	1/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0033**	J		<0.0049	U		<0.0049	U	
		VMP-52-30-042417	4/24/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-52-30-072117	7/21/2017	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-52-30-102517	10/25/2017	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-52-30-012418	1/24/2018	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0045**	J		<0.0042	U		<0.0042	U	
		VMP-52-30-042618	4/26/2018	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-52-30-072018	7/20/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-52-30-102318	10/23/2018	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0027**	J		<0.0041	U		<0.0041	U	
		VMP-52-30-102318-DUP	10/23/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		<0.0053	U		<0.0044	U		<0.0044	U	
		VMP-52-30-013119	1/31/2019	<0.0035	U		<0.0079	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0024**	J		<0.0042	U		<0.0042	U	
		VMP-52-30-050219	5/2/2019	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-52-30-072219	7/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-52-30-102219	10/22/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-52-30-102219-DUP	10/22/2019	**0.0019**	J		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-52-30-012320	1/23/2020	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0056	U		<0.0056	U	
		VMP-52-30-042720	4/27/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-52-30-042720-DUP	4/27/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-52-30-072320	7/23/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-52-30-102920	10/29/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-52-30-012221	1/22/2021	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0047	U		<0.0047	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-52-30-020415-DUP	2/4/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-52-30-042915	4/29/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-52-30-072715	7/27/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0027**	J		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-52-30-102915	10/29/2015	<0.005	U		<0.005	U		<0.005	U		**0.0063**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-30-020216-R	2/2/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-52-30-042516	4/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		**0.0028**	J	
		VMP-52-30-072716	7/27/2016	<0.0065	U		<0.0065	U		<0.0065	U		<0.057	U		<0.0076	U		<0.0075	U		<0.0075	U		<0.024	U	
		VMP-52-30-102716	10/27/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-52-30-012517	1/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-52-30-042417	4/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-52-30-072117	7/21/2017	<0.0051	U		<0.0051	U		<0.0051	U		**0.0033**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-52-30-102517	10/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-52-30-012418	1/24/2018	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-52-30-042618	4/26/2018	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-52-30-072018	7/20/2018	<0.0049	U		<0.0049	U		<0.0049	U		**0.0051**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-30-102318	10/23/2018	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0047	U		<0.0046	U		<0.0046	U		<0.015	U	
		VMP-52-30-102318-DUP	10/23/2018	<0.0043	U		<0.0043	U		<0.0043	U		**0.0037**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-52-30-013119	1/31/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-52-30-050219	5/2/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-52-30-072219	7/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-30-102219	10/22/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-52-30-102219-DUP	10/22/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-52-30-012320	1/23/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-52-30-042720	4/27/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-52-30-042720-DUP	4/27/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-52-30-072320	7/23/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		**0.0016**	J	
		VMP-52-30-102920	10/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-52-30-012221	1/22/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	0.0078	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-52-30-020415-DUP	2/4/2015	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		**0.001**	J	
		VMP-52-30-042915	4/29/2015	0.0023	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	ND,UJ	UJ	<0.0043	U	
		VMP-52-30-072715	7/27/2015	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-52-30-102915	10/29/2015	0.0092	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-52-30-020216-R	2/2/2016	0.0046	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		**0.0032**	J		<0.062	U		**0.0024**	J	
		VMP-52-30-042516	4/25/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-52-30-072716	7/27/2016	<0.012	U		<0.0072	U		<0.0081	U		<0.013	U		<0.012	U		<0.0068	U		<0.07	U		<0.0058	U	
		VMP-52-30-102716	10/27/2016	<0.011	J	U	<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-52-30-012517	1/25/2017	0.0065	J		**0.0015**	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0011**	J	
		VMP-52-30-042417	4/24/2017	0.0096			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0015**	J	
		VMP-52-30-072117	7/21/2017	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-52-30-102517	10/25/2017	0.012			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-52-30-012418	1/24/2018	0.0048	J		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-52-30-042618	4/26/2018	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-52-30-072018	7/20/2018	0.0093			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		**0.0023**	J		<0.052	U		<0.0043	U	
		VMP-52-30-102318	10/23/2018	0.0096			<0.0044	U		<0.005	U		<0.0078	U		<0.0072	U		<0.0042	U		<0.044	U		**0.0014**	J	
		VMP-52-30-102318-DUP	10/23/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		**0.0013**	J	
		VMP-52-30-013119	1/31/2019	0.0099			<0.0045	U		<0.0051	U		<0.0079	U		<0.0072	U		<0.0042	U		<0.044	U		<0.0036	U	
		VMP-52-30-050219	5/2/2019	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-52-30-072219	7/22/2019	<0.0093	ND,UJ	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-30-102219	10/22/2019	0.019			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-30-102219-DUP	10/22/2019	0.018			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.0024**	J		<0.054	U		**0.0052**		
		VMP-52-30-012320	1/23/2020	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-52-30-042720	4/27/2020	0.0055	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-52-30-042720-DUP	4/27/2020	0.0066	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-52-30-072320	7/23/2020	0.0048	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-52-30-102920	10/29/2020	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-52-30-012221	1/22/2021	0.0062	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	<0.023	U		0.0048	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.011**	J		<0.0069	U	
		VMP-52-30-020415-DUP	2/4/2015	<0.022	U		0.0042	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.0088**	J		<0.0065	U	
		VMP-52-30-042915	4/29/2015	<0.02	U		0.0087	J		<0.0059	U		<0.005	U		<0.0044	U					<0.012	U		<0.0059	U	
		VMP-52-30-072715	7/27/2015	<0.023	U		0.0039	J		<0.007	U		<0.0058	U		<0.0052	U					<0.014	U		<0.007	U	
		VMP-52-30-102915	10/29/2015	<0.021	U		0.012	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.0063**	J		<0.0062	U	
		VMP-52-30-020216-R	2/2/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.018**			<0.0071	U	
		VMP-52-30-042516	4/25/2016	<0.022	U		0.0036	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.0059**	J		<0.0065	U	
		VMP-52-30-072716	7/27/2016	<0.027	U		<0.019	U		<0.0081	U		<0.0068	U		<0.024	U					<0.016	U		<0.0081	U	
		VMP-52-30-102716	10/27/2016	<0.024	U		0.0045	J		<0.0073	U		<0.0061	U		<0.021	U		<0.016	U		<0.014	U		<0.0073	U	
		VMP-52-30-012517	1/25/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.028**			<0.0059	U	
		VMP-52-30-042417	4/24/2017	<0.02	U		0.0032	J		<0.006	U		<0.005	U		<0.018	U					**0.0084**	J		<0.006	U	
		VMP-52-30-072117	7/21/2017	<0.021	U		0.0022	J		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-52-30-102517	10/25/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-52-30-012418	1/24/2018	<0.017	U		0.0037	J		<0.0051	U		<0.0043	U		<0.015	U					**0.0043**	J		<0.0051	U	
		VMP-52-30-042618	4/26/2018	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-52-30-072018	7/20/2018	<0.02	U		0.0046	J		<0.006	U		<0.005	U		<0.018	U					**0.0064**	J		<0.006	U	
		VMP-52-30-102318	10/23/2018	<0.017	U		0.0044	J		<0.005	U		<0.0042	U		<0.015	U					**0.0021**	J		<0.005	U	
		VMP-52-30-102318-DUP	10/23/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0012**	J		<0.0053	U	
		VMP-52-30-013119	1/31/2019	<0.017	U		0.0024	J		<0.0051	U		<0.0042	U		<0.015	U					**0.0016**	J		<0.0051	U	
		VMP-52-30-050219	5/2/2019	<0.022	U		0.006	J		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-52-30-072219	7/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0064**	J		<0.0061	U	
		VMP-52-30-102219	10/22/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-52-30-102219-DUP	10/22/2019	<0.021	U		0.0071	J		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-52-30-012320	1/23/2020	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-52-30-042720	4/27/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.004**	J		<0.0061	U	
		VMP-52-30-042720-DUP	4/27/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0062**	J		<0.0062	U	
		VMP-52-30-072320	7/23/2020	<0.022	U		0.0014	J		<0.0066	U		<0.0055	U		<0.019	U					<0.013	J	U	<0.0066	U	
		VMP-52-30-102920	10/29/2020	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.007**	J		<0.0059	U	
		VMP-52-30-012221	1/22/2021	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					**0.0061**	J		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-52-30-020415-DUP	2/4/2015	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-52-30-042915	4/29/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-30-072715	7/27/2015	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-52-30-102915	10/29/2015	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0014**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-52-30-020216-R	2/2/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.00072**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-52-30-042516	4/25/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00063**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-52-30-072716	7/27/2016	<0.007	U		<0.011	U		<0.011	U		<0.0049	U		<0.0062	U		<0.049	U		<0.009	U		<0.009	U	
		VMP-52-30-102716	10/27/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-52-30-012517	1/25/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.001**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-30-042417	4/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00063**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-30-072117	7/21/2017	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-52-30-102517	10/25/2017	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-52-30-012418	1/24/2018	<0.0044	U		<0.0071	U		<0.007	U		<0.0031	U		**0.0017**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-52-30-042618	4/26/2018	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-52-30-072018	7/20/2018	<0.0052	U		<0.0084	U		<0.0083	U		**0.0034**	J		**0.0031**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-52-30-102318	10/23/2018	<0.0044	U		<0.007	U		<0.007	U		<0.003	U		**0.00094**	J		<0.03	U		<0.0056	U		<0.0056	U	
		VMP-52-30-102318-DUP	10/23/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-52-30-013119	1/31/2019	<0.0044	U		<0.0071	U		<0.007	U		<0.003	U		<0.0039	U		<0.03	U		<0.0056	U		<0.0056	U	
		VMP-52-30-050219	5/2/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0007**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-52-30-072219	7/22/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0028**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-52-30-102219	10/22/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-30-102219-DUP	10/22/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-52-30-012320	1/23/2020	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-52-30-042720	4/27/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-52-30-042720-DUP	4/27/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-52-30-072320	7/23/2020	<0.0091	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-52-30-102920	10/29/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-52-30-012221	1/22/2021	<0.0049	U		<0.0079	ND,UJ	UJ	<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-52-30-020415	2/4/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.005	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-52-30-020415-DUP	2/4/2015	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		0.0047	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-52-30-042915	4/29/2015	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0032	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-30-072715	7/27/2015	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-52-30-102915	10/29/2015	<0.0068	U		0.0019	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0012	J		<0.0055	U	
		VMP-52-30-020216-R	2/2/2016	<0.0078	U		0.0015	J		<0.0071	U		<0.0071	U		0.0014	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-52-30-042516	4/25/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-52-30-072716	7/27/2016	<0.0089	U		<0.0093	U		<0.0081	U		<0.0081	U		<0.0077	U		<0.0042	U		<0.0072	U		<0.0072	U	
		VMP-52-30-102716	10/27/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0022	J		<0.0038	U		0.004	J		<0.0064	U	
		VMP-52-30-012517	1/25/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.0047	J		**0.0014**	J	
		VMP-52-30-042417	4/24/2017	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		0.001	J		<0.0031	U		0.0025	J		<0.0053	U	
		VMP-52-30-072117	7/21/2017	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0018	J		<0.0056	U	
		VMP-52-30-102517	10/25/2017	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-52-30-102517-DUP	10/25/2017	<0.0063	U		0.00095	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-52-30-012418	1/24/2018	<0.0056	U		<0.0058	U		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-52-30-042618	4/26/2018	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-52-30-072018	7/20/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.001	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-52-30-102318	10/23/2018	<0.0055	U		0.0018	J		<0.005	U		<0.005	U		<0.0048	U		<0.0026	U		<0.0044	U		<0.0044	U	
		VMP-52-30-102318-DUP	10/23/2018	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-52-30-013119	1/31/2019	<0.0055	U		<0.0058	U		<0.0051	U		<0.0051	U		<0.0048	U		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-52-30-050219	5/2/2019	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-52-30-072219	7/22/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0035	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-30-102219	10/22/2019	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-30-102219-DUP	10/22/2019	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		0.0039	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-30-012320	1/23/2020	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-52-30-042720	4/27/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-52-30-042720-DUP	4/27/2020	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-52-30-072320	7/23/2020	<0.0072	U		0.001	J		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-52-30-102920	10/29/2020	<0.0065	U		0.0017	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-52-30-012221	1/22/2021	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	**0.0055**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-5-050415	5/4/2015	**0.0096**	J		**0.0009**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0026**	J	
		VMP-53-5-072415	7/24/2015	**0.016**	J		<0.0049	U		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.0041**	J	
		VMP-53-5-102815	10/28/2015	**0.028**	J		**0.0021**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0051**	J	
		VMP-53-5-012816	1/28/2016	**0.019**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-5-042816	4/28/2016	**0.045**			**0.00084**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.011**	J	
		VMP-53-5-072916	7/29/2016	**0.02**	J		<0.005	U		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		**0.006**	J	
		VMP-53-5-102516	10/25/2016	**0.013**	J		<0.0044	J	U	<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	J	U
		VMP-53-5-120916	12/9/2016	**0.0066**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-5-012317	1/23/2017	**0.017**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-5-042017	4/20/2017	**0.014**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0026**	J	
		VMP-53-5-071917	7/19/2017	**0.016**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0044**	J	
		VMP-53-5-110117	11/1/2017	<0.025	J	U	<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-53-5-012218	1/22/2018	**0.0042**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-5-032918	3/29/2018	**0.0089**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-53-5-041018	4/10/2018	**0.0065**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-5-072518	7/25/2018	**0.06**			<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0043**	J	
		VMP-53-5-102318	10/23/2018	**0.0087**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-5-011819	1/18/2019	**0.01**	J		<0.0034	U		**0.00073**	J		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		**0.0024**	J	
		VMP-53-5-050319	5/3/2019	**0.029**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.004**	J	
		VMP-53-5-050319-DUP	5/3/2019	**0.029**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-5-071919	7/19/2019	**0.026**	J		**0.0069**			<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-5-101819	10/18/2019	**0.006**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-5-012220	1/22/2020	**0.0086**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-53-5-042220	4/22/2020	**0.01**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-5-072220	7/22/2020	**0.016**	J		**0.00067**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0028**	J	
		VMP-53-5-102820	10/28/2020	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-5-012121	1/21/2021	**0.0098**	J		**0.0011**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.021			**0.006**	J	
	10 ft	VMP-53-10-020415	2/4/2015	**0.0037**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-53-10-050415	5/4/2015	**0.0098**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0039**	J	
		VMP-53-10-072415	7/24/2015	**0.019**	J		**0.019**			<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.015			**0.0031**	J	
		VMP-53-10-102815	10/28/2015	**0.03**	J		**0.0012**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0096**	J	
		VMP-53-10-012816	1/28/2016	**0.014**	J		<0.005	U		<0.01	U		<0.016	U		<0.061	U		<0.0035	U		0.0072	J		**0.0059**	J	
		VMP-53-10-042816	4/28/2016	<0.034	J	U	**0.0021**	J		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-53-10-082616	8/26/2016	**0.029**	J		<0.004	U		<0.0084	J	U	<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0044**	J	
		VMP-53-10-102516	10/25/2016	**0.013**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0043	J		<0.016	J	U
		VMP-53-10-120916	12/9/2016	**0.0081**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.003**	J	
		VMP-53-10-012317	1/23/2017	**0.029**			<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-10-042017	4/20/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-10-071917	7/19/2017	**0.014**	J		<0.0039	U		**0.0041**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0026**	J	
		VMP-53-10-110117	11/1/2017	**0.0086**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-53-10-012218	1/22/2018	**0.0074**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-10-032918	3/29/2018	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-10-041018	4/10/2018	**0.0034**	J		**0.0014**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-53-10-072518	7/25/2018	**0.029**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-10-102318	10/23/2018	**0.0055**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-10-011819	1/18/2019	**0.0056**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-53-10-050319	5/3/2019	**0.1**			**0.037**			<0.028	U		<0.043	U		<0.16	U		<0.0092	U		<0.04	U		**0.022**	J	
		VMP-53-10-071919	7/19/2019	**0.013**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-10-101819	10/18/2019	<0.033	U		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-10-012220	1/22/2020	**0.0057**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-10-042220	4/22/2020	**0.01**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0025	J		<0.015	U	
		VMP-53-10-072220	7/22/2020	**0.017**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-10-102820	10/28/2020	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-10-012121	1/21/2021	**0.0048**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-53-5-050415	5/4/2015	<0.018	U		<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-53-5-072415	7/24/2015	**0.0026**	J		<0.0097	U		<0.0071	U		<0.013	U		<0.016	U		<0.0075	U		<0.032	U		<0.008	U	
		VMP-53-5-102815	10/28/2015	**0.065**			<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-53-5-012816	1/28/2016	<0.017	J	U	<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-53-5-042816	4/28/2016	**0.0012**	J		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-53-5-072916	7/29/2016	<0.02	U		<0.0099	U		<0.0072	U		<0.013	U		<0.017	U		<0.0077	U		<0.032	U		<0.0082	U	
		VMP-53-5-102516	10/25/2016	**0.0014**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	ND,UJ	UJ	<0.0071	U	
		VMP-53-5-120916	12/9/2016	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-53-5-012317	1/23/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		**0.00091**	J		<0.0063	U	
		VMP-53-5-042017	4/20/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0053**	J		<0.025	U		<0.0062	U	
		VMP-53-5-071917	7/19/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-53-5-110117	11/1/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-53-5-012218	1/22/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-53-5-032918	3/29/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-53-5-041018	4/10/2018	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-53-5-072518	7/25/2018	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-53-5-102318	10/23/2018	**0.002**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-53-5-011819	1/18/2019	<0.013	U		<0.0066	U		**0.00082**	J		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		**0.00099**	J	
		VMP-53-5-050319	5/3/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-53-5-050319-DUP	5/3/2019	**0.0031**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-53-5-071919	7/19/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-53-5-101819	10/18/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-53-5-012220	1/22/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-53-5-042220	4/22/2020	**0.012**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-53-5-072220	7/22/2020	**0.0049**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.00063**	J		<0.025	U		<0.0062	U	
		VMP-53-5-102820	10/28/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-53-5-012121	1/21/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
	10 ft	VMP-53-10-020415	2/4/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-53-10-050415	5/4/2015	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.002**	J		<0.026	U		<0.0064	U	
		VMP-53-10-072415	7/24/2015	**0.0021**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.03**			<0.029	U		<0.0072	U	
		VMP-53-10-102815	10/28/2015	**0.017**			<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		**0.0028**	J		<0.0067	U	
		VMP-53-10-012816	1/28/2016	<0.02	J	U	<0.0099	U		<0.0073	U		<0.013	U		<0.017	U		<0.0077	U		<0.033	U		<0.0082	U	
		VMP-53-10-042816	4/28/2016	**0.00076**	J		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-53-10-082616	8/26/2016	**0.013**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0063**			<0.026	U		<0.0065	U	
		VMP-53-10-102516	10/25/2016	**0.001**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	ND,UJ	UJ	<0.0072	U	
		VMP-53-10-120916	12/9/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-53-10-012317	1/23/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-53-10-042017	4/20/2017	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0014**	J		<0.024	U		<0.0062	U	
		VMP-53-10-071917	7/19/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0076**			<0.025	U		<0.0063	U	
		VMP-53-10-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-53-10-012218	1/22/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-53-10-032918	3/29/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-53-10-041018	4/10/2018	<0.014	J	U	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-53-10-072518	7/25/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0017**	J		<0.026	U		<0.0066	U	
		VMP-53-10-102318	10/23/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-53-10-011819	1/18/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-53-10-050319	5/3/2019	<0.052	U		<0.026	U		<0.019	U		<0.036	U		<0.044	U		<0.02	U		<0.086	U		<0.022	U	
		VMP-53-10-071919	7/19/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0018**	J		<0.026	U		<0.0066	U	
		VMP-53-10-101819	10/18/2019	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0013**	J		<0.028	U		<0.0071	U	
		VMP-53-10-012220	1/22/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	ND,UJ	UJ	<0.0061	U	
		VMP-53-10-042220	4/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-53-10-072220	7/22/2020	<0.017	J	U	<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-53-10-102820	10/28/2020	**0.002**	J		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.0013**	J		<0.024	U		<0.006	U	
		VMP-53-10-012121	1/21/2021	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0024**	J		<0.0056	U		<0.0056	U	
		VMP-53-5-050415	5/4/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0023**	J		<0.006	U		<0.0059	U	
		VMP-53-5-072415	7/24/2015	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0031**	J		<0.0062	U		<0.0062	U	
		VMP-53-5-102815	10/28/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0027**	J		<0.006	U		<0.006	U	
		VMP-53-5-012816	1/28/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-53-5-042816	4/28/2016	**0.0054**			<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-53-5-072916	7/29/2016	**0.00088**	J		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0023**	J		<0.0064	U		<0.0064	U	
		VMP-53-5-102516	10/25/2016	**0.0057**			<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-53-5-120916	12/9/2016	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-53-5-012317	1/23/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-53-5-042017	4/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-53-5-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-53-5-110117	11/1/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-53-5-012218	1/22/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-53-5-032918	3/29/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-53-5-041018	4/10/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0027**	J		<0.0047	U		<0.0047	U	
		VMP-53-5-072518	7/25/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-53-5-102318	10/23/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-53-5-011819	1/18/2019	<0.0036	U		**0.0017**	J		**0.002**	J		0.0019	J		**0.0018**	J		**0.0024**	J		<0.0042	U		<0.0042	U	
		VMP-53-5-050319	5/3/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-53-5-050319-DUP	5/3/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		<0.0058	U		<0.0048	U		<0.0048	U	
		VMP-53-5-071919	7/19/2019	**0.0027**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-53-5-101819	10/18/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0019**	J		<0.0048	U		<0.0048	U	
		VMP-53-5-012220	1/22/2020	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		<0.007	U		<0.0057	U		<0.0057	U	
		VMP-53-5-042220	4/22/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.002**	J		<0.0052	U		<0.0052	U	
		VMP-53-5-072220	7/22/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0032**	J		<0.0048	U		<0.0048	U	
		VMP-53-5-102820	10/28/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-53-5-012121	1/21/2021	**0.00063**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0049	U		<0.0049	U	
	10 ft	VMP-53-10-020415	2/4/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0022**	J		<0.0056	U		<0.0056	U	
		VMP-53-10-050415	5/4/2015	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-53-10-072415	7/24/2015	**0.0044**	J		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0028**	J		<0.0056	U		<0.0056	U	
		VMP-53-10-102815	10/28/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0031**	J		<0.0052	U		<0.0052	U	
		VMP-53-10-012816	1/28/2016	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		**0.0025**	J		<0.0064	U		<0.0064	U	
		VMP-53-10-042816	4/28/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-53-10-082616	8/26/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0031**	J		<0.0051	U		<0.0051	U	
		VMP-53-10-102516	10/25/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0028**	J		<0.0056	U		<0.0056	U	
		VMP-53-10-120916	12/9/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-53-10-012317	1/23/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-53-10-042017	4/20/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-53-10-071917	7/19/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-53-10-110117	11/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-53-10-012218	1/22/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-53-10-032918	3/29/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-53-10-041018	4/10/2018	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-53-10-072518	7/25/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-53-10-102318	10/23/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0019**	J		<0.0047	U		<0.0047	U	
		VMP-53-10-011819	1/18/2019	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-53-10-050319	5/3/2019	**0.11**			<0.032	U		<0.025	U		<0.025	U		<0.025	U		<0.021	U		<0.017	U		<0.017	U	
		VMP-53-10-071919	7/19/2019	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-53-10-101819	10/18/2019	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0021**	J		<0.0056	U		<0.0056	U	
		VMP-53-10-012220	1/22/2020	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-53-10-042220	4/22/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-53-10-072220	7/22/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-53-10-102820	10/28/2020	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0029**	J		<0.0047	U		<0.0047	U	
		VMP-53-10-012121	1/21/2021	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-53-5-050415	5/4/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-53-5-072415	7/24/2015	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-53-5-102815	10/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.0052**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-53-5-012816	1/28/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-53-5-042816	4/28/2016	<0.0049	U		<0.0049	U		<0.0049	U		**0.0038**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-5-072916	7/29/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.055	U		<0.0073	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-53-5-102516	10/25/2016	<0.0054	U		<0.0054	U		<0.0054	U		**0.0026**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-53-5-120916	12/9/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-5-012317	1/23/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-5-042017	4/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0088**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-5-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-5-110117	11/1/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-53-5-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-53-5-032918	3/29/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-5-041018	4/10/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-5-072518	7/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-5-102318	10/23/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0073**	J		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-5-011819	1/18/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.036	U		<0.0048	U		<0.0048	U		**0.00088**	J		<0.015	U	
		VMP-53-5-050319	5/3/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-5-050319-DUP	5/3/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-5-071919	7/19/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-5-101819	10/18/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-5-012220	1/22/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-53-5-042220	4/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-5-072220	7/22/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-5-102820	10/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-5-012121	1/21/2021	<0.0048	U		<0.0048	U		<0.0048	U		**0.0014**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
	10 ft	VMP-53-10-020415	2/4/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-53-10-050415	5/4/2015	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-10-072415	7/24/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-53-10-102815	10/28/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	J	U	<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-10-012816	1/28/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0073	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-53-10-042816	4/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-53-10-082616	8/26/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-10-102516	10/25/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-53-10-120916	12/9/2016	<0.005	U		<0.005	U		<0.005	U		**0.0017**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-10-012317	1/23/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-10-042017	4/20/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-10-071917	7/19/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-10-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-53-10-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-10-032918	3/29/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-10-041018	4/10/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-53-10-072518	7/25/2018	<0.0051	U		0.001	J		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-10-102318	10/23/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-10-011819	1/18/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-53-10-050319	5/3/2019	<0.016	U		<0.016	U		<0.016	U		<0.14	U		<0.019	U		<0.019	U		<0.019	U		<0.06	U	
		VMP-53-10-071919	7/19/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-10-101819	10/18/2019	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-53-10-012220	1/22/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-10-042220	4/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-10-072220	7/22/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		**0.0016**	J	
		VMP-53-10-102820	10/28/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-10-012121	1/21/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.01	U		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-53-5-050415	5/4/2015	<0.011	U		**0.0015**	J		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		<0.0052	U	
		VMP-53-5-072415	7/24/2015	<0.012	U		<0.0067	U		<0.0076	U		<0.012	U		<0.011	U		<0.0063	U		<0.066	U		<0.0054	U	
		VMP-53-5-102815	10/28/2015	0.0049	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-53-5-012816	1/28/2016	<0.01	U		**0.0022**	J		0.0036	J	J	<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-53-5-042816	4/28/2016	0.021			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0049**	J		<0.053	U		**0.003**	J	
		VMP-53-5-072916	7/29/2016	0.0081	J		<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		**0.0016**	J	
		VMP-53-5-102516	10/25/2016	0.015			**0.0023**	J		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		**0.00098**	J	
		VMP-53-5-120916	12/9/2016	0.0075	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0011**	J	
		VMP-53-5-012317	1/23/2017	0.0069	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.002**	J	
		VMP-53-5-042017	4/20/2017	0.0083	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-53-5-071917	7/19/2017	0.01			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-5-110117	11/1/2017	<0.008	U		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-53-5-012218	1/22/2018	0.0076	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-5-032918	3/29/2018	0.0097			<0.0052	U		0.0032	J		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-53-5-041018	4/10/2018	0.02			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.00069**	J	
		VMP-53-5-072518	7/25/2018	0.027			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-5-102318	10/23/2018	<0.0089	U		**0.0024**	J		0.0043	J	J	<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-53-5-011819	1/18/2019	0.0036	J		<0.0046	U		<0.0052	U		<0.008	U		<0.0073	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-53-5-050319	5/3/2019	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-5-050319-DUP	5/3/2019	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	ND,UJ		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-53-5-071919	7/19/2019	0.016			**0.0034**	J		<0.0061	U		<0.0096	U		<0.0087	U		**0.0092**			<0.053	U		**0.0052**		
		VMP-53-5-101819	10/18/2019	<0.0088	U	UJ	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-53-5-012220	1/22/2020	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0043**	J	
		VMP-53-5-042220	4/22/2020	0.0075	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-53-5-072220	7/22/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-53-5-102820	10/28/2020	<0.024	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-53-5-012121	1/21/2021	0.022	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.00087**	J		<0.051	U		**0.0033**	J	
	10 ft	VMP-53-10-020415	2/4/2015	0.0072	J		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-53-10-050415	5/4/2015	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-10-072415	7/24/2015	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		**0.0032**	J		<0.059	U		**0.0077**		
		VMP-53-10-102815	10/28/2015	0.042			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-53-10-012816	1/28/2016	0.006	J		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		**0.0021**	J		<0.067	U		**0.0027**	J	
		VMP-53-10-042816	4/28/2016	<0.011	U		**0.01**			0.0022	J		<0.011	U		<0.01	U		**0.018**			<0.061	U		**0.02**		
		VMP-53-10-082616	8/26/2016	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		**0.001**	J	
		VMP-53-10-102516	10/25/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		**0.0012**	J	
		VMP-53-10-120916	12/9/2016	<0.0096	U		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-53-10-012317	1/23/2017	0.0058	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.0012**	J	
		VMP-53-10-042017	4/20/2017	0.0033	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-53-10-071917	7/19/2017	0.011			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-10-110117	11/1/2017	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-53-10-012218	1/22/2018	0.016			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		**0.001**	J	
		VMP-53-10-032918	3/29/2018	0.028			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-10-041018	4/10/2018	0.014			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.00065**	J		<0.049	U		<0.004	U	
		VMP-53-10-072518	7/25/2018	0.01			<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-53-10-102318	10/23/2018	0.0039	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-53-10-011819	1/18/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-53-10-050319	5/3/2019	<0.032	U		**0.042**			0.02	J		<0.032	ND,UJ		<0.029	U		**0.29**			<0.18	U		**0.056**		
		VMP-53-10-071919	7/19/2019	0.012			<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-53-10-101819	10/18/2019	0.0039	J	J	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0029**	J	
		VMP-53-10-012220	1/22/2020	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-53-10-042220	4/22/2020	0.0039	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-53-10-072220	7/22/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-53-10-102820	10/28/2020	<0.022	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		**0.0018**	J		<0.049	U		**0.0042**		
		VMP-53-10-012121	1/21/2021	0.032			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.00091**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					**0.0046**	J		<0.0068	U	
		VMP-53-5-050415	5/4/2015	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.0053	U					**0.04**			<0.0072	U	
		VMP-53-5-072415	7/24/2015	<0.025	U		0.0083	J	J	<0.0076	U		<0.0063	U		<0.0056	U					**0.0047**	J	J	<0.0076	U	
		VMP-53-5-102815	10/28/2015	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					<0.014	J	U	<0.0073	U	
		VMP-53-5-012816	1/28/2016	<0.022	U		<0.016	U		**0.0036**	J		<0.0055	U		<0.0048	U					**0.019**			**0.01**		
		VMP-53-5-042816	4/28/2016	**0.0013**	J		0.047			<0.0061	U		<0.0051	U		<0.0045	U					**0.13**			<0.0061	U	
		VMP-53-5-072916	7/29/2016	<0.026	U		<0.018	U		**0.0017**	J		<0.0064	U		<0.023	U					**0.0058**	J		**0.003**	J	
		VMP-53-5-102516	10/25/2016	<0.022	U		0.0064	J		<0.0067	U		<0.0056	U		<0.02	U		<0.014	U		**0.016**			<0.0067	U	
		VMP-53-5-120916	12/9/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.0029**	J		<0.0062	U	
		VMP-53-5-012317	1/23/2017	<0.02	U		0.0029	J		<0.0059	U		<0.005	U		<0.017	U					**0.012**			<0.0059	U	
		VMP-53-5-042017	4/20/2017	<0.02	U		0.0032	J		<0.0059	U		<0.0049	U		<0.017	U					**0.015**			<0.0059	U	
		VMP-53-5-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.021**			<0.006	U	
		VMP-53-5-110117	11/1/2017	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-53-5-012218	1/22/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.014**			<0.006	U	
		VMP-53-5-032918	3/29/2018	<0.02	U		<0.014	U		**0.0031**	J		<0.0049	U		<0.017	U		**0.012**	J		**0.0032**	J		**0.016**		
		VMP-53-5-041018	4/10/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U		<0.012	U		**0.014**			<0.0057	U	
		VMP-53-5-072518	7/25/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.01**	J		<0.0061	U	
		VMP-53-5-102318	10/23/2018	<0.019	U		<0.014	U		<0.0058	U		**0.0053**			<0.017	U					**0.002**	J		<0.0058	U	
		VMP-53-5-011819	1/18/2019	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.0017**	J		<0.0052	U	
		VMP-53-5-050319	5/3/2019	<0.02	U		0.0069	J		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		**0.0051**	J	
		VMP-53-5-050319-DUP	5/3/2019	<0.019	U		0.004	J		**0.0014**	J		<0.0048	U		<0.017	U					<0.012	U		**0.0067**		
		VMP-53-5-071919	7/19/2019	<0.02	U		0.0096	J		<0.0061	U		<0.0051	U		<0.018	U					**0.011**	J		<0.0061	U	
		VMP-53-5-101819	10/18/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-53-5-012220	1/22/2020	<0.023	U		0.0022	J		<0.0069	U		<0.0058	U		<0.02	U					**0.077**			<0.0069	U	
		VMP-53-5-042220	4/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0033**	J		<0.0063	U	
		VMP-53-5-072220	7/22/2020	<0.02	U		<0.014	U		<0.0059	U		**0.00087**	J		<0.017	U					<0.012	J	U	<0.0059	U	
		VMP-53-5-102820	10/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.015**			<0.0063	U	
		VMP-53-5-012121	1/21/2021	<0.02	U		0.019			**0.0026**	J		<0.0049	U		<0.017	U					**0.017**			<0.0059	U	
	10 ft	VMP-53-10-020415	2/4/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.0037**	J		<0.0068	U	
		VMP-53-10-050415	5/4/2015	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.0045	U					**0.018**			<0.0061	U	
		VMP-53-10-072415	7/24/2015	<0.023	U		0.04		J	<0.0068	U		<0.0057	U		<0.005	U					**0.0063**	J	J	<0.0068	U	
		VMP-53-10-102815	10/28/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.03**			<0.0063	U	
		VMP-53-10-012816	1/28/2016	<0.026	U		<0.019	U		<0.0078	U		<0.0065	U		<0.0057	U					**0.014**	J		<0.0078	U	
		VMP-53-10-042816	4/28/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0052	U					**0.0045**	J		<0.007	U	
		VMP-53-10-082616	8/26/2016	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.0071**	J		<0.0062	U	
		VMP-53-10-102516	10/25/2016	<0.023	U		0.005	J		<0.0068	U		<0.0057	U		<0.02	U		<0.014	U		**0.0034**	J		<0.0068	U	
		VMP-53-10-120916	12/9/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U		**0.0033**	J		**0.0038**	J		**0.001**	J	
		VMP-53-10-012317	1/23/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.01**	J		<0.0059	U	
		VMP-53-10-042017	4/20/2017	<0.019	U		0.0022	J		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		**0.0011**	J	
		VMP-53-10-071917	7/19/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.018**			<0.0059	U	
		VMP-53-10-110117	11/1/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-53-10-012218	1/22/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.012**			<0.0059	U	
		VMP-53-10-032918	3/29/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U		<0.013	U		**0.006**	J		<0.006	U	
		VMP-53-10-041018	4/10/2018	<0.019	U		<0.014	U		<0.0056	U		**0.00093**	J		<0.016	U		<0.012	U		**0.0098**	J		<0.0056	U	
		VMP-53-10-072518	7/25/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0048**	J		<0.0063	U	
		VMP-53-10-102318	10/23/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-53-10-011819	1/18/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-53-10-050319	5/3/2019	<0.068	U		0.032	J		<0.02	U		<0.017	U		<0.06	U					<0.041	U		<0.02	U	
		VMP-53-10-071919	7/19/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					<0.013	U		<0.0063	U	
		VMP-53-10-101819	10/18/2019	<0.022	U		0.0033	J		<0.0068	U		<0.0056	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-53-10-012220	1/22/2020	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.023**			<0.0058	U	
		VMP-53-10-042220	4/22/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0028**	J		<0.0062	U	
		VMP-53-10-072220	7/22/2020	<0.022	U		0.003	J		<0.0066	U		<0.0055	U		<0.019	U					<0.013	J	U	<0.0066	U	
		VMP-53-10-102820	10/28/2020	<0.019	U		0.0075	J		<0.0057	U		<0.0048	U		<0.017	U					**0.011**	J		<0.0057	U	
		VMP-53-10-012121	1/21/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0049**	J		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.00096**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-53-5-050415	5/4/2015	<0.0063	U		<0.01	U		**0.0022**	J		<0.0043	U		**0.0053**	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-53-5-072415	7/24/2015	<0.0066	U		<0.01	U		<0.01	U		<0.0045	U		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-53-5-102815	10/28/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0016**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-53-5-012816	1/28/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-53-5-042816	4/28/2016	**0.0013**	J		<0.0085	U		**0.0048**	J		**0.0012**	J		**0.031**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-5-072916	7/29/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		<0.0059	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-53-5-102516	10/25/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.0094**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-53-5-120916	12/9/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-53-5-012317	1/23/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00079**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-5-042017	4/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00096**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-53-5-071917	7/19/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0012**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-5-110117	11/1/2017	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-53-5-012218	1/22/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0022**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-5-032918	3/29/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-5-041018	4/10/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-53-5-072518	7/25/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-5-102318	10/23/2018	**0.003**	J		<0.0081	U		**0.009**			<0.0035	U		**0.013**			<0.035	U		**0.012**			<0.0064	U	
		VMP-53-5-011819	1/18/2019	<0.0045	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.004	U		<0.031	U		<0.0057	U		**0.00092**	J	
		VMP-53-5-050319	5/3/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-5-050319-DUP	5/3/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-5-071919	7/19/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.045**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-5-101819	10/18/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-5-012220	1/22/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0028**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-53-5-042220	4/22/2020	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-5-072220	7/22/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00042**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-53-5-102820	10/28/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-5-012121	1/21/2021	<0.0051	U		<0.0083	U		**0.00097**	J		<0.0036	U		**0.0034**	J		<0.036	U		<0.0066	U		<0.0066	U	
	10 ft	VMP-53-10-020415	2/4/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-53-10-050415	5/4/2015	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.00074**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-10-072415	7/24/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-53-10-102815	10/28/2015	<0.0055	U		<0.0088	U		<0.0088	U		**0.0023**	J		**0.0016**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-10-012816	1/28/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		<0.006	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-53-10-042816	4/28/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		**0.036**			<0.042	U		<0.0078	U		<0.0078	U	
		VMP-53-10-082616	8/26/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-10-102516	10/25/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0012**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-53-10-120916	12/9/2016	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		**0.00059**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-10-012317	1/23/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0008**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-10-042017	4/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00061**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-53-10-071917	7/19/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-10-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-53-10-012218	1/22/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0023**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-10-032918	3/29/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-10-041018	4/10/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-53-10-072518	7/25/2018	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-10-102318	10/23/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00054**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-53-10-011819	1/18/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-53-10-050319	5/3/2019	<0.018	U		<0.029	U		<0.028	U		<0.012	U		**0.4**			<0.12	U		<0.023	U		<0.023	U	
		VMP-53-10-071919	7/19/2019	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0046**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-10-101819	10/18/2019	<0.0058	U		<0.0094	U		**0.0026**	J		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-53-10-012220	1/22/2020	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-10-042220	4/22/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-53-10-072220	7/22/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-53-10-102820	10/28/2020	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00046**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-53-10-012121	1/21/2021	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.00033**	J		<0.036	U		<0.0067	U		<0.0067	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-53-5-020415	2/4/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-53-5-050415	5/4/2015	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		0.0017	J		<0.0038	U		0.0025	J		<0.0064	U	
		VMP-53-5-072415	7/24/2015	<0.0083	U		<0.0086	U		<0.0076	U		<0.0076	U		0.00065	J		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-53-5-102815	10/28/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-53-5-012816	1/28/2016	<0.0072	U		<0.0076	U		**0.0088**			**0.0016**	J		0.0056	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-53-5-042816	4/28/2016	<0.0067	U		<0.007	U		**0.0015**	J		<0.0061	U		0.0018	J		<0.0032	U		0.0024	J		**0.0012**	J	
		VMP-53-5-072916	7/29/2016	<0.0085	U		<0.0088	U		<0.0077	U		<0.0077	U		0.025			<0.004	U		<0.0068	U		<0.0068	U	
		VMP-53-5-102516	10/25/2016	<0.0073	U		0.0014	J		<0.0067	U		<0.0067	U		0.0065			<0.0035	U		0.0048	J		**0.0019**	J	
		VMP-53-5-120916	12/9/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-53-5-012317	1/23/2017	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		0.0016	J		<0.0031	U		0.0016	J		<0.0052	U	
		VMP-53-5-042017	4/20/2017	<0.0064	U		0.0024	J		<0.0059	U		<0.0059	U		0.0006	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-5-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-5-110117	11/1/2017	<0.0057	U		0.00089	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-53-5-012218	1/22/2018	<0.0065	U		0.0011	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-5-032918	3/29/2018	<0.0065	U		<0.0068	U		**0.013**			<0.0059	U		0.015			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-5-041018	4/10/2018	<0.0063	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-53-5-072518	7/25/2018	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		0.0018	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-5-102318	10/23/2018	**0.0027**	J		<0.0066	U		**0.0047**	J	J	**0.0017**	J		<0.0055	U		<0.003	U		0.011			**0.0032**	J	
		VMP-53-5-011819	1/18/2019	<0.0056	U		<0.0059	U		<0.0052	U		<0.0052	U		<0.0049	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-53-5-050319	5/3/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.084	J0	J	<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-5-050319-DUP	5/3/2019	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.083	J0	J	<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-5-071919	7/19/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0055	J		<0.0032	U		0.01			**0.0032**	J	
		VMP-53-5-101819	10/18/2019	<0.0063	U		0.0012	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-5-012220	1/22/2020	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.002	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-53-5-042220	4/22/2020	**0.0048**	J		0.0012	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-5-072220	7/22/2020	<0.0064	U		0.0019	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-53-5-102820	10/28/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-5-012121	1/21/2021	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.001	J		<0.0052	U	
	10 ft	VMP-53-10-020415	2/4/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-53-10-050415	5/4/2015	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-10-072415	7/24/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.087			<0.0035	U		<0.006	U		<0.006	U	
		VMP-53-10-102815	10/28/2015	<0.0069	U		<0.0072	J	U	<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-10-012816	1/28/2016	<0.0085	U		<0.0089	U		<0.0078	U		<0.0078	U		<0.0074	U		<0.004	U		<0.0069	U		<0.0069	U	
		VMP-53-10-042816	4/28/2016	<0.0077	U		<0.008	U		**0.0017**	J		<0.007	U		0.054			<0.0036	U		0.022			**0.0066**		
		VMP-53-10-082616	8/26/2016	<0.0067	U		0.0017	J		<0.0062	U		<0.0062	U		0.0021	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-10-102516	10/25/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0014	J		<0.0035	U		0.0046	J		**0.0011**	J	
		VMP-53-10-120916	12/9/2016	<0.0068	U		<0.0072	U		**0.002**	J		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-53-10-012317	1/23/2017	<0.0065	U		0.0013	J		<0.0059	J	U	<0.0059	U		0.00051	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-10-042017	4/20/2017	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.017			<0.003	U		<0.0052	U		<0.0052	U	
		VMP-53-10-071917	7/19/2017	<0.0065	U		0.0013	J		<0.0059	U		<0.0059	U		0.013			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-10-110117	11/1/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		0.003	J		<0.0048	U	
		VMP-53-10-012218	1/22/2018	<0.0065	U		0.001	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-10-032918	3/29/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0041	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-10-041018	4/10/2018	<0.0062	U		0.0011	J		<0.0056	U		<0.0056	U		0.0029	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-53-10-072518	7/25/2018	<0.0069	U		0.0014	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-10-102318	10/23/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-53-10-011819	1/18/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-53-10-050319	5/3/2019	<0.022	U		<0.024	U		**0.03**			**0.01**	J		14	E J0	J	<0.011	U		0.1			**0.034**		
		VMP-53-10-071919	7/19/2019	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0016	J		<0.0056	U	
		VMP-53-10-101819	10/18/2019	<0.0074	U		<0.0077	U		<0.0068	U		<0.0068	U		0.0041	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-53-10-012220	1/22/2020	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-10-042220	4/22/2020	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		0.00093	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-53-10-072220	7/22/2020	<0.0072	U		0.0016	J		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-53-10-102820	10/28/2020	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		0.00081	J		<0.005	U	
		VMP-53-10-012121	1/21/2021	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	**0.011**	J		<0.0089	U		<0.019	U		<0.029	U		<0.11	U		<0.0062	U		<0.026	U		<0.033	U	
		VMP-53-20-050415	5/4/2015	**0.01**	J		**0.00074**	J		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-20-072415	7/24/2015	**0.015**	J		<0.0049	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0028**	J	
		VMP-53-20-102815	10/28/2015	**0.025**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.007**	J	
		VMP-53-20-021616	2/16/2016	**0.023**	J		<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		0.0071	J		**0.0054**	J	
		VMP-53-20-042816	4/28/2016	**0.01**	J		**0.00053**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-20-072916	7/29/2016	**0.026**	J		**0.0032**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-53-20-102516	10/25/2016	**0.018**	J		**0.0014**	J		<0.016	U		<0.024	U		<0.091	U		<0.0052	U		0.016	J		<0.028	U	
		VMP-53-20-120916	12/9/2016	**0.0072**	J		**0.0018**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-20-012317	1/23/2017	**0.025**	J		<0.0042	J	U	**0.0011**	J		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0023**	J	
		VMP-53-20-042017	4/20/2017	<0.028	J	U	**0.005**			<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0026**	J	
		VMP-53-20-071917	7/19/2017	**0.013**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-20-110117	11/1/2017	**0.014**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0036**	J	
		VMP-53-20-012218	1/22/2018	<0.028	J	U	<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-20-012218-DUP	1/22/2018	<0.029	J	U	<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0026	J		<0.014	U	
		VMP-53-20-032918	3/29/2018	**0.0087**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-20-041018	4/10/2018	**0.021**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.004**	J	
		VMP-53-20-072518	7/25/2018	**0.028**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-20-102318	10/23/2018	**0.019**	J		**0.0015**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-20-011819	1/18/2019	**0.01**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0024**	J	
		VMP-53-20-050319	5/3/2019	**1.1**	J		<0.43	U		<0.9	U		<1.4	U		<2.1	U		<0.3	U		0.56	J		<1.6	U	
		VMP-53-20-071919	7/19/2019	**0.097**			**0.002**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-53-20-101819	10/18/2019	**0.0056**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-20-012220	1/22/2020	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-20-042220	4/22/2020	**0.05**			**0.0011**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0058**	J	
		VMP-53-20-072220	7/22/2020	**0.015**	J		**0.00083**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.002**	J	
		VMP-53-20-102820	10/28/2020	**0.011**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-20-012121	1/21/2021	**0.0055**	J		**0.0018**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	**0.0025**	J		<0.018	U		<0.013	U		<0.024	U		<0.03	U		<0.014	U		<0.058	U		<0.014	U	
		VMP-53-20-050415	5/4/2015	<0.017	J	U	<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-53-20-072415	7/24/2015	**0.002**	J		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.0037**	J		<0.031	U		<0.0079	U	
		VMP-53-20-102815	10/28/2015	**0.017**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-53-20-021616	2/16/2016	<0.02	J	U	<0.01	U		<0.0074	U		<0.014	U		<0.017	U		**0.0065**	J		<0.033	U		<0.0083	U	
		VMP-53-20-042816	4/28/2016	**0.00071**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.019**			<0.028	U		<0.007	U	
		VMP-53-20-072916	7/29/2016	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		**0.045**			<0.031	U		<0.0079	U	
		VMP-53-20-102516	10/25/2016	**0.0027**	J		<0.015	U		<0.011	U		<0.02	U		<0.025	U		**0.093**			<0.049	U		<0.012	U	
		VMP-53-20-120916	12/9/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.12**			<0.026	U		<0.0065	U	
		VMP-53-20-012317	1/23/2017	**0.0014**	J		**0.0014**	J		<0.006	U		<0.011	U		<0.014	U		**0.014**			<0.027	U		<0.0068	U	
		VMP-53-20-042017	4/20/2017	<0.015	J	U	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0013**	J		<0.024	U		<0.0062	U	
		VMP-53-20-071917	7/19/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.006**			<0.025	U		<0.0064	U	
		VMP-53-20-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.0014**	J		<0.023	U		<0.0058	U	
		VMP-53-20-012218	1/22/2018	<0.015	U	UJ	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-53-20-012218-DUP	1/22/2018	<0.015	U	UJ	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-53-20-032918	3/29/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-53-20-041018	4/10/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.001**	J		<0.024	U		<0.006	U	
		VMP-53-20-072518	7/25/2018	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0031**	J		<0.026	U		<0.0065	U	
		VMP-53-20-102318	10/23/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.012**			<0.025	U		<0.0064	U	
		VMP-53-20-011819	1/18/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.0084**			<0.023	U		<0.0058	U	
		VMP-53-20-050319	5/3/2019	<1.7	U		<0.85	U		<0.62	U		<1.2	U		<1.4	U		<0.66	U		<1.1	U		<0.7	U	
		VMP-53-20-071919	7/19/2019	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		**0.0036**	J		<0.0068	U	
		VMP-53-20-101819	10/18/2019	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-53-20-012220	1/22/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	ND,UJ	UJ	<0.0065	U	
		VMP-53-20-042220	4/22/2020	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-53-20-072220	7/22/2020	<0.016	J	U	<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0014**	J		<0.026	U		<0.0066	U	
		VMP-53-20-102820	10/28/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.001**	J		<0.026	U		<0.0065	U	
		VMP-53-20-012121	1/21/2021	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0025**	J		<0.026	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	<0.0096	U		<0.021	U		<0.017	U		<0.017	U		<0.017	U		<0.014	U		<0.011	U		<0.011	U	
		VMP-53-20-050415	5/4/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0023**	J		<0.0055	U		<0.0055	U	
		VMP-53-20-072415	7/24/2015	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0025**	J		<0.0062	U		<0.0062	U	
		VMP-53-20-102815	10/28/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.003**	J		<0.006	U		<0.006	U	
		VMP-53-20-021616	2/16/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		**0.0029**	J		<0.0065	U		<0.0065	U	
		VMP-53-20-042816	4/28/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.002**	J		<0.0054	U		<0.0054	U	
		VMP-53-20-072916	7/29/2016	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0039**	J		<0.0062	U		<0.0062	U	
		VMP-53-20-102516	10/25/2016	**0.0021**	J		<0.018	U		<0.014	U		<0.014	U		<0.014	U		**0.003**	J		<0.0095	U		<0.0095	U	
		VMP-53-20-120916	12/9/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-53-20-012317	1/23/2017	**0.00083**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0036**	J		**0.0011**	J		**0.00094**	J	
		VMP-53-20-042017	4/20/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-53-20-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-53-20-110117	11/1/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0018**	J		<0.0045	U		<0.0045	U	
		VMP-53-20-012218	1/22/2018	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-53-20-012218-DUP	1/22/2018	**0.00071**	J		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-53-20-032918	3/29/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-53-20-041018	4/10/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-53-20-072518	7/25/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-53-20-102318	10/23/2018	**0.0024**	J		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-53-20-011819	1/18/2019	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-53-20-050319	5/3/2019	**0.71**			<1	U		<0.81	U		<0.81	U		<0.81	U		<0.67	U		<0.55	U		<0.55	U	
		VMP-53-20-071919	7/19/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-53-20-101819	10/18/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0019**	J		<0.005	U		<0.005	U	
		VMP-53-20-012220	1/22/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-53-20-042220	4/22/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-53-20-072220	7/22/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0031**	J		<0.0052	U		<0.0052	U	
		VMP-53-20-102820	10/28/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-53-20-012121	1/21/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	<0.011	U		<0.011	U		<0.011	U		<0.097	U		<0.013	U		<0.013	U		<0.013	U		<0.04	U	
		VMP-53-20-050415	5/4/2015	<0.0054	U		<0.0054	U		<0.0054	U		**0.0036**	J		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-53-20-072415	7/24/2015	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-53-20-102815	10/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	J	U	<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-53-20-021616	2/16/2016	<0.0063	U		<0.0063	U		<0.0063	U		**0.0034**	J		<0.0074	U		<0.0073	U		<0.0073	U		<0.023	U	
		VMP-53-20-042816	4/28/2016	<0.0053	U		<0.0053	U		<0.0053	U		**0.0016**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-53-20-072916	7/29/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-53-20-102516	10/25/2016	<0.0093	U		<0.0093	U		<0.0093	U		<0.082	U		<0.011	U		<0.011	U		<0.011	U		<0.034	U	
		VMP-53-20-120916	12/9/2016	<0.005	U		<0.005	U		<0.005	U		**0.003**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-20-012317	1/23/2017	**0.0013**	J		<0.0052	U		<0.0052	U		**0.0021**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-53-20-042017	4/20/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-20-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-20-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-53-20-012218	1/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U	UJ	<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-20-012218-DUP	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U	UJ	<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-20-032918	3/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-20-041018	4/10/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-20-072518	7/25/2018	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-20-102318	10/23/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-20-011819	1/18/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-53-20-050319	5/3/2019	<0.54	U		<0.54	U		<0.54	U		<1.9	U		<0.62	U		<0.61	U		<0.61	U		<1.9	U	
		VMP-53-20-071919	7/19/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-53-20-101819	10/18/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-20-012220	1/22/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-20-042220	4/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-20-072220	7/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-20-102820	10/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-53-20-012121	1/21/2021	<0.0049	U		<0.0049	U		<0.0049	U		**0.0052**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	0.0083	J		<0.012	U		<0.014	U		<0.021	U		<0.02	U		<0.011	U		<0.12	U		<0.0098	U	
		VMP-53-20-050415	5/4/2015	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-53-20-072415	7/24/2015	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-53-20-102815	10/28/2015	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-53-20-021616	2/16/2016	0.0066	J		<0.0069	U		<0.0079	U		<0.012	U		<0.011	U		<0.0066	U		<0.068	U		**0.0019**	J	
		VMP-53-20-042816	4/28/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-53-20-072916	7/29/2016	0.012			<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		**0.0016**	J	
		VMP-53-20-102516	10/25/2016	0.01	J		<0.01	U		<0.012	U		<0.018	U		<0.016	U		<0.0096	U		<0.1	U		**0.0025**	J	
		VMP-53-20-120916	12/9/2016	0.069			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.001**	J		<0.054	U		**0.0012**	J	
		VMP-53-20-012317	1/23/2017	0.0087	J		<0.0057	U		<0.0064	U		<0.01	U		0.0014	J		<0.0053	U		<0.056	U		**0.0015**	J	
		VMP-53-20-042017	4/20/2017	0.004	J		<0.0052	U		0.0029	J		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-53-20-071917	7/19/2017	0.012			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-20-110117	11/1/2017	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-53-20-012218	1/22/2018	0.007	J	J	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-53-20-012218-DUP	1/22/2018	0.0099	J0	J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0017**	J	
		VMP-53-20-032918	3/29/2018	0.026			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		**0.0011**	J	
		VMP-53-20-041018	4/10/2018	0.016			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-53-20-072518	7/25/2018	0.0097			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-20-102318	10/23/2018	<0.0093	U		**0.015**			0.087		J	<0.0094	U		<0.0086	U		**0.0094**			<0.052	U		**0.012**		
		VMP-53-20-011819	1/18/2019	0.0038	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-53-20-050319	5/3/2019	<1	U		<0.59	U		<0.66	U		<1	U		<0.94	U		<0.55	U		<5.8	U		**0.89**		
		VMP-53-20-071919	7/19/2019	0.012			**0.0011**	J		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-53-20-101819	10/18/2019	<0.0093	U	UJ	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-20-012220	1/22/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-20-042220	4/22/2020	0.0061	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-53-20-072220	7/22/2020	0.0068	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-53-20-102820	10/28/2020	<0.024	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-20-012121	1/21/2021	0.045			**0.04**			0.037			<0.0095	U		<0.0087	U		**0.0024**	J		<0.053	U		**0.0025**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	<0.046	U		<0.033	U		<0.014	U		<0.011	U		<0.01	U					**0.0082**	J		<0.014	U	
		VMP-53-20-050415	5/4/2015	<0.022	U		0.0017	J		<0.0067	U		<0.0056	U		<0.0049	U					**0.014**			<0.0067	U	
		VMP-53-20-072415	7/24/2015	<0.025	U		0.013	J	J	<0.0075	U		<0.0062	U		<0.0055	U					**0.0044**	J	J	<0.0075	U	
		VMP-53-20-102815	10/28/2015	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					<0.014	U		<0.0073	U	
		VMP-53-20-021616	2/16/2016	<0.026	U		0.0017	J		<0.0079	U		<0.0066	U		<0.0058	U					**0.054**			<0.0079	U	
		VMP-53-20-042816	4/28/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0048	U					**0.0028**	J		<0.0066	U	
		VMP-53-20-072916	7/29/2016	<0.025	U		0.0057	J		<0.0075	U		<0.0062	U		<0.022	U					**0.024**			<0.0075	U	
		VMP-53-20-102516	10/25/2016	<0.038	U		0.018	J		<0.012	U		<0.0096	U		<0.034	U		<0.025	U		**0.036**			<0.012	U	
		VMP-53-20-120916	12/9/2016	<0.021	U		0.0051	J		<0.0062	U		<0.0052	U		<0.018	U		<0.013	U		**0.016**			<0.0062	U	
		VMP-53-20-012317	1/23/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		**0.00078**	J					**0.016**			<0.0064	U	
		VMP-53-20-042017	4/20/2017	<0.019	U		0.011	J		<0.0058	U		<0.0049	U		<0.017	U					**0.006**	J		**0.00095**	J	
		VMP-53-20-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.066**			**0.0022**	J	
		VMP-53-20-110117	11/1/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-53-20-012218	1/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.011**	J	J	<0.0058	U	
		VMP-53-20-012218-DUP	1/22/2018	<0.02	U		0.008	J		<0.0059	U		<0.0049	U		<0.017	U					**0.055**		J	<0.0059	U	
		VMP-53-20-032918	3/29/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U		<0.012	U		**0.0043**	J		<0.0058	U	
		VMP-53-20-041018	4/10/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U		**0.00027**	J		**0.013**			<0.0057	U	
		VMP-53-20-072518	7/25/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0024**	J		<0.0061	U	
		VMP-53-20-102318	10/23/2018	<0.02	U		<0.014	U		**0.0036**	J		<0.005	U		<0.018	U					**0.0027**	J		**0.025**		
		VMP-53-20-011819	1/18/2019	<0.018	U		0.0027	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0018**	J		<0.0055	U	
		VMP-53-20-050319	5/3/2019	<2.2	U		4.8			<0.66	U		<0.55	U		<0.49	U					<1.3	U		<0.66	U	
		VMP-53-20-071919	7/19/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0091**	J		<0.0065	U	
		VMP-53-20-101819	10/18/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0024**	J		<0.006	U	
		VMP-53-20-012220	1/22/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.023**			<0.0061	U	
		VMP-53-20-042220	4/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0058**	J		<0.0063	U	
		VMP-53-20-072220	7/22/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	J	U	<0.0063	U	
		VMP-53-20-102820	10/28/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0081**	J		<0.0061	U	
		VMP-53-20-012121	1/21/2021	<0.02	U		0.0034	J		**0.0051**	J		<0.0051	U		<0.018	U					**0.0082**	J		**0.0094**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	<0.012	U		<0.019	U		**0.012**	J		<0.0082	U		<0.01	U		<0.083	U		<0.015	U		<0.015	U	
		VMP-53-20-050415	5/4/2015	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-53-20-072415	7/24/2015	<0.0065	U		<0.01	U		<0.01	U		**0.0044**	J		**0.0016**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-53-20-102815	10/28/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-53-20-021616	2/16/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		<0.006	U		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-53-20-042816	4/28/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-53-20-072916	7/29/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.00085**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-53-20-102516	10/25/2016	<0.01	U		<0.016	U		<0.016	U		<0.0069	U		**0.0021**	J		<0.07	U		<0.013	U		<0.013	U	
		VMP-53-20-120916	12/9/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.002**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-53-20-012317	1/23/2017	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		**0.0011**	J		<0.039	U		**0.0013**	J		<0.0071	U	
		VMP-53-20-042017	4/20/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0013**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-53-20-071917	7/19/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-20-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-53-20-012218	1/22/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0021**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-20-012218-DUP	1/22/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0019**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-20-032918	3/29/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-20-041018	4/10/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-53-20-072518	7/25/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0023**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-20-102318	10/23/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-20-011819	1/18/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-53-20-050319	5/3/2019	<0.58	U		<0.93	U		<0.92	U		<0.4	U		<0.51	U		<4	ND,UJ		<0.74	U		<0.74	U	
		VMP-53-20-071919	7/19/2019	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0095**			<0.039	U		<0.0072	U		<0.0072	U	
		VMP-53-20-101819	10/18/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-20-012220	1/22/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-20-042220	4/22/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-20-072220	7/22/2020	<0.0054	U		<0.0088	U		**0.0081**	J		<0.0038	U		**0.00046**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-20-102820	10/28/2020	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-53-20-012121	1/21/2021	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.042**			<0.037	U		<0.0068	U		<0.0068	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-53	20 ft	VMP-53-20-020415	2/4/2015	<0.015	U		<0.016	U		<0.014	U		<0.014	U		<0.013	U		<0.0071	U		<0.012	U		<0.012	U	
		VMP-53-20-050415	5/4/2015	<0.0074	U		0.0014	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-53-20-072415	7/24/2015	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-53-20-102815	10/28/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-53-20-021616	2/16/2016	<0.0086	U		0.002	J		<0.0079	U		<0.0079	U		<0.0075	U		<0.0041	U		<0.0069	U		<0.0069	U	
		VMP-53-20-042816	4/28/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-53-20-072916	7/29/2016	<0.0082	U		0.0022	J		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-53-20-102516	10/25/2016	<0.013	U		<0.013	U		<0.012	U		<0.012	U		<0.011	U		<0.006	U		<0.01	U		<0.01	U	
		VMP-53-20-120916	12/9/2016	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-53-20-012317	1/23/2017	<0.007	U		0.0031	J		<0.0064	U		<0.0064	U		0.001	J		<0.0033	U		0.0054	J		**0.0017**	J	
		VMP-53-20-042017	4/20/2017	<0.0064	U		<0.0067	U		**0.0042**	J		**0.0015**	J		0.036			<0.003	U		0.0028	J		**0.0015**	J	
		VMP-53-20-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.029			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-20-110117	11/1/2017	<0.006	U		0.001	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-53-20-012218	1/22/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-20-012218-DUP	1/22/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0032	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-20-032918	3/29/2018	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		0.0015	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-20-041018	4/10/2018	<0.0062	U		0.0016	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-53-20-072518	7/25/2018	<0.0067	U		0.0014	J		<0.0061	U		<0.0061	U		0.0015	J		<0.0032	U		0.00096	J		<0.0054	U	
		VMP-53-20-102318	10/23/2018	<0.0066	U		<0.0069	U		**0.45**		J	**0.06**			0.0072			<0.0031	U		0.034			<0.0053	U	
		VMP-53-20-011819	1/18/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.013			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-53-20-050319	5/3/2019	<0.72	U		<0.76	U		<0.66	U		<0.66	U		250		J	<0.34	U		<0.59	U		<0.59	U	
		VMP-53-20-071919	7/19/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.013			<0.0034	U		0.0038	J		<0.0057	U	
		VMP-53-20-101819	10/18/2019	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-20-012220	1/22/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-20-042220	4/22/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-20-072220	7/22/2020	<0.0069	U		0.002	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-20-102820	10/28/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-20-012121	1/21/2021	<0.0067	U		0.0012	J		**0.022**			**0.011**			0.004	J		<0.0032	U		0.2			**0.072**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-53-30-020415	2/4/2015	**0.0028**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-53-30-050415	5/4/2015	**0.0078**	J		<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-53-30-072415	7/24/2015	**0.027**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		**0.0048**	J	
		VMP-53-30-102815	10/28/2015	**0.03**	J		**0.001**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.017**	J	
		VMP-53-30-012816	1/28/2016	**0.014**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0025**	J	
		VMP-53-30-042816	4/28/2016	**0.0082**	J		**0.00092**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-53-30-052516-R	5/25/2016	**0.013**	J		**0.00052**	J		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0031**	J	
		VMP-53-30-072916	7/29/2016	**0.085**			**0.0066**			<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.0046	J		**0.005**	J	
		VMP-53-30-102516	10/25/2016	**0.17**			<0.008	U		<0.017	U		<0.026	U		<0.097	U		<0.0055	U		<0.024	U		<0.03	U	
		VMP-53-30-120916	12/9/2016	**0.0051**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		0.0089	J		<0.017	U	
		VMP-53-30-012317	1/23/2017	**0.025**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-012317-Dup	1/23/2017	**0.011**	J		**0.00088**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0031**	J	
		VMP-53-30-042017	4/20/2017	**0.019**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0043**	J	
		VMP-53-30-042017-DUP	4/20/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.002**	J	
		VMP-53-30-071917	7/19/2017	**0.0094**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-071917-DUP	7/19/2017	**0.0099**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-110117	11/1/2017	**0.016**	J		<0.0035	J	U	<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-53-30-012218	1/22/2018	<0.029	U		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-032918	3/29/2018	**0.0075**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0056	J		<0.014	U	
		VMP-53-30-041018	4/10/2018	**0.024**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0028**	J	
		VMP-53-30-072518	7/25/2018	**0.041**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0083	J		**0.0036**	J	
		VMP-53-30-102318	10/23/2018	**0.015**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-013119	1/31/2019	**0.015**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-53-30-050319	5/3/2019	<0.3	U		<0.04	U		<0.085	U		<0.13	U		<0.49	U		<0.028	U		0.61			<0.15	U	
		VMP-53-30-071919	7/19/2019	**0.011**	J		**0.0017**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-53-30-101819	10/18/2019	<0.028	U		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-30-101819-DUP	10/18/2019	**0.0069**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-012220	1/22/2020	**0.0047**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-53-30-012220-DUP	1/22/2020	**0.0096**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-53-30-042220	4/22/2020	**0.007**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-53-30-072220	7/22/2020	**0.011**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-53-30-102820	10/28/2020	**0.015**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-53-30-012121	1/21/2021	**0.006**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-53-30-020415	2/4/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0098**			<0.026	U		<0.0066	U	
		VMP-53-30-050415	5/4/2015	**0.0032**	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.0044**	J		<0.031	U		<0.0078	U	
		VMP-53-30-072415	7/24/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	J	U	<0.029	U		<0.0073	U	
		VMP-53-30-102815	10/28/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0054**	J		<0.03	U		<0.0077	U	
		VMP-53-30-012816	1/28/2016	<0.017	J	U	<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.021**			<0.028	U		<0.007	U	
		VMP-53-30-042816	4/28/2016	<0.019	U		<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		**0.14**			<0.032	U		<0.0079	U	
		VMP-53-30-052516-R	5/25/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.19**			<0.027	U		<0.0068	U	
		VMP-53-30-072916	7/29/2016	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.24**			<0.022	U		<0.0056	U	
		VMP-53-30-102516	10/25/2016	<0.031	U		<0.016	U		<0.012	U		<0.021	U		<0.026	U		**0.26**			<0.052	U		<0.013	U	
		VMP-53-30-120916	12/9/2016	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.24**			<0.03	U		<0.0074	U	
		VMP-53-30-012317	1/23/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.079**			<0.025	U		<0.0063	U	
		VMP-53-30-012317-Dup	1/23/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.077**			<0.025	U		<0.0063	U	
		VMP-53-30-042017	4/20/2017	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0066**			<0.024	U		<0.0059	U	
		VMP-53-30-042017-DUP	4/20/2017	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.006**			<0.023	U		<0.0057	U	
		VMP-53-30-071917	7/19/2017	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0024**	J		<0.025	U		<0.0064	U	
		VMP-53-30-071917-DUP	7/19/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0022**	J		<0.025	U		<0.0063	U	
		VMP-53-30-110117	11/1/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0023**	J		<0.023	U		<0.0057	U	
		VMP-53-30-012218	1/22/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0015**	J		<0.025	U		<0.0063	U	
		VMP-53-30-032918	3/29/2018	<0.014	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0035**	J		<0.024	U		<0.006	U	
		VMP-53-30-041018	4/10/2018	<0.013	J	U	<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.0032**	J		<0.022	U		<0.0056	U	
		VMP-53-30-072518	7/25/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.014**			<0.026	U		<0.0064	U	
		VMP-53-30-102318	10/23/2018	**0.002**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.031**			<0.025	U		<0.0063	U	
		VMP-53-30-013119	1/31/2019	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.023**			<0.022	U		<0.0055	U	
		VMP-53-30-050319	5/3/2019	<0.16	U		<0.08	U		<0.058	U		<0.11	U		<0.13	U		**0.027**	J		<0.26	U		<0.066	U	
		VMP-53-30-071919	7/19/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0038**	J		<0.027	U		<0.0067	U	
		VMP-53-30-101819	10/18/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-53-30-012220	1/22/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	ND,UJ	UJ	<0.0067	U	
		VMP-53-30-012220-DUP	1/22/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	ND,UJ	UJ	<0.0068	U	
		VMP-53-30-042220	4/22/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-53-30-072220	7/22/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.00076**	J		<0.025	U		<0.0063	U	
		VMP-53-30-102820	10/28/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0092**			<0.025	U		<0.0062	U	
		VMP-53-30-012121	1/21/2021	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.028**			<0.025	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-53-30-020415	2/4/2015	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-53-30-050415	5/4/2015	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0029**	J		<0.0061	U		<0.0061	U	
		VMP-53-30-072415	7/24/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0029**	J		<0.0057	U		<0.0057	U	
		VMP-53-30-102815	10/28/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	J	U	**0.0018**	J		<0.006	U		<0.006	U	
		VMP-53-30-012816	1/28/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0027**	J		<0.0055	U		<0.0055	U	
		VMP-53-30-042816	4/28/2016	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0032**	J		<0.0062	U		<0.0062	U	
		VMP-53-30-052516-R	5/25/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-53-30-072916	7/29/2016	**0.00074**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0035**	J		<0.0044	U		<0.0044	U	
		VMP-53-30-102516	10/25/2016	<0.0086	U		<0.019	U		<0.015	U		<0.015	U		<0.015	U		**0.0024**	J		<0.01	U		<0.01	U	
		VMP-53-30-120916	12/9/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0027**	J		<0.0058	U		<0.0058	U	
		VMP-53-30-012317	1/23/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-53-30-012317-Dup	1/23/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-53-30-042017	4/20/2017	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-53-30-042017-DUP	4/20/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-53-30-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-53-30-071917-DUP	7/19/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-53-30-110117	11/1/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		<0.0054	U		<0.0044	U		<0.0044	U	
		VMP-53-30-012218	1/22/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0021**	J		<0.0049	U		<0.0049	U	
		VMP-53-30-032918	3/29/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-53-30-041018	4/10/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0022**	J		<0.0044	U		<0.0044	U	
		VMP-53-30-072518	7/25/2018	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-53-30-102318	10/23/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-53-30-013119	1/31/2019	**0.00067**	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0021**	J		<0.0043	U		<0.0043	U	
		VMP-53-30-050319	5/3/2019	**0.27**			<0.098	U		<0.076	U		<0.076	U		<0.076	U		<0.063	U		<0.051	U		<0.051	U	
		VMP-53-30-071919	7/19/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-53-30-101819	10/18/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0018**	J		<0.005	U		<0.005	U	
		VMP-53-30-012220	1/22/2020	**0.003**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-53-30-012220-DUP	1/22/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		<0.0065	U		<0.0053	U		<0.0053	U	
		VMP-53-30-042220	4/22/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-53-30-072220	7/22/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-53-30-102820	10/28/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-53-30-012121	1/21/2021	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0049	U		<0.0049	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-53-30-020415	2/4/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-53-30-050415	5/4/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-53-30-072415	7/24/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-53-30-102815	10/28/2015	<0.0059	U		<0.0059	U		<0.0059	U		**0.0053**	J		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-53-30-012816	1/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-53-30-042816	4/28/2016	<0.0061	U		<0.0061	U		<0.0061	U		**0.0023**	J		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-53-30-052516-R	5/25/2016	<0.0052	U		<0.0052	U		<0.0052	U		**0.0016**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-53-30-072916	7/29/2016	<0.0043	U		<0.0043	U		<0.0043	U		**0.0042**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-53-30-102516	10/25/2016	<0.0099	U		<0.0099	U		<0.0099	U		<0.087	U		<0.012	U		<0.011	U		<0.011	U		<0.036	U	
		VMP-53-30-120916	12/9/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-53-30-012317	1/23/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-53-30-012317-Dup	1/23/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-30-042017	4/20/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-53-30-042017-DUP	4/20/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-53-30-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-30-071917-DUP	7/19/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0023**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-30-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-53-30-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-53-30-032918	3/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-30-041018	4/10/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-53-30-072518	7/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-30-102318	10/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-30-013119	1/31/2019	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-53-30-050319	5/3/2019	<0.05	U		<0.05	U		<0.05	U		<0.44	U		<0.059	U		<0.058	U		<0.058	U		<0.18	U	
		VMP-53-30-071919	7/19/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-53-30-101819	10/18/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-53-30-012220	1/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-53-30-012220-DUP	1/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-53-30-042220	4/22/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-53-30-072220	7/22/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.0012**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-53-30-102820	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-53-30-012121	1/21/2021	<0.0048	U		<0.0048	U		<0.0048	U		**0.0058**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-53-30-020415	2/4/2015	0.0073	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-53-30-050415	5/4/2015	0.0041	J		<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-53-30-072415	7/24/2015	<0.011	U		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-53-30-102815	10/28/2015	0.021			**0.0019**	J		<0.0073	U		<0.011	U		<0.01	U		**0.0016**	J		<0.063	U		<0.0052	U	
		VMP-53-30-012816	1/28/2016	<0.01	U		<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-53-30-042816	4/28/2016	<0.012	U		<0.0067	U		<0.0075	U		<0.012	U		<0.011	U		<0.0063	U		<0.065	U		<0.0054	U	
		VMP-53-30-052516-R	5/25/2016	<0.0098	U		<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-53-30-072916	7/29/2016	0.023			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0026**	J		<0.046	U		**0.0025**	J	
		VMP-53-30-102516	10/25/2016	<0.019	U		**0.0032**	J		<0.012	U		<0.019	U		<0.018	U		<0.01	U		<0.11	U		<0.0088	U	
		VMP-53-30-120916	12/9/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		**0.0012**	J		<0.061	U		**0.0016**	J	
		VMP-53-30-012317	1/23/2017	0.0072	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-30-012317-Dup	1/23/2017	0.012			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-30-042017	4/20/2017	0.0062	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-53-30-042017-DUP	4/20/2017	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-53-30-071917	7/19/2017	0.0092	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.0018**	J	
		VMP-53-30-071917-DUP	7/19/2017	0.01			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-30-110117	11/1/2017	0.0043	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-53-30-012218	1/22/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-30-032918	3/29/2018	0.0094			<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0042**	J		<0.05	U		**0.004**	J	
		VMP-53-30-041018	4/10/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		**0.00092**	J	
		VMP-53-30-072518	7/25/2018	0.045			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-30-102318	10/23/2018	0.0043	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-53-30-013119	1/31/2019	0.0067	J		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-53-30-050319	5/3/2019	<0.096	U		<0.055	U		<0.062	U		<0.097	ND,UJ		<0.089	U		<0.052	U		<0.54	U		**1**		
		VMP-53-30-071919	7/19/2019	0.011			<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-53-30-101819	10/18/2019	<0.0088	U	UJ	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.0093	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-53-30-012220	1/22/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0052**		
		VMP-53-30-012220-DUP	1/22/2020	0.015			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0022**	J	
		VMP-53-30-042220	4/22/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-53-30-072220	7/22/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.00068**	J	
		VMP-53-30-102820	10/28/2020	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-53-30-012121	1/21/2021	<0.023	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-53-30-020415	2/4/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.0054**	J		<0.0063	U	
		VMP-53-30-050415	5/4/2015	<0.024	U		<0.018	U		<0.0074	U		<0.0061	U		<0.0054	U					**0.012**	J		<0.0074	U	
		VMP-53-30-072415	7/24/2015	**0.002**	J	J	<0.017	J	U	<0.007	U		<0.0058	U		<0.0051	U					**0.0044**	J	J	<0.007	U	
		VMP-53-30-102815	10/28/2015	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					**0.0099**	J		<0.0073	U	
		VMP-53-30-012816	1/28/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.0049	U					<0.013	J	U	<0.0066	U	
		VMP-53-30-042816	4/28/2016	<0.025	U		<0.018	U		<0.0075	U		<0.0063	U		<0.0055	U					**0.0046**	J		<0.0075	U	
		VMP-53-30-052516-R	5/25/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.0047	U					**0.0052**	J		<0.0064	U	
		VMP-53-30-072916	7/29/2016	<0.018	U		0.0049	J		<0.0053	U		<0.0044	U		<0.016	U					**0.16**			<0.0053	U	
		VMP-53-30-102516	10/25/2016	<0.041	U		<0.03	U		<0.012	U		<0.01	U		<0.036	U		<0.026	U		**0.0051**	J		<0.012	U	
		VMP-53-30-120916	12/9/2016	<0.023	U		0.012	J		<0.007	U		<0.0058	U		<0.021	U		<0.015	U		**0.0045**	J		<0.007	U	
		VMP-53-30-012317	1/23/2017	**0.0011**	J		0.002	J		<0.006	U		<0.005	U		<0.018	U					**0.025**			<0.006	U	
		VMP-53-30-012317-Dup	1/23/2017	**0.0013**	J		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.019**			<0.006	U	
		VMP-53-30-042017	4/20/2017	<0.019	U		0.0044	J		**0.00083**	J		<0.0047	U		<0.016	U					**0.0075**	J		**0.002**	J	
		VMP-53-30-042017-DUP	4/20/2017	<0.018	U		0.0053	J		**0.00093**	J		<0.0045	U		<0.016	U					<0.011	U		**0.0024**	J	
		VMP-53-30-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.021**			<0.006	U	
		VMP-53-30-071917-DUP	7/19/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.036**			<0.0059	U	
	30 ft	VMP-53-30-110117	11/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-53-30-012218	1/22/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-53-30-032918	3/29/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U		**0.00078**	J		**0.0027**	J		<0.0058	U	
		VMP-53-30-041018	4/10/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U		<0.011	U		**0.0028**	J		<0.0053	U	
		VMP-53-30-072518	7/25/2018	<0.02	U		0.0071	J		<0.0061	U		<0.005	U		<0.018	U					**0.0077**	J		<0.0061	U	
		VMP-53-30-102318	10/23/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0018**	J		<0.006	U	
		VMP-53-30-013119	1/31/2019	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					**0.002**	J		<0.0053	U	
		VMP-53-30-050319	5/3/2019	<0.21	U		9.4			<0.062	U		<0.052	U		<0.18	U					<0.12	U		<0.062	U	
		VMP-53-30-071919	7/19/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					**0.006**	J		<0.0064	U	
		VMP-53-30-101819	10/18/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-53-30-012220	1/22/2020	<0.021	U		0.011	J		<0.0064	U		<0.0053	U		<0.019	U					**0.023**			<0.0064	U	
		VMP-53-30-012220-DUP	1/22/2020	<0.022	U		0.004	J		<0.0065	U		<0.0054	U		<0.019	U					**0.023**			<0.0065	U	
		VMP-53-30-042220	4/22/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0032**	J		**0.002**	J	
		VMP-53-30-072220	7/22/2020	<0.02	U		0.0022	J		<0.006	U		<0.005	U		<0.018	U					<0.012	J	U	<0.006	U	
		VMP-53-30-102820	10/28/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0094**	J		<0.0059	U	
		VMP-53-30-012121	1/21/2021	<0.02	U		0.0032	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0052**	J		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-53-30-020415	2/4/2015	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-53-30-050415	5/4/2015	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-53-30-072415	7/24/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-53-30-102815	10/28/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0032**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-53-30-012816	1/28/2016	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-53-30-042816	4/28/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.001**	J		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-53-30-052516-R	5/25/2016	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-53-30-072916	7/29/2016	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0045**			<0.032	U		<0.0059	U		<0.0059	U	
		VMP-53-30-102516	10/25/2016	<0.011	U		<0.017	U		<0.017	U		<0.0074	U		**0.0012**	J		<0.074	U		<0.014	U		<0.014	U	
		VMP-53-30-120916	12/9/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-53-30-012317	1/23/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-30-012317-Dup	1/23/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-30-042017	4/20/2017	<0.0048	U		<0.0078	U		**0.033**		J	<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-53-30-042017-DUP	4/20/2017	<0.0047	U		<0.0076	U		<0.0075	U	UJ	<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-53-30-071917	7/19/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-30-071917-DUP	7/19/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	30 ft	VMP-53-30-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-53-30-012218	1/22/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-30-032918	3/29/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-30-041018	4/10/2018	<0.0046	U		<0.0074	U		**0.0013**	J		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-53-30-072518	7/25/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0015**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-53-30-102318	10/23/2018	<0.0052	U		<0.0084	U		**0.0014**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-53-30-013119	1/31/2019	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-53-30-050319	5/3/2019	<0.054	U		<0.087	U		<0.086	U		<0.037	U		**0.021**	J		<0.38	U		<0.069	U		<0.069	U	
		VMP-53-30-071919	7/19/2019	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.014**			<0.038	U		<0.0071	U		<0.0071	U	
		VMP-53-30-101819	10/18/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.0053	U		<0.0085	U		<0.0084	U		**0.0013**	J		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-53-30-012220	1/22/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-53-30-012220-DUP	1/22/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-53-30-042220	4/22/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-53-30-072220	7/22/2020	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-53-30-102820	10/28/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-53-30-012121	1/21/2021	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00032**	J		<0.036	U		<0.0066	U		<0.0066	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-53-30-020415	2/4/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-30-050415	5/4/2015	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-53-30-072415	7/24/2015	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-53-30-102815	10/28/2015	<0.008	U		<0.0083	U		**0.0015**	J		<0.0073	U		0.0083			<0.0038	U		0.0044	J		**0.002**	J	
		VMP-53-30-012816	1/28/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0011	J		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-53-30-042816	4/28/2016	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		<0.0072	U		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-53-30-052516-R	5/25/2016	<0.007	U		0.0014	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-53-30-072916	7/29/2016	<0.0058	U		0.0014	J		<0.0053	U		<0.0053	U		0.0025	J		<0.0028	U		0.0012	J		<0.0047	U	
		VMP-53-30-102516	10/25/2016	<0.013	U		<0.014	U		<0.012	U		<0.012	U		<0.012	U		<0.0064	U		0.0087	J		**0.0031**	J	
		VMP-53-30-120916	12/9/2016	<0.0077	U		0.0015	J		<0.007	U		<0.007	U		0.0098	J0	J	<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-53-30-012317	1/23/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.0013	J		<0.0031	U		0.00076	J		<0.0053	U	
		VMP-53-30-012317-Dup	1/23/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0012	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-30-042017	4/20/2017	**0.0016**	J		<0.0064	U		<0.0056	U		<0.0056	U		0.011			<0.0029	U		<0.005	U		<0.005	U	
		VMP-53-30-042017-DUP	4/20/2017	<0.006	U		0.0012	J		<0.0054	U		<0.0054	U		0.014			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-53-30-071917	7/19/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0013	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-30-071917-DUP	7/19/2017	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.00066	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-30-110117	11/1/2017	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-53-30-012218	1/22/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0018	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-30-032918	3/29/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0062			<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-30-041018	4/10/2018	<0.0058	U		0.0016	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-53-30-072518	7/25/2018	<0.0066	U		0.0014	J		<0.0061	U		<0.0061	U		0.0022	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-30-102318	10/23/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-30-013119	1/31/2019	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-53-30-050319	5/3/2019	<0.068	U		<0.071	U		<0.062	U		<0.062	U		33	E J0	J	<0.032	U		<0.055	U		<0.055	U	
		VMP-53-30-071919	7/19/2019	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0017	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-30-101819	10/18/2019	<0.0063	U		0.0014	J		<0.0058	U		<0.0058	U		0.0021	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-53-30-101819-DUP	10/18/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.0016	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-53-30-012220	1/22/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-53-30-012220-DUP	1/22/2020	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-53-30-042220	4/22/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0024	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-53-30-072220	7/22/2020	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-53-30-102820	10/28/2020	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-53-30-012121	1/21/2021	<0.0065	U		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	**0.006**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-5-050415	5/4/2015	**0.014**	J		**0.002**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0024**	J	
		VMP-54-5-072415	7/24/2015	**0.028**	J		**0.0019**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.015	U		**0.005**	J	
		VMP-54-5-102715	10/27/2015	**0.024**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0047**	J	
		VMP-54-5-012816	1/28/2016	**0.026**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0036**	J	
		VMP-54-5-042916	4/29/2016	**0.012**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0033**	J	
		VMP-54-5-080116	8/1/2016	**0.027**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0061**	J	
		VMP-54-5-102816	10/28/2016	**0.053**			**0.0009**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0085**	J	
		VMP-54-5-012417	1/24/2017	**0.042**			<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0031**	J	
		VMP-54-5-042017	4/20/2017	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-5-071917	7/19/2017	**0.0076**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-54-5-102617	10/26/2017	**0.018**	J		<0.0035	J	U	<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		0.015			<0.013	U	
		VMP-54-5-012218	1/22/2018	<0.028	J	U	<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-54-5-041818	4/18/2018	**0.012**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0024**	J	
		VMP-54-5-072518	7/25/2018	**0.041**			<0.0042	U		<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		<0.016	U	
		VMP-54-5-102418	10/24/2018	**0.02**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0032**	J	
		VMP-54-5-011819	1/18/2019	**0.0072**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-54-5-042419	4/24/2019	**0.013**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-54-5-072219	7/22/2019	**0.038**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0057**	J	
		VMP-54-5-102219	10/22/2019	**0.0058**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-5-012220	1/22/2020	**0.0073**	J		<0.0054	U		<0.011	U		<0.017	U		<0.065	U		<0.0037	U		<0.016	U		<0.02	U	
		VMP-54-5-042720	4/27/2020	**0.014**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.004	J		**0.0018**	J	
		VMP-54-5-052120	5/21/2020	**0.025**	J		**0.001**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-54-5-072220	7/22/2020	**0.012**	J		**0.00036**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0028**	J	
		VMP-54-5-102820	10/28/2020	**0.015**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0021**	J	
		VMP-54-5-012821	1/28/2021	**0.0067**	J		**0.00072**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.034	U		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-54-10-050415	5/4/2015	**0.011**	J		<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-54-10-072415	7/24/2015	**0.058**			**0.0016**	J		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		<0.016	U		**0.0085**	J	
		VMP-54-10-102715	10/27/2015	<0.03	J	U	<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0025**	J	
		VMP-54-10-012816	1/28/2016	**0.018**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		0.0052	J		**0.0033**	J	
		VMP-54-10-042916	4/29/2016	<0.034	J	U	**0.002**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-54-10-080116	8/1/2016	**0.018**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-54-10-102816	10/28/2016	**0.016**	J		<0.0044	U		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0048**	J	
		VMP-54-10-012417	1/24/2017	**0.014**	J		<0.0046	J	U	<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-54-10-042017	4/20/2017	**0.032**			<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0057**	J	
		VMP-54-10-071917	7/19/2017	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0023**	J	
		VMP-54-10-102617	10/26/2017	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-54-10-012218	1/22/2018	<0.028	J	U	<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-54-10-041818	4/18/2018	**0.025**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0046**	J	
		VMP-54-10-072518	7/25/2018	**0.012**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0032**	J	
		VMP-54-10-102418	10/24/2018	**0.028**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0038**	J	
		VMP-54-10-011819	1/18/2019	**0.012**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-54-10-042419	4/24/2019	**0.014**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-54-10-072219	7/22/2019	**0.0091**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-54-10-102219	10/22/2019	**0.015**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-54-10-031220	3/12/2020	**0.0075**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		0.0044	J		<0.015	U	
		VMP-54-10-042720	4/27/2020	**0.011**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.002**	J	
		VMP-54-10-072220	7/22/2020	**0.014**	J		<0.0043	U		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-54-10-102820	10/28/2020	**0.019**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-10-012821	1/28/2021	<0.027	U		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.028	U		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-54-5-050415	5/4/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-54-5-072415	7/24/2015	<0.019	J	U	<0.0098	U		<0.0072	U		<0.013	U		<0.016	U		<0.0076	U		<0.032	U		<0.008	U	
		VMP-54-5-102715	10/27/2015	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-54-5-012816	1/28/2016	<0.018	J	U	<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0074	U	
		VMP-54-5-042916	4/29/2016	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-5-080116	8/1/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-54-5-102816	10/28/2016	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-54-5-012417	1/24/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-54-5-042017	4/20/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-54-5-071917	7/19/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-54-5-102617	10/26/2017	<0.014	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-54-5-012218	1/22/2018	<0.014	U	UJ	<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-54-5-041818	4/18/2018	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-54-5-072518	7/25/2018	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-54-5-102418	10/24/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-54-5-011819	1/18/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-54-5-042419	4/24/2019	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-54-5-072219	7/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-5-102219	10/22/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-54-5-012220	1/22/2020	<0.021	U		<0.01	U		<0.0077	U		<0.014	U		<0.018	U		<0.0082	U		<0.034	U		<0.0087	U	
		VMP-54-5-042720	4/27/2020	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0016**	J		<0.027	U		<0.0068	U	
		VMP-54-5-052120	5/21/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-54-5-072220	7/22/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.00036**	J		<0.026	U		<0.0066	U	
		VMP-54-5-102820	10/28/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0028**	J		<0.025	U		<0.0063	U	
		VMP-54-5-012821	1/28/2021	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.00087**	J		<0.023	U		<0.0057	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-54-10-050415	5/4/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-54-10-072415	7/24/2015	<0.02	J	U	<0.01	U		<0.0076	U		<0.014	U		<0.017	U		<0.008	U		**0.0055**	J	J	<0.0085	U	
		VMP-54-10-102715	10/27/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-54-10-012816	1/28/2016	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-54-10-042916	4/29/2016	**0.0014**	J		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-54-10-080116	8/1/2016	**0.005**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-54-10-102816	10/28/2016	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-54-10-012417	1/24/2017	<0.018	J	U	<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-54-10-042017	4/20/2017	**0.0041**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-10-071917	7/19/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-54-10-102617	10/26/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-54-10-012218	1/22/2018	<0.015	U	UJ	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-54-10-041818	4/18/2018	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-54-10-072518	7/25/2018	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-54-10-102418	10/24/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-54-10-011819	1/18/2019	<0.013	U		<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		<0.0052	U		<0.022	U		<0.0056	U	
		VMP-54-10-042419	4/24/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-54-10-072219	7/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-10-102219	10/22/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-10-031220	3/12/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-10-042720	4/27/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-54-10-072220	7/22/2020	<0.017	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-54-10-102820	10/28/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.00056**	J		<0.026	U		<0.0064	U	
		VMP-54-10-012821	1/28/2021	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0015**	J		<0.024	U		<0.006	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0014**	J		<0.024	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-54-5-050415	5/4/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-54-5-072415	7/24/2015	<0.0054	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0027**	J		<0.0063	U		<0.0063	U	
		VMP-54-5-102715	10/27/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-54-5-012816	1/28/2016	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.003**	J		<0.0058	U		<0.0058	U	
		VMP-54-5-042916	4/29/2016	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-54-5-080116	8/1/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0044**	J		<0.0056	U		<0.0056	U	
		VMP-54-5-102816	10/28/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-54-5-012417	1/24/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-54-5-042017	4/20/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-54-5-071917	7/19/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-54-5-102617	10/26/2017	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-54-5-012218	1/22/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0023**	J		<0.0047	U		<0.0047	U	
		VMP-54-5-041818	4/18/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-54-5-072518	7/25/2018	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-54-5-102418	10/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-54-5-011819	1/18/2019	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-54-5-042419	4/24/2019	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0032**	J		<0.0046	U		<0.0046	U	
		VMP-54-5-072219	7/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-54-5-102219	10/22/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-54-5-012220	1/22/2020	<0.0058	U		<0.013	U		<0.01	U		<0.01	U		<0.01	U		<0.0083	U		<0.0068	U		<0.0068	U	
		VMP-54-5-042720	4/27/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-54-5-052120	5/21/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-54-5-072220	7/22/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-54-5-102820	10/28/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-54-5-012821	1/28/2021	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.003**	J		<0.0058	U		<0.0058	U	
		VMP-54-10-050415	5/4/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0024**	J		<0.006	U		<0.006	U	
		VMP-54-10-072415	7/24/2015	<0.0057	U		<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		**0.0031**	J		<0.0066	U		<0.0066	U	
		VMP-54-10-102715	10/27/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0033**	J		<0.0051	U		<0.0051	U	
		VMP-54-10-012816	1/28/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-54-10-042916	4/29/2016	**0.0028**	J		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0023**	J		<0.0058	U		<0.0058	U	
		VMP-54-10-080116	8/1/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.003**	J		<0.006	U		<0.006	U	
		VMP-54-10-102816	10/28/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0028**	J		<0.0056	U		<0.0056	U	
		VMP-54-10-012417	1/24/2017	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0026**	J		<0.0058	U		<0.0058	U	
		VMP-54-10-042017	4/20/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-54-10-071917	7/19/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		<0.0062	U		<0.005	U		<0.005	U	
		VMP-54-10-102617	10/26/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		<0.0055	U		<0.0045	U		<0.0045	U	
		VMP-54-10-012218	1/22/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-54-10-041818	4/18/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-54-10-072518	7/25/2018	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.003**	J		<0.0052	U		<0.0052	U	
		VMP-54-10-102418	10/24/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-54-10-011819	1/18/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-54-10-042419	4/24/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0031**	J		<0.0053	U		<0.0053	U	
		VMP-54-10-072219	7/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		<0.0061	U		<0.005	U		<0.005	U	
		VMP-54-10-102219	10/22/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-54-10-031220	3/12/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-54-10-042720	4/27/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-54-10-072220	7/22/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0036**	J		<0.0054	U		<0.0054	U	
		VMP-54-10-102820	10/28/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-54-10-012821	1/28/2021	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.003**	J		<0.0046	U		<0.0046	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-5-050415	5/4/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-54-5-072415	7/24/2015	<0.0062	U		<0.0062	U		<0.0062	U		<0.054	J	U	<0.0072	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-54-5-102715	10/27/2015	<0.0046	U		<0.0046	U		<0.0046	U		**0.0026**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-54-5-012816	1/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-54-5-042916	4/29/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-5-080116	8/1/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-54-5-102816	10/28/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-5-012417	1/24/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-5-042017	4/20/2017	<0.005	U		<0.005	U		<0.005	U		**0.0031**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-5-071917	7/19/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0026**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-54-5-102617	10/26/2017	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-54-5-012218	1/22/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U	UJ	<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-54-5-041818	4/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-54-5-072518	7/25/2018	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-5-102418	10/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		**0.0036**	J	
		VMP-54-5-011819	1/18/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-54-5-042419	4/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-54-5-072219	7/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-5-102219	10/22/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-54-5-012220	1/22/2020	<0.0066	U		<0.0066	U		<0.0066	U		<0.058	U		<0.0077	U		<0.0076	U		<0.0076	U		<0.024	U	
		VMP-54-5-042720	4/27/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0016**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-5-052120	5/21/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-54-5-072220	7/22/2020	<0.005	U		<0.005	U		<0.005	U		**0.042**	J		<0.0059	U		<0.0058	U		<0.0058	U		**0.004**	J	
		VMP-54-5-102820	10/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-54-5-012821	1/28/2021	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-10-050415	5/4/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-54-10-072415	7/24/2015	<0.0065	U		<0.0065	U		<0.0065	U		**0.0079**	J	J	<0.0076	U		<0.0075	U		<0.0075	U		<0.024	U	
		VMP-54-10-102715	10/27/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-10-012816	1/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-54-10-042916	4/29/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-10-080116	8/1/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-54-10-102816	10/28/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-54-10-012417	1/24/2017	<0.0057	U		<0.0057	U		<0.0057	U		**0.0016**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-10-042017	4/20/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-10-071917	7/19/2017	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-10-102617	10/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-54-10-012218	1/22/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U	UJ	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-10-041818	4/18/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-10-072518	7/25/2018	<0.0051	U		<0.0051	U		<0.0051	U		**0.0022**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-54-10-102418	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0023**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-10-011819	1/18/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-54-10-042419	4/24/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-10-072219	7/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-10-102219	10/22/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-10-031220	3/12/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-10-042720	4/27/2020	<0.0053	U		<0.0053	U		<0.0053	U		**0.0018**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-54-10-072220	7/22/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-10-102820	10/28/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-10-012821	1/28/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	0.0059	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-54-5-050415	5/4/2015	0.0044	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0011**	J	
		VMP-54-5-072415	7/24/2015	<0.012		U	<0.0068	U		<0.0076	U		<0.012	U		<0.011	U		**0.0022**	J		<0.066	U		**0.003**	J	
		VMP-54-5-102715	10/27/2015	0.0053	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-54-5-012816	1/28/2016	0.0046	J		<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-54-5-042916	4/29/2016	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0013**	J		<0.053	U		**0.0014**	J	
		VMP-54-5-080116	8/1/2016	0.009	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		**0.0014**	J	
		VMP-54-5-102816	10/28/2016	0.012			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-5-012417	1/24/2017	0.0082	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-54-5-042017	4/20/2017	0.0053	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-54-5-071917	7/19/2017	0.017			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-5-102617	10/26/2017	0.033			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-54-5-012218	1/22/2018	0.071	J0	J	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-54-5-041818	4/18/2018	0.0061	J		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		**0.0026**	J		<0.052	U		**0.0016**	J	
		VMP-54-5-072518	7/25/2018	0.016			<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.057	U		<0.0047	U	
		VMP-54-5-102418	10/24/2018	0.01			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-5-011819	1/18/2019	0.0018	J		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-54-5-042419	4/24/2019	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-54-5-072219	7/22/2019	0.008	J	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-5-102219	10/22/2019	0.01			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-54-5-012220	1/22/2020	<0.013	U		<0.0073	U		<0.0082	U		<0.013	U		<0.012	U		<0.0069	U		<0.071	U		<0.0059	U	
		VMP-54-5-042720	4/27/2020	<0.0099	U		<0.0057	U		0.0027	J		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0014**	J	
		VMP-54-5-052120	5/21/2020	<0.0091	U		**0.0019**	J		0.0019	J		<0.0093	U		<0.0084	U		**0.0016**	J		<0.052	U		**0.002**	J	
		VMP-54-5-072220	7/22/2020	0.018			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-54-5-102820	10/28/2020	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-5-012821	1/28/2021	0.0034	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-54-10-050415	5/4/2015	0.0039	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-54-10-072415	7/24/2015	<0.012	J	U	<0.0071	U		<0.0081	U		<0.013	U		<0.012	U		<0.0067	U		<0.07	U		<0.0058	U	
		VMP-54-10-102715	10/27/2015	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-54-10-012816	1/28/2016	0.0046	J		**0.002**	J		0.0024	J		<0.011	U		<0.0099	U		**0.003**	J		<0.06	U		**0.004**	J	
		VMP-54-10-042916	4/29/2016	<0.011	U		**0.011**			0.0016	J		<0.011	U		<0.01	U		**0.018**			<0.062	U		**0.018**		
		VMP-54-10-080116	8/1/2016	0.012			<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-54-10-102816	10/28/2016	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	U		<0.0049	U	
		VMP-54-10-012417	1/24/2017	0.081			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-54-10-042017	4/20/2017	0.0092	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-10-071917	7/19/2017	0.016			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-10-102617	10/26/2017	0.0072	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-54-10-012218	1/22/2018	0.12	J0	J	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-54-10-041818	4/18/2018	0.0093			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.00049**	J	
		VMP-54-10-072518	7/25/2018	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-54-10-102418	10/24/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-54-10-011819	1/18/2019	0.0032	J		<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-54-10-042419	4/24/2019	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-54-10-072219	7/22/2019	<0.0093	ND,UJ	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0023**	J		<0.053	U		<0.0044	U	
		VMP-54-10-102219	10/22/2019	0.011			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-10-031220	3/12/2020	0.0038	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0039**	J		<0.053	U		**0.011**		
		VMP-54-10-042720	4/27/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-54-10-072220	7/22/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-54-10-102820	10/28/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-10-012821	1/28/2021	<0.022	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.022	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					**0.13**			<0.0062	U	
		VMP-54-5-050415	5/4/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.0062**	J		<0.0063	U	
		VMP-54-5-072415	7/24/2015	**0.0016**	J	J	<0.018	J	U	<0.0076	U		<0.0064	U		<0.0056	U					**0.0038**	J	J	<0.0076	U	
		VMP-54-5-102715	10/27/2015	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.0042	U					<0.011	U		<0.0057	U	
		VMP-54-5-012816	1/28/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0052	U					**0.0028**	J		<0.007	U	
		VMP-54-5-042916	4/29/2016	**0.001**	J		<0.014	U		<0.0061	U		<0.005	U		<0.0044	U					**0.0096**	J		<0.0061	U	
		VMP-54-5-080116	8/1/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.02	U					**0.0069**	J		<0.0068	U	
		VMP-54-5-102816	10/28/2016	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.013**			<0.0061	U	
		VMP-54-5-012417	1/24/2017	**0.0016**	J		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0074**	J		<0.0058	U	
		VMP-54-5-042017	4/20/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.014**			<0.0062	U	
		VMP-54-5-071917	7/19/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.036**			<0.006	U	
		VMP-54-5-102617	10/26/2017	<0.018	U		0.01	J		<0.0053	U		<0.0044	U		<0.016	U					**0.025**			<0.0053	U	
		VMP-54-5-012218	1/22/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.068**			<0.0057	U	
		VMP-54-5-041818	4/18/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	J	U	<0.006	U	
		VMP-54-5-072518	7/25/2018	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0079**	J		<0.0065	U	
		VMP-54-5-102418	10/24/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0075**	J		<0.006	U	
		VMP-54-5-011819	1/18/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-54-5-042419	4/24/2019	<0.019	U		<0.013	U		<0.0056	U		<0.0047	ND,UJ	UJ	<0.016	U					<0.011	U		<0.0056	U	
		VMP-54-5-072219	7/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-54-5-102219	10/22/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-54-5-012220	1/22/2020	<0.027	U		<0.02	U		<0.0082	U		<0.0069	U		<0.024	U					**0.014**	J		<0.0082	U	
		VMP-54-5-042720	4/27/2020	<0.022	U		0.0035	J		**0.0009**	J		<0.0054	U		<0.019	U					**0.0045**	J		**0.0027**	J	
		VMP-54-5-052120	5/21/2020	<0.02	U		0.0035	J		<0.0059	U		<0.005	U		<0.017	U					**0.0034**	J		**0.00092**	J	
		VMP-54-5-072220	7/22/2020	<0.021	U		0.0064	J		<0.0062	U		<0.0052	U		<0.018	U					**0.012**	J		<0.0062	U	
		VMP-54-5-102820	10/28/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.012**			<0.006	U	
		VMP-54-5-012821	1/28/2021	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0044**	J		<0.0054	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.021**			<0.0071	U	
		VMP-54-10-050415	5/4/2015	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					**0.0041**	J		<0.0073	U	
		VMP-54-10-072415	7/24/2015	**0.0026**	J	J	<0.019	U		<0.0081	U		<0.0067	U		<0.0059	U					**0.0072**	J	J	<0.0081	U	
		VMP-54-10-102715	10/27/2015	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					<0.012	U		<0.0062	U	
		VMP-54-10-012816	1/28/2016	<0.023	U		<0.017	U		**0.0021**	J		<0.0058	U		<0.0051	U					**0.009**	J		**0.0062**	J	
		VMP-54-10-042916	4/29/2016	<0.024	U		0.0035	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.0016**	J		<0.0071	U	
		VMP-54-10-080116	8/1/2016	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					**0.0098**	J		<0.0073	U	
		VMP-54-10-102816	10/28/2016	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U		<0.014	U		<0.014	U		<0.0068	U	
		VMP-54-10-012417	1/24/2017	<0.024	U		0.013	J		<0.0071	U		<0.0059	U		<0.021	U					**0.026**			<0.0071	U	
		VMP-54-10-042017	4/20/2017	<0.02	U		0.0062	J		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-54-10-071917	7/19/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.045**			<0.0061	U	
		VMP-54-10-102617	10/26/2017	<0.018	U		0.0027	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-54-10-012218	1/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.012**			<0.0058	U	
		VMP-54-10-041818	4/18/2018	**0.0017**	J		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	J	U	<0.0059	U	
		VMP-54-10-072518	7/25/2018	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-54-10-102418	10/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.005**	J		<0.0058	U	
		VMP-54-10-011819	1/18/2019	<0.018	U		0.0021	J		<0.0053	U		<0.0044	U		<0.016	U					<0.01	U		<0.0053	U	
		VMP-54-10-042419	4/24/2019	<0.022	U		0.0052	J		**0.0026**	J		<0.0054	ND,UJ	UJ	<0.019	U					<0.013	U		**0.0069**		
		VMP-54-10-072219	7/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-54-10-102219	10/22/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-54-10-031220	3/12/2020	<0.02	U		0.0072	J		<0.0061	U		<0.0051	U		<0.018	U					**0.0061**	J		<0.0061	U	
		VMP-54-10-042720	4/27/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0037**	J		<0.0066	U	
		VMP-54-10-072220	7/22/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.004**	J		<0.0066	U	
		VMP-54-10-102820	10/28/2020	<0.02	U		<0.015	U		**0.00063**	J		<0.0051	U		<0.018	U					**0.012**	J		**0.0017**	J	
		VMP-54-10-012821	1/28/2021	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0041**	J		<0.0056	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.002**	J		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0069	U		<0.0069	U	
		VMP-54-5-050415	5/4/2015	<0.0055	U		<0.0088	U		**0.0023**	J		<0.0038	U		**0.0041**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-54-5-072415	7/24/2015	<0.0066	U		<0.011	U		**0.0056**	J		<0.0046	U		**0.0075**			<0.046	U		<0.0085	U		<0.0085	U	
		VMP-54-5-102715	10/27/2015	<0.005	U		<0.008	U		**0.004**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-54-5-012816	1/28/2016	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-54-5-042916	4/29/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0013**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-54-5-080116	8/1/2016	<0.0059	U		<0.0095	U		**0.0058**	J		<0.0041	U		**0.0012**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-54-5-102816	10/28/2016	<0.0053	U		<0.0085	U		**0.003**	J		**0.002**	J		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	
		VMP-54-5-012417	1/24/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.00046**	J		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-54-5-042017	4/20/2017	<0.0054	U		<0.0086	U		**0.0015**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-54-5-071917	7/19/2017	<0.0052	U		<0.0084	U		**0.0043**	J		<0.0036	U		**0.00062**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-54-5-102617	10/26/2017	<0.0046	U		<0.0074	U		**0.0019**	J		<0.0032	U		**0.0013**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-54-5-012218	1/22/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00078**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-54-5-041818	4/18/2018	<0.0052	U		<0.0083	U		**0.001**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-54-5-072518	7/25/2018	<0.0057	U		<0.0091	U		**0.0054**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-5-102418	10/24/2018	<0.0052	U		<0.0084	U		**0.0033**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-54-5-011819	1/18/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-54-5-042419	4/24/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U	UJ	<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-54-5-072219	7/22/2019	<0.0053	U		<0.0085	U		**0.0039**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-54-5-102219	10/22/2019	<0.0055	U		<0.0088	U		**0.0026**	J		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-54-5-012220	1/22/2020	<0.0071	U		<0.011	U		<0.011	U		<0.0049	U		<0.0063	U		<0.05	U		<0.0091	U		<0.0091	U	
		VMP-54-5-042720	4/27/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0012**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-5-052120	5/21/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0029**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-54-5-072220	7/22/2020	<0.0054	U		<0.0087	U		**0.0048**	J		<0.0037	U		**0.0034**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-54-5-102820	10/28/2020	<0.0052	U		<0.0083	U		**0.0017**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-54-5-012821	1/28/2021	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	J	U	<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-10-050415	5/4/2015	<0.0063	U		<0.01	U		**0.0017**	J		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-54-10-072415	7/24/2015	<0.007	U		<0.011	U		**0.0034**	J		<0.0048	U		<0.0062	U		<0.049	U		<0.009	U		<0.009	U	
		VMP-54-10-102715	10/27/2015	<0.0054	U		<0.0086	U		**0.0039**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-54-10-012816	1/28/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-54-10-042916	4/29/2016	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.037**			<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-10-080116	8/1/2016	<0.0063	U		<0.01	U		**0.003**	J		<0.0044	U		**0.001**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-54-10-102816	10/28/2016	<0.0059	U		<0.0095	U		**0.0038**	J		<0.0041	U		<0.0052	U		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-54-10-012417	1/24/2017	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		**0.0025**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-10-042017	4/20/2017	<0.0053	U		<0.0085	U		**0.0012**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-54-10-071917	7/19/2017	<0.0053	U		<0.0086	U		**0.0019**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-54-10-102617	10/26/2017	<0.0048	U		<0.0077	U		**0.0032**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-54-10-012218	1/22/2018	<0.005	U		<0.0081	U		**0.0017**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-10-041818	4/18/2018	<0.0051	U		<0.0082	U		**0.00072**	J		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-54-10-072518	7/25/2018	<0.0054	U		<0.0088	U		**0.003**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-54-10-102418	10/24/2018	<0.0051	U		<0.0082	U		**0.0037**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-10-011819	1/18/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.004	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-54-10-042419	4/24/2019	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U	UJ	<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-10-072219	7/22/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.021**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-54-10-102219	10/22/2019	<0.0053	U		<0.0085	U		**0.0022**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-54-10-031220	3/12/2020	<0.0053	U		<0.0085	U		**0.0015**	J		<0.0036	U		**0.00074**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-54-10-042720	4/27/2020	<0.0057	U		<0.0092	U		**0.0013**	J		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-54-10-072220	7/22/2020	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-54-10-102820	10/28/2020	<0.0053	U		<0.0085	U		**0.0028**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-54-10-012821	1/28/2021	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-54-5-020515	2/5/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-54-5-050415	5/4/2015	<0.0069	U		0.0015	J		<0.0063	U		<0.0063	U		0.00082	J		<0.0033	U		0.0012	J		<0.0056	U	
		VMP-54-5-072415	7/24/2015	<0.0084	U		<0.0087	U		<0.0076	U		<0.0076	U		0.0023	J		<0.004	U		0.0036	J		<0.0068	U	
		VMP-54-5-102715	10/27/2015	<0.0063	U		<0.0065	J	U	<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-54-5-012816	1/28/2016	<0.0077	U		0.0019	J		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-54-5-042916	4/29/2016	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-5-080116	8/1/2016	<0.0074	U		0.0021	J		<0.0068	U		<0.0068	U		0.0052	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-54-5-102816	10/28/2016	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0027	J		<0.0054	U	
		VMP-54-5-012417	1/24/2017	<0.0063	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-54-5-042017	4/20/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.00074	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-54-5-071917	7/19/2017	<0.0066	U		0.0013	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-5-102617	10/26/2017	<0.0058	U		0.0012	J		<0.0053	U		<0.0053	U		0.0088			<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-54-5-012218	1/22/2018	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0022	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-54-5-041818	4/18/2018	<0.0065	U		0.0015	J		<0.006	U		<0.006	U		0.00088	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-5-072518	7/25/2018	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-54-5-102418	10/24/2018	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0083			<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-5-011819	1/18/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0013	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-54-5-042419	4/24/2019	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-54-5-072219	7/22/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0028	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-5-102219	10/22/2019	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-54-5-012220	1/22/2020	<0.009	U		<0.0094	U		<0.0082	U		<0.0082	U		<0.0078	U		<0.0043	U		<0.0073	U		<0.0073	U	
		VMP-54-5-042720	4/27/2020	<0.0071	U		0.0011	J		**0.0044**	J		**0.0026**	J		<0.0062	U		<0.0034	U		0.0014	J		**0.0016**	J	
		VMP-54-5-052120	5/21/2020	<0.0065	U		0.0018	J		**0.0049**	J		**0.0018**	J		0.0074			<0.0031	U		0.0079			**0.0027**	J	
		VMP-54-5-072220	7/22/2020	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-54-5-102820	10/28/2020	<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-5-012821	1/28/2021	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
	10 ft	VMP-54-10-020515	2/5/2015	<0.0078	U		<0.0081	U		<0.0071	J	U	<0.0071	U		0.0018	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-54-10-050415	5/4/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0039	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-54-10-072415	7/24/2015	<0.0088	U		<0.0092	U		<0.0081	U		<0.0081	U		0.0014	J		<0.0042	U		<0.0071	U		<0.0071	U	
		VMP-54-10-102715	10/27/2015	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-54-10-012816	1/28/2016	<0.0076	U		<0.008	U		**0.006**	J		<0.007	U		0.0042	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-54-10-042916	4/29/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.053			<0.0037	U		0.021			**0.0059**	J	
		VMP-54-10-080116	8/1/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0011	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-54-10-102816	10/28/2016	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-54-10-012417	1/24/2017	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-54-10-042017	4/20/2017	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.028			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-10-071917	7/19/2017	<0.0067	U		0.0013	J		<0.0061	U		<0.0061	U		0.0018	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-10-102617	10/26/2017	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		0.01			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-54-10-012218	1/22/2018	<0.0064	U		0.0011	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-54-10-041818	4/18/2018	<0.0064	U		0.0013	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-54-10-072518	7/25/2018	<0.0069	U		0.0019	J		<0.0063	U		<0.0063	U		0.002	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-54-10-102418	10/24/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-54-10-011819	1/18/2019	<0.0058	U		<0.006	U		<0.0053	U		<0.0053	U		0.0084			<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-54-10-042419	4/24/2019	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		0.015			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-54-10-072219	7/22/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0018	J		<0.0032	U		0.0043	J		<0.0054	U	
		VMP-54-10-102219	10/22/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-10-031220	3/12/2020	**0.0043**	J		0.0018	J		<0.0061	U		<0.0061	U		0.0063			<0.0032	U		0.00078	J		<0.0054	U	
		VMP-54-10-042720	4/27/2020	<0.0072	J	U	0.001	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-54-10-072220	7/22/2020	<0.0072	U		0.0015	J		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-54-10-102820	10/28/2020	<0.0067	U		0.0016	J		<0.0061	U		<0.0061	U		0.0019	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-10-012821	1/28/2021	<0.0062	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-54-10-012821-DUP	1/28/2021	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	**0.0085**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-54-20-050415	5/4/2015	**0.0086**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		<0.017	U	
		VMP-54-20-072415	7/24/2015	**0.018**	J		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		<0.014	U		**0.0027**	J	
		VMP-54-20-102715	10/27/2015	**0.024**	J		<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0044**	J	
		VMP-54-20-102715-DUP	10/27/2015	<0.028	J	U	<0.0037	J	U	<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0041**	J	
		VMP-54-20-012816	1/28/2016	**0.011**	J		<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		**0.0023**	J	
		VMP-54-20-050516	5/5/2016	<0.031	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-20-050516-DUP	5/5/2016	<0.033	J	U	<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-54-20-080116	8/1/2016	**0.016**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-54-20-102816	10/28/2016	**0.013**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-54-20-012417	1/24/2017	**0.013**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-54-20-042017	4/20/2017	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0035**	J	
		VMP-54-20-071917	7/19/2017	**0.021**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.004**	J	
		VMP-54-20-102617	10/26/2017	**0.019**	J		<0.0034	J	U	<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.012			<0.013	U	
		VMP-54-20-012218	1/22/2018	<0.027	U		<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-54-20-041818	4/18/2018	**0.046**			<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0026**	J	
		VMP-54-20-072518	7/25/2018	**0.011**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-54-20-102418	10/24/2018	**0.03**			**0.0017**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.043			**0.0039**	J	
		VMP-54-20-011819	1/18/2019	**0.013**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.0018**	J	
		VMP-54-20-042419	4/24/2019	**0.025**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-54-20-072219	7/22/2019	**0.011**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-54-20-102219	10/22/2019	**0.013**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-54-20-012220	1/22/2020	<0.031	U		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-54-20-042720	4/27/2020	**0.033**			<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0023**	J	
		VMP-54-20-072220	7/22/2020	**0.016**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-54-20-102820	10/28/2020	<0.03	J	U	<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-20-012821	1/28/2021	**0.017**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
	30 ft	VMP-54-30-021215	2/12/2015	**0.0066**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-54-30-050415	5/4/2015	**0.019**	J		**0.0015**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0044	J		**0.0059**	J	
		VMP-54-30-080315	8/3/2015	**0.029**	J		**0.0021**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U	UJ	<0.015	U	UJ	**0.0089**	J	
		VMP-54-30-102715	10/27/2015	<0.028	J	U	**0.0037**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		0.0054	J		**0.003**	J	
		VMP-54-30-012816	1/28/2016	**0.015**	J		**0.0016**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0083	J		**0.0034**	J	
		VMP-54-30-042916	4/29/2016	<0.031	J	U	<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-54-30-042916-DUP	4/29/2016	**0.0096**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-54-30-080116	8/1/2016	**0.076**			**0.0011**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.013**	J	
		VMP-54-30-102816	10/28/2016	**0.018**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-54-30-012417	1/24/2017	**0.011**	J		<0.0039	J	U	<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-54-30-012417-Dup	1/24/2017	**0.021**	J		**0.0016**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.01	J		**0.0017**	J	
		VMP-54-30-042017	4/20/2017	<0.028	J	U	<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.004**	J	
		VMP-54-30-071917	7/19/2017	**0.041**			<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0096**	J	
		VMP-54-30-102617	10/26/2017	**0.018**	J		**0.00056**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.0053	J		**0.0067**	J	
		VMP-54-30-102617-DUP	10/26/2017	**0.016**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0034	J		**0.0027**	J	
		VMP-54-30-012218	1/22/2018	<0.028	U		<0.0038	J	U	<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.0042	J		<0.014	U	
		VMP-54-30-041818	4/18/2018	**0.0084**	J		**0.00043**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		0.0056	J		<0.014	U	
		VMP-54-30-072518	7/25/2018	**0.025**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0043**	J	
		VMP-54-30-102418	10/24/2018	**0.012**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-54-30-011819	1/18/2019	**0.02**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-54-30-042419	4/24/2019	**0.029**			<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-54-30-072219	7/22/2019	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-54-30-102219	10/22/2019	**0.0093**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-54-30-012220	1/22/2020	<0.036	U		<0.0048	U		<0.01	U		<0.016	U		<0.059	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-54-30-042720	4/27/2020	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0068	J		<0.016	U	
		VMP-54-30-072220	7/22/2020	**0.023**	J		**0.0015**	J		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		0.0056	J		**0.0024**	J	
		VMP-54-30-102820	10/28/2020	**0.0084**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-54-30-012821	1/28/2021	**0.0059**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0033**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	**0.0028**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-54-20-050415	5/4/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-54-20-072415	7/24/2015	<0.019	J	U	<0.0096	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0079	U	
		VMP-54-20-102715	10/27/2015	**0.0049**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-54-20-102715-DUP	10/27/2015	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-54-20-012816	1/28/2016	<0.019	J	U	<0.0095	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-54-20-050516	5/5/2016	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U	UJ	<0.0067	U	
		VMP-54-20-050516-DUP	5/5/2016	**0.0013**	J		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U	UJ	<0.0073	U	
		VMP-54-20-080116	8/1/2016	**0.0039**	J		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-54-20-102816	10/28/2016	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-54-20-012417	1/24/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-54-20-042017	4/20/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-54-20-071917	7/19/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-54-20-102617	10/26/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-54-20-012218	1/22/2018	<0.014	U	UJ	<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-54-20-041818	4/18/2018	<0.014	J	U	<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		**0.0022**	J		<0.006	U	
		VMP-54-20-072518	7/25/2018	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-54-20-102418	10/24/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-54-20-011819	1/18/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-54-20-042419	4/24/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-54-20-072219	7/22/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-54-20-102219	10/22/2019	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-54-20-012220	1/22/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-54-20-042720	4/27/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-54-20-072220	7/22/2020	<0.016	U		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-54-20-102820	10/28/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.00085**	J		<0.026	U		<0.0066	U	
		VMP-54-20-012821	1/28/2021	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
	30 ft	VMP-54-30-021215	2/12/2015	**0.0033**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-54-30-050415	5/4/2015	**0.0026**	J		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-54-30-080315	8/3/2015	**0.0044**	J		<0.0097	U		<0.0071	U		<0.013	U		<0.016	U		**0.0029**	J		**0.0038**	J		<0.008	U	
		VMP-54-30-102715	10/27/2015	**0.012**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-54-30-012816	1/28/2016	<0.018	J	U	<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-54-30-042916	4/29/2016	**0.00071**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-54-30-042916-DUP	4/29/2016	**0.0012**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-54-30-080116	8/1/2016	**0.0055**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.002**	J		<0.028	U		<0.007	U	
		VMP-54-30-102816	10/28/2016	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0068	U	
		VMP-54-30-012417	1/24/2017	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-54-30-012417-Dup	1/24/2017	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-54-30-042017	4/20/2017	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0019**	J		<0.025	U		<0.0062	U	
		VMP-54-30-071917	7/19/2017	**0.0021**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0019**	J		<0.027	U		<0.0068	U	
		VMP-54-30-102617	10/26/2017	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-54-30-102617-DUP	10/26/2017	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-54-30-012218	1/22/2018	<0.015	U	UJ	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-54-30-041818	4/18/2018	<0.015	J	U	<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	U	
		VMP-54-30-072518	7/25/2018	<0.015	U		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0022**	J		**0.003**	J		<0.0064	U	
		VMP-54-30-102418	10/24/2018	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0012**	J		<0.024	U		<0.0061	U	
		VMP-54-30-011819	1/18/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-54-30-042419	4/24/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-54-30-072219	7/22/2019	**0.0033**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-54-30-102219	10/22/2019	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-54-30-012220	1/22/2020	<0.019	U		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-54-30-042720	4/27/2020	**0.0032**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.0045**	J		<0.027	U		<0.0068	U	
		VMP-54-30-072220	7/22/2020	**0.0018**	J		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0007**	J		<0.027	U		<0.0068	U	
		VMP-54-30-102820	10/28/2020	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0062**			<0.024	U		<0.0062	U	
		VMP-54-30-012821	1/28/2021	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0016**	J		<0.024	U		<0.0061	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-54-20-050415	5/4/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0029**	J		<0.0057	U		<0.0057	U	
		VMP-54-20-072415	7/24/2015	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0031**	J		<0.0062	U		<0.0062	U	
		VMP-54-20-102715	10/27/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-54-20-102715-DUP	10/27/2015	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-54-20-012816	1/28/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0036**	J		<0.0061	U		<0.0061	U	
		VMP-54-20-050516	5/5/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-54-20-050516-DUP	5/5/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		<0.0069	U		<0.0057	U		<0.0057	U	
		VMP-54-20-080116	8/1/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0032**	J		<0.0059	U		<0.0059	U	
		VMP-54-20-102816	10/28/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0031**	J		<0.0055	U		<0.0055	U	
		VMP-54-20-012417	1/24/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0032**	J		<0.0049	U		<0.0049	U	
		VMP-54-20-042017	4/20/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-54-20-071917	7/19/2017	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-54-20-102617	10/26/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-54-20-012218	1/22/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-54-20-041818	4/18/2018	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0032**	J		<0.0047	U		<0.0047	U	
		VMP-54-20-072518	7/25/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0049	U		<0.0049	U	
		VMP-54-20-102418	10/24/2018	**0.0027**	J		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-54-20-011819	1/18/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-54-20-042419	4/24/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0033**	J		<0.0045	U		<0.0045	U	
		VMP-54-20-072219	7/22/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-54-20-102219	10/22/2019	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0031**	J		<0.0053	U		<0.0053	U	
		VMP-54-20-012220	1/22/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-54-20-042720	4/27/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-54-20-072220	7/22/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0041**	J		<0.0053	U		<0.0053	U	
		VMP-54-20-102820	10/28/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-54-20-012821	1/28/2021	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0033**	J		<0.0048	U		<0.0048	U	
	30 ft	VMP-54-30-021215	2/12/2015	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-54-30-050415	5/4/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0027**	J		<0.0059	U		<0.0059	U	
		VMP-54-30-080315	8/3/2015	<0.0053	U		<0.012	U		<0.0093	U		<0.0093	U		<0.0093	U		**0.0036**	J		<0.0062	U		**0.00089**	J	
		VMP-54-30-102715	10/27/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-54-30-012816	1/28/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0028**	J		<0.0059	U		<0.0059	U	
		VMP-54-30-042916	4/29/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-54-30-042916-DUP	4/29/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-54-30-080116	8/1/2016	**0.0027**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.003**	J		<0.0054	U		<0.0054	U	
		VMP-54-30-102816	10/28/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-54-30-012417	1/24/2017	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-54-30-012417-Dup	1/24/2017	**0.00092**	J		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-54-30-042017	4/20/2017	<0.0041	U		<0.0092	U		<0.0072	U		0.00054	J		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-54-30-071917	7/19/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-54-30-102617	10/26/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-54-30-102617-DUP	10/26/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-54-30-012218	1/22/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-54-30-041818	4/18/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-54-30-072518	7/25/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-54-30-102418	10/24/2018	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-54-30-011819	1/18/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-54-30-042419	4/24/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-54-30-072219	7/22/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-54-30-102219	10/22/2019	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0025**	J		<0.0058	U		<0.0058	U	
		VMP-54-30-012220	1/22/2020	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		<0.0075	U		<0.0061	U		<0.0061	U	
		VMP-54-30-042720	4/27/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-54-30-072220	7/22/2020	**0.0025**	J		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-54-30-102820	10/28/2020	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-54-30-012821	1/28/2021	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0028**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-54-20-050415	5/4/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.0025**	J		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-54-20-072415	7/24/2015	<0.006	U		<0.006	U		<0.006	U		**0.0069**	J	J	<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-54-20-102715	10/27/2015	<0.0046	U		<0.0046	U		<0.0046	U		**0.0032**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-54-20-102715-DUP	10/27/2015	<0.0046	U		<0.0046	U		<0.0046	U		**0.0026**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-54-20-012816	1/28/2016	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-54-20-050516	5/5/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-54-20-050516-DUP	5/5/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-54-20-080116	8/1/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-20-102816	10/28/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-54-20-012417	1/24/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-54-20-042017	4/20/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-20-071917	7/19/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-20-102617	10/26/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-54-20-012218	1/22/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U	UJ	<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-54-20-041818	4/18/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-54-20-072518	7/25/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-54-20-102418	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		**0.0019**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-20-011819	1/18/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-54-20-042419	4/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-54-20-072219	7/22/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-20-102219	10/22/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-20-012220	1/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-54-20-042720	4/27/2020	<0.005	U		<0.005	U		<0.005	U		**0.0016**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-20-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-20-102820	10/28/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-54-20-012821	1/28/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
	30 ft	VMP-54-30-021215	2/12/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-30-050415	5/4/2015	<0.0057	U		<0.0057	U		<0.0057	U		**0.0026**	J		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-30-080315	8/3/2015	<0.0061	U		<0.0061	U		<0.0061	U		<0.054	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-54-30-102715	10/27/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0027**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-30-012816	1/28/2016	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-30-042916	4/29/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-54-30-042916-DUP	4/29/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-54-30-080116	8/1/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-54-30-102816	10/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-54-30-012417	1/24/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-30-012417-Dup	1/24/2017	<0.0044	U		<0.0044	U		<0.0044	U		**0.0029**	J		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-54-30-042017	4/20/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-30-071917	7/19/2017	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-54-30-102617	10/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-54-30-102617-DUP	10/26/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-54-30-012218	1/22/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U	UJ	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-30-041818	4/18/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-30-072518	7/25/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-54-30-102418	10/24/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-30-011819	1/18/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-54-30-042419	4/24/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-54-30-072219	7/22/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-54-30-102219	10/22/2019	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-54-30-012220	1/22/2020	<0.006	U		<0.006	U		<0.006	U		<0.052	U		<0.007	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-54-30-042720	4/27/2020	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		**0.0033**	J	
		VMP-54-30-072220	7/22/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0023**	J		<0.006	U		<0.0059	U		<0.0059	U		**0.0026**	J	
		VMP-54-30-102820	10/28/2020	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-54-30-012821	1/28/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	0.0097			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-54-20-050415	5/4/2015	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-54-20-072415	7/24/2015	<0.011	J	U	<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-54-20-102715	10/27/2015	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		**0.0025**	J		<0.05	U		**0.0054**		
		VMP-54-20-102715-DUP	10/27/2015	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		**0.0016**	J		<0.05	U		**0.0058**		
		VMP-54-20-012816	1/28/2016	<0.011	U		<0.0065	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-54-20-050516	5/5/2016	<0.0097	U		**0.0018**	J		0.0016	J		<0.0099	U		<0.009	U		**0.0019**	J		<0.055	U		**0.0022**	J	
		VMP-54-20-050516-DUP	5/5/2016	<0.01	U		**0.0023**	J		0.0018	J		<0.011	U		<0.0098	U		**0.0021**	J		<0.06	U		**0.0025**	J	
		VMP-54-20-080116	8/1/2016	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-54-20-102816	10/28/2016	<0.01	J	U	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-54-20-012417	1/24/2017	0.021			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-20-042017	4/20/2017	<0.0094	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-54-20-071917	7/19/2017	0.023			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-54-20-102617	10/26/2017	0.026			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-54-20-012218	1/22/2018	0.012	J0	J	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-54-20-041818	4/18/2018	0.0069	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-54-20-072518	7/25/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-54-20-102418	10/24/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0017**	J		<0.05	U		**0.013**		
		VMP-54-20-011819	1/18/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-54-20-042419	4/24/2019	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-54-20-072219	7/22/2019	0.011	J0	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-54-20-102219	10/22/2019	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-54-20-012220	1/22/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-54-20-042720	4/27/2020	0.0052	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-54-20-072220	7/22/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-54-20-102820	10/28/2020	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		<0.0045	U	
		VMP-54-20-012821	1/28/2021	0.0057	J		<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
	30 ft	VMP-54-30-021215	2/12/2015	<0.01		U	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-30-050415	5/4/2015	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		**0.00091**	J	
		VMP-54-30-080315	8/3/2015	0.0062	J	J	<0.0067	U		<0.0076	U		<0.012	U		<0.011	U		**0.0028**	J		<0.066	U		<0.0054	U	
		VMP-54-30-102715	10/27/2015	0.011			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-54-30-012816	1/28/2016	0.0043	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-54-30-042916	4/29/2016	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0013**	J	
		VMP-54-30-042916-DUP	4/29/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0014**	J	
		VMP-54-30-080116	8/1/2016	0.011			<0.0058	U		0.0033	J		<0.01	U		<0.0094	U		**0.0031**	J		<0.057	U		**0.0015**	J	
		VMP-54-30-102816	10/28/2016	<0.0098	J	U	<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-54-30-012417	1/24/2017	0.0095		J	<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-30-012417-Dup	1/24/2017	0.038		J	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		**0.0033**	J		<0.047	U		**0.0029**	J	
		VMP-54-30-042017	4/20/2017	<0.009	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-54-30-071917	7/19/2017	0.016			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-54-30-102617	10/26/2017	0.012		J	<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-54-30-102617-DUP	10/26/2017	0.0081	J	J	<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-54-30-012218	1/22/2018	0.0099	J0	J	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		**0.001**	J	
		VMP-54-30-041818	4/18/2018	0.0057	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		**0.00084**	J		<0.052	U		**0.00081**	J	
		VMP-54-30-072518	7/25/2018	0.008	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-54-30-102418	10/24/2018	<0.0089	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-54-30-011819	1/18/2019	0.0026	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-54-30-042419	4/24/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-54-30-072219	7/22/2019	<0.0095	ND,UJ	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-54-30-102219	10/22/2019	0.012			<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-54-30-012220	1/22/2020	<0.011	U		<0.0066	U		<0.0074	U		<0.012	U		<0.01	U		<0.0062	U		<0.064	U		<0.0053	U	
		VMP-54-30-042720	4/27/2020	<0.0099	U		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0022**	J	
		VMP-54-30-072220	7/22/2020	0.017			<0.0057	U		0.0056	J		<0.01	U		<0.0091	U		**0.0046**	J		<0.056	U		**0.01**		
		VMP-54-30-102820	10/28/2020	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-54-30-012821	1/28/2021	0.0037	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	<0.019	U		0.011	J		<0.0057	U		<0.0048	U		<0.0042	U					**0.024**			<0.0057	U	
		VMP-54-20-050415	5/4/2015	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					**0.01**	J		<0.007	U	
		VMP-54-20-072415	7/24/2015	<0.025	U		<0.018	J	U	<0.0075	U		<0.0062	U		<0.0055	U					**0.0036**	J	J	<0.0075	U	
		VMP-54-20-102715	10/27/2015	<0.019	U		0.005	J		<0.0057	U		<0.0048	U		<0.0042	U					**0.0043**	J		<0.0057	U	
		VMP-54-20-102715-DUP	10/27/2015	<0.019	U		0.0047	J		<0.0057	U		<0.0048	U		<0.0042	U					**0.0022**	J		<0.0057	U	
		VMP-54-20-012816	1/28/2016	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.0054	U					**0.0087**	J		<0.0074	U	
		VMP-54-20-050516	5/5/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.0013**	J		**0.0023**	J	
		VMP-54-20-050516-DUP	5/5/2016	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					<0.014	U		**0.0026**	J	
		VMP-54-20-080116	8/1/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.0051**	J		<0.0071	U	
		VMP-54-20-102816	10/28/2016	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U		<0.014	U		**0.016**			<0.0066	U	
		VMP-54-20-012417	1/24/2017	<0.02	U		0.0078	J		<0.0059	U		<0.005	U		<0.017	U					**0.048**			<0.0059	U	
		VMP-54-20-042017	4/20/2017	<0.02	U		<0.015	U		**0.00073**	J		<0.0051	U		<0.018	U					<0.012	U		**0.0014**	J	
		VMP-54-20-071917	7/19/2017	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.046**			<0.0061	U	
		VMP-54-20-102617	10/26/2017	<0.018	U		0.0084	J		<0.0052	U		<0.0044	U		<0.015	U					**0.021**			<0.0053	U	
		VMP-54-20-012218	1/22/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0058**	J		<0.0056	U	
		VMP-54-20-041818	4/18/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-54-20-072518	7/25/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-54-20-102418	10/24/2018	**0.0015**	J		0.04			<0.0058	U		<0.0048	U		<0.017	U					**0.003**	J		<0.0058	U	
		VMP-54-20-011819	1/18/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-54-20-042419	4/24/2019	<0.018	U		<0.013	U		<0.0055	U		<0.0046	ND,UJ	UJ	<0.016	U					<0.011	U		<0.0055	U	
		VMP-54-20-072219	7/22/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-54-20-102219	10/22/2019	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-54-20-012220	1/22/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-54-20-042720	4/27/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.014**			<0.0062	U	
		VMP-54-20-072220	7/22/2020	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.0028**	J		<0.0065	U	
		VMP-54-20-102820	10/28/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.011**	J		<0.0063	U	
		VMP-54-20-012821	1/28/2021	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.012**			<0.0058	U	
	30 ft	VMP-54-30-021215	2/12/2015	<0.02	U		0.0082	J		<0.006	U		<0.005	U		<0.0044	U					**0.0098**	J		<0.006	U	
		VMP-54-30-050415	5/4/2015	<0.024	U		0.0071	J		<0.0071	U		<0.0059	U		<0.0052	U					**0.03**			<0.0071	U	
		VMP-54-30-080315	8/3/2015	<0.025	ND,UJ	UJ	0.0055	J		<0.0076	U		<0.0063	U		<0.0056	U					**0.0069**	J		<0.0076	U	
		VMP-54-30-102715	10/27/2015	<0.019	U		0.0057	J		<0.0058	U		<0.0049	U		<0.0043	U					**0.003**	J		<0.0058	U	
		VMP-54-30-012816	1/28/2016	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.0045**	J		<0.0071	U	
		VMP-54-30-042916	4/29/2016	<0.022	U		0.041			<0.0065	U		<0.0054	U		<0.0048	U					<0.013	U		<0.0065	U	
		VMP-54-30-042916-DUP	4/29/2016	<0.022	U		0.042			<0.0066	U		<0.0055	U		<0.0048	U					**0.0012**	J		<0.0066	U	
		VMP-54-30-080116	8/1/2016	<0.022	U		0.01	J		<0.0066	U		<0.0055	U		<0.019	U					**0.022**			<0.0066	U	
		VMP-54-30-102816	10/28/2016	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		<0.013	U		<0.0064	U	
		VMP-54-30-012417	1/24/2017	**0.001**	J		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0066**	J	J	<0.006	U	
		VMP-54-30-012417-Dup	1/24/2017	<0.018	U		0.021			<0.0054	U		<0.0045	U		<0.016	U					**0.18**		J	<0.0054	U	
		VMP-54-30-042017	4/20/2017	<0.02	U		0.002	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-54-30-071917	7/19/2017	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.028**			<0.0064	U	
		VMP-54-30-102617	10/26/2017	<0.018	U		0.004	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0067**	J	J	<0.0054	U	
		VMP-54-30-102617-DUP	10/26/2017	<0.018	U		0.0029	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0075**	J	J	<0.0055	U	
		VMP-54-30-012218	1/22/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.019**			<0.0058	U	
		VMP-54-30-041818	4/18/2018	<0.02	U		0.0046	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-54-30-072518	7/25/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-54-30-102418	10/24/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-54-30-011819	1/18/2019	<0.018	U		0.0046	J		<0.0054	U		<0.0045	U		<0.016	U					**0.0035**	J		<0.0054	U	
		VMP-54-30-042419	4/24/2019	<0.018	U		0.0048	J		**0.002**	J		<0.0045	ND,UJ	UJ	<0.016	U					**0.0037**	J		**0.0053**	J	
		VMP-54-30-072219	7/22/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-54-30-102219	10/22/2019	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					<0.014	U		<0.0071	U	
		VMP-54-30-012220	1/22/2020	<0.025	U		<0.018	U		<0.0074	U		<0.0062	U		<0.022	U					**0.021**			**0.0041**	J	
		VMP-54-30-042720	4/27/2020	<0.022	U		0.0029	J		<0.0065	U		<0.0054	U		<0.019	U					**0.0045**	J		<0.0065	U	
		VMP-54-30-072220	7/22/2020	<0.021	U		0.018			**0.022**			<0.0053	U		<0.019	U					**0.028**			**0.074**		
		VMP-54-30-102820	10/28/2020	<0.019	U		<0.014	U		**0.00044**	J		<0.0049	U		<0.017	U					**0.012**			<0.0058	U	
		VMP-54-30-012821	1/28/2021	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.0038**	J		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	<0.005	U		<0.008	U		**0.0018**	J		<0.0034	U		**0.012**			<0.034	U		<0.0064	U		<0.0064	U	
		VMP-54-20-050415	5/4/2015	<0.006	U		<0.0097	U		**0.0028**	J		<0.0042	U		**0.00084**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-54-20-072415	7/24/2015	<0.0065	U		<0.01	U		**0.0023**	J		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-54-20-102715	10/27/2015	<0.005	U		<0.008	U		**0.0032**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-54-20-102715-DUP	10/27/2015	<0.005	U		<0.008	U		**0.0032**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-54-20-012816	1/28/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0057	U		<0.045	U		<0.0082	U		<0.0082	U	
		VMP-54-20-050516	5/5/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0036**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-54-20-050516-DUP	5/5/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0041**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-54-20-080116	8/1/2016	<0.0062	U		<0.01	U		**0.0031**	J		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-20-102816	10/28/2016	<0.0058	U		<0.0093	U		**0.004**	J		<0.004	U		**0.0018**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-54-20-012417	1/24/2017	<0.0052	U		<0.0083	U		**0.0026**	J		<0.0036	U		**0.0014**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-54-20-042017	4/20/2017	<0.0053	U		<0.0086	U		**0.0023**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-54-20-071917	7/19/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-54-20-102617	10/26/2017	<0.0046	U		<0.0073	U		**0.0022**	J		<0.0032	U		**0.00089**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-54-20-012218	1/22/2018	<0.0049	U		<0.0079	U		**0.0027**	J		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-54-20-041818	4/18/2018	<0.0049	U		<0.0079	U		**0.002**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-54-20-072518	7/25/2018	<0.0051	U		<0.0083	U		**0.0027**	J		<0.0036	U		**0.0018**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-54-20-102418	10/24/2018	<0.005	U		<0.0081	U		**0.0034**	J		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-20-011819	1/18/2019	<0.0047	U		<0.0076	U		**0.002**	J		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-54-20-042419	4/24/2019	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U	UJ	<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-54-20-072219	7/22/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0033**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-20-102219	10/22/2019	<0.0056	U		<0.0091	U		**0.0028**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-20-012220	1/22/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-54-20-042720	4/27/2020	<0.0054	U		<0.0086	U		**0.0026**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-54-20-072220	7/22/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-20-102820	10/28/2020	<0.0054	U		<0.0088	U		**0.002**	J		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-54-20-012821	1/28/2021	<0.005	U		<0.0081	U		**0.003**	J		<0.0035	U		**0.00094**	J		<0.035	U		<0.0065	U		<0.0065	U	
	30 ft	VMP-54-30-021215	2/12/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-54-30-050415	5/4/2015	<0.0062	U		<0.01	U		**0.002**	J		<0.0043	U		**0.0013**	J		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-30-080315	8/3/2015	<0.0066	U		<0.011	U		**0.0047**	J		<0.0046	U		<0.0058	U		<0.046	U	UJ	<0.0084	U		<0.0084	U	
		VMP-54-30-102715	10/27/2015	<0.0051	U		<0.0082	U		**0.0026**	J		<0.0035	U		**0.0028**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-30-012816	1/28/2016	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-30-042916	4/29/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00062**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-30-042916-DUP	4/29/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.00056**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-54-30-080116	8/1/2016	<0.0057	U		<0.0092	U		**0.0052**	J		<0.004	U		**0.028**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-54-30-102816	10/28/2016	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-54-30-012417	1/24/2017	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U	UJ	<0.036	U		<0.0067	U		<0.0067	U	
		VMP-54-30-012417-Dup	1/24/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.013**		J	<0.033	U		<0.006	U		<0.006	U	
		VMP-54-30-042017	4/20/2017	<0.0051	U		<0.0082	U		**0.0016**	J		<0.0035	U		**0.00082**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-54-30-071917	7/19/2017	<0.0056	U		<0.009	U		**0.0048**	J		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-54-30-102617	10/26/2017	<0.0047	U		<0.0076	U		**0.0011**	J		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-54-30-102617-DUP	10/26/2017	<0.0048	U		<0.0077	U		**0.0011**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-54-30-012218	1/22/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-30-041818	4/18/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-54-30-072518	7/25/2018	<0.0052	U		<0.0084	U		**0.0055**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-54-30-102418	10/24/2018	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-54-30-011819	1/18/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-54-30-042419	4/24/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U	UJ	<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-54-30-072219	7/22/2019	<0.0054	U		<0.0086	U		**0.0035**	J		<0.0037	U		**0.0098**			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-54-30-102219	10/22/2019	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-54-30-012220	1/22/2020	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.01**			<0.045	U		<0.0082	U		<0.0082	U	
		VMP-54-30-042720	4/27/2020	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-54-30-072220	7/22/2020	<0.0056	U		<0.009	U		**0.004**	J		<0.0038	U		**0.0011**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-54-30-102820	10/28/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-54-30-012821	1/28/2021	<0.005	U		<0.0081	U		<0.008	U		**0.0043**			<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-54	20 ft	VMP-54-20-020515	2/5/2015	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-54-20-050415	5/4/2015	<0.0076	U		0.0016	J		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		0.001	J		<0.0062	U	
		VMP-54-20-072415	7/24/2015	<0.0082	U		<0.0085	U		<0.0075	U		<0.0075	U		<0.0071	U		<0.0039	U		<0.0066	U		<0.0066	U	
		VMP-54-20-102715	10/27/2015	<0.0063	U		<0.0065	J	U	<0.0057	U		<0.0057	U		0.0042	J		<0.003	U		0.0011	J		<0.005	U	
		VMP-54-20-102715-DUP	10/27/2015	<0.0063	U		<0.0065	J	U	<0.0057	U		<0.0057	U		0.0039	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-54-20-012816	1/28/2016	<0.0081	U		<0.0084	U		<0.0074	U		<0.0074	U		0.0034	J		<0.0038	U		0.0033	J		<0.0065	U	
		VMP-54-20-050516	5/5/2016	<0.0069	U		<0.0072	U		**0.0019**	J		<0.0063	U		0.01			<0.0033	U		0.0039	J		**0.0011**	J	
		VMP-54-20-050516-DUP	5/5/2016	<0.0076	U		<0.0079	U		**0.0022**	J		<0.0069	U		0.012			<0.0036	U		0.0043	J		**0.0017**	J	
		VMP-54-20-080116	8/1/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0012	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-54-20-102816	10/28/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	J	U	<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-54-20-012417	1/24/2017	<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-54-20-042017	4/20/2017	<0.0067	U		<0.007	U		<0.0062	U		<0.0062	U		0.0099			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-20-071917	7/19/2017	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-54-20-102617	10/26/2017	<0.0058	U		0.0017	J		<0.0052	U		<0.0053	U		0.0012	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-54-20-012218	1/22/2018	<0.0062	U		0.001	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-54-20-041818	4/18/2018	<0.0062	U		0.0017	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-54-20-072518	7/25/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0017	J		<0.0031	U		0.00098	J		<0.0052	U	
		VMP-54-20-102418	10/24/2018	<0.0064	U		0.0019	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-54-20-011819	1/18/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-54-20-042419	4/24/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-54-20-072219	7/22/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.002	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-54-20-102219	10/22/2019	<0.0071	U		0.0017	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-54-20-012220	1/22/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-54-20-042720	4/27/2020	<0.0068	U		0.001	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-54-20-072220	7/22/2020	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		<0.0061	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-54-20-102820	10/28/2020	<0.0069	U		0.0017	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-54-20-012821	1/28/2021	<0.0064	U		0.0015	J		<0.0058	U		<0.0058	U		0.0039	J		<0.003	U		<0.0051	U		<0.0051	U	
	30 ft	VMP-54-30-021215	2/12/2015	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		0.0026	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-30-050415	5/4/2015	<0.0078	U		0.0018	J		<0.0071	U		<0.0071	U		0.0013	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-54-30-080315	8/3/2015	<0.0083	U		0.0031	J		<0.0076	U		<0.0076	U		<0.0072	U		<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-54-30-102715	10/27/2015	<0.0064	U		<0.0067	J	U	<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		0.0027	J		**0.00095**	J	
		VMP-54-30-012816	1/28/2016	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-54-30-042916	4/29/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-54-30-042916-DUP	4/29/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-54-30-080116	8/1/2016	<0.0072	U		0.0014	J		<0.0066	J	U	<0.0066	U		0.0014	J		<0.0034	U		0.0059			**0.0028**	J	
		VMP-54-30-102816	10/28/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-54-30-012417	1/24/2017	<0.0066	U		<0.0069	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-30-012417-Dup	1/24/2017	<0.0059	U		0.0014	J		<0.0054	U		<0.0054	U		0.00071	J		<0.0028	U		0.0015	J		<0.0048	U	
		VMP-54-30-042017	4/20/2017	<0.0064	U		0.002	J		<0.0059	U		<0.0059	U		0.00085	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-54-30-071917	7/19/2017	<0.007	U		0.0016	J		<0.0064	U		<0.0064	U		0.0013	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-54-30-102617	10/26/2017	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		0.0021	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-54-30-102617-DUP	10/26/2017	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-54-30-012218	1/22/2018	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-54-30-041818	4/18/2018	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-30-072518	7/25/2018	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-54-30-102418	10/24/2018	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0014	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-54-30-011819	1/18/2019	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		0.0011	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-54-30-042419	4/24/2019	<0.0059	U		<0.0062	U		**0.0019**	J		<0.0054	U		0.0094			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-54-30-072219	7/22/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0025	J		<0.0055	U	
		VMP-54-30-102219	10/22/2019	<0.0078	U		0.00087	J		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-54-30-012220	1/22/2020	<0.0081	U		<0.0085	U		<0.0074	U		<0.0074	U		0.0041	J		<0.0038	U		0.0022	J		<0.0066	U	
		VMP-54-30-042720	4/27/2020	<0.0071	U		0.0012	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-54-30-072220	7/22/2020	<0.007	U		0.0024	J		**0.0036**	J		<0.0064	U		0.14			<0.0033	U		0.0015	J		<0.0057	U	
		VMP-54-30-102820	10/28/2020	<0.0064	U		0.0016	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-54-30-012821	1/28/2021	<0.0063	U		0.0015	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	**0.0077**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-10-110315	11/3/2015	**0.019**	J		**0.0011**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0087**	J	
		VMP-56-10-020416	2/4/2016	**0.015**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0021**	J	
		VMP-56-10-050516	5/5/2016	**0.052**			**0.018**			<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.0036	J		**0.016**	J	
		VMP-56-10-072716	7/27/2016	**0.023**	J		**0.00082**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0028**	J	
		VMP-56-10-102416	10/24/2016	**0.012**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0037**	J	
		VMP-56-10-012417	1/24/2017	**0.016**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-56-10-050117	5/1/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.006**	J	
		VMP-56-10-072117	7/21/2017	**0.014**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0038**	J	
		VMP-56-10-102717	10/27/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-56-10-012918	1/29/2018	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-56-10-050118	5/1/2018	**0.012**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-10-072618	7/26/2018	**0.029**	J		**0.00074**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U	UJ	0.006	J		**0.0063**	J	
		VMP-56-10-102918	10/29/2018	**0.0073**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0021**	J	
		VMP-56-10-012819	1/28/2019	**0.018**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0024**	J	
		VMP-56-10-050119	5/1/2019	**0.018**	J		**0.061**			<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		0.38			<0.014	U	
		VMP-56-10-072319	7/23/2019	**0.028**	J		**0.0018**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-10-102119	10/21/2019	**0.0077**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-56-10-012220	1/22/2020	<0.034	U		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-56-10-042420	4/24/2020	**0.028**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0019**	J	
		VMP-56-10-072320	7/23/2020	**0.048**			**0.0016**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		**0.0066**	J	
		VMP-56-10-072320-DUP	7/23/2020	**0.029**	J		**0.0021**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0049**	J	
		VMP-56-10-110320	11/3/2020	<0.029	J	U	<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-56-10-012121	1/21/2021	**0.0059**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
	25 ft	VMP-56-25-021015	2/10/2015	**0.0074**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-56-25-050715	5/7/2015	**0.018**	J		**0.002**	J		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		**0.02**		
		VMP-56-25-073115	7/31/2015	**0.017**	J		<0.0047	J	U	<0.01	U		<0.015	U		<0.058	U		<0.0033	U	UJ	0.0087	J	J	**0.0092**	J	
		VMP-56-25-110315	11/3/2015	**0.034**			<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.025			**0.011**	J	
		VMP-56-25-020416	2/4/2016	<0.03	J	U	**0.00067**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-25-050516	5/5/2016	<0.035	J	U	<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		**0.0031**	J	
		VMP-56-25-050516-DUP	5/5/2016	**0.021**	J		<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		**0.0084**	J	
		VMP-56-25-072716	7/27/2016	**0.067**			**0.0022**	J		<0.011	U		<0.017	U		<0.064	U		<0.0036	U		0.016			**0.0097**	J	
		VMP-56-25-102416	10/24/2016	**0.022**	J		**0.0015**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0057	J		**0.0048**	J	
		VMP-56-25-012417	1/24/2017	**0.017**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-56-25-050117	5/1/2017	**0.018**	J		**0.00085**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0073**	J	
		VMP-56-25-072117	7/21/2017	**0.015**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-25-102717	10/27/2017	**0.0072**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-56-25-012918	1/29/2018	<0.027	J	U	<0.0036	J	U	<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-56-25-050118	5/1/2018	**0.0044**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-56-25-072618	7/26/2018	**0.08**			**0.00066**	J		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.007**	J	
		VMP-56-25-102918	10/29/2018	**0.035**			**0.0013**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0068**	J	
		VMP-56-25-012819	1/28/2019	**0.023**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0026**	J	
		VMP-56-25-012819-DUP	1/28/2019	**0.016**	J		**0.00094**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-56-25-050119	5/1/2019	**0.012**	J		<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-56-25-072319	7/23/2019	**0.03**			<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-56-25-102119	10/21/2019	**0.01**	J		**0.0042**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.01	J		<0.015	U	
		VMP-56-25-012220	1/22/2020	**0.0093**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-56-25-042420	4/24/2020	**0.0075**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0025**	J	
		VMP-56-25-072320	7/23/2020	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-25-110320	11/3/2020	**0.023**	J		**0.00094**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-25-110320-DUP	11/3/2020	**0.029**	J		**0.0023**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-56-25-012121	1/21/2021	**0.014**	J		<0.004	J	U	<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0014**	J	
		VMP-56-25-012121-DUP	1/21/2021	**0.011**	J		**0.00084**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		0.0099	J		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-56-10-110315	11/3/2015	**0.0024**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-56-10-020416	2/4/2016	**0.0013**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-56-10-050516	5/5/2016	**0.0021**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U	UJ	<0.0073	U	
		VMP-56-10-072716	7/27/2016	<0.017	J	U	<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0012**	J		<0.029	ND,UJ	UJ	<0.0072	U	
		VMP-56-10-102416	10/24/2016	**0.0016**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.009**			**0.0029**	J		<0.0068	U	
		VMP-56-10-012417	1/24/2017	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-56-10-050117	5/1/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-56-10-072117	7/21/2017	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.0012**	J		<0.027	U		<0.0067	U	
		VMP-56-10-102717	10/27/2017	**0.016**			<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.00077**	J		<0.024	U		<0.006	U	
		VMP-56-10-012918	1/29/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-56-10-050118	5/1/2018	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-56-10-072618	7/26/2018	<0.016	J	U	<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		**0.0027**	J	J	<0.0064	U	
		VMP-56-10-102918	10/29/2018	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-56-10-012819	1/28/2019	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-56-10-050119	5/1/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	U	
		VMP-56-10-072319	7/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		**0.0023**	J		<0.0065	U	
		VMP-56-10-102119	10/21/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.00084**	J		<0.023	U		<0.0057	U	
		VMP-56-10-012220	1/22/2020	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	ND,UJ	UJ	<0.0073	U	
		VMP-56-10-042420	4/24/2020	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-56-10-072320	7/23/2020	**0.0029**	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-56-10-072320-DUP	7/23/2020	**0.0048**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-56-10-110320	11/3/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-56-10-012121	1/21/2021	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
	25 ft	VMP-56-25-021015	2/10/2015	**0.0032**	J		<0.0083	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-56-25-050715	5/7/2015	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-56-25-073115	7/31/2015	**0.013**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	J	U	<0.031	U		<0.0077	U	
		VMP-56-25-110315	11/3/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-56-25-020416	2/4/2016	**0.0017**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-56-25-050516	5/5/2016	**0.0019**	J		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.001**	J		<0.03	U	UJ	<0.0076	U	
		VMP-56-25-050516-DUP	5/5/2016	**0.00096**	J		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U	UJ	<0.0078	U	
		VMP-56-25-072716	7/27/2016	**0.014**	J		<0.01	U		<0.0076	U		<0.014	U		<0.017	U		**0.0049**	J		<0.034	ND,UJ	UJ	<0.0085	U	
		VMP-56-25-102416	10/24/2016	**0.0016**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0039**	J		<0.026	U		<0.0066	U	
		VMP-56-25-012417	1/24/2017	<0.018	J	U	<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		**0.0026**	J		<0.03	U		<0.0077	U	
		VMP-56-25-050117	5/1/2017	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0043**	J		<0.024	U		<0.0062	U	
		VMP-56-25-072117	7/21/2017	**0.0018**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0017**	J		<0.026	U		<0.0065	U	
		VMP-56-25-102717	10/27/2017	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		**0.0015**	J		<0.023	U		<0.0059	U	
		VMP-56-25-012918	1/29/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-56-25-050118	5/1/2018	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-56-25-072618	7/26/2018	**0.003**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		**0.0039**	J		<0.025	U		<0.0064	U	
		VMP-56-25-102918	10/29/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0013**	J		<0.025	U		<0.0063	U	
		VMP-56-25-012819	1/28/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.00088**	J		<0.023	U		<0.0058	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.00093**	J		<0.024	U		<0.006	U	
		VMP-56-25-050119	5/1/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.00095**	J		<0.024	U		<0.006	U	
		VMP-56-25-072319	7/23/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0017**	J		<0.025	U		<0.0063	U	
		VMP-56-25-102119	10/21/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-56-25-012220	1/22/2020	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	ND,UJ	UJ	<0.0067	U	
		VMP-56-25-042420	4/24/2020	**0.017**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0014**	J		<0.028	U		<0.0071	U	
		VMP-56-25-072320	7/23/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0013**	J		<0.026	U		<0.0065	U	
		VMP-56-25-110320	11/3/2020	**0.0035**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-56-25-110320-DUP	11/3/2020	**0.002**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.001**	J		<0.027	U		<0.0067	U	
		VMP-56-25-012121	1/21/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-56-10-110315	11/3/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-56-10-020416	2/4/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-56-10-050516	5/5/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0025**	J		<0.0057	U		<0.0057	U	
		VMP-56-10-072716	7/27/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0027**	J		<0.0056	U		<0.0056	U	
		VMP-56-10-102416	10/24/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-56-10-012417	1/24/2017	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0026**	J		<0.0057	U		<0.0057	U	
		VMP-56-10-050117	5/1/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-56-10-072117	7/21/2017	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-56-10-102717	10/27/2017	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-56-10-012918	1/29/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0034**	J		<0.0044	U		<0.0044	U	
		VMP-56-10-050118	5/1/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-56-10-072618	7/26/2018	**0.0037**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0018**	J	J	<0.005	U		<0.005	U	
		VMP-56-10-102918	10/29/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0044**	J		<0.0047	U		<0.0047	U	
		VMP-56-10-012819	1/28/2019	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-56-10-050119	5/1/2019	**0.1**			<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-56-10-072319	7/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-56-10-102119	10/21/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-56-10-012220	1/22/2020	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0032**	J		<0.0057	U		<0.0057	U	
		VMP-56-10-042420	4/24/2020	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-56-10-072320	7/23/2020	**0.038**			<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0026**	J		<0.0052	U		<0.0052	U	
		VMP-56-10-072320-DUP	7/23/2020	**0.039**			<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0033**	J		<0.0056	U		<0.0056	U	
		VMP-56-10-110320	11/3/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-56-10-012121	1/21/2021	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0024**	J		<0.0053	U		<0.0053	U	
		VMP-56-25-050715	5/7/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.002**	J		<0.0057	U		<0.0057	U	
		VMP-56-25-073115	7/31/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0021**	J		<0.006	U		<0.006	U	
		VMP-56-25-110315	11/3/2015	**0.0032**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0054**	J		<0.0052	U		<0.0052	U	
		VMP-56-25-020416	2/4/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-56-25-050516	5/5/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0023**	J		<0.0059	U		<0.0059	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0023**	J		<0.0061	U		<0.0061	U	
		VMP-56-25-072716	7/27/2016	<0.0057	U		<0.013	U		<0.0099	U		<0.0099	U		<0.0099	U		<0.0082	U		<0.0067	U		<0.0067	U	
		VMP-56-25-102416	10/24/2016	**0.001**	J		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0028**	J		<0.0052	U		<0.0052	U	
		VMP-56-25-012417	1/24/2017	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0023**	J		<0.006	U		<0.006	U	
		VMP-56-25-050117	5/1/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-56-25-072117	7/21/2017	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-56-25-102717	10/27/2017	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-56-25-012918	1/29/2018	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-56-25-050118	5/1/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0049	U		<0.0049	U	
		VMP-56-25-072618	7/26/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-56-25-102918	10/29/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-56-25-012819	1/28/2019	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-56-25-050119	5/1/2019	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-56-25-072319	7/23/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-56-25-102119	10/21/2019	**0.0028**	J		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0024**	J		<0.0052	U		<0.0052	U	
		VMP-56-25-012220	1/22/2020	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.013**			<0.0052	U		<0.0052	U	
		VMP-56-25-042420	4/24/2020	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0021**	J		<0.0056	U		<0.0056	U	
		VMP-56-25-072320	7/23/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-56-25-110320	11/3/2020	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-56-25-110320-DUP	11/3/2020	**0.0067**			<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-56-25-012121	1/21/2021	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-56-25-012121-DUP	1/21/2021	**0.00053**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-10-110315	11/3/2015	<0.005	U		<0.005	U		<0.005	U		**0.0062**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-56-10-020416	2/4/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-10-050516	5/5/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-56-10-072716	7/27/2016	<0.0055	U		<0.0055	U		<0.0055	U		**0.0018**	J		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-56-10-102416	10/24/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-56-10-012417	1/24/2017	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-56-10-050117	5/1/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-56-10-072117	7/21/2017	<0.0051	U		<0.0051	U		<0.0051	U		**0.0065**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-56-10-102717	10/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-56-10-012918	1/29/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-56-10-050118	5/1/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-56-10-072618	7/26/2018	<0.0049	U		<0.0049	U		<0.0049	U		**0.0034**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-56-10-102918	10/29/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.0076**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-56-10-012819	1/28/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-56-10-050119	5/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-56-10-072319	7/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-56-10-102119	10/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-56-10-012220	1/22/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-56-10-042420	4/24/2020	<0.0052	U		<0.0052	U		<0.0052	U		**0.0025**	J		<0.006	U		<0.0059	U		<0.0059	U		**0.0014**	J	
		VMP-56-10-072320	7/23/2020	<0.0051	U		<0.0051	U		<0.0051	U		**0.0041**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-56-10-110320	11/3/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-56-10-012121	1/21/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-56-25-050715	5/7/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		**0.0019**	J	
		VMP-56-25-073115	7/31/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-56-25-110315	11/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		**0.005**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-25-020416	2/4/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-56-25-050516	5/5/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-56-25-072716	7/27/2016	<0.0065	U		<0.0065	U		<0.0065	U		**0.0062**	J		<0.0076	U		<0.0075	U		<0.0075	U		<0.024	U	
		VMP-56-25-102416	10/24/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-25-012417	1/24/2017	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-56-25-050117	5/1/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-56-25-072117	7/21/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-56-25-102717	10/27/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-56-25-012918	1/29/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-56-25-050118	5/1/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-56-25-072618	7/26/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-56-25-102918	10/29/2018	<0.0048	U		0.0014	J		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-56-25-012819	1/28/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-56-25-050119	5/1/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-56-25-072319	7/23/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-56-25-102119	10/21/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-25-012220	1/22/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-56-25-042420	4/24/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		**0.026**		
		VMP-56-25-072320	7/23/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-56-25-110320	11/3/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-56-25-012121	1/21/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.005	U		<0.005	U		<0.005	U		**0.00088**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	0.034			<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		**0.00073**	J	
		VMP-56-10-110315	11/3/2015	0.0099			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.0028**	J		<0.054	U		**0.0024**	J	
		VMP-56-10-020416	2/4/2016	0.0046	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-56-10-050516	5/5/2016	0.014			<0.0061	U		0.004	J		<0.011	U		<0.0098	U		**0.00094**	J		<0.06	U		**0.013**		
		VMP-56-10-072716	7/27/2016	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-56-10-102416	10/24/2016	<0.01	U		**0.014**			0.0025	J		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		**0.0018**	J	
		VMP-56-10-012417	1/24/2017	0.064			**0.0023**	J		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-56-10-050117	5/1/2017	0.028			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-56-10-072117	7/21/2017	0.019			<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-56-10-102717	10/27/2017	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-56-10-012918	1/29/2018	0.039			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		**0.0022**	J	
		VMP-56-10-050118	5/1/2018	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0012**	J		<0.053	U		**0.0017**	J	
		VMP-56-10-072618	7/26/2018	0.055			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		**0.0056**			<0.053	U		**0.013**		
		VMP-56-10-102918	10/29/2018	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		**0.002**	J		<0.05	U		<0.0041	U	
		VMP-56-10-012819	1/28/2019	<0.0092	U		<0.0053	U		0.0033	J		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-56-10-050119	5/1/2019	0.0039	J		**0.0014**	J		<0.0058	U		<0.009	U		<0.0082	U		**0.092**			<0.05	U		**0.46**		
		VMP-56-10-072319	7/23/2019	0.019			**0.00077**	J		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0036**	J	
		VMP-56-10-102119	10/21/2019	0.0034	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-56-10-012220	1/22/2020	<0.011	U		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-56-10-042420	4/24/2020	0.0056	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-56-10-072320	7/23/2020	0.015			**0.0073**			<0.0064	U		<0.0099	U		<0.009	U		**0.14**			<0.055	U		**0.12**		
		VMP-56-10-072320-DUP	7/23/2020	0.005	J		**0.0051**	J		<0.0068	U		<0.011	U		<0.0097	U		**0.15**			<0.059	U		**0.12**		
		VMP-56-10-110320	11/3/2020	0.018	J	J	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-56-10-012121	1/21/2021	0.015	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
	25 ft	VMP-56-25-021015	2/10/2015	0.027			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0021**	J	
		VMP-56-25-050715	5/7/2015	0.0058	J		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		**0.0017**	J	
		VMP-56-25-073115	7/31/2015	0.0061	J		<0.0064	U		0.007	J		<0.011	U		<0.01	U		**0.002**	J		<0.063	U		**0.0046**	J	
		VMP-56-25-110315	11/3/2015	0.033			**0.0015**	J		0.0016	J		<0.0099	U		<0.009	U		**0.0092**			<0.055	U		**0.0055**		
		VMP-56-25-020416	2/4/2016	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-56-25-050516	5/5/2016	<0.011	U		<0.0063	U		0.0017	J		<0.011	U		<0.01	U		<0.006	U		<0.062	U		**0.0014**	J	
		VMP-56-25-050516-DUP	5/5/2016	<0.011	U		<0.0065	U		0.0019	J		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-56-25-072716	7/27/2016	0.021			<0.0072	U		<0.0081	U		<0.013	U		<0.012	U		**0.0013**	J		<0.07	U		**0.0028**	J	
		VMP-56-25-102416	10/24/2016	0.041			**0.027**			0.0033	J		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.0019**	J	
		VMP-56-25-012417	1/24/2017	0.054			**0.0019**	J		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.00041**	J	
		VMP-56-25-050117	5/1/2017	0.0098			**0.0024**	J		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-56-25-072117	7/21/2017	0.014			<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-56-25-102717	10/27/2017	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0015**	J	
		VMP-56-25-012918	1/29/2018	0.017			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-56-25-050118	5/1/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0014**	J	
		VMP-56-25-072618	7/26/2018	0.015			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-56-25-102918	10/29/2018	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.0014**	J		<0.052	U		<0.0043	U	
		VMP-56-25-012819	1/28/2019	0.0026	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		**0.0015**	J		<0.048	U		**0.0049**		
		VMP-56-25-012819-DUP	1/28/2019	0.0026	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		**0.0012**	J		<0.049	U		**0.0045**		
		VMP-56-25-050119	5/1/2019	0.0067	J		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		**0.0012**	J	
		VMP-56-25-072319	7/23/2019	0.015			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-56-25-102119	10/21/2019	0.012			**0.01**			0.0019	J		<0.0099	U		<0.009	U		**0.024**			<0.055	U		**0.03**		
		VMP-56-25-012220	1/22/2020	<0.0098	U		<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-56-25-042420	4/24/2020	0.0079	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-56-25-072320	7/23/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-56-25-110320	11/3/2020	<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	UJ
		VMP-56-25-110320-DUP	11/3/2020	<0.024	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		**0.007**			<0.055	U		**0.014**		J
		VMP-56-25-012121	1/21/2021	0.016	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-56-25-012121-DUP	1/21/2021	0.019	J		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		**0.0013**	J		<0.053	U		**0.0022**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.0046	U					**0.03**			<0.0063	U	
		VMP-56-10-110315	11/3/2015	**0.0014**	J		0.0077	J		<0.0062	U		<0.0052	U		<0.0045	U					**0.013**			<0.0062	U	
		VMP-56-10-020416	2/4/2016	<0.021	U		0.0028	J		<0.0063	U		<0.0053	U		<0.0046	U					**0.0078**	J		**0.0016**	J	
		VMP-56-10-050516	5/5/2016	**0.0044**	J		0.014	J		**0.0014**	J		<0.0058	U		<0.0051	U					**0.021**			**0.0026**	J	
		VMP-56-10-072716	7/27/2016	**0.0014**	J		<0.016	U		<0.0068	U		<0.0057	U		<0.02	U					**0.016**			<0.0068	U	
		VMP-56-10-102416	10/24/2016	<0.022	U		<0.016	U		**0.00049**	J		**0.0017**	J		<0.019	U		<0.014	U		**0.017**			**0.00069**	J	
		VMP-56-10-012417	1/24/2017	**0.001**	J		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.0088**	J		<0.0069	U	
		VMP-56-10-050117	5/1/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0051**	J		<0.0057	U	
		VMP-56-10-072117	7/21/2017	<0.021	U		0.0023	J		<0.0064	U		<0.0053	U		<0.019	U					**0.01**	J		**0.0014**	J	
		VMP-56-10-102717	10/27/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-56-10-012918	1/29/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-56-10-050118	5/1/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-56-10-072618	7/26/2018	<0.02	U		0.1			<0.0061	U		<0.0051	U		<0.018	U					**0.0097**	J		<0.0061	U	
		VMP-56-10-102918	10/29/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-56-10-012819	1/28/2019	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0029**	J		**0.0012**	J	
		VMP-56-10-050119	5/1/2019	<0.019	U		1			<0.0058	U		<0.0048	U		<0.017	U					**0.0033**	J		<0.0058	U	
		VMP-56-10-072319	7/23/2019	<0.021	U		0.0068	J		<0.0062	U		<0.0052	U		<0.018	U					**0.011**	J		<0.0062	U	
		VMP-56-10-102119	10/21/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-56-10-012220	1/22/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.024**			<0.007	U	
		VMP-56-10-042420	4/24/2020	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.0068**	J		<0.0064	U	
		VMP-56-10-072320	7/23/2020	<0.021	U		0.022			**0.0012**	J		<0.0053	U		<0.019	U					**0.032**			<0.0064	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.023	U		0.02			**0.00096**	J		<0.0057	U		<0.02	U					**0.011**	J		<0.0068	U	
		VMP-56-10-110320	11/3/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0067**	J		<0.0061	U	
		VMP-56-10-012121	1/21/2021	<0.021	U		<0.015	U		<0.0064	U		<0.0054	U		<0.019	U					**0.008**	J		<0.0064	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0047	U					**0.01**	J		<0.0065	U	
		VMP-56-25-050715	5/7/2015	**0.0062**	J		0.01	J		<0.007	U		**0.0055**	J		<0.0051	U					**0.01**	J		<0.007	U	
		VMP-56-25-073115	7/31/2015	**0.0045**	J		0.007	J		**0.0018**	J		**0.0021**	J		<0.0054	U					**0.0061**	J		**0.0012**	J	
		VMP-56-25-110315	11/3/2015	**0.0033**	J		0.098			<0.0063	U		**0.0031**	J		<0.0046	U					**0.013**			<0.0063	U	
		VMP-56-25-020416	2/4/2016	<0.021	U		0.015			**0.00071**	J		<0.0052	U		<0.0045	U					**0.0053**	J		**0.0016**	J	
		VMP-56-25-050516	5/5/2016	<0.024	U		0.0026	J		**0.0027**	J		<0.006	U		<0.0053	U					**0.0074**	J		**0.0052**	J	
		VMP-56-25-050516-DUP	5/5/2016	**0.0028**	J		<0.018	U		**0.003**	J		<0.0061	U		<0.0054	U					**0.011**	J		**0.0058**	J	
		VMP-56-25-072716	7/27/2016	**0.0025**	J		0.01	J		<0.0081	U		<0.0068	U		<0.024	U					**0.055**			<0.0081	U	
		VMP-56-25-102416	10/24/2016	<0.021	U		0.0089	J		**0.0017**	J		**0.0031**	J		<0.018	U		<0.013	U		**0.084**			**0.0009**	J	
		VMP-56-25-012417	1/24/2017	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.021	U					**0.0081**	J		<0.0073	U	
		VMP-56-25-050117	5/1/2017	<0.019	U		0.0027	J		**0.0017**	J		<0.0049	U		<0.017	U					**0.0079**	J		<0.0058	U	
		VMP-56-25-072117	7/21/2017	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.018**			<0.0062	U	
		VMP-56-25-102717	10/27/2017	<0.018	U		0.0056	J		<0.0056	U		<0.0046	U		<0.016	U					**0.002**	J		<0.0056	U	
		VMP-56-25-012918	1/29/2018	<0.018	U		0.0025	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0022**	J		<0.0055	U	
		VMP-56-25-050118	5/1/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-56-25-072618	7/26/2018	<0.02	U		<0.014	U		**0.0029**	J		<0.005	U		<0.018	U					**0.018**			<0.006	U	
		VMP-56-25-102918	10/29/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-56-25-012819	1/28/2019	<0.018	U		0.008	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0026**	J		<0.0056	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.019	U		0.0076	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0034**	J		<0.0056	U	
		VMP-56-25-050119	5/1/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					**0.0031**	J		<0.0057	U	
		VMP-56-25-072319	7/23/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0057**	J		<0.0059	U	
		VMP-56-25-102119	10/21/2019	<0.021	U		0.022			<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-56-25-012220	1/22/2020	<0.021	U		<0.015	U		<0.0064	U		**0.006**			<0.019	U					**0.027**			<0.0064	U	
		VMP-56-25-042420	4/24/2020	<0.022	U		<0.016	U		**0.0011**	J		<0.0056	U		<0.02	U					**0.0038**	J		<0.0068	U	
		VMP-56-25-072320	7/23/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	J	U	<0.0061	U	
		VMP-56-25-110320	11/3/2020	<0.021	U		0.025			<0.0063	U		<0.0053	U		<0.019	U					**0.016**			<0.0063	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.021	U		0.031			<0.0063	U		<0.0053	U		<0.019	U					**0.012**	J		<0.0063	U	
		VMP-56-25-012121	1/21/2021	<0.021	U		0.0086	J		**0.002**	J		<0.0052	U		<0.018	U					**0.011**	J		**0.0056**	J	
		VMP-56-25-012121-DUP	1/21/2021	<0.02	U		0.0098	J		**0.0017**	J		<0.0051	U		<0.018	U					**0.022**			**0.0045**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-56-10-110315	11/3/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0023**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-56-10-020416	2/4/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0022**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-56-10-050516	5/5/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0074**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-56-10-072716	7/27/2016	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0007**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-56-10-102416	10/24/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0032**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-56-10-012417	1/24/2017	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.00089**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-56-10-050117	5/1/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-56-10-072117	7/21/2017	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-56-10-102717	10/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-56-10-012918	1/29/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-56-10-050118	5/1/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-56-10-072618	7/26/2018	**0.0011**	J		<0.0085	U		<0.0084	U		<0.0037	U		**0.017**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-56-10-102918	10/29/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-56-10-012819	1/28/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		**0.0038**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-56-10-050119	5/1/2019	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.026**			<0.035	U		<0.0064	U		<0.0064	U	
		VMP-56-10-072319	7/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.007**			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-56-10-102119	10/21/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-56-10-012220	1/22/2020	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0028**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-56-10-042420	4/24/2020	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-56-10-072320	7/23/2020	<0.0088	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.052**			<0.038	J	U	<0.0071	U		<0.0071	U	
		VMP-56-10-072320-DUP	7/23/2020	<0.0094	U		<0.0095	U		**0.0013**	J		<0.0041	U		**0.042**			<0.041	U		<0.0076	U		<0.0076	U	
		VMP-56-10-110320	11/3/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-56-10-012121	1/21/2021	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-56-25-050715	5/7/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-56-25-073115	7/31/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0028**	J		<0.044	U	UJ	<0.0081	U		<0.0081	U	
		VMP-56-25-110315	11/3/2015	**0.0013**	J		<0.0088	U		<0.0088	U		**0.004**			**0.016**			<0.038	U		<0.007	U		<0.007	U	
		VMP-56-25-020416	2/4/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-56-25-050516	5/5/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		**0.00054**	J		<0.043	U		<0.008	U		<0.008	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-56-25-072716	7/27/2016	<0.007	U		<0.011	U		<0.011	U		<0.0049	U		**0.0047**	J		<0.049	U		<0.009	U		<0.009	U	
		VMP-56-25-102416	10/24/2016	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0083**			<0.038	U		<0.007	U		<0.007	U	
		VMP-56-25-012417	1/24/2017	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0014**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-56-25-050117	5/1/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-56-25-072117	7/21/2017	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-56-25-102717	10/27/2017	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		**0.0024**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-56-25-012918	1/29/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.00091**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-56-25-050118	5/1/2018	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-56-25-072618	7/26/2018	<0.0052	U		<0.0084	U		**0.006**	J		<0.0036	U		**0.0012**	J		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-56-25-102918	10/29/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-56-25-012819	1/28/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-56-25-012819-DUP	1/28/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-56-25-050119	5/1/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.00094**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-56-25-072319	7/23/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-56-25-102119	10/21/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.061**			<0.038	U		<0.007	U		<0.007	U	
		VMP-56-25-012220	1/22/2020	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-56-25-042420	4/24/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		**0.0013**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-56-25-072320	7/23/2020	<0.0085	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-56-25-110320	11/3/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0014**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-56-25-012121	1/21/2021	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	J	U	<0.037	U		<0.0068	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-56	10 ft	VMP-56-10-021015	2/10/2015	<0.0069	U		<0.0072	U		<0.0063	J	U	<0.0063	U		<0.006	U		<0.0033	U		<0.0056	J	U	**0.0025**	J	
		VMP-56-10-110315	11/3/2015	<0.0068	U		0.0019	J		<0.0062	U		<0.0062	U		0.0011	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-56-10-020416	2/4/2016	<0.0069	U		<0.0072	U		**0.0049**	J		<0.0063	U		0.0035	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-56-10-050516	5/5/2016	<0.0076	U		<0.0079	U		**0.0093**			**0.0016**	J		0.0028	J		<0.0036	U		0.0041	J		**0.002**	J	
		VMP-56-10-072716	7/27/2016	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		0.00064	J		<0.0036	U		<0.006	U		<0.006	U	
		VMP-56-10-102416	10/24/2016	<0.0071	U		<0.0074	U		**0.0025**	J		**0.001**	J		0.0031	J		<0.0034	U		0.049			**0.015**		
		VMP-56-10-012417	1/24/2017	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		0.0063			**0.0017**	J	
		VMP-56-10-050117	5/1/2017	<0.0063	U		0.0015	J		<0.0057	U		<0.0057	U		0.001	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-56-10-072117	7/21/2017	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0077			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-56-10-102717	10/27/2017	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		0.0025	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-56-10-012918	1/29/2018	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-56-10-050118	5/1/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.00097	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-56-10-072618	7/26/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		0.0085			<0.0032	U		0.0031	J		**0.00092**	J	
		VMP-56-10-102918	10/29/2018	<0.0063	U		0.002	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-56-10-012819	1/28/2019	<0.0066	U		0.0012	J		**0.0078**			**0.011**			<0.0057	U		<0.0031	U		0.0058			**0.0034**	J	
		VMP-56-10-050119	5/1/2019	<0.0063	U		0.001	J		**0.0016**	J		<0.0058	U		0.0022	J		<0.003	U		0.0087			**0.0031**	J	
		VMP-56-10-072319	7/23/2019	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0019	J		<0.0055	U	
		VMP-56-10-102119	10/21/2019	<0.0059	U		0.0015	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-56-10-012220	1/22/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-56-10-042420	4/24/2020	<0.007	U		0.00098	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-56-10-072320	7/23/2020	<0.007	U		0.00096	J		**0.00081**	J		<0.0064	U		0.57			<0.0033	U		0.0053	J		**0.00068**	J	
		VMP-56-10-072320-DUP	7/23/2020	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.6			<0.0035	U		0.0022	J		<0.006	U	
		VMP-56-10-110320	11/3/2020	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0038	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-56-10-012121	1/21/2021	<0.007	U		0.0013	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
	25 ft	VMP-56-25-021015	2/10/2015	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0061	U		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-56-25-050715	5/7/2015	<0.0076	U		<0.008	U		<0.007	J	U	<0.007	U		0.006	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-56-25-073115	7/31/2015	<0.008	U		<0.0083	U		**0.01**			**0.0026**	J		0.0034	J		<0.0038	U		0.007			**0.002**	J	
		VMP-56-25-110315	11/3/2015	<0.0069	U		0.0022	J		<0.0063	U		<0.0063	U		0.013			<0.0033	U		0.0042	J		<0.0056	U	
		VMP-56-25-020416	2/4/2016	<0.0068	U		<0.0071	U		**0.00078**	J		<0.0062	U		0.044			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-56-25-050516	5/5/2016	<0.0078	U		<0.0082	U		**0.0063**	J		<0.0072	U		0.013			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-56-25-050516-DUP	5/5/2016	<0.0081	U		<0.0084	U		**0.0062**	J		<0.0074	U		0.013			<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-56-25-072716	7/27/2016	<0.0089	U		<0.0093	U		<0.0081	U		<0.0081	U		0.0015	J		<0.0042	U		<0.0072	U		<0.0072	U	
		VMP-56-25-102416	10/24/2016	<0.0069	U		0.0016	J		**0.0023**	J		**0.00077**	J		0.00072	J		<0.0033	U		0.082			**0.021**		
		VMP-56-25-012417	1/24/2017	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.00072	J		<0.0038	U		0.0058	J		<0.0064	U	
		VMP-56-25-050117	5/1/2017	<0.0064	U		0.0012	J		**0.0011**	J		<0.0058	U		0.0016	J		<0.003	U		0.012			**0.0036**	J	
		VMP-56-25-072117	7/21/2017	<0.0067	U		0.0013	J		<0.0062	U		<0.0062	U		0.0039	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-56-25-102717	10/27/2017	<0.0061	U		0.0016	J		<0.0056	U		<0.0056	U		0.001	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-56-25-012918	1/29/2018	<0.006	U		0.0014	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-56-25-050118	5/1/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0014	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-56-25-072618	7/26/2018	**0.0022**	J		<0.0069	U		<0.006	U		<0.006	U		0.0018	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-56-25-102918	10/29/2018	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-56-25-012819	1/28/2019	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		0.0029	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-56-25-012819-DUP	1/28/2019	**0.0043**	J		<0.0065	U		<0.0056	U		<0.0056	U		0.0026	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-56-25-050119	5/1/2019	<0.0062	U		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-56-25-072319	7/23/2019	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		0.0012	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-56-25-102119	10/21/2019	<0.0069	U		0.0016	J		<0.0063	U		<0.0063	U		0.054			<0.0033	U		0.037			**0.011**		
		VMP-56-25-012220	1/22/2020	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-56-25-042420	4/24/2020	<0.0074	U		0.0011	J		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-56-25-072320	7/23/2020	<0.0067	U		0.001	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-56-25-110320	11/3/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.82			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-56-25-110320-DUP	11/3/2020	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		0.85			<0.0033	U		0.0005	J		<0.0056	U	
		VMP-56-25-012121	1/21/2021	<0.0068	U		0.0017	J		<0.0062	U		<0.0062	U		0.016			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-56-25-012121-DUP	1/21/2021	<0.0067	U		0.0015	J		<0.0061	U		<0.0061	U		0.014			<0.0032	U		<0.0054	J	U	<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<13	U		**1000**			<8.9	U		<14	U		<5.2	U		<3	U		3500			<16	U	
		VMP-56-38.5-050715	5/7/2015	<140	U		**1400**			<100	U		<160	U		<59	U		<34	U		14000			<180	U	
		VMP-56-38.5-061515-R	6/15/2015	**5.5**	J		**970**			<9.9	U		<15	U		<5.7	U		<3.3	U		5600	E	J	<17	U	
		VMP-56-38.5-073115	7/31/2015	<12	U		**670**			<8.6	U		<13	U		<5	U		<2.8	U		5700			<15	U	
		VMP-56-38.5-073115-DUP	7/31/2015	<45	U		**720**			<32	U		<49	U		<18	U		<10	U		5700			<56	U	
		VMP-56-38.5-110315	11/3/2015	<14	U		**590**			<10	U		<16	U		<5.9	U	UJ	<3.4	U		6600			<18	U	
		VMP-56-38.5-110315-DUP	11/3/2015	<100	U		**530**			<74	U		<110	U		<43	U	UJ	<24	U		6400			<130	U	
		VMP-56-38.5-020416	2/4/2016	<80	U		**470**			<57	U		<87	U		<33	U		<19	U		10000	J0	J	<100	U	
		VMP-56-38.5-050118	5/1/2018	<46	U		**880**			<32	U		<50	U		<75	U		<11	U		12000			<57	U	
		VMP-56-38.5-072618	7/26/2018	<120	U		**730**			<87	U		<130	U		<200	U		<29	U		21000			<150	U	
		VMP-56-38.5-102918	10/29/2018	<23	U		**960**			<16	U		<25	U		<37	U		<5.3	U		16000			<28	U	
		VMP-56-38.5-012819	1/28/2019	**240**	J		**600**			<590	U		<910	U		<1400	U		<200	U		11000			<1000	U	
		VMP-56-38.5-050119	5/1/2019	**140**	J		**880**			<330	U		<510	U		<770	U		<110	U		12000			<580	U	
	5 ft	VMP-62-5-020315	2/3/2015	**0.0064**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-5-042815	4/28/2015	**0.024**	J		**0.0012**	J		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		**0.0099**	J	
		VMP-62-5-072415	7/24/2015	**0.031**	J		**0.0016**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0073**	J	
		VMP-62-5-102015	10/20/2015	<0.026	J	U	**0.0012**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0034**	J	
		VMP-62-5-012816	1/28/2016	<0.031	J	U	<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-62-5-042516	4/25/2016	**0.012**	J		**0.0023**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-5-072616	7/26/2016	**0.019**	J		<0.0048	U		<0.01	U		<0.016	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-62-5-102416	10/24/2016	**0.013**	J		**0.00068**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0074	J		**0.0061**	J	
		VMP-62-5-012717	1/27/2017	<0.032	J	U	<0.0042	J	U	<0.0089	U		<0.014	U		<0.052	U		<0.0029	U		<0.013	U		**0.0069**	J	
		VMP-62-5-042517	4/25/2017	<0.031	J	U	**0.00045**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0027**	J	
		VMP-62-5-072517	7/25/2017	**0.033**			<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		**0.0076**	J	
		VMP-62-5-083017	8/30/2017	**0.028**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.007**	J	
		VMP-62-5-110317	11/3/2017	**0.011**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.0044	J		<0.013	U	
		VMP-62-5-012918	1/29/2018	<0.026	J	U	<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-62-5-032818	3/28/2018	**0.0094**	J		**0.00048**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-62-5-041018	4/10/2018	**0.009**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-62-5-072418	7/24/2018	**0.34**			**0.00034**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0052**	J	
		VMP-62-5-102418	10/24/2018	**0.012**	J		**0.002**	J		<0.0073	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0026**	J	
		VMP-62-5-012819	1/28/2019	**0.019**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-62-5-042619	4/26/2019	**0.038**			**0.00082**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0037	J		<0.014	U	
		VMP-62-5-072919	7/29/2019	**0.019**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-5-102319	10/23/2019	**0.017**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-5-012920	1/29/2020	**0.0067**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-62-5-042820	4/28/2020	**0.031**	J		**0.0013**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-5-072720	7/27/2020	**0.029**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-5-102920	10/29/2020	**0.011**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0095	J		**0.0014**	J	
		VMP-62-5-012221	1/22/2021	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<4.2	U		<8.4	U		<6.1	U		<11	U		<14	U		<6.5	U		<11	U		<6.9	U	
		VMP-56-38.5-050715	5/7/2015	<48	U		<96	U		<70	U		<130	U		<160	U		<75	U		<130	U		<79	U	
		VMP-56-38.5-061515-R	6/15/2015	<4.6	U		<9.3	U		<6.8	U		<12	U		<16	U		<7.2	U		<12	U		<7.6	U	
		VMP-56-38.5-073115	7/31/2015	<4	U		<8.1	U		<5.9	U		<11	U		<14	U		<6.3	U		<11	U		<6.7	U	
		VMP-56-38.5-073115-DUP	7/31/2015	<15	U		<30	U		<22	U		<41	U		<50	U		<23	U		<39	U		<25	U	
		VMP-56-38.5-110315	11/3/2015	<4.7	U		<9.5	U		<7	U		<13	U		<16	U		<7.4	U		<12	U		<7.8	U	UJ
		VMP-56-38.5-110315-DUP	11/3/2015	<34	U		<69	U		<51	U		<94	U		<120	U		<54	U		<91	U		<57	U	UJ
		VMP-56-38.5-020416	2/4/2016	<26	U	UJ	<53	U		<39	U		<72	U		<89	U		<41	U		<70	U		<44	U	
		VMP-56-38.5-050118	5/1/2018	<60	U		<30	U		<22	U		<41	U		<51	U		<24	U		<40	U		<25	U	
		VMP-56-38.5-072618	7/26/2018	<160	U		<81	U		<60	U		<110	U		<140	U		<63	U		<110	U		<67	U	
		VMP-56-38.5-102918	10/29/2018	<30	U		<15	U		<11	U		<20	U		<25	U		<12	U		<20	U		<12	U	
		VMP-56-38.5-012819	1/28/2019	<1100	U		<560	U		<410	U		<750	U		<930	U		<430	U		<730	U		<1800	U	
		VMP-56-38.5-050119	5/1/2019	<620	U		<310	U		<230	U		<420	U		<520	U		<240	U		<410	U		<260	U	
	5 ft	VMP-62-5-020315	2/3/2015	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-62-5-042815	4/28/2015	<0.018	U		<0.0091	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-62-5-072415	7/24/2015	**0.023**			<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-62-5-102015	10/20/2015	<0.014	J	U	<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		**0.0012**	J		<0.0057	U	
		VMP-62-5-012816	1/28/2016	**0.0017**	J		<0.0082	U		<0.006	U		<0.011	U		**0.024**			<0.0063	U		**0.034**			<0.0067	U	
		VMP-62-5-042516	4/25/2016	**0.0028**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-62-5-072616	7/26/2016	<0.019	U		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0078	U	
		VMP-62-5-102416	10/24/2016	<0.016	U		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-62-5-012717	1/27/2017	<0.016	U		<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0069	U	
		VMP-62-5-042517	4/25/2017	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-62-5-072517	7/25/2017	**0.0021**	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-62-5-083017	8/30/2017	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-62-5-110317	11/3/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-62-5-012918	1/29/2018	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-62-5-032818	3/28/2018	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-62-5-041018	4/10/2018	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-62-5-072418	7/24/2018	**0.002**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0062**			**0.031**			<0.0065	U	
		VMP-62-5-102418	10/24/2018	<0.014	U		<0.0069	U		<0.005	U		<0.0093	U		<0.012	U		<0.0053	U		<0.023	U		<0.0057	U	
		VMP-62-5-012819	1/28/2019	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-62-5-042619	4/26/2019	<0.015	U		<0.0076	U		**0.0013**	J		<0.01	U		<0.013	U		<0.0059	U		**0.0046**	J		<0.0063	U	
		VMP-62-5-072919	7/29/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-62-5-102319	10/23/2019	**0.0087**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-62-5-012920	1/29/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-62-5-042820	4/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-62-5-072720	7/27/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-62-5-102920	10/29/2020	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-62-5-012221	1/22/2021	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	**410**			<10	U		<8	U		<8	U		<8	U		<6.6	U		<5.4	U		<5.4	U	
		VMP-56-38.5-050715	5/7/2015	**1100**			<120	U		<92	U		<92	U		<92	U		<76	U		<62	U		<62	U	
		VMP-56-38.5-061515-R	6/15/2015	**730**			<11	U		<8.9	U		<8.9	U		<8.9	U		<7.3	U		<6	U		<6	U	
		VMP-56-38.5-073115	7/31/2015	**230**			<9.9	U		<7.8	U		<7.8	U		<7.8	U		<6.4	U		<5.2	U		<5.2	U	
		VMP-56-38.5-073115-DUP	7/31/2015	**250**			<37	U		<29	U		<29	U		<29	U		<24	U		<19	U		<19	U	
		VMP-56-38.5-110315	11/3/2015	**600**			<12	U		<9.1	U		<9.1	U		<9.1	U		<7.5	U		<6.1	U		<6.1	U	
		VMP-56-38.5-110315-DUP	11/3/2015	**550**			<84	U		<66	U		<66	U		<66	U		<54	U		<44	U		<44	U	
		VMP-56-38.5-020416	2/4/2016	<29	U		<65	U		<51	U		<51	U		<51	U		<42	U		<34	U		<34	U	
		VMP-56-38.5-050118	5/1/2018	**810**			<37	U		<29	U		<29	U		<29	U		<24	U		<20	U		<20	U	
		VMP-56-38.5-072618	7/26/2018	**720**			<100	U		<78	U		<78	U		<78	U		<64	U		<52	U		<52	U	
		VMP-56-38.5-102918	10/29/2018	**740**			<18	U		<14	U		<14	U		<14	U		<12	U		<9.6	U		<9.6	U	
		VMP-56-38.5-012819	1/28/2019	**430**			<680	U		<530	U		<530	U		<530	U		<440	U		<360	U		<360	U	
		VMP-56-38.5-050119	5/1/2019	**1400**			<380	U		<300	U		<300	U		<300	U		<240	U		<200	U		<200	U	
	5 ft	VMP-62-5-020315	2/3/2015	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-62-5-042815	4/28/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0027**	J		<0.0059	U		<0.0059	U	
		VMP-62-5-072415	7/24/2015	**0.00078**	J		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0023**	J		<0.006	U		<0.006	U	
		VMP-62-5-102015	10/20/2015	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0033**	J		<0.0044	U		<0.0044	U	
		VMP-62-5-012816	1/28/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0019**	J		<0.0053	U		<0.0053	U	
		VMP-62-5-042516	4/25/2016	<0.0042	J	U	<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-62-5-072616	7/26/2016	<0.0052	U		<0.012	U		<0.009	U		<0.009	U		<0.009	U		**0.0029**	J		<0.0061	U		<0.0061	U	
		VMP-62-5-102416	10/24/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0027**	J		<0.0052	U		<0.0052	U	
		VMP-62-5-012717	1/27/2017	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-62-5-042517	4/25/2017	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-62-5-072517	7/25/2017	**0.0057**			<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0031**	J		<0.0043	U		<0.0043	U	
		VMP-62-5-083017	8/30/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-62-5-110317	11/3/2017	**0.026**			<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-62-5-012918	1/29/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0031**	J		<0.0044	U		<0.0044	U	
		VMP-62-5-032818	3/28/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0024**	J		<0.0045	U		<0.0045	U	
		VMP-62-5-041018	4/10/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-62-5-072418	7/24/2018	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-62-5-102418	10/24/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0033**	J		<0.0044	U		<0.0044	U	
		VMP-62-5-012819	1/28/2019	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-62-5-042619	4/26/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-62-5-072919	7/29/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-62-5-102319	10/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0028**	J		<0.0051	U		<0.0051	U	
		VMP-62-5-012920	1/29/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-62-5-042820	4/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0055	U		<0.0055	U	
		VMP-62-5-072720	7/27/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0025**	J		<0.0049	U		<0.0049	U	
		VMP-62-5-102920	10/29/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-62-5-012221	1/22/2021	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<5.3	U		<5.3	U		<5.3	U		<4.6	U		<6.2	U		<6	U		<6	U		<19	U	
		VMP-56-38.5-050715	5/7/2015	<61	U		<61	U		<61	U		<53	U		<71	U		<69	U		<69	U		<220	U	
		VMP-56-38.5-061515-R	6/15/2015	<5.8	U		<5.8	U		<5.8	U		<5.1	U		<6.8	U		<6.7	U		<6.7	U		<21	U	
		VMP-56-38.5-073115	7/31/2015	<5.1	U		<5.1	U		<5.1	U		<4.5	U		<6	U		<5.8	U		<5.8	U		<18	U	
		VMP-56-38.5-073115-DUP	7/31/2015	<19	U		<19	U		<19	U		<17	U		<22	U		<22	U		<22	U		<69	U	
		VMP-56-38.5-110315	11/3/2015	<6	U		<6	U		<6	U		<5.3	U		<7	U		<6.9	U		<6.9	U		<22	U	
		VMP-56-38.5-110315-DUP	11/3/2015	<44	U		<44	U		<44	U		**15**	J		<51	U		<50	U		<50	U		<160	U	
		VMP-56-38.5-020416	2/4/2016	<34	U		<34	U		<34	U		<29	U		<39	U		<38	U		<38	U		<120	U	
		VMP-56-38.5-050118	5/1/2018	<19	U		<19	U		<19	U		<67	U		<22	U		<22	U		<22	U		<70	U	
		VMP-56-38.5-072618	7/26/2018	<51	U		<51	U		<51	U		<180	U		<60	U		<59	U		<59	U		<190	U	
		VMP-56-38.5-102918	10/29/2018	<9.4	U		<9.4	U		<9.4	U		<33	U		<11	U		<11	U		<11	U		<34	U	
		VMP-56-38.5-012819	1/28/2019	<350	U		<350	U		<350	U		**130**	J		<410	U		<400	U		<400	U		<1300	U	
		VMP-56-38.5-050119	5/1/2019	<200	U		<200	U		<200	U		<690	U		<230	U		<220	U		<220	U		<710	U	
	5 ft	VMP-62-5-020315	2/3/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-5-042815	4/28/2015	<0.0057	U		<0.0057	U		<0.0057	U	UJ	<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-62-5-072415	7/24/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-62-5-102015	10/20/2015	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	J	U	<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-62-5-012816	1/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-62-5-042516	4/25/2016	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-5-072616	7/26/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-62-5-102416	10/24/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-62-5-012717	1/27/2017	<0.0053	U		<0.0053	U		<0.0053	U		**0.0025**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-62-5-042517	4/25/2017	<0.0051	U		<0.0051	U		<0.0051	U		**0.0031**	J		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-5-072517	7/25/2017	<0.0042	U		<0.0042	U		<0.0042	U		**0.01**	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-62-5-083017	8/30/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-5-110317	11/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-5-012918	1/29/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-62-5-032818	3/28/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-5-041018	4/10/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-5-072418	7/24/2018	<0.005	U		<0.005	U		<0.005	U		**0.0055**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-62-5-102418	10/24/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-62-5-012819	1/28/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-62-5-042619	4/26/2019	<0.0048	U		0.003	J		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-5-072919	7/29/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-5-102319	10/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-62-5-012920	1/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-5-042820	4/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		**0.0023**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-62-5-072720	7/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		**0.0012**	J	
		VMP-62-5-102920	10/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-5-012221	1/22/2021	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<10	U		**580**			36			<10	U		<9.3	U		**2100**			<57	U		**4200**		
		VMP-56-38.5-050715	5/7/2015	<120	U		**510**			150			<120	U		<110	U		**1900**			<650	U		**10000**		
		VMP-56-38.5-061515-R	6/15/2015	8	J		**390**			71			<11	U		<10	U		**2000**			<63	U		**4700**		
		VMP-56-38.5-073115	7/31/2015	<9.7	U		**510**			320			<9.9	U		<9	U		**690**			<55	U		**1200**		
		VMP-56-38.5-073115-DUP	7/31/2015	<36	U		**500**			320			<37	U		<33	U		**720**			<200	U		**1200**		
		VMP-56-38.5-110315	11/3/2015	<11	U		**830**		J	220		J	<12	U		<10	U		**2500**			<65	U		**9600**		
		VMP-56-38.5-110315-DUP	11/3/2015	<83	U		**440**		J	63		J	<84	U		<77	U		**2100**			<470	U		**9300**		
		VMP-56-38.5-020416	2/4/2016	<64	U		**250**			15	J		<65	U		<59	U		**1700**			<360	U		**8400**		
		VMP-56-38.5-050118	5/1/2018	<36	U		**560**			77			<37	U		<34	U		**2500**			<210	U		**12000**		
		VMP-56-38.5-072618	7/26/2018	<98	U		**460**			140			<99	U		<90	U		**1700**			<550	U		**9900**		
		VMP-56-38.5-102918	10/29/2018	<18	U		**400**			91			<18	U		<17	U		**2300**			<100	U		**11000**		
		VMP-56-38.5-012819	1/28/2019	<670	U		**210**	J		<440	U		<680	U		<620	U		**1500**			<3800	U		**5800**		
		VMP-56-38.5-050119	5/1/2019	86	J		**470**			200	J		<380	U		<350	U		**3100**			<2100	U		**10000**		
	5 ft	VMP-62-5-020315	2/3/2015	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-5-042815	4/28/2015	0.0046	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U	UJ	<0.0051	U	
		VMP-62-5-072415	7/24/2015	0.034		J	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		**0.0017**	J		<0.063	U		**0.0022**	J	
		VMP-62-5-102015	10/20/2015	0.007	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		**0.0022**	J		<0.047	ND,UJ	UJ	<0.0038	J	U
		VMP-62-5-012816	1/28/2016	0.0089	J		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	ND,UJ	UJ	<0.0046	U	
		VMP-62-5-042516	4/25/2016	0.0086	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	J	U	<0.052	U		<0.0043	J	U
		VMP-62-5-072616	7/26/2016	0.0074	J		<0.0065	U		<0.0074	U		<0.011	U		<0.01	U		**0.0042**	J		<0.064	U		**0.0011**	J	
		VMP-62-5-102416	10/24/2016	<0.0098	J	U	**0.001**	J		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.0015**	J	
		VMP-62-5-012717	1/27/2017	0.033			**0.00064**	J		<0.0065	U		<0.01	U		<0.0093	U		**0.002**	J		<0.057	U		**0.0014**	J	
		VMP-62-5-042517	4/25/2017	0.0084	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-62-5-072517	7/25/2017	2.1			**0.0018**	J		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		**0.0016**	J	
		VMP-62-5-083017	8/30/2017	0.027			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-5-110317	11/3/2017	0.0056	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.03**			<0.048	U		**0.014**		
		VMP-62-5-012918	1/29/2018	0.051			<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-62-5-032818	3/28/2018	0.006	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		**0.0013**	J		<0.048	U		<0.0039	U	
		VMP-62-5-041018	4/10/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-62-5-072418	7/24/2018	<0.0094	U		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-5-102418	10/24/2018	<0.0082	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.047	U		<0.0038	U	
		VMP-62-5-012819	1/28/2019	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-62-5-042619	4/26/2019	0.0035	J		<0.0052	U		0.0019	J		<0.0093	U		<0.0084	U		**0.0012**	J		<0.052	U		<0.0043	U	
		VMP-62-5-072919	7/29/2019	<0.0097	U	UJ	<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-62-5-102319	10/23/2019	0.0091	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-62-5-012920	1/29/2020	<0.0091	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-62-5-042820	4/28/2020	0.046		J	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		**0.0012**	J		<0.058	U		<0.0048	U	
		VMP-62-5-072720	7/27/2020	0.0025	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-5-102920	10/29/2020	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.06**			<0.052	U		**0.062**		
		VMP-62-5-012221	1/22/2021	0.0045	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<22	U		6900			**8.7**			<5.5	U		<4.8	U					<13	U		**13**		
		VMP-56-38.5-050715	5/7/2015	<250	U		41000			**22**	J		<63	U		<55	U					<150	U		**45**	J	
		VMP-56-38.5-061515-R	6/15/2015	<24	U		13000	E	J	**14**			<6	U		<5.3	U					<14	U		**22**		
		VMP-56-38.5-073115	7/31/2015	<21	U		8000			**27**			<5.3	U		<4.6	U					<13	U		**76**		
		VMP-56-38.5-073115-DUP	7/31/2015	<78	U		8200			**27**			<20	U		<17	U					<47	U		**74**		
		VMP-56-38.5-110315	11/3/2015	<25	U		20000			**25**			<6.2	U		<5.5	ND,UJ	UJ				<15	U		**56**		
		VMP-56-38.5-110315-DUP	11/3/2015	<180	U		19000			**11**	J		<45	U		<40	ND,UJ	UJ				<110	U		**17**	J	
		VMP-56-38.5-020416	2/4/2016	<140	U		24000			<42	U		<35	U		<30	U					<83	U		**5.2**	J	
		VMP-56-38.5-050118	5/1/2018	<79	U		30000			**16**	J		<20	U		<17	U					<48	U		**23**	J	
		VMP-56-38.5-072618	7/26/2018	<210	U		50000			**17**	J		<53	U		<47	U					<130	U		**30**	J	
		VMP-56-38.5-102918	10/29/2018	<39	U	UJ	42000			**10**	J		<9.7	U		<8.6	U					<23	U		**14**		
		VMP-56-38.5-012819	1/28/2019	<1400	U		22000			<440	U		<1400	U		<320	U					**130**	J		<440	U	
		VMP-56-38.5-050119	5/1/2019	<810	U		40000			**30**	J		<200	U		<180	U					<490	U		**39**	J	
	5 ft	VMP-62-5-020315	2/3/2015	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.0044	U					<0.012	U		<0.0059	U	
		VMP-62-5-042815	4/28/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					**0.0057**	J		<0.0071	U	
		VMP-62-5-072415	7/24/2015	<0.024	U		0.013	J	J	<0.0072	U		<0.006	U		<0.0053	U					**0.013**	J	J	<0.0072	U	
		VMP-62-5-102015	10/20/2015	**0.00091**	J		0.0019	J		<0.0054	U		**0.0011**	J		<0.0039	U					**0.0033**	J		<0.0054	U	
		VMP-62-5-012816	1/28/2016	<0.021	U		<0.015	U		<0.0064	U		**0.0028**	J		<0.0047	U					**0.018**			<0.0064	U	
		VMP-62-5-042516	4/25/2016	<0.02	U		0.0036	J		<0.0059	U		<0.005	U		<0.0044	U					**0.027**			<0.0059	U	
		VMP-62-5-072616	7/26/2016	<0.024	U		<0.018	U		<0.0074	U		<0.0061	U		<0.022	U					**0.012**	J		<0.0074	U	
		VMP-62-5-102416	10/24/2016	<0.021	U		0.0043	J		<0.0064	U		<0.0053	U		<0.019	U		<0.014	U		**0.008**	J		<0.0064	U	
		VMP-62-5-012717	1/27/2017	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					**0.003**	J		<0.0065	U	
		VMP-62-5-042517	4/25/2017	<0.021	U		0.008	J		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-62-5-072517	7/25/2017	<0.017	U		0.062			<0.0052	U		<0.0044	U		<0.015	U					**0.028**			<0.0052	U	
		VMP-62-5-083017	8/30/2017	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-62-5-110317	11/3/2017	<0.018	U		0.02			<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-62-5-012918	1/29/2018	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0017**	J		<0.0053	U	
		VMP-62-5-032818	3/28/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		<0.012	U		<0.011	U		<0.0055	U	
		VMP-62-5-041018	4/10/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		<0.012	U		**0.0018**	J		<0.0055	U	
		VMP-62-5-072418	7/24/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0092**	J		<0.0061	U	
		VMP-62-5-102418	10/24/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-62-5-012819	1/28/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.002**	J		<0.0057	U	
		VMP-62-5-042619	4/26/2019	<0.02	U		0.0032	J		<0.0059	U		<0.005	U		<0.017	U					**0.0031**	J		<0.0059	U	
		VMP-62-5-072919	7/29/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.023**			<0.0063	U	
		VMP-62-5-102319	10/23/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0028**	J		<0.0062	U	
		VMP-62-5-012920	1/29/2020	<0.02	U		<0.014	U	UJ	<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-62-5-042820	4/28/2020	<0.022	U		0.0063	J		<0.0066	U		<0.0055	U		<0.019	U					**0.02**			<0.0066	U	
		VMP-62-5-072720	7/27/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0029**	J		<0.006	U	
		VMP-62-5-102920	10/29/2020	<0.02	U		0.013	J		<0.0059	U		<0.005	U		<0.017	U					**0.009**	J		<0.0059	U	
		VMP-62-5-012221	1/22/2021	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	J	U	<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<5.7	U		<9.2	U		<9	U		<3.9	U		**3200**			<40	U		<7.3	U		<7.3	U	
		VMP-56-38.5-050715	5/7/2015	<65	U		<100	U					<45	U		**3400**			<450	U		<83	U		<83	U	
		VMP-56-38.5-061515-R	6/15/2015	<6.3	U		<10	U		<10	U		<4.3	U		**2300**			<44	U		<8	U		<8	U	
		VMP-56-38.5-073115	7/31/2015	<5.5	U		<8.8	U		<8.8	U		<3.8	U		**2300**			<38	U		<7	U		<7	U	
		VMP-56-38.5-073115-DUP	7/31/2015	<20	U		<33	U		<32	U		<14	U		**2400**			<140	U		<26	U		<26	U	
		VMP-56-38.5-110315	11/3/2015	<6.4	U		<10	U		<10	U		<4.5	U		**4300**		J	<45	U		<8.3	U		<8.3	U	
		VMP-56-38.5-110315-DUP	11/3/2015	<47	U		<76	U		<75	U		<32	U		**3100**		J	<330	U		<60	U		<60	U	
		VMP-56-38.5-020416	2/4/2016	<36	U		<58	U		<57	U		<25	U		**2700**			<250	U		<46	U		<46	U	
		VMP-56-38.5-050118	5/1/2018	<21	U		<33	U		<33	U		<14	U		**4200**	CN	J	<140	U		<26	U		<26	U	
		VMP-56-38.5-072618	7/26/2018	<55	U		<89	U		<88	U		<38	U		**3400**	CN	J	<380	U		<71	U		<71	U	
		VMP-56-38.5-102918	10/29/2018	<10	U		<16	U		<16	U		<7	U	UJ	**4100**			<71	U		<13	U		<13	U	
		VMP-56-38.5-012819	1/28/2019	<380	U		<610	U		<600	U		<260	U		**2800**	CN	J	<2600	U		<480	U		<480	U	
		VMP-56-38.5-050119	5/1/2019	<210	U		<340	U		<340	U		<150	U		**3700**	CN	J	<1500	U		<270	U		<270	U	
	5 ft	VMP-62-5-020315	2/3/2015	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-5-042815	4/28/2015	<0.0062	U		<0.01	U		<0.0098	U		<0.0043	U		**0.0016**	J		<0.043	U	UJ	<0.0079	U		<0.0079	U	
		VMP-62-5-072415	7/24/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		**0.0017**	J		<0.044	U		<0.008	U		<0.008	U	
		VMP-62-5-102015	10/20/2015	<0.0047	U		<0.0075	U		<0.0074	U		**0.00077**	J		**0.0014**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-62-5-012816	1/28/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	ND,UJ	UJ	<0.0071	U		<0.0071	U	
		VMP-62-5-042516	4/25/2016	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0023**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-5-072616	7/26/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		**0.0063**			<0.044	U		<0.0082	U		<0.0082	U	
		VMP-62-5-102416	10/24/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.002**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-62-5-012717	1/27/2017	<0.0057	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0031**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-62-5-042517	4/25/2017	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-62-5-072517	7/25/2017	**0.0018**	J		<0.0073	U		<0.0072	U		**0.0023**	J		**0.015**			<0.032	U		<0.0058	U		<0.0058	U	
		VMP-62-5-083017	8/30/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0012**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-62-5-110317	11/3/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-5-012918	1/29/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-62-5-032818	3/28/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-5-041018	4/10/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-5-072418	7/24/2018	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.001**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-62-5-102418	10/24/2018	<0.0047	U		<0.0075	U		<0.0074	U		<0.0032	U		**0.0017**	J		<0.032	U		<0.006	U		<0.006	U	
		VMP-62-5-012819	1/28/2019	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-62-5-042619	4/26/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0024**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-5-072919	7/29/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-62-5-102319	10/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-62-5-012920	1/29/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0045	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-5-042820	4/28/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0012**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-62-5-072720	7/27/2020	<0.0083	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-5-102920	10/29/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-5-012221	1/22/2021	<0.005	U		<0.008	ND,UJ	UJ	<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	38.5 ft	VMP-56-38.5-021015	2/10/2015	<7.2	U		<7.5	U		**14**			**6.6**			5200			<3.4	U		1100			**280**		
		VMP-56-38.5-050715	5/7/2015	<82	U		<86	U		**110**			**38**	J		6600			<39	U		1000			**270**		
		VMP-56-38.5-061515-R	6/15/2015	<7.9	U		<8.3	U		**39**			**20**			5800			<3.8	U		690			**170**		
		VMP-56-38.5-073115	7/31/2015	<6.9	U		<7.2	U		**350**			**110**			3100			<3.3	U		1100			**370**		
		VMP-56-38.5-073115-DUP	7/31/2015	<26	U		<27	U		**360**			**120**			3100			<12	U		1000			**350**		
		VMP-56-38.5-110315	11/3/2015	<8.1	U		<8.5	U		**160**		J	**59**			6100			<3.9	U		1800		J	**540**		J
		VMP-56-38.5-110315-DUP	11/3/2015	<59	U		<62	U		**31**	J	J	**18**	J		5600			<28	U		910		J	**250**		J
		VMP-56-38.5-020416	2/4/2016	<45	U		<47	U		<42	U		**3.6**	J		4400			<22	U		480			**110**		
		VMP-56-38.5-050118	5/1/2018	<26	U		<27	U		**34**			**21**	J		6300			<12	U		1200			**350**		
		VMP-56-38.5-072618	7/26/2018	<70	U		<73	U		**95**			**42**	J		4300			<33	U		1300			**410**		
		VMP-56-38.5-102918	10/29/2018	<13	U		<13	U		**51**			**21**			4800			<6.1	U		1200			**360**		
		VMP-56-38.5-012819	1/28/2019	<480	U		<500	U		<440	U		<440	U		3200			<230	U		530			**140**	J	
		VMP-56-38.5-050119	5/1/2019	<270	U		<280	U		**160**	J		**81**	J		4700			<130	U		1600			**500**		
	5 ft	VMP-62-5-020315	2/3/2015	<0.0065	U		0.00094	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-5-042815	4/28/2015	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		0.0011	J		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-62-5-072415	7/24/2015	<0.0079	U		<0.0083	U		<0.0072	U		<0.0072	U		0.0049	J		<0.0038	U		0.0018	J		<0.0064	U	
		VMP-62-5-102015	10/20/2015	<0.0059	U		0.002	J		**0.0012**	J		<0.0054	U		0.0013	J		<0.0028	U		0.002	J		<0.0048	U	
		VMP-62-5-012816	1/28/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-62-5-042516	4/25/2016	<0.0065	U		0.0021	J		<0.0059	U		<0.0059	U		<0.0056	J	U	<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-5-072616	7/26/2016	<0.0081	U		0.0015	J		<0.0074	U		<0.0074	U		0.0017	J		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-62-5-102416	10/24/2016	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.0028	J		<0.0033	U		0.0033	J		<0.0056	U	
		VMP-62-5-012717	1/27/2017	<0.0071	U		<0.0075	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0016	J		<0.0058	U	
		VMP-62-5-042517	4/25/2017	<0.0069	U		0.0018	J		<0.0063	U		<0.0063	U		0.0082			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-62-5-072517	7/25/2017	<0.0057	U		0.0016	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		0.0032	J		<0.0046	U	
		VMP-62-5-083017	8/30/2017	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.005	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-5-110317	11/3/2017	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.053			<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-5-012918	1/29/2018	<0.0058	U		<0.0061	U		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-62-5-032818	3/28/2018	<0.006	U		0.0011	J		<0.0055	U		<0.0055	U		0.0026	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-5-041018	4/10/2018	<0.006	U		0.0016	J		<0.0055	U		<0.0055	U		0.00064	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-5-072418	7/24/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-5-102418	10/24/2018	<0.0059	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-62-5-012819	1/28/2019	<0.0062	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-62-5-042619	4/26/2019	**0.0011**	J		0.0019	J		**0.0039**	J		**0.001**	J		<0.0056	U		<0.0031	U		0.0018	J		<0.0052	U	
		VMP-62-5-072919	7/29/2019	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-62-5-102319	10/23/2019	<0.0068	U		0.002	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-5-012920	1/29/2020	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-5-042820	4/28/2020	<0.0072	U		0.0012	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-62-5-072720	7/27/2020	<0.0066	U		0.0015	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-62-5-102920	10/29/2020	<0.0065	U		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-5-012221	1/22/2021	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0028	J		<0.003	U		<0.005	U		<0.005	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	**0.0063**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-10-042815	4/28/2015	**0.0079**	J		**0.00099**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-10-072415	7/24/2015	**0.039**			<0.0043	U		**0.0062**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0051**	J	
		VMP-62-10-102015	10/20/2015	<0.033	J	U	**0.0012**	J		<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		0.0049	J		**0.0031**	J	
		VMP-62-10-012816	1/28/2016	**0.025**	J		**0.00054**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0046**	J	
		VMP-62-10-042516	4/25/2016	**0.016**	J		**0.0013**	J		**0.0022**	J		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		<0.018	U	
		VMP-62-10-072616	7/26/2016	**0.0075**	J		<0.005	U		**0.0062**	J		<0.016	U		<0.061	U		<0.0035	U		<0.015	U		<0.018	U	
		VMP-62-10-102416	10/24/2016	**0.023**	J		**0.00058**	J		**0.0043**	J		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.01**	J	
		VMP-62-10-012717	1/27/2017	**0.01**	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0053	J		<0.014	U	
		VMP-62-10-042517	4/25/2017	<0.031	J	U	<0.0042	U		**0.0073**	J		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0036**	J	
		VMP-62-10-072517	7/25/2017	**0.014**	J		<0.0038	U		**0.0072**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-62-10-110317	11/3/2017	<0.026	J	U	<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-62-10-012918	1/29/2018	<0.025	J	U	<0.0034	U		**0.00091**	J		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-62-10-032818	3/28/2018	**0.0084**	J		<0.0034	U		**0.0028**	J		<0.011	U		<0.042	U		<0.0024	U		0.0045	J		**0.0026**	J	
		VMP-62-10-041018	4/10/2018	**0.0082**	J		<0.0035	U		**0.0043**	J		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		**0.002**	J	
		VMP-62-10-072418	7/24/2018	**0.032**			**0.00072**	J		**0.0034**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0041**	J	
		VMP-62-10-102418	10/24/2018	**0.056**			<0.0034	U		**0.0019**	J		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		**0.003**	J	
		VMP-62-10-012819	1/28/2019	**0.017**	J		<0.0036	U		**0.0029**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-62-10-042619	4/26/2019	**0.017**	J		<0.0043	U		**0.0037**	J		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-10-072919	7/29/2019	**0.028**			<0.0037	U		**0.0034**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-62-10-072919-DUP	7/29/2019	**0.0088**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-10-102319	10/23/2019	**0.0062**	J		<0.0041	U		**0.0031**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-10-012920	1/29/2020	**0.0088**	J		<0.0041	U		**0.0041**	J		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-10-042820	4/28/2020	**0.011**	J		<0.0048	U		**0.0085**	J		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-62-10-072720	7/27/2020	**0.012**	J		<0.0036	U		**0.0021**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-62-10-102920	10/29/2020	**0.016**	J		<0.0039	U		**0.0031**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0031**	J	
		VMP-62-10-012221	1/22/2021	<0.029	J	U	<0.004	U		**0.0024**	J		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
	20 ft	VMP-62-20-020315	2/3/2015	<0.035	U		<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-62-20-042815	4/28/2015	**0.011**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.013	U		**0.0042**	J	
		VMP-62-20-072415	7/24/2015	**0.02**	J		**0.0012**	J		<0.0087	U		<0.013	U		<0.051	U		<0.0029	U		<0.012	U		**0.0048**	J	
		VMP-62-20-102015	10/20/2015	<0.03	J	U	**0.0012**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0034	J		**0.0063**	J	
		VMP-62-20-012816	1/28/2016	**0.011**	J		<0.0047	U		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		<0.014	U		<0.018	U	
		VMP-62-20-042516	4/25/2016	**0.01**	J		**0.0016**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-20-072616	7/26/2016	**0.036**			<0.0041	U		**0.013**			<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-62-20-102416	10/24/2016	**0.018**	J		**0.0014**	J		**0.0037**	J		<0.012	U		<0.045	U		<0.0026	U		0.018			**0.0055**	J	
		VMP-62-20-020217	2/2/2017	**0.012**	J		**0.0012**	J		**0.0022**	J		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0051**	J	
		VMP-62-20-042517	4/25/2017	<0.029	J	U	<0.0039	U		**0.015**			<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-62-20-072517	7/25/2017	**0.015**	J		<0.0039	U		**0.035**			<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-20-110317	11/3/2017	**0.014**	J		<0.0036	J	U	**0.0045**	J		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-62-20-012918	1/29/2018	**0.012**	J		<0.0033	U		**0.0036**	J		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		**0.0029**	J	
		VMP-62-20-032818	3/28/2018	**0.012**	J		<0.0038	U		**0.005**	J		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0019**	J	
		VMP-62-20-072418	7/24/2018	**0.038**			<0.0039	U		**0.04**			<0.013	U		<0.048	U		<0.0027	U		0.0041	J		**0.0061**	J	
		VMP-62-20-102418	10/24/2018	**0.013**	J		<0.0036	U		**0.013**			<0.012	U		<0.044	U		<0.0025	U		0.0074	J		**0.003**	J	
		VMP-62-20-012819	1/28/2019	**0.009**	J		**0.0013**	J		**0.0066**	J		<0.012	U		<0.043	U		<0.0025	U		0.019			<0.013	U	
		VMP-62-20-042619	4/26/2019	**0.013**	J		**0.00092**	J		**0.018**			<0.013	U		<0.048	U		<0.0027	U		0.0018	J		<0.014	U	
		VMP-62-20-072919	7/29/2019	**0.025**	J		<0.0039	U		**0.011**			<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0049**	J	
		VMP-62-20-102319	10/23/2019	**0.012**	J		<0.0039	U		**0.01**			<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-20-012920	1/29/2020	**0.0057**	J		<0.0046	U		<0.0096	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-62-20-042820	4/28/2020	**0.023**	J		<0.0043	U		**0.015**			<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-20-042820-DUP	4/28/2020	**0.016**	J		<0.0044	U		**0.015**			<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-20-072720	7/27/2020	**0.022**	J		<0.0037	U		**0.0021**	J		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0048**	J	
		VMP-62-20-102920	10/29/2020	**0.023**	J		<0.004	U		**0.0013**	J		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0036**	J	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-62-10-042815	4/28/2015	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0024**	J		<0.028	U		<0.007	U	
		VMP-62-10-072415	7/24/2015	**0.089**			<0.0085	U		<0.0062	U		<0.012	U		<0.014	U		**0.025**			<0.028	U		<0.007	U	
		VMP-62-10-102015	10/20/2015	**0.0038**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.015	U		**0.012**			<0.029	U		<0.0072	U	
		VMP-62-10-012816	1/28/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-62-10-042516	4/25/2016	**0.004**	J		<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		**0.0055**	J		<0.032	U		<0.0079	U	
		VMP-62-10-072616	7/26/2016	<0.02	U		<0.0099	U		<0.0072	U		<0.013	U		<0.017	U		**0.01**			<0.032	U		<0.0082	U	
		VMP-62-10-102416	10/24/2016	**0.0034**	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.012**			**0.0022**	J		<0.0056	U	
		VMP-62-10-012717	1/27/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0061**			**0.0058**	J		<0.0062	U	
		VMP-62-10-042517	4/25/2017	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		**0.017**			<0.027	U		<0.0068	U	
		VMP-62-10-072517	7/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.021**			<0.024	U		<0.0061	U	
		VMP-62-10-110317	11/3/2017	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		**0.0025**	J		<0.023	U		<0.0057	U	
		VMP-62-10-012918	1/29/2018	**0.0019**	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0024**	J		<0.022	U		<0.0055	U	
		VMP-62-10-032818	3/28/2018	<0.013	J	U	<0.0068	U		<0.0049	U		<0.0092	U		<0.011	U		**0.0075**			<0.022	U		<0.0056	U	
		VMP-62-10-041018	4/10/2018	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		**0.013**			<0.023	U		<0.0057	U	
		VMP-62-10-072418	7/24/2018	**0.002**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.014**			<0.026	U		<0.0065	U	
		VMP-62-10-102418	10/24/2018	<0.013	U		<0.0066	U		<0.0048	U		<0.009	U		<0.011	U		**0.0078**			<0.022	U		<0.0055	U	
		VMP-62-10-012819	1/28/2019	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.012**			<0.023	U		<0.0058	U	
		VMP-62-10-042619	4/26/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.012**			<0.028	U		<0.007	U	
		VMP-62-10-072919	7/29/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.021**			<0.024	U		<0.006	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.021**			<0.026	U		<0.0064	U	
		VMP-62-10-102319	10/23/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.014**			<0.027	U		<0.0067	U	
		VMP-62-10-012920	1/29/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		**0.014**			<0.026	U	UJ	<0.0066	U	
		VMP-62-10-042820	4/28/2020	<0.019	U		<0.0094	U		<0.0069	U		<0.013	U		<0.016	U		**0.036**			<0.031	U		<0.0077	U	
		VMP-62-10-072720	7/27/2020	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		**0.019**			<0.023	U		<0.0058	U	
		VMP-62-10-102920	10/29/2020	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.015**			<0.025	U		<0.0063	U	
		VMP-62-10-012221	1/22/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.01**			<0.026	U		<0.0064	U	
	20 ft	VMP-62-20-020315	2/3/2015	<0.018	U		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-62-20-042815	4/28/2015	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-62-20-072415	7/24/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.019**			<0.027	U		<0.0068	U	
		VMP-62-20-102015	10/20/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0087**			<0.026	U		<0.0065	U	
		VMP-62-20-012816	1/28/2016	**0.0014**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.031	U		<0.0077	U	
		VMP-62-20-042516	4/25/2016	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0034**	J		<0.026	U		<0.0066	U	
		VMP-62-20-072616	7/26/2016	**0.003**	J		<0.0081	U		<0.006	U		<0.011	U		<0.014	U		**0.016**			<0.027	U		<0.0067	U	
		VMP-62-20-102416	10/24/2016	**0.0023**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		**0.01**			<0.024	U		<0.006	U	
		VMP-62-20-020217	2/2/2017	**0.00079**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0041**	J		<0.024	U		<0.0062	U	
		VMP-62-20-042517	4/25/2017	<0.015	J	U	<0.0078	U		<0.0057	U		0.0024	J		<0.013	U		**0.03**			<0.026	U		<0.0064	U	
		VMP-62-20-072517	7/25/2017	<0.015	U		<0.0076	U		<0.0056	U		0.0033	J		<0.013	U		**0.071**			<0.025	U		<0.0063	U	
		VMP-62-20-110317	11/3/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.013**			<0.023	U		<0.0058	U	
		VMP-62-20-012918	1/29/2018	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		**0.013**			<0.022	U		<0.0054	U	
		VMP-62-20-032818	3/28/2018	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.023**			<0.025	U		<0.0062	U	
		VMP-62-20-072418	7/24/2018	<0.015	U		<0.0077	U		<0.0057	U		0.0064	J		<0.013	U		**0.12**			<0.025	U		<0.0064	U	
		VMP-62-20-102418	10/24/2018	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		**0.056**			<0.024	U		<0.0059	U	
		VMP-62-20-012819	1/28/2019	<0.014	U		<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		**0.028**			<0.023	U		<0.0058	U	
		VMP-62-20-042619	4/26/2019	**0.0024**	J		<0.0078	U		<0.0057	U		0.0046	J		<0.013	U		**0.04**			<0.026	U		<0.0064	U	
		VMP-62-20-072919	7/29/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.095**			<0.025	U		<0.0063	U	
		VMP-62-20-102319	10/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.026**			<0.026	U		<0.0064	U	
		VMP-62-20-012920	1/29/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		**0.0084**			<0.03	U		<0.0074	U	
		VMP-62-20-042820	4/28/2020	**0.012**	J		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.041**			<0.028	U		<0.007	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.04**			<0.028	U		<0.0071	U	
		VMP-62-20-072720	7/27/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		**0.021**			<0.024	U		<0.006	U	
		VMP-62-20-102920	10/29/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.021**			<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-62-10-042815	4/28/2015	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0025**	J		<0.0055	U		<0.0055	U	
		VMP-62-10-072415	7/24/2015	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0031**	J		<0.0055	U		<0.0055	U	
		VMP-62-10-102015	10/20/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0041**	J		<0.0056	U		<0.0056	U	
		VMP-62-10-012816	1/28/2016	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0018**	J		<0.0051	U		<0.0051	U	
		VMP-62-10-042516	4/25/2016	<0.0053	J	U	<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0024**	J		<0.0062	U		<0.0062	U	
		VMP-62-10-072616	7/26/2016	<0.0054	U		<0.012	U		<0.0095	U		<0.0095	U		<0.0095	U		<0.0078	U		<0.0064	U		<0.0064	U	
		VMP-62-10-102416	10/24/2016	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-62-10-012717	1/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0059**			<0.0048	U		<0.0048	U	
		VMP-62-10-042517	4/25/2017	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0039**	J		<0.0053	U		<0.0053	U	
		VMP-62-10-072517	7/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0031**	J		<0.0048	U		<0.0048	U	
		VMP-62-10-110317	11/3/2017	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-62-10-012918	1/29/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0034**	J		<0.0043	U		<0.0043	U	
		VMP-62-10-032818	3/28/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0022**	J		<0.0044	U		<0.0044	U	
		VMP-62-10-041018	4/10/2018	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-62-10-072418	7/24/2018	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0036**	J		<0.0051	U		<0.0051	U	
		VMP-62-10-102418	10/24/2018	<0.0036	U		<0.0081	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-62-10-012819	1/28/2019	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-62-10-042619	4/26/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-62-10-072919	7/29/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		<0.0058	U		<0.0047	U		<0.0047	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-62-10-102319	10/23/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-62-10-012920	1/29/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		<0.0063	U		<0.0052	U		<0.0052	U	
		VMP-62-10-042820	4/28/2020	<0.0051	U		<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0027**	J		<0.006	U		<0.006	U	
		VMP-62-10-072720	7/27/2020	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-62-10-102920	10/29/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0033**	J		<0.0049	U		<0.0049	U	
		VMP-62-10-012221	1/22/2021	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
	20 ft	VMP-62-20-020315	2/3/2015	<0.0051	U		<0.011	U		**0.00073**	J		0.00084	J		<0.0089	U		**0.0024**	J		<0.006	U		<0.006	U	
		VMP-62-20-042815	4/28/2015	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0039**	J		<0.0057	U		<0.0057	U	
		VMP-62-20-072415	7/24/2015	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-62-20-102015	10/20/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0041**	J		<0.0051	U		<0.0051	U	
		VMP-62-20-012816	1/28/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0016**	J		<0.006	U		<0.006	U	
		VMP-62-20-042516	4/25/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	
		VMP-62-20-072616	7/26/2016	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		<0.0064	U		<0.0052	U		<0.0052	U	
		VMP-62-20-102416	10/24/2016	**0.0021**	J		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-62-20-020217	2/2/2017	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0029**	J		<0.0048	U		<0.0048	U	
		VMP-62-20-042517	4/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0034**	J		<0.005	U		<0.005	U	
		VMP-62-20-072517	7/25/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-62-20-110317	11/3/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0025**	J		<0.0045	U		<0.0045	U	
		VMP-62-20-012918	1/29/2018	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0029**	J		<0.0042	U		<0.0042	U	
		VMP-62-20-032818	3/28/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-62-20-072418	7/24/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0033**	J		<0.005	U		<0.005	U	
		VMP-62-20-102418	10/24/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0037**	J		<0.0046	U		<0.0046	U	
		VMP-62-20-012819	1/28/2019	**0.001**	J		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-62-20-042619	4/26/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0021**	J		<0.005	U		<0.005	U	
		VMP-62-20-072919	7/29/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-62-20-102319	10/23/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-62-20-012920	1/29/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		<0.0071	U		<0.0058	U		<0.0058	U	
		VMP-62-20-042820	4/28/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0038**	J		<0.0055	U		<0.0055	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0033**	J		<0.0055	U		<0.0055	U	
		VMP-62-20-072720	7/27/2020	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0032**	J		<0.0047	U		<0.0047	U	
		VMP-62-20-102920	10/29/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.003**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-10-042815	4/28/2015	<0.0054	U		<0.0054	U		<0.0054	U	UJ	<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-62-10-072415	7/24/2015	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	J	U	**0.0016**	J	J	<0.0061	U		<0.0061	U		<0.019	U	
		VMP-62-10-102015	10/20/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	J	U	<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-62-10-012816	1/28/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-62-10-042516	4/25/2016	<0.0061	U		<0.0061	U		<0.0061	U		<0.053	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-62-10-072616	7/26/2016	<0.0062	U		<0.0062	U		<0.0062	U		<0.055	U		<0.0073	U		<0.0071	U		<0.0071	U		<0.023	U	
		VMP-62-10-102416	10/24/2016	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-62-10-012717	1/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0025**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-10-042517	4/25/2017	<0.0052	U		<0.0052	U		<0.0052	U		**0.0024**	J		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-62-10-072517	7/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-10-110317	11/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-62-10-012918	1/29/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-62-10-032818	3/28/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.037	U		<0.005	U		<0.0049	U		<0.0049	U		<0.015	U	
		VMP-62-10-041018	4/10/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-62-10-072418	7/24/2018	<0.005	U		<0.005	U		<0.005	U		**0.0071**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-62-10-102418	10/24/2018	<0.0042	U		0.014			<0.0042	U		**0.0054**	J		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-62-10-012819	1/28/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-10-042619	4/26/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-62-10-072919	7/29/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-10-102319	10/23/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-10-012920	1/29/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-10-042820	4/28/2020	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.022	U	
		VMP-62-10-072720	7/27/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-10-102920	10/29/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-10-012221	1/22/2021	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	ND,UJ	UJ
	20 ft	VMP-62-20-020315	2/3/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-62-20-042815	4/28/2015	<0.0056	U		<0.0056	U		<0.0056	U	UJ	<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-62-20-072415	7/24/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-62-20-102015	10/20/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	J	U	<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-62-20-012816	1/28/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-62-20-042516	4/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-20-072616	7/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		**0.0026**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-62-20-102416	10/24/2016	<0.0046	U		<0.0046	U		<0.0046	U		**0.027**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-62-20-020217	2/2/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-20-042517	4/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		**0.0027**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-20-072517	7/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-62-20-110317	11/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-20-012918	1/29/2018	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-62-20-032818	3/28/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0017**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-20-072418	7/24/2018	<0.0049	U		<0.0049	U		<0.0049	U		**0.0078**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-20-102418	10/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0032**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-62-20-012819	1/28/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-20-042619	4/26/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-20-072919	7/29/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-20-102319	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-20-012920	1/29/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.021	U	
		VMP-62-20-042820	4/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-62-20-072720	7/27/2020	<0.0046	U		<0.0046	U		<0.0046	U		**0.035**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-62-20-102920	10/29/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-62-10-042815	4/28/2015	0.0085	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U	UJ	<0.0048	U	
		VMP-62-10-072415	7/24/2015	<0.01	J	U	<0.0059	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.058	U		<0.0048	U	
		VMP-62-10-102015	10/20/2015	<0.01	U		<0.006	U		<0.0068	U		<0.011	U		<0.0097	U		<0.0057	U		<0.059	ND,UJ	UJ	**0.0022**	J	
		VMP-62-10-012816	1/28/2016	0.011			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	ND,UJ	UJ	<0.0044	U	
		VMP-62-10-042516	4/25/2016	0.0049	J		<0.0067	U		<0.0075	U		<0.012	U		<0.011	U		<0.0063	U		<0.065	U		<0.0054	U	
		VMP-62-10-072616	7/26/2016	<0.012	U		<0.0068	U		<0.0077	U		<0.012	U		<0.011	U		<0.0064	U		<0.067	U		<0.0056	U	
		VMP-62-10-102416	10/24/2016	<0.0081	J	U	**0.0057**			0.001	J		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-62-10-012717	1/27/2017	0.024			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		**0.0022**	J		<0.051	U		**0.0026**	J	
		VMP-62-10-042517	4/25/2017	0.0053	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.001**	J		<0.056	U		<0.0046	U	
		VMP-62-10-072517	7/25/2017	0.018			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-62-10-110317	11/3/2017	0.015			<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-62-10-012918	1/29/2018	0.036			<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-62-10-032818	3/28/2018	0.0067	J		<0.0047	U		<0.0053	U		<0.0082	U		<0.0075	U		**0.0021**	J		<0.046	U		**0.0031**	J	
		VMP-62-10-041018	4/10/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-62-10-072418	7/24/2018	0.016			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-62-10-102418	10/24/2018	0.006	J		<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		<0.0043	U		<0.045	U		<0.0037	U	
		VMP-62-10-012819	1/28/2019	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-62-10-042619	4/26/2019	0.0041	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-62-10-072919	7/29/2019	<0.0088	U	UJ	<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.0093	U	UJ	<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-10-102319	10/23/2019	0.0061	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-62-10-012920	1/29/2020	<0.0096	ND,UJ	UJ	<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-62-10-042820	4/28/2020	0.014		J	<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0053	U	
		VMP-62-10-072720	7/27/2020	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-62-10-102920	10/29/2020	0.012			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-10-012221	1/22/2021	<0.023	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
	20 ft	VMP-62-20-020315	2/3/2015	0.008	J		**0.0022**	J		0.0026	J		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0014**	J	
		VMP-62-20-042815	4/28/2015	<0.011	U		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		**0.0038**	J		<0.06	U	UJ	**0.0031**	J	
		VMP-62-20-072415	7/24/2015	<0.0098	J	U	<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.056	U		<0.0046	U	
		VMP-62-20-102015	10/20/2015	0.0057	J		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	ND,UJ	UJ	**0.0026**	J	
		VMP-62-20-012816	1/28/2016	0.024			<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		**0.0015**	J		<0.063	ND,UJ	UJ	<0.0052	U	
		VMP-62-20-042516	4/25/2016	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	J	U
		VMP-62-20-072616	7/26/2016	0.01			<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-62-20-102416	10/24/2016	0.018			**0.0051**			0.0012	J		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.0016**	J	
		VMP-62-20-020217	2/2/2017	0.17			<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-62-20-042517	4/25/2017	0.008	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-20-072517	7/25/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-20-110317	11/3/2017	0.72			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-62-20-012918	1/29/2018	0.044			<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-62-20-032818	3/28/2018	0.006	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-62-20-072418	7/24/2018	0.011			<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-20-102418	10/24/2018	0.008	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		**0.0023**	J		<0.049	U		**0.0043**		
		VMP-62-20-012819	1/28/2019	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		**0.005**		
		VMP-62-20-042619	4/26/2019	0.0034	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-20-072919	7/29/2019	<0.0091	U	UJ	<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-20-102319	10/23/2019	0.0042	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-20-012920	1/29/2020	<0.011	ND,UJ	UJ	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0059	U		<0.061	U		<0.005	U	
		VMP-62-20-042820	4/28/2020	0.0056	J	J	<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-62-20-072720	7/27/2020	0.069			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-62-20-102920	10/29/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					<0.013	U		<0.0063	U	
		VMP-62-10-042815	4/28/2015	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.0049	U					**0.0042**	J		<0.0067	U	
		VMP-62-10-072415	7/24/2015	**0.0015**	J	J	0.0075	J	J	<0.0066	U		<0.0055	U		<0.0049	U					<0.013	U		<0.0066	U	
		VMP-62-10-102015	10/20/2015	<0.023	U		0.0027	J		<0.0068	U		<0.0057	U		<0.005	U					**0.0021**	J		<0.0068	U	
		VMP-62-10-012816	1/28/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0045	U					**0.02**			<0.0062	U	
		VMP-62-10-042516	4/25/2016	<0.025	U		<0.018	U		<0.0075	U		<0.0063	U		<0.0055	U					**0.0079**	J		<0.0075	U	
		VMP-62-10-072616	7/26/2016	<0.026	U		<0.018	U		<0.0077	U		<0.0064	U		<0.023	U					**0.0028**	J		<0.0077	U	
		VMP-62-10-102416	10/24/2016	**0.0012**	J		<0.013	U		**0.00042**	J		<0.0044	U		<0.016	U		<0.011	U		<0.011	J	U	**0.0011**	J	
		VMP-62-10-012717	1/27/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0064**	J		<0.0059	U	
		VMP-62-10-042517	4/25/2017	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U					<0.013	U		<0.0065	U	
		VMP-62-10-072517	7/25/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-62-10-110317	11/3/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					**0.0041**	J		<0.0054	U	
		VMP-62-10-012918	1/29/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0012**	J		<0.0052	U	
		VMP-62-10-032818	3/28/2018	<0.018	U		0.0018	J		<0.0053	U		<0.0044	U		<0.016	U		**0.001**	J		<0.01	U		**0.00051**	J	
		VMP-62-10-041018	4/10/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U		<0.012	U		<0.011	U		<0.0054	U	
		VMP-62-10-072418	7/24/2018	<0.021	U		0.01	J		<0.0062	U		<0.0052	U		<0.018	U					**0.005**	J		<0.0062	U	
		VMP-62-10-102418	10/24/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					**0.02**			<0.0052	U	
		VMP-62-10-012819	1/28/2019	<0.018	U		0.0021	J		<0.0056	U		<0.0046	U		<0.016	U					**0.054**			<0.0056	U	
		VMP-62-10-042619	4/26/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0024**	J		<0.0066	U	
		VMP-62-10-072919	7/29/2019	<0.019	U		0.0041	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0089**	J		<0.0057	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.01**	J		<0.0061	U	
		VMP-62-10-102319	10/23/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.0025**	J		<0.0063	U	
		VMP-62-10-012920	1/29/2020	<0.021	U		<0.015	U	UJ	<0.0063	U		<0.0052	U		<0.018	U					<0.012	U		<0.0063	U	
		VMP-62-10-042820	4/28/2020	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.022	U					**0.0078**	J		<0.0073	U	
		VMP-62-10-072720	7/27/2020	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0048**	J		<0.0055	U	
		VMP-62-10-102920	10/29/2020	**0.00076**	J		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.021**			<0.0059	U	
		VMP-62-10-012221	1/22/2021	<0.02	U		0.0056	J		<0.0061	U		<0.0051	U		<0.018	U					**0.0043**	J		<0.0061	U	
	20 ft	VMP-62-20-020315	2/3/2015	<0.024	U		0.007	J		<0.0073	U		<0.0061	U		<0.0054	U					**0.0032**	J		<0.0073	U	
		VMP-62-20-042815	4/28/2015	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					**0.004**	J		<0.007	U	
		VMP-62-20-072415	7/24/2015	**0.0016**	J	J	<0.015	J	U	<0.0064	U		<0.0053	U		<0.0047	U					**0.0047**	J	J	<0.0064	U	
		VMP-62-20-102015	10/20/2015	**0.0023**	J		0.0026	J		<0.0062	U		**0.00085**	J		<0.0045	U					**0.005**	J		<0.0062	U	
		VMP-62-20-012816	1/28/2016	<0.024	U		<0.018	U		<0.0073	U		<0.0061	U		<0.0054	U					<0.014	U		<0.0073	U	
		VMP-62-20-042516	4/25/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0084**	J		<0.0062	U	
		VMP-62-20-072616	7/26/2016	<0.021	U		0.0067	J		<0.0064	U		<0.0053	U		<0.019	U					**0.062**			<0.0064	U	
		VMP-62-20-102416	10/24/2016	<0.019	U		0.019			<0.0057	U		**0.0014**	J		<0.017	U		<0.012	U		**0.028**			<0.0057	U	
		VMP-62-20-020217	2/2/2017	<0.019	U		<0.014	J	U	<0.0058	U		<0.0049	U		<0.017	U					**0.0096**	J		<0.0058	U	
		VMP-62-20-042517	4/25/2017	**0.0017**	J		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-62-20-072517	7/25/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-62-20-110317	11/3/2017	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-62-20-012918	1/29/2018	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					**0.0024**	J		<0.0051	U	
		VMP-62-20-032818	3/28/2018	<0.02	U		0.0022	J		<0.0059	U		<0.0049	J	U	<0.017	U		**0.002**	J		<0.012	U		<0.0059	U	
		VMP-62-20-072418	7/24/2018	**0.0021**	J		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		**0.00081**	J	
		VMP-62-20-102418	10/24/2018	<0.019	U		0.01	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0086**	J		<0.0056	U	
		VMP-62-20-012819	1/28/2019	<0.018	U		0.012	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-62-20-042619	4/26/2019	<0.02	U		0.0036	J		<0.0061	U		<0.005	U		<0.018	U					**0.0024**	J		**0.0012**	J	
		VMP-62-20-072919	7/29/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0079**	J		<0.0059	U	
		VMP-62-20-102319	10/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-62-20-012920	1/29/2020	<0.023	U		<0.017	U	UJ	<0.007	U		<0.0058	U		<0.021	U					<0.014	U		<0.007	U	
		VMP-62-20-042820	4/28/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0057**	J		<0.0067	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					**0.0039**	J		<0.0067	U	
		VMP-62-20-072720	7/27/2020	<0.019	U		0.042			<0.0057	U		<0.0048	U		<0.017	U					**0.044**			<0.0057	U	
		VMP-62-20-102920	10/29/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.012**			<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
			Remediation Objective	690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-62-10-042815	4/28/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U	UJ	<0.0074	U		<0.0074	U	
		VMP-62-10-072415	7/24/2015	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-62-10-102015	10/20/2015	<0.0059	U		<0.0095	U		**0.0038**	J		<0.0041	U		**0.0031**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-62-10-012816	1/28/2016	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	ND,UJ	UJ	<0.0069	U		<0.0069	U	
		VMP-62-10-042516	4/25/2016	<0.0065	U		<0.01	U		<0.01	U		**0.0024**	J		<0.0058	U		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-62-10-072616	7/26/2016	<0.0067	U		<0.011	U		<0.011	U		<0.0046	U		<0.0059	U		<0.047	U		<0.0086	U		<0.0086	U	
		VMP-62-10-102416	10/24/2016	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.0027**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-62-10-012717	1/27/2017	<0.0051	U		<0.0082	U		<0.0081	U		**0.0034**	J		**0.00078**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-62-10-042517	4/25/2017	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-62-10-072517	7/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-62-10-110317	11/3/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-62-10-012918	1/29/2018	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-62-10-032818	3/28/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		**0.00031**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-62-10-041018	4/10/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-62-10-072418	7/24/2018	<0.0054	U		<0.0086	U		**0.0023**	J		<0.0037	U		**0.0062**			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-62-10-102418	10/24/2018	<0.0045	U		<0.0072	U		**0.0019**	J		<0.0031	U		<0.004	U		<0.031	U		<0.0058	U		<0.0058	U	
		VMP-62-10-012819	1/28/2019	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-62-10-042619	4/26/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-62-10-072919	7/29/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-62-10-102319	10/23/2019	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-62-10-012920	1/29/2020	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-62-10-042820	4/28/2020	<0.0064	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0082	U		<0.0082	U	
		VMP-62-10-072720	7/27/2020	<0.0077	U		<0.0077	U		**0.0014**	J		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-10-102920	10/29/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-10-012221	1/22/2021	<0.0053	U		<0.0085	ND,UJ	UJ	<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
	20 ft	VMP-62-20-020315	2/3/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0085**			<0.044	U		<0.0081	U		<0.0081	U	
		VMP-62-20-042815	4/28/2015	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U	UJ	<0.0077	U		<0.0077	U	
		VMP-62-20-072415	7/24/2015	<0.0056	U		<0.009	U		**0.0013**	J		<0.0038	U		**0.00091**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-62-20-102015	10/20/2015	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-62-20-012816	1/28/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	ND,UJ	UJ	<0.0081	U		<0.0081	U	
		VMP-62-20-042516	4/25/2016	<0.0054	U		<0.0087	U		<0.0086	U		**0.0032**	J		<0.0048	J	U	<0.038	U		<0.0069	U		<0.0069	U	
		VMP-62-20-072616	7/26/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0027**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-62-20-102416	10/24/2016	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.0037**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-62-20-020217	2/2/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00098**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-62-20-042517	4/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-62-20-072517	7/25/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-20-110317	11/3/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-20-012918	1/29/2018	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-62-20-032818	3/28/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-62-20-072418	7/24/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-62-20-102418	10/24/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.004**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-62-20-012819	1/28/2019	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-20-042619	4/26/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-62-20-072919	7/29/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-20-102319	10/23/2019	<0.0053	U		<0.0085	U		**0.003**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-62-20-012920	1/29/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-62-20-042820	4/28/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-62-20-072720	7/27/2020	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		**0.014**			<0.034	U		<0.0063	U		<0.0063	U	
		VMP-62-20-102920	10/29/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-62	10 ft	VMP-62-10-020315	2/3/2015	<0.0069	U		0.001	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-62-10-042815	4/28/2015	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-62-10-072415	7/24/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0059	U		<0.0059	U	
		VMP-62-10-102015	10/20/2015	<0.0074	U		0.0018	J		<0.0068	U		<0.0068	U		0.014			<0.0035	U		0.0027	J		<0.006	U	
		VMP-62-10-012816	1/28/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.013			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-10-042516	4/25/2016	<0.0082	U		0.0014	J		<0.0075	U		<0.0075	U		<0.0072	J	U	<0.0039	U		<0.0067	U		<0.0067	U	
		VMP-62-10-072616	7/26/2016	**0.0039**	J		<0.0088	U		<0.0077	U		<0.0077	U		<0.0074	U		<0.004	U		<0.0068	U		<0.0068	U	
		VMP-62-10-102416	10/24/2016	<0.0058	U		0.0012	J		**0.00084**	J		**0.00047**	J		0.0046	J		<0.0028	U		0.017			**0.0051**		
		VMP-62-10-012717	1/27/2017	**0.0034**	J		0.0011	J		<0.0059	U		<0.0059	U		0.0015	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-10-042517	4/25/2017	**0.014**			0.0016	J		<0.0065	U		<0.0065	U		0.00082	J		<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-62-10-072517	7/25/2017	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.001	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-62-10-110317	11/3/2017	<0.0059	U		0.00098	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-62-10-012918	1/29/2018	<0.0057	U		0.0015	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-62-10-032818	3/28/2018	<0.0058	U		0.0012	J		**0.00063**	J		<0.0053	U		0.0036	J		<0.0027	U		<0.0047	U		<0.0047	U	
		VMP-62-10-041018	4/10/2018	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.0007	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-62-10-072418	7/24/2018	<0.0068	U		0.0016	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-10-102418	10/24/2018	<0.0057	U		<0.0059	U		<0.0052	U		<0.0052	U		0.0095			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-62-10-012819	1/28/2019	<0.0061	U		<0.0063	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-10-042619	4/26/2019	<0.0072	U		0.0013	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-62-10-072919	7/29/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.0043	J		<0.003	U		0.0015	J		<0.005	U	
		VMP-62-10-072919-DUP	7/29/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-10-102319	10/23/2019	<0.0069	U		0.0009	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-62-10-012920	1/29/2020	<0.0068	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-10-042820	4/28/2020	<0.008	U		<0.0084	U		<0.0073	U		<0.0073	U		<0.007	U		<0.0038	U		<0.0065	U		<0.0065	U	
		VMP-62-10-072720	7/27/2020	<0.006	U		0.0012	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-10-102920	10/29/2020	<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-10-012221	1/22/2021	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.00074	J		<0.0054	U	
	20 ft	VMP-62-20-020315	2/3/2015	<0.008	U		0.00095	J		**0.0026**	J		**0.0013**	J		0.0025	J		<0.0038	U		0.0055	J		**0.0024**	J	
		VMP-62-20-042815	4/28/2015	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0035	J		<0.0036	U		0.0011	J		<0.0061	U	
		VMP-62-20-072415	7/24/2015	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.00069	J		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-62-20-102015	10/20/2015	<0.0067	U		0.0017	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-20-012816	1/28/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-62-20-042516	4/25/2016	<0.0068	U		0.0012	J		<0.0062	U		<0.0062	U		<0.0059	J	U	<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-20-072616	7/26/2016	**0.0034**	J		0.0016	J		<0.0064	U		<0.0064	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-62-20-102416	10/24/2016	<0.0063	U		0.0015	J		**0.00097**	J		<0.0057	U		0.00089	J		<0.003	U		0.018			**0.0045**	J	
		VMP-62-20-020217	2/2/2017	<0.0064	U		0.0013	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-62-20-042517	4/25/2017	**0.014**			0.0014	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-20-072517	7/25/2017	<0.0065	U		0.0016	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-62-20-110317	11/3/2017	<0.006	U		0.001	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-20-012918	1/29/2018	<0.0056	U		0.0012	J		<0.0051	U		<0.0051	U		<0.0049	U		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-62-20-032818	3/28/2018	<0.0064	U		0.0012	J		**0.0017**	J		<0.0059	U		0.00094	J		<0.0031	U		0.00092	J		<0.0052	U	
		VMP-62-20-072418	7/24/2018	**0.0047**	J		0.0022	J		<0.006	U		<0.006	U		0.0024	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-62-20-102418	10/24/2018	<0.0061	U		0.0017	J		<0.0056	U		<0.0056	U		0.0052	J		<0.0029	U		0.0026	J		<0.005	U	
		VMP-62-20-012819	1/28/2019	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		0.037			<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-62-20-042619	4/26/2019	<0.0066	U		0.0012	J		<0.0061	U		<0.0061	U		0.0091			<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-20-072919	7/29/2019	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-20-102319	10/23/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.0013	J		<0.0032	U		0.00067	J		<0.0054	U	
		VMP-62-20-012920	1/29/2020	<0.0077	U		<0.008	U		<0.007	U		<0.007	U		<0.0067	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-62-20-042820	4/28/2020	<0.0073	U		<0.0076	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-62-20-042820-DUP	4/28/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-62-20-072720	7/27/2020	<0.0062	U		0.002	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	J	U	<0.005	U	
		VMP-62-20-102920	10/29/2020	<0.0068	U		0.002	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	**0.0082**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-62-30-042815	4/28/2015	**0.0059**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0066**	J	
		VMP-62-30-072415	7/24/2015	**0.03**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.0054**	J	
		VMP-62-30-102015	10/20/2015	<0.031	J	U	**0.0011**	J		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.007	J		**0.0052**	J	
		VMP-62-30-012816	1/28/2016	**0.014**	J		**0.001**	J		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.0061	J		<0.017	U	
		VMP-62-30-012816-DUP	1/28/2016	**0.012**	J		**0.00087**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		0.0048	J		**0.0019**	J	
		VMP-62-30-042516	4/25/2016	**0.016**	J		**0.0015**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-30-072616	7/26/2016	**0.018**	J		<0.0047	U		**0.003**	J		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-62-30-072616-DUP	7/26/2016	**0.016**	J		<0.0047	U		**0.0027**	J		<0.015	U		<0.057	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-62-30-102416	10/24/2016	**0.0084**	J		**0.00089**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-30-102416-Dup	10/24/2016	**0.014**	J		**0.00064**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0064**	J	
		VMP-62-30-012717	1/27/2017	**0.016**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.011**	J	
		VMP-62-30-012717-Dup	1/27/2017	**0.018**	J		<0.0038	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.016**		
		VMP-62-30-042517	4/25/2017	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0061**	J	
		VMP-62-30-072517	7/25/2017	**0.008**	J		<0.0039	U		**0.0053**	J		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-30-072517-DUP	7/25/2017	**0.013**	J		<0.0038	U		**0.0048**	J		<0.012	U		<0.046	U		<0.0026	U		0.0041	J		**0.0046**	J	
		VMP-62-30-110317	11/3/2017	<0.027	J	U	<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-62-30-110317-DUP	11/3/2017	**0.026**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0042**	J	
		VMP-62-30-012918	1/29/2018	<0.025	J	U	**0.0012**	J		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		0.0035	J		<0.012	U	
		VMP-62-30-012918-DUP	1/29/2018	**0.0082**	J		**0.0012**	J		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-62-30-032818	3/28/2018	**0.0078**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.002**	J	
		VMP-62-30-032818-DUP	3/28/2018	**0.008**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-62-30-041018	4/10/2018	**0.0025**	J		<0.0036	U		**0.00076**	J		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-62-30-072418	7/24/2018	**0.066**			**0.0052**			**0.0048**	J		<0.013	U		<0.051	U		<0.0029	U		0.03			**0.011**	J	
		VMP-62-30-102418	10/24/2018	**0.0099**	J		<0.0036	U		**0.0015**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-62-30-102418-DUP	10/24/2018	**0.0079**	J		<0.0036	U		**0.0011**	J		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.002**	J	
		VMP-62-30-020519	2/5/2019	**0.0099**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-62-30-042619	4/26/2019	**0.043**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-62-30-042619-DUP	4/26/2019	**0.017**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-62-30-072919	7/29/2019	**0.016**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-62-30-102319	10/23/2019	**0.012**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-30-012920	1/29/2020	**0.0091**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-62-30-042820	4/28/2020	**0.025**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-62-30-072720	7/27/2020	**0.018**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-62-30-102920	10/29/2020	**0.016**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0014**	J	
		VMP-62-30-012221	1/22/2021	**0.011**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-62-30-042815	4/28/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-62-30-072415	7/24/2015	**0.085**			<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		**0.0046**	J		<0.029	U		<0.0072	U	
		VMP-62-30-102015	10/20/2015	<0.016	J	U	<0.0083	U		<0.006	U		<0.011	U		<0.014	U		**0.0024**	J		<0.027	U		<0.0068	U	
		VMP-62-30-012816	1/28/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0076	U	
		VMP-62-30-012816-DUP	1/28/2016	**0.0012**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-62-30-042516	4/25/2016	**0.0028**	J		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-62-30-072616	7/26/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.014**			<0.03	U		<0.0076	U	
		VMP-62-30-072616-DUP	7/26/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		**0.012**			<0.03	U		<0.0076	U	
		VMP-62-30-102416	10/24/2016	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.0022**	J		<0.026	U		<0.0064	U	
		VMP-62-30-102416-Dup	10/24/2016	**0.0018**	J		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0024**	J		<0.024	U		<0.0061	U	
		VMP-62-30-012717	1/27/2017	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.001**	J		<0.028	U		<0.007	U	
		VMP-62-30-012717-Dup	1/27/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0011**	J		<0.025	U		<0.0062	U	
		VMP-62-30-042517	4/25/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.0032**	J		<0.026	U		<0.0066	U	
		VMP-62-30-072517	7/25/2017	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.013**			<0.025	U		<0.0063	U	
		VMP-62-30-072517-DUP	7/25/2017	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.012**			<0.024	U		<0.0061	U	
		VMP-62-30-110317	11/3/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0023**	J		<0.024	U		<0.0059	U	
		VMP-62-30-110317-DUP	11/3/2017	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0023**	J		<0.023	U		<0.0058	U	
		VMP-62-30-012918	1/29/2018	<0.013	U		<0.0065	U		<0.0048	U		<0.0088	U		<0.011	U		<0.0051	U		<0.021	U		<0.0054	U	
		VMP-62-30-012918-DUP	1/29/2018	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-62-30-032818	3/28/2018	<0.013	J	U	<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0028**	J		<0.022	U		<0.0056	U	
		VMP-62-30-032818-DUP	3/28/2018	<0.013	J	U	<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0025**	J		<0.022	U		<0.0055	U	
		VMP-62-30-041018	4/10/2018	<0.014	J	U	<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0046**	J		<0.023	U		<0.0058	U	
		VMP-62-30-072418	7/24/2018	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.014**			<0.027	U		<0.0068	U	
		VMP-62-30-102418	10/24/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0065**			<0.024	U		<0.0059	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0066**			<0.024	U		<0.0059	U	
		VMP-62-30-020519	2/5/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0043**	J		<0.026	U		<0.0065	U	
		VMP-62-30-042619	4/26/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.0047**	J		<0.024	U		<0.0062	U	
		VMP-62-30-042619-DUP	4/26/2019	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		**0.0046**	J		<0.025	U		<0.0063	U	
		VMP-62-30-072919	7/29/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.0078**			<0.024	U		<0.0059	U	
		VMP-62-30-102319	10/23/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0032**	J		<0.028	U		<0.007	U	
		VMP-62-30-012920	1/29/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		**0.0088**			<0.028	U	UJ	<0.007	U	
		VMP-62-30-042820	4/28/2020	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0035**	J		<0.03	U		<0.0075	U	
		VMP-62-30-072720	7/27/2020	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.0087**			<0.024	U		<0.0061	U	
		VMP-62-30-102920	10/29/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		**0.0083**			<0.026	U		<0.0064	U	
		VMP-62-30-012221	1/22/2021	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		**0.0021**	J		<0.022	U		<0.0055	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0026**	J		<0.0053	U		<0.0053	U	
		VMP-62-30-042815	4/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-62-30-072415	7/24/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.003**	J		<0.0057	U		<0.0057	U	
		VMP-62-30-102015	10/20/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0034**	J		<0.0053	U		<0.0053	U	
		VMP-62-30-012816	1/28/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0018**	J		<0.0059	U		<0.0059	U	
		VMP-62-30-012816-DUP	1/28/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0017**	J		<0.0051	U		<0.0051	U	
		VMP-62-30-042516	4/25/2016	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-62-30-072616	7/26/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-62-30-072616-DUP	7/26/2016	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		<0.0072	U		<0.0059	U		<0.0059	U	
		VMP-62-30-102416	10/24/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-62-30-102416-Dup	10/24/2016	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0023**	J		<0.0048	U		<0.0048	U	
		VMP-62-30-012717	1/27/2017	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0024**	J		<0.0055	U		<0.0055	U	
		VMP-62-30-012717-Dup	1/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-62-30-042517	4/25/2017	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0032**	J		<0.0051	U		<0.0051	U	
		VMP-62-30-072517	7/25/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-62-30-072517-DUP	7/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-62-30-110317	11/3/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-62-30-110317-DUP	11/3/2017	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-62-30-012918	1/29/2018	<0.0036	U		<0.008	U		<0.0062	U		<0.0062	U		<0.0062	U		**0.0031**	J		<0.0042	U		<0.0042	U	
		VMP-62-30-012918-DUP	1/29/2018	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.003**	J		<0.0043	U		<0.0043	U	
		VMP-62-30-032818	3/28/2018	**0.0022**	J		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-62-30-032818-DUP	3/28/2018	**0.0012**	J		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0024**	J		<0.0043	U		<0.0043	U	
		VMP-62-30-041018	4/10/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-62-30-072418	7/24/2018	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0038**	J		<0.0053	U		<0.0053	U	
		VMP-62-30-102418	10/24/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0032**	J		<0.0046	U		<0.0046	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-62-30-020519	2/5/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0021**	J		<0.0051	U		<0.0051	U	
		VMP-62-30-042619	4/26/2019	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0021**	J		<0.0048	U		<0.0048	U	
		VMP-62-30-042619-DUP	4/26/2019	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-62-30-072919	7/29/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		<0.0057	U		<0.0046	U		<0.0046	U	
		VMP-62-30-102319	10/23/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0024**	J		<0.0054	U		<0.0054	U	
		VMP-62-30-012920	1/29/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-62-30-042820	4/28/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0024**	J		<0.0058	U		<0.0058	U	
		VMP-62-30-072720	7/27/2020	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0036**	J		<0.0048	U		<0.0048	U	
		VMP-62-30-102920	10/29/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-62-30-012221	1/22/2021	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0021**	J		<0.0043	U		<0.0043	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-62-30-042815	4/28/2015	<0.0055	U		<0.0055	U		<0.0055	U	UJ	<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-62-30-072415	7/24/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		**0.0052**	J	
		VMP-62-30-102015	10/20/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-62-30-012816	1/28/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-62-30-012816-DUP	1/28/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-30-042516	4/25/2016	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-30-072616	7/26/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-62-30-072616-DUP	7/26/2016	<0.0058	U		<0.0058	U		<0.0058	U		**0.002**	J		<0.0068	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-62-30-102416	10/24/2016	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-30-102416-Dup	10/24/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-30-012717	1/27/2017	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-62-30-012717-Dup	1/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0056**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-30-042517	4/25/2017	<0.005	U		<0.005	U		<0.005	U		**0.0021**	J		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-62-30-072517	7/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-30-072517-DUP	7/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-30-110317	11/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-62-30-110317-DUP	11/3/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-30-012918	1/29/2018	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-62-30-012918-DUP	1/29/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-62-30-032818	3/28/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-62-30-032818-DUP	3/28/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-62-30-041018	4/10/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-62-30-072418	7/24/2018	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-62-30-102418	10/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0025**	J		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-62-30-020519	2/5/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-62-30-042619	4/26/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-62-30-042619-DUP	4/26/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-62-30-072919	7/29/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-62-30-102319	10/23/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-62-30-012920	1/29/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-62-30-042820	4/28/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-62-30-072720	7/27/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-62-30-102920	10/29/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-62-30-012221	1/22/2021	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	0.0034	J		**0.00084**	J		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-62-30-042815	4/28/2015	0.0072	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U	UJ	<0.0049	U	
		VMP-62-30-072415	7/24/2015	<0.01	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		**0.0013**	J	
		VMP-62-30-102015	10/20/2015	0.0066	J		<0.0057	U		0.0019	J		**0.0016**	J		<0.0092	U		<0.0054	U		<0.056	ND,UJ	UJ	**0.0034**	J	
		VMP-62-30-012816	1/28/2016	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		**0.0026**	J		<0.062	ND,UJ	UJ	**0.007**		
		VMP-62-30-012816-DUP	1/28/2016	0.014			<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		**0.0017**	J		<0.054	ND,UJ	UJ	**0.0063**		
		VMP-62-30-042516	4/25/2016	0.0033	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	J	U
		VMP-62-30-072616	7/26/2016	<0.011	U		**0.0049**	J		0.0035	J		<0.011	U		<0.01	U		**0.0049**	J		<0.062	U		**0.0033**	J	
		VMP-62-30-072616-DUP	7/26/2016	<0.011	U		**0.0045**	J		0.0048	J		<0.011	U		<0.01	U		**0.0039**	J		<0.062	U		**0.0026**	J	
		VMP-62-30-102416	10/24/2016	<0.0094	J	U	<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-30-102416-Dup	10/24/2016	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-62-30-012717	1/27/2017	0.019		J	**0.0056**	J		<0.0067	U		<0.01	U		<0.0095	U		**0.0016**	J		<0.058	U		**0.002**	J	
		VMP-62-30-012717-Dup	1/27/2017	0.057		J	**0.0038**	J		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.00088**	J	
		VMP-62-30-042517	4/25/2017	0.0066	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-62-30-072517	7/25/2017	<0.0091	U		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-30-072517-DUP	7/25/2017	0.0062	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		**0.0023**	J		<0.05	U		**0.0023**	J	
		VMP-62-30-110317	11/3/2017	0.0062	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-62-30-110317-DUP	11/3/2017	0.012			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-62-30-012918	1/29/2018	0.012			<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		**0.0015**	J		<0.044	U		**0.0027**	J	
		VMP-62-30-012918-DUP	1/29/2018	0.01			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-62-30-032818	3/28/2018	0.0077	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.0024**	J		<0.046	U		**0.0027**	J	
		VMP-62-30-032818-DUP	3/28/2018	0.0058	J		<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		**0.0014**	J		<0.046	U		<0.0038	U	
		VMP-62-30-041018	4/10/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-62-30-072418	7/24/2018	0.011			<0.0057	U		<0.0064	U		<0.01	U		<0.0091	U		**0.0035**	J		<0.056	U		**0.011**		
		VMP-62-30-102418	10/24/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-62-30-020519	2/5/2019	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-62-30-042619	4/26/2019	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-62-30-042619-DUP	4/26/2019	0.0072	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-62-30-072919	7/29/2019	<0.0086	U	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-62-30-102319	10/23/2019	0.01			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-62-30-012920	1/29/2020	<0.01	ND,UJ	UJ	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-62-30-042820	4/28/2020	0.04		J	<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-62-30-072720	7/27/2020	<0.0088	U		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-62-30-102920	10/29/2020	0.012			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-62-30-012221	1/22/2021	0.036			<0.0046	U		<0.0053	U		<0.0082	U		<0.0075	U		<0.0044	U		<0.046	U		<0.0038	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0037**	J		<0.0065	U	
		VMP-62-30-042815	4/28/2015	<0.023	U		0.0031	J		<0.0068	U		<0.0056	U		<0.005	U					**0.0081**	J		<0.0068	U	
		VMP-62-30-072415	7/24/2015	**0.0016**	J	J	<0.016	J	U	<0.0069	U		<0.0057	U		<0.005	U					<0.014	U		<0.0069	U	
		VMP-62-30-102015	10/20/2015	<0.022	U		0.0049	J		<0.0065	U		**0.0013**	J		<0.0047	U					**0.0037**	J		<0.0065	U	
		VMP-62-30-012816	1/28/2016	<0.024	U		0.0068	J		<0.0072	U		<0.006	U		<0.0053	U					**0.037**			<0.0072	U	
		VMP-62-30-012816-DUP	1/28/2016	<0.021	U		0.0066	J		<0.0062	U		<0.0052	U		<0.0046	U					**0.022**			<0.0062	U	
		VMP-62-30-042516	4/25/2016	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.0046	U					**0.0083**	J		<0.0062	U	
		VMP-62-30-072616	7/26/2016	<0.024	U		0.0045	J		<0.0072	J	U	<0.006	U		<0.021	U					**0.018**			**0.0051**	J	
		VMP-62-30-072616-DUP	7/26/2016	<0.024	U		0.0036	J		<0.0072	J	U	<0.006	U		<0.021	U					**0.01**	J		**0.0053**	J	
		VMP-62-30-102416	10/24/2016	<0.02	U		0.0042	J		<0.0061	U		<0.0051	U		<0.018	U		<0.013	U		**0.024**			<0.0061	U	
		VMP-62-30-102416-Dup	10/24/2016	**0.0017**	J		<0.014	U		<0.0058	U		**0.001**	J		<0.017	U		<0.012	U		**0.012**			<0.0058	U	
		VMP-62-30-012717	1/27/2017	**0.0017**	J		0.0044	J		**0.00041**	J		**0.0012**	J		<0.02	U					**0.007**	J		<0.0067	U	
		VMP-62-30-012717-Dup	1/27/2017	<0.02	U		0.016			**0.00037**	J		<0.0049	U		<0.017	U					**0.0069**	J		<0.0059	U	
		VMP-62-30-042517	4/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-62-30-072517	7/25/2017	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0024**	J		<0.0059	U	
		VMP-62-30-072517-DUP	7/25/2017	<0.019	U		0.0038	J		<0.0058	U		<0.0048	U		<0.017	U					**0.0047**	J		<0.0058	U	
		VMP-62-30-110317	11/3/2017	<0.019	U		0.0014	J		<0.0056	U		<0.0047	U		<0.016	U					**0.0044**	J		<0.0056	U	
		VMP-62-30-110317-DUP	11/3/2017	<0.018	U		0.0027	J		<0.0055	U		<0.0046	U		<0.016	U					**0.012**			<0.0055	U	
		VMP-62-30-012918	1/29/2018	<0.017	U		0.003	J		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-62-30-012918-DUP	1/29/2018	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					**0.002**	J		<0.0053	U	
		VMP-62-30-032818	3/28/2018	<0.018	U		0.0047	J		<0.0053	U		<0.0044	U		<0.016	U		<0.011	U		**0.0049**	J		<0.0053	U	
		VMP-62-30-032818-DUP	3/28/2018	<0.018	U		0.0032	J		<0.0052	U		<0.0044	U		<0.015	U		<0.011	U		<0.01	U		<0.0053	U	
		VMP-62-30-041018	4/10/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U		**0.0031**	J		<0.011	U		<0.0055	U	
		VMP-62-30-072418	7/24/2018	<0.021	U		0.022			<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-62-30-102418	10/24/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0031**	J		<0.0056	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-62-30-020519	2/5/2019	<0.021	U		0.004	J		**0.0019**	J		<0.0052	U		<0.018	U					**0.018**			**0.0067**		
		VMP-62-30-042619	4/26/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0026**	J		<0.0058	U	
		VMP-62-30-042619-DUP	4/26/2019	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-62-30-072919	7/29/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-62-30-102319	10/23/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.002**	J		<0.0066	U	
		VMP-62-30-012920	1/29/2020	<0.022	U		<0.016	U	UJ	<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-62-30-042820	4/28/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.0068**	J		<0.0071	U	
		VMP-62-30-072720	7/27/2020	<0.019	U		<0.014	U		<0.0058	U		**0.0082**			<0.017	U					**0.0086**	J		<0.0058	U	
		VMP-62-30-102920	10/29/2020	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0092**	J		<0.0061	U	
		VMP-62-30-012221	1/22/2021	<0.018	U		<0.013	U		<0.0052	U		<0.0044	U		<0.015	U					**0.0069**	J		<0.0053	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	<0.0056	U		<0.0091	U		**0.016**			<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-62-30-042815	4/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		<0.0052	U		<0.041	U	UJ	<0.0075	U		<0.0075	U	
		VMP-62-30-072415	7/24/2015	<0.006	U		<0.0096	U		**0.0027**	J		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-62-30-102015	10/20/2015	<0.0056	U		<0.009	U		**0.0038**	J		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-62-30-012816	1/28/2016	<0.0062	U		<0.01	U		<0.0099	U		<0.0043	U		<0.0055	U		<0.043	ND,UJ	UJ	<0.008	U		<0.008	U	
		VMP-62-30-012816-DUP	1/28/2016	<0.0054	U		<0.0087	U		**0.0032**	J		<0.0037	U		**0.0013**	J		<0.038	ND,UJ	UJ	<0.0069	U		<0.0069	U	
		VMP-62-30-042516	4/25/2016	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	J	U	<0.038	U		<0.0069	U		<0.0069	U	
		VMP-62-30-072616	7/26/2016	<0.0062	U		<0.01	U		**0.084**		J	<0.0043	U		**0.014**			<0.043	U		<0.008	U		<0.008	U	
		VMP-62-30-072616-DUP	7/26/2016	<0.0062	U		<0.01	U		**0.046**		J	<0.0043	U		**0.011**			<0.043	U		<0.008	U		<0.008	U	
		VMP-62-30-102416	10/24/2016	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		**0.0015**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-62-30-102416-Dup	10/24/2016	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-62-30-012717	1/27/2017	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		**0.0078**			<0.04	U		<0.0074	U		<0.0074	U	
		VMP-62-30-012717-Dup	1/27/2017	**0.00056**	J		<0.0083	U		**0.00095**	J		<0.0036	U		**0.006**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-30-042517	4/25/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-62-30-072517	7/25/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-30-072517-DUP	7/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-62-30-110317	11/3/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.00043**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-62-30-110317-DUP	11/3/2017	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.00048**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-30-012918	1/29/2018	<0.0044	U		<0.0071	U		<0.007	U		<0.0031	U		**0.00098**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-62-30-012918-DUP	1/29/2018	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		**0.001**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-62-30-032818	3/28/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-62-30-032818-DUP	3/28/2018	<0.0046	U		<0.0073	U		<0.0072	U		<0.0032	U		<0.004	U		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-62-30-041018	4/10/2018	<0.0048	U		<0.0077	U		**0.0092**			<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-62-30-072418	7/24/2018	<0.0056	U		<0.009	U		<0.0088	U		<0.0038	U		**0.00084**	J		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-62-30-102418	10/24/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0045**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-62-30-020519	2/5/2019	<0.0054	U		<0.0086	U		**0.0012**	J		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-62-30-042619	4/26/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-62-30-042619-DUP	4/26/2019	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-62-30-072919	7/29/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-62-30-102319	10/23/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-62-30-012920	1/29/2020	<0.0057	U		<0.0092	U		**0.017**			<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-62-30-042820	4/28/2020	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-62-30-072720	7/27/2020	<0.005	U		<0.0081	U		**0.0096**			<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-62-30-102920	10/29/2020	<0.0053	U		<0.0085	U		**0.0067**	J		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-62-30-012221	1/22/2021	<0.0046	U		<0.0073	ND,UJ	UJ	<0.0072	J	U	<0.0032	U		**0.00033**	J		<0.032	U		<0.0058	U		<0.0058	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-62-30-020315	2/3/2015	<0.0071	U		0.001	J		<0.0065	U		<0.0065	U		0.017			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-62-30-042815	4/28/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0064	U		<0.0035	U		<0.006	U		<0.006	U	
		VMP-62-30-072415	7/24/2015	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-62-30-102015	10/20/2015	<0.0071	U		<0.0074	U		**0.0045**	J		**0.0013**	J		0.0011	J		<0.0034	U		0.0042	J		<0.0057	U	
		VMP-62-30-012816	1/28/2016	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		0.0056	J		<0.0037	U		0.0017	J		<0.0063	U	
		VMP-62-30-012816-DUP	1/28/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0056	J		<0.0032	U		0.0014	J		<0.0055	U	
		VMP-62-30-042516	4/25/2016	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	J	U	<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-30-072616	7/26/2016	**0.021**			0.0018	J		**0.0042**	J		<0.0072	U		0.015			<0.0037	U		0.01			**0.0037**	J	
		VMP-62-30-072616-DUP	7/26/2016	**0.018**			<0.0082	U		**0.0057**	J		<0.0072	U		0.014			<0.0037	U		0.0099			**0.0031**	J	
		VMP-62-30-102416	10/24/2016	<0.0067	U		0.0017	J		<0.0061	U		<0.0061	U		0.0011	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-30-102416-Dup	10/24/2016	<0.0064	U		0.0018	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-62-30-012717	1/27/2017	<0.0073	U		0.0015	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		0.015			**0.0038**	J	
		VMP-62-30-012717-Dup	1/27/2017	<0.0065	U		0.0016	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		0.011			**0.0032**	J	
		VMP-62-30-042517	4/25/2017	<0.0068	U		0.0019	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-30-072517	7/25/2017	<0.0065	U		0.0018	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-30-072517-DUP	7/25/2017	<0.0063	U		0.0022	J		<0.0058	U		<0.0058	U		0.0019	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-62-30-110317	11/3/2017	<0.0062	U		0.0018	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-62-30-110317-DUP	11/3/2017	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		0.0017	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-30-012918	1/29/2018	<0.0056	U		0.0014	J		<0.0051	U		<0.0051	U		0.0014	J		<0.0026	U		<0.0045	U		<0.0045	U	
		VMP-62-30-012918-DUP	1/29/2018	<0.0058	U		0.0014	J		<0.0052	U		<0.0053	U		0.0012	J		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-62-30-032818	3/28/2018	<0.0058	U		0.0012	J		<0.0053	U		<0.0053	U		0.011			<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-62-30-032818-DUP	3/28/2018	<0.0058	U		0.0014	J		<0.0052	U		<0.0053	U		0.006			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-62-30-041018	4/10/2018	<0.006	U		0.0013	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-62-30-072418	7/24/2018	<0.007	U		0.0016	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-62-30-102418	10/24/2018	<0.0062	U		0.0031	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-62-30-102418-DUP	10/24/2018	<0.0062	U		0.0022	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-62-30-020519	2/5/2019	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		0.022			<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-62-30-042619	4/26/2019	<0.0064	U		0.0014	J		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-62-30-042619-DUP	4/26/2019	**0.0017**	J		0.0012	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-62-30-072919	7/29/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-62-30-102319	10/23/2019	<0.0072	U		0.0023	J		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-62-30-012920	1/29/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-62-30-042820	4/28/2020	<0.0078	U		0.002	J		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-62-30-072720	7/27/2020	<0.0063	U		0.002	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-62-30-102920	10/29/2020	<0.0066	U		0.002	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-62-30-012221	1/22/2021	<0.0058	U		<0.006	U		<0.0052	U		<0.0053	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	**0.0078**	J		<0.0041	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-63-5-042815	4/28/2015	**0.026**	J		**0.0031**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.019**		
		VMP-63-5-072415	7/24/2015	**0.023**	J		<0.0045	J	U	<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.01**	J	
		VMP-63-5-102615	10/26/2015	<0.031	J	U	<0.0042	J	U	<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		0.016			**0.013**	J	
		VMP-63-5-012816	1/28/2016	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0027**	J	
		VMP-63-5-042616	4/26/2016	**0.011**	J		**0.0084**			<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		0.024			<0.017	U	
		VMP-63-5-072516	7/25/2016	**0.036**			<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		0.0053	J		**0.0071**	J	
		VMP-63-5-102416	10/24/2016	**0.029**	J		**0.00077**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0079**	J	
		VMP-63-5-012717	1/27/2017	**0.028**	J		<0.0039	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0061**	J	
		VMP-63-5-042517	4/25/2017	<0.028	J	U	<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0026**	J	
		VMP-63-5-072517	7/25/2017	**0.026**	J		**0.00041**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0068**	J	
		VMP-63-5-110117	11/1/2017	<0.026	J	U	**0.00051**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-5-012618	1/26/2018	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-63-5-041918	4/19/2018	**0.0069**	J		<0.0034	U		<0.0071	U		<0.011	U		<0.041	U		<0.0023	U		<0.01	U		<0.012	U	
		VMP-63-5-071918	7/19/2018	**0.0084**	J		**0.0048**			<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0069	J		<0.014	U	
		VMP-63-5-102218	10/22/2018	**0.013**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		**0.0021**	J	
		VMP-63-5-012919	1/29/2019	**0.012**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-5-042519	4/25/2019	**0.02**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-63-5-072319	7/23/2019	**0.024**	J		**0.0014**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-63-5-102419	10/24/2019	**0.0071**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0017**	J	
		VMP-63-5-102419-DUP	10/24/2019	**0.011**	J		**0.001**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0022**	J	
		VMP-63-5-012720	1/27/2020	**0.0075**	J	J	<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-63-5-012720-DUP	1/27/2020	**0.0054**	J	J	<0.0046	U		<0.0095	U		<0.015	U		<0.055	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-63-5-042420	4/24/2020	**0.015**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-63-5-072820	7/28/2020	**0.018**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0026**	J	
		VMP-63-5-110320	11/3/2020	<0.029	J	U	**0.00089**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-63-5-012921	1/29/2021	**0.0069**	J		<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
	10 ft	VMP-63-10-020315	2/3/2015	**0.0058**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-63-10-042815	4/28/2015	**0.0092**	J		<0.0044	U		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-63-10-072415	7/24/2015	**0.035**			<0.0042	J	U	<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		0.0063	J		**0.012**	J	
		VMP-63-10-102615	10/26/2015	**0.032**	J		<0.0044	J	U	<0.0093	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		**0.02**		
		VMP-63-10-012816	1/28/2016	**0.011**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		0.0055	J		<0.017	U	
		VMP-63-10-042616	4/26/2016	**0.0089**	J		**0.00096**	J		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		<0.017	U	
		VMP-63-10-072516	7/25/2016	**0.039**			<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		**0.0064**	J	
		VMP-63-10-102416	10/24/2016	**0.01**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.016	U	
		VMP-63-10-012717	1/27/2017	**0.013**	J		<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.012**	J	
		VMP-63-10-042517	4/25/2017	<0.03	J	U	<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0024**	J	
		VMP-63-10-072517	7/25/2017	**0.012**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-63-10-110117	11/1/2017	**0.011**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-10-012618	1/26/2018	<0.027	J	U	<0.0036	U		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-63-10-041918	4/19/2018	**0.017**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-10-071918	7/19/2018	**0.036**			**0.00033**	J		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		**0.0051**	J	
		VMP-63-10-102218	10/22/2018	**0.018**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		0.0069	J		**0.0046**	J	
		VMP-63-10-012919	1/29/2019	**0.034**			<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0042**	J	
		VMP-63-10-042519	4/25/2019	**0.021**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-63-10-072319	7/23/2019	**0.015**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-63-10-102419	10/24/2019	**0.0051**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-63-10-012720	1/27/2020	**0.02**	J		**0.002**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.013			<0.014	U	
		VMP-63-10-042420	4/24/2020	**0.014**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0027**	J	
		VMP-63-10-072820	7/28/2020	**0.015**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.002**	J	
		VMP-63-10-110320	11/3/2020	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-63-10-012921	1/29/2021	<0.12	U		**0.18**			<0.035	U		<0.054	U		<0.2	U		<0.012	U		0.27			<0.062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	<0.016	J	U	<0.0081	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-63-5-042815	4/28/2015	<0.018	U		<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-63-5-072415	7/24/2015	**0.028**			<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-63-5-102615	10/26/2015	<0.016	J	U	<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-63-5-012816	1/28/2016	**0.0058**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-63-5-042616	4/26/2016	**0.00076**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-63-5-072516	7/25/2016	<0.018	U		<0.0092	U		<0.0067	U		<0.012	U		<0.015	U		<0.0071	U		<0.03	U		<0.0075	U	
		VMP-63-5-102416	10/24/2016	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-63-5-012717	1/27/2017	**0.00085**	J		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	ND,UJ	UJ	<0.0063	U	
		VMP-63-5-042517	4/25/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-63-5-072517	7/25/2017	<0.015	J	U	<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-63-5-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-5-012618	1/26/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-63-5-041918	4/19/2018	<0.013	J	U	<0.0067	U		<0.0049	U		<0.009	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-63-5-071918	7/19/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-63-5-102218	10/22/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-63-5-012919	1/29/2019	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-5-042519	4/25/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-63-5-072319	7/23/2019	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-63-5-102419	10/24/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-5-102419-DUP	10/24/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-63-5-012720	1/27/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U	UJ	<0.007	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.018	U		<0.009	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.029	U	UJ	<0.0074	U	
		VMP-63-5-042420	4/24/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-63-5-072820	7/28/2020	**0.0092**	J		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-63-5-110320	11/3/2020	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-63-5-012921	1/29/2021	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U	UJ	<0.0063	U	
	10 ft	VMP-63-10-020315	2/3/2015	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-63-10-042815	4/28/2015	<0.017	U		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-63-10-072415	7/24/2015	**0.0067**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-63-10-102615	10/26/2015	**0.0079**	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-63-10-012816	1/28/2016	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-63-10-042616	4/26/2016	**0.0017**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-63-10-072516	7/25/2016	<0.018	U		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-63-10-102416	10/24/2016	<0.016	U		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-63-10-012717	1/27/2017	**0.0008**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	ND,UJ	UJ	<0.0062	U	
		VMP-63-10-042517	4/25/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-63-10-072517	7/25/2017	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-63-10-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-10-012618	1/26/2018	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-63-10-041918	4/19/2018	<0.014	J	U	<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-10-071918	7/19/2018	**0.0028**	J		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-63-10-102218	10/22/2018	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-63-10-012919	1/29/2019	<0.013	U		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-63-10-042519	4/25/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-63-10-072319	7/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-63-10-102419	10/24/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-63-10-012720	1/27/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-63-10-042420	4/24/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-63-10-072820	7/28/2020	<0.017	U		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-63-10-110320	11/3/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-10-012921	1/29/2021	<0.065	U		<0.033	U		<0.024	U		<0.045	U		<0.055	U		<0.026	U		<0.11	U	UJ	<0.027	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	<0.0044	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-63-5-042815	4/28/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		<0.0073	U		<0.006	U		<0.006	U	
		VMP-63-5-072415	7/24/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0021**	J		<0.0057	U		<0.0057	U	
		VMP-63-5-102615	10/26/2015	**0.0011**	J		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0027**	J		<0.0054	U		<0.0054	U	
		VMP-63-5-012816	1/28/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0033**	J		<0.0053	U		<0.0053	U	
		VMP-63-5-042616	4/26/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0024**	J		<0.0057	U		<0.0057	U	
		VMP-63-5-072516	7/25/2016	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0028**	J		<0.0059	U		<0.0059	U	
		VMP-63-5-102416	10/24/2016	**0.00086**	J		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-63-5-012717	1/27/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-63-5-042517	4/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		<0.0059	U		<0.0048	U		<0.0048	U	
		VMP-63-5-072517	7/25/2017	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-63-5-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0021**	J		<0.0045	U		<0.0045	U	
		VMP-63-5-012618	1/26/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-63-5-041918	4/19/2018	<0.0036	U		<0.0081	U		<0.0064	U		<0.0064	U		<0.0064	J	U	**0.0027**	J		<0.0043	U		<0.0043	U	
		VMP-63-5-071918	7/19/2018	**0.0035**	J		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.003**	J		<0.0049	U		<0.0049	U	
		VMP-63-5-102218	10/22/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.003**	J		<0.0045	U		<0.0045	U	
		VMP-63-5-012919	1/29/2019	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0026**	J		<0.0044	U		<0.0044	U	
		VMP-63-5-042519	4/25/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0038**	J		<0.005	U		<0.005	U	
		VMP-63-5-072319	7/23/2019	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0054	U		**0.0018**	J	
		VMP-63-5-102419	10/24/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	J	U	<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-63-5-102419-DUP	10/24/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-63-5-012720	1/27/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		<0.0066	U		<0.0054	U		<0.0054	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.0049	U		<0.011	U		<0.0086	U		<0.0086	U		<0.0086	U		**0.0028**	J		<0.0058	U		<0.0058	U	
		VMP-63-5-042420	4/24/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-63-5-072820	7/28/2020	**0.00057**	J		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-63-5-110320	11/3/2020	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.003**	J		<0.005	U		<0.005	U	
		VMP-63-5-012921	1/29/2021	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
	10 ft	VMP-63-10-020315	2/3/2015	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-63-10-042815	4/28/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0029**	J		<0.0056	U		<0.0056	U	
		VMP-63-10-072415	7/24/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-63-10-102615	10/26/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0046**	J		<0.0056	U		<0.0056	U	
		VMP-63-10-012816	1/28/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-63-10-042616	4/26/2016	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.003**	J		<0.006	U		<0.006	U	
		VMP-63-10-072516	7/25/2016	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0053**	J		<0.0057	U		<0.0057	U	
		VMP-63-10-102416	10/24/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-63-10-012717	1/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-63-10-042517	4/25/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		<0.0062	U		<0.0051	U		<0.0051	U	
		VMP-63-10-072517	7/25/2017	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0022**	J		<0.0049	U		<0.0049	U	
		VMP-63-10-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.002**	J		<0.0045	U		<0.0045	U	
		VMP-63-10-012618	1/26/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0028**	J		<0.0045	U		<0.0045	U	
		VMP-63-10-041918	4/19/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.003**	J		<0.0044	U		<0.0044	U	
		VMP-63-10-071918	7/19/2018	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0025**	J		<0.0042	U		<0.0042	U	
		VMP-63-10-102218	10/22/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-63-10-012919	1/29/2019	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0023**	J		<0.0044	U		<0.0044	U	
		VMP-63-10-042519	4/25/2019	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-63-10-072319	7/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0022**	J		<0.0051	U		<0.0051	U	
		VMP-63-10-102419	10/24/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0019**	J		<0.0046	U		<0.0046	U	
		VMP-63-10-012720	1/27/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0034**	J		<0.0049	U		<0.0049	U	
		VMP-63-10-042420	4/24/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-63-10-072820	7/28/2020	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0022**	J		<0.0054	U		<0.0054	U	
		VMP-63-10-110320	11/3/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0028**	J		<0.0047	U		<0.0047	U	
		VMP-63-10-012921	1/29/2021	**0.28**			<0.04	U		<0.032	U		<0.032	U		<0.032	U		<0.026	U		<0.021	U		<0.021	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-63-5-042815	4/28/2015	<0.0058	U		<0.0058	U		<0.0058	U	UJ	<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-63-5-072415	7/24/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-5-102615	10/26/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-5-012816	1/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-5-042616	4/26/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-5-072516	7/25/2016	<0.0058	U		<0.0058	U		<0.0058	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-63-5-102416	10/24/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-63-5-012717	1/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-63-5-042517	4/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0018**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-5-072517	7/25/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0027**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-5-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-5-012618	1/26/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-5-041918	4/19/2018	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-63-5-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-63-5-102218	10/22/2018	<0.0044	U		<0.0044	U		<0.0044	U		**0.0023**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-5-012919	1/29/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-5-042519	4/25/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-63-5-072319	7/23/2019	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-63-5-102419	10/24/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-5-102419-DUP	10/24/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-63-5-012720	1/27/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.0056	U		<0.0056	U		<0.0056	U		<0.05	U		<0.0066	U		<0.0065	U		<0.0065	U		<0.02	U	
		VMP-63-5-042420	4/24/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.0024**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-5-072820	7/28/2020	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-5-110320	11/3/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-63-5-012921	1/29/2021	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
	10 ft	VMP-63-10-020315	2/3/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-63-10-042815	4/28/2015	<0.0055	U		<0.0055	U		<0.0055	U	UJ	<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-63-10-072415	7/24/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-10-102615	10/26/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	J	U	<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-63-10-012816	1/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.0025**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-10-042616	4/26/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-63-10-072516	7/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.007**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-10-102416	10/24/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-10-012717	1/27/2017	<0.0047	U		<0.0047	U		<0.0047	U		**0.0041**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-10-042517	4/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-10-072517	7/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-63-10-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-10-012618	1/26/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-10-041918	4/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-10-071918	7/19/2018	<0.0041	U		<0.0041	U		<0.0041	U		**0.0049**	J		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-63-10-102218	10/22/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-63-10-012919	1/29/2019	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-63-10-042519	4/25/2019	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-10-072319	7/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-10-102419	10/24/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-63-10-012720	1/27/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-63-10-042420	4/24/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-63-10-072820	7/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		**0.001**	J	
		VMP-63-10-110320	11/3/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-10-012921	1/29/2021	<0.021	U		<0.021	U		<0.021	U		<0.18	U		<0.024	U		<0.024	U		<0.024	U		<0.076	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				0.61						6500						300			0.2			470		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	0.012			<0.0056	U		<0.0064	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-63-5-042815	4/28/2015	<0.011	J	U	<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U	UJ	<0.0052	U	
		VMP-63-5-072415	7/24/2015	<0.01	J	U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-63-5-102615	10/26/2015	<0.01	J	U	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		**0.0013**	J		<0.056	U		**0.0031**	J	
		VMP-63-5-012816	1/28/2016	0.0055	J		<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		**0.0019**	J		<0.056	U		**0.0016**	J	
		VMP-63-5-042616	4/26/2016	<0.011	U		**0.024**			0.0044	J		<0.011	U		<0.0098	U		**0.052**			<0.06	U		**0.1**		
		VMP-63-5-072516	7/25/2016	<0.011	U		<0.0063	U		<0.0072	U		<0.011	U		<0.01	U		**0.003**	J		<0.062	U		**0.0029**	J	
		VMP-63-5-102416	10/24/2016	0.0084	J		**0.025**			0.003	J		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		**0.0011**	J	
		VMP-63-5-012717	1/27/2017	0.039			<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-63-5-042517	4/25/2017	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-63-5-072517	7/25/2017	0.01			**0.003**	J		0.00092	J		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-63-5-110117	11/1/2017	<0.0084	U		<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-5-012618	1/26/2018	0.0028	J		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-63-5-041918	4/19/2018	0.011			<0.0046	U		<0.0052	U		<0.0081	U		<0.0074	U		**0.0013**	J		<0.045	U		**0.0014**	J	
		VMP-63-5-071918	7/19/2018	<0.0091	J	U	**0.0055**			0.0028	J	J	<0.0093	U		<0.0084	U		**0.009**			<0.052	U		**0.02**		
		VMP-63-5-102218	10/22/2018	0.013			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-63-5-012919	1/29/2019	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-5-042519	4/25/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-63-5-072319	7/23/2019	0.017			**0.00092**	J		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0039**	J	
		VMP-63-5-102419	10/24/2019	<0.0088	U	UJ	<0.005	U		<0.0057	J	U	<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-5-102419-DUP	10/24/2019	0.0044	J	J	<0.0054	U		<0.0061	J	U	<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-63-5-012720	1/27/2020	<0.01	U	UJ	<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.011	U	UJ	<0.0062	U		<0.007	U		<0.011	U		<0.01	U		<0.0058	U		<0.061	U		<0.005	U	
		VMP-63-5-042420	4/24/2020	0.0019	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-63-5-072820	7/28/2020	0.016			<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		**0.0017**	J	
		VMP-63-5-110320	11/3/2020	0.018			<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		**0.0012**	J		<0.053	U		**0.004**	J	
		VMP-63-5-012921	1/29/2021	<0.023	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
	10 ft	VMP-63-10-020315	2/3/2015	0.0049	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-63-10-042815	4/28/2015	0.0052	J		<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U	UJ	**0.0018**	J	
		VMP-63-10-072415	7/24/2015	<0.01	J	U	<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-63-10-102615	10/26/2015	<0.01	J	U	<0.006	U		<0.0068	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-63-10-012816	1/28/2016	0.006	J		<0.0061	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		**0.0017**	J	
		VMP-63-10-042616	4/26/2016	<0.011	U		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		<0.0052	U	
		VMP-63-10-072516	7/25/2016	0.0074	J		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-63-10-102416	10/24/2016	<0.0099	U		**0.00091**	J		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0014**	J	
		VMP-63-10-012717	1/27/2017	0.026			<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-63-10-042517	4/25/2017	<0.0095	U		**0.0016**	J		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-63-10-072517	7/25/2017	0.003	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-63-10-110117	11/1/2017	0.098			<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-10-012618	1/26/2018	<0.0084	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-63-10-041918	4/19/2018	<0.0083	U		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-10-071918	7/19/2018	0.0092			<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		**0.0021**	J		<0.044	U		**0.0016**	J	
		VMP-63-10-102218	10/22/2018	0.0043	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-63-10-012919	1/29/2019	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-63-10-042519	4/25/2019	0.0069	J		<0.0054	U		0.003	J		<0.0096	U		<0.0087	U		**0.0022**	J		<0.053	U		**0.0029**	J	
		VMP-63-10-072319	7/23/2019	0.011			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-63-10-102419	10/24/2019	<0.0086	U	UJ	<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-63-10-012720	1/27/2020	<0.0091	ND,UJ	UJ	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0042**		
		VMP-63-10-042420	4/24/2020	0.002	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-63-10-072820	7/28/2020	0.016			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-63-10-110320	11/3/2020	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-10-012921	1/29/2021	<0.099	U		**0.019**	J		<0.026	U		<0.04	U		<0.037	U		**0.15**			<0.22	U		**2**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	<0.021	U		0.0016	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.017**			<0.0064	J	U
		VMP-63-5-042815	4/28/2015	<0.024	U		<0.017	U		<0.0072	U		**0.0036**	J		<0.0053	U					**0.0068**	J		<0.0072	U	
		VMP-63-5-072415	7/24/2015	<0.023	U		<0.016	U		<0.0069	U		<0.0058	U		<0.0051	U					**0.0063**	J		<0.0069	U	
		VMP-63-5-102615	10/26/2015	<0.022	U		0.01	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.025**		J	<0.0065	U	
		VMP-63-5-012816	1/28/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0071**	J		<0.0065	U	
		VMP-63-5-042616	4/26/2016	<0.023	U		0.12			<0.0069	U		<0.0058	U		<0.0051	U					**0.029**			**0.0014**	J	
		VMP-63-5-072516	7/25/2016	<0.024	U		<0.017	U		<0.0072	U		<0.006	U		<0.021	U					**0.02**			<0.0072	U	
		VMP-63-5-102416	10/24/2016	<0.021	U		<0.015	U		**0.00082**	J		**0.0028**	J		<0.018	U		<0.013	U		**0.037**			<0.0063	U	
		VMP-63-5-012717	1/27/2017	**0.0014**	J		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0037**	J		<0.006	U	
		VMP-63-5-042517	4/25/2017	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					**0.01**	J		<0.0058	U	
		VMP-63-5-072517	7/25/2017	**0.002**	J		0.0019	J		**0.00077**	J		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-63-5-110117	11/1/2017	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-5-012618	1/26/2018	<0.018	U		0.0041	J		<0.0055	U		<0.0046	U		<0.016	U					<0.011	J	U	<0.0055	U	
		VMP-63-5-041918	4/19/2018	<0.017	U		<0.012	U		<0.0052	U		<0.0043	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-63-5-071918	7/19/2018	<0.02	U		0.031			<0.0059	U		<0.005	U		<0.017	U					**0.0019**	J		<0.0059	U	
		VMP-63-5-102218	10/22/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0048**	J		<0.0055	U	
		VMP-63-5-012919	1/29/2019	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-5-042519	4/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-63-5-072319	7/23/2019	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0084**	J		<0.0066	U	
		VMP-63-5-102419	10/24/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0015**	J		<0.0057	U	
		VMP-63-5-102419-DUP	10/24/2019	<0.02	U		0.0037	J		<0.0061	U		<0.005	U		<0.018	U					**0.0015**	J		<0.0061	U	
		VMP-63-5-012720	1/27/2020	<0.022	U		0.0044	J		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		<0.0066	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.02	U					**0.0077**	J		<0.007	U	
		VMP-63-5-042420	4/24/2020	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0043**	J		<0.0059	U	
		VMP-63-5-072820	7/28/2020	<0.02	U		0.0034	J		<0.0061	U		<0.0051	U		<0.018	U					**0.013**			<0.0061	U	
		VMP-63-5-110320	11/3/2020	<0.02	U		0.0037	J		<0.0061	U		<0.005	U		<0.018	U					**0.0091**	J		<0.0061	U	
		VMP-63-5-012921	1/29/2021	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0052**	J		<0.006	U	
	10 ft	VMP-63-10-020315	2/3/2015	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.0044	U					**0.0081**	J		<0.006	J	U
		VMP-63-10-042815	4/28/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					**0.0088**	J		<0.0068	U	
		VMP-63-10-072415	7/24/2015	<0.022	U		0.0043	J		<0.0065	U		**0.002**	J		<0.0048	U					**0.0056**	J		<0.0065	U	
		VMP-63-10-102615	10/26/2015	<0.023	U		<0.016	U		<0.0068	U		<0.0057	U		<0.005	U					**0.014**		J	<0.0068	U	
		VMP-63-10-012816	1/28/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					**0.0038**	J		<0.007	U	
		VMP-63-10-042616	4/26/2016	<0.024	U		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					**0.0063**	J		<0.0073	U	
		VMP-63-10-072516	7/25/2016	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.02	U					**0.033**			<0.0069	U	
		VMP-63-10-102416	10/24/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.019	U		<0.014	U		**0.0058**	J		<0.0065	U	
		VMP-63-10-012717	1/27/2017	<0.02	U		0.0091	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0023**	J		<0.0059	U	
		VMP-63-10-042517	4/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-63-10-072517	7/25/2017	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-63-10-110117	11/1/2017	<0.018	U		0.0017	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-10-012618	1/26/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-63-10-041918	4/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-10-071918	7/19/2018	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					**0.0039**	J		**0.0016**	J	
		VMP-63-10-102218	10/22/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-63-10-012919	1/29/2019	<0.018	U		<0.013	U		<0.0053	U		<0.0044	U		<0.016	U					**0.0055**	J		<0.0053	U	
		VMP-63-10-042519	4/25/2019	<0.02	U		<0.015	U		**0.0027**	J		<0.0051	U		<0.018	U					**0.008**	J		**0.007**		
		VMP-63-10-072319	7/23/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-63-10-102419	10/24/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0012**	J		<0.0056	U	
		VMP-63-10-012720	1/27/2020	<0.02	U		0.013	J		<0.0059	U		<0.0049	U		<0.017	U					**0.12**			<0.0059	U	
		VMP-63-10-042420	4/24/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0097**	J		**0.002**	J	
		VMP-63-10-072820	7/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					**0.0084**	J		<0.0066	U	
		VMP-63-10-110320	11/3/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.017**			<0.0057	U	
		VMP-63-10-012921	1/29/2021	<0.086	U		4.1			<0.026	U		<0.022	U		<0.076	U					**0.0048**	J		<0.026	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-63-5-042815	4/28/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		**0.0015**	J		<0.044	U	UJ	<0.008	U		<0.008	U	
		VMP-63-5-072415	7/24/2015	<0.006	U		<0.0096	U		<0.0095	U		**0.0021**	J		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-63-5-102615	10/26/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-63-5-012816	1/28/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-63-5-042616	4/26/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.092**			<0.042	U		<0.0077	U		<0.0077	U	
		VMP-63-5-072516	7/25/2016	<0.0062	U		<0.01	U		**0.0024**	J		<0.0043	U		<0.0055	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-63-5-102416	10/24/2016	<0.0054	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0095**			<0.038	U		<0.007	U		<0.007	U	
		VMP-63-5-012717	1/27/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00055**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-5-042517	4/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-63-5-072517	7/25/2017	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		**0.0022**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-63-5-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-63-5-012618	1/26/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0013**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-63-5-041918	4/19/2018	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.003**	J		<0.031	J	U	<0.0058	U		<0.0058	U	
		VMP-63-5-071918	7/19/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.03**			<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-5-102218	10/22/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-63-5-012919	1/29/2019	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-63-5-042519	4/25/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-63-5-072319	7/23/2019	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.0046**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-63-5-102419	10/24/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	J	U	<0.0064	U		<0.0064	U	
		VMP-63-5-102419-DUP	10/24/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0035**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-63-5-012720	1/27/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.0061	U		<0.0098	U		<0.0097	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0078	U		<0.0078	U	
		VMP-63-5-042420	4/24/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-63-5-072820	7/28/2020	<0.0085	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-63-5-110320	11/3/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0046	U		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-63-5-012921	1/29/2021	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
	10 ft	VMP-63-10-020315	2/3/2015	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-10-042815	4/28/2015	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0078**			<0.041	U	UJ	<0.0075	U		<0.0075	U	
		VMP-63-10-072415	7/24/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-63-10-102615	10/26/2015	<0.0059	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0017**	J		<0.041	U		<0.0076	U		<0.0076	U	
		VMP-63-10-012816	1/28/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-63-10-042616	4/26/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		<0.0056	U		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-63-10-072516	7/25/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		**0.0011**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-63-10-102416	10/24/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.00077**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-63-10-012717	1/27/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0044**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-63-10-042517	4/25/2017	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		**0.0011**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-63-10-072517	7/25/2017	<0.0052	U		<0.0084	U		<0.0083	U		**0.015**			**0.00038**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-10-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.0015**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-63-10-012618	1/26/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		**0.0016**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-63-10-041918	4/19/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		<0.0041	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-63-10-071918	7/19/2018	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		**0.0012**	J		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-63-10-102218	10/22/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-10-012919	1/29/2019	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-63-10-042519	4/25/2019	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.042**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-63-10-072319	7/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0044**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-63-10-102419	10/24/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-10-012720	1/27/2020	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0019**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-10-042420	4/24/2020	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-63-10-072820	7/28/2020	<0.0091	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-63-10-110320	11/3/2020	<0.005	U		<0.008	U		**0.0009**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-10-012921	1/29/2021	<0.022	U		<0.036	U		<0.036	U		<0.015	U		**0.0082**	J		<0.16	U		<0.029	U		<0.029	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	5 ft	VMP-63-5-020315	2/3/2015	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		0.021			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-63-5-042815	4/28/2015	<0.0079	U		<0.0083	U		<0.0072	U		<0.0072	U		0.0025	J		<0.0038	U		0.0028	J		**0.0015**	J	
		VMP-63-5-072415	7/24/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-63-5-102615	10/26/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		0.003	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-5-012816	1/28/2016	<0.0071	U		0.0016	J		<0.0065	U		<0.0065	U		0.016			<0.0034	U		<0.0057	U		<0.0057	U	
		VMP-63-5-042616	4/26/2016	<0.0076	U		<0.0079	U		**0.0026**	J		<0.0069	U		0.16			<0.0036	U		0.051			**0.016**		
		VMP-63-5-072516	7/25/2016	<0.0078	U		<0.0082	U		<0.0072	U		<0.0072	U		0.01			<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-63-5-102416	10/24/2016	<0.0069	U		<0.0072	U		**0.0019**	J		<0.0063	J	U	<0.006	U		<0.0033	U		0.072			**0.019**		
		VMP-63-5-012717	1/27/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-63-5-042517	4/25/2017	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.00076	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-63-5-072517	7/25/2017	<0.0064	U		0.0011	J		**0.00096**	J		<0.0058	U		<0.0055	U		<0.003	U		0.011			**0.0029**	J	
		VMP-63-5-110117	11/1/2017	<0.006	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-5-012618	1/26/2018	<0.006	U		0.0016	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-63-5-041918	4/19/2018	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		0.0051			<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-63-5-071918	7/19/2018	<0.0065	U		<0.0068	U		**0.0018**	J		**0.00096**	J		0.016			<0.0031	U		0.011			**0.0035**	J	
		VMP-63-5-102218	10/22/2018	<0.006	U		0.0021	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-63-5-012919	1/29/2019	<0.0059	U		0.0013	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-5-042519	4/25/2019	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-63-5-072319	7/23/2019	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0019	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-5-102419	10/24/2019	<0.0063	U		0.0016	J		<0.0057	U		<0.0057	U		0.0013	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-5-102419-DUP	10/24/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		0.0019	J		<0.0032	U		0.0021	J		<0.0054	J	U
		VMP-63-5-012720	1/27/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-5-012720-DUP	1/27/2020	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		<0.0066	U		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-63-5-042420	4/24/2020	<0.0064	U		0.00095	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-5-072820	7/28/2020	**0.00099**	J		0.00088	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-63-5-110320	11/3/2020	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		0.0018	J		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-63-5-012921	1/29/2021	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
	10 ft	VMP-63-10-020315	2/3/2015	<0.0066	U		<0.0068	U		<0.006	J	U	<0.006	U		0.0025	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-63-10-042815	4/28/2015	<0.0074	U		<0.0078	U		<0.0068	U		<0.0068	U		0.0092			<0.0035	U		0.0033	J		**0.0012**	J	
		VMP-63-10-072415	7/24/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-10-102615	10/26/2015	<0.0075	U		<0.0078	U		<0.0068	U		<0.0068	U		<0.0065	U		<0.0036	U		<0.006	U		<0.006	U	
		VMP-63-10-012816	1/28/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0036	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-63-10-042616	4/26/2016	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.0047	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-63-10-072516	7/25/2016	<0.0076	U		0.0013	J		<0.0069	U		<0.0069	U		0.0042	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-63-10-102416	10/24/2016	<0.0071	U		0.0014	J		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		0.0028	J		<0.0057	U	
		VMP-63-10-012717	1/27/2017	<0.0064	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-63-10-042517	4/25/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0056			**0.0014**	J	
		VMP-63-10-072517	7/25/2017	<0.0066	U		0.001	J		<0.006	U		<0.006	U		0.00067	J		<0.0031	U		0.00055	J		<0.0053	U	
		VMP-63-10-110117	11/1/2017	<0.006	U		0.0009	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-10-012618	1/26/2018	<0.006	U		0.0016	J		<0.0055	U		<0.0055	U		0.0028	J		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-63-10-041918	4/19/2018	<0.0059	U		0.0019	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-10-071918	7/19/2018	<0.0056	U		0.0012	J		<0.0051	U		<0.0051	U		0.0069			<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-63-10-102218	10/22/2018	<0.0061	U		0.0016	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-63-10-012919	1/29/2019	<0.0058	U		0.0013	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-63-10-042519	4/25/2019	<0.0067	U		<0.007	U		**0.0069**			<0.0061	U		0.018			<0.0032	U		0.0036	J		<0.0054	U	
		VMP-63-10-072319	7/23/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-63-10-102419	10/24/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-63-10-012720	1/27/2020	<0.0065	U		0.0022	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-10-042420	4/24/2020	<0.0072	U		0.0013	J		<0.0066	U		<0.0066	U		0.0019	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-10-072820	7/28/2020	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-10-110320	11/3/2020	<0.0063	U		0.0017	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-10-012921	1/29/2021	<0.028	U		<0.029	U		<0.026	U		<0.026	U		0.63			<0.013	U		<0.023	U		<0.023	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	**0.0066**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		<0.015	U	
		VMP-63-20-020315-DUP	2/3/2015	**0.0066**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-63-20-042815	4/28/2015	**0.028**	J		**0.0072**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.037**		
		VMP-63-20-072415	7/24/2015	**0.035**			**0.0041**			<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.019**		
		VMP-63-20-102615	10/26/2015	**0.062**			<0.0039	J	U	<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.047**		
		VMP-63-20-012816	1/28/2016	**0.012**	J		<0.0042	U		<0.0089	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0028**	J	
		VMP-63-20-042616	4/26/2016	**0.043**			**0.0018**	J		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		0.013	J		**0.0091**	J	
		VMP-63-20-042616-DUP	4/26/2016	**0.032**	J		**0.0012**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.0061**	J	
		VMP-63-20-072516	7/25/2016	**0.026**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		<0.013	U		<0.016	U	
		VMP-63-20-102416	10/24/2016	**0.015**	J		**0.0011**	J		<0.01	U		<0.016	U		<0.06	U		<0.0034	U		<0.014	U		**0.0044**	J	
		VMP-63-20-012717	1/27/2017	**0.024**	J		**0.0017**	J		<0.014	U		<0.021	U		<0.08	U		<0.0045	U		<0.02	U		**0.0084**	J	
		VMP-63-20-042517	4/25/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-63-20-072517	7/25/2017	**0.017**	J		**0.00045**	J		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0046**	J	
		VMP-63-20-110117	11/1/2017	**0.017**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-20-012618	1/26/2018	<0.027	J	U	**0.0014**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.016			<0.014	U	
		VMP-63-20-041918	4/19/2018	**0.0088**	J		**0.0011**	J		<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-63-20-071918	7/19/2018	**0.027**	J		**0.00036**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.012	U		**0.0044**	J	
		VMP-63-20-102218	10/22/2018	**0.016**	J		<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		0.014			**0.0022**	J	
		VMP-63-20-012919	1/29/2019	**0.015**	J		<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		**0.0021**	J	
		VMP-63-20-022719R	2/27/2019	**0.0091**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0032**	J	
		VMP-63-20-042519	4/25/2019	**0.012**	J		<0.0038	U		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-63-20-042519-DUP	4/25/2019	**0.0087**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-63-20-072319	7/23/2019	**0.0084**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-63-20-102419	10/24/2019	<0.03	U		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-63-20-012720	1/27/2020	<0.032	U	UJ	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-63-20-042420	4/24/2020	**0.018**	J		<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		0.0021	J		**0.003**	J	
		VMP-63-20-072820	7/28/2020	**0.04**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0031**	J	
		VMP-63-20-110320	11/3/2020	**0.021**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0028**	J	
		VMP-63-20-012921	1/29/2021	**0.0087**	J		**0.045**			<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.015			<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-63-20-020315-DUP	2/3/2015	<0.015	J	U	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-63-20-042815	4/28/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-63-20-072415	7/24/2015	<0.016	J	U	<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-63-20-102615	10/26/2015	**0.0053**	J		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-63-20-012816	1/28/2016	**0.0064**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.027	U		<0.0068	U	
		VMP-63-20-042616	4/26/2016	**0.002**	J		<0.0095	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0078	U	
		VMP-63-20-042616-DUP	4/26/2016	**0.0021**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-63-20-072516	7/25/2016	<0.018	U		<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-63-20-102416	10/24/2016	<0.019	U		<0.0096	U		<0.0071	U		<0.013	U		<0.016	U		<0.0075	U		<0.032	U		<0.0079	U	
		VMP-63-20-012717	1/27/2017	**0.002**	J		<0.013	U		<0.0095	U		<0.018	U		<0.022	U		<0.01	U		<0.042	ND,UJ	UJ	<0.011	U	
		VMP-63-20-042517	4/25/2017	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-20-072517	7/25/2017	<0.015	J	U	<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-63-20-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-20-012618	1/26/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-63-20-041918	4/19/2018	<0.014	J	U	<0.007	U		<0.0051	U		<0.0095	U		<0.012	U		<0.0054	U		<0.023	U		<0.0058	U	
		VMP-63-20-071918	7/19/2018	<0.015	U		<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-63-20-102218	10/22/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-63-20-012919	1/29/2019	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-63-20-022719R	2/27/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-20-042519	4/25/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0061	U	
		VMP-63-20-042519-DUP	4/25/2019	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-63-20-072319	7/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-63-20-102419	10/24/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-63-20-012720	1/27/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-63-20-042420	4/24/2020	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-63-20-072820	7/28/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-63-20-110320	11/3/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-63-20-012921	1/29/2021	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-63-20-020315-DUP	2/3/2015	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0028**	J		<0.0048	U		<0.0048	U	
		VMP-63-20-042815	4/28/2015	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-63-20-072415	7/24/2015	**0.0012**	J		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-63-20-102615	10/26/2015	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0029**	J		<0.005	U		<0.005	U	
		VMP-63-20-012816	1/28/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0033**	J		<0.0054	U		<0.0054	U	
		VMP-63-20-042616	4/26/2016	<0.0052	U		<0.012	U		<0.0091	U		<0.0091	U		<0.0091	U		**0.0034**	J		<0.0061	U		<0.0061	U	
		VMP-63-20-042616-DUP	4/26/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0026**	J		<0.0056	U		<0.0056	U	
		VMP-63-20-072516	7/25/2016	**0.0018**	J		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0034**	J		<0.0057	U		<0.0057	U	
		VMP-63-20-102416	10/24/2016	<0.0053	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0019**	J		<0.0062	U		<0.0062	U	
		VMP-63-20-012717	1/27/2017	<0.0071	U		<0.016	U		<0.012	U		<0.012	U		<0.012	U		**0.0034**	J		<0.0083	U		<0.0083	U	
		VMP-63-20-042517	4/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-63-20-072517	7/25/2017	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-63-20-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0022**	J		<0.0045	U		<0.0045	U	
		VMP-63-20-012618	1/26/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-63-20-041918	4/19/2018	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0027**	J		<0.0045	U		<0.0045	U	
		VMP-63-20-071918	7/19/2018	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-63-20-102218	10/22/2018	**0.00084**	J		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0029**	J		<0.0046	U		<0.0046	U	
		VMP-63-20-012919	1/29/2019	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0019**	J		<0.0042	U		<0.0042	U	
		VMP-63-20-022719R	2/27/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-63-20-042519	4/25/2019	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0033**	J		<0.0048	U		<0.0048	U	
		VMP-63-20-042519-DUP	4/25/2019	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-63-20-072319	7/23/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0024**	J		<0.005	U		<0.005	U	
		VMP-63-20-102419	10/24/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0019**	J		<0.0051	U		<0.0051	U	
		VMP-63-20-012720	1/27/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		<0.0068	U		<0.0055	U		<0.0055	U	
		VMP-63-20-042420	4/24/2020	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-63-20-072820	7/28/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-63-20-110320	11/3/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0026**	J		<0.0051	U		<0.0051	U	
		VMP-63-20-012921	1/29/2021	**0.069**			<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0032**	J		<0.0053	U		<0.0053	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-63-20-020315-DUP	2/3/2015	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-20-042815	4/28/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-63-20-072415	7/24/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-63-20-102615	10/26/2015	<0.0049	U		<0.0049	U		<0.0049	U		**0.0063**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-63-20-012816	1/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-20-042616	4/26/2016	<0.006	U		<0.006	U		<0.006	U		**0.0026**	J		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-63-20-042616-DUP	4/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-63-20-072516	7/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-20-102416	10/24/2016	<0.0061	U		<0.0061	U		<0.0061	U		<0.053	U		<0.0071	U		<0.007	U		<0.007	U		<0.022	U	
		VMP-63-20-012717	1/27/2017	<0.0081	U		<0.0081	U		<0.0081	U		<0.071	U		<0.0095	U		<0.0093	U		<0.0093	U		<0.03	U	
		VMP-63-20-042517	4/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-20-072517	7/25/2017	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-63-20-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-20-012618	1/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-63-20-041918	4/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-20-071918	7/19/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0044**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-63-20-102218	10/22/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0018**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-20-012919	1/29/2019	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-63-20-022719R	2/27/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-20-042519	4/25/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-20-042519-DUP	4/25/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-63-20-072319	7/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-63-20-102419	10/24/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-20-012720	1/27/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-63-20-042420	4/24/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.003**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-20-072820	7/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		**0.001**	J	
		VMP-63-20-110320	11/3/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-20-012921	1/29/2021	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	0.014			<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		**0.0014**	J	
		VMP-63-20-020315-DUP	2/3/2015	0.0082	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		**0.0015**	J	
		VMP-63-20-042815	4/28/2015	0.0091	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		**0.0015**	J	
		VMP-63-20-072415	7/24/2015	<0.01		U	**0.0012**	J		0.0019	J		<0.0098	U		<0.009	U		**0.002**	J		<0.055	U		<0.0045	U	
		VMP-63-20-102615	10/26/2015	0.18			**0.0078**			0.0086			<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-63-20-012816	1/28/2016	<0.01	U		<0.0058	U		<0.0065	U		<0.01	U		<0.0093	U		<0.0054	U		<0.056	U		<0.0047	U	
		VMP-63-20-042616	4/26/2016	<0.011	U		<0.0066	U		0.003	J		<0.012	U		<0.01	U		**0.01**			<0.065	U		**0.012**		
		VMP-63-20-042616-DUP	4/26/2016	<0.01	U		**0.0026**	J		0.0056	J		<0.01	U		<0.0096	U		**0.0021**	J		<0.059	U		**0.0016**	J	
		VMP-63-20-072516	7/25/2016	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0026**	J		<0.06	U		**0.0028**	J	
		VMP-63-20-102416	10/24/2016	0.016			**0.0078**			<0.0075	U		<0.012	U		<0.011	U		<0.0063	U		<0.065	U		**0.00093**	J	
		VMP-63-20-012717	1/27/2017	0.046			**0.0034**	J		0.002	J		<0.016	U		<0.014	U		**0.0015**	J		<0.088	U		<0.0072	U	
		VMP-63-20-042517	4/25/2017	0.0091			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-20-072517	7/25/2017	0.0057	J		**0.0018**	J		0.0006	J		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-63-20-110117	11/1/2017	0.059			<0.0048	U		<0.0054	U		<0.0085	U		<0.0077	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-20-012618	1/26/2018	0.0036	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0026**	J	
		VMP-63-20-041918	4/19/2018	<0.0084	U		<0.0048	U		<0.0055	U		<0.0085	U		<0.0078	U		<0.0046	U		<0.048	U		**0.0017**	J	
		VMP-63-20-071918	7/19/2018	0.005	J		<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-63-20-102218	10/22/2018	<0.0085	U		<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		**0.0083**		
		VMP-63-20-012919	1/29/2019	<0.0079	U		<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-63-20-022719R	2/27/2019	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-20-042519	4/25/2019	0.011			<0.0051	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-63-20-042519-DUP	4/25/2019	0.0076	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-63-20-072319	7/23/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-63-20-102419	10/24/2019	0.047		J	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-63-20-012720	1/27/2020	<0.01	U	UJ	<0.0059	U		<0.0067	U		<0.01	U		<0.0096	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-63-20-042420	4/24/2020	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-63-20-072820	7/28/2020	0.013			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-63-20-110320	11/3/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0023**	J	
		VMP-63-20-012921	1/29/2021	<0.025	U		**0.0052**	J		<0.0064	U		<0.01	U		<0.0092	U		**0.034**			<0.056	U		**0.33**		

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	<0.021	U		0.0021	J		<0.0064	U		<0.0054	U		<0.0047	U					**0.11**		J	<0.0064	U	
		VMP-63-20-020315-DUP	2/3/2015	<0.02	U		0.002	J		<0.0059	U		<0.0049	U		<0.0043	U					**0.065**		J	<0.0059	U	
		VMP-63-20-042815	4/28/2015	**0.024**			0.0012	J		**0.0054**	J		**0.02**			<0.0046	U					**0.071**			<0.0063	U	
		VMP-63-20-072415	7/24/2015	**0.011**	J		0.004	J		**0.0061**	J		**0.0021**	J		<0.0046	U					**0.022**			<0.0063	U	
		VMP-63-20-102615	10/26/2015	**0.0022**	J	J	<0.014	U		**0.0012**	J		**0.0041**	J		<0.0044	U					**0.09**		J	**0.0024**	J	
		VMP-63-20-012816	1/28/2016	<0.022	U		<0.016	U		<0.0065	U		<0.0054	U		<0.0048	U					**0.0089**	J		<0.0065	U	
		VMP-63-20-042616	4/26/2016	**0.0022**	J		0.0084	J		<0.0074	U		<0.0062	U		<0.0055	U					**0.022**			<0.0074	U	
		VMP-63-20-042616-DUP	4/26/2016	**0.0015**	J		0.0022	J		<0.0068	U		<0.0056	U		<0.005	U					**0.01**	J		**0.0018**	J	
		VMP-63-20-072516	7/25/2016	<0.023	U		0.0048	J		<0.0069	U		<0.0058	U		<0.02	U					**0.013**	J		<0.0069	U	
		VMP-63-20-102416	10/24/2016	<0.025	U		0.0062	J		<0.0075	U		<0.0063	U		<0.022	U		<0.016	U		**0.02**			<0.0075	U	
		VMP-63-20-012717	1/27/2017	**0.0018**	J		<0.024	U		<0.01	U		<0.0084	U		<0.03	U					**0.0068**	J		<0.01	U	
		VMP-63-20-042517	4/25/2017	<0.019	U		0.0019	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-63-20-072517	7/25/2017	<0.02	U		0.0014	J		**0.0005**	J		<0.005	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-63-20-110117	11/1/2017	<0.018	U		0.003	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-20-012618	1/26/2018	<0.019	U		0.0097	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-63-20-041918	4/19/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-63-20-071918	7/19/2018	<0.02	U		<0.014	U		<0.0059	U		<0.005	U		<0.017	U					**0.0043**	J		<0.0059	U	
		VMP-63-20-102218	10/22/2018	<0.018	U		0.027			<0.0055	U		<0.0046	U		<0.016	U					<0.011	U		<0.0055	U	
		VMP-63-20-012919	1/29/2019	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					<0.01	U		<0.0051	U	
		VMP-63-20-022719R	2/27/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-63-20-042519	4/25/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-63-20-042519-DUP	4/25/2019	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-63-20-072319	7/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0019**	J		<0.0061	U	
		VMP-63-20-102419	10/24/2019	<0.021	U		<0.015	U		<0.0062	J	U	<0.0052	U		<0.018	U					<0.012	U		<0.0062	J	U
		VMP-63-20-012720	1/27/2020	<0.022	U		<0.016	U		<0.0067	U		<0.0056	U		<0.02	U					<0.013	U		**0.0029**	J	
		VMP-63-20-042420	4/24/2020	<0.02	U		0.0024	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0055**	J		**0.0013**	J	
		VMP-63-20-072820	7/28/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.007**	J		<0.006	U	
		VMP-63-20-110320	11/3/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.006**	J		<0.0062	U	
		VMP-63-20-012921	1/29/2021	<0.021	U		0.28			**0.00097**	J		<0.0054	U		<0.019	U					**0.006**	J		<0.0064	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-63-20-020315-DUP	2/3/2015	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00092**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-63-20-042815	4/28/2015	<0.0055	U		<0.0088	U		<0.0087	U		<0.0038	U		**0.0042**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-63-20-072415	7/24/2015	**0.0012**	J		<0.0088	U		<0.0087	U		<0.0038	U		**0.0057**			<0.038	U		<0.007	U		<0.007	U	
		VMP-63-20-102615	10/26/2015	**0.0013**	J	J	<0.0085	U		<0.0084	U		**0.0098**			**0.0094**			<0.037	U		<0.0067	U		<0.0067	U	
		VMP-63-20-012816	1/28/2016	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		<0.005	U		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-63-20-042616	4/26/2016	<0.0064	U		<0.01	U		<0.01	U		<0.0045	U		**0.0043**	J		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-63-20-042616-DUP	4/26/2016	<0.0059	U		<0.0095	U		<0.0094	U		<0.0041	U		**0.0045**	J		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-63-20-072516	7/25/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		**0.0012**	J		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-63-20-102416	10/24/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		**0.0028**	J		<0.046	U		<0.0084	U		<0.0084	U	
		VMP-63-20-012717	1/27/2017	<0.0088	U		<0.014	U		<0.014	U		<0.006	U		**0.0021**	J		<0.061	U		<0.011	U		<0.011	U	
		VMP-63-20-042517	4/25/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-20-072517	7/25/2017	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0011**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-63-20-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0021**	J		<0.033	U		<0.006	U		<0.006	U	
		VMP-63-20-012618	1/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0046**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-20-041918	4/19/2018	<0.0047	U		<0.0076	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-63-20-071918	7/19/2018	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0019**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-20-102218	10/22/2018	<0.0048	U		<0.0077	U		<0.0076	U		<0.0033	U		<0.0042	U		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-63-20-012919	1/29/2019	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-63-20-022719R	2/27/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-20-042519	4/25/2019	<0.005	U		<0.0081	U		**0.045**			<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-63-20-042519-DUP	4/25/2019	<0.0048	U		<0.0078	U		**0.044**			<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-20-072319	7/23/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.0021**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-63-20-102419	10/24/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-63-20-012720	1/27/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-63-20-042420	4/24/2020	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0018**	J		<0.036	J	U	<0.0065	U		<0.0065	U	
		VMP-63-20-072820	7/28/2020	<0.0083	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-20-110320	11/3/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-63-20-012921	1/29/2021	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		**0.0025**	J		<0.039	U		<0.0071	U		<0.0071	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		0.35						48			49						0.1						56		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-63	20 ft	VMP-63-20-020315	2/3/2015	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		0.029			<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-63-20-020315-DUP	2/3/2015	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		0.028			<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-20-042815	4/28/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		0.0028	J		<0.0056	U	
		VMP-63-20-072415	7/24/2015	<0.0069	U		<0.0072	U		**0.0025**	J		<0.0063	U		0.061			<0.0033	U		0.0043	J		**0.0015**	J	
		VMP-63-20-102615	10/26/2015	<0.0066	U		<0.0069	U		**0.015**		J	**0.0032**	J		0.0076			<0.0032	U		0.019			**0.011**		
		VMP-63-20-012816	1/28/2016	<0.0071	U		<0.0074	U		<0.0065	U		<0.0065	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-20-042616	4/26/2016	<0.0081	U		<0.0085	U		**0.0026**	J		**0.001**	J		0.0037	J		<0.0039	U		0.0028	J		**0.0013**	J	
		VMP-63-20-042616-DUP	4/26/2016	<0.0074	U		<0.0078	U		**0.0052**	J		**0.0013**	J		0.0025	J		<0.0035	U		0.0053	J		**0.0015**	J	
		VMP-63-20-072516	7/25/2016	<0.0076	U		0.0015	J		<0.0069	U		<0.0069	U		0.0037	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-63-20-102416	10/24/2016	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		0.0084			<0.0039	U		0.023			**0.0063**	J	
		VMP-63-20-012717	1/27/2017	<0.011	U		<0.012	U		<0.01	J	U	<0.01	J	U	<0.0096	U		<0.0052	U		0.0067	J		**0.0018**	J	
		VMP-63-20-042517	4/25/2017	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		0.00077	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-20-072517	7/25/2017	<0.0066	U		0.0013	J		<0.0061	J	U	<0.0061	U		0.0007	J		<0.0032	U		0.0056			**0.0014**	J	
		VMP-63-20-110117	11/1/2017	<0.0059	U		0.0011	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-20-012618	1/26/2018	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-63-20-041918	4/19/2018	<0.006	U		0.0015	J		<0.0055	U		<0.0055	U		0.0032	J		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-20-071918	7/19/2018	**0.0027**	J		0.0015	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-20-102218	10/22/2018	<0.006	U		0.0017	J		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-63-20-012919	1/29/2019	<0.0056	U		0.0011	J		<0.0051	U		<0.0051	U		<0.0049	U		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-63-20-022719R	2/27/2019	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-20-042519	4/25/2019	<0.0064	U		<0.0066	U		<0.0058	U		<0.0058	U		0.0024	J		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-63-20-042519-DUP	4/25/2019	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		0.0025	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-63-20-072319	7/23/2019	<0.0066	U		0.0013	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.0013	J		<0.0054	U	
		VMP-63-20-102419	10/24/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		0.0039	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-63-20-012720	1/27/2020	<0.0074	U		<0.0077	U		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-63-20-042420	4/24/2020	<0.0064	U		0.001	J		<0.0059	U		<0.0059	U		0.0014	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-20-072820	7/28/2020	<0.0066	U		0.001	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-63-20-110320	11/3/2020	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		0.0012	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-63-20-012921	1/29/2021	<0.007	U		0.0015	J		<0.0064	U		<0.0064	U		0.15			<0.0033	U		0.0018	J		<0.0057	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-63-30-020315	2/3/2015	**0.0067**	J		**0.00076**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0085	J		<0.015	U	
		VMP-63-30-042815	4/28/2015	**0.013**	J		**0.004**	J		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0091	J		**0.01**	J	
		VMP-63-30-072415	7/24/2015	**0.034**			**0.0025**	J		<0.0089	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.014**	J	
		VMP-63-30-102615	10/26/2015	**0.024**	J		<0.0036	J	U	<0.0075	U		<0.012	U		<0.043	U		<0.0025	U		0.011			**0.014**		
		VMP-63-30-102615-DUP	10/26/2015	**0.03**	J		<0.0042	J	U	<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		0.0087	J		**0.012**	J	
		VMP-63-30-012816	1/28/2016	<0.031	J	U	<0.0042	U		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.011	J		**0.0024**	J	
		VMP-63-30-042616	4/26/2016	**0.0065**	J		**0.0016**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		0.0045	J		<0.015	U	
		VMP-63-30-072516	7/25/2016	**0.014**	J		<0.0049	U		<0.01	U		<0.016	U		<0.059	U		<0.0034	U		0.0062	J		<0.018	U	
		VMP-63-30-072516-DUP	7/25/2016	**0.011**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.0089	J		<0.016	U	
		VMP-63-30-102416	10/24/2016	**0.038**			**0.00092**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0085	J		**0.0071**	J	
		VMP-63-30-012717	1/27/2017	**0.016**	J		<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		**0.0082**	J	
		VMP-63-30-042517	4/25/2017	<0.029	J	U	<0.0039	U		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0026	J		**0.0038**	J	
		VMP-63-30-072517	7/25/2017	**0.0093**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		0.0023	J		**0.0025**	J	
		VMP-63-30-110117	11/1/2017	<0.026	J	U	**0.00059**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-30-012618	1/26/2018	**0.01**	J		**0.0011**	J		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		0.0094	J		<0.014	U	
		VMP-63-30-012618-DUP	1/26/2018	**0.0095**	J		**0.0013**	J		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		0.011			<0.013	U	
		VMP-63-30-041918	4/19/2018	**0.0097**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-63-30-041918-DUP	4/19/2018	**0.0087**	J		<0.0035	U		<0.0074	U		<0.011	U		<0.043	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-63-30-071918	7/19/2018	**0.048**			**0.00062**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0083**	J	
		VMP-63-30-071918-DUP	7/19/2018	**0.071**			**0.0007**	J		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0096**	J	
		VMP-63-30-102218	10/22/2018	**0.015**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		**0.0026**	J	
		VMP-63-30-102218-DUP	10/22/2018	**0.0057**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-63-30-020419	2/4/2019	**0.02**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0032**	J	
		VMP-63-30-050319	5/3/2019	**0.039**			<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0038**	J	
		VMP-63-30-072319	7/23/2019	**0.016**	J		**0.00085**	J		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-63-30-102419	10/24/2019	**0.017**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0021**	J	
		VMP-63-30-012720	1/27/2020	**0.005**	J	J	<0.0044	U		<0.0092	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-63-30-042420	4/24/2020	**0.0069**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0017**	J	
		VMP-63-30-072820	7/28/2020	**0.01**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-63-30-072820-DUP	7/28/2020	**0.014**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0012**	J	
		VMP-63-30-110320	11/3/2020	**0.012**	J		**0.00062**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0047	J		<0.014	U	
		VMP-63-30-110320-DUP	11/3/2020	**0.013**	J		**0.0005**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		0.0066	J		**0.0013**	J	
		VMP-63-30-012921	1/29/2021	**0.0076**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-63-30-020315	2/3/2015	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-63-30-042815	4/28/2015	**0.0047**	J		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-63-30-072415	7/24/2015	<0.017	J	U	<0.0084	U		<0.0061	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-63-30-102615	10/26/2015	**0.0088**	J		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-63-30-102615-DUP	10/26/2015	**0.0067**	J		<0.0083	U		<0.0061	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-63-30-012816	1/28/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-63-30-042616	4/26/2016	**0.001**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-63-30-072516	7/25/2016	<0.019	U		<0.0096	U		<0.007	U		<0.013	U		<0.016	U		<0.0074	U		<0.031	U		<0.0079	U	
		VMP-63-30-072516-DUP	7/25/2016	<0.017	U		<0.0088	U		<0.0064	U		<0.012	U		<0.015	U		<0.0068	U		<0.029	U		<0.0072	U	
		VMP-63-30-102416	10/24/2016	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-63-30-012717	1/27/2017	**0.0014**	J		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	ND,UJ	UJ	<0.0062	U	
		VMP-63-30-042517	4/25/2017	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-63-30-072517	7/25/2017	<0.014	J	U	<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-30-110117	11/1/2017	<0.014	U		<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-30-012618	1/26/2018	**0.0017**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-63-30-012618-DUP	1/26/2018	<0.014	U		<0.0069	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
	30 ft	VMP-63-30-041918	4/19/2018	<0.014	J	U	<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-63-30-041918-DUP	4/19/2018	<0.014	J	U	<0.007	U		<0.0051	U		<0.0094	U		<0.012	U		<0.0054	U		<0.023	U		<0.0057	U	
		VMP-63-30-071918	7/19/2018	**0.0082**	J		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		**0.0017**	J		<0.0062	U	
		VMP-63-30-071918-DUP	7/19/2018	**0.012**	J		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-30-102218	10/22/2018	<0.013	U		**0.00075**	J		<0.005	U		<0.0092	U		<0.011	U		<0.0053	U		<0.022	U		<0.0056	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.014	U		<0.0071	U		<0.0052	U		<0.0096	U		**0.0013**	J		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-63-30-020419	2/4/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-30-050319	5/3/2019	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-63-30-072319	7/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	ND,UJ	UJ
		VMP-63-30-102419	10/24/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-63-30-012720	1/27/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U	UJ	<0.0071	U	
		VMP-63-30-042420	4/24/2020	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-63-30-072820	7/28/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-63-30-110320	11/3/2020	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.015	J	U	<0.0076	U		<0.0056	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0063	U	
		VMP-63-30-012921	1/29/2021	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-63-30-020315	2/3/2015	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0029**	J		<0.0051	U		<0.0051	U	
		VMP-63-30-042815	4/28/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0022**	J		<0.0057	U		<0.0057	U	
		VMP-63-30-072415	7/24/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0022**	J		<0.0054	U		<0.0054	U	
		VMP-63-30-102615	10/26/2015	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-63-30-102615-DUP	10/26/2015	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0028**	J		<0.0053	U		<0.0053	U	
		VMP-63-30-012816	1/28/2016	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.003**	J		<0.0053	U		<0.0053	U	
		VMP-63-30-042616	4/26/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0023**	J		<0.0052	U		<0.0052	U	
		VMP-63-30-072516	7/25/2016	<0.0052	U		<0.012	U		<0.0092	U		<0.0092	U		<0.0092	U		**0.0041**	J		<0.0062	U		<0.0062	U	
		VMP-63-30-072516-DUP	7/25/2016	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0033**	J		<0.0057	U		<0.0057	U	
		VMP-63-30-102416	10/24/2016	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-63-30-012717	1/27/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-63-30-042517	4/25/2017	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		<0.006	U		<0.0049	U		<0.0049	U	
		VMP-63-30-072517	7/25/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0021**	J		<0.0047	U		<0.0047	U	
		VMP-63-30-110117	11/1/2017	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.002**	J		<0.0045	U		<0.0045	U	
		VMP-63-30-012618	1/26/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0026**	J		<0.0046	U		<0.0046	U	
		VMP-63-30-012618-DUP	1/26/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0025**	J		<0.0044	U		<0.0044	U	
		VMP-63-30-041918	4/19/2018	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0031**	J		<0.0046	U		<0.0046	U	
		VMP-63-30-041918-DUP	4/19/2018	<0.0038	U		<0.0085	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0029**	J		<0.0045	U		<0.0045	U	
		VMP-63-30-071918	7/19/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.003**	J		<0.0048	U		<0.0048	U	
		VMP-63-30-071918-DUP	7/19/2018	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.003**	J		<0.0047	U		<0.0047	U	
		VMP-63-30-102218	10/22/2018	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0028**	J		<0.0044	U		<0.0044	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0036**	J		<0.0046	U		<0.0046	U	
		VMP-63-30-020419	2/4/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0025**	J		<0.0047	U		<0.0047	U	
		VMP-63-30-050319	5/3/2019	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-63-30-072319	7/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0033**	J		<0.0051	U		<0.0051	U	
		VMP-63-30-102419	10/24/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-63-30-012720	1/27/2020	<0.0047	U		<0.01	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-63-30-042420	4/24/2020	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-63-30-072820	7/28/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.002**	J		<0.0049	U		<0.0049	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0022**	J		<0.0047	U		<0.0047	U	
		VMP-63-30-110320	11/3/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0026**	J		<0.0049	U		<0.0049	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0042	U		<0.0093	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-63-30-012921	1/29/2021	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0034**	J		<0.0051	U		<0.0051	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	30 ft	VMP-63-30-020315	2/3/2015	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-30-042815	4/28/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-30-072415	7/24/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-30-102615	10/26/2015	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	J	U	<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-30-102615-DUP	10/26/2015	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	J	U	<0.0061	U		<0.006	U		<0.006	U		<0.019	U	
		VMP-63-30-012816	1/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-63-30-042616	4/26/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-63-30-072516	7/25/2016	<0.006	U		<0.006	U		<0.006	U		<0.053	U		<0.007	U		<0.0069	U		<0.0069	U		<0.022	U	
		VMP-63-30-072516-DUP	7/25/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-63-30-102416	10/24/2016	<0.005	U		<0.005	U		<0.005	U		**0.0022**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-30-012717	1/27/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.0019**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-63-30-042517	4/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		**0.002**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-63-30-072517	7/25/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-30-110117	11/1/2017	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-30-012618	1/26/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-63-30-012618-DUP	1/26/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-30-041918	4/19/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-63-30-041918-DUP	4/19/2018	<0.0044	U		<0.0044	U		<0.0044	U		<0.038	U		<0.0051	U		<0.005	U		<0.005	U		<0.016	U	
		VMP-63-30-071918	7/19/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-30-071918-DUP	7/19/2018	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		**0.0026**	J		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-30-102218	10/22/2018	<0.0043	U		<0.0043	U		<0.0043	U		**0.0023**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.0045	U		<0.0045	U		<0.0045	U		**0.0025**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-63-30-020419	2/4/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-30-050319	5/3/2019	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-63-30-072319	7/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-30-102419	10/24/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-63-30-012720	1/27/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.048	U		<0.0064	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-63-30-042420	4/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-63-30-072820	7/28/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-63-30-110320	11/3/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-63-30-012921	1/29/2021	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-63-30-020315	2/3/2015	0.048			<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		**0.0016**	J		<0.054	U		**0.0016**	J	
		VMP-63-30-042815	4/28/2015	0.038			<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0031**	J		<0.06	U		**0.0041**	J	
		VMP-63-30-072415	7/24/2015	<0.01	J	U	<0.0058	U		<0.0066	U		<0.01	U		<0.0093	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-63-30-102615	10/26/2015	0.049			<0.0049	U		<0.0055	U		<0.0086	U		<0.0078	U		<0.0046	U		<0.048	U		<0.0039	U	
		VMP-63-30-102615-DUP	10/26/2015	0.032			<0.0057	U		<0.0065	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-63-30-012816	1/28/2016	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		**0.0014**	J	
		VMP-63-30-042616	4/26/2016	0.0065	J		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-63-30-072516	7/25/2016	<0.011	U		<0.0066	U		<0.0075	U		<0.012	U		<0.011	U		<0.0062	U		<0.065	U		<0.0054	U	
		VMP-63-30-072516-DUP	7/25/2016	<0.01	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0057	U		<0.06	U		<0.0049	U	
		VMP-63-30-102416	10/24/2016	0.026			**0.022**			0.0028	J		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	
		VMP-63-30-012717	1/27/2017	0.048			<0.0052	U		0.0098			<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-63-30-042517	4/25/2017	<0.0092	U		<0.0053	U		<0.006	U		<0.0093	U		<0.0085	U		**0.0019**	J		<0.052	U		<0.0043	U	
		VMP-63-30-072517	7/25/2017	0.0097			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		**0.00037**	J	
		VMP-63-30-110117	11/1/2017	0.36			<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-30-012618	1/26/2018	0.0077	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		**0.0029**	J	
		VMP-63-30-012618-DUP	1/26/2018	0.0073	J		<0.0048	U		<0.0054	U		<0.0084	U		<0.0077	U		<0.0045	U		<0.047	U		**0.0024**	J	
	30 ft	VMP-63-30-041918	4/19/2018	0.044		J	<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-63-30-041918-DUP	4/19/2018	0.076		J	<0.0048	U		<0.0054	U		<0.0085	U		<0.0078	U		<0.0045	U		<0.047	U		<0.0039	U	
		VMP-63-30-071918	7/19/2018	0.0054	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-63-30-071918-DUP	7/19/2018	0.006	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-30-102218	10/22/2018	<0.0081	U		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		<0.0044	U		<0.046	U		<0.0038	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.0085	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-63-30-020419	2/4/2019	<0.0088	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-30-050319	5/3/2019	0.02			<0.0052	U		<0.0059	U		<0.0092	ND,UJ		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-63-30-072319	7/23/2019	0.0042	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		**0.0018**	J	
		VMP-63-30-102419	10/24/2019	<0.0095	U	UJ	<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-63-30-012720	1/27/2020	<0.01	U	UJ	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0048	U	
		VMP-63-30-042420	4/24/2020	<0.0096	U		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-63-30-072820	7/28/2020	0.0091	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-63-30-072820-DUP	7/28/2020	0.014			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-63-30-110320	11/3/2020	0.015			<0.0052	U		0.0014	J		<0.0093	U		<0.0084	U		**0.00086**	J		<0.052	U		**0.0025**	J	
		VMP-63-30-110320-DUP	11/3/2020	0.012			<0.0052	U		<0.0059	U		<0.0093	U		<0.0084	U		**0.00075**	J		<0.052	U		**0.0021**	J	
		VMP-63-30-012921	1/29/2021	<0.024	U		<0.0054	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0051	U		<0.054	U		<0.0044	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
Remediation Objective				**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-63-30-020315	2/3/2015	<0.021	U		0.0069	J		<0.0062	U		<0.0052	U		<0.0045	U					**0.01**	J		<0.0062	U	
		VMP-63-30-042815	4/28/2015	**0.0009**	J		0.0052	J		<0.0069	U		**0.003**	J		<0.005	U					**0.0093**	J		<0.0069	U	
		VMP-63-30-072415	7/24/2015	**0.0042**	J		0.0034	J		**0.0011**	J		**0.0015**	J		<0.0048	U					**0.013**	J		<0.0066	U	
		VMP-63-30-102615	10/26/2015	<0.018	U		0.0089	J		<0.0055	U		**0.0018**	J		<0.004	U					**0.028**		J	<0.0055	U	
		VMP-63-30-102615-DUP	10/26/2015	**0.0026**	J	J	0.0085	J		<0.0065	U		<0.0054	U		<0.0048	U					**0.015**		J	<0.0065	U	
		VMP-63-30-012816	1/28/2016	<0.021	U		0.0071	J		<0.0064	U		<0.0053	U		<0.0047	U					**0.0014**	J		**0.0015**	J	
		VMP-63-30-042616	4/26/2016	<0.021	U		0.0048	J		<0.0063	U		<0.0053	U		<0.0046	U					**0.016**			<0.0063	U	
		VMP-63-30-072516	7/25/2016	<0.025	U		0.0075	J		<0.0075	U		<0.0062	U		<0.022	U					**0.0063**	J		**0.0028**	J	
		VMP-63-30-072516-DUP	7/25/2016	<0.023	U		0.0074	J		**0.0012**	J		<0.0057	U		<0.02	U					**0.0065**	J		**0.0032**	J	
		VMP-63-30-102416	10/24/2016	<0.02	U		0.0037	J		**0.00076**	J		**0.0016**	J		<0.018	U		<0.013	U		**0.38**			**0.00072**	J	
		VMP-63-30-012717	1/27/2017	**0.001**	J		0.006	J		<0.0059	U		<0.0049	U		<0.017	U					**0.0038**	J		**0.0025**	J	
		VMP-63-30-042517	4/25/2017	<0.02	U		0.0049	J		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-63-30-072517	7/25/2017	<0.019	U		0.0022	J		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-63-30-110117	11/1/2017	<0.018	U		0.0035	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-30-012618	1/26/2018	<0.019	U		0.014			<0.0056	U		<0.0047	U		<0.016	U					**0.0036**	J		<0.0056	U	
		VMP-63-30-012618-DUP	1/26/2018	<0.018	U		0.0071	J		<0.0054	U		<0.0045	U		<0.016	U					<0.011	J	U	<0.0054	U	
	30 ft	VMP-63-30-041918	4/19/2018	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-63-30-041918-DUP	4/19/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-63-30-071918	7/19/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					**0.0028**	J		<0.0058	U	
		VMP-63-30-071918-DUP	7/19/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.011**	J		<0.0057	U	
		VMP-63-30-102218	10/22/2018	<0.018	U		0.0034	J		<0.0053	U		<0.0044	U		<0.016	U					<0.011	U		<0.0053	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.018	U		0.0029	J		<0.0056	U		<0.0046	U		<0.016	U					**0.0026**	J		<0.0056	U	
		VMP-63-30-020419	2/4/2019	<0.019	U		0.0043	J		**0.00072**	J		<0.0048	U		<0.017	U					**0.002**	J		**0.002**	J	
		VMP-63-30-050319	5/3/2019	<0.02	U		0.0047	J		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		**0.0035**	J	
		VMP-63-30-072319	7/23/2019	<0.021	U		0.0035	J		<0.0062	U		<0.0052	U		<0.018	U					**0.0034**	J		<0.0062	U	
		VMP-63-30-102419	10/24/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0013**	J		<0.0062	U	
		VMP-63-30-012720	1/27/2020	<0.022	U		0.01	J		<0.0068	U		<0.0056	U		<0.02	U					<0.014	U		<0.0068	U	
		VMP-63-30-042420	4/24/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0025**	J		<0.0062	U	
		VMP-63-30-072820	7/28/2020	<0.02	U		0.0034	J		<0.006	U		<0.005	U		<0.018	U					**0.011**	J		<0.006	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.019	U		0.0034	J		<0.0057	U		<0.0048	U		<0.017	U					**0.0088**	J		<0.0057	U	
		VMP-63-30-110320	11/3/2020	<0.02	U		0.0045	J		<0.0059	U		<0.005	U		<0.017	U					**0.014**			<0.0059	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.02	U		0.005	J		<0.0059	U		<0.005	U		<0.017	U					**0.015**			<0.0059	U	
		VMP-63-30-012921	1/29/2021	<0.02	U		<0.015	U		<0.0062	U		<0.0051	U		<0.018	U					**0.0075**	J		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		**690**			**0.04**			**6.1**			**980**			**2800**			**3.3**			**3100**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-63-30-020315	2/3/2015	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00082**	J		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-63-30-042815	4/28/2015	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-63-30-072415	7/24/2015	<0.0057	U		<0.0092	U		<0.009	U		<0.0039	U		**0.0014**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-63-30-102615	10/26/2015	**0.0008**	J	J	<0.0077	U		<0.0076	U		<0.0033	U		**0.0043**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-63-30-102615-DUP	10/26/2015	<0.0056	U		<0.0091	U		<0.009	U		<0.0039	U		**0.0025**	J		<0.039	U		<0.0072	U		<0.0072	U	
		VMP-63-30-012816	1/28/2016	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-63-30-042616	4/26/2016	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		**0.0013**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-63-30-072516	7/25/2016	<0.0065	U		<0.01	U		<0.01	U		<0.0045	U		<0.0057	U		<0.045	U		<0.0083	U		<0.0083	U	
		VMP-63-30-072516-DUP	7/25/2016	<0.006	U		<0.0096	U		<0.0095	U		<0.0041	U		<0.0053	U		<0.042	U		<0.0076	U		<0.0076	U	
		VMP-63-30-102416	10/24/2016	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0072**			<0.037	U		<0.0068	U		<0.0068	U	
		VMP-63-30-012717	1/27/2017	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.0015**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-30-042517	4/25/2017	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-30-072517	7/25/2017	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00039**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-30-110117	11/1/2017	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		<0.0042	U		<0.033	U		<0.006	U		<0.006	U	
		VMP-63-30-012618	1/26/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.007**			<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-30-012618-DUP	1/26/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0032	U		**0.0025**	J		<0.033	U		<0.006	U		<0.006	U	
	30 ft	VMP-63-30-041918	4/19/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		**0.036**		J	<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-30-041918-DUP	4/19/2018	<0.0047	U		<0.0076	U		<0.0075	U		<0.0033	U		**0.013**		J	<0.033	U		<0.006	U		<0.006	U	
		VMP-63-30-071918	7/19/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-63-30-071918-DUP	7/19/2018	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		**0.00083**	J		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-30-102218	10/22/2018	<0.0046	U		<0.0074	U		<0.0073	U		<0.0032	U		<0.0041	U		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.0048	U		<0.0078	U		<0.0077	U		<0.0033	U		<0.0042	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-63-30-020419	2/4/2019	<0.005	U		<0.008	U		**0.0052**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-30-050319	5/3/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.0022**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-63-30-072319	7/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.0051**			<0.037	U		<0.0069	U		<0.0069	U	
		VMP-63-30-102419	10/24/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-63-30-012720	1/27/2020	<0.0058	U		<0.0094	U		<0.0093	U		<0.004	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-63-30-042420	4/24/2020	<0.0054	U		<0.0087	U		<0.0086	U		<0.0037	U		<0.0048	U		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-63-30-072820	7/28/2020	<0.0083	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0079	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-63-30-110320	11/3/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00056**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0052	U		<0.0083	U		<0.0082	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-63-30-012921	1/29/2021	<0.0053	U		<0.0086	U		<0.0085	U		<0.0037	U		**0.00095**	J		<0.037	U		<0.0068	U		<0.0068	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
		VMP-63-30-020315	2/3/2015	<0.0068	U		<0.0071	U		**0.0015**	J		<0.0062	U		0.0014	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-63-30-042815	4/28/2015	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0065	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-63-30-072415	7/24/2015	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-63-30-102615	10/26/2015	<0.006	U		<0.0063	J	U	<0.0055	J	UJ	<0.0055	U		0.0019	J		<0.0029	U		0.0017	J		<0.0049	U	
		VMP-63-30-102615-DUP	10/26/2015	<0.0071	U		<0.0074	J	U	<0.0065	U		<0.0065	U		0.0024	J		<0.0034	U		0.0018	J		<0.0057	U	
		VMP-63-30-012816	1/28/2016	<0.007	U		0.0018	J		**0.0014**	J		<0.0064	U		0.0078			<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-63-30-042616	4/26/2016	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-63-30-072516	7/25/2016	<0.0082	U		<0.0086	U		<0.0075	U		<0.0075	U		0.011			<0.0039	U		0.0014	J		<0.0066	U	
		VMP-63-30-072516-DUP	7/25/2016	<0.0075	U		<0.0079	U		<0.0069	U		<0.0069	U		0.012			<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-63-30-102416	10/24/2016	<0.0067	U		0.0014	J		**0.0016**	J		<0.0062	J	U	<0.0059	U		<0.0032	U		0.063			**0.015**		
		VMP-63-30-012717	1/27/2017	<0.0065	U		0.0013	J		**0.011**			**0.0053**	J		<0.0056	U		<0.0031	U		0.0013	J		**0.00082**	J	
		VMP-63-30-042517	4/25/2017	<0.0065	U		<0.0068	U		<0.006	U		<0.006	U		0.00084	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-63-30-072517	7/25/2017	<0.0063	U		0.0013	J		<0.0057	U		<0.0057	U		0.00062	J		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-30-110117	11/1/2017	<0.006	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-30-012618	1/26/2018	<0.0062	U		0.0014	J		<0.0056	U		<0.0056	U		0.0011	J		<0.0029	U		<0.005	U		<0.005	U	
		VMP-63-30-012618-DUP	1/26/2018	<0.0059	U		0.0012	J		<0.0054	U		<0.0054	U		0.00083	J		<0.0028	U		<0.0048	U		<0.0048	U	
	30 ft	VMP-63-30-041918	4/19/2018	<0.0061	U		0.0014	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-63-30-041918-DUP	4/19/2018	<0.006	U		<0.0062	U		<0.0054	U		<0.0054	U		<0.0052	U		<0.0028	U		<0.0048	U		<0.0048	U	
		VMP-63-30-071918	7/19/2018	<0.0064	U		0.0014	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-63-30-071918-DUP	7/19/2018	<0.0063	U		<0.0065	U		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-30-102218	10/22/2018	<0.0058	U		0.0016	J		<0.0053	U		<0.0053	U		<0.005	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-63-30-102218-DUP	10/22/2018	<0.0061	U		0.0017	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-63-30-020419	2/4/2019	**0.0039**	J		0.0013	J		<0.0057	U		<0.0057	U		0.018			<0.003	U		<0.005	U		<0.005	U	
		VMP-63-30-050319	5/3/2019	<0.0064	U		<0.0067	U		**0.0028**	J		<0.0059	U		0.0057	J0	J	<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-30-072319	7/23/2019	**0.001**	J		0.00093	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		0.0026	J		<0.0055	U	
		VMP-63-30-102419	10/24/2019	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-63-30-012720	1/27/2020	<0.0074	U		<0.0077	U		<0.0068	U		<0.0068	U		0.0021	J		<0.0035	U		<0.006	U		<0.006	U	
		VMP-63-30-042420	4/24/2020	<0.0068	U		0.001	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-63-30-072820	7/28/2020	<0.0066	U		0.001	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-63-30-072820-DUP	7/28/2020	<0.0063	U		0.00093	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-63-30-110320	11/3/2020	<0.0065	U		0.0018	J		<0.0059	J	U	<0.0059	U		0.001	J		<0.0031	U		0.00062	J		<0.0052	U	
		VMP-63-30-110320-DUP	11/3/2020	<0.0065	U		0.0014	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-63-30-012921	1/29/2021	<0.0067	U		0.0017	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0054	U		<0.0054	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.031	U		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-5-042815	4/28/2015	**0.007**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		**0.0037**	J	
		VMP-64-5-072415	7/24/2015	**0.021**	J		<0.0045	J	U	<0.0094	U		<0.014	U		<0.054	U		<0.0031	U		0.015			**0.0076**	J	
		VMP-64-5-102615	10/26/2015	**0.013**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		**0.0051**	J	
		VMP-64-5-012816	1/28/2016	**0.017**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		**0.0031**	J	
		VMP-64-5-042616	4/26/2016	**0.012**	J		<0.0051	U		<0.011	U		<0.016	U		<0.062	U		<0.0035	U		<0.015	U		<0.019	U	
		VMP-64-5-080216	8/2/2016	**0.054**			**0.003**	J		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		0.18		J	**0.0079**	J	
		VMP-64-5-080216-DUP	8/2/2016	**0.047**			**0.0018**	J		<0.01	U		<0.015	U		<0.058	U		<0.0033	U		0.049		J	**0.0067**	J	
		VMP-64-5-102416	10/24/2016	**0.0078**	J		**0.00058**	J		<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-64-5-012517	1/25/2017	**0.028**			<0.0038	U		<0.008	U		<0.012	U		<0.047	U		<0.0026	U		<0.011	U		**0.0053**	J	
		VMP-64-5-042717	4/27/2017	<0.025	J	U	<0.0033	U		<0.007	U		<0.011	U		<0.04	U		<0.0023	U		<0.0099	U		<0.012	U	
		VMP-64-5-072517	7/25/2017	**0.02**	J		<0.0074	U		<0.016	U		<0.024	U		<0.09	U		<0.0051	U		<0.022	U		**0.0038**	J	
		VMP-64-5-110317	11/3/2017	**0.012**	J		<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-64-5-012218	1/22/2018	**0.0031**	J		<0.0036	J	U	<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-64-5-041218	4/12/2018	**0.0048**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-64-5-072318	7/23/2018	**0.034**			<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		**0.0049**	J	
		VMP-64-5-102518	10/25/2018	**0.011**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-5-012119	1/21/2019	**0.035**			<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U	UJ	**0.0029**	J	
		VMP-64-5-042619	4/26/2019	**0.088**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0081**	J	
		VMP-64-5-072519	7/25/2019	**0.034**			<0.0038	U		<0.0079	U		<0.012	U		<0.046	U	UJ	<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-5-072519-DUP	7/25/2019	**0.032**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.012	U		**0.0034**	J	
		VMP-64-5-102319	10/23/2019	**0.027**	J		<0.0039	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		**0.0057**	J	
		VMP-64-5-012820	1/28/2020	**0.012**	J		<0.0043	U		<0.0091	U		<0.014	U		<0.053	U		<0.003	U		<0.013	U		**0.0048**	J	
		VMP-64-5-042420	4/24/2020	**0.013**	J		<0.0041	U		<0.0085	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0034**	J	
		VMP-64-5-072420	7/24/2020	**0.068**			**0.00091**	J		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		0.0074	J		**0.0062**	J	
		VMP-64-5-103020	10/30/2020	**0.04**			<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		**0.0026**	J	
		VMP-64-5-012221	1/22/2021	<0.029	J	U	<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
	10 ft	VMP-64-10-020315	2/3/2015	**0.0091**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-64-10-042815	4/28/2015	**0.037**			<0.0047	U		<0.0098	U		<0.015	U		<0.057	U		<0.0032	U		0.0028	J		**0.0066**	J	
		VMP-64-10-072415	7/24/2015	**0.017**	J		**0.0016**	J		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0082**	J	
		VMP-64-10-102615	10/26/2015	**0.014**	J		<0.0047	U		<0.0099	U		<0.015	U		<0.057	U		<0.0033	U		<0.014	U		**0.0044**	J	
		VMP-64-10-012816	1/28/2016	**0.012**	J		<0.0042	U		<0.0088	U		<0.014	U		<0.051	U		<0.0029	U		<0.012	U		**0.0026**	J	
		VMP-64-10-042616	4/26/2016	**0.0058**	J		**0.0017**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-64-10-072216	7/22/2016	**0.024**	J		<0.0034	U		<0.0072	U		<0.011	U		<0.042	U		<0.0024	U		0.006	J		**0.0042**	J	
		VMP-64-10-102416	10/24/2016	**0.0077**	J		**0.00059**	J		<0.0079	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-10-012517	1/25/2017	**0.012**	J		**0.00088**	J		<0.0087	U		<0.013	U		<0.05	U		<0.0029	U		0.0064	J		<0.015	U	
		VMP-64-10-042717	4/27/2017	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-64-10-072517	7/25/2017	**0.011**	J		<0.004	U		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-10-110317	11/3/2017	**0.019**	J		<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		0.0057	J		**0.0045**	J	
		VMP-64-10-012218	1/22/2018	<0.028	J	U	<0.0038	J	U	<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-10-041218	4/12/2018	**0.0063**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.047	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-64-10-072318	7/23/2018	**0.029**			<0.0036	U		<0.0075	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		**0.0031**	J	
		VMP-64-10-102518	10/25/2018	**0.052**			<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-10-012119	1/21/2019	**0.0046**	J		**0.002**	J		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U	UJ	<0.014	U	
		VMP-64-10-042619	4/26/2019	**0.018**	J		<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-10-072519	7/25/2019	**0.014**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U	UJ	<0.0027	U		<0.012	U		<0.015	U	
		VMP-64-10-102319	10/23/2019	**0.023**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0046**	J	
		VMP-64-10-012820	1/28/2020	**0.0082**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-64-10-042420	4/24/2020	**0.0093**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	
		VMP-64-10-072420	7/24/2020	**0.019**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-10-103020	10/30/2020	<0.03	J	U	<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		0.0024	J		<0.015	U	
		VMP-64-10-012221	1/22/2021	**0.0087**	J		<0.0036	U		<0.0076	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.013	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
			Remediation Objective	330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-64-5-042815	4/28/2015	<0.017	J	U	<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-64-5-072415	7/24/2015	<0.018	J	U	<0.0088	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0073	U	
		VMP-64-5-102615	10/26/2015	**0.019**			<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-64-5-012816	1/28/2016	<0.018	J	U	<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		<0.0069	U		<0.029	U		<0.0074	U	
		VMP-64-5-042616	4/26/2016	<0.02	U		<0.01	U		<0.0073	U		<0.014	U		<0.017	U		<0.0078	U		<0.033	U		<0.0082	U	
		VMP-64-5-080216	8/2/2016	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0019**	J		<0.028	U		<0.0071	U	
		VMP-64-5-080216-DUP	8/2/2016	**0.032**			<0.0094	U		<0.0068	U		<0.013	U		<0.016	U		<0.0073	U		<0.031	U		<0.0077	U	
		VMP-64-5-102416	10/24/2016	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		**0.0009**	J		<0.025	U		<0.0062	U	
		VMP-64-5-012517	1/25/2017	<0.015	U		<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0058	U		<0.025	U		<0.0062	U	
		VMP-64-5-042717	4/27/2017	<0.013	U		<0.0066	U		<0.0048	U		<0.0089	U		<0.011	U		<0.0051	U		<0.022	U		<0.0054	U	
		VMP-64-5-072517	7/25/2017	**0.0064**	J		<0.015	U		<0.011	U		<0.02	U		<0.024	U		<0.011	U		<0.048	U		<0.012	U	
		VMP-64-5-110317	11/3/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-64-5-012218	1/22/2018	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-64-5-041218	4/12/2018	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-64-5-072318	7/23/2018	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-64-5-102518	10/25/2018	<0.014	U		<0.0073	U		<0.0053	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-64-5-012119	1/21/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-64-5-042619	4/26/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		**0.0022**	J		<0.006	U	
		VMP-64-5-072519	7/25/2019	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		<0.0057	U		<0.024	U		<0.0061	ND,UJ	UJ
		VMP-64-5-072519-DUP	7/25/2019	**0.0023**	J		<0.0077	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0064	ND,UJ	UJ
		VMP-64-5-102319	10/23/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-64-5-012820	1/28/2020	<0.017	U		<0.0086	U		<0.0063	U		<0.012	U		<0.014	U		**0.0012**	J		<0.028	U		<0.007	U	
		VMP-64-5-042420	4/24/2020	<0.016	U		<0.008	U		<0.0059	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0066	U	
		VMP-64-5-072420	7/24/2020	**0.0019**	J		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0018**	J		<0.025	U		<0.0063	U	
		VMP-64-5-103020	10/30/2020	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-64-5-012221	1/22/2021	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
	10 ft	VMP-64-10-020315	2/3/2015	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		<0.007	U		<0.03	U		<0.0075	U	
		VMP-64-10-042815	4/28/2015	<0.018	J	U	<0.0092	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-64-10-072415	7/24/2015	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0065	U	
		VMP-64-10-102615	10/26/2015	**0.0094**	J		<0.0093	U		<0.0068	U		<0.013	U		<0.016	U		<0.0072	U		<0.03	U		<0.0077	U	
		VMP-64-10-012816	1/28/2016	<0.016	J	U	<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0064	U		<0.027	U		<0.0068	U	
		VMP-64-10-042616	4/26/2016	**0.0007**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-64-10-072216	7/22/2016	**0.0045**	J		<0.0068	U		<0.005	U		<0.0092	U		<0.011	U		**0.0027**	J		<0.022	U		<0.0056	U	
		VMP-64-10-102416	10/24/2016	<0.015	U		<0.0074	U		<0.0054	U		<0.01	U		<0.012	U		**0.00096**	J		<0.024	U		<0.0061	U	
		VMP-64-10-012517	1/25/2017	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		<0.0063	U		<0.027	U		<0.0067	U	
		VMP-64-10-042717	4/27/2017	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.006	U	
		VMP-64-10-072517	7/25/2017	<0.016	J	U	<0.008	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-64-10-110317	11/3/2017	**0.0014**	J		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-64-10-012218	1/22/2018	<0.015	U	UJ	<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-64-10-041218	4/12/2018	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		<0.006	U		<0.025	U		<0.0063	U	
		VMP-64-10-072318	7/23/2018	<0.014	J	U	<0.0071	U		<0.0052	U		<0.0096	U		<0.012	U		<0.0055	U		<0.023	U		<0.0058	U	
		VMP-64-10-102518	10/25/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		**0.00097**	J		**0.0043**	J		<0.0062	U	
		VMP-64-10-012119	1/21/2019	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	
		VMP-64-10-042619	4/26/2019	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-64-10-072519	7/25/2019	<0.015	U		<0.0078	U		<0.0057	U		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	ND,UJ	UJ
		VMP-64-10-102319	10/23/2019	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		<0.0062	U		<0.026	U		<0.0065	U	
		VMP-64-10-012820	1/28/2020	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-64-10-042420	4/24/2020	<0.014	U		<0.0072	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-64-10-072420	7/24/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		**0.00098**	J		<0.026	U		<0.0064	U	
		VMP-64-10-103020	10/30/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0011**	J		<0.026	U		<0.0065	U	
		VMP-64-10-012221	1/22/2021	<0.014	U		<0.0071	U		<0.0052	U		<0.0097	U		<0.012	U		<0.0055	U		<0.023	U		<0.0059	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
			Remediation Objective	**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0032**	J		<0.0052	U		<0.0052	U	
		VMP-64-5-042815	4/28/2015	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0026**	J		<0.0054	U		<0.0054	U	
		VMP-64-5-072415	7/24/2015	<0.0048	U		<0.011	U		<0.0084	U		<0.0084	U		<0.0084	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-64-5-102615	10/26/2015	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	J	U	**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-64-5-012816	1/28/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0028**	J		<0.0057	U		<0.0057	U	
		VMP-64-5-042616	4/26/2016	<0.0055	U		<0.012	U		<0.0096	U		<0.0096	U		<0.0096	U		**0.0022**	J		<0.0064	U		<0.0064	U	
		VMP-64-5-080216	8/2/2016	**0.067**		J	<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0028**	J		<0.0055	U		<0.0055	U	
		VMP-64-5-080216-DUP	8/2/2016	**0.022**		J	<0.011	U		<0.009	U		<0.009	U		<0.009	U		**0.0031**	J		<0.006	U		<0.006	U	
		VMP-64-5-102416	10/24/2016	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0049	U		<0.0049	U	
		VMP-64-5-012517	1/25/2017	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-64-5-042717	4/27/2017	<0.0036	U		<0.008	U		<0.0063	U		<0.0063	U		<0.0063	U		**0.0026**	J		<0.0042	U		<0.0042	U	
		VMP-64-5-072517	7/25/2017	<0.008	U		<0.018	U		<0.014	U		<0.014	U		<0.014	U		**0.0021**	J		<0.0094	U		<0.0094	U	
		VMP-64-5-110317	11/3/2017	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0027**	J		<0.0046	U		<0.0046	U	
		VMP-64-5-012218	1/22/2018	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0023**	J		<0.0046	U		<0.0046	U	
		VMP-64-5-041218	4/12/2018	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0027**	J		<0.005	U		<0.005	U	
		VMP-64-5-072318	7/23/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0027**	J		<0.0049	U		<0.0049	U	
		VMP-64-5-102518	10/25/2018	<0.004	U		<0.0089	U		<0.007	U		<0.007	U		<0.007	U		**0.0037**	J		<0.0047	U		<0.0047	U	
		VMP-64-5-012119	1/21/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0021**	J		<0.0046	U		<0.0046	U	
		VMP-64-5-042619	4/26/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.002**	J		<0.0047	U		<0.0047	U	
		VMP-64-5-072519	7/25/2019	<0.004	U		<0.009	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.002**	J		<0.0048	U		<0.0048	U	
		VMP-64-5-072519-DUP	7/25/2019	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0018**	J		<0.005	U		<0.005	U	
		VMP-64-5-102319	10/23/2019	<0.0042	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0026**	J		<0.005	U		<0.005	U	
		VMP-64-5-012820	1/28/2020	<0.0047	U		<0.01	U		<0.0082	U		<0.0082	U		<0.0082	U		**0.0022**	J		<0.0055	U		<0.0055	U	
		VMP-64-5-042420	4/24/2020	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0022**	J		<0.0052	U		<0.0052	U	
		VMP-64-5-072420	7/24/2020	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0029**	J		<0.0049	U		<0.0049	U	
		VMP-64-5-103020	10/30/2020	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0026**	J		<0.0047	U		<0.0047	U	
		VMP-64-5-012221	1/22/2021	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0023**	J		<0.005	U		<0.005	U	
	10 ft	VMP-64-10-020315	2/3/2015	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0029**	J		<0.0058	U		<0.0058	U	
		VMP-64-10-042815	4/28/2015	<0.005	U		<0.011	U		<0.0088	U		<0.0088	U		<0.0088	U		**0.0024**	J		<0.006	U		<0.0059	U	
		VMP-64-10-072415	7/24/2015	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0023**	J		<0.005	U		<0.005	U	
		VMP-64-10-102615	10/26/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0056**	J		<0.006	U		<0.006	U	
		VMP-64-10-012816	1/28/2016	<0.0045	U		<0.01	U		<0.0079	U		<0.0079	U		<0.0079	U		**0.0025**	J		<0.0053	U		<0.0053	U	
		VMP-64-10-042616	4/26/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0025**	J		<0.0054	U		<0.0054	U	
		VMP-64-10-072216	7/22/2016	<0.0037	U		<0.0083	U		<0.0065	U		<0.0065	U		<0.0065	U		**0.0029**	J		<0.0044	U		<0.0044	U	
		VMP-64-10-102416	10/24/2016	<0.0041	U		<0.0091	U		<0.0071	U		<0.0071	U		<0.0071	U		**0.0026**	J		<0.0048	U		<0.0048	U	
		VMP-64-10-012517	1/25/2017	**0.0052**			<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0022**	J		<0.0053	U		<0.0053	U	
		VMP-64-10-042717	4/27/2017	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0024**	J		<0.0046	U		<0.0046	U	
		VMP-64-10-072517	7/25/2017	<0.0044	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0025**	J		<0.0051	U		<0.0051	U	
		VMP-64-10-110317	11/3/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0022**	J		<0.0043	U		<0.0043	U	
		VMP-64-10-012218	1/22/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0022**	J		<0.0048	U		<0.0048	U	
		VMP-64-10-041218	4/12/2018	<0.0042	U		<0.0094	U		<0.0073	U		<0.0073	U		<0.0073	U		**0.0023**	J		<0.0049	U		<0.0049	U	
		VMP-64-10-072318	7/23/2018	<0.0039	U		<0.0086	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0022**	J		<0.0046	U		<0.0046	U	
		VMP-64-10-102518	10/25/2018	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0024**	J		<0.0048	U		<0.0048	U	
		VMP-64-10-012119	1/21/2019	**0.0007**	J		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0025**	J		<0.0048	U		<0.0048	U	
		VMP-64-10-042619	4/26/2019	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-64-10-072519	7/25/2019	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0022**	J		<0.005	U		<0.005	U	
		VMP-64-10-102319	10/23/2019	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-64-10-012820	1/28/2020	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0023**	J		<0.0054	U		<0.0054	U	
		VMP-64-10-042420	4/24/2020	<0.0039	U		<0.0088	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.0025**	J		<0.0046	U		<0.0046	U	
		VMP-64-10-072420	7/24/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0028**	J		<0.005	U		<0.005	U	
		VMP-64-10-103020	10/30/2020	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0035**	J		<0.0051	U		<0.0051	U	
		VMP-64-10-012221	1/22/2021	<0.0039	U		<0.0087	U		<0.0068	U		<0.0068	U		<0.0068	U		**0.002**	J		<0.0046	U		<0.0046	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
			Remediation Objective	110									110			0.4			0.5			0.5			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-64-5-042815	4/28/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-64-5-072415	7/24/2015	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-64-5-102615	10/26/2015	<0.0047	U		<0.0047	U		<0.0047	U		**0.0031**	J		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-5-012816	1/28/2016	<0.0056	U		<0.0056	U		<0.0056	U		<0.049	U		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-64-5-042616	4/26/2016	<0.0063	U		<0.0063	U		<0.0063	U		<0.055	U		<0.0074	U		<0.0072	U		<0.0072	U		<0.023	U	
		VMP-64-5-080216	8/2/2016	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-64-5-080216-DUP	8/2/2016	<0.0059	U		<0.0059	U		<0.0059	U		<0.052	U		<0.0069	U		<0.0068	U		<0.0068	U		<0.021	U	
		VMP-64-5-102416	10/24/2016	<0.0048	U		<0.0048	U		<0.0048	U		**0.0066**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-64-5-012517	1/25/2017	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-5-042717	4/27/2017	<0.0041	U		<0.0041	U		<0.0041	U		<0.036	U		<0.0048	U		<0.0047	U		<0.0047	U		<0.015	U	
		VMP-64-5-072517	7/25/2017	<0.0092	U		<0.0092	U		<0.0092	U		<0.081	U		<0.011	U		<0.01	U		<0.01	U		<0.034	U	
		VMP-64-5-110317	11/3/2017	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-5-012218	1/22/2018	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-5-041218	4/12/2018	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-5-072318	7/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0052**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-64-5-102518	10/25/2018	<0.0046	U		<0.0046	U		<0.0046	U		**0.005**	J		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-64-5-012119	1/21/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-5-042619	4/26/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-64-5-072519	7/25/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.041	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-64-5-072519-DUP	7/25/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-5-102319	10/23/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-5-012820	1/28/2020	<0.0054	U		<0.0054	U		<0.0054	U		<0.047	U		<0.0063	U		<0.0062	U		<0.0062	U		<0.02	U	
		VMP-64-5-042420	4/24/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		**0.001**	J	
		VMP-64-5-072420	7/24/2020	<0.0048	U		<0.0048	U		<0.0048	U		**0.0024**	J		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-64-5-103020	10/30/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-64-5-012221	1/22/2021	<0.0049	U		<0.0049	U		<0.0049	U		**0.0066**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	ND,UJ	UJ
	10 ft	VMP-64-10-020315	2/3/2015	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-64-10-042815	4/28/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-64-10-072415	7/24/2015	<0.005	U		<0.005	U		<0.005	U		<0.043	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-64-10-102615	10/26/2015	<0.0059	U		<0.0059	U		<0.0059	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-64-10-012816	1/28/2016	<0.0052	U		<0.0052	U		<0.0052	U		<0.046	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-64-10-042616	4/26/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-64-10-072216	7/22/2016	<0.0043	U		<0.0043	U		<0.0043	U		**0.018**	J		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-64-10-102416	10/24/2016	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0054	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-10-012517	1/25/2017	<0.0052	U		<0.0052	U		<0.0052	U		**0.0025**	J		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-64-10-042717	4/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-10-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-64-10-110317	11/3/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-64-10-012218	1/22/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U	UJ	<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-10-041218	4/12/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0056	U		<0.0055	U		<0.0055	U		<0.018	U	
		VMP-64-10-072318	7/23/2018	<0.0045	U		0.012			<0.0045	U		**0.0063**	J		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-64-10-102518	10/25/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-10-012119	1/21/2019	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-10-042619	4/26/2019	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-64-10-072519	7/25/2019	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-10-102319	10/23/2019	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-64-10-012820	1/28/2020	<0.0053	U		<0.0053	U		<0.0053	U		**0.0012**	J		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-64-10-042420	4/24/2020	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-10-072420	7/24/2020	<0.0049	U		<0.0049	U		<0.0049	U		**0.0018**	J		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-10-103020	10/30/2020	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-64-10-012221	1/22/2021	<0.0045	U		<0.0045	U		<0.0045	U		<0.039	U		<0.0052	U		<0.0052	U		<0.0052	U		<0.016	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
			Remediation Objective				**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	0.01			<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-64-5-042815	4/28/2015	0.0075	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		**0.0014**	J	
		VMP-64-5-072415	7/24/2015	<0.012		U	<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		**0.0014**	J		<0.06	U		**0.0027**	J	
		VMP-64-5-102615	10/26/2015	0.0052	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		**0.0014**	J	
		VMP-64-5-012816	1/28/2016	<0.011	U		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		<0.0058	U		<0.06	U		<0.005	U	
		VMP-64-5-042616	4/26/2016	<0.012	U		<0.0069	U		<0.0078	U		<0.012	U		<0.011	U		<0.0065	U		<0.068	U		<0.0056	U	
		VMP-64-5-080216	8/2/2016	0.0054	J		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-64-5-080216-DUP	8/2/2016	0.0093	J		<0.0065	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.064	U		<0.0052	U	
		VMP-64-5-102416	10/24/2016	<0.0091	J	U	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-64-5-012517	1/25/2017	0.0084	J		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-64-5-042717	4/27/2017	0.0094			<0.0045	U		<0.0051	U		<0.008	U		<0.0073	U		<0.0043	U		<0.044	U		<0.0037	U	
		VMP-64-5-072517	7/25/2017	<0.018	U		<0.01	U		<0.011	U		<0.018	U		<0.016	U		<0.0095	U		<0.099	U		<0.0082	U	
		VMP-64-5-110317	11/3/2017	0.0068	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-64-5-012218	1/22/2018	0.027			<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-64-5-041218	4/12/2018	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-5-072318	7/23/2018	0.0066	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-64-5-102518	10/25/2018	<0.0087	U		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.049	U		<0.0041	U	
		VMP-64-5-012119	1/21/2019	0.0032	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-64-5-042619	4/26/2019	0.012			<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-64-5-072519	7/25/2019	0.0049	J		<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-64-5-072519-DUP	7/25/2019	<0.0093	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-64-5-102319	10/23/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0086	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-5-012820	1/28/2020	<0.01	U		<0.0059	U		<0.0067	U		<0.01	U		<0.0095	U		<0.0056	U		<0.058	U		<0.0048	U	
		VMP-64-5-042420	4/24/2020	0.0045	J		<0.0055	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-64-5-072420	7/24/2020	0.013			<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		**0.0013**	J	
		VMP-64-5-103020	10/30/2020	0.008	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-64-5-012221	1/22/2021	0.0054	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
	10 ft	VMP-64-10-020315	2/3/2015	<0.011	U		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-64-10-042815	4/28/2015	0.0072	J		<0.0064	U		<0.0072	U		<0.011	U		<0.01	U		<0.006	U		<0.063	U		**0.0016**	J	
		VMP-64-10-072415	7/24/2015	<0.0094	J	U	<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-10-102615	10/26/2015	0.0072	J		<0.0064	U		<0.0073	U		<0.011	U		<0.01	U		<0.0061	U		<0.063	U		**0.0017**	J	
		VMP-64-10-012816	1/28/2016	0.0062	J		<0.0057	U		<0.0064	U		<0.01	U		<0.0092	U		<0.0054	U		<0.056	U		<0.0046	U	
		VMP-64-10-042616	4/26/2016	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.00087**	J		<0.057	U		**0.0013**	J	
		VMP-64-10-072216	7/22/2016	0.0055	J		<0.0047	U		<0.0053	U		<0.0083	U		<0.0076	U		**0.006**			<0.046	U		**0.0026**	J	
		VMP-64-10-102416	10/24/2016	<0.0089	J	U	<0.0051	U		<0.0058	U		<0.009	U		<0.0082	U		<0.0048	U		<0.05	U		<0.0042	U	
		VMP-64-10-012517	1/25/2017	0.01			<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-64-10-042717	4/27/2017	0.0062	J		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-64-10-072517	7/25/2017	0.012			<0.0055	U		<0.0062	U		<0.0097	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-64-10-110317	11/3/2017	0.11			<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-64-10-012218	1/22/2018	0.01	J0	J	<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-64-10-041218	4/12/2018	<0.0092	U		<0.0053	U		<0.006	U		<0.0094	U		<0.0085	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-64-10-072318	7/23/2018	0.01			<0.0049	U		<0.0055	U		<0.0086	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	
		VMP-64-10-102518	10/25/2018	<0.009	U		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-64-10-012119	1/21/2019	0.0017	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		**0.0017**	J		<0.051	U		**0.0022**	J	
		VMP-64-10-042619	4/26/2019	0.0075	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-64-10-072519	7/25/2019	<0.0093	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-10-102319	10/23/2019	0.0089	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-64-10-012820	1/28/2020	<0.01	U		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		<0.0055	U		<0.057	U		<0.0047	U	
		VMP-64-10-042420	4/24/2020	<0.0086	U		<0.0049	U		<0.0056	U		<0.0087	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-64-10-072420	7/24/2020	<0.0094	U		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-10-103020	10/30/2020	<0.0095	U		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-64-10-012221	1/22/2021	0.01	J		<0.0049	U		<0.0056	U		<0.0087	U		<0.0079	U		<0.0046	U		<0.048	U		<0.004	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.0046	U					**0.032**			<0.0063	U	
		VMP-64-5-042815	4/28/2015	<0.022	U		<0.016	U		<0.0066	U		<0.0055	J	U	<0.0048	U					**0.0026**	J		<0.0066	U	
		VMP-64-5-072415	7/24/2015	<0.023	U		0.008	J		<0.0069	U		<0.0058	U		<0.0051	U					**0.011**	J		<0.0069	U	
		VMP-64-5-102615	10/26/2015	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.0043	U					**0.0039**	J		<0.0058	U	
		VMP-64-5-012816	1/28/2016	<0.023	U		<0.017	U		<0.007	U		<0.0058	U		<0.0051	U					<0.014	J	U	<0.007	U	
		VMP-64-5-042616	4/26/2016	<0.026	U		<0.019	U		<0.0078	U		<0.0065	U		<0.0058	U					**0.0032**	J		<0.0078	U	
		VMP-64-5-080216	8/2/2016	<0.022	U		0.13		J	<0.0067	U		<0.0056	U		**0.012**	J					**0.082**		J	**0.0014**	J	
		VMP-64-5-080216-DUP	8/2/2016	<0.024	U		0.037		J	<0.0073	U		<0.0061	U		**0.0091**	J					**0.018**		J	**0.0012**	J	
		VMP-64-5-102416	10/24/2016	<0.02	U		0.0028	J		<0.0059	U		<0.0049	U		<0.017	U		<0.013	U		**0.024**			<0.0059	U	
		VMP-64-5-012517	1/25/2017	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0081**	J		<0.0059	U	
		VMP-64-5-042717	4/27/2017	<0.017	U		<0.012	U		<0.0051	U		<0.0043	U		<0.015	U					**0.0017**	J		<0.0051	U	
		VMP-64-5-072517	7/25/2017	<0.038	U		<0.027	U		<0.011	U		**0.002**	J		<0.034	U					<0.023	U		<0.011	U	
		VMP-64-5-110317	11/3/2017	<0.019	U		0.0055	J		<0.0056	U		<0.0047	U		<0.016	U					<0.011	U		<0.0056	U	
		VMP-64-5-012218	1/22/2018	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.067**			<0.0056	U	
		VMP-64-5-041218	4/12/2018	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-64-5-072318	7/23/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-64-5-102518	10/25/2018	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					<0.011	U		<0.0057	U	
		VMP-64-5-012119	1/21/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0092**	J		<0.0056	U	
		VMP-64-5-042619	4/26/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.024**			<0.0057	U	
		VMP-64-5-072519	7/25/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-64-5-072519-DUP	7/25/2019	<0.02	U		0.0034	J		<0.006	U		<0.005	U		<0.018	U					**0.0029**	J		<0.006	U	
		VMP-64-5-102319	10/23/2019	<0.02	U		<0.014	U		<0.0061	U		<0.005	U		<0.018	U					**0.0023**	J		<0.0061	U	
		VMP-64-5-012820	1/28/2020	<0.022	U		<0.016	U		**0.0018**	J		<0.0056	U		<0.02	U					**0.0044**	J		<0.0067	U	
		VMP-64-5-042420	4/24/2020	<0.021	U		<0.015	U		<0.0063	U		<0.0052	U		<0.018	U					**0.0042**	J		**0.00049**	J	
		VMP-64-5-072420	7/24/2020	<0.02	U		0.0068	J		<0.006	U		<0.005	U		<0.018	U					**0.0079**	J		<0.006	U	
		VMP-64-5-103020	10/30/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.02**			<0.0057	U	
		VMP-64-5-012221	1/22/2021	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0054**	J		<0.0061	U	
	10 ft	VMP-64-10-020315	2/3/2015	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.0052	U					<0.014	U		<0.0071	U	
		VMP-64-10-042815	4/28/2015	**0.0018**	J		0.0096	J		<0.0072	U		<0.006	J	U	<0.0053	U					**0.0031**	J		<0.0072	U	
		VMP-64-10-072415	7/24/2015	**0.0024**	J		<0.015	U		<0.0061	J	U	<0.0051	U		<0.0045	U					**0.0061**	J		<0.0061	U	
		VMP-64-10-102615	10/26/2015	**0.0015**	J		<0.017	U		<0.0073	U		<0.0061	U		<0.0053	U					<0.014	U		<0.0073	U	
		VMP-64-10-012816	1/28/2016	<0.021	U		0.0019	J		<0.0064	U		<0.0054	U		<0.0047	U					<0.013	J	U	<0.0064	U	
		VMP-64-10-042616	4/26/2016	<0.022	U		0.0016	J		<0.0066	U		<0.0055	U		<0.0048	U					**0.0052**	J		<0.0066	U	
		VMP-64-10-072216	7/22/2016	<0.018	U		0.01	J		<0.0053	U		<0.0044	U		<0.016	U					**0.039**			<0.0053	U	
		VMP-64-10-102416	10/24/2016	<0.019	U		<0.014	U		<0.0058	U		<0.0048	U		<0.017	U		<0.012	U		**0.012**			<0.0058	U	
		VMP-64-10-012517	1/25/2017	<0.021	U		0.005	J		<0.0064	U		<0.0053	U		<0.019	U					**0.0091**	J		<0.0064	U	
		VMP-64-10-042717	4/27/2017	<0.019	U		0.014			<0.0056	U		<0.0047	U		<0.016	U					**0.0029**	J		<0.0056	U	
		VMP-64-10-072517	7/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.016**			<0.0062	U	
		VMP-64-10-110317	11/3/2017	<0.017	U		0.0019	J		<0.0052	U		<0.0044	U		<0.015	U					**0.085**			<0.0052	U	
		VMP-64-10-012218	1/22/2018	<0.019	U		0.0043	J		<0.0058	U		<0.0049	U		<0.017	U					**0.017**			<0.0058	U	
		VMP-64-10-041218	4/12/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					<0.012	U		<0.006	U	
		VMP-64-10-072318	7/23/2018	<0.018	U		<0.013	U		<0.0055	U		<0.0046	U		<0.016	U					**0.0025**	J		<0.0055	U	
		VMP-64-10-102518	10/25/2018	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-64-10-012119	1/21/2019	<0.019	U		<0.014	U		<0.0058	U		<0.0049	U		<0.017	U					<0.012	U		<0.0058	U	
		VMP-64-10-042619	4/26/2019	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0034**	J		<0.0057	U	
		VMP-64-10-072519	7/25/2019	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					<0.012	U		<0.0061	U	
		VMP-64-10-102319	10/23/2019	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0038**	J		<0.0062	U	
		VMP-64-10-012820	1/28/2020	<0.022	U		<0.016	U		<0.0066	U		<0.0055	U		<0.019	U					<0.013	U		**0.0019**	J	
		VMP-64-10-042420	4/24/2020	<0.019	U		<0.013	U		<0.0056	U		<0.0047	U		<0.016	U					**0.012**			<0.0056	U	
		VMP-64-10-072420	7/24/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0034**	J		<0.0061	U	
		VMP-64-10-103020	10/30/2020	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0057**	J		<0.0062	U	
		VMP-64-10-012221	1/22/2021	<0.018	U		<0.013	U		<0.0056	U		<0.0046	U		<0.016	U					**0.01**	J		<0.0056	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.0055	U		<0.0088	U		<0.0088	U		<0.0038	U		<0.0049	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-64-5-042815	4/28/2015	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		<0.005	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-64-5-072415	7/24/2015	<0.006	U		<0.0096	U		<0.0095	U		**0.0017**	J		<0.0053	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-64-5-102615	10/26/2015	<0.0051	U		<0.0082	U		<0.0081	J	U	<0.0035	U		<0.0045	J	U	<0.035	J	U	<0.0065	U		<0.0065	U	
		VMP-64-5-012816	1/28/2016	<0.006	U		<0.0097	U		<0.0096	U		<0.0042	U		<0.0054	U		<0.042	U		<0.0077	U		<0.0077	U	
		VMP-64-5-042616	4/26/2016	<0.0068	U		<0.011	U		<0.011	U		<0.0047	U		<0.006	U		<0.047	U		<0.0087	U		<0.0087	U	
		VMP-64-5-080216	8/2/2016	<0.0058	U		<0.0094	U		<0.0092	U		<0.004	U		**0.0018**	J		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-64-5-080216-DUP	8/2/2016	<0.0063	U		<0.01	U		<0.01	U		<0.0044	U		**0.0012**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-64-5-102416	10/24/2016	<0.0051	U		<0.0083	U		<0.0082	U		<0.0036	U		**0.00089**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-64-5-012517	1/25/2017	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		**0.00061**	J		<0.036	U		<0.0065	U		<0.0065	U	
		VMP-64-5-042717	4/27/2017	<0.0044	U		<0.0072	U		<0.0071	U		<0.0031	U		<0.0039	U		<0.031	U		<0.0057	U		<0.0057	U	
		VMP-64-5-072517	7/25/2017	<0.0099	U		<0.016	U		<0.016	U		<0.0068	U		<0.0088	U		<0.069	U		<0.013	U		<0.013	U	
		VMP-64-5-110317	11/3/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-64-5-012218	1/22/2018	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0016**	J		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-64-5-041218	4/12/2018	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-64-5-072318	7/23/2018	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-64-5-102518	10/25/2018	<0.0049	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-64-5-012119	1/21/2019	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-64-5-042619	4/26/2019	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-64-5-072519	7/25/2019	<0.005	U		<0.0081	U		**0.0063**	J		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-64-5-072519-DUP	7/25/2019	<0.0052	U		<0.0084	U		<0.0083	U		<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-64-5-102319	10/23/2019	<0.0053	U		<0.0085	U		<0.0084	U		<0.0036	U		**0.001**	J		<0.037	U		<0.0067	U		<0.0067	U	
		VMP-64-5-012820	1/28/2020	<0.0058	U		<0.0093	U		<0.0092	U		<0.004	U		<0.0051	U		<0.04	U		<0.0074	U		<0.0074	U	
		VMP-64-5-042420	4/24/2020	<0.0054	U		<0.0088	U		<0.0086	U		<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-64-5-072420	7/24/2020	<0.0052	U		<0.0084	U		**0.0022**	J		<0.0036	U		**0.0017**	J		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-64-5-103020	10/30/2020	<0.005	U		<0.008	U		<0.0079	U		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-64-5-012221	1/22/2021	<0.0053	U		<0.0085	ND,UJ	UJ	<0.0084	U		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
	10 ft	VMP-64-10-020315	2/3/2015	<0.0062	U		<0.0099	U		<0.0098	U		<0.0043	U		<0.0054	U		<0.043	U		<0.0079	U		<0.0079	U	
		VMP-64-10-042815	4/28/2015	<0.0063	U		<0.01	U		<0.01	U		<0.0043	U		<0.0055	U		<0.044	U		<0.008	U		<0.008	U	
		VMP-64-10-072415	7/24/2015	<0.0053	U		<0.0086	U		<0.0085	U		**0.006**			**0.0012**	J		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-64-10-102615	10/26/2015	<0.0063	U		<0.01	U		<0.01	J	U	<0.0044	U		**0.0018**	J		<0.044	U		<0.0081	U		<0.0081	U	
		VMP-64-10-012816	1/28/2016	<0.0056	U		<0.009	U		<0.0089	U		<0.0039	U		<0.0049	U		<0.039	U		<0.0071	U		<0.0071	U	
		VMP-64-10-042616	4/26/2016	<0.0057	U		<0.0092	U		<0.0091	U		<0.004	U		**0.00048**	J		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-64-10-072216	7/22/2016	<0.0046	U		<0.0074	U		**0.0014**	J		<0.0032	U		**0.0016**	J		<0.032	U		<0.0059	U		<0.0059	U	
		VMP-64-10-102416	10/24/2016	<0.005	U		<0.0081	U		<0.008	U		<0.0035	U		<0.0044	U		<0.035	U		<0.0064	U		<0.0064	U	
		VMP-64-10-012517	1/25/2017	<0.0055	U		<0.0089	U		<0.0088	U		<0.0038	U		**0.0033**	J		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-64-10-042717	4/27/2017	<0.0049	U		<0.0079	U		<0.0078	U		<0.0034	U		**0.0012**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-64-10-072517	7/25/2017	<0.0054	U		<0.0087	U		**0.0013**	J		<0.0037	U		**0.00036**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-64-10-110317	11/3/2017	<0.0045	U		<0.0073	U		<0.0072	U		<0.0031	U		**0.00082**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-64-10-012218	1/22/2018	<0.0051	U		<0.0082	U		**0.0017**	J		<0.0035	U		**0.0021**	J		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-64-10-041218	4/12/2018	<0.0052	U		<0.0084	U		**0.0038**	J		<0.0036	U		<0.0046	U		<0.036	U		<0.0066	U		<0.0066	U	
		VMP-64-10-072318	7/23/2018	<0.0048	U		<0.0077	U		**0.0018**	J		<0.0033	U		**0.00061**	J		<0.033	U		<0.0061	U		<0.0061	U	
		VMP-64-10-102518	10/25/2018	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-64-10-012119	1/21/2019	<0.0051	U		<0.0082	U		<0.0081	U		<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	
		VMP-64-10-042619	4/26/2019	<0.005	U		<0.008	U		**0.0021**	J		<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-64-10-072519	7/25/2019	<0.0053	U		<0.0085	U		**0.0011**	J		<0.0036	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-64-10-102319	10/23/2019	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-64-10-012820	1/28/2020	<0.0057	U		<0.0092	U		**0.013**			<0.004	U		<0.0051	U		<0.04	U		<0.0073	U		<0.0073	U	
		VMP-64-10-042420	4/24/2020	<0.0048	U		<0.0078	U		<0.0077	U		<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-64-10-072420	7/24/2020	<0.0053	U		<0.0085	U		<0.0084	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-64-10-103020	10/30/2020	<0.0054	U		<0.0086	U		<0.0085	U		<0.0037	U		<0.0047	U		<0.037	U		<0.0069	U		<0.0069	U	
		VMP-64-10-012221	1/22/2021	<0.0048	U		<0.0078	ND,UJ	UJ	<0.0077	U		<0.0033	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
			Remediation Objective	**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
VMP-64	5 ft	VMP-64-5-020315	2/3/2015	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-64-5-042815	4/28/2015	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		<0.0062	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-64-5-072415	7/24/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		<0.0066	U		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-64-5-102615	10/26/2015	<0.0064	U		<0.0067	U		<0.0058	J	U	<0.0058	U		0.00087	J		<0.003	U		0.0011	J		<0.0052	U	
		VMP-64-5-012816	1/28/2016	<0.0076	U		<0.008	U		<0.007	U		<0.007	U		0.0011	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-64-5-042616	4/26/2016	<0.0086	U		<0.009	U		<0.0078	U		<0.0078	U		<0.0074	U		<0.0041	U		<0.0069	U		<0.0069	U	
		VMP-64-5-080216	8/2/2016	<0.0073	U		<0.0077	U		**0.0028**	J		<0.0067	U		0.0033	J		<0.0035	U		0.0017	J		<0.0059	U	
		VMP-64-5-080216-DUP	8/2/2016	<0.008	U		0.0015	J		<0.0073	U		<0.0073	U		0.0015	J		<0.0038	U		0.002	J		<0.0065	U	
		VMP-64-5-102416	10/24/2016	<0.0065	U		<0.0068	U		<0.0059	U		<0.0059	U		0.0029	J		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-64-5-012517	1/25/2017	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-64-5-042717	4/27/2017	<0.0056	U		0.0016	J		<0.0051	U		<0.0051	U		<0.0049	U		<0.0027	U		<0.0045	U		<0.0045	U	
		VMP-64-5-072517	7/25/2017	<0.012	U		0.0014	J		<0.011	U		<0.011	U		<0.011	U		<0.0059	U		<0.01	U		<0.01	U	
		VMP-64-5-110317	11/3/2017	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-64-5-012218	1/22/2018	<0.0062	U		0.0013	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-64-5-041218	4/12/2018	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-5-072318	7/23/2018	<0.0066	U		<0.0068	U		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-64-5-102518	10/25/2018	<0.0062	U		0.0022	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-64-5-012119	1/21/2019	<0.0062	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-64-5-042619	4/26/2019	**0.0011**	J		0.0012	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-64-5-072519	7/25/2019	<0.0063	U		0.0011	J		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-64-5-072519-DUP	7/25/2019	<0.0066	U		0.0014	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-64-5-102319	10/23/2019	<0.0066	U		<0.0069	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-5-012820	1/28/2020	<0.0073	U		0.0013	J		<0.0067	U		<0.0067	U		<0.0064	U		<0.0035	U		<0.0059	U		<0.0059	U	
		VMP-64-5-042420	4/24/2020	<0.0068	U		0.0011	J		<0.0063	U		<0.0063	U		0.0012	J		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-64-5-072420	7/24/2020	<0.0066	U		0.0038	J		<0.006	U		**0.00073**	J		<0.0057	U		<0.0031	U		<0.0053	J	U	<0.0053	U	
		VMP-64-5-103020	10/30/2020	<0.0063	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-64-5-012221	1/22/2021	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		0.00086	J		<0.0054	U	
	10 ft	VMP-64-10-020315	2/3/2015	<0.0078	U		<0.0081	U		**0.002**	J		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-64-10-042815	4/28/2015	<0.0079	U		<0.0082	U		<0.0072	U		<0.0072	U		<0.0069	U		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-64-10-072415	7/24/2015	<0.0067	U		<0.007	U		**0.00078**	J		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-10-102615	10/26/2015	<0.008	U		<0.0083	U		<0.0073	U		<0.0073	U		0.00068	J		<0.0038	U		<0.0064	U		<0.0064	U	
		VMP-64-10-012816	1/28/2016	<0.007	U		<0.0074	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0057	U		<0.0057	U	
		VMP-64-10-042616	4/26/2016	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-64-10-072216	7/22/2016	<0.0058	U		0.0017	J		<0.0053	U		<0.0053	U		0.00098	J		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-64-10-102416	10/24/2016	<0.0063	U		<0.0066	U		<0.0058	U		<0.0058	U		<0.0055	U		<0.003	U		<0.0051	U		<0.0051	U	
		VMP-64-10-012517	1/25/2017	<0.007	U		<0.0073	U		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		0.00099	J		<0.0056	U	
		VMP-64-10-042717	4/27/2017	<0.0062	U		0.0015	J		<0.0056	U		<0.0056	U		<0.0054	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-64-10-072517	7/25/2017	<0.0068	U		0.0014	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-64-10-110317	11/3/2017	<0.0057	U		0.0011	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-64-10-012218	1/22/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-64-10-041218	4/12/2018	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-64-10-072318	7/23/2018	<0.006	U		<0.0063	U		<0.0055	U		<0.0055	U		<0.0052	U		<0.0029	U		<0.0049	U		<0.0049	U	
		VMP-64-10-102518	10/25/2018	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-64-10-012119	1/21/2019	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		0.0026	J		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-64-10-042619	4/26/2019	<0.0063	U		0.0013	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-64-10-072519	7/25/2019	<0.0067	U		0.00093	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-10-102319	10/23/2019	<0.0068	U		0.00096	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-64-10-012820	1/28/2020	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		<0.0063	U		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-64-10-042420	4/24/2020	<0.0061	U		0.0011	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-64-10-072420	7/24/2020	<0.0067	U		0.0018	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-10-103020	10/30/2020	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-64-10-012221	1/22/2021	<0.0061	U		<0.0064	U		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.0049	U		<0.0049	U	

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Acetone			Benzene			Bromodichloromethane			Bromoform			Bromomethane			1,3-Butadiene			Butane			2-Butanone		
			Remediation Objective	12000			0.17			0.06			6.9			3.4			0.04						3000		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	**0.019**	J		**0.00082**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.008	J		<0.016	U	
		VMP-64-20-042815	4/28/2015	**0.028**	J		**0.0012**	J		<0.0099	U		<0.015	U		**0.0025**	J		<0.0033	U		<0.014	U		**0.01**	J	
		VMP-64-20-072415	7/24/2015	**0.043**			<0.0044	J	U	<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		**0.011**	J	
		VMP-64-20-102615	10/26/2015	**0.01**	J		<0.0045	U		<0.0094	U		<0.014	U		<0.055	U		<0.0031	U		<0.013	U		<0.017	U	
		VMP-64-20-012816	1/28/2016	**0.016**	J		<0.0043	U		<0.009	U		<0.014	U		<0.052	U		<0.003	U		0.0056	J		**0.0046**	J	
		VMP-64-20-042616	4/26/2016	**0.0047**	J		**0.0028**	J		<0.0092	U		<0.014	U		<0.054	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-64-20-042616-DUP	4/26/2016	**0.011**	J		**0.0026**	J		<0.009	U		<0.014	U		<0.052	U		<0.003	U		<0.013	U		<0.016	U	
		VMP-64-20-072216	7/22/2016	**0.014**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-20-072216-DUP	7/22/2016	**0.032**	J		<0.0045	U		<0.0095	U		<0.015	U		<0.055	U		<0.0031	U		<0.014	U		**0.0054**	J	
		VMP-64-20-102416	10/24/2016	**0.016**	J		**0.00083**	J		<0.0077	U		<0.012	U		<0.045	U		<0.0025	U		<0.011	U		**0.009**	J	
		VMP-64-20-102416-Dup	10/24/2016	**0.0062**	J		**0.00082**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-20-012517	1/25/2017	**0.02**	J		**0.00067**	J		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		**0.0038**	J	
		VMP-64-20-012517-Dup	1/25/2017	**0.068**			**0.00067**	J		<0.0085	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.0049**	J	
		VMP-64-20-042717	4/27/2017	<0.028	J	U	<0.0037	U		<0.0078	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-20-072517	7/25/2017	**0.012**	J		<0.004	U		<0.0084	U		<0.013	U		<0.049	U		<0.0028	U		<0.012	U		**0.004**	J	
		VMP-64-20-110317	11/3/2017	**0.011**	J		<0.0034	J	U	<0.0071	U		<0.011	U		<0.041	U		<0.0024	U		<0.01	U		<0.012	U	
		VMP-64-20-012218	1/22/2018	<0.029	U		<0.0038	J	U	<0.0081	U		<0.012	U		<0.047	U		<0.0027	U		<0.011	U		<0.014	U	
		VMP-64-20-041218	4/12/2018	**0.0075**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-20-072318	7/23/2018	**0.043**			<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-64-20-102518	10/25/2018	**0.012**	J		<0.0035	U		**0.002**	J		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-64-20-102518-DUP	10/25/2018	**0.01**	J		<0.0035	U		**0.0024**	J		<0.011	U		<0.042	U		<0.0024	U		<0.01	U		<0.013	U	
		VMP-64-20-012119	1/21/2019	**0.014**	J		**0.00098**	J		**0.00081**	J		<0.012	U		<0.043	U		<0.0025	U		<0.011	U	UJ	**0.0023**	J	
		VMP-64-20-042619	4/26/2019	**0.035**			<0.0036	U		<0.0077	U		<0.012	U		<0.044	U		<0.0025	U		<0.011	U		<0.014	U	
		VMP-64-20-072519	7/25/2019	**0.026**	J		<0.0042	U		<0.0087	U		<0.013	U		<0.05	U	UJ	<0.0029	U		<0.012	U		<0.015	U	
		VMP-64-20-102319	10/23/2019	**0.0075**	J		<0.0041	U		<0.0086	U		<0.013	U		<0.05	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-20-012820	1/28/2020	**0.0081**	J		<0.0046	U		<0.0097	U		<0.015	U		<0.056	U		<0.0032	U		<0.014	U		<0.017	U	
		VMP-64-20-042420	4/24/2020	**0.016**	J		<0.004	U		<0.0084	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		**0.0015**	J	
		VMP-64-20-042420-DUP	4/24/2020	**0.014**	J		<0.0039	U		<0.0082	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.014	U	
		VMP-64-20-072420	7/24/2020	**0.0097**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0027	U		<0.012	U		<0.015	U	
		VMP-64-20-072420-DUP	7/24/2020	**0.012**	J		<0.004	U		<0.0083	U		<0.013	U		<0.048	U		<0.0028	U		<0.012	U		<0.015	U	
		VMP-64-20-103020	10/30/2020	<0.027	J	U	<0.0037	U		<0.0077	U		<0.012	U		<0.045	U		<0.0026	U		<0.011	U		<0.014	U	
		VMP-64-20-012221	1/22/2021	**0.022**	J		<0.0038	U		<0.008	U		<0.012	U		<0.046	U		<0.0026	U		<0.011	U		<0.014	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Carbon disulfide			Carbon tetrachloride			Chlorobenzene			Chlorodibromomethane			Chloroethane			Chloroform			Chloromethane			alpha-Chlorotoluene		
		Remediation Objective		330			0.2			33						4700			0.05			36			0.04		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	<0.017	U		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-64-20-042815	4/28/2015	<0.018	J	U	<0.0093	U		<0.0068	U		<0.012	U		<0.016	U		<0.0072	U		<0.03	U		<0.0076	U	
		VMP-64-20-072415	7/24/2015	<0.017	J	U	<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	J	U	<0.028	U		<0.0071	U	
		VMP-64-20-102615	10/26/2015	**0.003**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0019**	J		<0.029	U		<0.0073	U	
		VMP-64-20-012816	1/28/2016	**0.0027**	J		<0.0084	U		<0.0062	U		<0.011	U		<0.014	U		<0.0065	U		<0.028	U		<0.0069	U	
		VMP-64-20-042616	4/26/2016	**0.00084**	J		<0.0087	U		<0.0064	U		<0.012	U		<0.014	U		<0.0067	U		<0.028	U		<0.0071	U	
		VMP-64-20-042616-DUP	4/26/2016	**0.0011**	J		<0.0085	U		<0.0062	U		<0.011	U		<0.014	U		<0.0066	U		<0.028	U		<0.007	U	
		VMP-64-20-072216	7/22/2016	**0.0039**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0036**	J		<0.027	U		<0.0067	U	
		VMP-64-20-072216-DUP	7/22/2016	**0.0036**	J		<0.0089	U		<0.0065	U		<0.012	U		<0.015	U		**0.0022**	J		<0.029	U		<0.0074	U	
		VMP-64-20-102416	10/24/2016	**0.0017**	J		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		**0.001**	J		<0.024	U		<0.006	U	
		VMP-64-20-102416-Dup	10/24/2016	**0.002**	J		<0.008	U		<0.0059	U		<0.011	U		<0.014	U		**0.0012**	J		<0.026	U		<0.0066	U	
		VMP-64-20-012517	1/25/2017	**0.0017**	J		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		<0.0063	U		<0.026	U		<0.0066	U	
		VMP-64-20-012517-Dup	1/25/2017	<0.016	U		<0.008	U		<0.0058	U		<0.011	U		<0.013	U		**0.00099**	J		<0.026	U		<0.0066	U	
		VMP-64-20-042717	4/27/2017	<0.014	U		<0.0073	U		<0.0054	U		<0.0099	U		<0.012	U		<0.0057	U		<0.024	U		<0.006	U	
		VMP-64-20-072517	7/25/2017	<0.016	J	U	<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.0018**	J		<0.026	U		<0.0065	U	
		VMP-64-20-110317	11/3/2017	<0.013	U		<0.0067	U		<0.0049	U		<0.0091	U		<0.011	U		<0.0052	U		<0.022	U		<0.0055	U	
		VMP-64-20-012218	1/22/2018	<0.015	U	UJ	<0.0076	U		<0.0055	U		<0.01	U		<0.013	U		<0.0059	U		<0.025	U		<0.0062	U	
		VMP-64-20-041218	4/12/2018	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.013	U		**0.0036**	J		<0.025	U		<0.0062	U	
		VMP-64-20-072318	7/23/2018	<0.015	J	U	<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.0095**			<0.025	U		<0.0063	U	
		VMP-64-20-102518	10/25/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		**0.0072**			<0.022	U		<0.0056	U	
		VMP-64-20-102518-DUP	10/25/2018	<0.014	U		<0.0068	U		<0.005	U		<0.0093	U		<0.012	U		**0.0071**			<0.022	U		<0.0056	U	
		VMP-64-20-012119	1/21/2019	<0.014	U		<0.007	U		<0.0052	U		<0.0095	U		<0.012	U		**0.0019**	J		<0.023	U		<0.0058	U	
		VMP-64-20-042619	4/26/2019	<0.014	U		<0.0072	U		<0.0053	U		<0.0098	U		<0.012	U		<0.0056	U		<0.024	U		<0.0059	U	
		VMP-64-20-072519	7/25/2019	<0.016	U		<0.0082	U		<0.006	U		<0.011	U		<0.014	U		**0.0016**	J		<0.027	U		<0.0067	ND,UJ	UJ
		VMP-64-20-102319	10/23/2019	<0.016	U		<0.0081	U		<0.0059	U		<0.011	U		<0.014	U		**0.0013**	J		<0.027	U		<0.0067	U	
		VMP-64-20-012820	1/28/2020	<0.018	U		<0.0091	U		<0.0066	U		<0.012	U		<0.015	U		**0.0011**	J		<0.03	U		<0.0075	U	
		VMP-64-20-042420	4/24/2020	<0.016	U		<0.0079	U		<0.0058	U		<0.011	U		<0.013	U		**0.00064**	J		<0.026	U		<0.0065	U	
		VMP-64-20-042420-DUP	4/24/2020	<0.015	U		<0.0077	U		<0.0056	U		<0.01	U		<0.013	U		**0.00066**	J		<0.025	U		<0.0063	U	
		VMP-64-20-072420	7/24/2020	<0.015	U		<0.0078	U		**0.0022**	J		<0.01	U		<0.013	U		<0.006	U		<0.026	U		<0.0064	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.016	U		<0.0078	U		<0.0057	U		<0.011	U		<0.013	U		<0.0061	U		<0.026	U		<0.0064	U	
		VMP-64-20-103020	10/30/2020	<0.014	U		<0.0073	U		<0.0053	U		<0.0098	U		<0.012	U		**0.00092**	J		<0.024	U		<0.006	U	
		VMP-64-20-012221	1/22/2021	<0.015	U		<0.0075	U		<0.0055	U		<0.01	U		<0.012	U		<0.0058	U		<0.024	U		<0.0062	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Cyclohexane			1,2-Dibromoethane			1,2-Dichlorobenzene			1,3-Dichlorobenzene			1,4-Dichlorobenzene			Dichlorodifluoromethane			1,1-Dichloroethane			1,2-Dichloroethane		
		Remediation Objective		**3700**			**0.004**			**140**						**0.2**			**64**			**1**			**0.42**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	**0.0022**	J		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-64-20-042815	4/28/2015	<0.0051	U		<0.011	U		<0.0089	U		<0.0089	U		<0.0089	U		**0.0022**	J		<0.006	U		<0.006	U	
		VMP-64-20-072415	7/24/2015	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		**0.0025**	J		<0.0056	U		<0.0056	U	
		VMP-64-20-102615	10/26/2015	<0.0048	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0029**	J		<0.0057	U		<0.0057	U	
		VMP-64-20-012816	1/28/2016	<0.0046	U		<0.01	U		<0.008	U		<0.008	U		<0.008	U		**0.0032**	J		<0.0054	U		<0.0054	U	
		VMP-64-20-042616	4/26/2016	<0.0048	U		<0.011	U		<0.0083	U		<0.0083	U		<0.0083	U		<0.0068	U		<0.0056	U		<0.0056	U	
		VMP-64-20-042616-DUP	4/26/2016	<0.0046	U		<0.01	U		<0.0081	U		<0.0081	U		<0.0081	U		**0.002**	J		<0.0054	U		<0.0054	U	
		VMP-64-20-072216	7/22/2016	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0029**	J		<0.0052	U		<0.0052	U	
		VMP-64-20-072216-DUP	7/22/2016	<0.0049	U		<0.011	U		<0.0085	U		<0.0085	U		<0.0085	U		**0.0027**	J		<0.0057	U		<0.0057	U	
		VMP-64-20-102416	10/24/2016	<0.004	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-64-20-102416-Dup	10/24/2016	<0.0044	U		<0.0098	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-64-20-012517	1/25/2017	<0.0044	U		<0.0099	U		<0.0077	U		<0.0077	U		<0.0077	U		**0.0021**	J		<0.0052	U		<0.0052	U	
		VMP-64-20-012517-Dup	1/25/2017	<0.0044	U		<0.0098	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0023**	J		<0.0051	U		<0.0051	U	
		VMP-64-20-042717	4/27/2017	<0.004	U		<0.009	U		<0.007	U		<0.007	U		<0.007	U		**0.0024**	J		<0.0047	U		<0.0047	U	
		VMP-64-20-072517	7/25/2017	<0.0043	U		<0.0097	U		<0.0076	U		<0.0076	U		<0.0076	U		**0.0027**	J		<0.0051	U		<0.0051	U	
		VMP-64-20-110317	11/3/2017	<0.0037	U		<0.0082	U		<0.0064	U		<0.0064	U		<0.0064	U		**0.0026**	J		<0.0043	U		<0.0043	U	
		VMP-64-20-012218	1/22/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0019**	J		<0.0049	U		<0.0049	U	
		VMP-64-20-041218	4/12/2018	<0.0041	U		<0.0092	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0027**	J		<0.0048	U		<0.0048	U	
		VMP-64-20-072318	7/23/2018	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-64-20-102518	10/25/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0019**	J		<0.0044	U		<0.0044	U	
		VMP-64-20-102518-DUP	10/25/2018	<0.0038	U		<0.0084	U		<0.0066	U		<0.0066	U		<0.0066	U		**0.0024**	J		<0.0044	U		<0.0044	U	
		VMP-64-20-012119	1/21/2019	<0.0038	U		<0.0086	U		<0.0067	U		<0.0067	U		<0.0067	U		**0.0023**	J		<0.0045	U		<0.0045	U	
		VMP-64-20-042619	4/26/2019	<0.0039	U		<0.0088	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.002**	J		<0.0046	U		<0.0046	U	
		VMP-64-20-072519	7/25/2019	<0.0045	U		<0.01	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0021**	J		<0.0053	U		<0.0053	U	
		VMP-64-20-102319	10/23/2019	<0.0044	U		<0.0099	U		<0.0078	U		<0.0078	U		<0.0078	U		**0.0025**	J		<0.0052	U		<0.0052	U	
		VMP-64-20-012820	1/28/2020	<0.005	U		<0.011	U		<0.0087	U		<0.0087	U		<0.0087	U		**0.0022**	J		<0.0058	U		<0.0058	U	
		VMP-64-20-042420	4/24/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.002**	J		<0.005	U		<0.005	U	
		VMP-64-20-042420-DUP	4/24/2020	<0.0042	U		<0.0094	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0025**	J		<0.005	U		<0.005	U	
		VMP-64-20-072420	7/24/2020	<0.0043	U		<0.0095	U		<0.0074	U		<0.0074	U		<0.0074	U		**0.0031**	J		<0.005	U		<0.005	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0043	U		<0.0096	U		<0.0075	U		<0.0075	U		<0.0075	U		**0.0032**	J		<0.005	U		<0.005	U	
		VMP-64-20-103020	10/30/2020	<0.004	U		<0.0089	U		<0.0069	U		<0.0069	U		<0.0069	U		**0.0058**			<0.0047	U		<0.0047	U	
		VMP-64-20-012221	1/22/2021	<0.0041	U		<0.0091	U		<0.0072	U		<0.0072	U		<0.0072	U		**0.0031**	J		<0.0048	U		<0.0048	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				1,1-Dichloroethene			cis-1,2-Dichloroethene			trans-1,2-Dichloroethene			Dichloromethane (Methylene chloride)			1,2-Dichloropropane			cis-1,3-Dichloropropene			trans-1,3-Dichloropropene			1,4-Dioxane		
		Remediation Objective		**110**									**110**			**0.4**			**0.5**			**0.5**			**0.1**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-64-20-042815	4/28/2015	<0.0058	U		<0.0058	U		<0.0058	U		<0.051	U		<0.0068	U		<0.0067	U		<0.0067	U		<0.021	U	
		VMP-64-20-072415	7/24/2015	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-64-20-102615	10/26/2015	<0.0056	U		<0.0056	U		<0.0056	U		**0.003**	J		<0.0065	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-64-20-012816	1/28/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.046	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-64-20-042616	4/26/2016	<0.0055	U		<0.0055	U		<0.0055	U		<0.048	U		<0.0064	U		<0.0063	U		<0.0063	U		<0.02	U	
		VMP-64-20-042616-DUP	4/26/2016	<0.0053	U		<0.0053	U		<0.0053	U		<0.047	U		<0.0062	U		<0.0061	U		<0.0061	U		<0.019	U	
		VMP-64-20-072216	7/22/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-64-20-072216-DUP	7/22/2016	<0.0056	U		<0.0056	U		<0.0056	U		**0.013**	J		<0.0066	U		<0.0064	U		<0.0064	U		<0.02	U	
		VMP-64-20-102416	10/24/2016	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-20-102416-Dup	10/24/2016	<0.0051	U		<0.0051	U		<0.0051	U		<0.044	J	U	<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-64-20-012517	1/25/2017	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-64-20-012517-Dup	1/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0059	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-64-20-042717	4/27/2017	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0054	U		<0.0053	U		<0.0053	U		<0.017	U	
		VMP-64-20-072517	7/25/2017	<0.005	U		<0.005	U		<0.005	U		<0.044	U		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-64-20-110317	11/3/2017	<0.0042	U		<0.0042	U		<0.0042	U		<0.037	U		<0.0049	U		<0.0048	U		<0.0048	U		<0.015	U	
		VMP-64-20-012218	1/22/2018	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U	UJ	<0.0056	U		<0.0055	U		<0.0055	U		<0.017	U	
		VMP-64-20-041218	4/12/2018	<0.0047	U		<0.0047	U		<0.0047	U		<0.042	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	U	
		VMP-64-20-072318	7/23/2018	<0.0048	U		<0.0048	U		<0.0048	U		**0.0022**	J		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-20-102518	10/25/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-64-20-102518-DUP	10/25/2018	<0.0043	U		<0.0043	U		<0.0043	U		<0.038	U		<0.005	U		<0.0049	U		<0.0049	U		<0.016	U	
		VMP-64-20-012119	1/21/2019	<0.0044	U		<0.0044	U		<0.0044	U		<0.039	U		<0.0052	U		<0.0051	U		<0.0051	U		<0.016	U	
		VMP-64-20-042619	4/26/2019	<0.0045	U		<0.0045	U		<0.0045	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.016	U	
		VMP-64-20-072519	7/25/2019	<0.0052	U		<0.0052	U		<0.0052	U		<0.045	U		<0.006	U		<0.0059	U		<0.0059	U		<0.019	U	
		VMP-64-20-102319	10/23/2019	<0.0051	U		<0.0051	U		<0.0051	U		<0.045	U		<0.006	U		<0.0058	U		<0.0058	U		<0.018	U	
		VMP-64-20-012820	1/28/2020	<0.0057	U		<0.0057	U		<0.0057	U		<0.05	U		<0.0067	U		<0.0066	U		<0.0066	U		<0.021	U	
		VMP-64-20-042420	4/24/2020	<0.005	U		<0.005	U		<0.005	U		**0.0017**	J		<0.0058	U		<0.0057	U		<0.0057	U		<0.018	U	
		VMP-64-20-042420-DUP	4/24/2020	<0.0048	U		<0.0048	U		<0.0048	U		<0.042	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-20-072420	7/24/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0057	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0049	U		<0.0049	U		<0.0049	U		<0.043	U		<0.0058	U		<0.0056	U		<0.0056	U		<0.018	U	
		VMP-64-20-103020	10/30/2020	<0.0046	U		<0.0046	U		<0.0046	U		<0.04	U		<0.0053	U		<0.0052	U		<0.0052	U		<0.017	U	
		VMP-64-20-012221	1/22/2021	<0.0047	U		<0.0047	U		<0.0047	U		<0.041	U		<0.0055	U		<0.0054	U		<0.0054	U		<0.017	ND,UJ	UJ

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Ethanol			Ethylbenzene			4-Ethyltoluene			Freon 113			Freon 114			Heptane			Hexachlorobutadiene			Hexane		
		Remediation Objective					**0.61**						**6500**						**300**			**0.2**			**470**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	0.014			<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.00098**	J		<0.057	U		**0.0018**	J	
		VMP-64-20-042815	4/28/2015	<0.011	U		<0.0064	U		0.0051	J		<0.011	U		<0.01	U		<0.006	U		<0.063	U		**0.0014**	J	
		VMP-64-20-072415	7/24/2015	<0.01	J	U	<0.006	U		<0.0068	U		<0.01	U		<0.0096	U		<0.0056	U		<0.059	U		<0.0049	U	
		VMP-64-20-102615	10/26/2015	<0.011	U		<0.0061	U		<0.0069	U		<0.011	U		<0.0098	U		<0.0058	U		<0.06	U		**0.0015**	J	
		VMP-64-20-012816	1/28/2016	0.0044	J		<0.0058	U		<0.0066	U		<0.01	U		<0.0094	U		**0.0022**	J		<0.057	U		**0.0035**	J	
		VMP-64-20-042616	4/26/2016	0.44		J	**0.0086**			0.008			<0.01	U		<0.0096	U		**0.0091**			<0.059	U		**0.016**		
		VMP-64-20-042616-DUP	4/26/2016	0.0096	J	J	**0.0097**			0.0085			<0.01	U		<0.0094	U		**0.01**			<0.057	U		**0.018**		
		VMP-64-20-072216	7/22/2016	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		**0.00093**	J	
		VMP-64-20-072216-DUP	7/22/2016	0.0098	J		<0.0062	U		<0.007	U		<0.011	U		<0.0099	U		**0.0049**	J		<0.06	U		<0.005	U	
		VMP-64-20-102416	10/24/2016	<0.0087	J	U	**0.00077**	J		<0.0056	U		<0.0088	U		<0.008	U		**0.002**	J		<0.049	U		**0.004**	J	
		VMP-64-20-102416-Dup	10/24/2016	<0.0096	U		<0.0056	U		<0.0063	U		<0.0098	U		<0.0089	U		<0.0052	U		<0.055	U		**0.0026**	J	
		VMP-64-20-012517	1/25/2017	0.0072	J		<0.0056	U		<0.0063	U		<0.0098	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-64-20-012517-Dup	1/25/2017	0.0089	J		<0.0055	U		<0.0062	U		<0.0097	U		<0.0089	U		<0.0052	U		<0.054	U		<0.0045	U	
		VMP-64-20-042717	4/27/2017	0.0033	J		<0.005	U		<0.0057	U		<0.0089	U		<0.0081	U		<0.0048	U		<0.05	U		<0.0041	U	
		VMP-64-20-072517	7/25/2017	0.0039	J		<0.0055	U		<0.0062	U		<0.0096	U		<0.0088	U		<0.0052	U		<0.054	U		<0.0044	U	
		VMP-64-20-110317	11/3/2017	<0.008	U		<0.0046	U		<0.0052	U		<0.0082	U		<0.0074	U		<0.0044	U		<0.045	U		<0.0038	U	
		VMP-64-20-012218	1/22/2018	0.01	J0	J	<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-64-20-041218	4/12/2018	<0.009	U		<0.0052	U		<0.0059	U		<0.0092	U		<0.0084	U		<0.0049	U		<0.051	U		<0.0042	U	
		VMP-64-20-072318	7/23/2018	0.0042	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		**0.00091**	J	
		VMP-64-20-102518	10/25/2018	<0.0082	U		<0.0047	U		<0.0054	J	U	<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		**0.0018**	J	
		VMP-64-20-102518-DUP	10/25/2018	<0.0082	U		<0.0047	U		<0.0054	U		<0.0084	U		<0.0076	U		<0.0045	U		<0.046	U		<0.0038	U	
		VMP-64-20-012119	1/21/2019	0.0068	J		**0.0014**	J		<0.0055	U		<0.0086	U		<0.0078	U		**0.0014**	J		<0.048	U		**0.0021**	J	
		VMP-64-20-042619	4/26/2019	<0.0086	U		<0.005	U		<0.0056	U		<0.0088	U		<0.008	U		<0.0047	U		<0.049	U		<0.004	U	
		VMP-64-20-072519	7/25/2019	<0.0098	U		<0.0056	U		<0.0064	U		<0.01	U		<0.0091	U		<0.0053	U		<0.055	U		<0.0046	U	
		VMP-64-20-102319	10/23/2019	<0.0097	U		<0.0056	U		<0.0063	U		<0.0099	U		<0.009	U		<0.0053	U		<0.055	U		<0.0045	U	
		VMP-64-20-012820	1/28/2020	0.0045	J		<0.0063	U		<0.0071	U		<0.011	U		<0.01	U		<0.0059	U		<0.062	U		<0.0051	U	
		VMP-64-20-042420	4/24/2020	0.0068	J		<0.0054	U		<0.0061	U		<0.0096	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-20-042420-DUP	4/24/2020	0.0085	J		<0.0053	U		<0.006	U		<0.0094	U		<0.0086	U		<0.005	U		<0.052	U		<0.0043	U	
		VMP-64-20-072420	7/24/2020	0.0056	J		<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-20-072420-DUP	7/24/2020	0.011			<0.0054	U		<0.0061	U		<0.0095	U		<0.0087	U		<0.0051	U		<0.053	U		<0.0044	U	
		VMP-64-20-103020	10/30/2020	<0.0087	U		<0.005	U		<0.0057	U		<0.0088	U		<0.0081	U		<0.0047	U		<0.049	U		<0.0041	U	
		VMP-64-20-012221	1/22/2021	0.012	J		<0.0052	U		<0.0058	U		<0.0091	U		<0.0083	U		<0.0049	U		<0.051	U		<0.0042	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				2-Hexanone (Methyl N-Butyl Ketone)			Isopentane			Isopropylbenzene (Cumene)			4-Methyl-2-pentanone (Methyl Isobutyl Ketone)			Methyl tert-Butyl Ether (MTBE)			Naphthalene			2-Propanol			n-Propylbenzene		
		Remediation Objective		**21**						**300**			**2100**			**1700**			**0.05**			**87**			**810**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	<0.022	U		0.016			<0.0066	U		<0.0055	U		<0.0048	U					**0.0061**	J		<0.0066	U	
		VMP-64-20-042815	4/28/2015	**0.002**	J		0.037			<0.0072	U		**0.0027**	J		<0.0053	U					<0.014	U		<0.0072	U	
		VMP-64-20-072415	7/24/2015	**0.0029**	J		<0.016	U		<0.0068	U		<0.0056	U		<0.005	U					**0.0044**	J		<0.0068	U	
		VMP-64-20-102615	10/26/2015	<0.023	U		<0.017	U		<0.0069	U		<0.0058	U		<0.0051	U					<0.014	U		<0.0069	U	
		VMP-64-20-012816	1/28/2016	<0.022	U		0.0028	J		<0.0066	U		<0.0055	U		<0.0048	U					**0.0065**	J		<0.0066	U	
		VMP-64-20-042616	4/26/2016	<0.023	U		0.012	J		**0.004**	J		<0.0056	U		<0.005	U					**0.016**			**0.011**		
		VMP-64-20-042616-DUP	4/26/2016	**0.001**	J		0.013	J		**0.0041**	J		<0.0055	U		<0.0048	U					**0.01**	J		**0.011**		
		VMP-64-20-072216	7/22/2016	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					**0.018**		J	<0.0063	U	
		VMP-64-20-072216-DUP	7/22/2016	<0.023	U		0.0094	J		<0.007	U		<0.0058	U		<0.02	U					**0.047**		J	<0.007	U	
		VMP-64-20-102416	10/24/2016	**0.0018**	J		0.0032	J		<0.0056	U		**0.0012**	J		<0.016	U		<0.012	U		**0.015**			<0.0056	U	
		VMP-64-20-102416-Dup	10/24/2016	<0.021	U		0.0029	J		<0.0063	U		<0.0052	U		<0.018	U		<0.013	U		**0.014**			<0.0063	U	
		VMP-64-20-012517	1/25/2017	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.018	U					**0.0058**	J		<0.0063	U	
		VMP-64-20-012517-Dup	1/25/2017	**0.0021**	J		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					**0.0066**	J		<0.0062	U	
		VMP-64-20-042717	4/27/2017	<0.019	U		<0.014	U		<0.0057	U		<0.0048	U		<0.017	U					**0.0017**	J		<0.0057	U	
		VMP-64-20-072517	7/25/2017	<0.021	U		<0.015	U		<0.0062	U		<0.0052	U		<0.018	U					<0.012	U		<0.0062	U	
		VMP-64-20-110317	11/3/2017	<0.017	U		<0.012	U		<0.0052	U		<0.0044	U		<0.015	U					<0.01	U		<0.0052	U	
		VMP-64-20-012218	1/22/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					**0.0094**	J		<0.0059	U	
		VMP-64-20-041218	4/12/2018	<0.02	U		<0.014	U		<0.0059	U		<0.0049	U		<0.017	U					<0.012	U		<0.0059	U	
		VMP-64-20-072318	7/23/2018	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0028**	J		<0.006	U	
		VMP-64-20-102518	10/25/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-64-20-102518-DUP	10/25/2018	<0.018	U		<0.013	U		<0.0054	U		<0.0045	U		<0.016	U					<0.011	U		<0.0054	U	
		VMP-64-20-012119	1/21/2019	<0.018	U		0.004	J		<0.0055	U		<0.0046	U		<0.016	U					**0.0024**	J		<0.0055	U	
		VMP-64-20-042619	4/26/2019	<0.019	U		<0.014	U		<0.0056	U		<0.0047	U		<0.016	U					**0.0068**	J		<0.0056	U	
		VMP-64-20-072519	7/25/2019	<0.021	U		<0.015	U		<0.0064	U		<0.0053	U		<0.019	U					<0.013	U		<0.0064	U	
		VMP-64-20-102319	10/23/2019	<0.021	U		<0.015	U		<0.0063	U		<0.0053	U		<0.019	U					<0.013	U		<0.0063	U	
		VMP-64-20-012820	1/28/2020	<0.024	U		<0.017	U		<0.0071	U		<0.0059	U		<0.021	U					**0.0015**	J		<0.0071	U	
		VMP-64-20-042420	4/24/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0098**	J		<0.0061	U	
		VMP-64-20-042420-DUP	4/24/2020	<0.02	U		<0.014	U		<0.006	U		<0.005	U		<0.018	U					**0.0088**	J		<0.006	U	
		VMP-64-20-072420	7/24/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.003**	J		<0.0061	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.02	U		<0.015	U		<0.0061	U		<0.0051	U		<0.018	U					**0.0065**	J		<0.0061	U	
		VMP-64-20-103020	10/30/2020	<0.019	U		<0.014	U		<0.0057	U		<0.0047	U		<0.017	U					**0.0049**	J		<0.0057	U	
		VMP-64-20-012221	1/22/2021	<0.019	U		0.0029	J		<0.0058	U		<0.0049	U		<0.017	U					**0.0069**	J		<0.0058	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Styrene			1,1,2,2-Tetrachloroethane			Tetrachloroethene			Tetrahydrofuran			Toluene			1,2,4-Trichlorobenzene			1,1,1-Trichloroethane (Methyl chloroform)			1,1,2-Trichloroethane		
		Remediation Objective		690			0.04			6.1			980			2800			3.3			3100			0.1		
Location	Depth	Sample ID	Sample Date	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	<0.0057	U		<0.0092	U		**0.17**			**0.0016**	J		**0.0066**			<0.04	U		**0.0029**	J		<0.0073	U	
		VMP-64-20-042815	4/28/2015	<0.0063	U		<0.01	U		**0.092**			<0.0043	U		<0.0056	U		<0.044	U		**0.0018**	J		<0.008	U	
		VMP-64-20-072415	7/24/2015	<0.0059	U		<0.0095	U		**0.03**			<0.0041	U		<0.0052	U		<0.041	U		<0.0075	U		<0.0075	U	
		VMP-64-20-102615	10/26/2015	<0.006	U		<0.0097	U		**0.11**			<0.0042	U		**0.0016**	J		<0.042	U		**0.003**	J		<0.0077	U	
		VMP-64-20-012816	1/28/2016	<0.0057	U		<0.0092	U		**0.12**			<0.004	U		<0.005	U		<0.04	U		**0.0016**	J		<0.0073	U	
		VMP-64-20-042616	4/26/2016	<0.0059	U		<0.0095	U		**0.032**			<0.0041	U		**0.019**			<0.041	U		<0.0075	U		<0.0075	U	
		VMP-64-20-042616-DUP	4/26/2016	<0.0057	U		<0.0092	U		**0.034**			<0.004	U		**0.021**			<0.04	U		<0.0073	U		<0.0073	U	
		VMP-64-20-072216	7/22/2016	<0.0055	U		<0.0088	U		**0.12**			<0.0038	U		<0.0049	U		<0.038	U		**0.002**	J		<0.007	U	
		VMP-64-20-072216-DUP	7/22/2016	<0.006	U		<0.0097	U		**0.11**			<0.0042	U		**0.0018**	J		<0.042	U		**0.004**	J		<0.0077	U	
		VMP-64-20-102416	10/24/2016	<0.0049	U		<0.0079	U		**0.048**			<0.0034	U		**0.00089**	J		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-64-20-102416-Dup	10/24/2016	<0.0054	U		<0.0088	U		**0.048**			<0.0038	U		<0.0048	U		<0.038	U		<0.007	U		<0.007	U	
		VMP-64-20-012517	1/25/2017	<0.0055	U		<0.0088	U		**0.058**			<0.0038	U		**0.00068**	J		<0.038	U		<0.007	U		<0.007	U	
		VMP-64-20-012517-Dup	1/25/2017	<0.0054	U		<0.0087	U		**0.056**			<0.0037	U		**0.001**	J		<0.038	U		<0.0069	U		<0.0069	U	
		VMP-64-20-042717	4/27/2017	<0.005	U		<0.008	U		**0.025**			<0.0034	U		<0.0044	U		<0.034	U		<0.0064	U		<0.0064	U	
		VMP-64-20-072517	7/25/2017	<0.0054	U		<0.0086	U		**0.052**			<0.0037	U		**0.00031**	J		<0.037	U		**0.001**	J		<0.0069	U	
		VMP-64-20-110317	11/3/2017	<0.0045	U		<0.0073	U		**0.035**			<0.0031	U		**0.00058**	J		<0.032	U		<0.0058	U		<0.0058	U	
		VMP-64-20-012218	1/22/2018	<0.0051	U		<0.0083	U		**0.26**			<0.0036	U		<0.0045	U		<0.036	U		**0.003**	J		<0.0066	U	
		VMP-64-20-041218	4/12/2018	<0.0051	U		<0.0082	U		**0.18**			<0.0035	U		<0.0045	U		<0.035	U		**0.0018**	J		<0.0065	U	
		VMP-64-20-072318	7/23/2018	<0.0052	U		<0.0084	U		**0.05**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-64-20-102518	10/25/2018	<0.0046	U		<0.0075	U		**0.14**			<0.0032	U		<0.0041	U		<0.032	U		**0.0012**	J		<0.0059	U	
		VMP-64-20-102518-DUP	10/25/2018	<0.0046	U		<0.0075	U		**0.14**			<0.0032	U		<0.0041	U		<0.032	U		**0.0015**	J		<0.0059	U	
		VMP-64-20-012119	1/21/2019	<0.0048	U		<0.0077	U		**0.14**			<0.0033	U		**0.0054**			<0.033	U		<0.0061	U		<0.0061	U	
		VMP-64-20-042619	4/26/2019	<0.0049	U		<0.0079	U		**0.024**			<0.0034	U		<0.0043	U		<0.034	U		<0.0062	U		<0.0062	U	
		VMP-64-20-072519	7/25/2019	<0.0055	U		<0.0089	U		**0.062**			<0.0038	U		<0.0049	U		<0.038	U		<0.0071	U		<0.0071	U	
		VMP-64-20-102319	10/23/2019	<0.0055	U		<0.0088	U		**0.14**			<0.0038	U		<0.0049	U		<0.038	U		**0.0017**	J		<0.007	U	
		VMP-64-20-012820	1/28/2020	<0.0062	U		<0.0099	U		**0.29**			<0.0043	U		<0.0054	U		<0.043	U		**0.0024**	J		<0.0079	U	
		VMP-64-20-042420	4/24/2020	<0.0053	U		<0.0086	U		**0.033**			<0.0037	U		<0.0047	U		<0.037	U		<0.0068	U		<0.0068	U	
		VMP-64-20-042420-DUP	4/24/2020	<0.0052	U		<0.0084	U		**0.032**			<0.0036	U		<0.0046	U		<0.036	U		<0.0067	U		<0.0067	U	
		VMP-64-20-072420	7/24/2020	<0.0053	U		<0.0085	U		**0.12**			<0.0036	U		<0.0047	U		<0.037	U		**0.0017**	J		<0.0068	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0053	U		<0.0085	U		**0.13**			<0.0037	U		<0.0047	U		<0.037	U		**0.0015**	J		<0.0068	U	
		VMP-64-20-103020	10/30/2020	<0.0049	U		<0.0079	U		**0.052**			<0.0034	U		<0.0044	U		<0.034	U		<0.0063	U		<0.0063	U	
		VMP-64-20-012221	1/22/2021	<0.0051	U		<0.0082	ND,UJ	UJ	**0.024**			<0.0035	U		<0.0045	U		<0.035	U		<0.0065	U		<0.0065	U	

SEE LAST PAGE OF TABLE FOR NOTES

ATTACHMENT 3
SOIL VAPOR ANALYTICAL DETECTIONS 1Q15 - 1Q21 COMPARED TO REMEDIATION OBJECTIVES - VILLAGE AND PUBLIC WORKS YARD

				Trichloroethene			Trichlorofluoromethane			1,2,4-Trimethylbenzene			1,3,5-Trimethylbenzene			2,2,4-Trimethylpentane			Vinyl chloride			m,p-Xylenes			o-Xylenes		
		Remediation Objective		**0.35**						**48**			**49**						**0.1**						**56**		
Location	**Depth**	**Sample ID**	**Sample Date**	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals	Result (mg/m3)	Lab Quals	AECOM Quals
	20 ft	VMP-64-20-020315	2/3/2015	<0.0072	U		<0.0076	U		<0.0066	U		<0.0066	U		0.0044	J		<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-64-20-042815	4/28/2015	<0.0079	U		<0.0083	U		**0.0076**			**0.0021**	J		<0.0069	U		<0.0038	U		0.0029	J		**0.0017**	J	
		VMP-64-20-072415	7/24/2015	<0.0074	U		<0.0078	J	U	<0.0068	U		<0.0068	U		0.0018	J		<0.0035	U		0.0016	J		<0.006	U	
		VMP-64-20-102615	10/26/2015	<0.0076	U		<0.0079	U		<0.0069	U		<0.0069	U		0.00087	J		<0.0036	U		<0.0061	U		<0.0061	U	
		VMP-64-20-012816	1/28/2016	<0.0072	U		<0.0075	U		<0.0066	U		<0.0066	U		0.014			<0.0034	U		<0.0058	U		<0.0058	U	
		VMP-64-20-042616	4/26/2016	<0.0074	U		<0.0078	U		**0.011**			**0.0022**	J		0.07			<0.0035	U		0.019			**0.0063**		
		VMP-64-20-042616-DUP	4/26/2016	<0.0072	U		<0.0076	U		**0.01**			**0.002**	J		0.078			<0.0034	U		0.019			**0.0065**		
		VMP-64-20-072216	7/22/2016	<0.0069	U		0.0023	J		<0.0063	U		<0.0063	U		0.0023	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-64-20-072216-DUP	7/22/2016	<0.0076	U		0.0013	J		<0.007	U		<0.007	U		0.0051	J		<0.0036	U		<0.0062	U		<0.0062	U	
		VMP-64-20-102416	10/24/2016	**0.002**	J		0.0013	J		<0.0056	U		<0.0056	U		0.0029	J		<0.0029	U		0.0017	J		<0.005	U	
		VMP-64-20-102416-Dup	10/24/2016	<0.0069	U		0.0012	J		<0.0063	U		<0.0063	U		0.0024	J		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-64-20-012517	1/25/2017	<0.0069	U		<0.0072	U		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-64-20-012517-Dup	1/25/2017	<0.0068	U		<0.0071	U		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-64-20-042717	4/27/2017	<0.0063	U		0.0015	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-64-20-072517	7/25/2017	<0.0068	U		0.0015	J		<0.0062	U		<0.0062	U		<0.0059	U		<0.0032	U		<0.0055	U		<0.0055	U	
		VMP-64-20-110317	11/3/2017	<0.0057	U		0.0013	J		<0.0052	U		<0.0052	U		<0.005	U		<0.0027	U		<0.0046	U		<0.0046	U	
		VMP-64-20-012218	1/22/2018	<0.0065	U		0.00095	J		<0.0059	U		<0.0059	U		<0.0056	U		<0.0031	U		<0.0052	U		<0.0052	U	
		VMP-64-20-041218	4/12/2018	<0.0064	U		<0.0067	U		<0.0059	U		<0.0059	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	
		VMP-64-20-072318	7/23/2018	<0.0066	U		<0.0069	U		**0.00067**	J		<0.006	U		0.0026	J		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-64-20-102518	10/25/2018	<0.0058	U		0.0011	J		**0.0073**			**0.002**	J		<0.0051	U		<0.0028	U		0.0021	J		**0.0014**	J	
		VMP-64-20-102518-DUP	10/25/2018	<0.0058	U		0.0012	J		<0.0054	U		<0.0054	U		<0.0051	U		<0.0028	U		<0.0047	U		<0.0047	U	
		VMP-64-20-012119	1/21/2019	**0.0027**	J		<0.0063	U		<0.0055	U		<0.0055	U		0.0022	J		<0.0029	U		0.0039	J		<0.0049	U	
		VMP-64-20-042619	4/26/2019	<0.0062	U		0.0012	J		<0.0056	U		<0.0056	U		<0.0053	U		<0.0029	U		<0.005	U		<0.005	U	
		VMP-64-20-072519	7/25/2019	<0.007	U		0.0012	J		<0.0064	U		<0.0064	U		<0.0061	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-64-20-102319	10/23/2019	<0.0069	U		0.00094	J		<0.0063	U		<0.0063	U		<0.006	U		<0.0033	U		<0.0056	U		<0.0056	U	
		VMP-64-20-012820	1/28/2020	<0.0078	U		<0.0081	U		<0.0071	U		<0.0071	U		<0.0068	U		<0.0037	U		<0.0063	U		<0.0063	U	
		VMP-64-20-042420	4/24/2020	<0.0067	U		0.0012	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-20-042420-DUP	4/24/2020	<0.0066	U		0.0012	J		<0.006	U		<0.006	U		<0.0057	U		<0.0031	U		<0.0053	U		<0.0053	U	
		VMP-64-20-072420	7/24/2020	<0.0067	U		0.0018	J		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-20-072420-DUP	7/24/2020	<0.0067	U		<0.007	U		<0.0061	U		<0.0061	U		<0.0058	U		<0.0032	U		<0.0054	U		<0.0054	U	
		VMP-64-20-103020	10/30/2020	<0.0062	U		0.0014	J		<0.0057	U		<0.0057	U		<0.0054	U		<0.003	U		<0.005	U		<0.005	U	
		VMP-64-20-012221	1/22/2021	<0.0064	U		<0.0067	U		<0.0058	U		<0.0058	U		<0.0056	U		<0.003	U		<0.0052	U		<0.0052	U	

Notes:
Bold results are detections above the RL, or estimated detections between the MDL and RL.
Yellow highlighted cells indicate readings that exceed recalculated residential remedial objectives screening criterion.
Blank cells in Result column indicate that analyte was not on target analyte list.

Lab Qualifiers
J = Estimated value; results between the MDL and RL
U = Compound analyzed for but not detected above the RL
CN = Indicates potential high bias due to use of Tedlar© bag for off-line dilution
ND,UJ = Non-detected compound associated with low bias in the continuing calibration verification (CCV)
J0 = Estimated value due to bias in the CCV
E = Exceeds instrument calibration range.

AECOM Qualifiers
J = Estimated detection
UJ = Estimated non-detect
U = Non-detect due to blank contamination